

FCC AND ISED CERTIFICATION TEST REPORT

FOR

Applicant	:	Fender Musical Instruments
Address	:	17600 North Perimeter Drive, Suite 100, Scottsdale, AZ 85255 USA
Equipment under Test	:	Guitar Headphone Amplifier
Model No.	:	MUSTANG MICRO PLUS
TYPE	:	PR 6171
FCC ID	:	XQW-MUMPPR6171
IC	:	8690A-MUMPPR6171
Manufacturer	:	Fender Musical Instruments
Address	:	17600 North Perimeter Drive, Suite 100, Scottsdale, AZ 85255 USA

Issued By: Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park,

Dongguan, Guangdong, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

Test report declares.....	4
1. Summary of Test Results.....	6
2. General Test Information	7
2.1. Description of EUT	7
2.2. Accessories of EUT	7
2.3. Assistant equipment used for test.....	7
2.4. Test Sample Information	7
2.5. Block diagram of EUT configuration for test	8
2.6. Test environment conditions	8
2.7. Deviations of test standard.....	8
2.8. Test laboratory	8
2.9. Measurement uncertainty.....	9
3. Equipment Used During Test.....	10
3.1. Equipment Used During Conductive Test.....	10
3.2. Radiated Emission Test equipment	10
3.3. Power Line Conducted Emission Test Equipment	10
4. 6 dB Bandwidth and 99% Bandwidth.....	11
4.1. Block diagram of test setup.....	11
4.2. Limits	11
4.3. Test procedure	11
4.4. Test result.....	12
4.5. Original test data	12
5. Maximum Peak Output Power	17
5.1. Block diagram of test setup.....	17
5.2. Limits	17
5.3. Test procedure	17
5.4. Test result.....	17
5.5. Original test data	18
6. Power Spectral Density	23
6.1. Block diagram of test setup.....	23
6.2. Limits	23
6.3. Test procedure	23
6.4. Test result.....	23
6.5. Original test data	24
7. Band Edge Compliance (Conducted Method)	29
7.1. Block diagram of test setup.....	29
7.2. Limits	29
7.3. Test procedure	29

7.4.	Test result.....	30
7.5.	Original test data	30
8.	Radiated Emission	33
8.1.	Block diagram of test setup.....	33
8.2.	Limit.....	34
8.3.	Test Procedure.....	36
8.4.	Test result.....	37
9.	RF Conducted Spurious Emissions	54
9.1.	Block diagram of test setup.....	54
9.2.	Limits	54
9.3.	Test procedure	54
9.4.	Test result.....	55
9.5.	Original test data	55
10.	Emissions in Restricted Frequency Bands	68
10.1.	Block diagram of test setup.....	68
10.2.	Limit.....	68
10.3.	Test procedure	68
10.4.	Test result.....	68
11.	Power Line Conducted Emission	77
11.1.	Block diagram of test setup.....	77
11.2.	Power line conducted emission limits	77
11.3.	Test procedure	77
11.4.	Test result.....	78
12.	Antenna Requirements	81
12.1.	Limit.....	81
12.2.	Result	81
13.	Test Setup Photograph	82
14.	Photos of the EUT	84

Test Report Declare

Applicant	:	Fender Musical Instruments
Address	:	17600 North Perimeter Drive, Suite 100, Scottsdale, AZ 85255 USA
Equipment under Test	:	Guitar Headphone Amplifier
Model No.	:	MUSTANG MICRO PLUS
TYPE	:	PR 6171
Manufacturer	:	Fender Musical Instruments
Address	:	17600 North Perimeter Drive, Suite 100, Scottsdale, AZ 85255 USA

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test procedure used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021).

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No.:	DDT-RE23090520-2E02		
Date of Receipt:	Sep. 12, 2023	Date of Test:	Sep. 13, 2023 ~ Dec. 11, 2023

Prepared By:**Jacky Huang/Engineer****Approved By:****Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Dec. 11, 2023	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013 RSS-247 Issue 2 RSS-GEN 6.7	Pass
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Power Spectral Density	FCC Part 15:15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Band Edge Compliance (Conducted Method)	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Radiation Emission	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
RF Conducted Spurious Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Emission In Restricted Frequency Bands	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2013 RSS-Gen Issue 5	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass
Note: EUT has two alternative chip Crystal oscillator (Y2, 32MHz): model CXA-032000-ADCD41 (AKER TECHNOLOGY CO., LTD.) and model Y32000w037 (JinHua East Crystal Electronic Co., Ltd.). The main difference between the two crystal oscillators is that they are manufactured by different manufacturers. In this report, Maximum Peak Output Power, Band Edge Compliance, Power Spectral Density, RF Conducted Spurious Emission, Power Line Conducted Emission and Radiated Emission are tested on two crystal oscillator products, and the remaining items are tested on crystal oscillator model CXA-032000-ADCD41.		

2. General Test Information

2.1. Description of EUT

EUT Name	: Guitar Headphone Amplifier
Model Number	: MUSTANG MICRO PLUS
EUT Function Description	: Please reference user manual of this device
Power Supply	: Powered by DC 5V external adapter or 3.85V built-in lithium battery
Radio Specification	: Bluetooth V5.1
Operation Frequency	: 2402 MHz - 2480 MHz
Modulation	: GFSK
Data Rate	: 1 Mbps, 2 Mbps
Antenna	: Ceramic antenna, maximum PK gain: 2.09 dBi
Sample Number	: 23090520-06 and S23090520-15 for radiated, S23090520-05 and S23090520-16 for conducted

Note: EUT is the abbreviation of equipment under test.

Channel Information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Other
Charging cable	GP Electronics	N/A	N/A


2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Laptop	Lenovo	X201	N/A	00154-290-415-484
Adapter	SAMSUNG	EP-TA200	N/A	N/A

2.4. Test Sample Information

Test Sample Number	Test method	Crystal Oscillator model	Crystal Oscillator Manufacturer	Description
S23090520-05	conducted	CXA-032000-ADCD41	AKER TECHNOLOGY CO., LTD.	Crystal Oscillator is alternative
S23090520-06	radiated			
S23090520-15	radiated	Y32000w037	JinHua East Crystal Electronic Co., Ltd.	
S23090520-16	conducted			

2.5. Block diagram of EUT configuration for test



The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Test software: BlueTest3.exe, Version3.3.2

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table:

Tested Mode, Channel, Information			
Test Mode	Setting Tx Power	Channel	Frequency (MHz)
BLE_1M Tx mode	default	CH0	2402
	default	CH19	2440
	default	CH39	2480
BLE_2M Tx mode	default	CH0	2402
	default	CH19	2440
	default	CH39	2480

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20-75%
Pressure range:	86-106 kPa

2.7. Deviations of test standard

No deviation.

2.8. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.9. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted Spurious Emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for Radio Frequency (RBW<20 KHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission Test (9kHz -30 Mhz)	3.44 dB
Uncertainty for Radiation Emission Test (30 Mhz-1 Ghz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 Ghz-40 Ghz)	4.10 dB (1-6 GHz) 4.40 dB (6 GHz-18 GHz) 3.54 dB (18 GHz-26 GHz) 4.30 dB (26 GHz-40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.32 dB (150 kHz-30 MHz)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Equipment Used During Test

3.1. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 4#)				
Signal & Spectrum Analyzer	R&S	FSV3044	101173	2024/04/22
Wideband Radio Communication Tester	R&S	CMW500	168801	2024/04/26
MXG Vector Signal Generator	Agilent	N5182A	MY48180737	2024/04/26
PSG Vector Signal Generator	Agilent	E8267D	US49060192	2024/09/05
RF Control Unit	Tonsend	JS0806-2	2118060485	2024/04/26
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2024/05/14
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

3.2. Radiated Emission Test equipment


Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑Radiation 3#chamber				
EMI TEST RECEIVER	R&S	ESU26	100472	2024/04/22
PSA Series Spectrum Analyzer	Agilent	E4447A	MY50180031	2024/04/22
Active Loop Antenna	Schwarzbeck	FMZB-1519	1519-038	2024/09/10
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	2024/07/11
Double Ridged Horn Antenna	Schwarzbeck	BBHA 9120 D	02468	2024/09/17
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	2024/04/25
Pre-amplifier	COM-POWER	PAM-118A	18040084	2024/07/14
Pre-amplifier	COM-POWER	PAM-840A	461369	2024/04/26
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ-1.5M	4.5M+8M+1.5M	2024/04/20
RF Cable	Yuhu	JCTB810-NJ-NJ-9M+ ZT26S-SMAJ-SMAJ-1M	21123964	2024/04/22
Band Reject Filter (2400-2500 MHz)	REBES	BRM50702	G555	N/A
Test Software	Tonscend	JS32-RE	V 5.0.0.1	N/A

3.3. Power Line Conducted Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑Power Line Conducted Emissions Test 1#				
Test Receiver	R&S	ESCI	100551	2024/07/10
LISN 1	R&S	ENV216	101109	2024/07/10
LISN 2	R&S	ESH2-Z5	100309	2024/07/11
Pulse Limiter	R&S	ESH3-Z2	101242	2024/07/14
CE Cable 1	HUBSER	N/A	W10.01	2024/07/14
Test software	Audix	E3	V 6.11111b	N/A

4. 6 dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

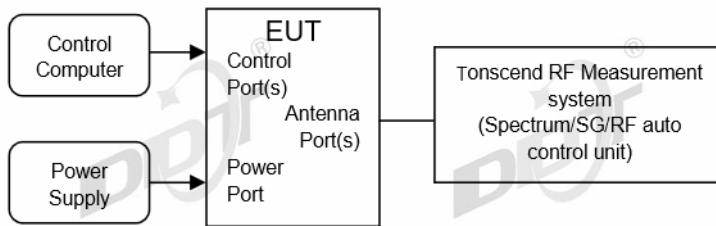

4.2. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz

4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW:	30 kHz
VBW:	100 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) 6 dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(4) Allow the trace to stabilize, measure the 6 dB and 99% bandwidth of signal.

Note:

- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).

4.4. Test result


Test Mode	Channel	99% bandwidth Result (MHz)	6 dB bandwidth Result (MHz)	6 dB width Limit (MHz)	Verdict
BLE_1M	CH0	1.041	0.71	>0.5	Pass
	CH19	1.041	0.71	>0.5	Pass
	CH39	1.040	0.71	>0.5	Pass
BLE_2M	CH0	2.060	1.27	>0.5	Pass
	CH19	2.058	1.26	>0.5	Pass
	CH39	2.056	1.26	>0.5	Pass

4.5. Original test data

6dB bandwidth:




BLE 1M Ant1 2480

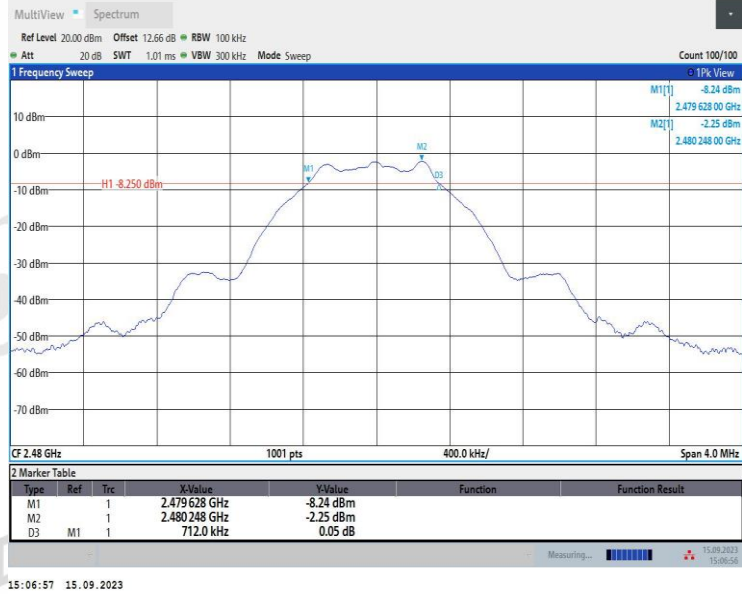

BLE 2M Ant1 2402




BLE 2M Ant1 2440

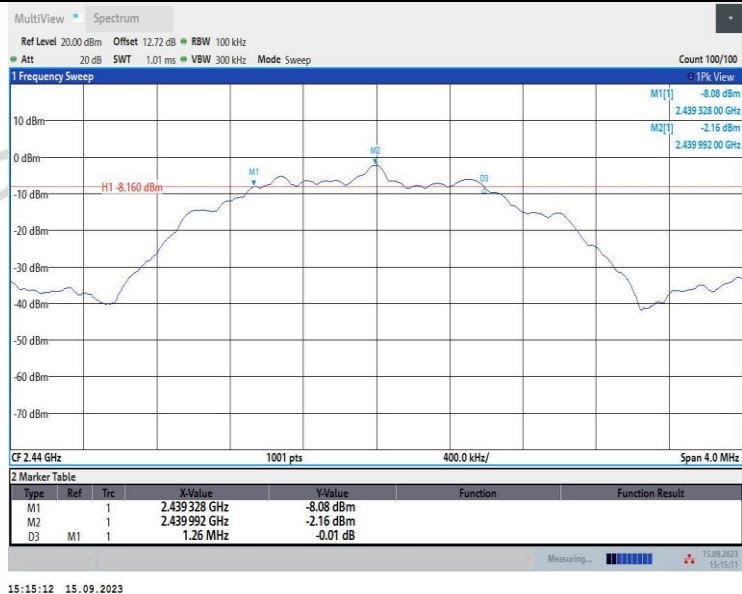





99% Bandwidth:

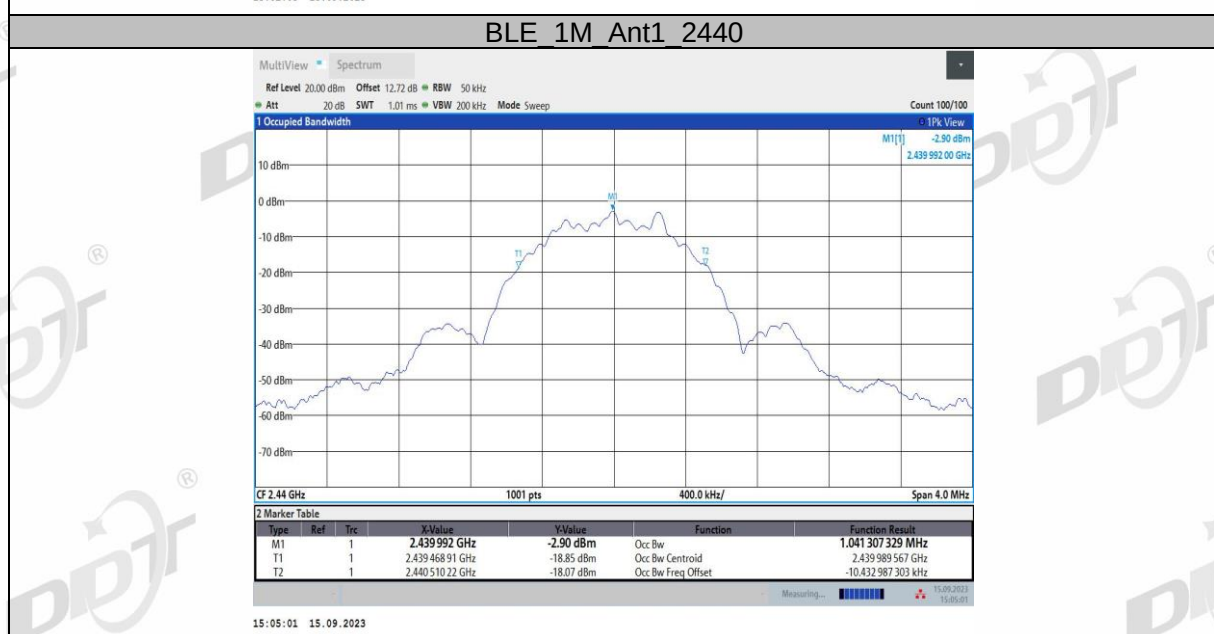


BLE 1M Ant1 2480

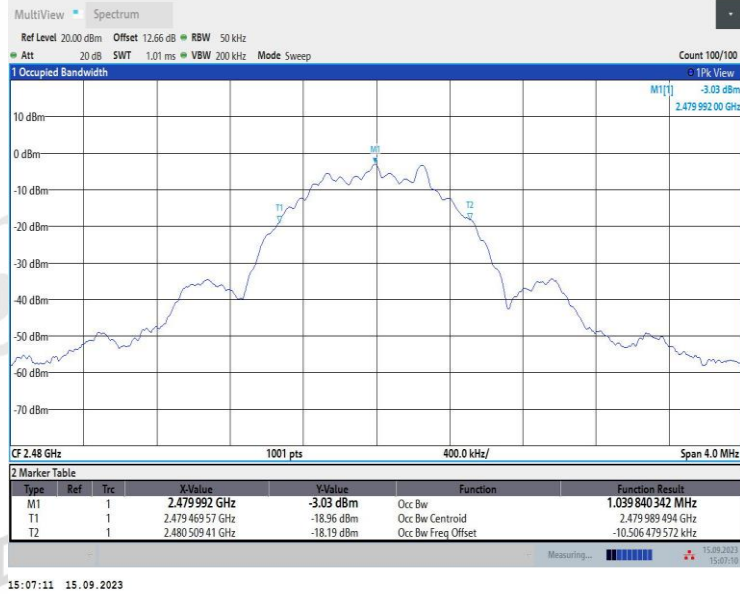


BLE 2M Ant1 2402

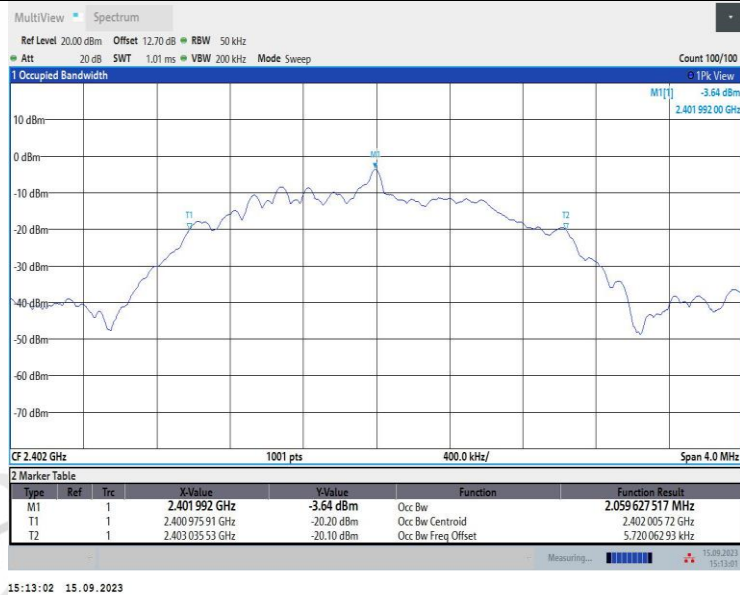

BLE 2M Ant1 2440

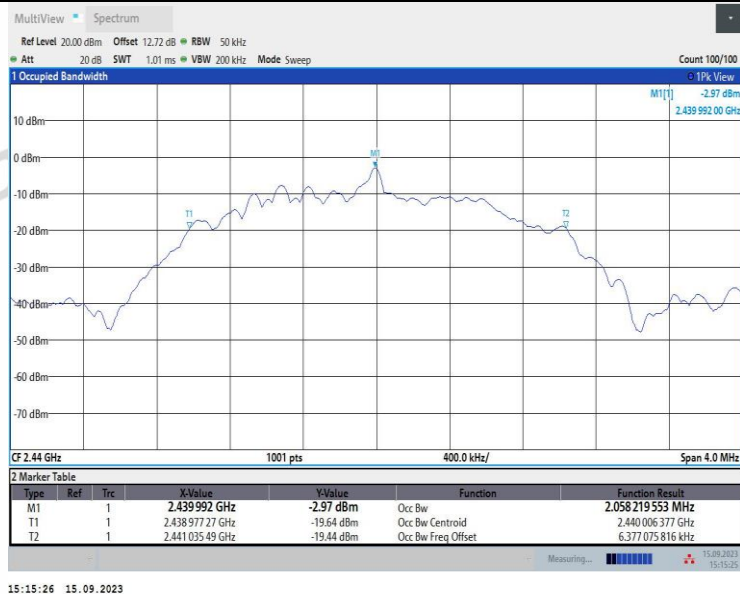

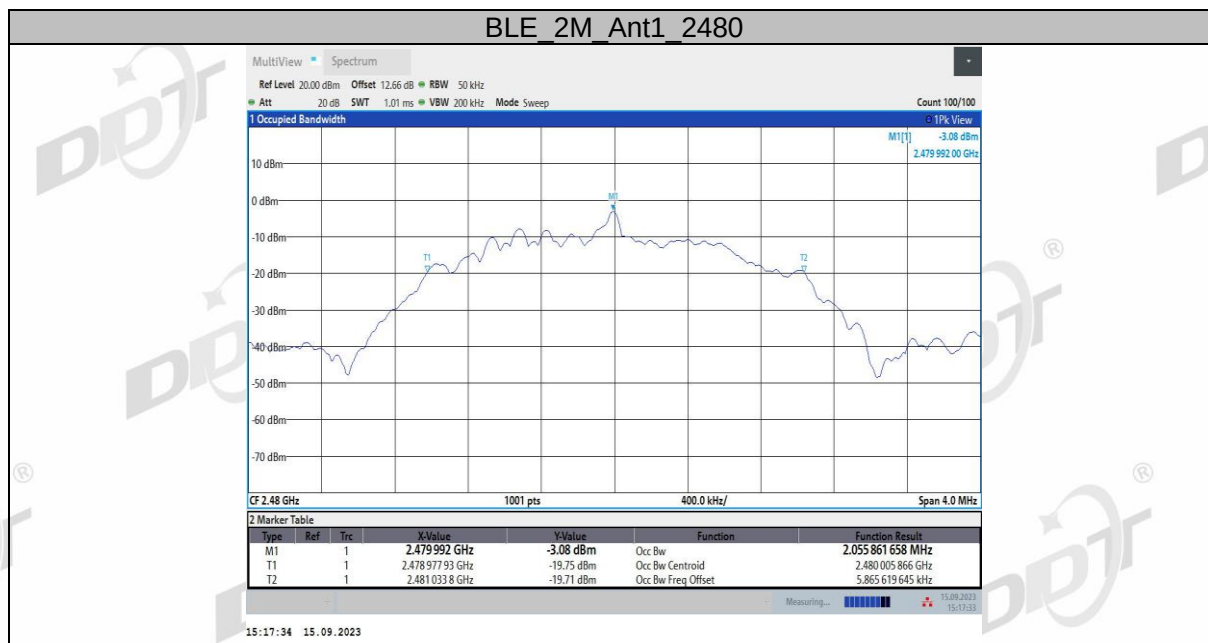

5. Maximum Peak Output Power

5.1. Block diagram of test setup

Same with 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

RBW:	≥DTS bandwidth
VBW:	≥3 x RBW
Span	≥3 x RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges measure out the PK output power.

Note:

- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).

5.4. Test result

Sample S23090520-05:


Test Mode	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	e.i.r.p (dBm)	Limit (dBm)	Verdict
BLE_1M	2402	-2.61	≤30	-0.52	≤36	Pass
	2440	-1.98	≤30	0.11	≤36	Pass
	2480	-2.11	≤30	-0.02	≤36	Pass
BLE_2M	2402	-2.34	≤30	-0.25	≤36	Pass
	2440	-1.91	≤30	0.18	≤36	Pass
	2480	-2.05	≤30	0.04	≤36	Pass

Sample S23090520-16:


Test Mode	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	e.i.r.p (dBm)	Limit (dBm)	Verdict
BLE_1M	2402	-2.70	≤30	-0.61	≤36	Pass
	2440	-1.82	≤30	0.27	≤36	Pass
	2480	-1.95	≤30	0.14	≤36	Pass
BLE_2M	2402	-2.69	≤30	-0.60	≤36	Pass
	2440	-2.19	≤30	-0.10	≤36	Pass
	2480	-2.23	≤30	-0.14	≤36	Pass

5.5. Original test data


Sample S23090520-05:

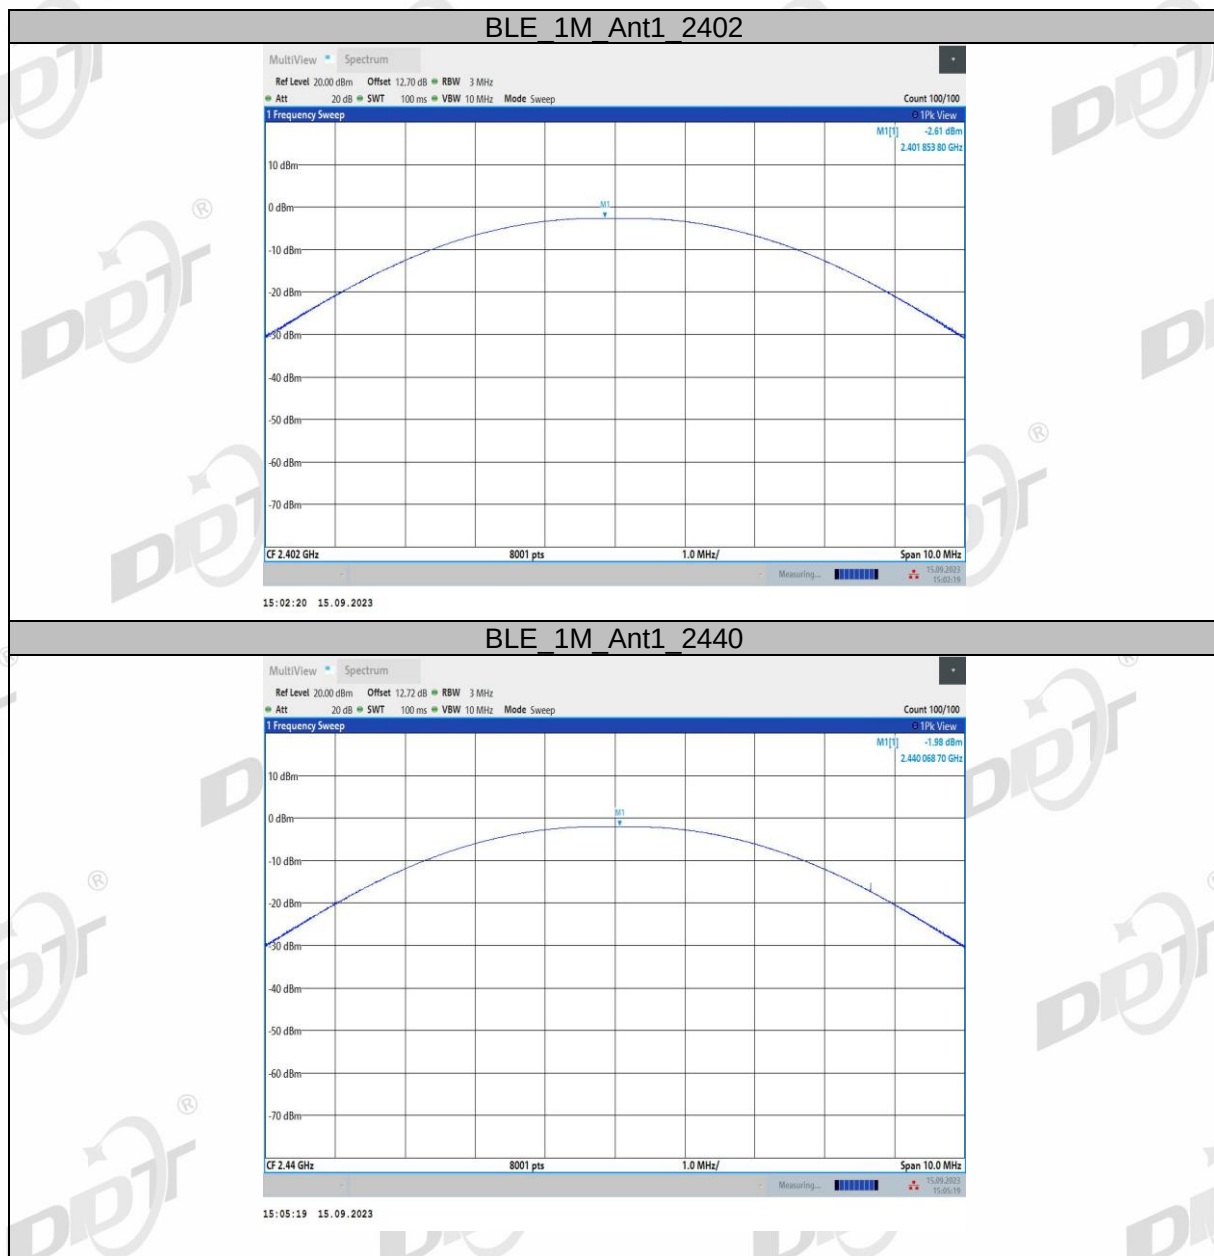


BLE_1M_Ant1_2480

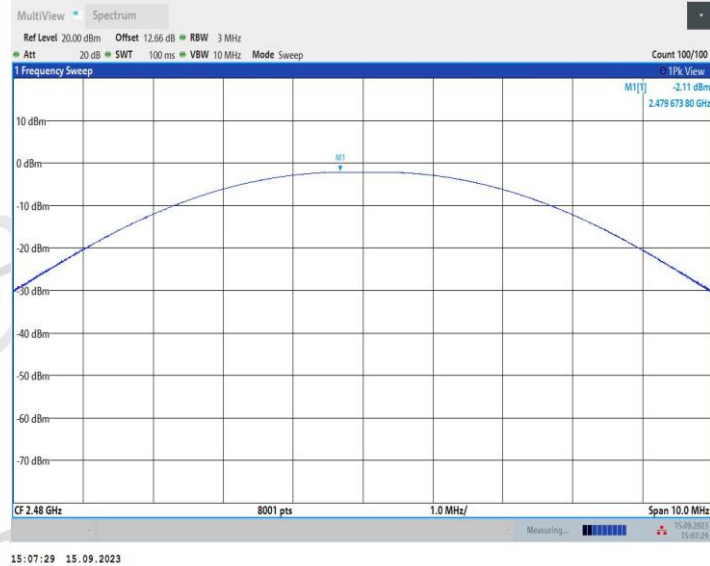

BLE_2M_Ant1_2402


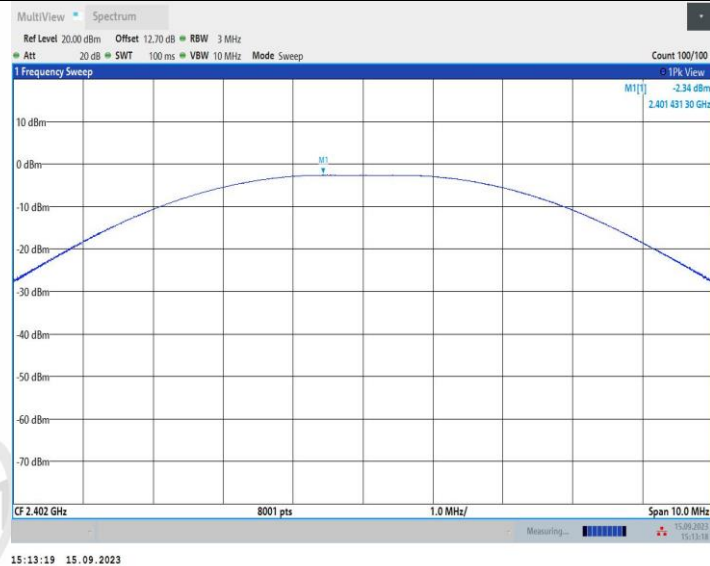


BLE_2M_Ant1_2440

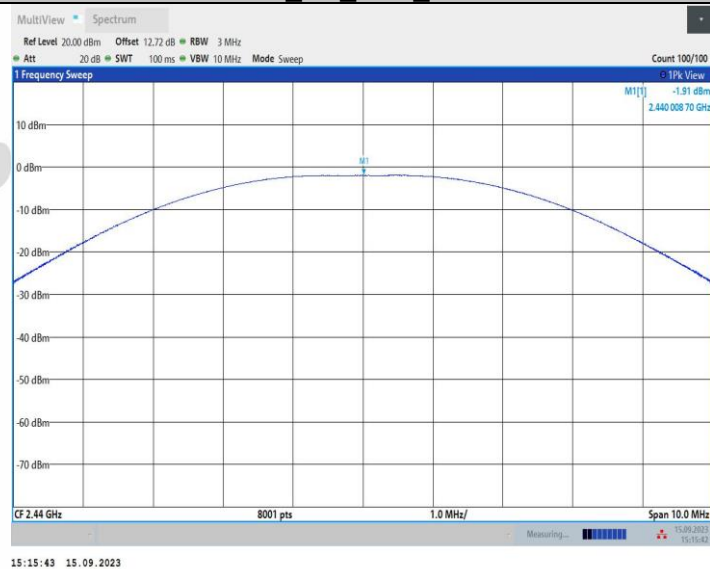





Sample S23090520-16:

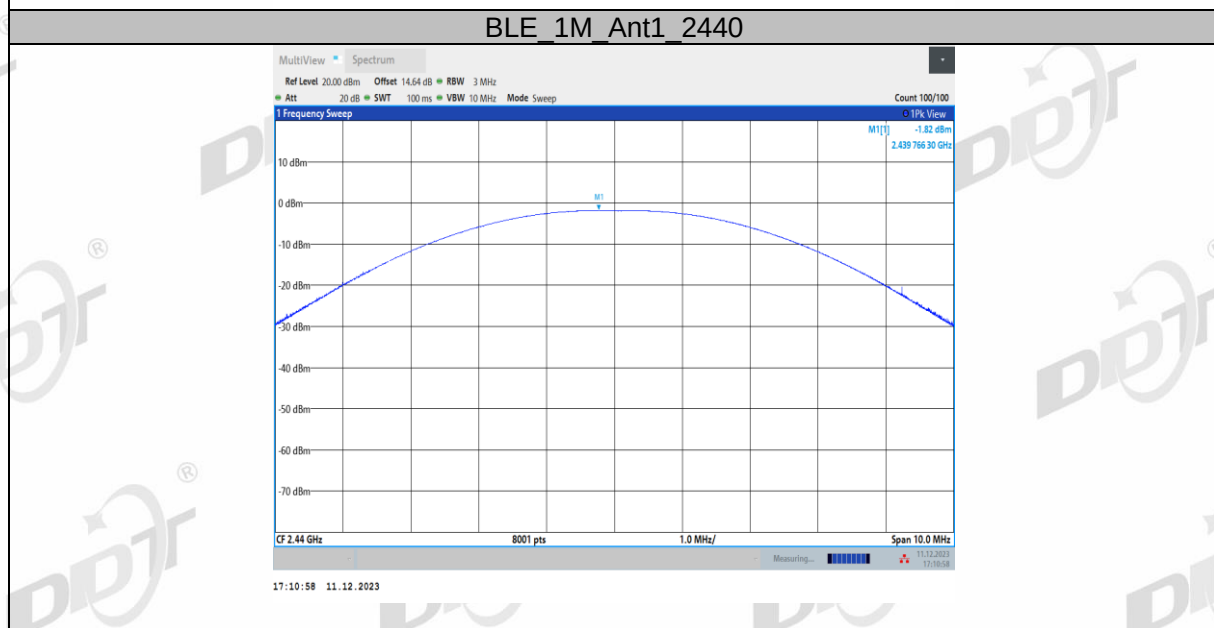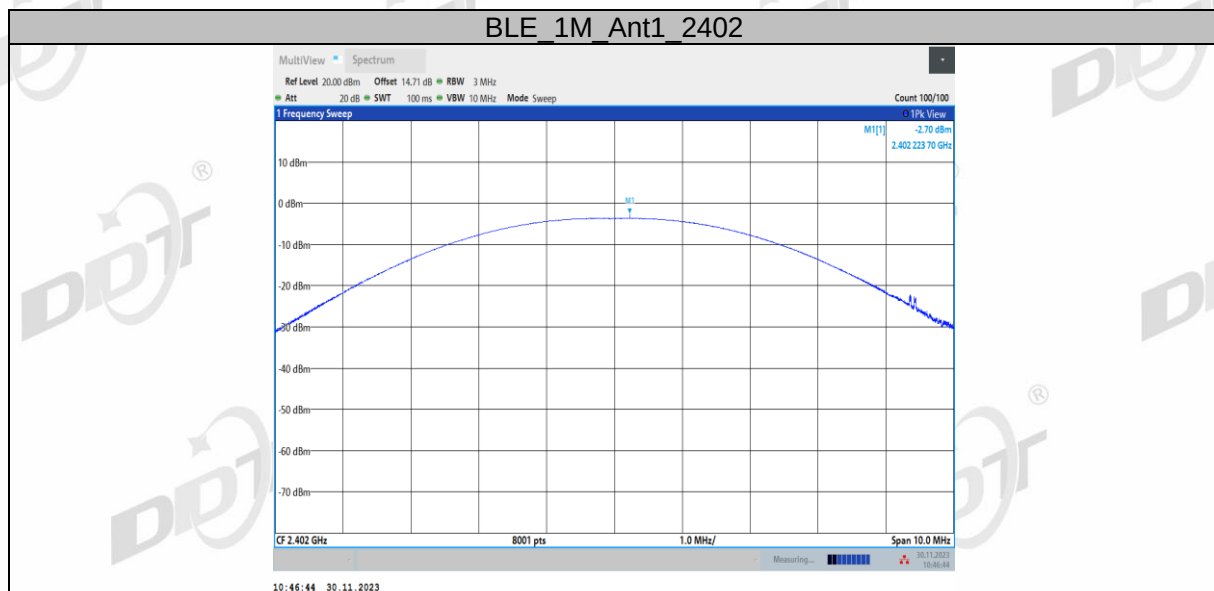


BLE 1M Ant1 2480

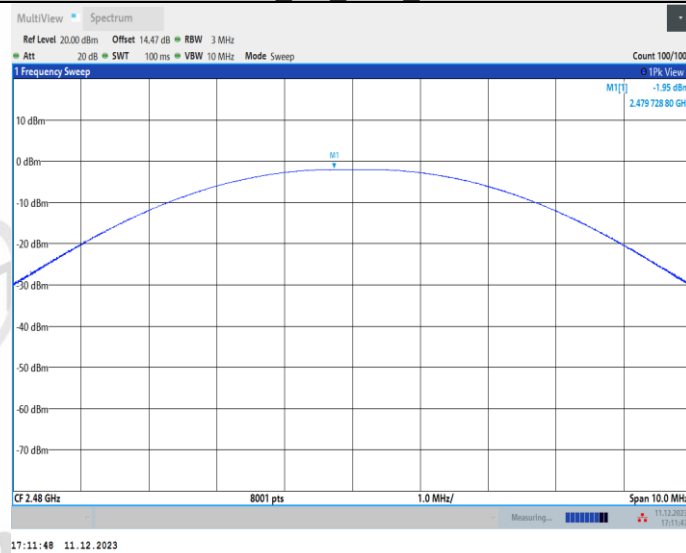


BLE 2M Ant1 2402

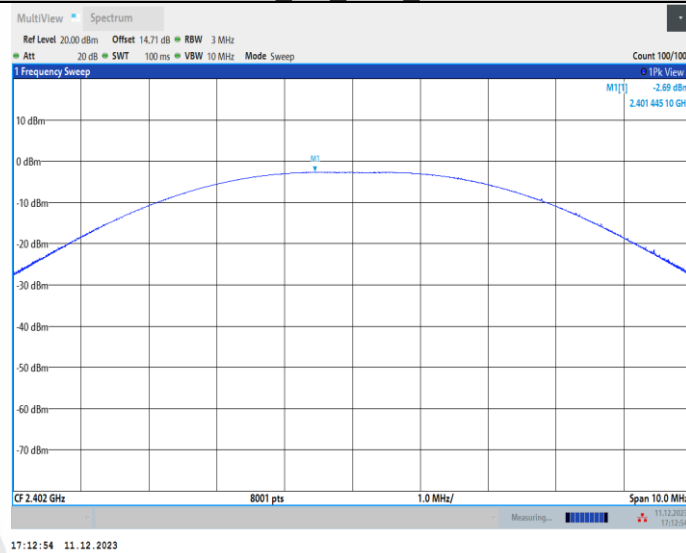

BLE 2M Ant1 2440

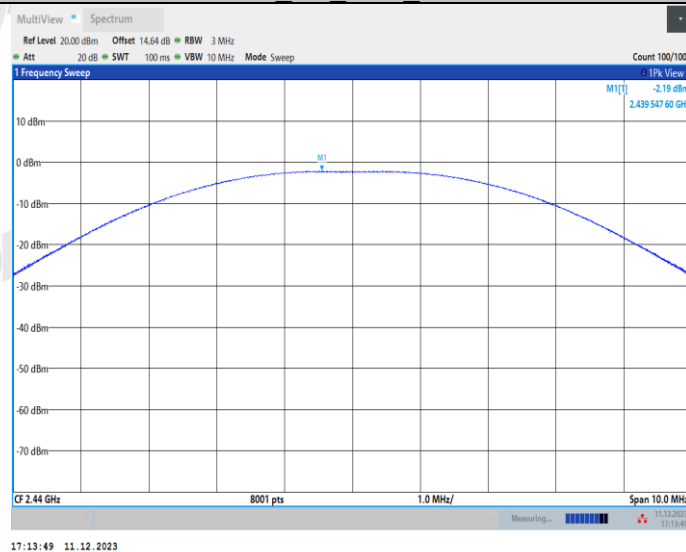

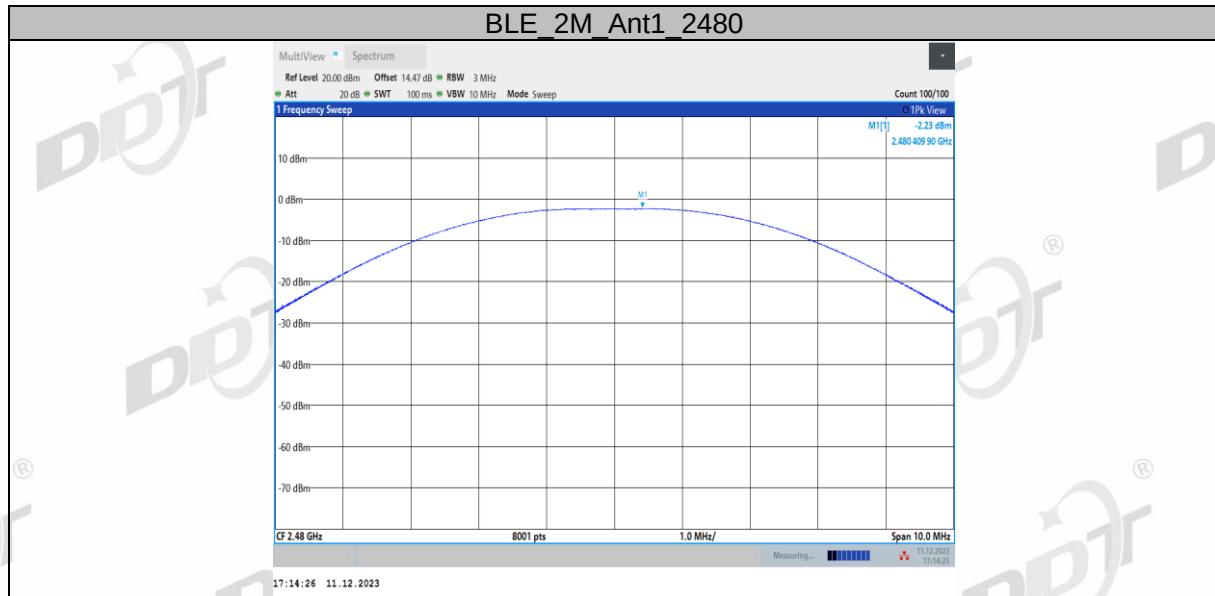

6. Power Spectral Density

6.1. Block diagram of test setup

Same with 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note:

- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).

6.4. Test result

Sample S23090520-05:


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-18.86	≤ 8.00	PASS
		2440	-18.17	≤ 8.00	PASS
		2480	-18.29	≤ 8.00	PASS
BLE_2M	Ant1	2402	-20.68	≤ 8.00	PASS
		2440	-20.00	≤ 8.00	PASS
		2480	-20.04	≤ 8.00	PASS

Sample S23090520-16:


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-18.13	≤8.00	PASS
		2440	-17.62	≤8.00	PASS
		2480	-17.47	≤8.00	PASS
BLE_2M	Ant1	2402	-20.52	≤8.00	PASS
		2440	-20.22	≤8.00	PASS
		2480	-20.25	≤8.00	PASS

6.5. Original test data


Sample S23090520-05:

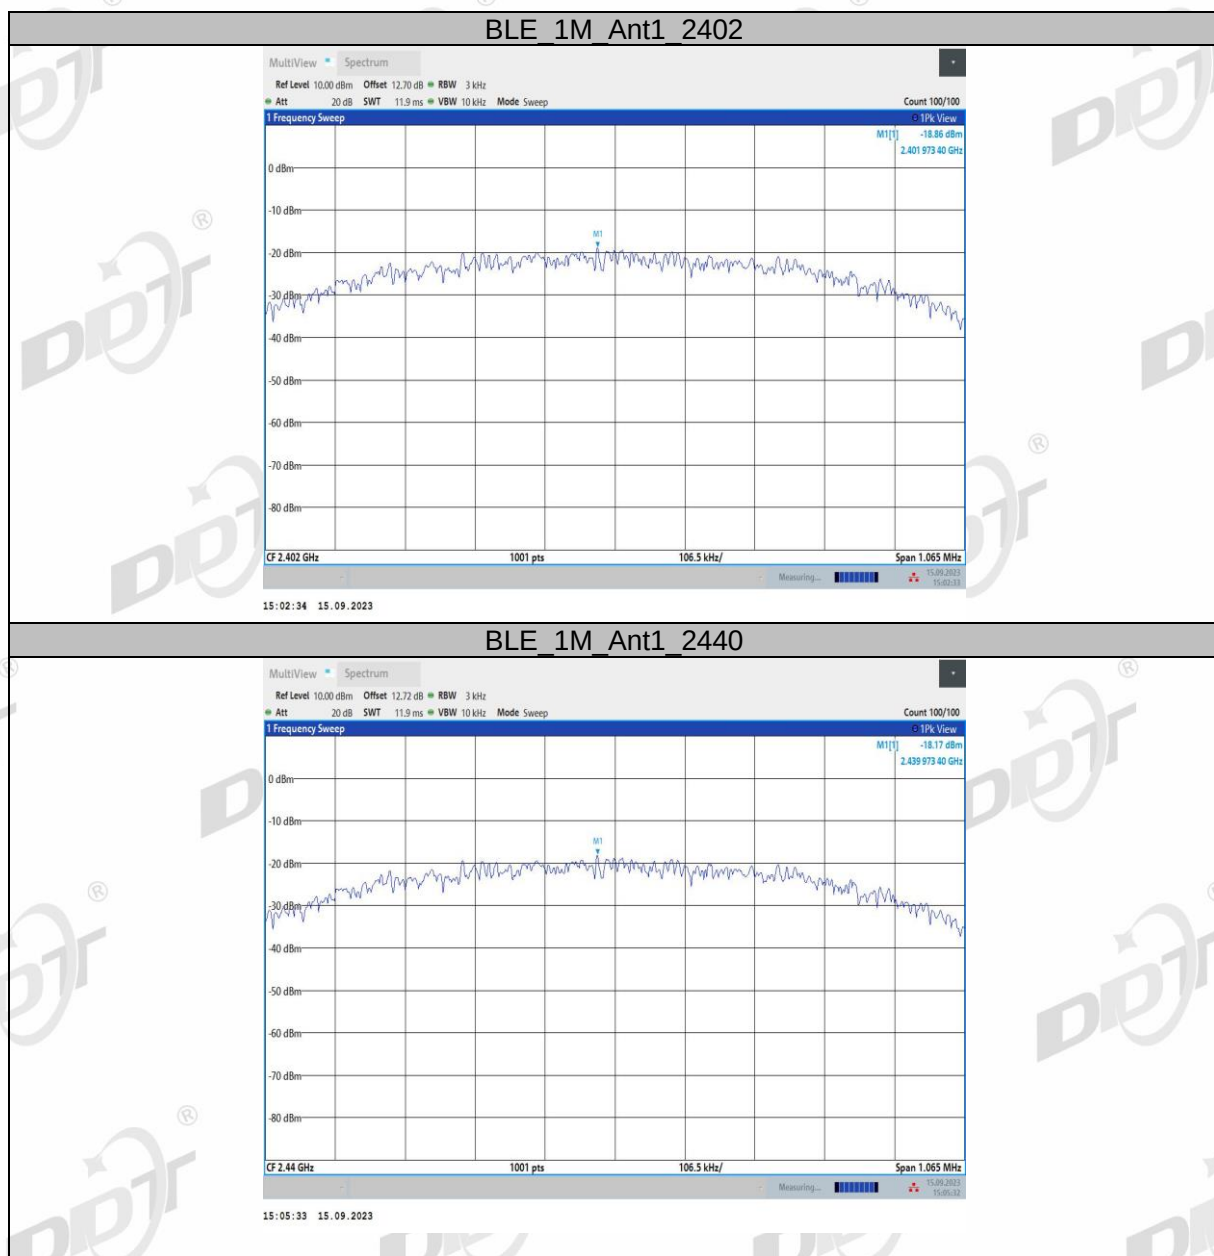


BLE_1M_Ant1_2480

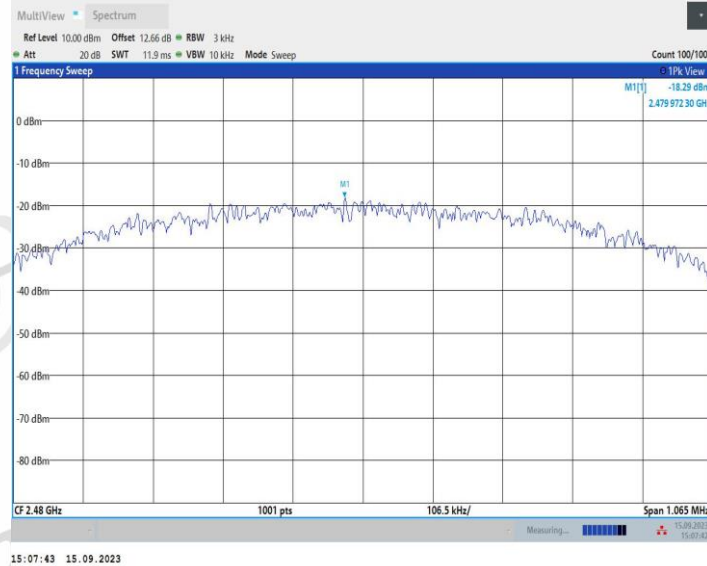


BLE_2M_Ant1_2402


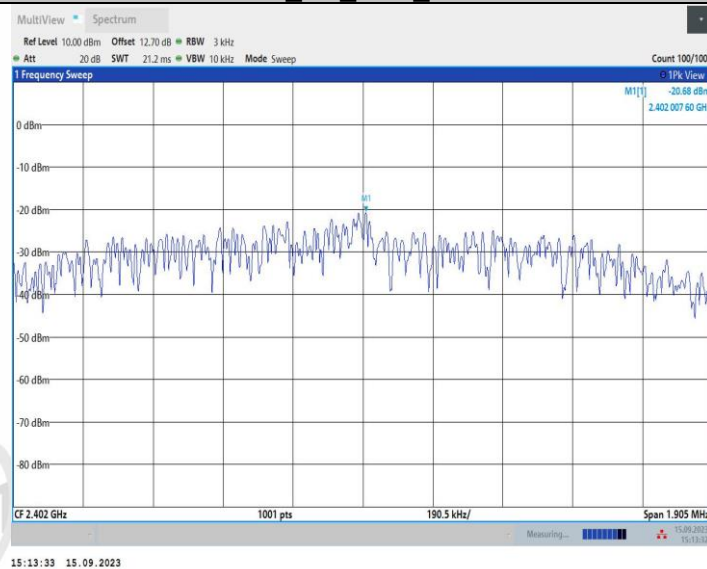


BLE_2M_Ant1_2440

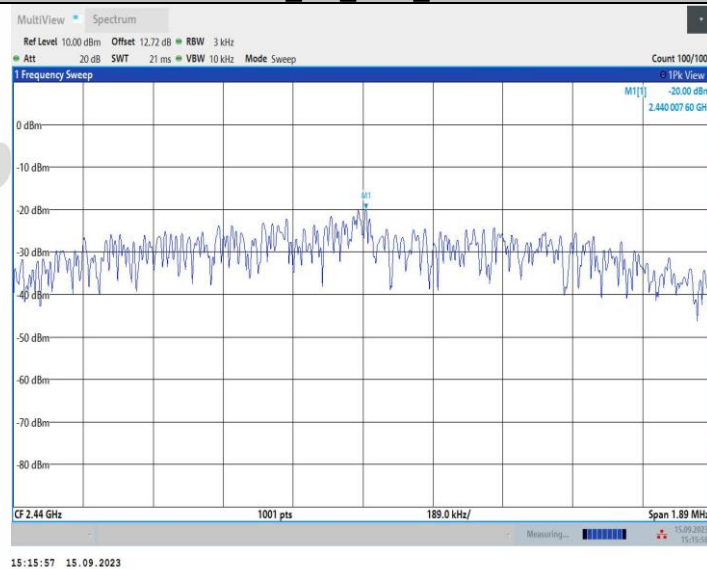


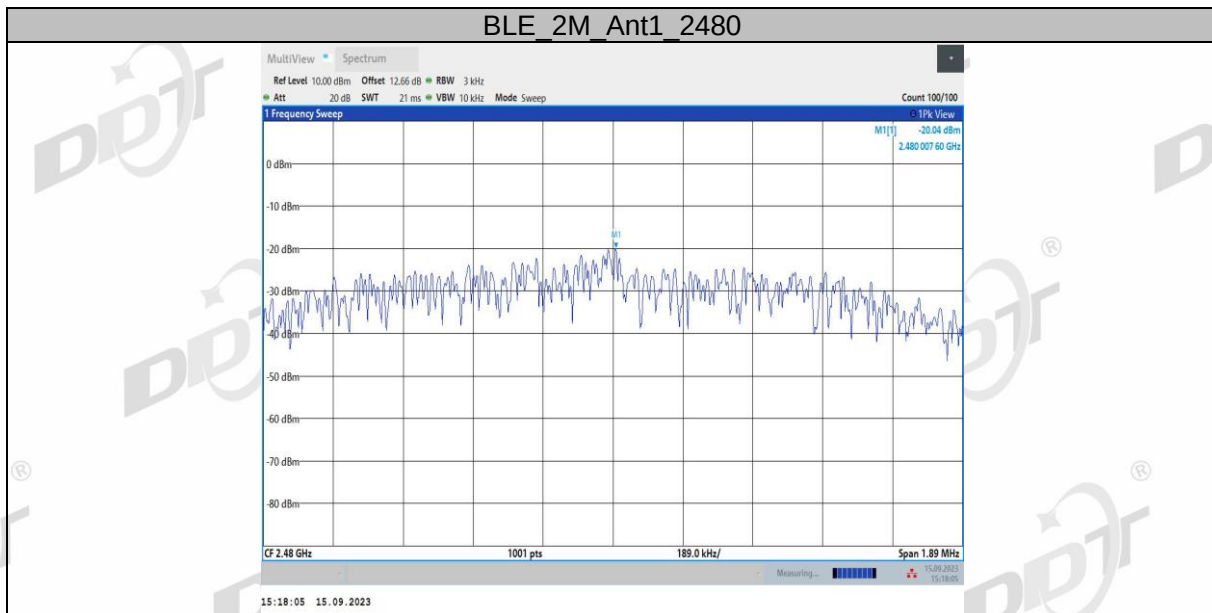


Sample S23090520-16:

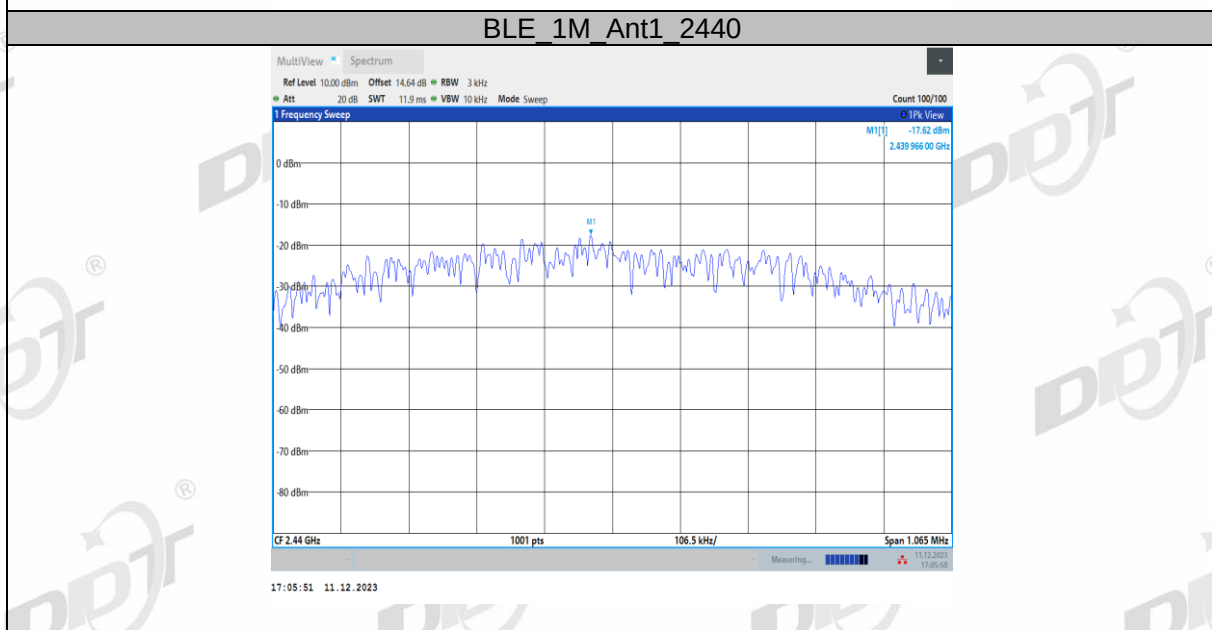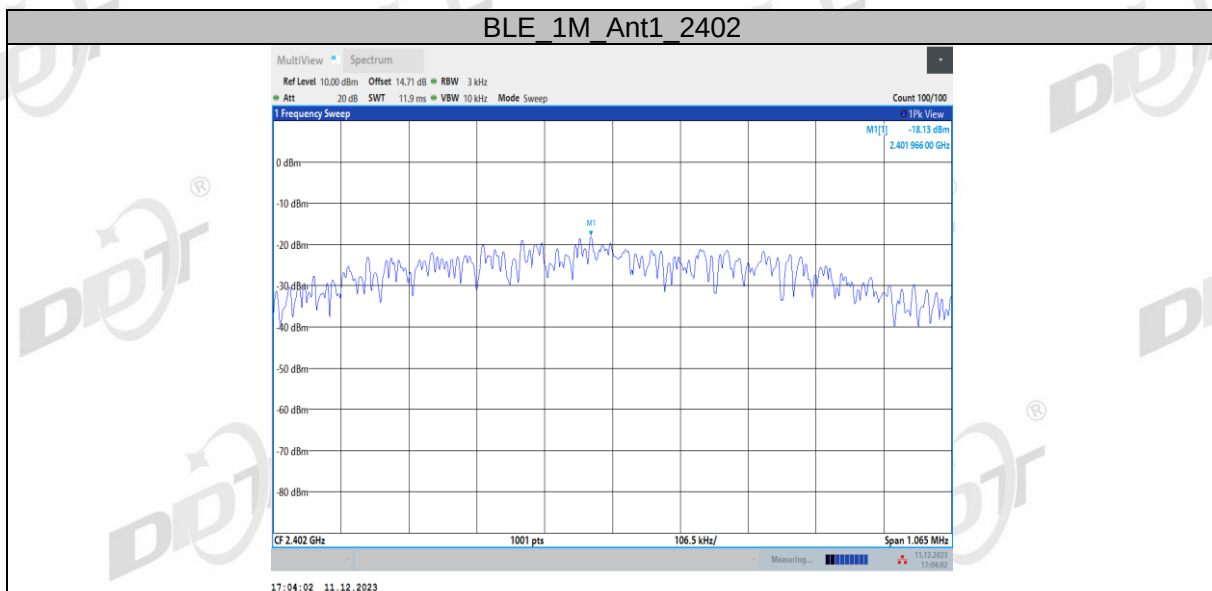


BLE_1M_Ant1_2480

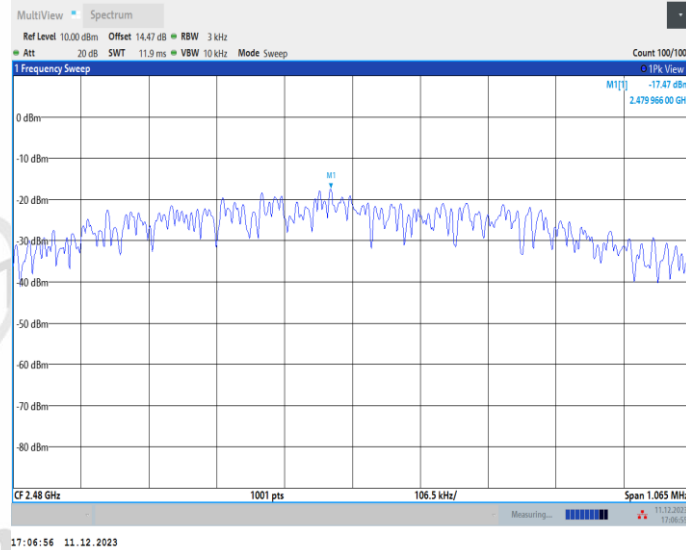


BLE_2M_Ant1_2402

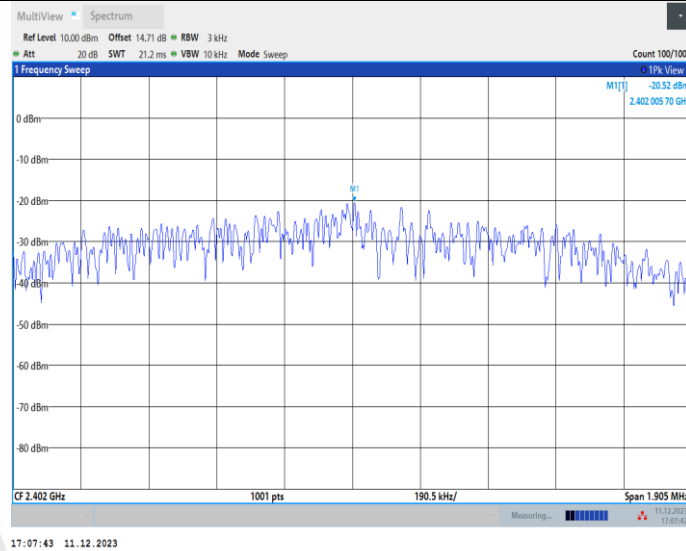

BLE_2M_Ant1_2440

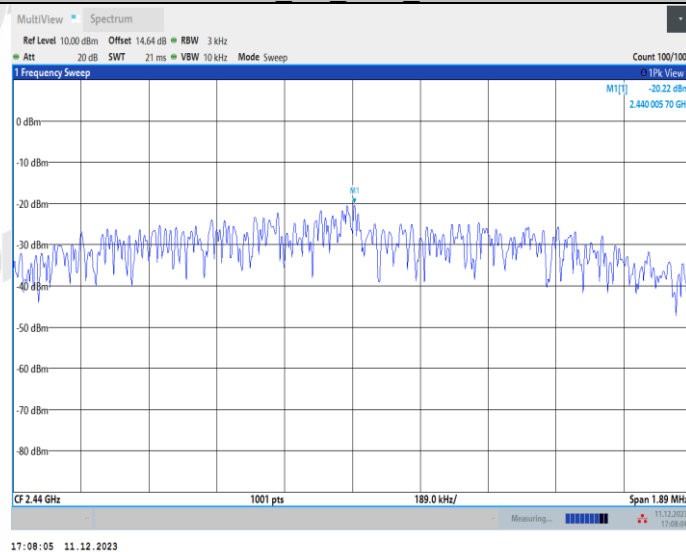

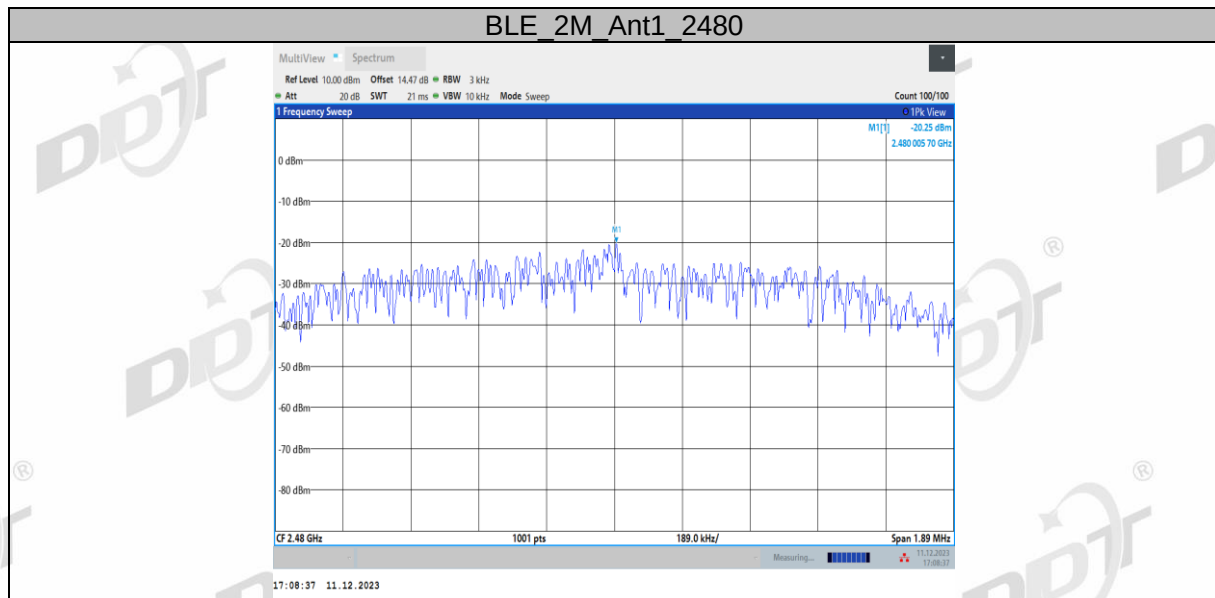

7. Band Edge Compliance (Conducted Method)

7.1. Block diagram of test setup

Same with 4.1

7.2. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100 kHz
VBW:	300 kHz
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

Note:

- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).



7.4. Test result

Test Mode	Channel or Frequency	Measured Range	Verdict
BLE_1M	CH0	2.310 GHz-2.410 GHz	Pass
	CH39	2.470 GHz-2.570 GHz	Pass
BLE_2M	CH0	2.310 GHz-2.410 GHz	Pass
	CH39	2.470 GHz-2.570 GHz	Pass


7.5. Original test data

Sample S23090520-05:

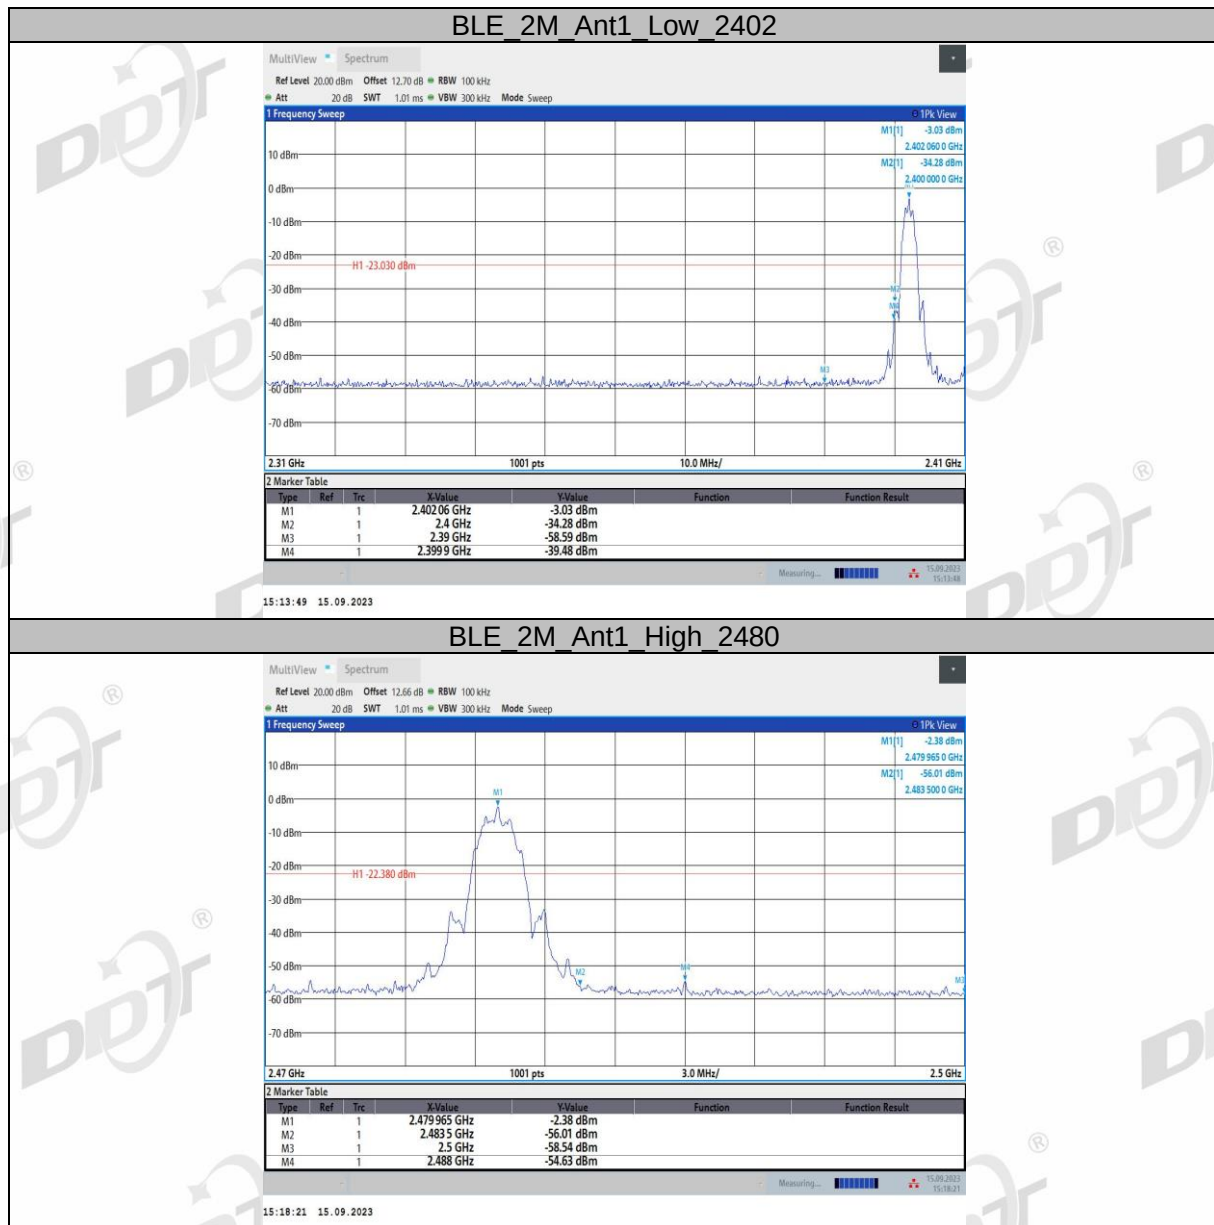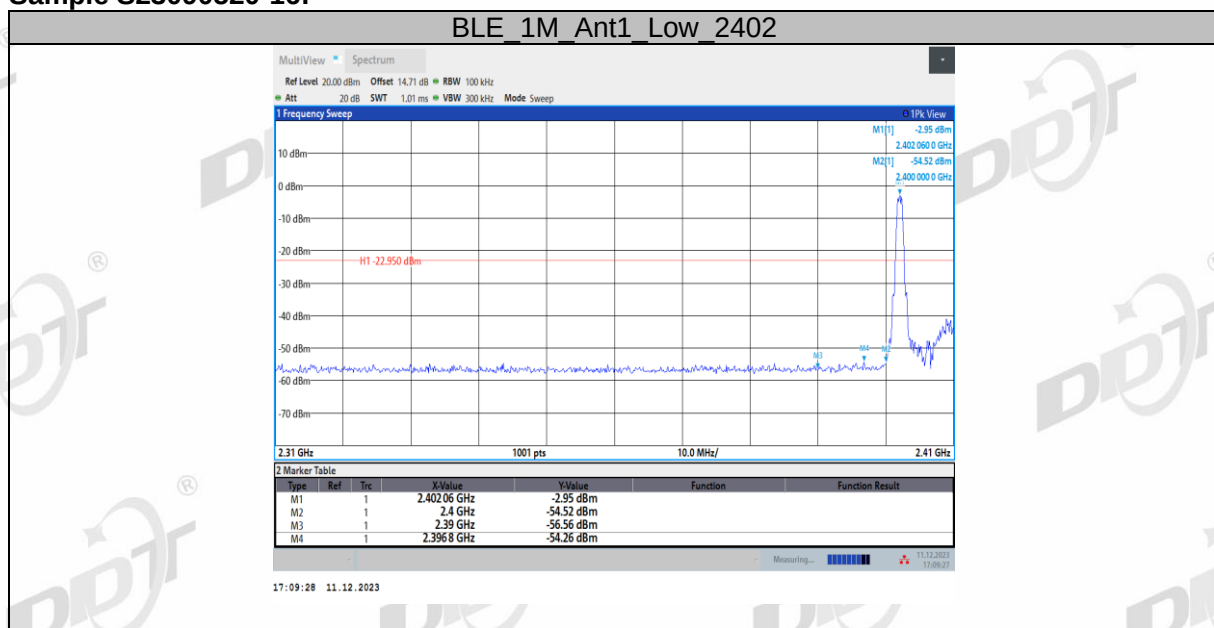


**Sample S23090520-16:**


BLE 1M Ant1_High_2480

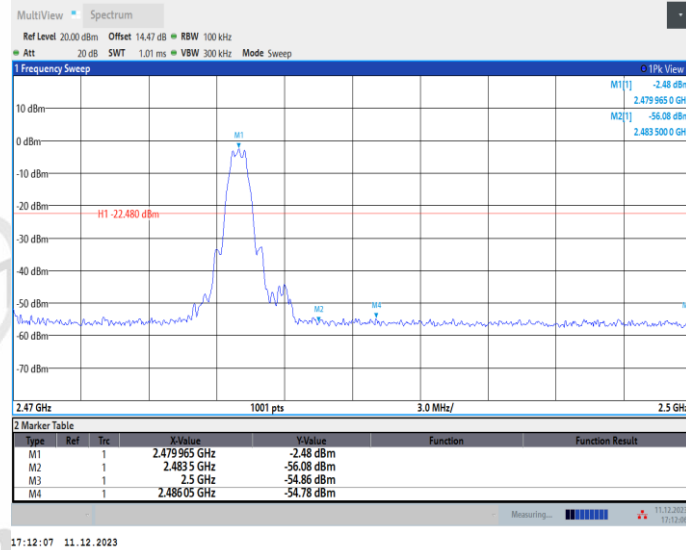

BLE 2M Ant1_Low_2402

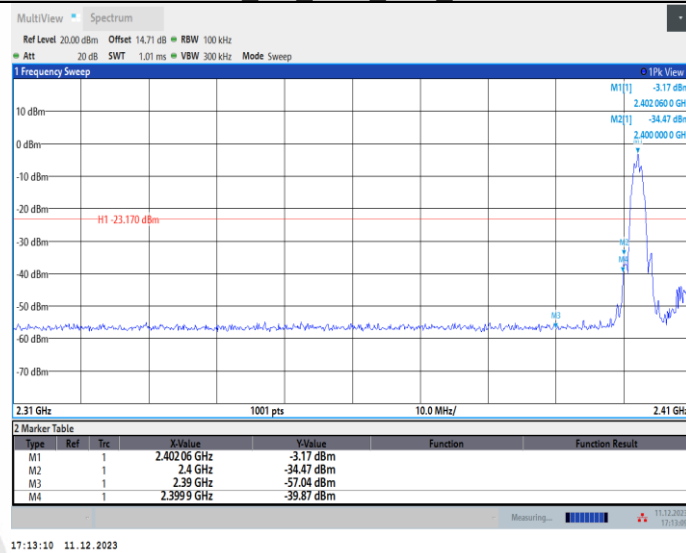


BLE 2M Ant1_High_2480

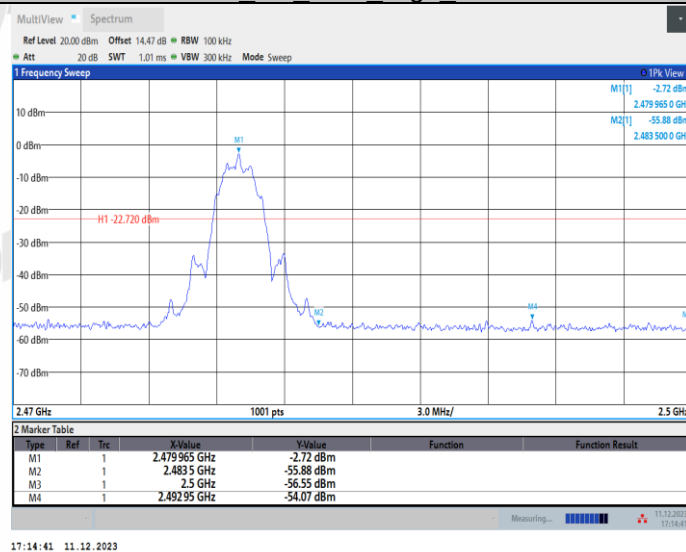


8. Radiated Emission

8.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

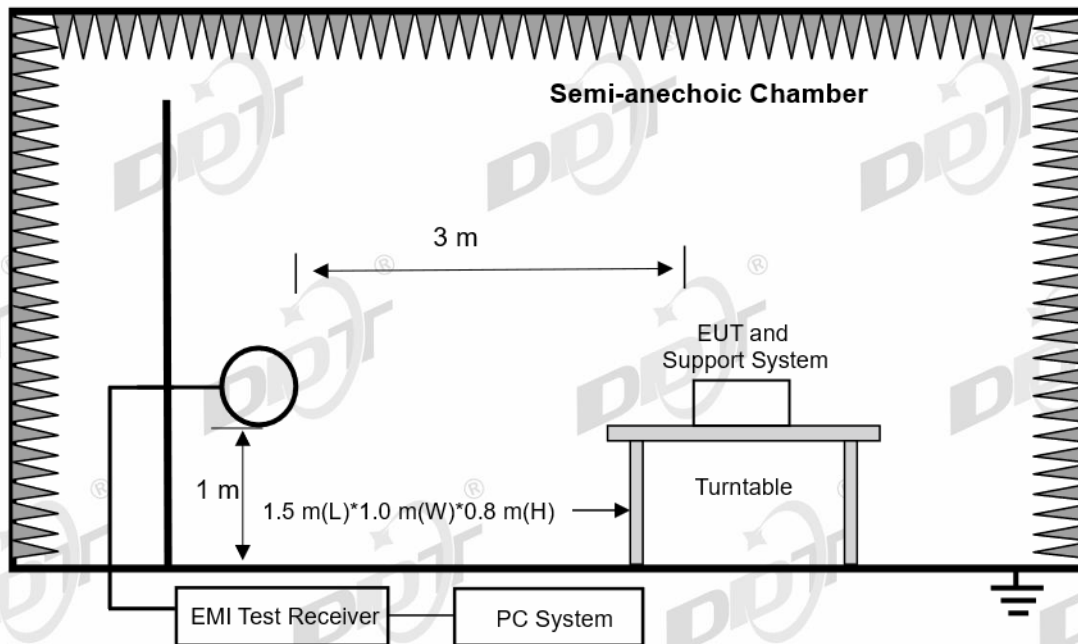

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

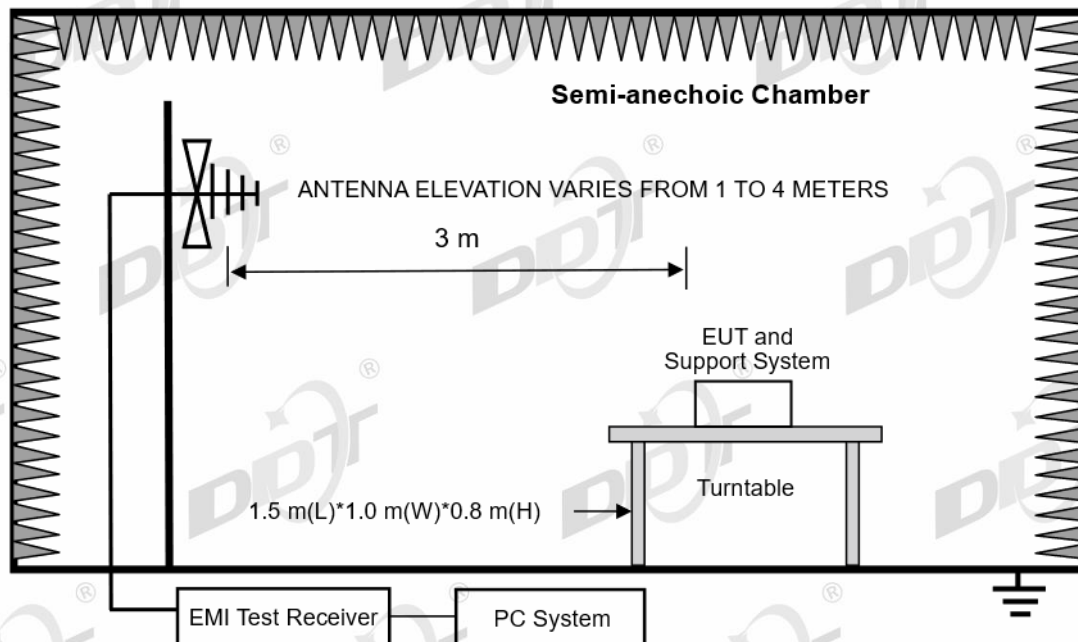

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

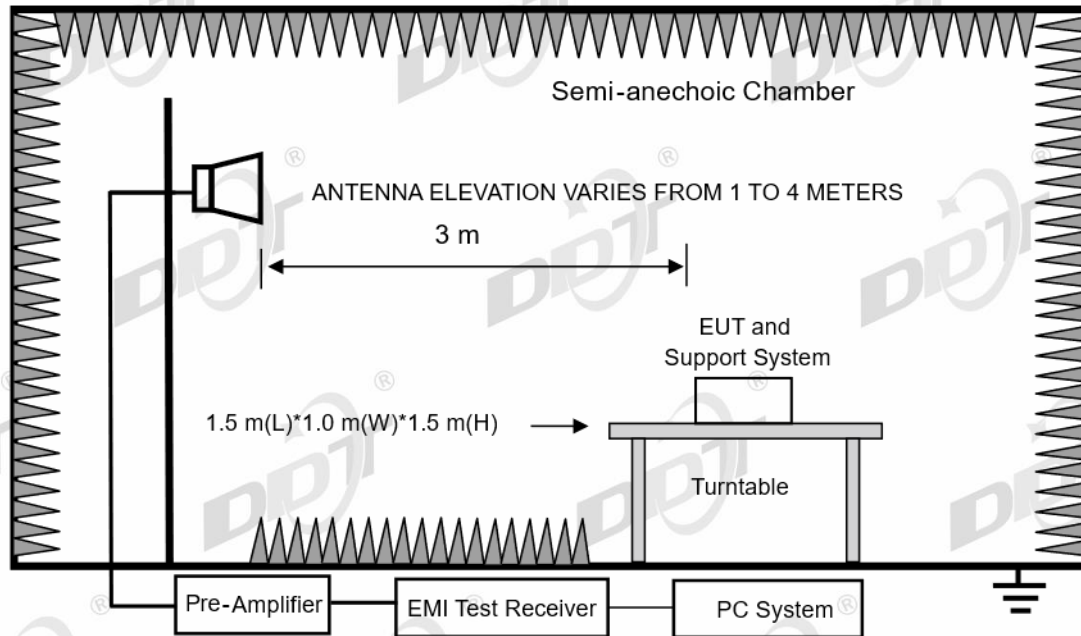

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit.

Frequency (MHz)	Measurement distance (meters)	Field strength limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 10 mm above the ground plane inside a semi-anechoic chamber for below 1 G and 10 mm above the ground plane inside a semi-anechoic chamber for above 1 G.
- (2) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz-30 MHz	Active Loop antenna	3m
30 MHz-1 GHz	Trilog Broadband Antenna	3m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3m
18 GHz-40 GHz	Horn Antenna (18 GHz-40 GHz)	1m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m (Except loop antenna, it's fixed 1m above ground.)
- (b) Change work frequency or channel of device if practicable.
- (c) Change modulation type of device if practicable.
- (d) Change power supply range from 85% to 115% of the rated supply voltage
- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9kHz to 30 MHz and 18 GHz to 25 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.