

# FCC AND ISED CERTIFICATION TEST REPORT

## FOR

|                             |   |                                                                |
|-----------------------------|---|----------------------------------------------------------------|
| <b>Applicant</b>            | : | Fender Musical Instruments                                     |
| <b>Address</b>              | : | 17600 N. Perimeter Dr., Suite 100, Scottsdale, AZ<br>85255 USA |
| <b>Equipment under Test</b> | : | Portable Audio Amplifier System (W/BK32881)                    |
| <b>Model No.</b>            | : | PASSPORT EVENT SERIES 2                                        |
| <b>Type No.</b>             | : | PR 845                                                         |
| <b>Trade Mark</b>           | : | FENDER                                                         |
| <b>FCC ID</b>               | : | XQWPE2PR845BK                                                  |
| <b>IC</b>                   | : | 8690A-PE2PR845BK                                               |
| <b>Manufacturer</b>         | : | Fender Musical Instruments                                     |
| <b>Address</b>              | : | 17600 N. Perimeter Dr., Suite 100, Scottsdale, AZ<br>85255 USA |

**Issued By: Dongguan Dongdian Testing Service Co., Ltd.**

**Add.:** No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,  
Dongguan City, Guangdong Province, China, 523808

**Tel.:** +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

# REPORT

## Table of Contents

|      |                                                  |    |
|------|--------------------------------------------------|----|
|      | Test report declares.....                        | 4  |
| 1.   | Summary of Test Results.....                     | 6  |
| 2.   | General Test Information .....                   | 7  |
| 2.1. | Description of EUT .....                         | 7  |
| 2.2. | Accessories of EUT.....                          | 8  |
| 2.3. | Assistant equipment used for test.....           | 8  |
| 2.4. | Block diagram of EUT configuration for test..... | 8  |
| 2.5. | Deviations of test standard.....                 | 8  |
| 2.6. | Test environment conditions .....                | 9  |
| 2.7. | Test laboratory .....                            | 9  |
| 2.8. | Measurement uncertainty.....                     | 9  |
| 3.   | Equipment Used During Test.....                  | 10 |
| 4.   | Maximum Peak Output Power .....                  | 11 |
| 4.1. | Block diagram of test setup.....                 | 11 |
| 4.2. | Limits .....                                     | 11 |
| 4.3. | Test procedure .....                             | 11 |
| 4.4. | Test result.....                                 | 12 |
| 4.5. | Original test data .....                         | 12 |
| 5.   | 20 dB Bandwidth and 99% Bandwidth.....           | 16 |
| 5.1. | Block diagram of test setup.....                 | 16 |
| 5.2. | Limits .....                                     | 16 |
| 5.3. | Test procedure .....                             | 16 |
| 5.4. | Test result.....                                 | 16 |
| 5.5. | Original test data .....                         | 17 |
| 6.   | Carrier Frequency Separation.....                | 23 |
| 6.1. | Block diagram of test setup.....                 | 23 |
| 6.2. | Limits .....                                     | 23 |
| 6.3. | Test procedure .....                             | 23 |
| 6.4. | Test result.....                                 | 23 |
| 6.5. | Original test data .....                         | 24 |
| 7.   | Number of Hopping Channel .....                  | 25 |
| 7.1. | Block diagram of test setup.....                 | 25 |
| 7.2. | Limits .....                                     | 25 |
| 7.3. | Test procedure .....                             | 25 |
| 7.4. | Test result.....                                 | 25 |
| 7.5. | Original test data .....                         | 26 |
| 8.   | Dwell Time.....                                  | 27 |

|       |                                               |    |
|-------|-----------------------------------------------|----|
| 8.1.  | Block diagram of test setup.....              | 27 |
| 8.2.  | Limits .....                                  | 27 |
| 8.3.  | Test procedure .....                          | 27 |
| 8.4.  | Test result.....                              | 27 |
| 8.5.  | Original test data .....                      | 28 |
| 9.    | Band Edge Compliance (Conducted Method) ..... | 34 |
| 9.1.  | Block diagram of test setup.....              | 34 |
| 9.2.  | Limit.....                                    | 34 |
| 9.3.  | Test procedure .....                          | 34 |
| 9.4.  | Test result.....                              | 34 |
| 9.5.  | Original test data .....                      | 35 |
| 10.   | Radiated Emission .....                       | 39 |
| 10.1. | Block diagram of test setup.....              | 39 |
| 10.2. | Limit.....                                    | 40 |
| 10.3. | Test Procedure.....                           | 42 |
| 10.4. | Test result.....                              | 43 |
| 11.   | RF Conducted Spurious Emissions .....         | 58 |
| 11.1. | Block diagram of test setup.....              | 58 |
| 11.2. | Limits .....                                  | 58 |
| 11.3. | Test procedure .....                          | 58 |
| 11.4. | Test result.....                              | 59 |
| 11.5. | Original test data .....                      | 59 |
| 12.   | Band Edge Compliance (Radiated Method) .....  | 69 |
| 12.1. | Block diagram of test setup.....              | 69 |
| 12.2. | Limit.....                                    | 69 |
| 12.3. | Test Procedure.....                           | 69 |
| 12.4. | Test result.....                              | 69 |
| 13.   | Power Line Conducted Emission .....           | 82 |
| 13.1. | Block diagram of test setup.....              | 82 |
| 13.2. | Power Line Conducted Emission Limits .....    | 82 |
| 13.3. | Test Procedure.....                           | 82 |
| 13.4. | Test Result .....                             | 83 |
| 14.   | Antenna Requirements .....                    | 86 |
| 14.1. | Limit.....                                    | 86 |
| 14.2. | Result .....                                  | 86 |
| 15.   | Test Setup Photograph .....                   | 87 |
| 16.   | Photos of the EUT .....                       | 89 |

## Test Report Declare

|                             |   |                                                             |
|-----------------------------|---|-------------------------------------------------------------|
| <b>Applicant</b>            | : | Fender Musical Instruments                                  |
| <b>Address</b>              | : | 17600 N. Perimeter Dr., Suite 100, Scottsdale, AZ 85255 USA |
| <b>Equipment under Test</b> | : | Portable Audio Amplifier System (W/BK32881)                 |
| <b>Model No.</b>            | : | PASSPORT EVENT SERIES 2                                     |
| <b>Type No.</b>             | : | PR 845                                                      |
| <b>Trade Mark</b>           | : | FENDER                                                      |
| <b>Manufacturer</b>         | : | Fender Musical Instruments                                  |
| <b>Address</b>              | : | 17600 N. Perimeter Dr., Suite 100, Scottsdale, AZ 85255 USA |

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017

### Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

### We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.**

|                         |                    |                      |                               |
|-------------------------|--------------------|----------------------|-------------------------------|
| <b>Report No.:</b>      | DDT-R22102518-4E01 |                      |                               |
| <b>Date of Receipt:</b> | Nov. 03, 2022      | <b>Date of Test:</b> | Nov. 03, 2022 ~ Dec. 10, 2022 |

**Prepared By:**

*Jacky Huang*

**Jacky Huang/Engineer**

**Approved By:**



**Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

## Revision History

| Rev. | Revisions     | Issue Date    | Revised By |
|------|---------------|---------------|------------|
| ---  | Initial issue | Dec. 12, 2022 |            |
|      |               |               |            |

## 1. Summary of Test Results

| Description of Test Item          | Standard                                                                                                | Results |
|-----------------------------------|---------------------------------------------------------------------------------------------------------|---------|
| Maximum Peak Output Power         | FCC Part 15: 15.247(b)(1)<br>ANSI C63.10:2013<br>RSS-247 Issue 2                                        | Pass    |
| 20 dB Bandwidth and 99% Bandwidth | FCC Part 15: 15.247(a)(1)<br>ANSI C63.10:2013<br>RSS-Gen 6.7                                            | Pass    |
| Carrier Frequency Separation      | FCC Part 15: 15.247(a)(1)<br>ANSI C63.10:2013<br>RSS-247 Issue 2                                        | Pass    |
| Number of Hopping Channel         | FCC Part 15: 15.247(a)(1)(iii)<br>ANSI C63.10:2013<br>RSS-247 Issue 2                                   | Pass    |
| Dwell Time                        | FCC Part 15: 15.247(a)(1)(iii)<br>ANSI C63.10:2013<br>RSS-247 Issue 2                                   | Pass    |
| Radiated Emission                 | FCC Part 15: 15.209<br>FCC Part 15: 15.247(d)<br>ANSI C63.10:2013<br>RSS-247 Issue 2<br>RSS-Gen Issue 5 | Pass    |
| Band Edge Compliance              | FCC Part 15: 15.247(d)<br>ANSI C63.10:2013<br>RSS-247 Issue 2<br>RSS-Gen Issue 5                        | Pass    |
| Power Line Conducted Emissions    | FCC Part 15: 15.207<br>ANSI C63.10:2013<br>RSS-Gen Issue 5                                              | Pass    |
| Antenna Requirement               | FCC Part 15: 15.203<br>RSS-Gen Issue 5                                                                  | Pass    |

## 2. General Test Information

### 2.1. Description of EUT

|                          |                                               |
|--------------------------|-----------------------------------------------|
| EUT* Name                | : Portable Audio Amplifier System (W/BK32881) |
| Model Number             | : PASSPORT EVENT SERIES 2                     |
| EUT Function Description | : Please reference user manual of this device |
| Power Supply             | : AC 100-120V, 50/60Hz                        |
| Radio Specification      | : Bluetooth V5.2                              |
| Operation Frequency      | : 2402 MHz - 2480 MHz                         |
| Modulation               | : GFSK, $\pi/4$ -DQPSK, 8DPSK                 |
| Data Rate                | : 1 Mbps, 2 Mbps, 3 Mbps                      |
| Antenna Type             | : PCB antenna, maximum PK gain: -1.07 dBi     |
| Sample Number            | : S22102518-07                                |

Note: EUT is the ab. of equipment under test.

| Channel information |                 |         |                 |         |                 |
|---------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel             | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 0                   | 2402            | 27      | 2429            | 54      | 2456            |
| 1                   | 2403            | 28      | 2430            | 55      | 2457            |
| 2                   | 2404            | 29      | 2431            | 56      | 2458            |
| 3                   | 2405            | 30      | 2432            | 57      | 2459            |
| 4                   | 2406            | 31      | 2433            | 58      | 2460            |
| 5                   | 2407            | 32      | 2434            | 59      | 2461            |
| 6                   | 2408            | 33      | 2435            | 60      | 2462            |
| 7                   | 2409            | 34      | 2436            | 61      | 2463            |
| 8                   | 2410            | 35      | 2437            | 62      | 2464            |
| 9                   | 2411            | 36      | 2438            | 63      | 2465            |
| 10                  | 2412            | 37      | 2439            | 64      | 2466            |
| 11                  | 2413            | 38      | 2440            | 65      | 2467            |
| 12                  | 2414            | 39      | 2441            | 66      | 2468            |
| 13                  | 2415            | 40      | 2442            | 67      | 2469            |
| 14                  | 2416            | 41      | 2443            | 68      | 2470            |
| 15                  | 2417            | 42      | 2444            | 69      | 2471            |
| 16                  | 2418            | 43      | 2445            | 70      | 2472            |
| 17                  | 2419            | 44      | 2446            | 71      | 2473            |
| 18                  | 2420            | 45      | 2447            | 72      | 2474            |
| 19                  | 2421            | 46      | 2448            | 73      | 2475            |
| 20                  | 2422            | 47      | 2449            | 74      | 2476            |
| 21                  | 2423            | 48      | 2450            | 75      | 2477            |
| 22                  | 2424            | 49      | 2451            | 76      | 2478            |
| 23                  | 2425            | 50      | 2452            | 77      | 2479            |
| 24                  | 2426            | 51      | 2453            | 78      | 2480            |
| 25                  | 2427            | 52      | 2454            |         |                 |
| 26                  | 2428            | 53      | 2455            |         |                 |

## 2.2. Accessories of EUT

| Description of Accessories | Manufacturer | Model number | Serial No. | Other                     |
|----------------------------|--------------|--------------|------------|---------------------------|
| AC cable                   | N/A          | N/A          | N/A        | Length: 1.90m, unshielded |
| Audio cable                | N/A          | N/A          | N/A        | Length: 4.90m, unshielded |
| Audio cable                | N/A          | N/A          | N/A        | Length: 4.90m, unshielded |

## 2.3. Assistant equipment used for test

| Assistant equipment | Manufacturer | Model number | Serial No. | other |
|---------------------|--------------|--------------|------------|-------|
| N/A                 | N/A          | N/A          | N/A        | N/A   |

## 2.4. Block diagram of EUT configuration for test



The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Test software: BK32xx RF Test\_V1.8.2

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

| Tested mode, channel, information  |                  |             |                 |
|------------------------------------|------------------|-------------|-----------------|
| Mode                               | Setting Tx Power | Channel     | Frequency (MHz) |
| GFSK hopping on Tx mode            | 1                | CH0 to CH78 | 2402 to 2480    |
| $\pi/4$ -DQPSK hopping on Tx mode  | 1                | CH0 to CH78 | 2402 to 2480    |
| 8DPSK hopping on Tx mode           | 1                | CH0 to CH78 | 2402 to 2480    |
| GFSK hopping off Tx mode           | 1                | CH0         | 2402            |
|                                    | 1                | CH39        | 2441            |
|                                    | 1                | CH78        | 2480            |
| $\pi/4$ -DQPSK hopping off Tx mode | 1                | CH0         | 2402            |
|                                    | 1                | CH39        | 2441            |
|                                    | 1                | CH78        | 2480            |
| 8DPSK hopping on Tx mode           | 1                | CH0         | 2402            |
|                                    | 1                | CH39        | 2441            |
|                                    | 1                | CH78        | 2480            |

## 2.5. Deviations of test standard

No deviation.

## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |                 |
|--------------------|-----------------|
| Temperature range: | +15°C to +35 °C |
| Humidity range:    | 20-75%          |
| Pressure range:    | 86-106 kPa      |

## 2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

## 2.8. Measurement uncertainty

| Test Item                                              | Uncertainty                                                                                        |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Bandwidth                                              | 1.1%                                                                                               |
| Peak Output Power (Conducted) (Spectrum Analyzer)      | 0.86 dB (10 MHz ≤ f < 3.6 GHz);<br>1.38 dB (3.6 GHz ≤ f < 8 GHz)                                   |
| Peak Output Power (Conducted) (Power Sensor)           | 0.74 dB                                                                                            |
| Power Spectral Density                                 | 0.74 dB (10 MHz ≤ f < 3.6 GHz);<br>1.38 dB (3.6 GHz ≤ f < 8 GHz)                                   |
| Frequencies Stability                                  | 6.7 × 10 <sup>-8</sup> (Antenna couple method)<br>5.5 × 10 <sup>-8</sup> (Conducted method)        |
| Conducted Spurious Emissions                           | 0.86 dB (10 MHz ≤ f < 3.6 GHz);<br>1.40 dB (3.6 GHz ≤ f < 8 GHz)<br>1.66 dB (8 GHz ≤ f < 26.5 GHz) |
| Uncertainty for Radio Frequency (RBW<20 KHz)           | 3×10 <sup>-8</sup>                                                                                 |
| Temperature                                            | 0.4 °C                                                                                             |
| Humidity                                               | 2 %                                                                                                |
| Uncertainty for Radiation Emission Test (9kHz -30 Mhz) | 3.44 dB                                                                                            |
| Uncertainty for Radiation Emission Test (30 Mhz-1 Ghz) | 4.70 dB (Antenna Polarize: V)<br>4.84 dB (Antenna Polarize: H)                                     |
| Uncertainty for Radiation Emission Test (1 Ghz-40 Ghz) | 4.10 dB (1-6 GHz)<br>4.40 dB (6 GHz-18 GHz)<br>3.54 dB (18 GHz-26 GHz)<br>4.30 dB (26 GHz-40 GHz)  |
| Uncertainty for Power Line Conduction Emission Test    | 3.32 dB (150 kHz-30 MHz)                                                                           |


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. Equipment Used During Test

| Equipment                                                     | Manufacturer    | Model No.                                                                                  | Serial No.            | Last Cal.     | Cal. Interval |
|---------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------|-----------------------|---------------|---------------|
| <b>☑RF Connected Test (Tonscend RF Measurement System 2#)</b> |                 |                                                                                            |                       |               |               |
| SPECTRUM ANALYZER                                             | R&S             | FSU26                                                                                      | 200071                | Aug. 26, 2022 | 1 Year        |
| Test Software                                                 | JS Tonscend     | JS1120-3                                                                                   | Ver.2.6.77.0518       | N/A           | N/A           |
| <b>☑Radiation 3#chamber</b>                                   |                 |                                                                                            |                       |               |               |
| EMI Test Receiver                                             | R&S             | ESU                                                                                        | 100472                | May 18, 2022  | 1 Year        |
| Spectrum analyzer                                             | Agilent         | E4447A                                                                                     | MY50180031            | May 18, 2022  | 1 Year        |
| Active Loop antenna                                           | Schwarzbeck     | FMZB-1519                                                                                  | 1519-038              | Sep. 29, 2022 | 1 Year        |
| Trilog Broadband Antenna                                      | Schwarzbeck     | VULB 9163                                                                                  | 01429                 | Jul. 22, 2022 | 1 Year        |
| Double Ridged Horn Antenna                                    | Schwarzbeck     | BBHA 9120 D                                                                                | 02468                 | Sep. 29, 2022 | 1 Year        |
| Broad Band Horn Antenna                                       | Schwarzbeck     | BBHA 9170                                                                                  | 790                   | May 06, 2022  | 1 Year        |
| Pre-amplifier                                                 | COM-POWER       | PAM-118A                                                                                   | 18040084              | Aug. 17, 2022 | 1 Year        |
| Pre-amplifier                                                 | COM-POWER       | PAM-840A                                                                                   | 461369                | Apr. 11, 2022 | 1 Year        |
| RE Cable                                                      | N/A             | W23.02<br>CP1-X2 +<br>W23.09<br>AP1-X8+<br>JCT26S-NJ-NJ<br>-1.5M+<br>JCT26S-NJ-NJ<br>-1.5M | 4.5M+8M+1.5M<br>+1.5M | Aug.17, 2022  | 1 Year        |
| RF Cable                                                      | Yuhu Technology | JCTB810-NJ-NJ-9M                                                                           | 21123964              | May. 19,2022  | 1 Year        |
| RF Cable                                                      | Yuhu Technology | ZT26S-SMAJ-SMAJ-1M                                                                         | 21073466              | Aug.17, 2022  | 1 Year        |
| Test software                                                 | Tonscend        | JS32-RE                                                                                    | V 5.0.0.1             | N/A           | N/A           |
| Test software                                                 | Audix           | E3                                                                                         | V 6.1.1.1             | N/A           | N/A           |
| <b>☑Power Line Conducted Emissions Test 1#</b>                |                 |                                                                                            |                       |               |               |
| Test Receiver                                                 | R&S             | ESCI                                                                                       | 100551                | Aug. 26, 2022 | 1 Year        |
| LISN 1                                                        | R&S             | ENV216                                                                                     | 101109                | Aug. 26, 2022 | 1 Year        |
| LISN 2                                                        | R&S             | ESH2-Z5                                                                                    | 100309                | Aug. 26, 2022 | 1 Year        |
| Pulse Limiter                                                 | R&S             | ESH3-Z2                                                                                    | 101242                | Aug. 26, 2022 | 1 Year        |
| CE Cable 1                                                    | HUBSER          | N/A                                                                                        | W10.01                | Aug. 26, 2022 | 1 Year        |
| Test software                                                 | Audix           | E3                                                                                         | V 6.11111b            | N/A           | N/A           |

## 4. Maximum Peak Output Power

### 4.1. Block diagram of test setup

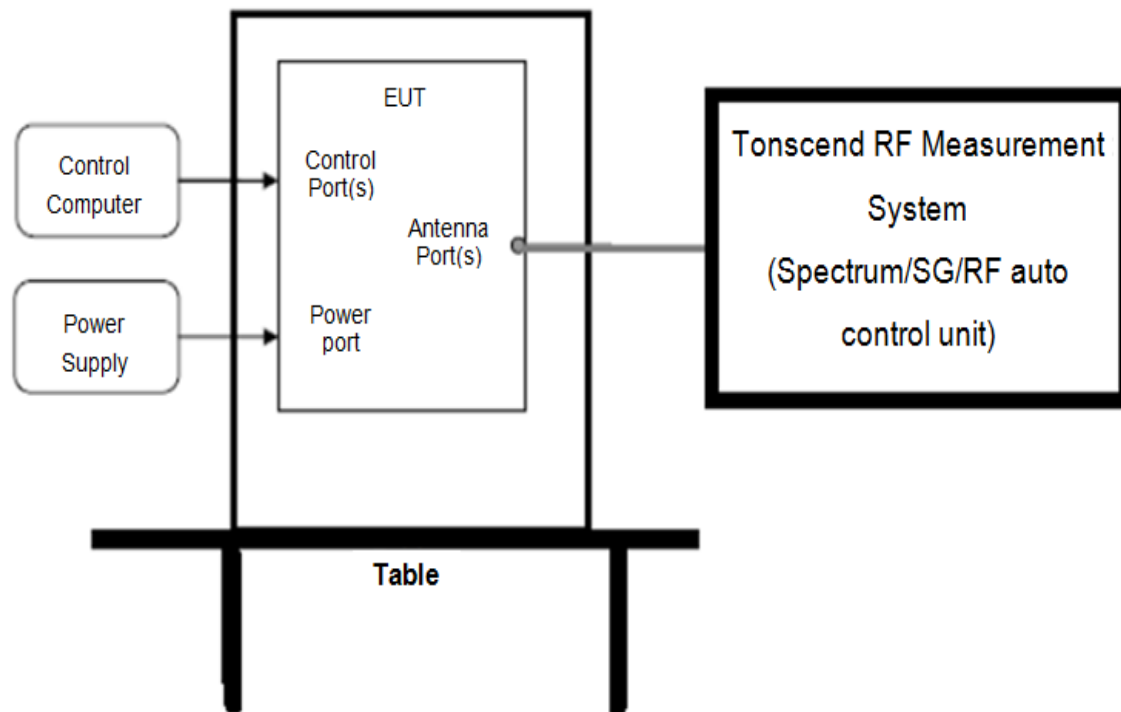

### 4.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

### 4.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Measure the maximum conducted output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=10 MHz

Note:

- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).


#### 4.4. Test result

| Test Mode      | Antenna | Frequency [MHz] | Conducted Peak Power [dBm] | Conducted Limit [dBm] | Verdict |
|----------------|---------|-----------------|----------------------------|-----------------------|---------|
| GFSK           | Ant1    | 2402            | -7.48                      | ≤21                   | Pass    |
|                |         | 2441            | -7.46                      | ≤21                   | Pass    |
|                |         | 2480            | -6.21                      | ≤21                   | Pass    |
| $\pi/4$ -DQPSK | Ant1    | 2402            | -7.44                      | ≤21                   | Pass    |
|                |         | 2441            | -6.84                      | ≤21                   | Pass    |
|                |         | 2480            | -6.05                      | ≤21                   | Pass    |
| 8DPSK          | Ant1    | 2402            | -7.65                      | ≤21                   | Pass    |
|                |         | 2441            | -6.70                      | ≤21                   | Pass    |
|                |         | 2480            | -6.16                      | ≤21                   | Pass    |


| Test Mode      | Antenna | Frequency (MHz) | EIRP (dBm) | Limit (dBm) | Verdict |
|----------------|---------|-----------------|------------|-------------|---------|
| GFSK           | ANT1    | 2402            | -8.55      | ≤36         | Pass    |
|                | ANT1    | 2441            | -8.53      | ≤36         | Pass    |
|                | ANT1    | 2480            | -7.28      | ≤36         | Pass    |
| $\pi/4$ -DQPSK | ANT1    | 2402            | -8.51      | ≤36         | Pass    |
|                | ANT1    | 2441            | -7.91      | ≤36         | Pass    |
|                | ANT1    | 2480            | -7.12      | ≤36         | Pass    |
| 8DPSK          | ANT1    | 2402            | -8.72      | ≤36         | Pass    |
|                | ANT1    | 2441            | -7.77      | ≤36         | Pass    |
|                | ANT1    | 2480            | -7.23      | ≤36         | Pass    |

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

#### 4.5. Original test data

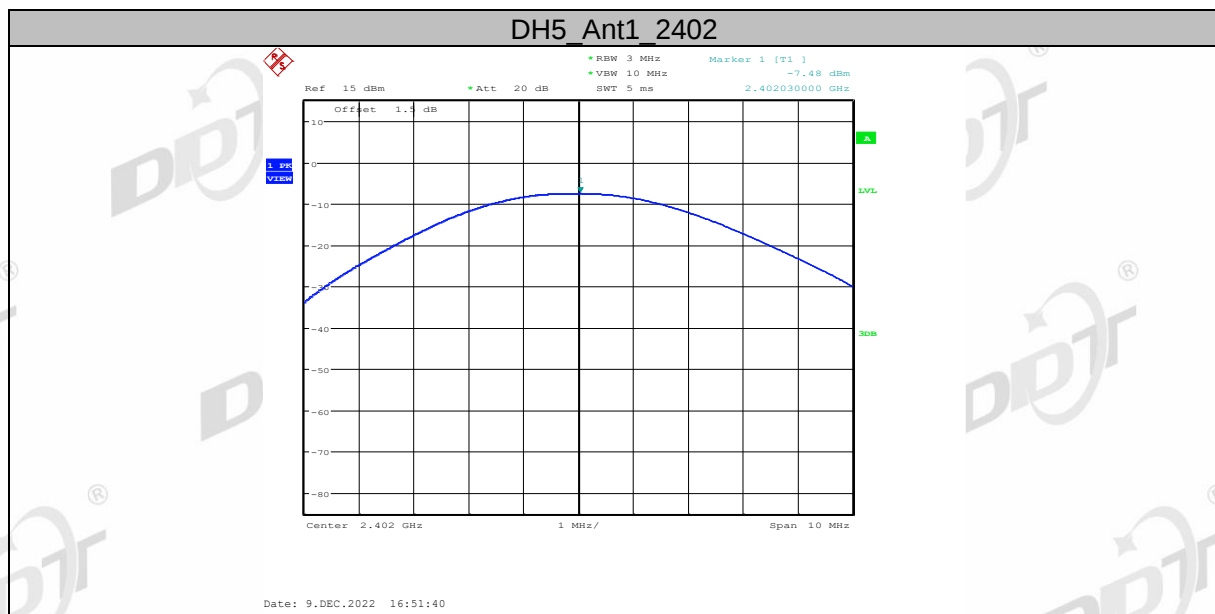


## DH5 Ant1\_2441

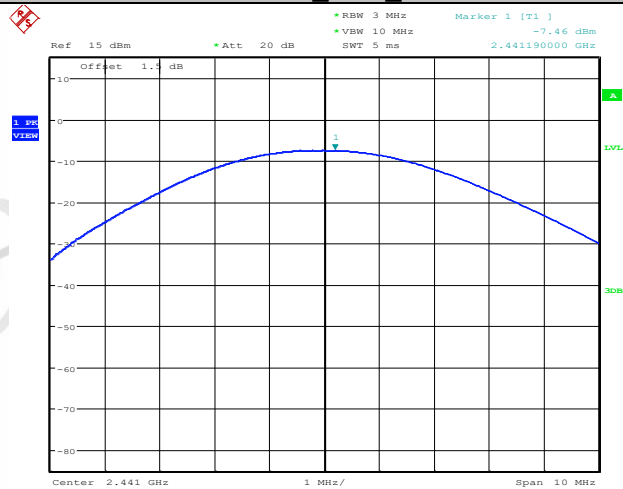


Date: 9.DEC.2022 16:53:58

## DH5 Ant1\_2480

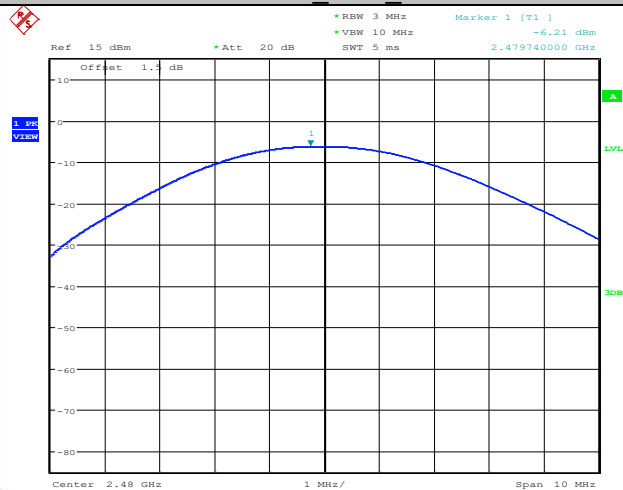


Date: 9.DEC.2022 16:55:26

## 2DH5 Ant1\_2402

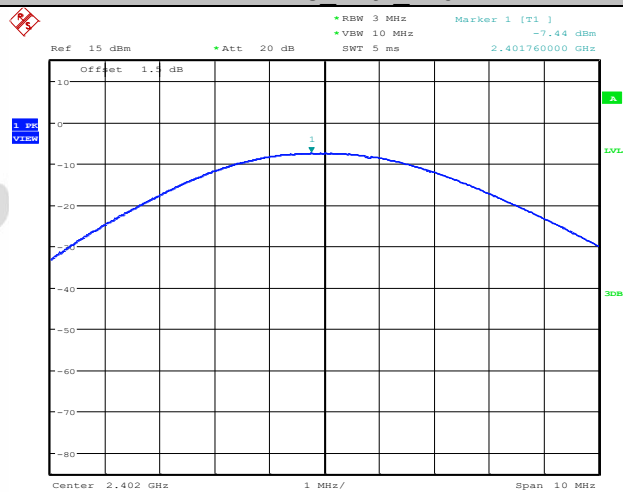


Date: 9.DEC.2022 16:57:45

## 2DH5 Ant1 2441

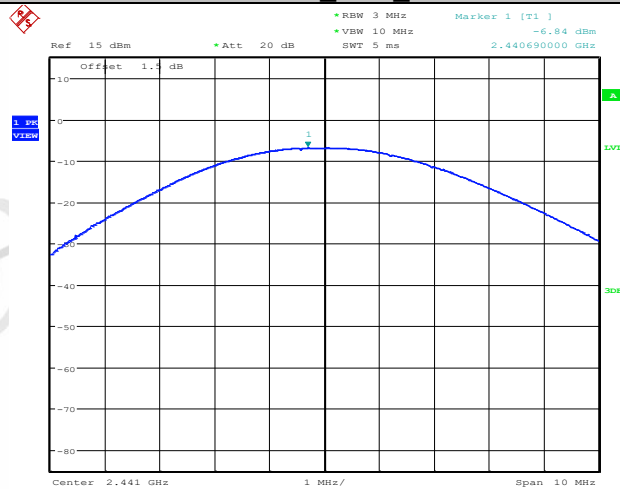


Date: 9.DEC.2022 17:07:26

## 2DH5 Ant1 2480

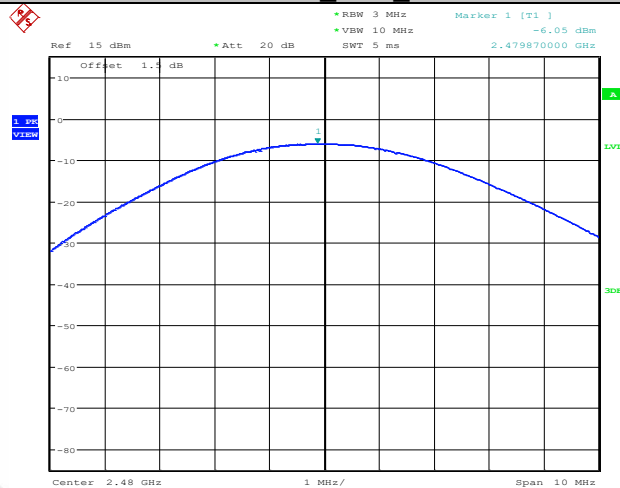


Date: 9.DEC.2022 17:09:27

## 3DH5 Ant1 2402

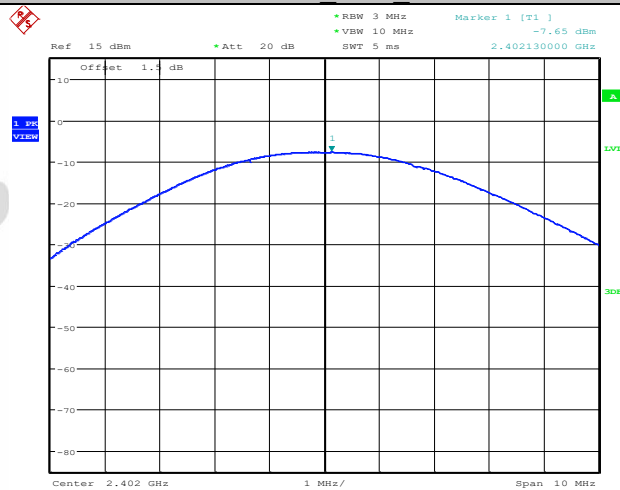


Date: 9.DEC.2022 17:12:11

## 3DH5\_Ant1\_2441

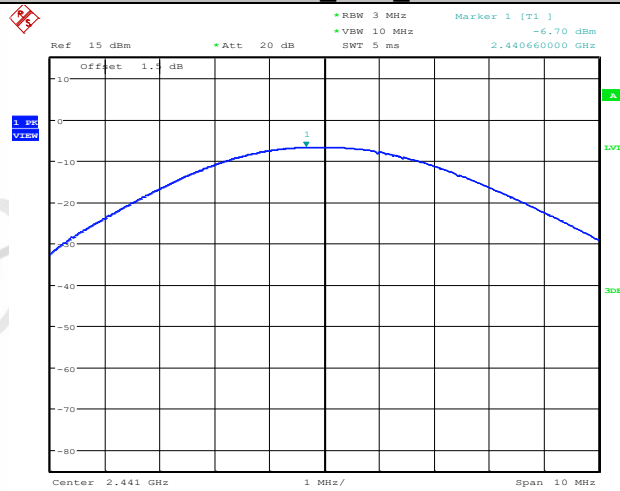

Date: 9.DEC.2022 17:14:20

## 3DH5\_Ant1\_2480

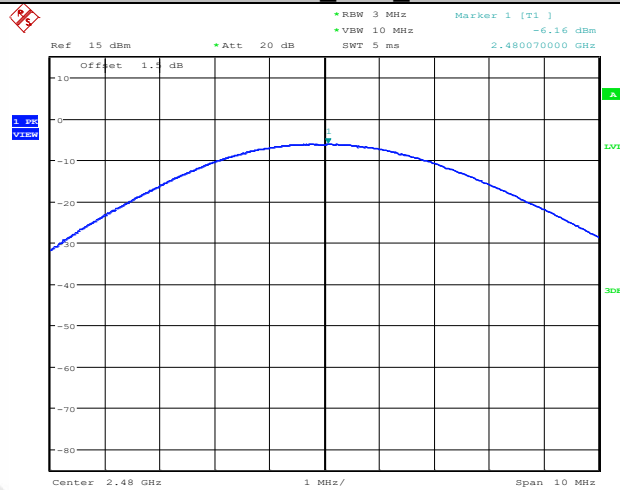

Date: 9.DEC.2022 17:16:26

## 5. 20 dB Bandwidth and 99% Bandwidth

### 5.1. Block diagram of test setup

Same as section 4.1

### 5.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 5.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

Note:


- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).

### 5.4. Test result


| Test Mode      | Frequency (MHz) | 20 dB bandwidth Result (MHz) | 99% bandwidth Result (MHz) | Verdict |
|----------------|-----------------|------------------------------|----------------------------|---------|
| GFSK           | 2402            | 1.030                        | 0.954                      | Pass    |
|                | 2441            | 1.030                        | 0.960                      | Pass    |
|                | 2480            | 1.034                        | 0.956                      | Pass    |
| $\pi/4$ -DQPSK | 2402            | 1.242                        | 1.168                      | Pass    |
|                | 2441            | 1.238                        | 1.168                      | Pass    |
|                | 2480            | 1.270                        | 1.164                      | Pass    |
| 8DPSK          | 2402            | 1.262                        | 1.164                      | Pass    |
|                | 2441            | 1.264                        | 1.166                      | Pass    |
|                | 2480            | 1.264                        | 1.162                      | Pass    |

## 5.5. Original test data

20 dB bandwidth:

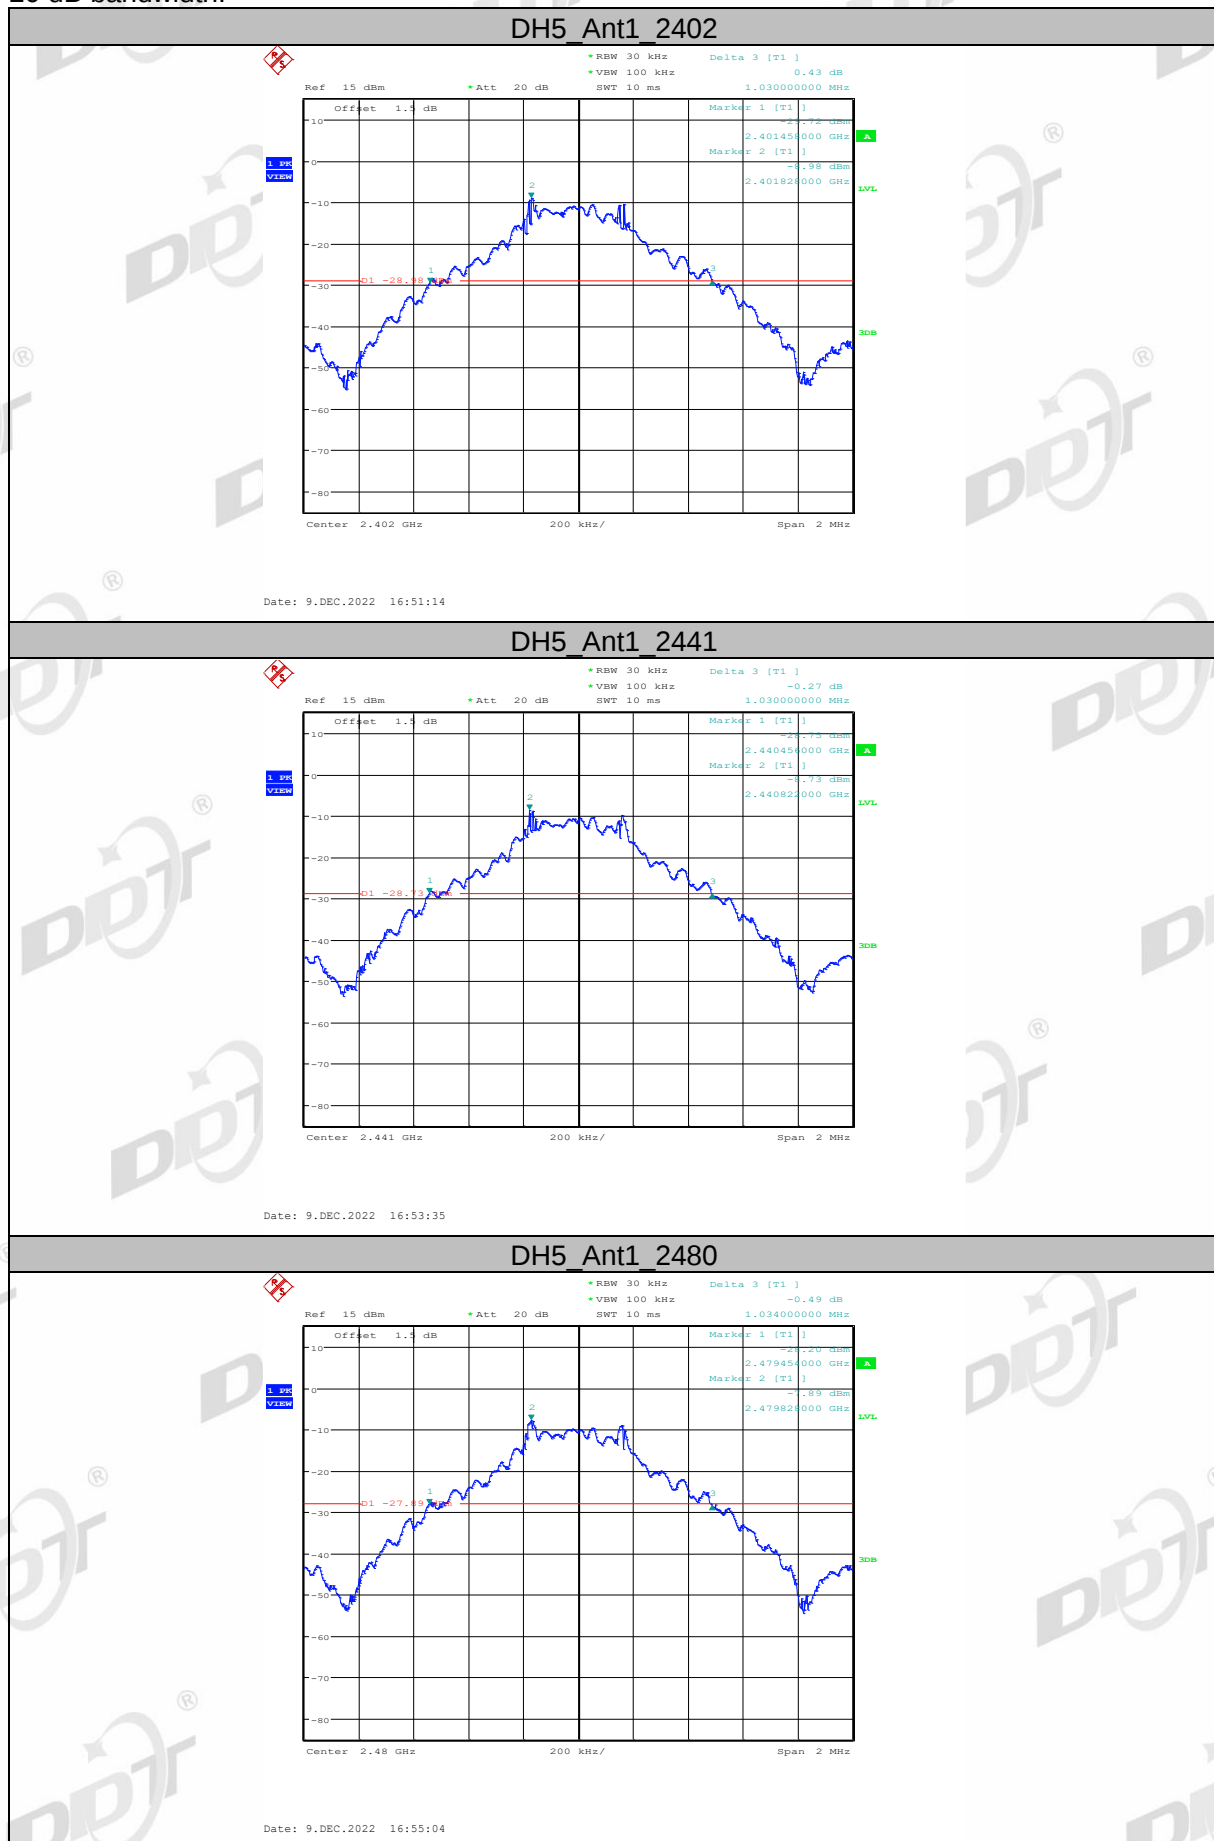


## 2DH5 Ant1 2402

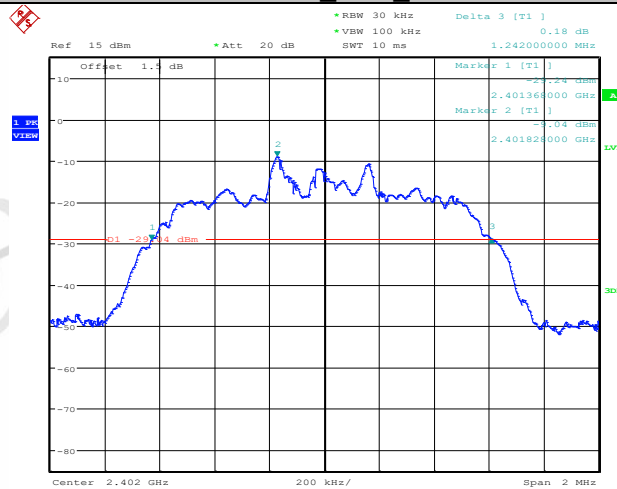


Date: 9.DEC.2022 16:57:21

## 2DH5 Ant1 2441

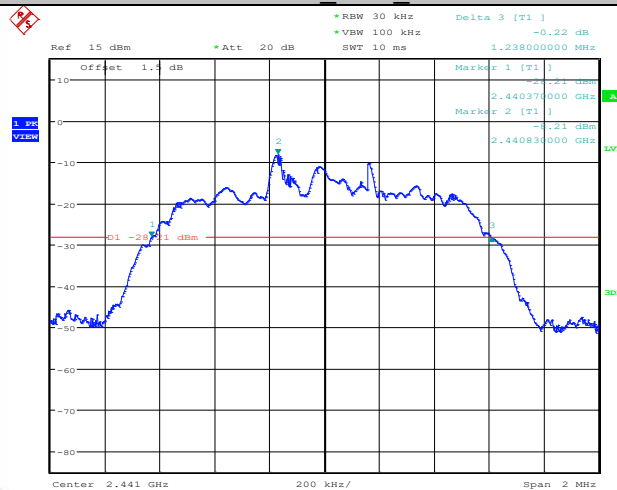


Date: 9.DEC.2022 17:07:04

## 2DH5 Ant1 2480

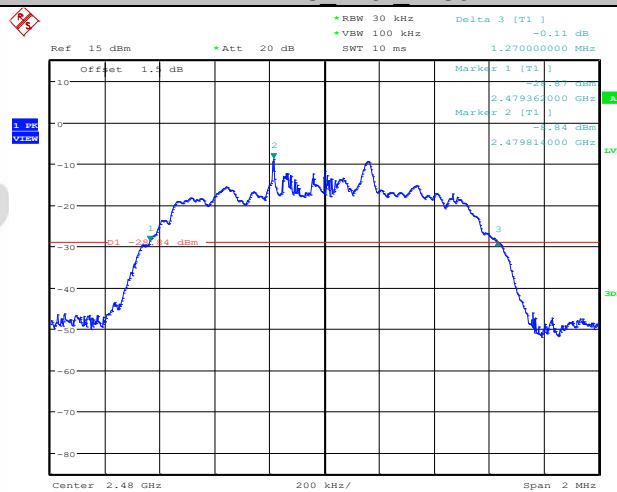


Date: 9.DEC.2022 17:08:58

## 3DH5 Ant1 2402

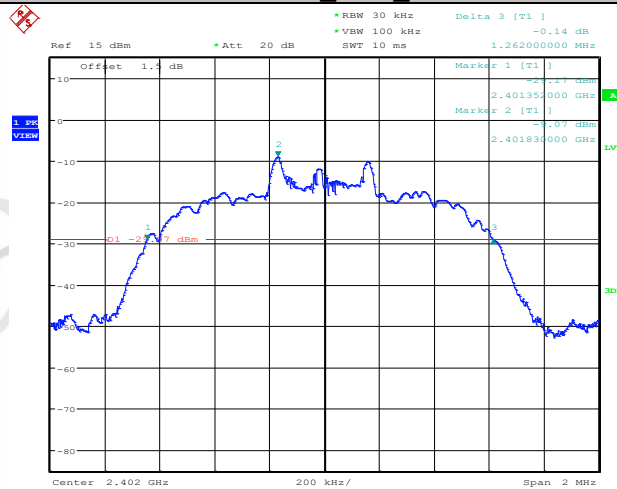


Date: 9.DEC.2022 17:11:41

## 3DH5 Ant1 2441

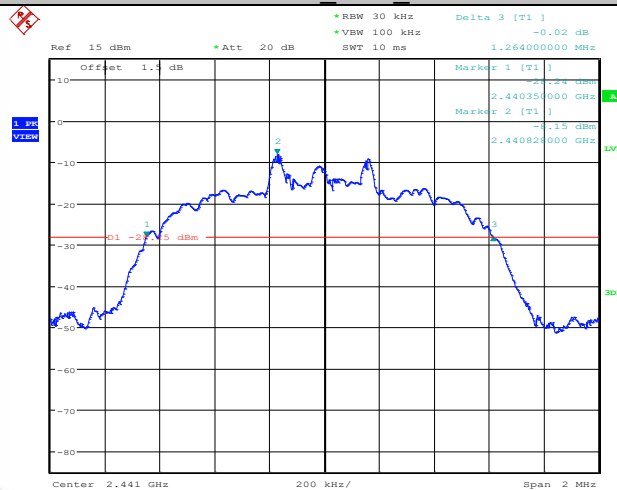

Date: 9.DEC.2022 17:13:51

## 3DH5 Ant1 2480

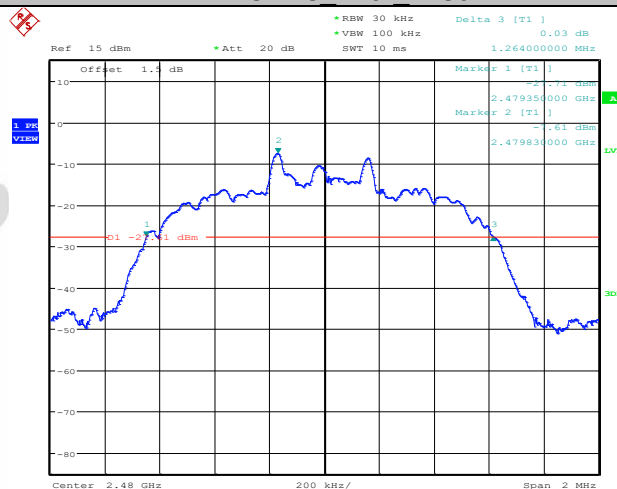


Date: 9.DEC.2022 17:15:51

99% bandwidth:




## 2DH5 Ant1 2402

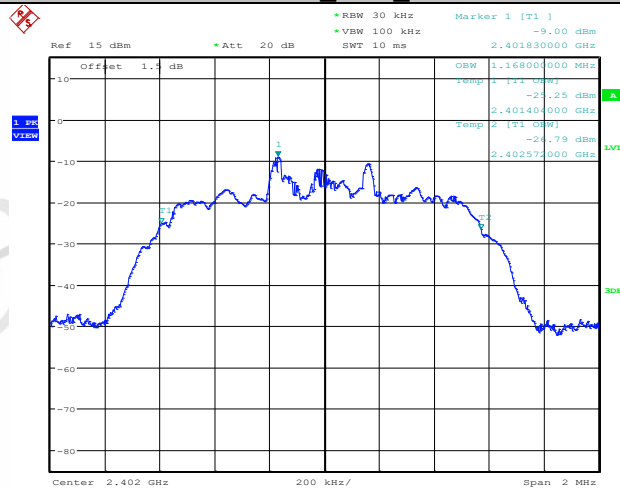


Date: 9.DEC.2022 16:57:37

## 2DH5 Ant1 2441

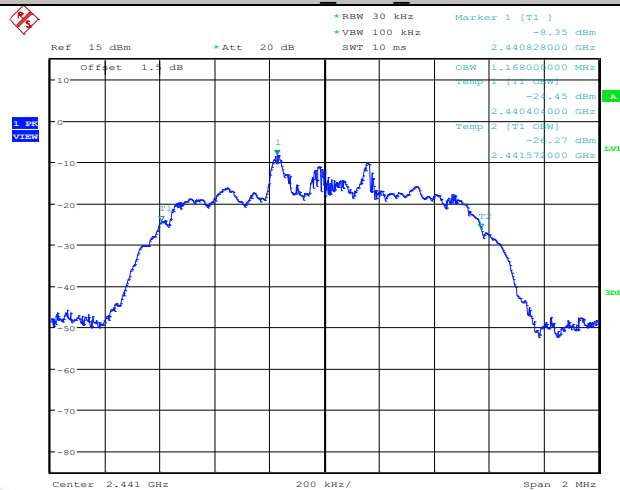


Date: 9.DEC.2022 17:07:17

## 2DH5 Ant1 2480

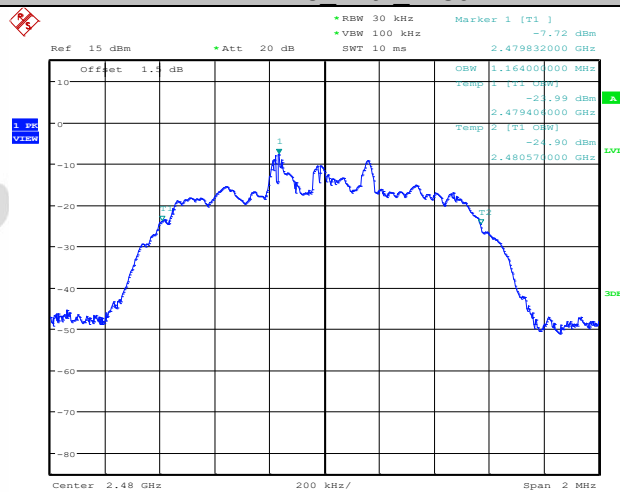


Date: 9.DEC.2022 17:09:18

## 3DH5 Ant1 2402

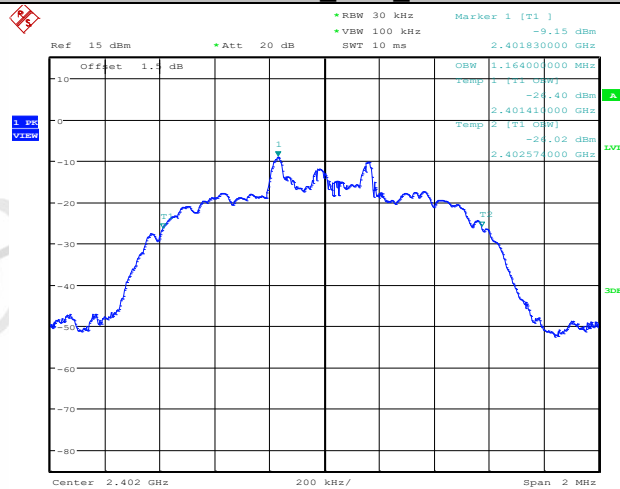


Date: 9.DEC.2022 17:12:02

## 3DH5 Ant1 2441

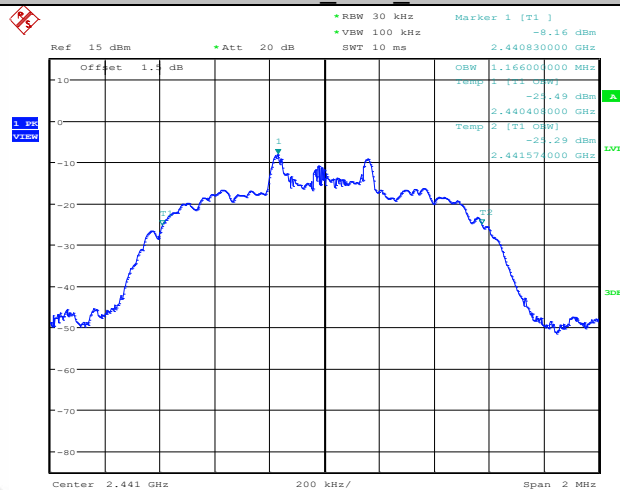

Date: 9.DEC.2022 17:14:12

## 3DH5 Ant1 2480

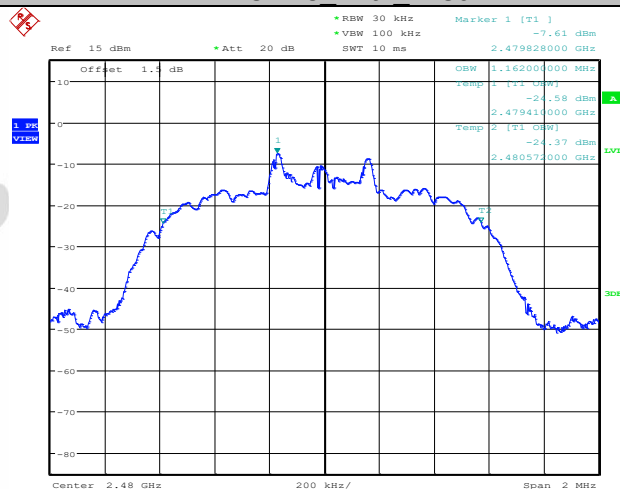

Date: 9.DEC.2022 17:16:17

## 6. Carrier Frequency Separation

### 6.1. Block diagram of test setup

Same as section 4.1

### 6.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 6.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The carrier frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.


Note:

- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).

### 6.4. Test result

| Test Mode      | Channel separation (MHz) | 20dB bandwidth (MHz)<br>(worst case) | Limit (MHz)<br>2/3 of 20dB bandwidth | Verdict |
|----------------|--------------------------|--------------------------------------|--------------------------------------|---------|
| GFSK           | 1.003                    | 1.034                                | ≥0.689                               | Pass    |
| $\pi/4$ -DQPSK | 0.997                    | 1.270                                | ≥0.847                               | Pass    |
| 8DPSK          | 1.006                    | 1.264                                | ≥0.843                               | Pass    |

## 6.5. Original test data

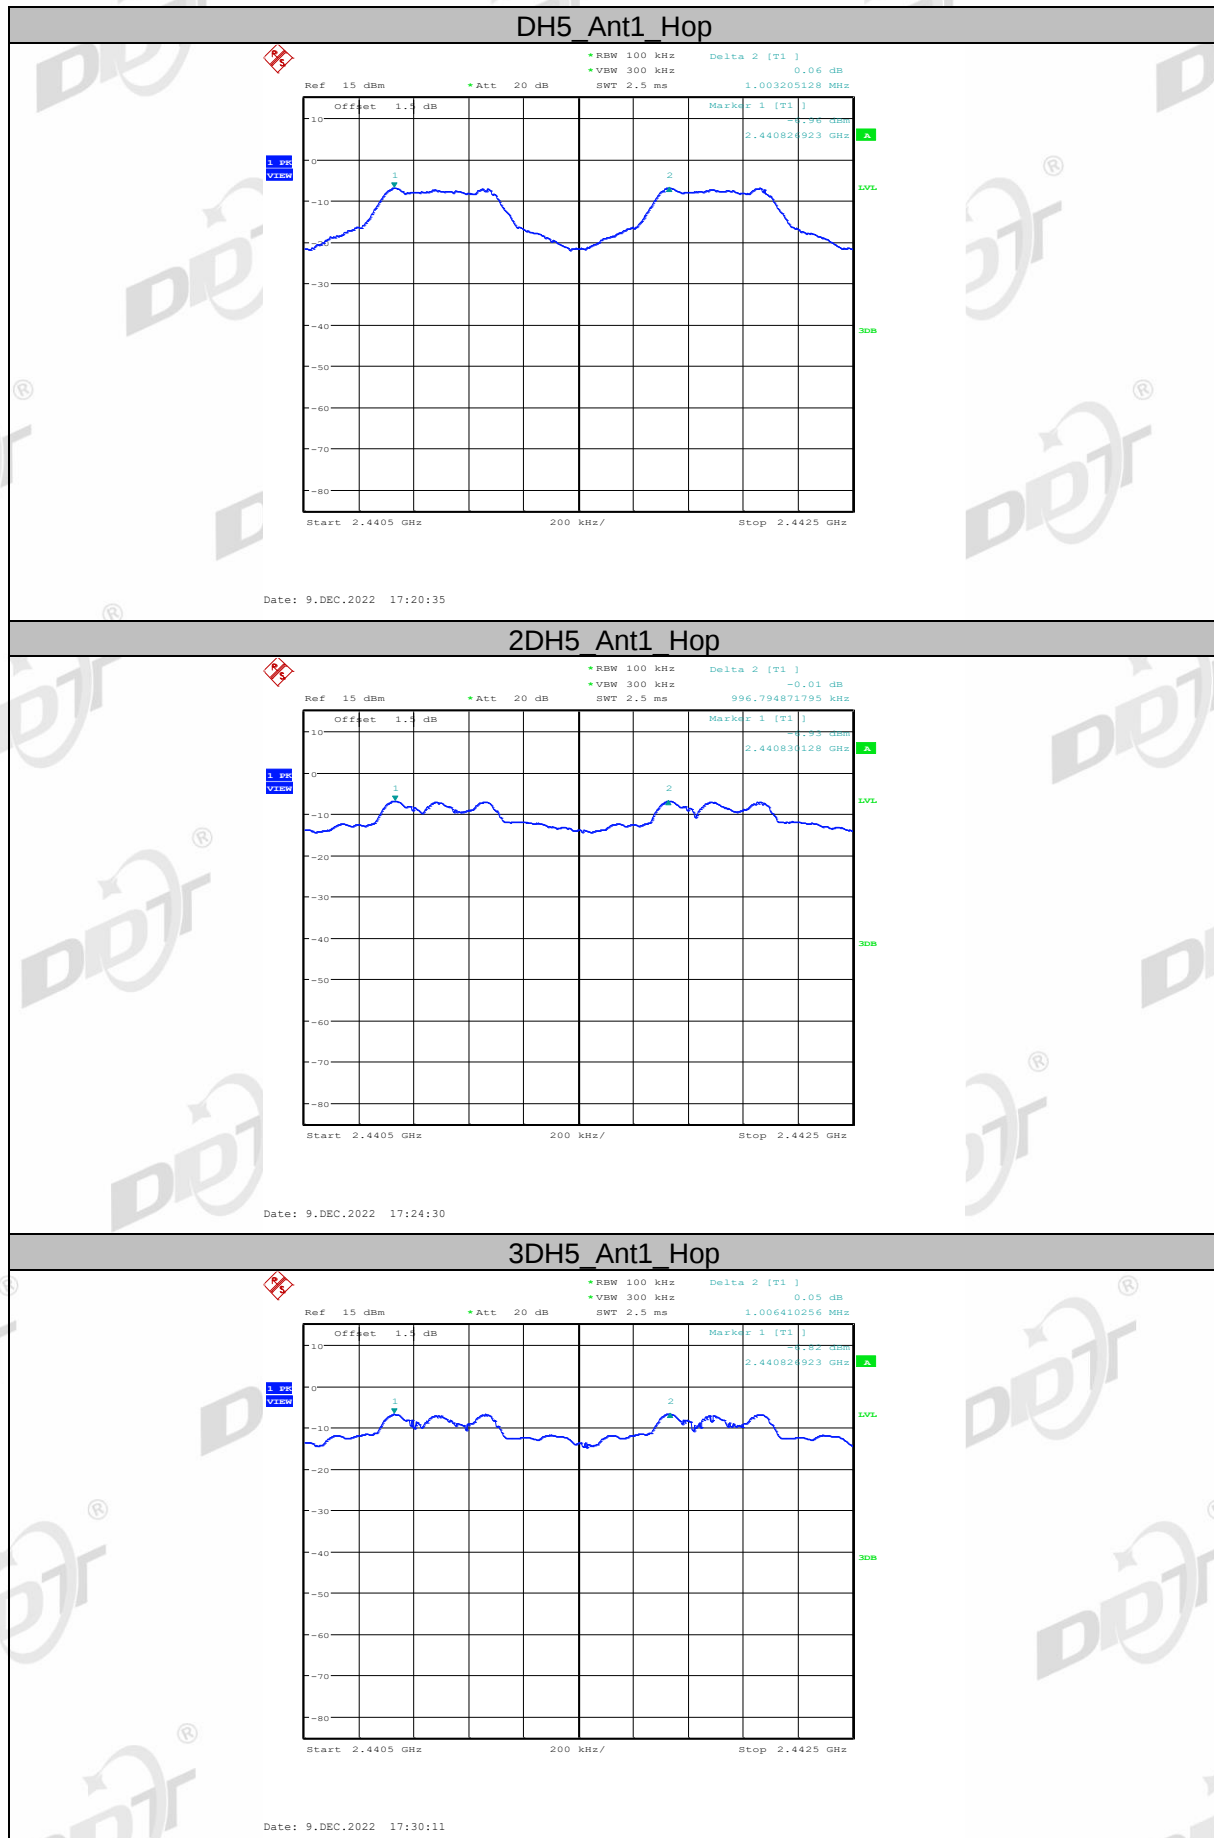

## 7. Number of Hopping Channel

### 7.1. Block diagram of test setup

Same as section 4.1

### 7.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The number of hopping channels was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.


Note:

- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).

### 7.4. Test result

| Mode           | Number of hopping channels | Limit | Verdict |
|----------------|----------------------------|-------|---------|
| GFSK           | 79                         | >15   | Pass    |
| $\pi/4$ -DQPSK | 79                         | >15   | Pass    |
| 8DPSK          | 79                         | >15   | Pass    |

## 7.5. Original test data

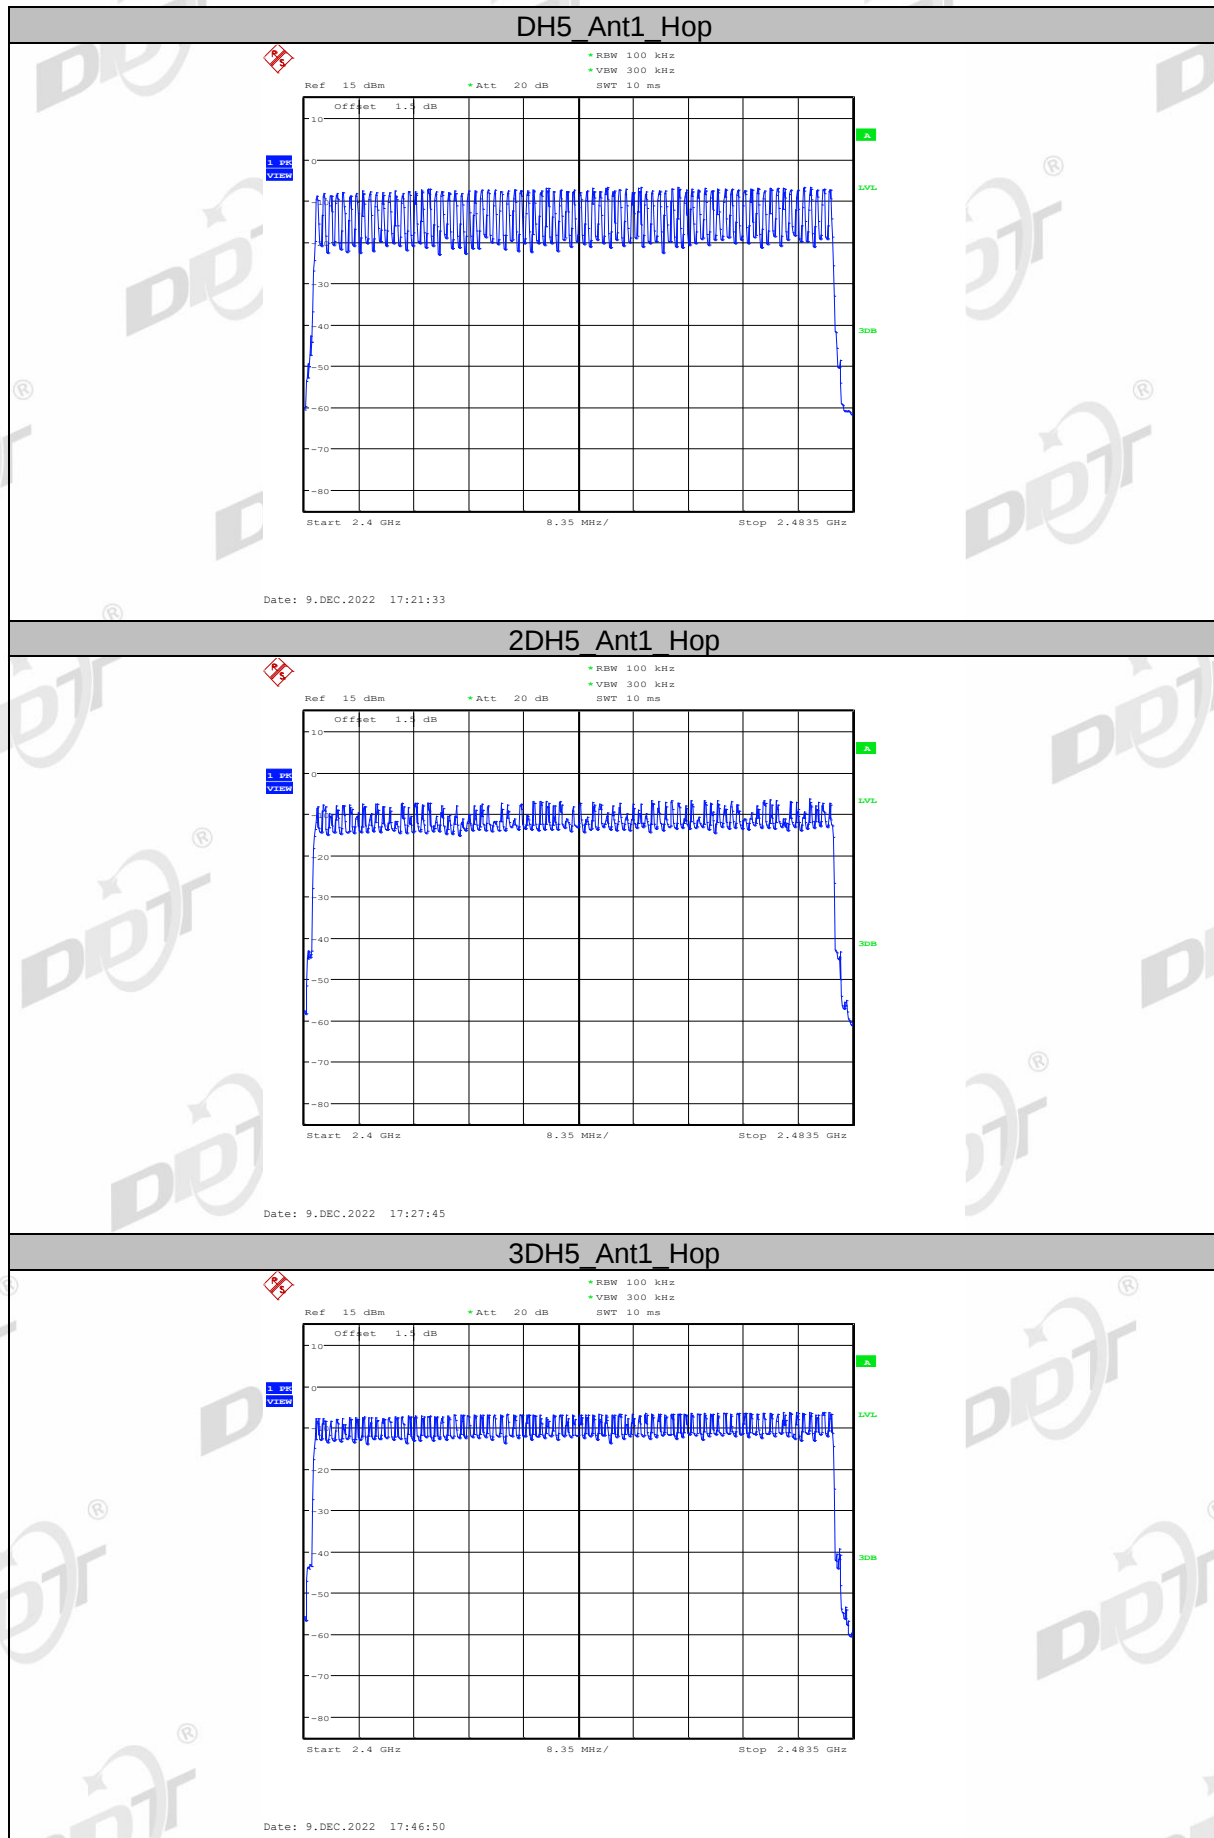

## 8. Dwell Time

### 8.1. Block diagram of test setup

Same as section 4.1

### 8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 8.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$ .
- (3) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula  $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$ .

Note:


1. The attenuator loss was inputted into spectrum analyzer as amplitude offset.
2. The pathloss of external cable: 0.5dB (According to the manufacturer's claims).


### 8.4. Test result

| Mode | Dwell time (s) | Pulse's on time (ms) | Total hops | Limit  | Verdict |
|------|----------------|----------------------|------------|--------|---------|
| DH1  | 0.084          | 0.37                 | 226        | <400ms | Pass    |
| DH3  | 0.220          | 1.63                 | 135        | <400ms | Pass    |
| DH5  | 0.246          | 2.89                 | 85         | <400ms | Pass    |
| 2DH1 | 0.083          | 0.37                 | 224        | <400ms | Pass    |
| 2DH3 | 0.217          | 1.63                 | 133        | <400ms | Pass    |
| 2DH5 | 0.262          | 2.88                 | 91         | <400ms | Pass    |
| 3DH1 | 0.083          | 0.37                 | 225        | <400ms | Pass    |
| 3DH3 | 0.217          | 1.63                 | 133        | <400ms | Pass    |
| 3DH5 | 0.285          | 2.88                 | 99         | <400ms | Pass    |



Note:  $\text{Dwell time} = \text{total hops} \times \text{pulse's on time}$ .

## 8.5. Original test data

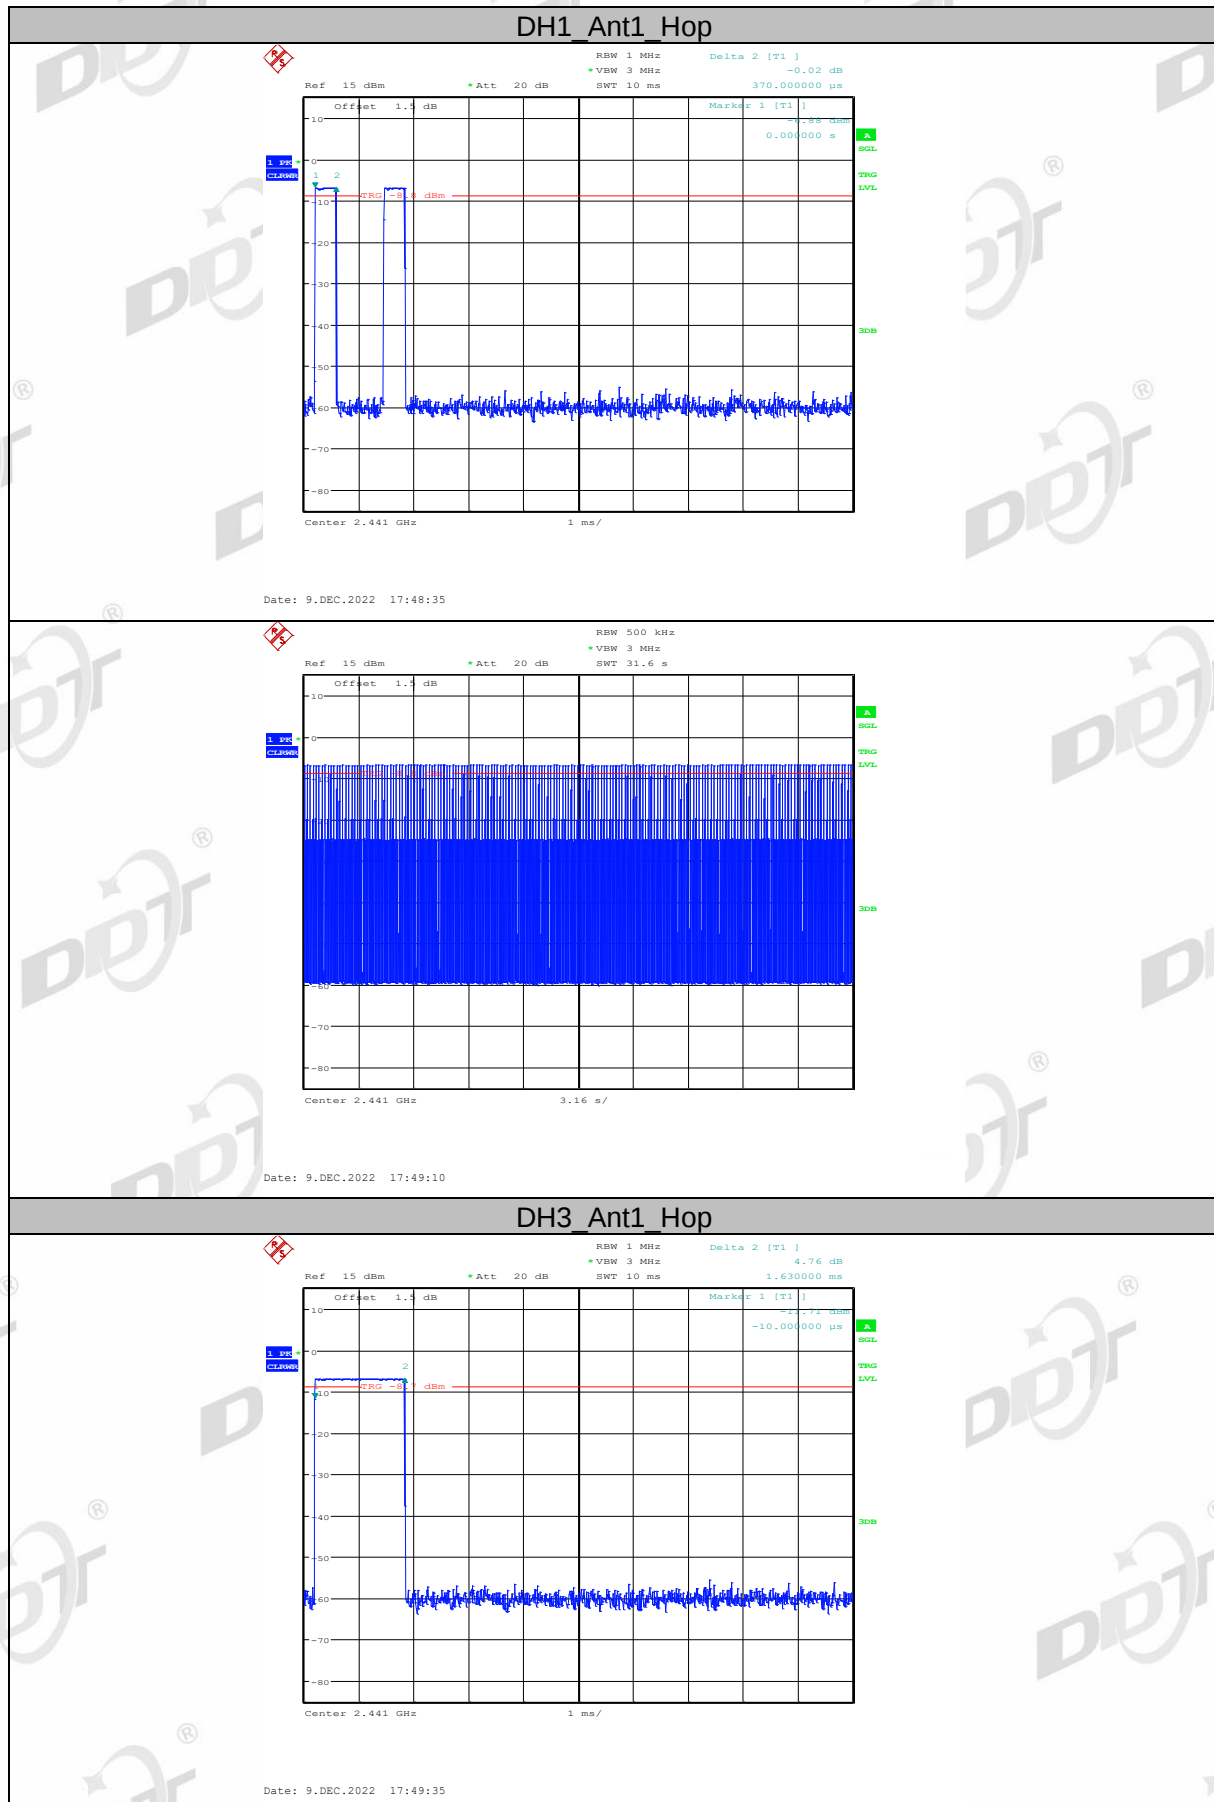


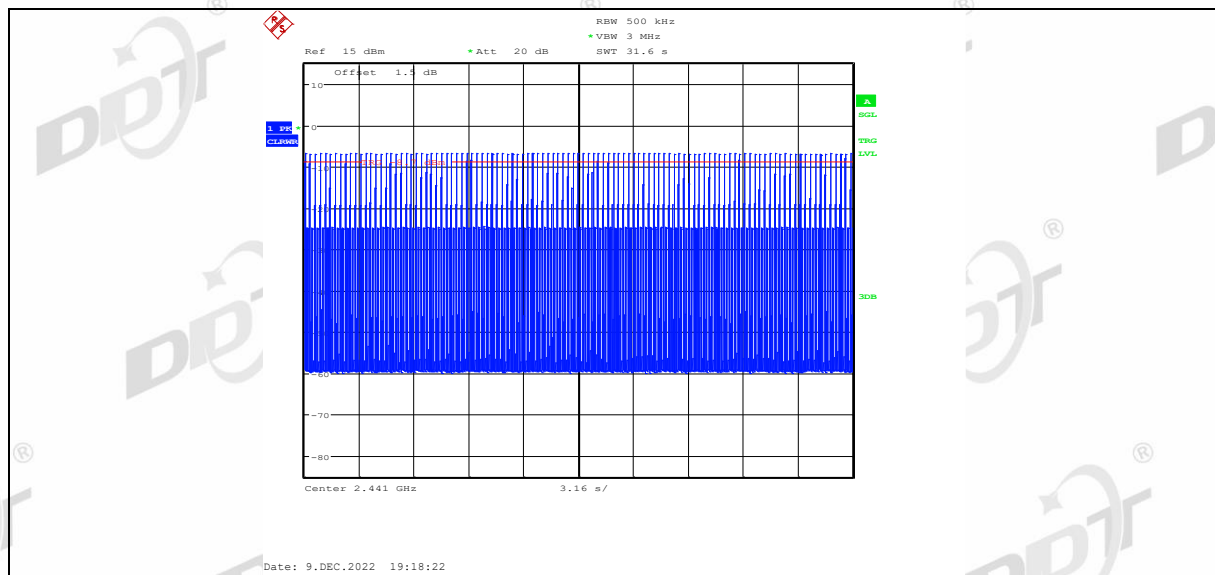


## DH5\_Ant1\_Hop

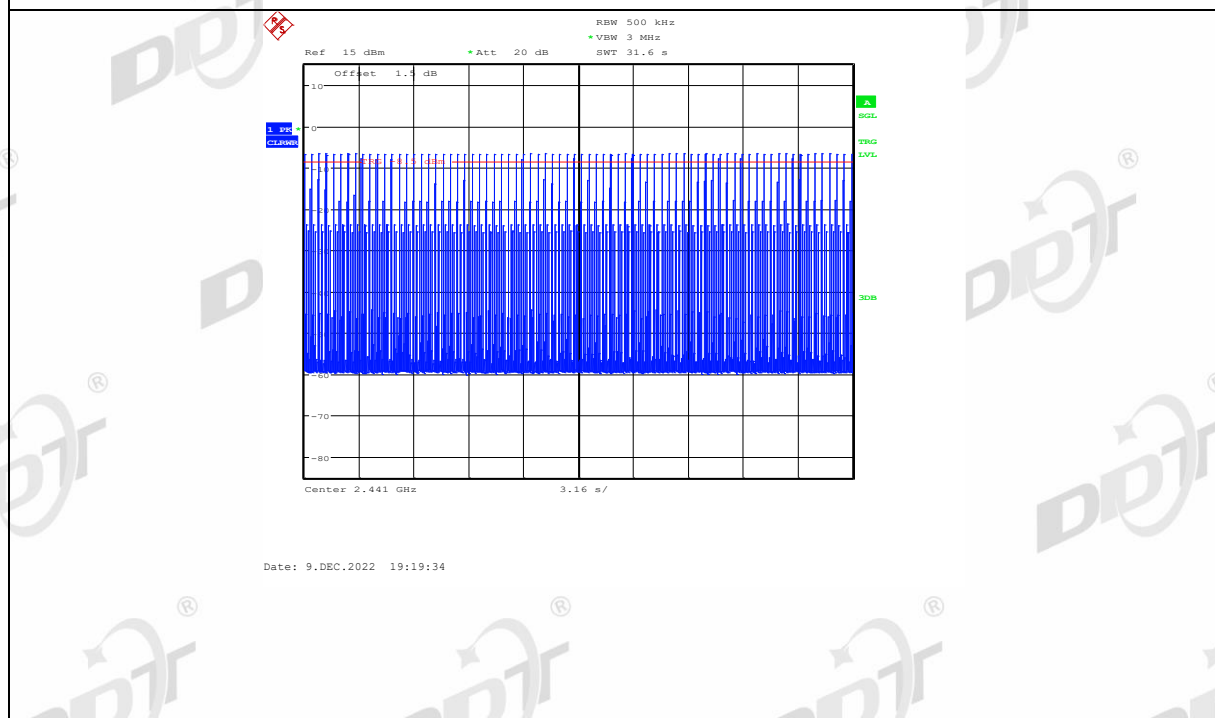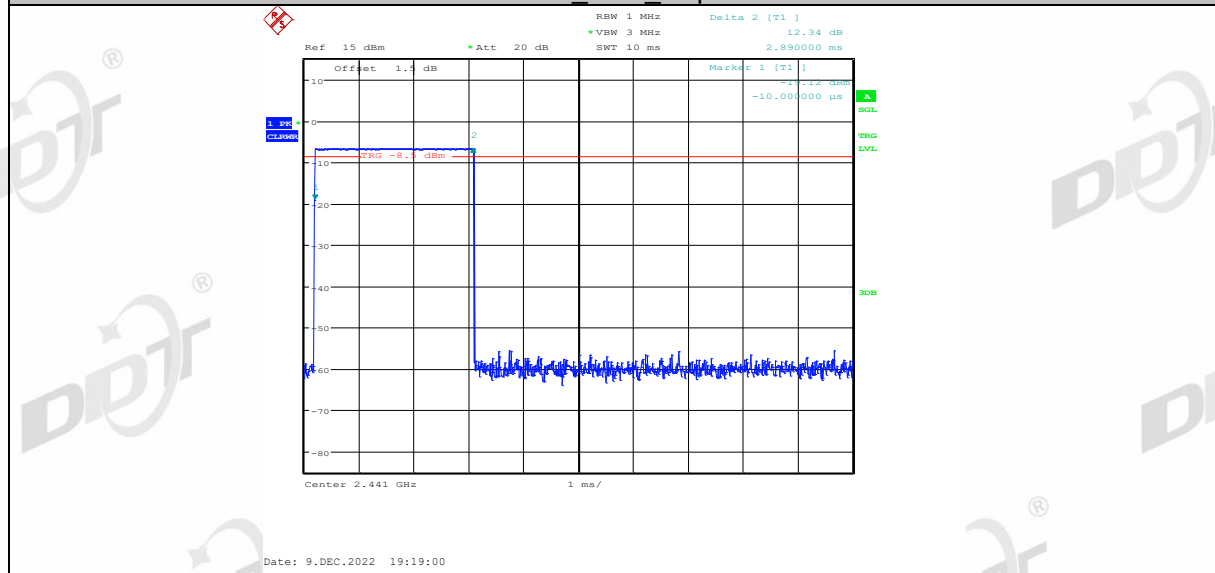

## 2DH1\_Ant1\_Hop

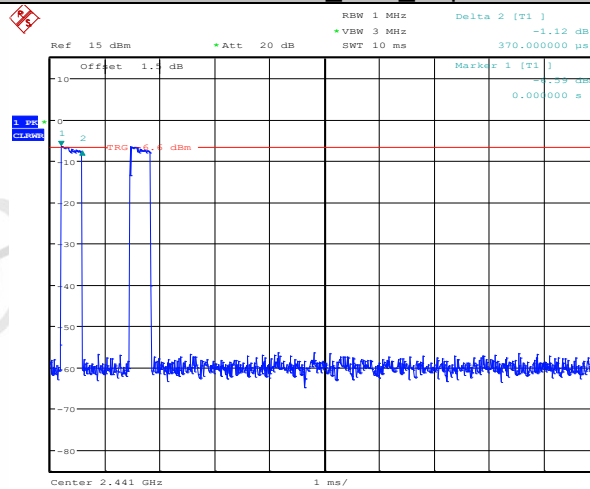


Date: 9.DEC.2022 19:20:00

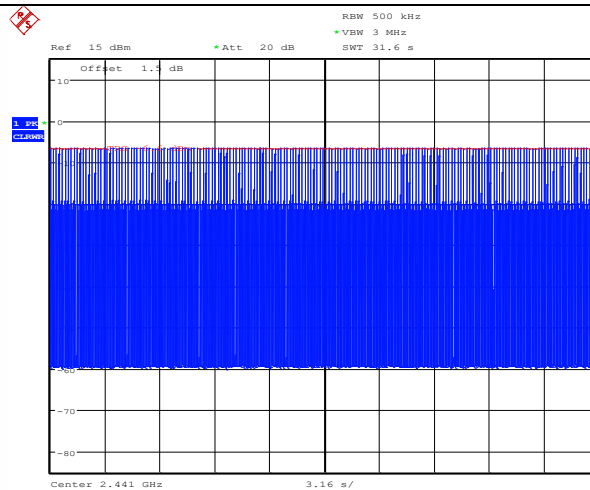


Date: 9.DEC.2022 19:20:34



## 2DH3\_Ant1\_Hop

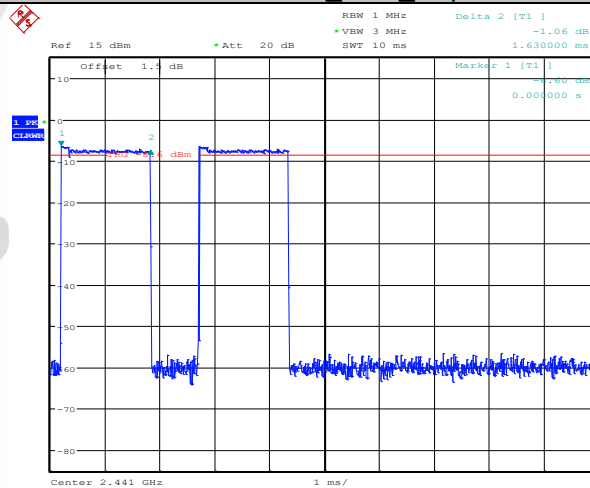


Date: 9.DEC.2022 19:21:02

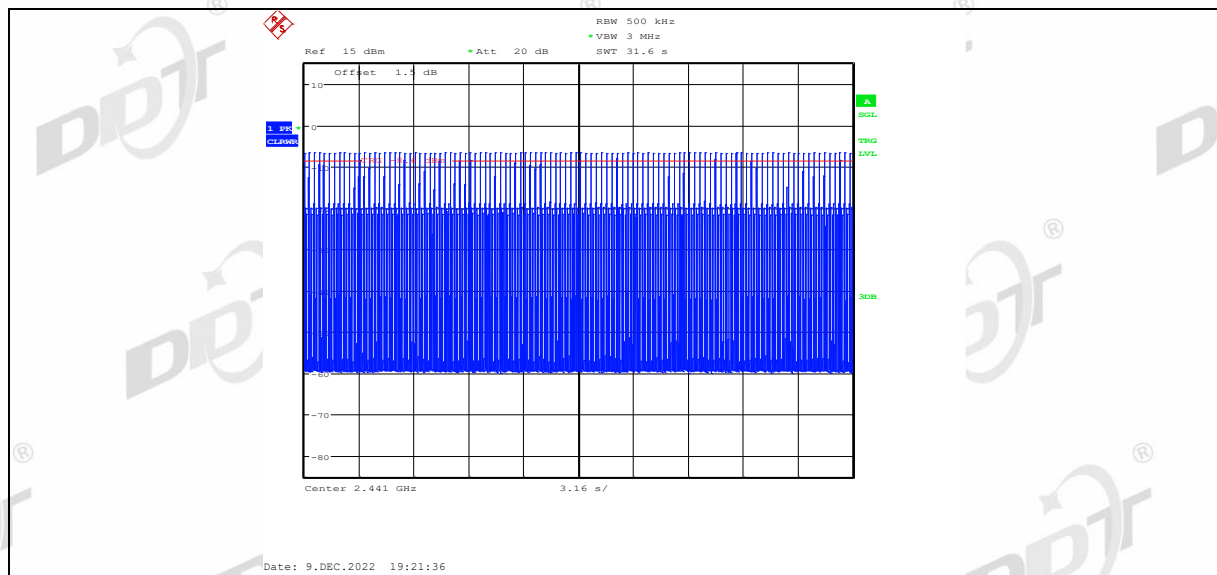

## 2DH5\_Ant1\_Hop

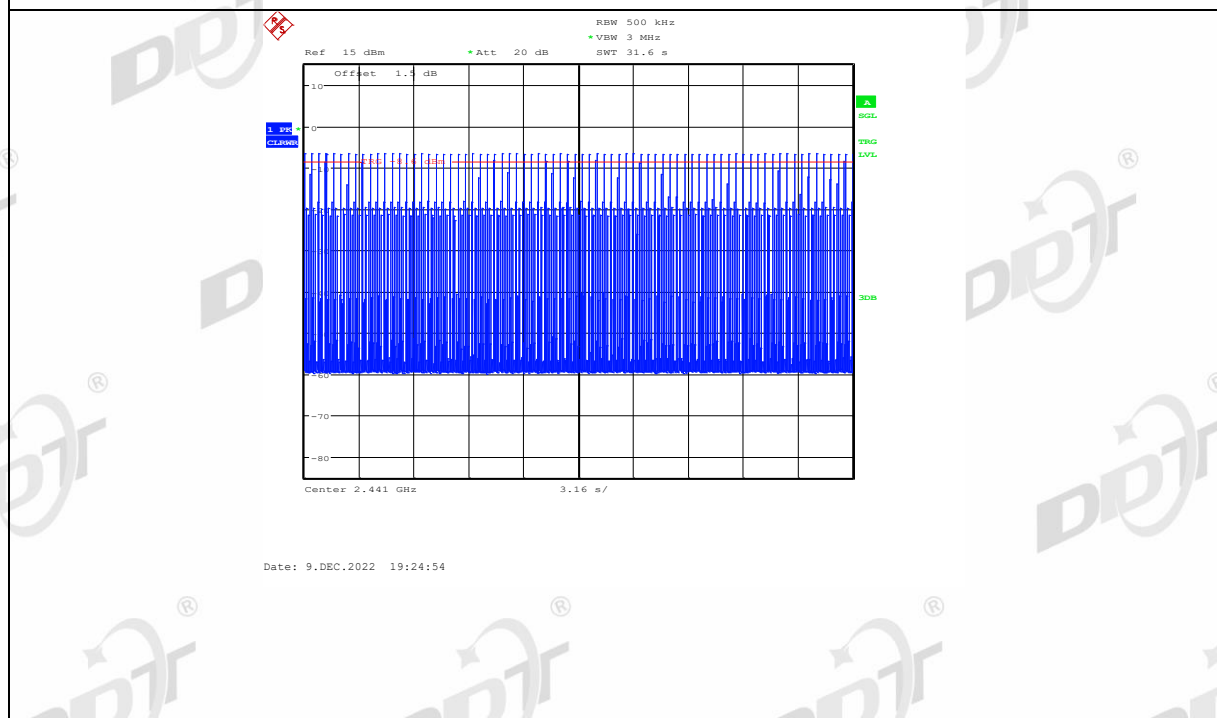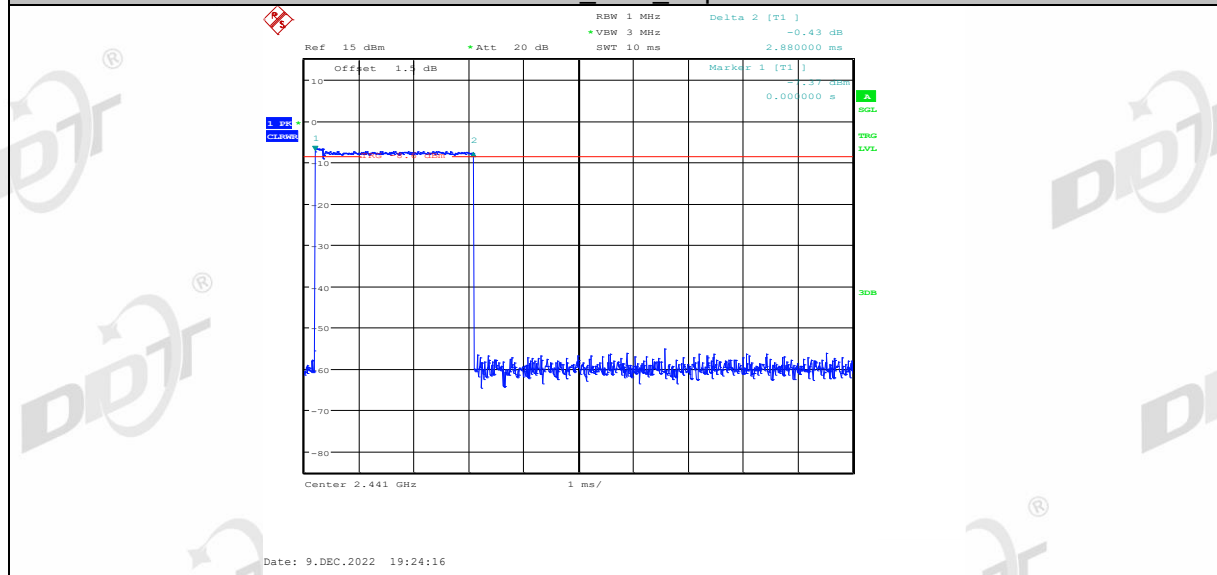


## 3DH1\_Ant1\_Hop

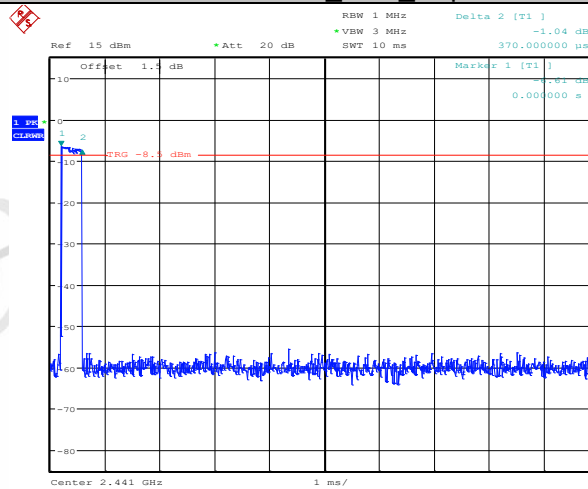


Date: 9.DEC.2022 19:25:23



## 3DH3\_Ant1\_Hop

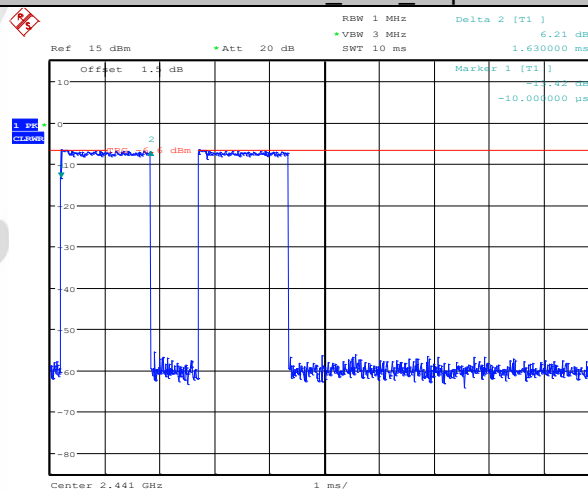

Date: 9.DEC.2022 19:26:23

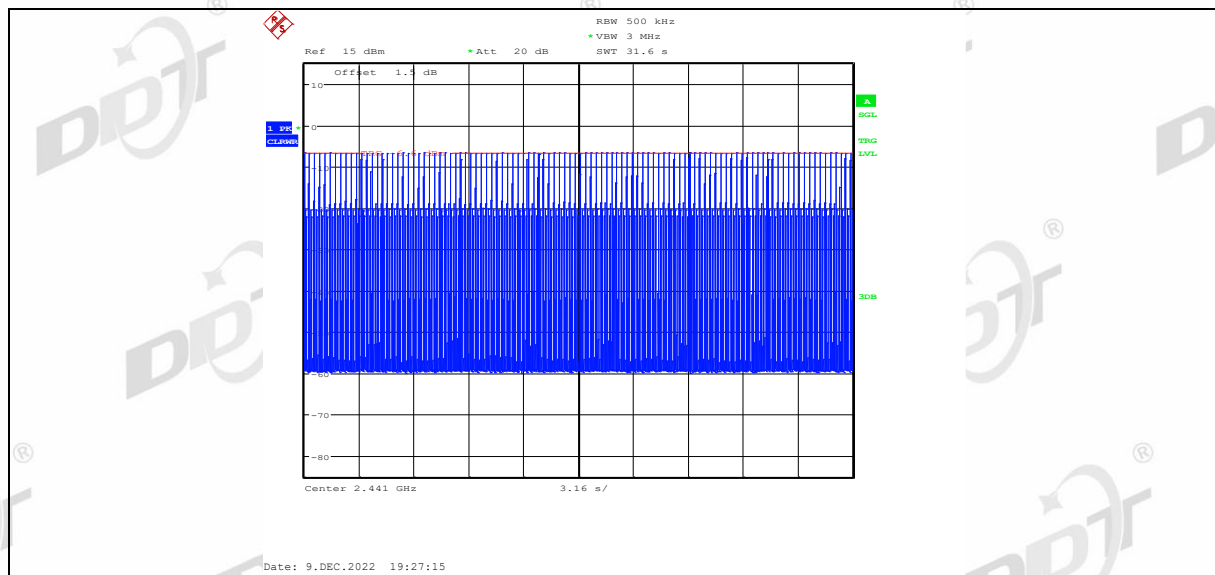

## 3DH5\_Ant1\_Hop

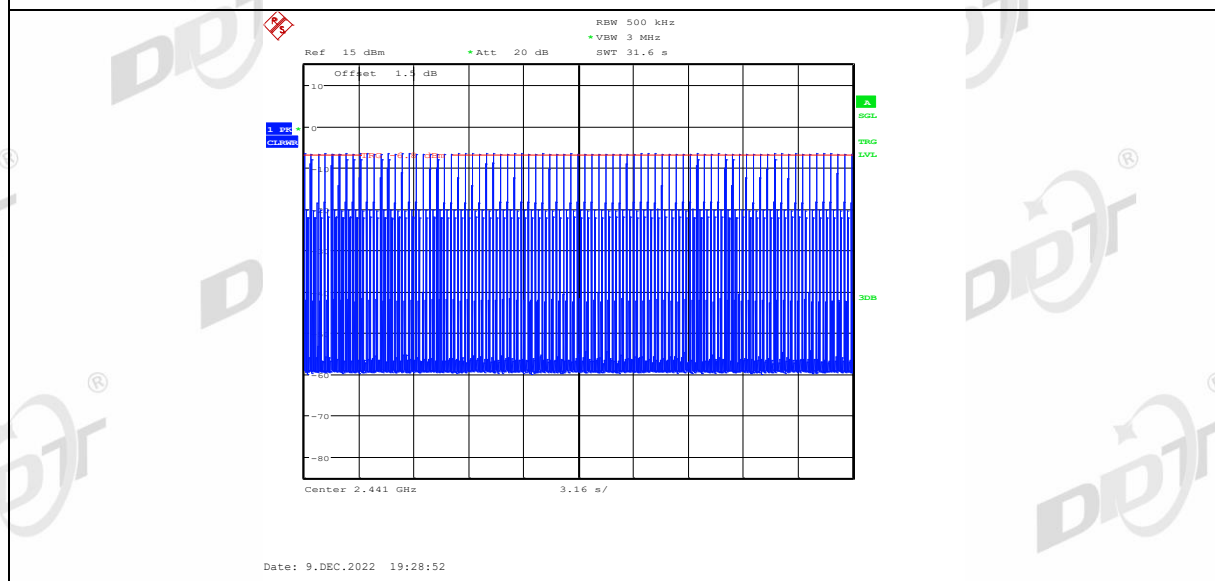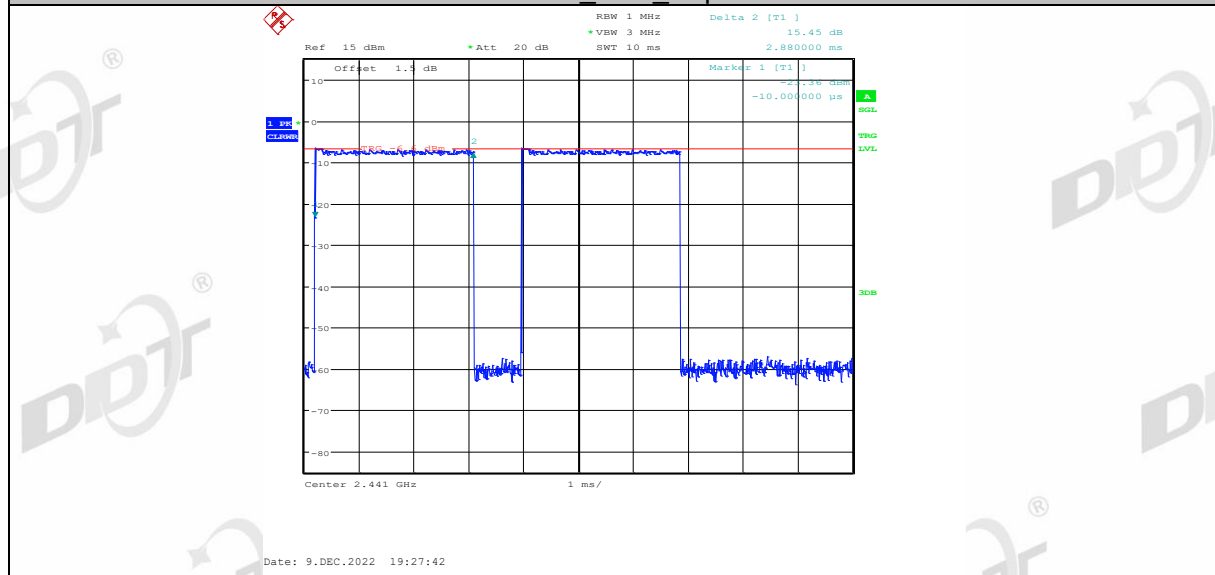

## 9. Band Edge Compliance (Conducted Method)

### 9.1. Block diagram of test setup

Same as section 4.1

### 9.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

### 9.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

|                |                                          |
|----------------|------------------------------------------|
| RBW:           | 100 kHz                                  |
| VBW:           | 300 kHz                                  |
| Span           | Encompass frequency range to be measured |
| Detector Mode: | Peak                                     |
| Sweep time:    | auto                                     |
| Trace mode     | Max hold                                 |

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


Note:

- 1.The attenuator loss was inputted into spectrum analyzer as amplitude offset.
- 2.The pathloss of external cable: 0.5dB (According to the manufacturer's claims).


### 9.4. Test result

| Mode           | Frequency (MHz)  | Verdict |
|----------------|------------------|---------|
| GFSK           | Hopping off 2402 | Pass    |
|                | Hopping off 2480 | Pass    |
|                | Hopping on       | Pass    |
| $\pi/4$ -DQPSK | Hopping off 2402 | Pass    |
|                | Hopping off 2480 | Pass    |
|                | Hopping on       | Pass    |
| 8DPSK          | Hopping off 2402 | Pass    |
|                | Hopping off 2480 | Pass    |
|                | Hopping on       | Pass    |


## 9.5. Original test data

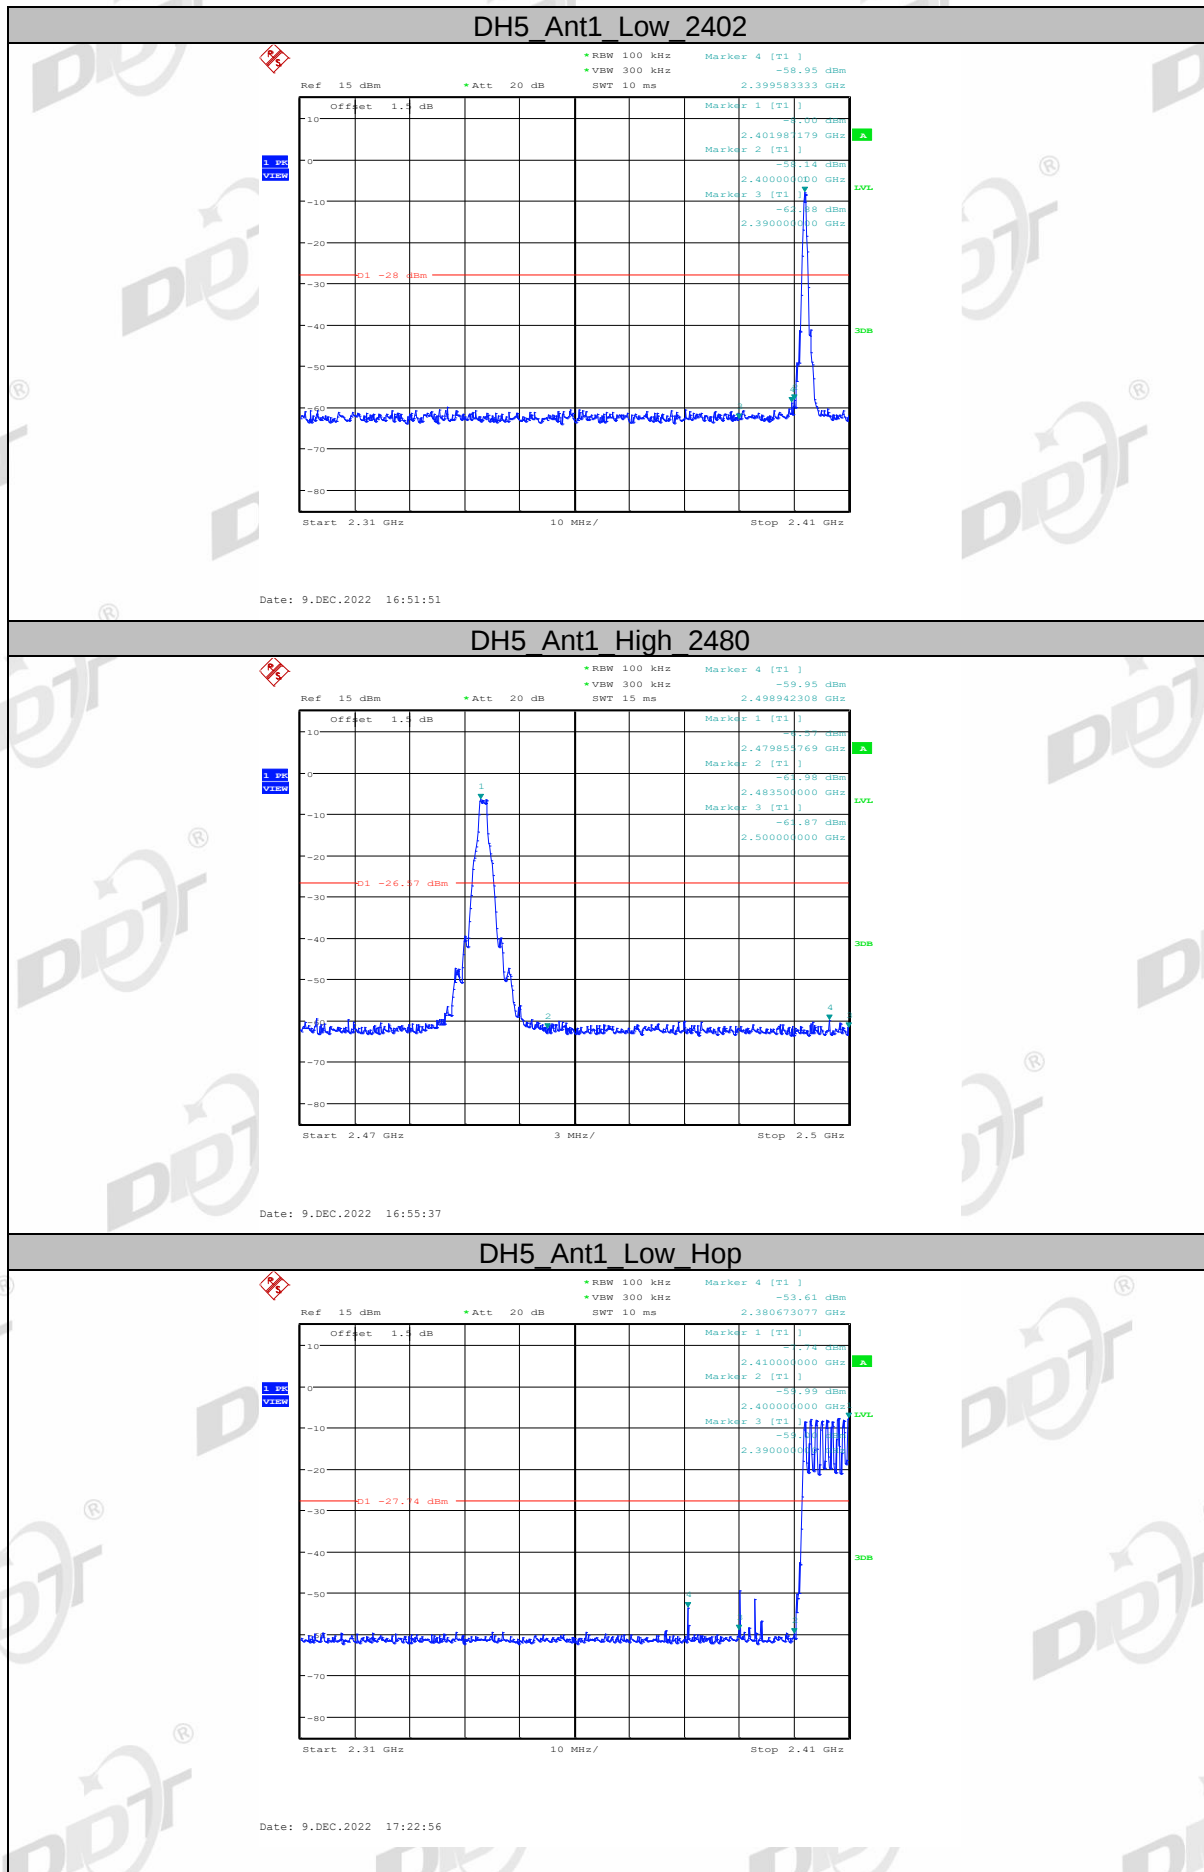


## DH5 Ant1\_High Hop

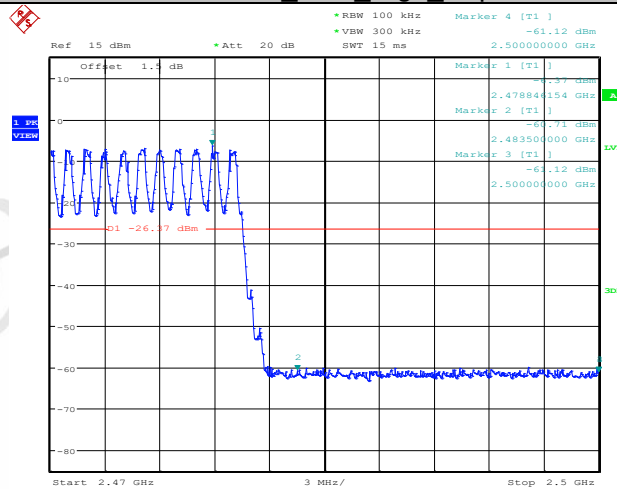


## 2DH5 Ant1 Low 2402

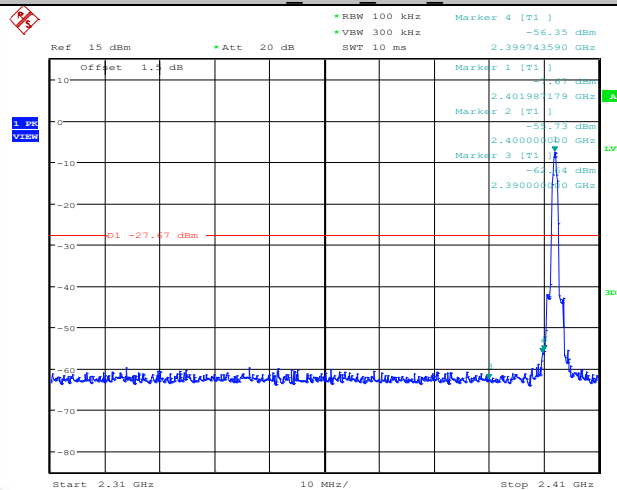


## 2DH5 Ant1 High 2480

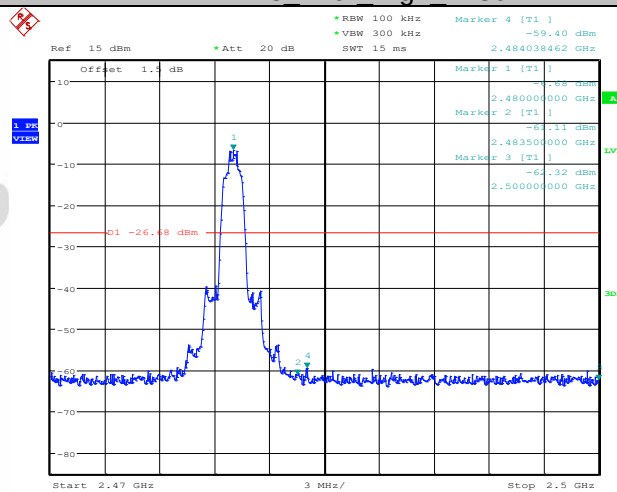


## 2DH5\_Ant1\_Low\_Hop

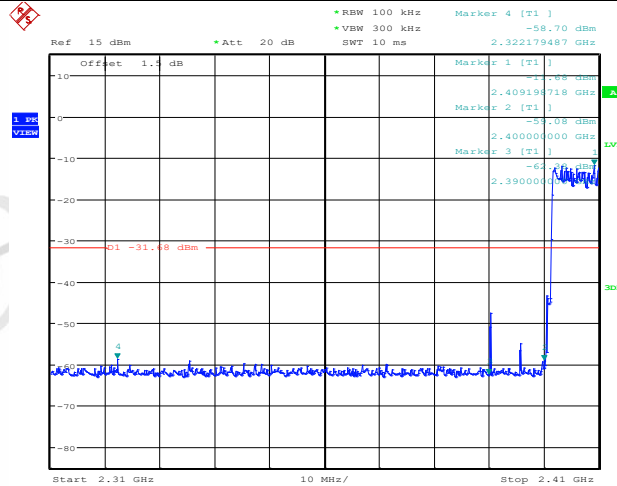

## 2DH5\_Ant1\_High\_Hop

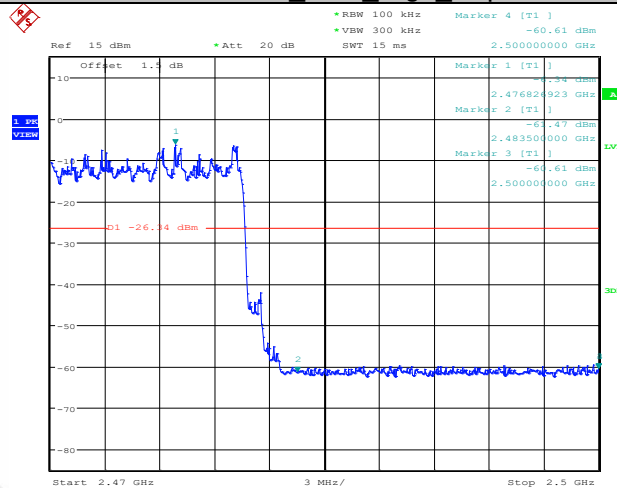

## 3DH5\_Ant1\_Low\_2402

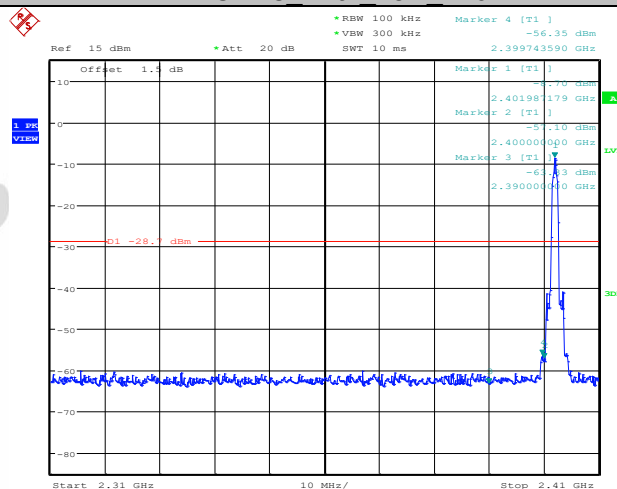





## 10. Radiated Emission

### 10.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

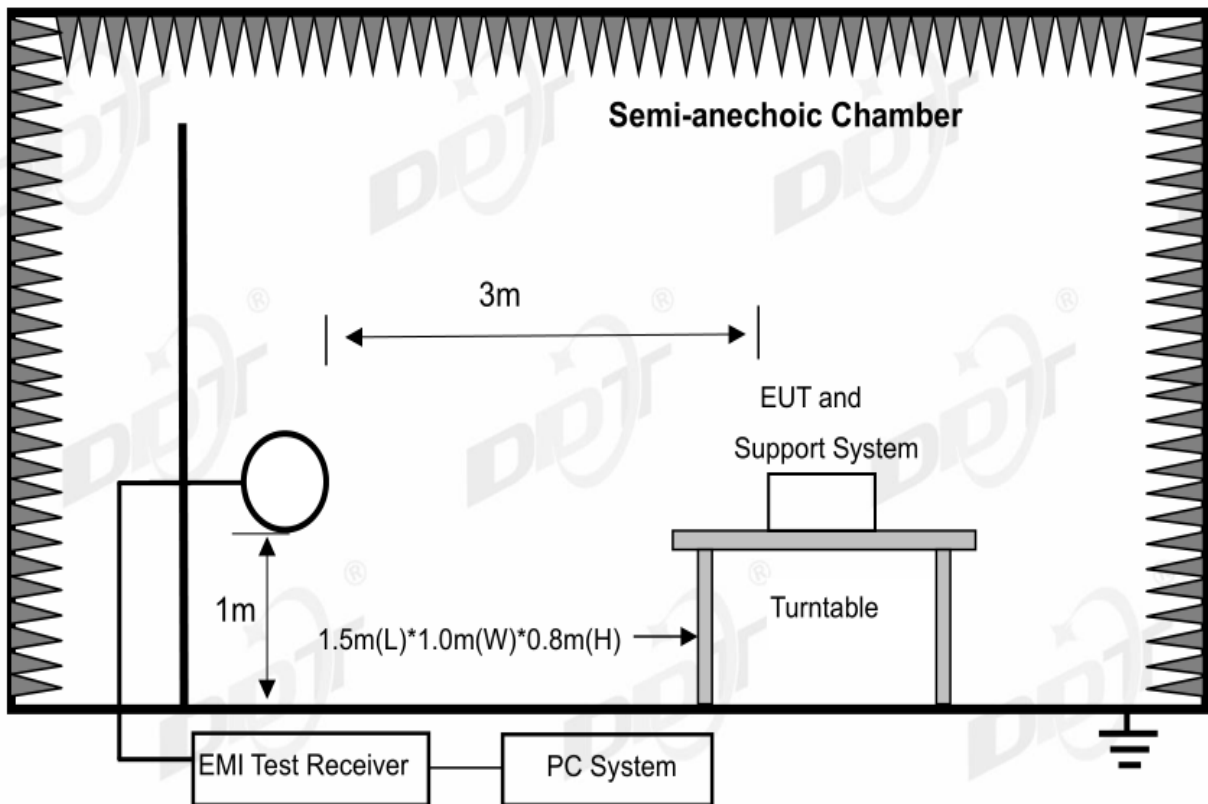

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

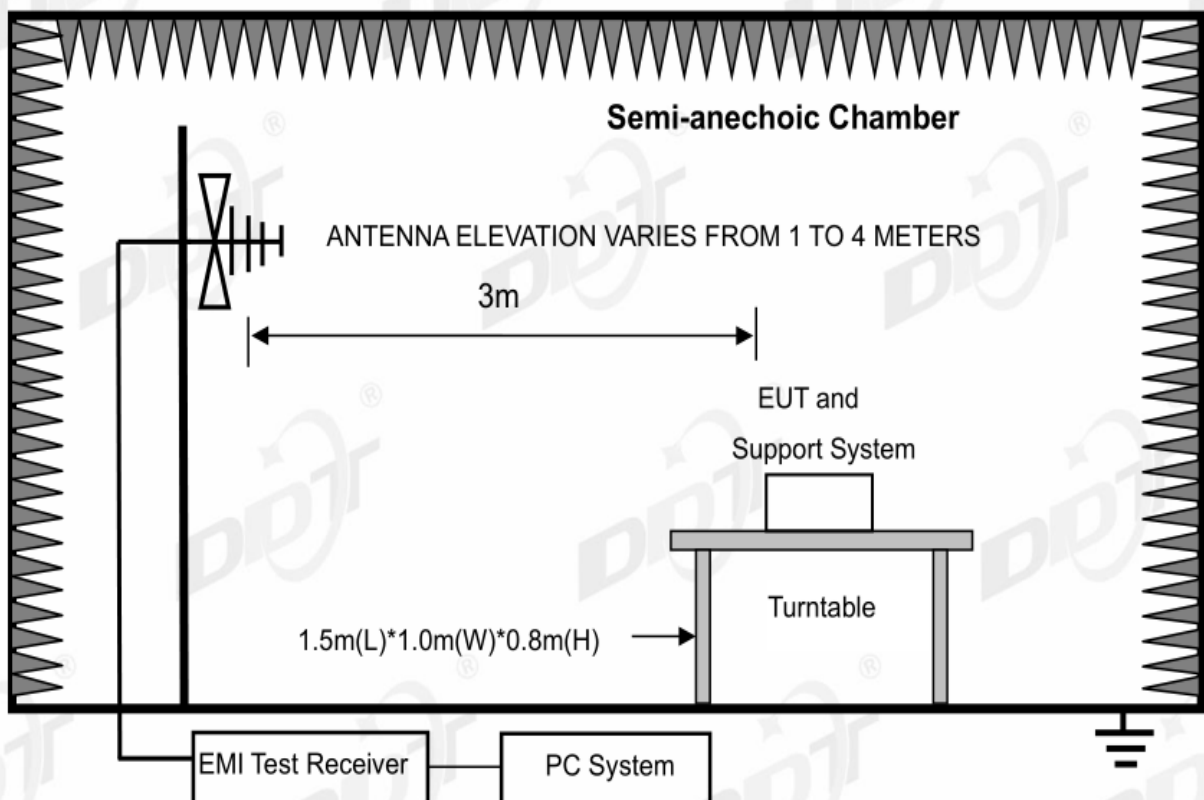

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

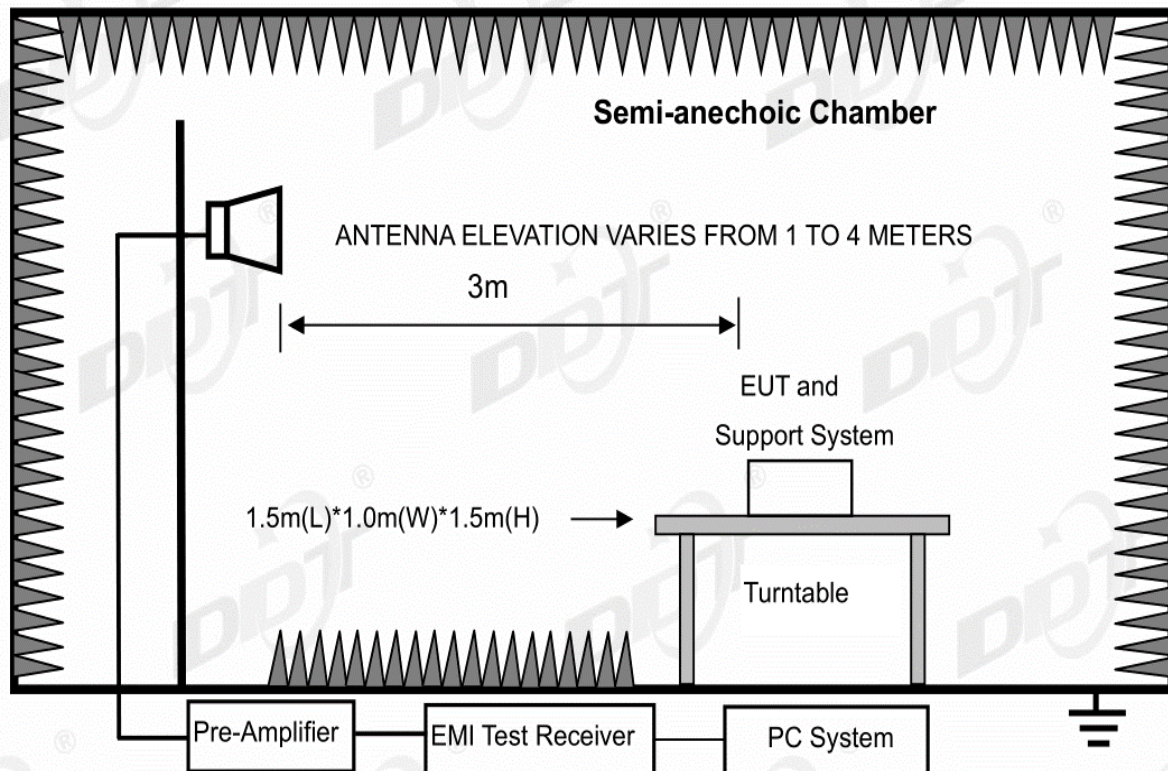

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

## 10.2. Limit

(1) FCC 15.205 Restricted frequency band

| MHz                      | MHz                 | MHz           | GHz              |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110              | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| <sup>1</sup> 0.495-0.505 | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905            | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128              | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.1772&4.17775           | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.2072&4.20775           | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218              | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825          | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225          | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294              | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366              | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675          | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475          | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293             | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025        | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725        | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41              |                     |               |                  |

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

## RSS-Gen section 8.10 Restricted frequency band

| MHz             | MHz                 | MHz           | GHz         |
|-----------------|---------------------|---------------|-------------|
| 0.090-0.110     | 12.51975-12.52025   | 240-285       | 3.5-4.4     |
| 0.495-0.505     | 12.57675-12.57725   | 322-335.4     | 4.5-5.15    |
| 2.1735-2.1905   | 13.36-13.41         | 399.9-410     | 5.35-5.46   |
| 3.020-3.026     | 16.42-16.423        | 608-614       | 7.25-7.75   |
| 4.125-4.128     | 16.69475-16.69525   | 960-1427      | 8.025-8.5   |
| 4.1772&4.17775  | 16.80425-16.80475   | 1435-1626.5   | 9.0-9.2     |
| 4.2072&4.20775  | 25.5-25.67          | 1645.5-1646.5 | 9.3-9.5     |
| 5.677-5.683     | 37.5-38.25          | 1660-1710     | 10.6-12.7   |
| 6.215-6.218     | 73-74.6             | 1718.8-1722.2 | 13.25-13.4  |
| 6.26775-6.26825 | 74.8-75.2           | 2200-2300     | 14.47-14.5  |
| 6.31175-6.31225 | 108-138             | 2310-2390     | 15.35-16.2  |
| 8.291-8.294     | 149.9-150.05        | 2483.5-2500   | 17.7-21.4   |
| 8.362-8.366     | 156.52475-156.52525 | 2655-2900     | 22.01-23.12 |
| 8.37625-8.38675 | 156.7-156.9         | 3260-3267     | 23.6-24.0   |
| 8.41425-8.41475 | 162.0125-167.17     | 3332-3339     | 31.2-31.8   |
| 12.29-12.293    | 167.72-173.2        | 3345.8-3358   | 36.43-36.5  |
|                 |                     |               | Above 38.6  |

Note: Certain frequency bands listed in above table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## (2) FCC 15.209 Limit and RSS-Gen section 8.9 Limit.

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT                                                     |                                   |
|------------------|--------------------|---------------------------------------------------------------------------|-----------------------------------|
|                  |                    | $\mu\text{V/m}$                                                           | $\text{dB}(\mu\text{V})/\text{m}$ |
| 0.009 ~ 0.490    | 300                | 2400/F(kHz)                                                               | 67.6-20log(F)                     |
| 0.490 ~ 1.705    | 30                 | 24000/F(kHz)                                                              | 87.6-20log(F)                     |
| 1.705 ~ 30.0     | 30                 | 30                                                                        | 29.54                             |
| 30 ~ 88          | 3                  | 100                                                                       | 40.0                              |
| 88 ~ 216         | 3                  | 150                                                                       | 43.5                              |
| 216 ~ 960        | 3                  | 200                                                                       | 46.0                              |
| 960 ~ 1000       | 3                  | 500                                                                       | 54.0                              |
| Above 1000       | 3                  | 74.0 dB( $\mu\text{V}$ )/m (Peak)<br>54.0 dB( $\mu\text{V}$ )/m (Average) |                                   |

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V/m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

## (3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen limits.

### 10.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

| Test frequency range | Test antenna used                              | Test antenna distance |
|----------------------|------------------------------------------------|-----------------------|
| 9 kHz - 30 MHz       | Active Loop antenna                            | 3 m                   |
| 30 MHz - 1 GHz       | Trilog Broadband Antenna                       | 3 m                   |
| 1 GHz - 18 GHz       | Double Ridged Horn Antenna<br>(1 GHz - 18 GHz) | 3 m                   |
| 18 GHz - 40 GHz      | Horn Antenna<br>(18 GHz - 40 GHz)              | 1 m                   |

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

- (b) Change work frequency or channel of device if practicable.

- (c) Change modulation type of device if practicable.

- (d) Change power supply range from 85% to 115% of the rated supply voltage

- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

| Frequency band   | RBW     |
|------------------|---------|
| 9 kHz - 150 kHz  | 200 Hz  |
| 150 kHz - 30 MHz | 9 kHz   |
| 30 MHz - 1 GHz   | 120 kHz |

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

#### 10.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 8 DPSK, Tx 2480 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Note4: For emission above 1GHz that over the limit are fundamental, the report was only recorded the worst case.

## Radiated Emission test (below 1 GHz)

## TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-11-10

Tested By: James Gan

EUT: Portable Audio Amplifier System

Model Number: PASSPORT EVENT SERIES 2

Test Mode: TX Mode


Power Supply: AC 120V/60Hz

Condition: Temp:23.1°C;Humi:52.5%;Press:100.3kPa

Test Site: DDT 3# Chamber

File Path: d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC BELOW 1G\20221110-113903\_H

Memo: BT

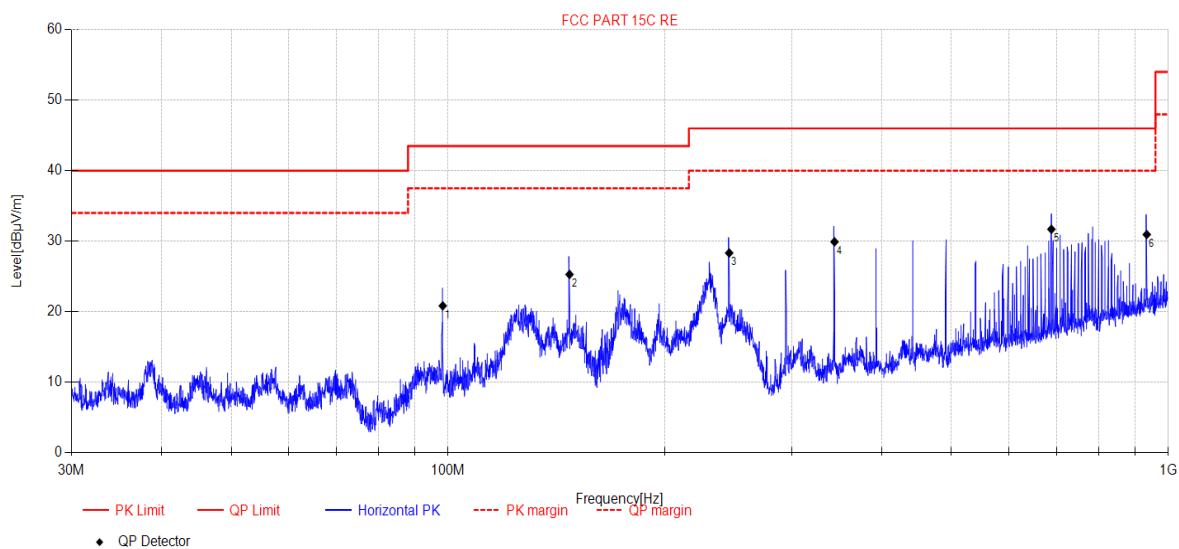

| Final Data List |             |                  |             |                 |                |             |          |            |
|-----------------|-------------|------------------|-------------|-----------------|----------------|-------------|----------|------------|
| NO.             | Freq. [MHz] | Reading [dBμV/m] | Factor [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1               | 98.33       | 41.06            | -20.24      | 20.82           | 43.50          | 22.68       | QP       | Horizontal |
| 2               | 147.46      | 48.46            | -23.18      | 25.28           | 43.50          | 18.22       | QP       | Horizontal |
| 3               | 245.68      | 46.27            | -17.95      | 28.32           | 46.00          | 17.68       | QP       | Horizontal |
| 4               | 343.98      | 45.31            | -15.40      | 29.91           | 46.00          | 16.09       | QP       | Horizontal |
| 5               | 688.17      | 40.99            | -9.30       | 31.69           | 46.00          | 14.31       | QP       | Horizontal |
| 6               | 933.59      | 35.8             | -4.86       | 30.94           | 46.00          | 15.06       | QP       | Horizontal |

Note:

1. Result Level = Read Level + Factor
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

Test Date: 2022-11-10

Tested By: James Gan

EUT: Portable Audio Amplifier System

Model Number: PASSPORT EVENT SERIES 2

Test Mode: TX Mode


Power Supply: AC 120V/60Hz

Condition: Temp:23.1°C;Humi:52.5%;Press:100.3kPa

Test Site: DDT 3# Chamber

File Path: d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC BELOW 1G\20221110-113942\_V

Memo: BT

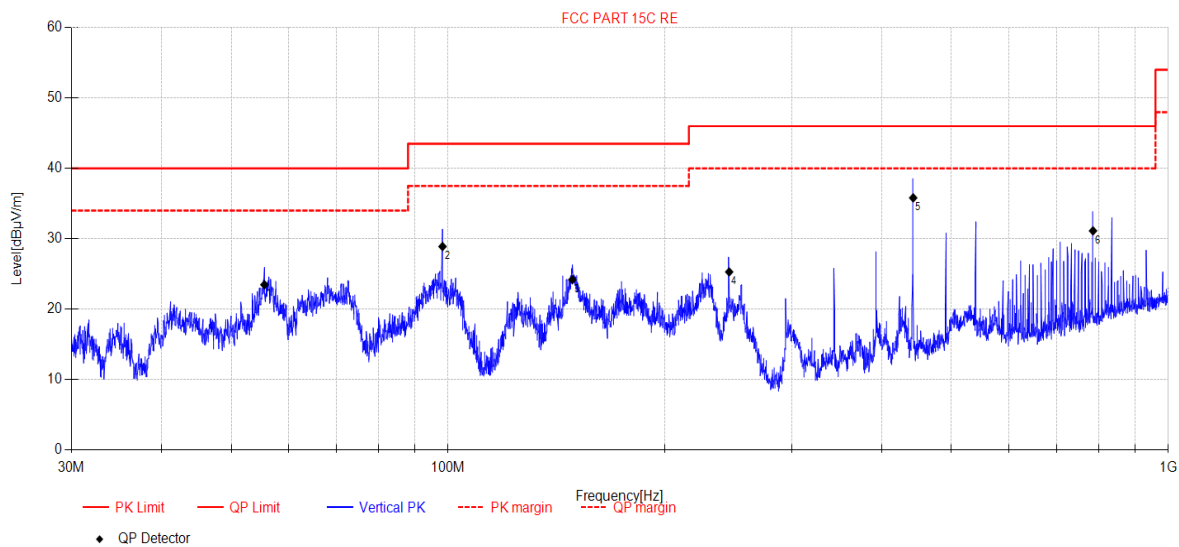

| Final Data List |             |                  |             |                 |                |             |          |          |
|-----------------|-------------|------------------|-------------|-----------------|----------------|-------------|----------|----------|
| NO.             | Freq. [MHz] | Reading [dBμV/m] | Factor [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1               | 55.60       | 42.24            | -18.78      | 23.46           | 40.00          | 16.54       | QP       | Vertical |
| 2               | 98.26       | 49.13            | -20.24      | 28.89           | 43.50          | 14.61       | QP       | Vertical |
| 3               | 148.81      | 47.3             | -23.12      | 24.18           | 43.50          | 19.32       | QP       | Vertical |
| 4               | 245.68      | 43.23            | -17.95      | 25.28           | 46.00          | 20.72       | QP       | Vertical |
| 5               | 442.43      | 49.39            | -13.58      | 35.81           | 46.00          | 10.19       | QP       | Vertical |
| 6               | 786.23      | 38.81            | -7.69       | 31.12           | 46.00          | 14.88       | QP       | Vertical |

Note:

1. Result Level = Read Level + Factor

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.


3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## Radiated Emission test (above 1 GHz)

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\66  
**Memo:** DH5 2402 Power:1

## Test Graph

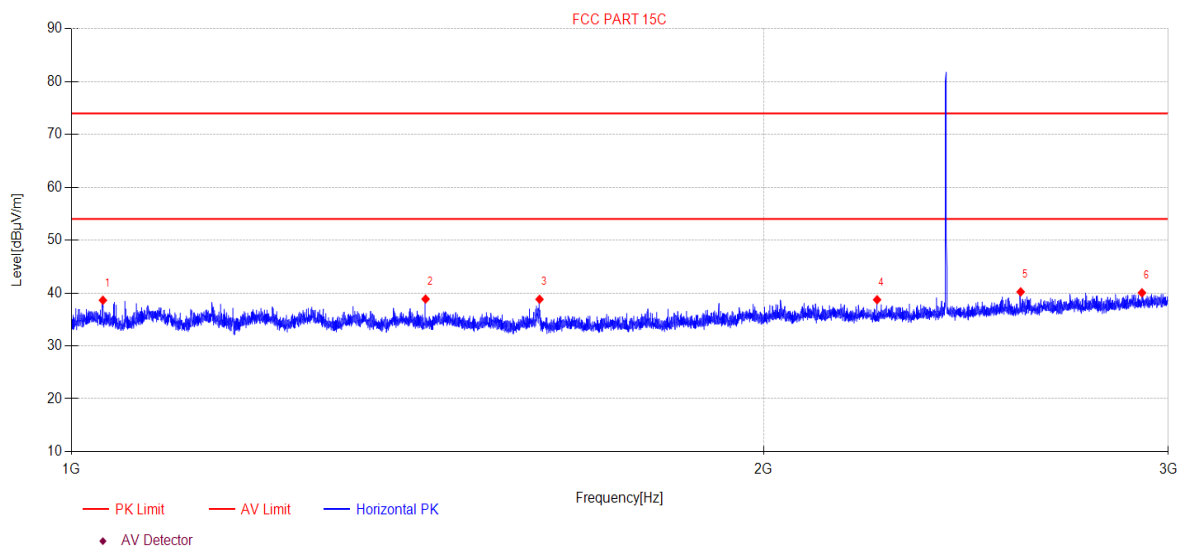

## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| 1   | 1032.03     | 49.55          | -10.92      | 38.63          | 74.00          | 35.37       | PK       | Horizontal |
| 2   | 1425.76     | 50.00          | -11.14      | 38.86          | 74.00          | 35.14       | PK       | Horizontal |
| 3   | 1598.14     | 50.31          | -11.49      | 38.82          | 74.00          | 35.18       | PK       | Horizontal |
| 4   | 2241.08     | 48.66          | -9.93       | 38.73          | 74.00          | 35.27       | PK       | Horizontal |
| 5   | 2587.66     | 49.34          | -9.12       | 40.22          | 74.00          | 33.78       | PK       | Horizontal |
| 6   | 2921.94     | 48.17          | -8.13       | 40.04          | 74.00          | 33.96       | PK       | Horizontal |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\67  
**Memo:** DH5 2402 Power:1

### Test Graph

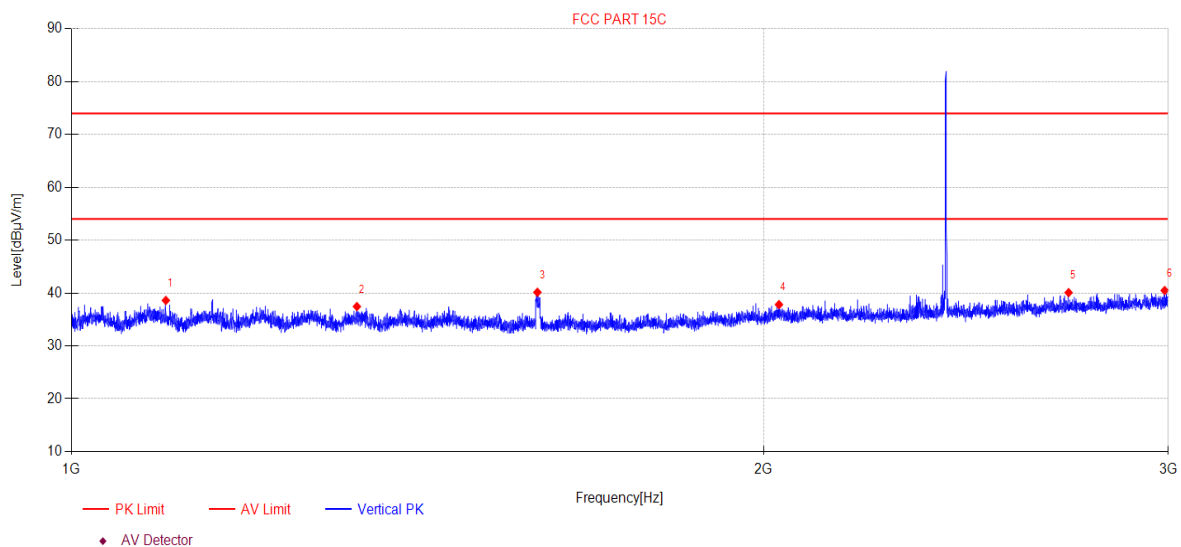

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|----------|
| 1   | 1099.20     | 49.55          | -10.95      | 38.60          | 74.00          | 35.40       | PK       | Vertical |
| 2   | 1331.01     | 48.49          | -11.05      | 37.44          | 74.00          | 36.56       | PK       | Vertical |
| 3   | 1594.81     | 51.63          | -11.49      | 40.14          | 74.00          | 33.86       | PK       | Vertical |
| 4   | 2031.23     | 48.27          | -10.46      | 37.81          | 74.00          | 36.19       | PK       | Vertical |
| 5   | 2714.91     | 48.90          | -8.82       | 40.08          | 74.00          | 33.92       | PK       | Vertical |
| 6   | 2989.14     | 48.33          | -7.85       | 40.48          | 74.00          | 33.52       | PK       | Vertical |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\68  
**Memo:** DH5 2402 Power:1

### Test Graph

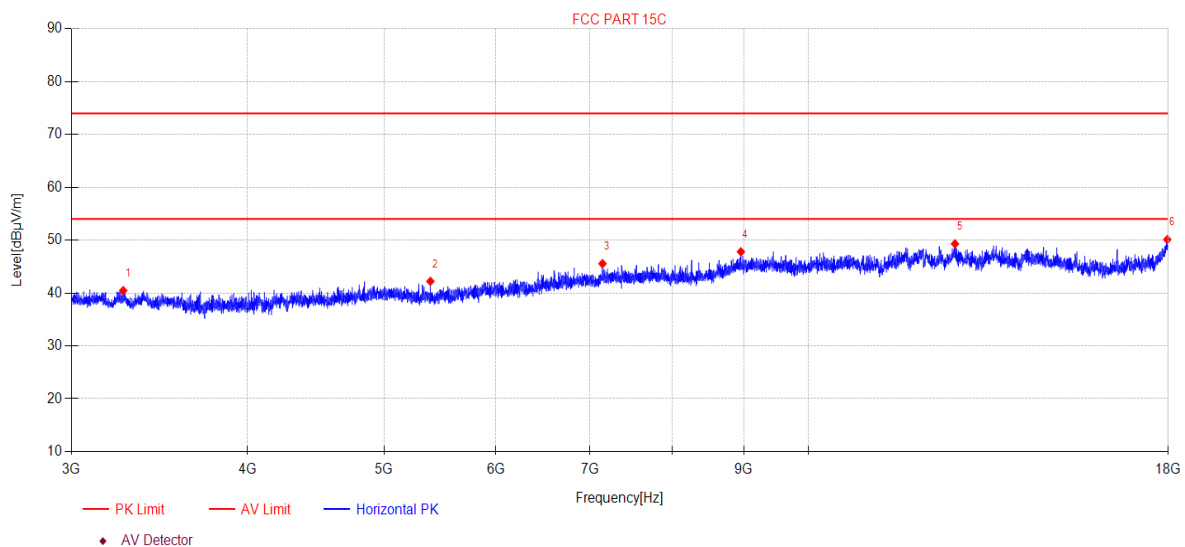

| Suspected Data List |             |                |             |                |                |             |          |            |
|---------------------|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1                   | 3264.72     | 48.28          | -7.81       | 40.47          | 74.00          | 33.53       | PK       | Horizontal |
| 2                   | 5392.43     | 46.89          | -4.68       | 42.21          | 74.00          | 31.79       | PK       | Horizontal |
| 3                   | 7142.73     | 46.49          | -0.94       | 45.55          | 74.00          | 28.45       | PK       | Horizontal |
| 4                   | 8954.83     | 45.10          | 2.71        | 47.81          | 74.00          | 26.19       | PK       | Horizontal |
| 5                   | 12703.90    | 44.51          | 4.79        | 49.30          | 74.00          | 24.70       | PK       | Horizontal |
| 6                   | 17971.00    | 40.53          | 9.59        | 50.12          | 74.00          | 23.88       | PK       | Horizontal |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\69  
**Memo:** DH5 2402 Power:1

### Test Graph

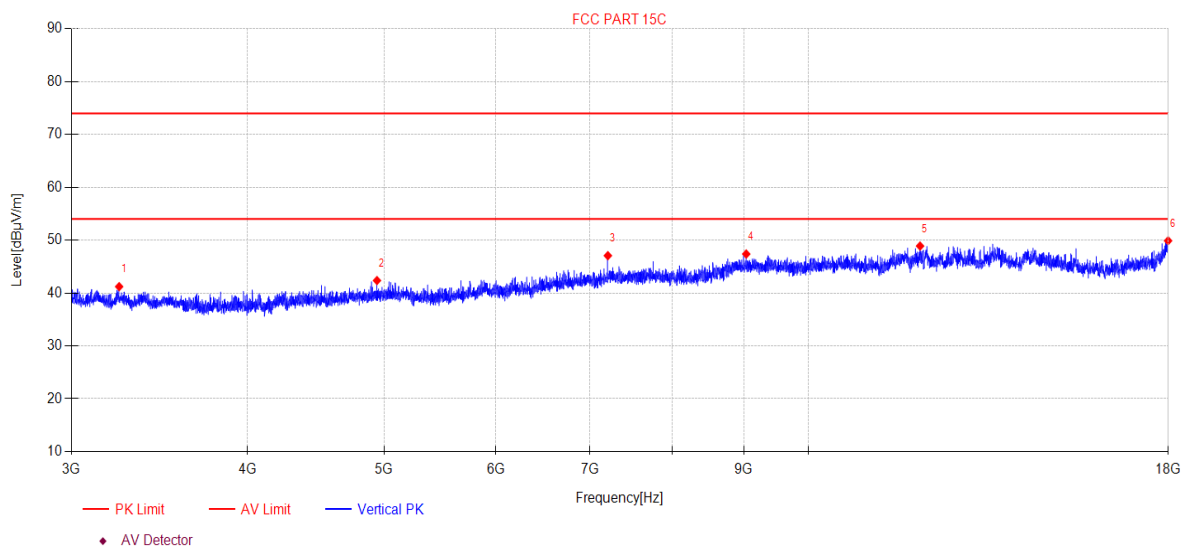

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|----------|
| 1   | 3243.15     | 48.99          | -7.78       | 41.21          | 74.00          | 32.79       | PK       | Vertical |
| 2   | 4941.88     | 47.42          | -5.06       | 42.36          | 74.00          | 31.64       | PK       | Vertical |
| 3   | 7205.71     | 47.88          | -0.81       | 47.07          | 74.00          | 26.93       | PK       | Vertical |
| 4   | 9033.79     | 44.62          | 2.76        | 47.38          | 74.00          | 26.62       | PK       | Vertical |
| 5   | 12000.37    | 44.10          | 4.79        | 48.89          | 74.00          | 25.11       | PK       | Vertical |
| 6   | 17993.55    | 40.16          | 9.73        | 49.89          | 74.00          | 24.11       | PK       | Vertical |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\72  
**Memo:** DH5 2441 Power:1

### Test Graph

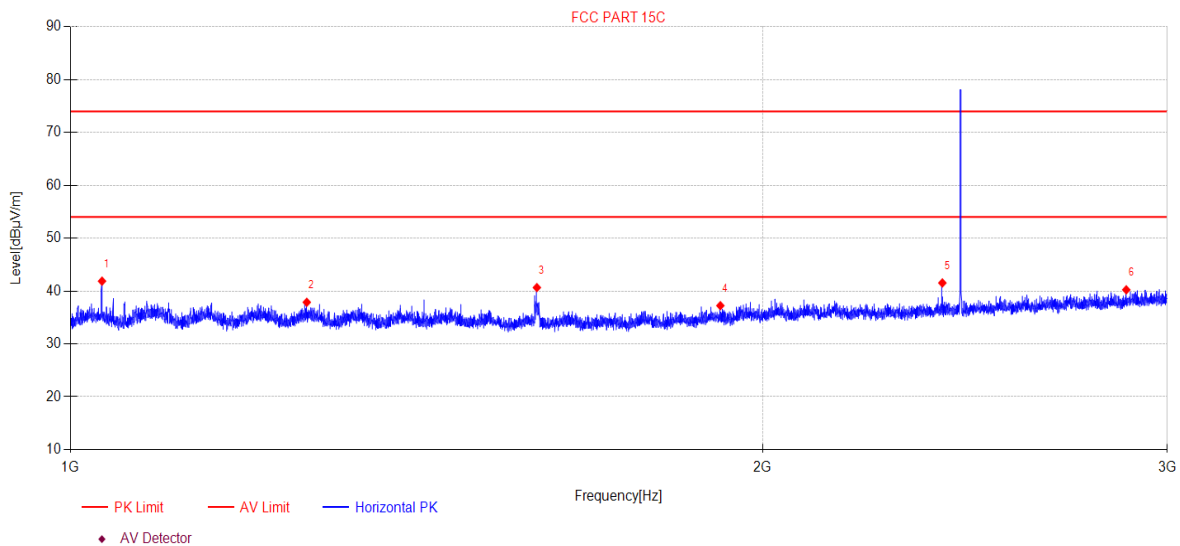

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| 1   | 1032.14     | 52.79          | -10.92      | 41.87          | 74.00          | 32.13       | PK       | Horizontal |
| 2   | 1267.10     | 48.80          | -10.93      | 37.87          | 74.00          | 36.13       | PK       | Horizontal |
| 3   | 1595.51     | 52.14          | -11.49      | 40.65          | 74.00          | 33.35       | PK       | Horizontal |
| 4   | 1917.40     | 48.40          | -11.17      | 37.23          | 74.00          | 36.77       | PK       | Horizontal |
| 5   | 2394.82     | 51.24          | -9.71       | 41.53          | 74.00          | 32.47       | PK       | Horizontal |
| 6   | 2879.25     | 48.53          | -8.30       | 40.23          | 74.00          | 33.77       | PK       | Horizontal |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\73  
**Memo:** DH5 2441 Power:1

### Test Graph

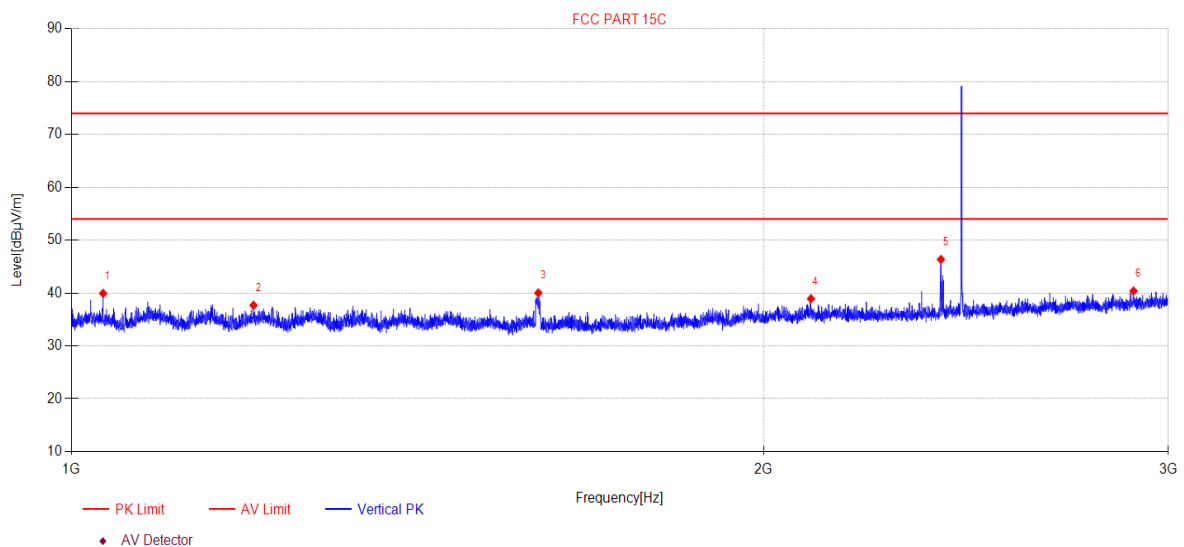

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|----------|
| 1   | 1032.26     | 50.85          | -10.92      | 39.93          | 74.00          | 34.07       | PK       | Vertical |
| 2   | 1200.04     | 48.60          | -10.93      | 37.67          | 74.00          | 36.33       | PK       | Vertical |
| 3   | 1596.21     | 51.51          | -11.49      | 40.02          | 74.00          | 33.98       | PK       | Vertical |
| 4   | 2097.45     | 49.07          | -10.15      | 38.92          | 74.00          | 35.08       | PK       | Vertical |
| 5   | 2389.04     | 56.07          | -9.72       | 46.35          | 74.00          | 27.65       | PK       | Vertical |
| 6   | 2897.33     | 48.61          | -8.23       | 40.38          | 74.00          | 33.62       | PK       | Vertical |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\70  
**Memo:** DH5 2441 Power:1

### Test Graph

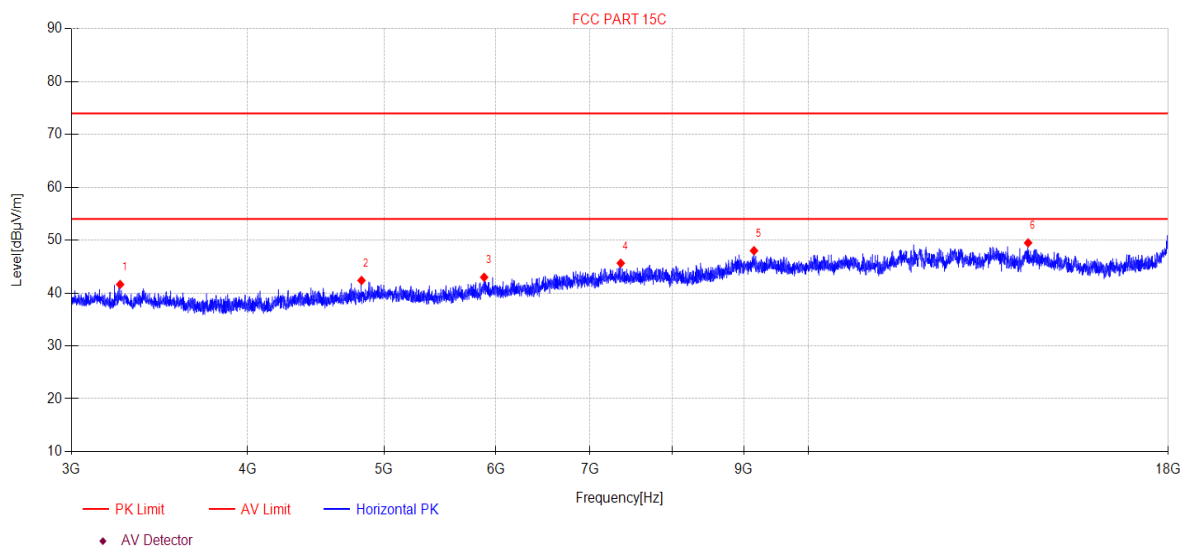

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| 1   | 3248.39     | 49.42          | -7.79       | 41.63          | 74.00          | 32.37       | PK       | Horizontal |
| 2   | 4818.61     | 47.89          | -5.51       | 42.38          | 74.00          | 31.62       | PK       | Horizontal |
| 3   | 5887.22     | 46.43          | -3.45       | 42.98          | 74.00          | 31.02       | PK       | Horizontal |
| 4   | 7359.67     | 46.41          | -0.77       | 45.64          | 74.00          | 28.36       | PK       | Horizontal |
| 5   | 9149.43     | 45.28          | 2.73        | 48.01          | 74.00          | 25.99       | PK       | Horizontal |
| 6   | 14316.43    | 43.52          | 5.97        | 49.49          | 74.00          | 24.51       | PK       | Horizontal |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\71  
**Memo:** DH5 2441 Power:1

### Test Graph

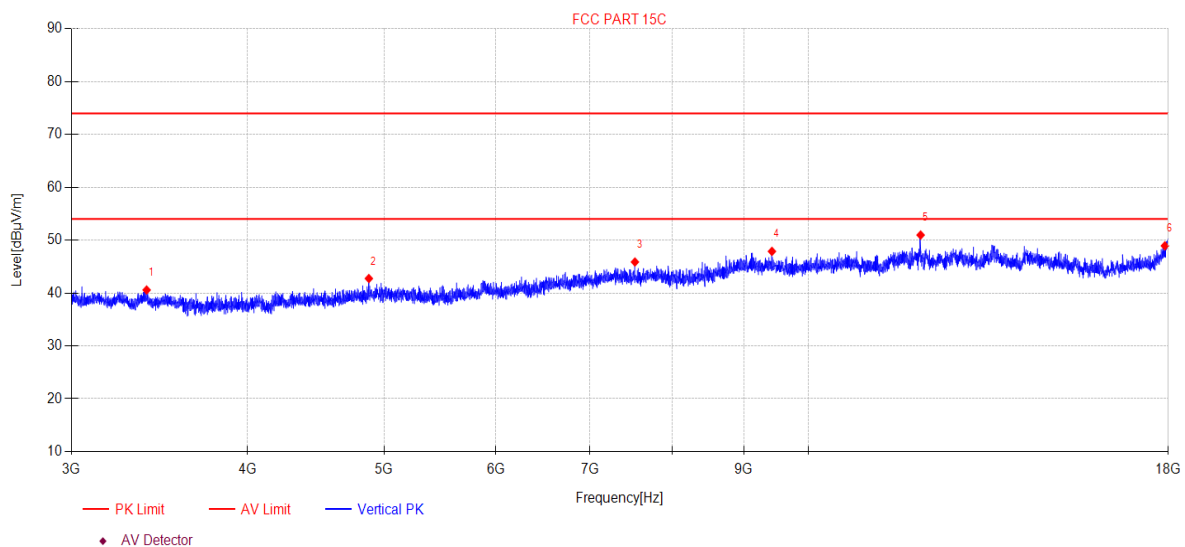

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|----------|
| 1   | 3392.32     | 48.62          | -8.05       | 40.57          | 74.00          | 33.43       | PK       | Vertical |
| 2   | 4876.80     | 48.04          | -5.30       | 42.74          | 74.00          | 31.26       | PK       | Vertical |
| 3   | 7531.74     | 46.71          | -0.84       | 45.87          | 74.00          | 28.13       | PK       | Vertical |
| 4   | 9420.56     | 45.35          | 2.53        | 47.88          | 74.00          | 26.12       | PK       | Vertical |
| 5   | 12011.12    | 46.17          | 4.80        | 50.97          | 74.00          | 23.03       | PK       | Vertical |
| 6   | 17900.31    | 39.85          | 9.08        | 48.93          | 74.00          | 25.07       | PK       | Vertical |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\74  
**Memo:** DH5 2480 Power:1

### Test Graph

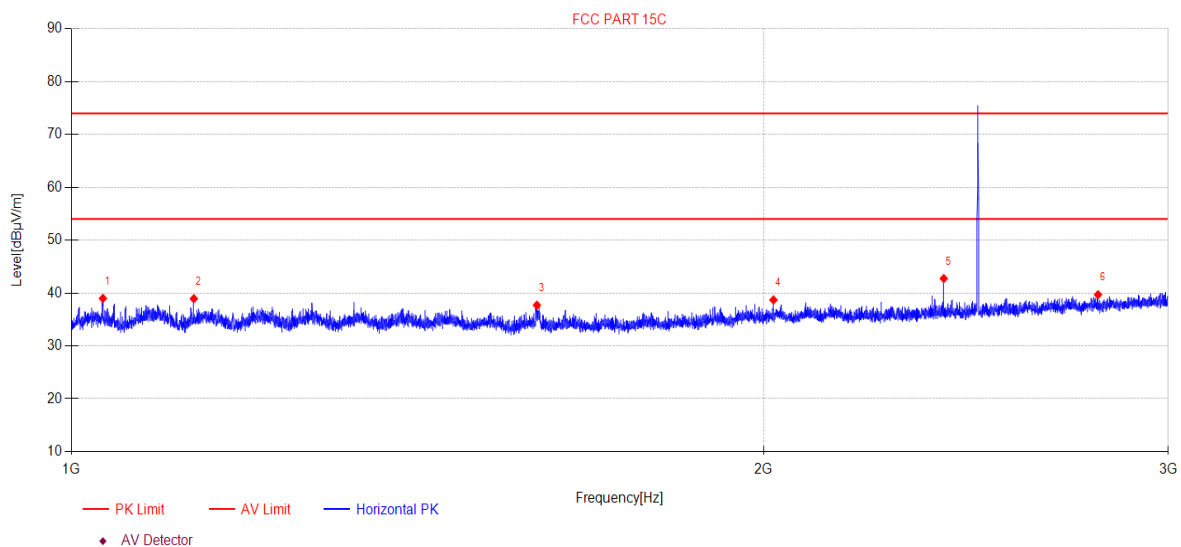

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| 1   | 1032.03     | 49.90          | -10.92      | 38.98          | 74.00          | 35.02       | PK       | Horizontal |
| 2   | 1130.42     | 49.85          | -10.92      | 38.93          | 74.00          | 35.07       | PK       | Horizontal |
| 3   | 1593.93     | 49.18          | -11.49      | 37.69          | 74.00          | 36.31       | PK       | Horizontal |
| 4   | 2020.11     | 49.22          | -10.53      | 38.69          | 74.00          | 35.31       | PK       | Horizontal |
| 5   | 2395.88     | 52.45          | -9.71       | 42.74          | 74.00          | 31.26       | PK       | Horizontal |
| 6   | 2796.02     | 48.34          | -8.65       | 39.69          | 74.00          | 34.31       | PK       | Horizontal |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\75  
**Memo:** DH5 2480 Power:1

### Test Graph

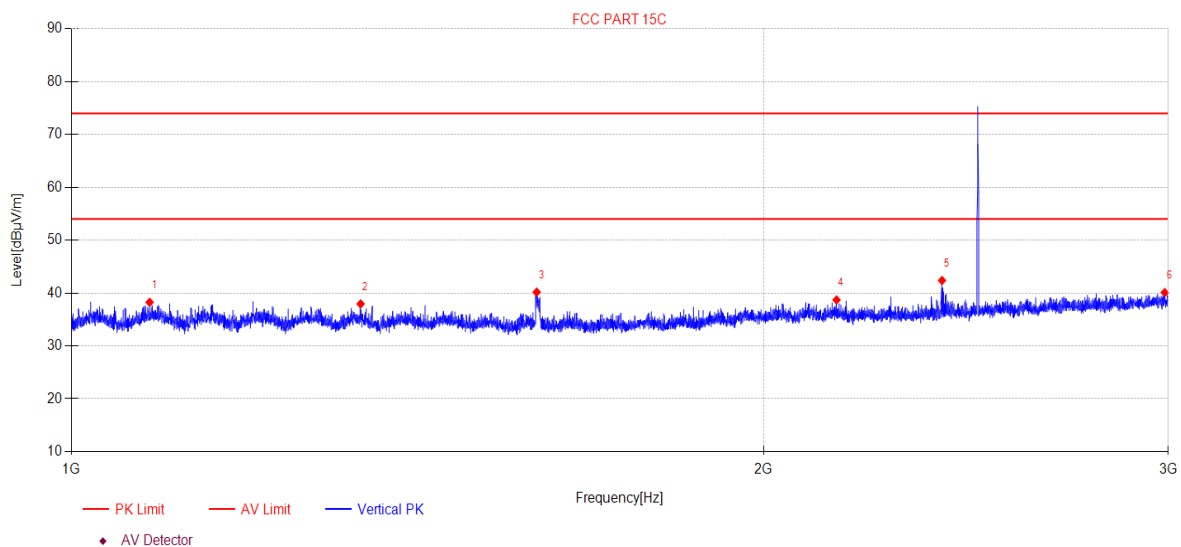

| Suspected Data List |             |                |             |                |                |             |          |          |
|---------------------|-------------|----------------|-------------|----------------|----------------|-------------|----------|----------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1                   | 1081.47     | 49.19          | -10.94      | 38.25          | 74.00          | 35.75       | PK       | Vertical |
| 2                   | 1335.99     | 49.00          | -11.06      | 37.94          | 74.00          | 36.06       | PK       | Vertical |
| 3                   | 1593.58     | 51.66          | -11.49      | 40.17          | 74.00          | 33.83       | PK       | Vertical |
| 4                   | 2151.82     | 48.73          | -10.03      | 38.70          | 74.00          | 35.30       | PK       | Vertical |
| 5                   | 2391.67     | 52.10          | -9.72       | 42.38          | 74.00          | 31.62       | PK       | Vertical |
| 6                   | 2989.47     | 47.94          | -7.85       | 40.09          | 74.00          | 33.91       | PK       | Vertical |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\76  
**Memo:** DH5 2480 Power:1

### Test Graph

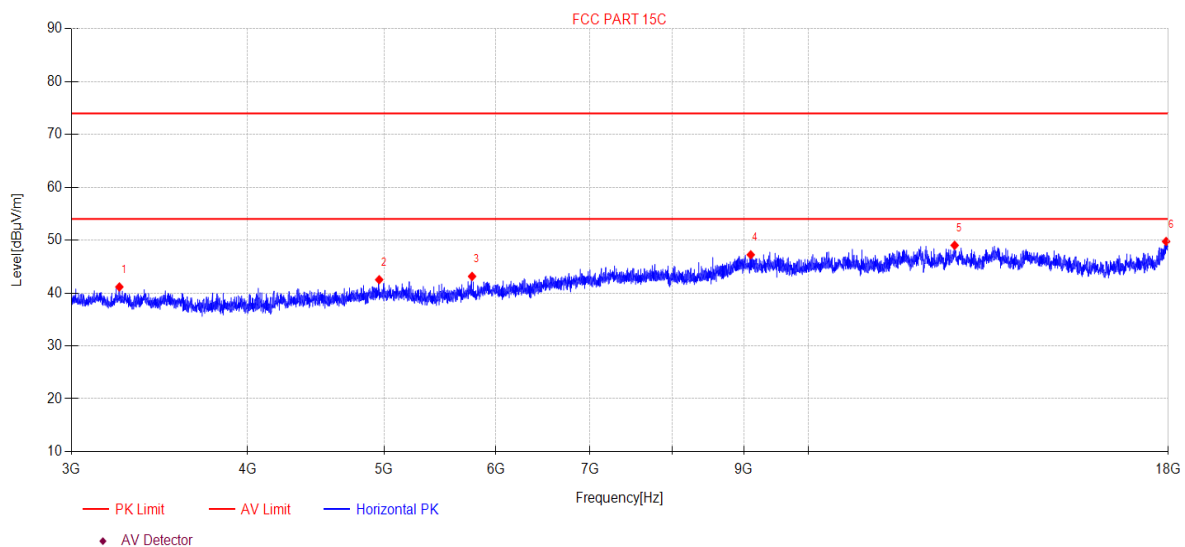

| Suspected Data List |             |                |             |                |                |             |          |            |
|---------------------|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
| 1                   | 3244.32     | 48.93          | -7.78       | 41.15          | 74.00          | 32.85       | PK       | Horizontal |
| 2                   | 4959.62     | 47.54          | -5.02       | 42.52          | 74.00          | 31.48       | PK       | Horizontal |
| 3                   | 5772.33     | 46.94          | -3.80       | 43.14          | 74.00          | 30.86       | PK       | Horizontal |
| 4                   | 9100.39     | 44.56          | 2.68        | 47.24          | 74.00          | 26.76       | PK       | Horizontal |
| 5                   | 12697.08    | 44.23          | 4.79        | 49.02          | 74.00          | 24.98       | PK       | Horizontal |
| 6                   | 17935.62    | 40.42          | 9.33        | 49.75          | 74.00          | 24.25       | PK       | Horizontal |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-29**Tested By:** James Gan**EUT:** Portable Audio Amplifier System**Model Number:** PASSPORT EVENT SERIES 2**Test Mode:** TX Mode**Power Supply:** AC 120V/60Hz**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\77**Memo:** DH5 2480 Power:1

### Test Graph

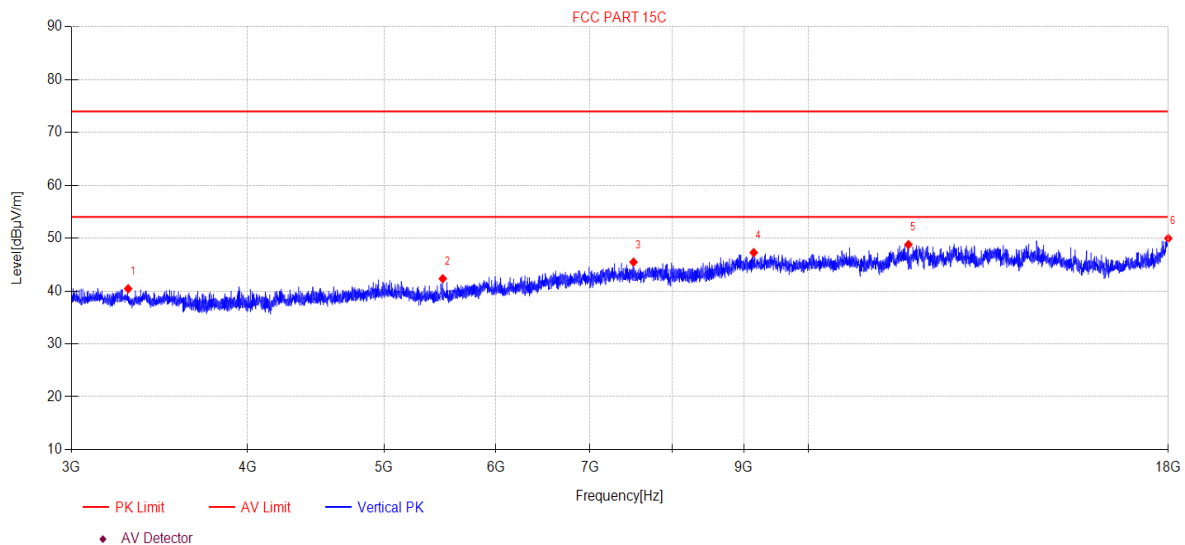

| Suspected Data List |             |                |             |                |                |             |          |          |
|---------------------|-------------|----------------|-------------|----------------|----------------|-------------|----------|----------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1                   | 3291.15     | 48.28          | -7.84       | 40.44          | 74.00          | 33.56       | PK       | Vertical |
| 2                   | 5502.71     | 46.95          | -4.62       | 42.33          | 74.00          | 31.67       | PK       | Vertical |
| 3                   | 7514.22     | 46.31          | -0.84       | 45.47          | 74.00          | 28.53       | PK       | Vertical |
| 4                   | 9144.52     | 44.54          | 2.73        | 47.27          | 74.00          | 26.73       | PK       | Vertical |
| 5                   | 11774.62    | 44.50          | 4.29        | 48.79          | 74.00          | 25.21       | PK       | Vertical |
| 6                   | 18000.00    | 40.19          | 9.78        | 49.97          | 74.00          | 24.03       | PK       | Vertical |

**Note:**

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## 11. RF Conducted Spurious Emissions

### 11.1. Block diagram of test setup

Same as section 4.1

### 11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 11.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

|                  |                                                               |
|------------------|---------------------------------------------------------------|
| Center frequency | Test frequency                                                |
| RBW:             | 100 kHz                                                       |
| VBW:             | 300 kHz                                                       |
| Span             | Wide enough to capture the peak level of the in-band emission |
| Detector Mode:   | Peak                                                          |
| Sweep time:      | auto                                                          |
| Trace mode       | Max hold                                                      |

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

|                              |                                          |
|------------------------------|------------------------------------------|
| RBW:                         | 100 kHz                                  |
| VBW:                         | 300 kHz                                  |
| Span                         | Encompass frequency range to be measured |
| Number of measurement points | $\geq \text{span/RBW}$                   |
| Detector Mode:               | Peak                                     |
| Sweep time:                  | auto                                     |
| Trace mode                   | Max hold                                 |

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


Note:

1. The attenuator loss was inputted into spectrum analyzer as amplitude offset.
2. The pathloss of external cable: 0.5dB (According to the manufacturer's claims).


### 11.4. Test result

| Mode           | Frequency (MHz)  | Verdict |
|----------------|------------------|---------|
| GFSK           | Hopping off 2402 | Pass    |
|                | Hopping off 2441 | Pass    |
|                | Hopping off 2480 | Pass    |
| $\pi/4$ -DQPSK | Hopping off 2402 | Pass    |
|                | Hopping off 2441 | Pass    |
|                | Hopping off 2480 | Pass    |
| 8DPSK          | Hopping off 2402 | Pass    |
|                | Hopping off 2441 | Pass    |
|                | Hopping off 2480 | Pass    |

### 11.5. Original test data

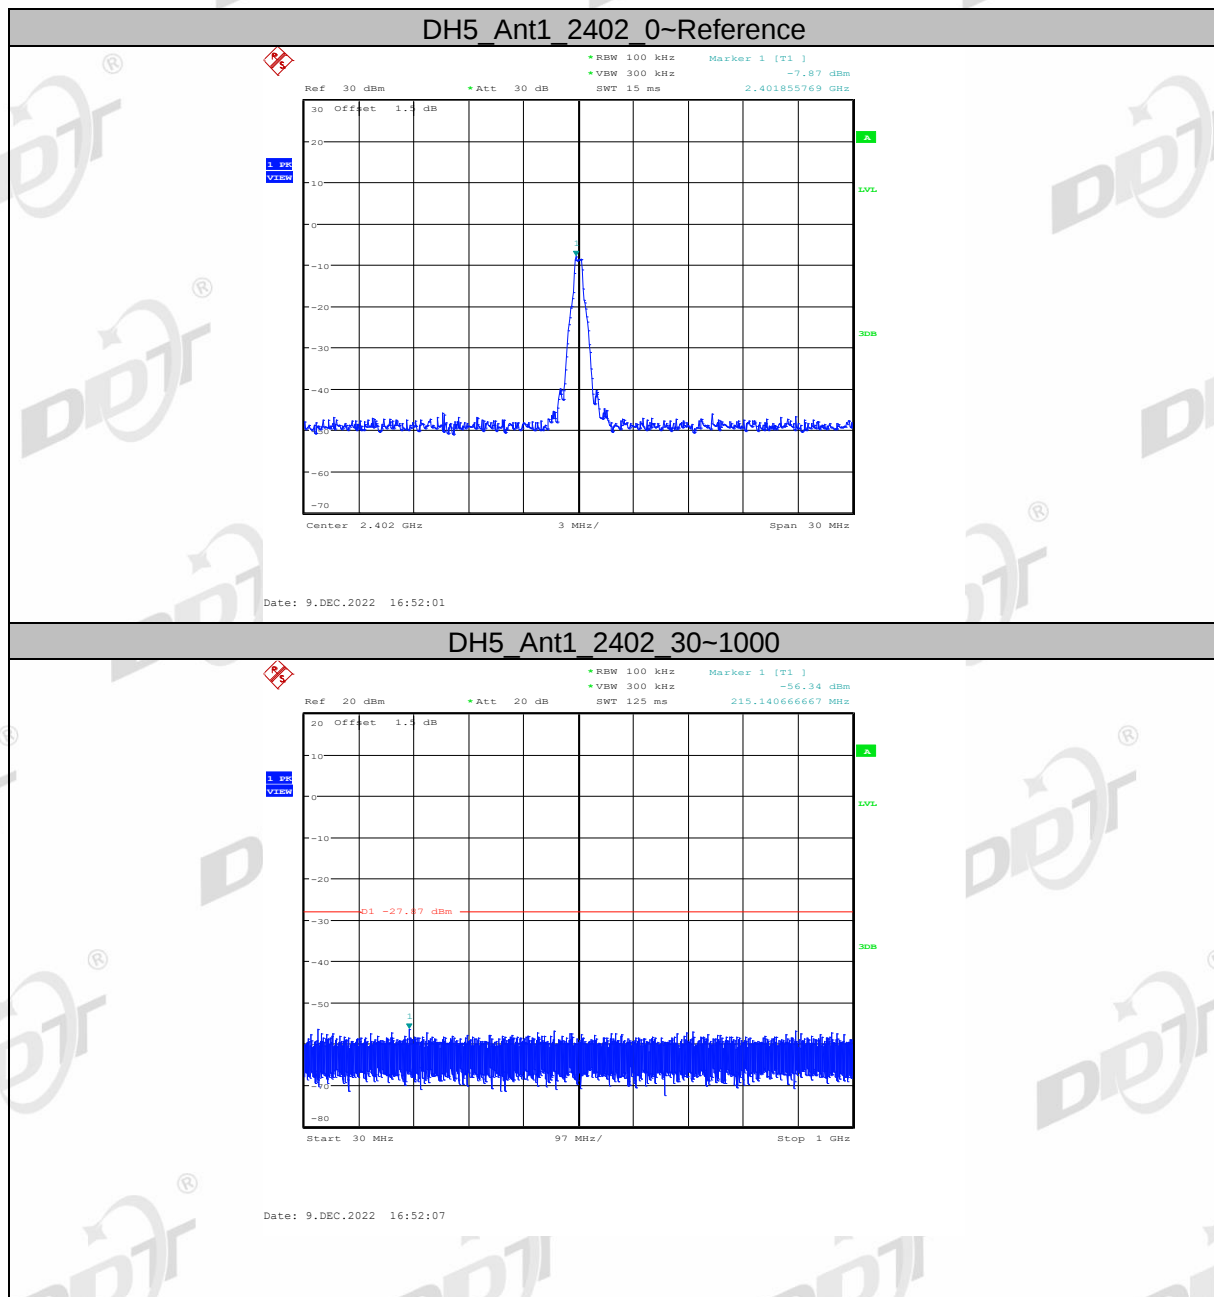


## DH5\_Ant1 2402 1000~26500

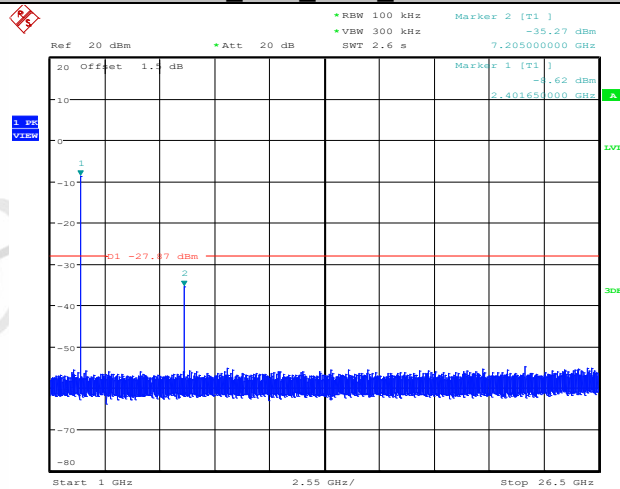


Date: 9.DEC.2022 16:52:30

## DH5\_Ant1 2441 0~Reference

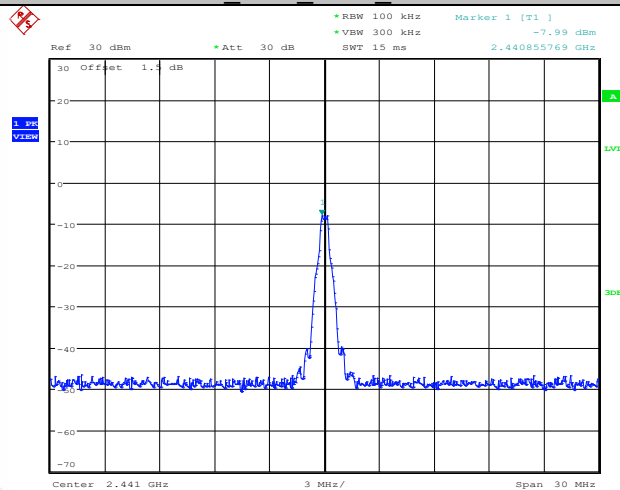

Date: 9.DEC.2022 16:54:07


## DH5\_Ant1 2441 30~1000

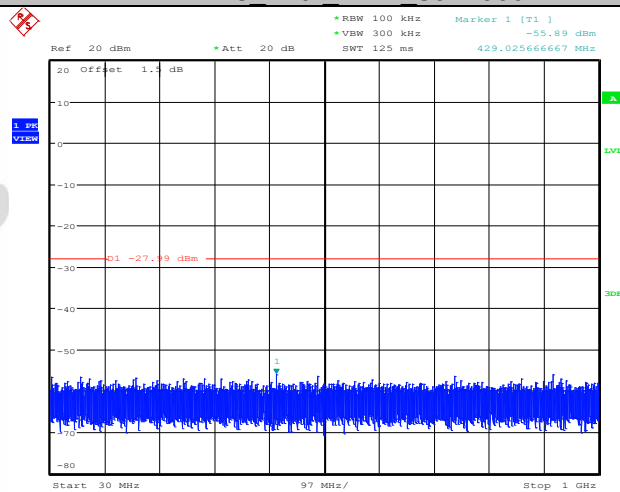

Date: 9.DEC.2022 16:54:13




## DH5\_Ant1 2480 1000~26500

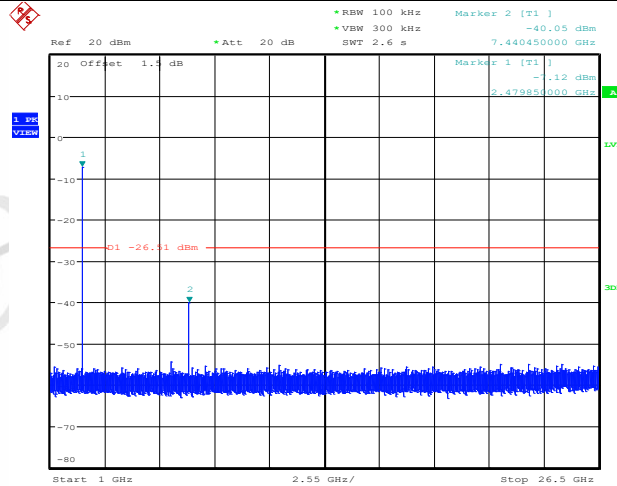


Date: 9.DEC.2022 16:56:16

## 2DH5\_Ant1 2402 0-Reference

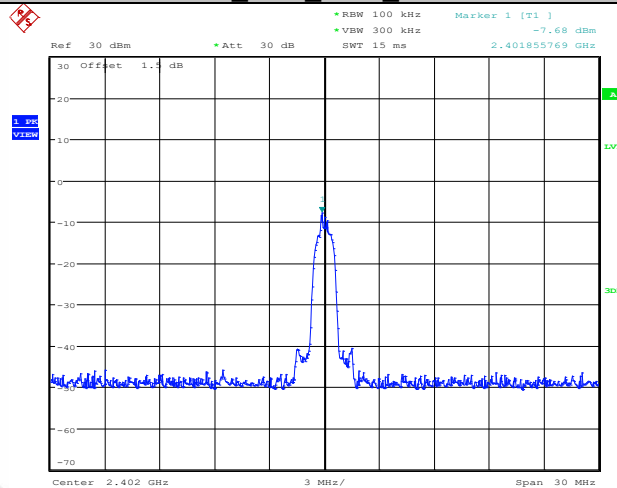


Date: 9.DEC.2022 16:58:06

## 2DH5\_Ant1 2402 30~1000

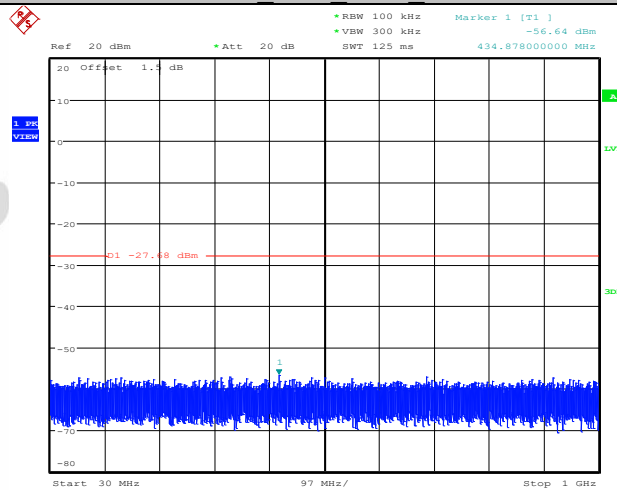


Date: 9.DEC.2022 16:58:12

## 2DH5\_Ant1\_2402\_1000~26500

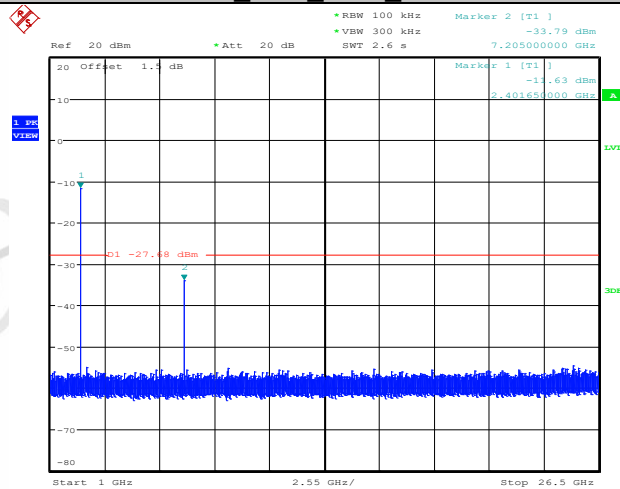


Date: 9.DEC.2022 16:58:35

## 2DH5\_Ant1\_2441\_0~Reference

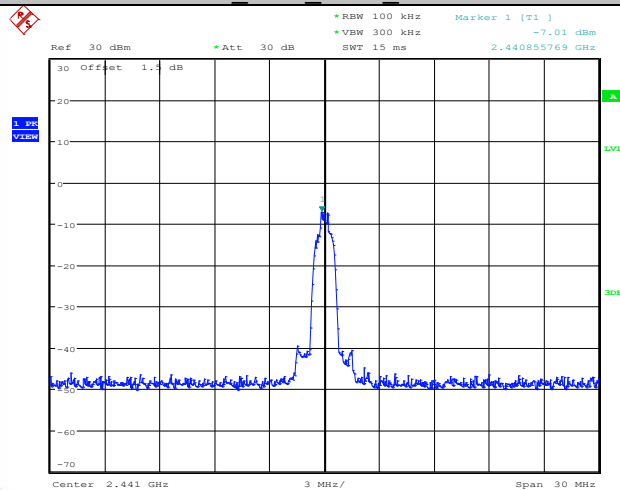


Date: 9.DEC.2022 17:07:35

## 2DH5\_Ant1\_2441\_30~1000

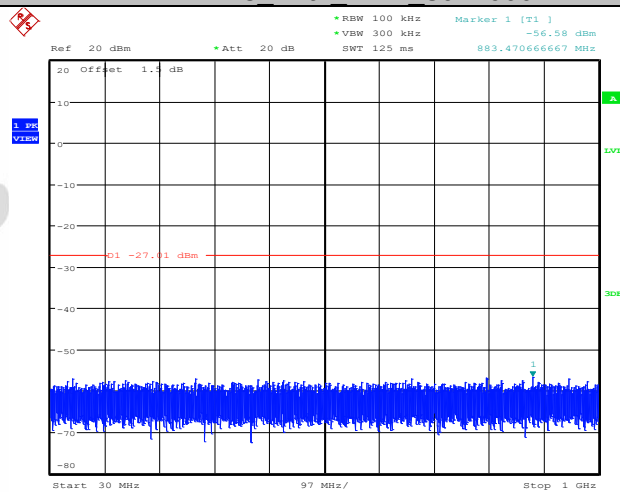


Date: 9.DEC.2022 17:07:41

## 2DH5\_Ant1\_2441\_1000-26500

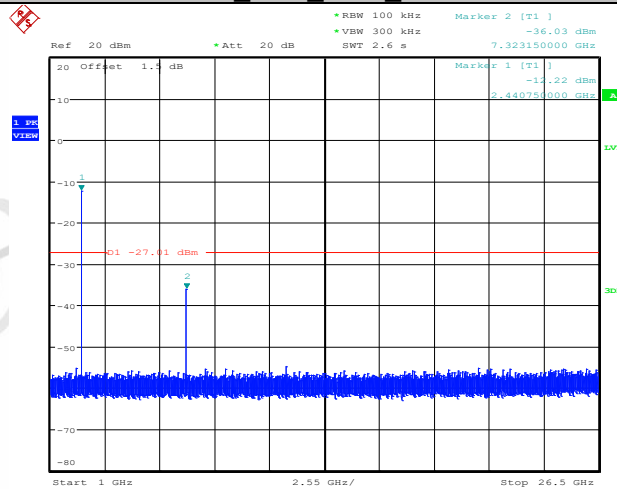


Date: 9.DEC.2022 17:08:04

## 2DH5\_Ant1\_2480\_0-Reference

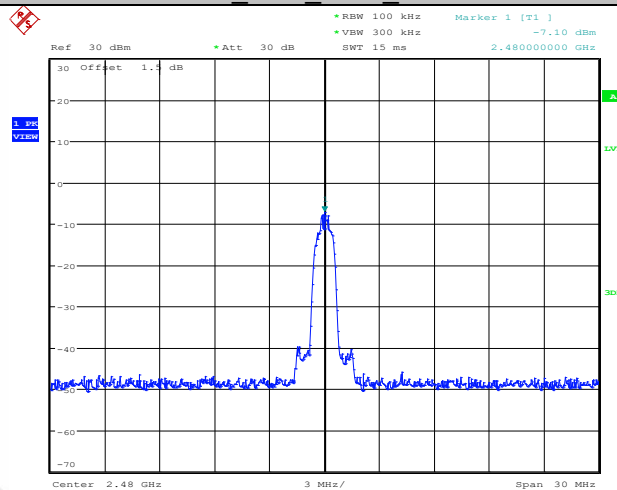


Date: 9.DEC.2022 17:09:48

## 2DH5\_Ant1\_2480\_30-1000

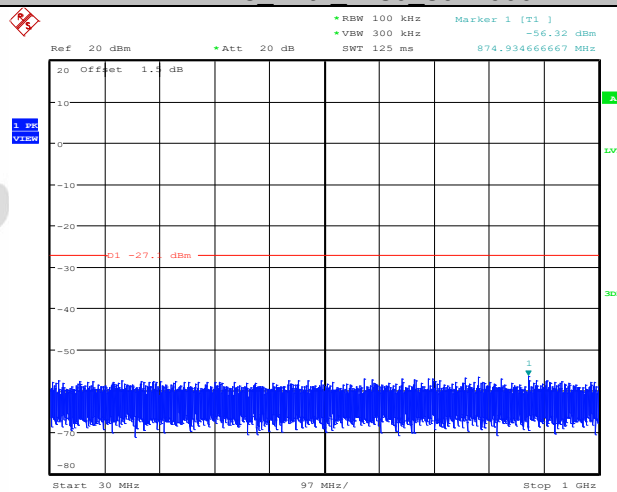


Date: 9.DEC.2022 17:09:53

## 2DH5\_Ant1\_2480\_1000~26500

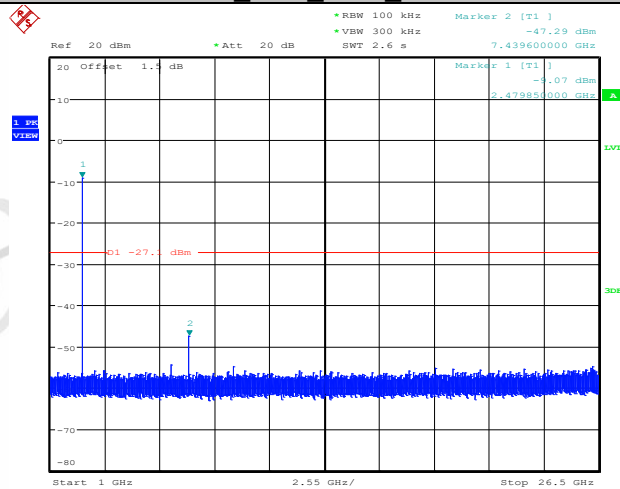


Date: 9.DEC.2022 17:10:17

## 3DH5\_Ant1\_2402\_0~Reference

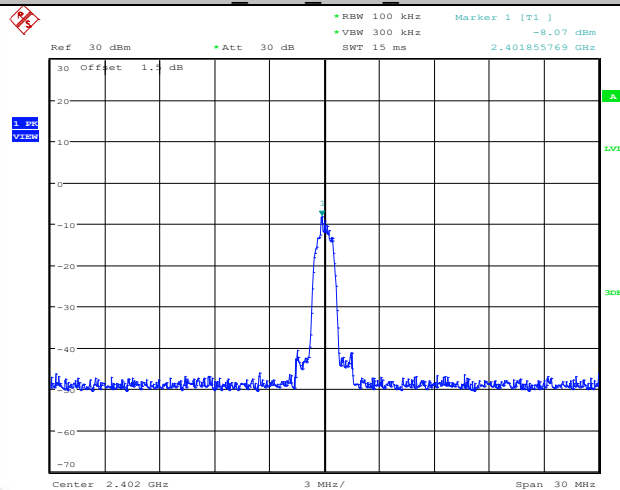


Date: 9.DEC.2022 17:12:32

## 3DH5\_Ant1\_2402\_30~1000

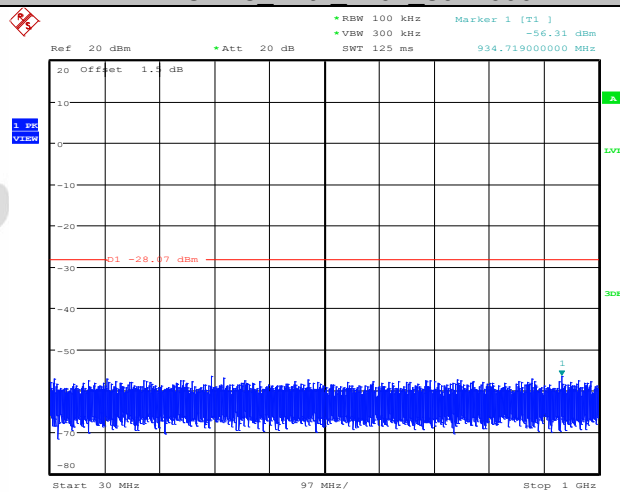


Date: 9.DEC.2022 17:12:37

## 3DH5\_Ant1\_2402\_1000-26500

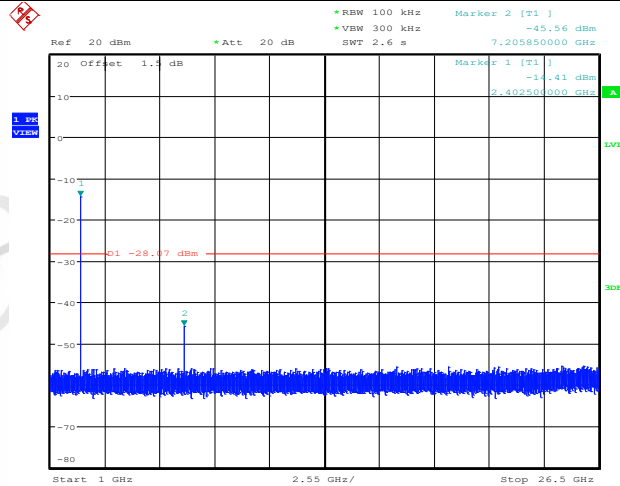


Date: 9.DEC.2022 17:13:01

## 3DH5\_Ant1\_2441\_0-Reference

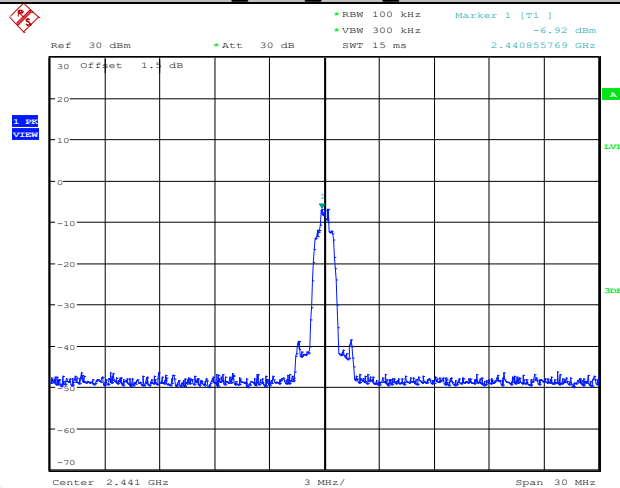


Date: 9.DEC.2022 17:14:30

## 3DH5\_Ant1\_2441\_30-1000

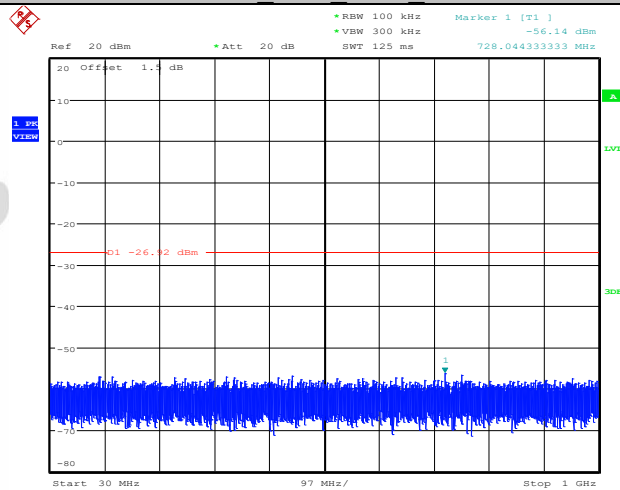


Date: 9.DEC.2022 17:14:36

## 3DH5\_Ant1\_2441\_1000-26500

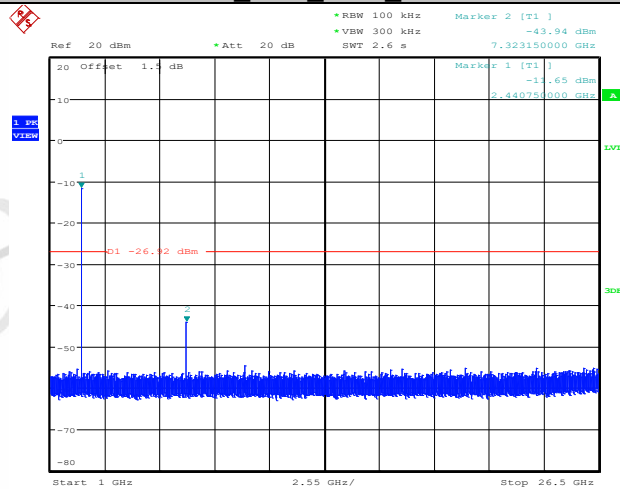


Date: 9.DEC.2022 17:14:59

## 3DH5\_Ant1\_2480\_0-Reference

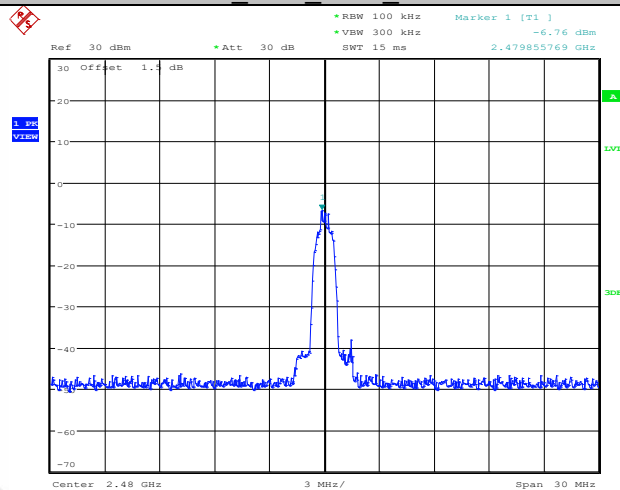


Date: 9.DEC.2022 17:16:47

## 3DH5\_Ant1\_2480\_30-1000

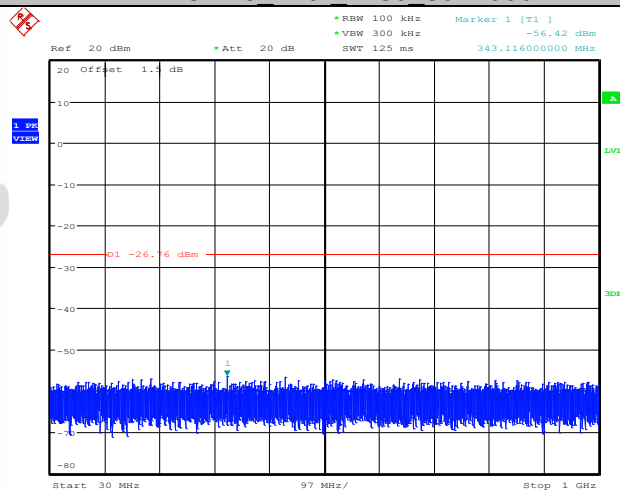


Date: 9.DEC.2022 17:16:51

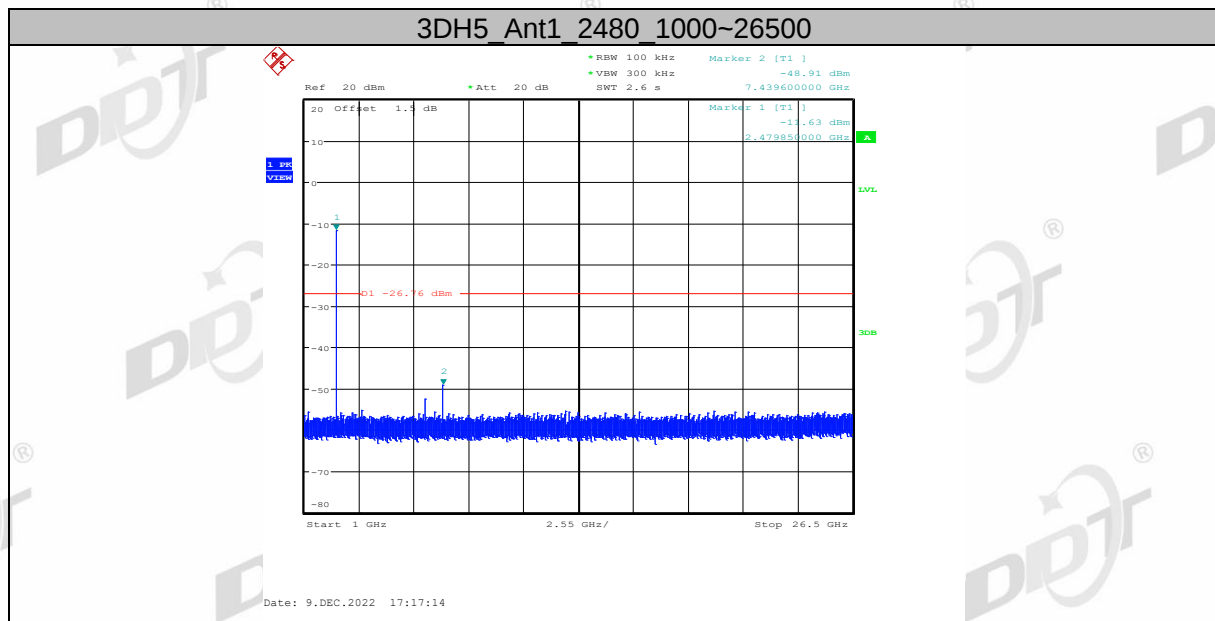

## 12. Band Edge Compliance (Radiated Method)

### 12.1. Block diagram of test setup

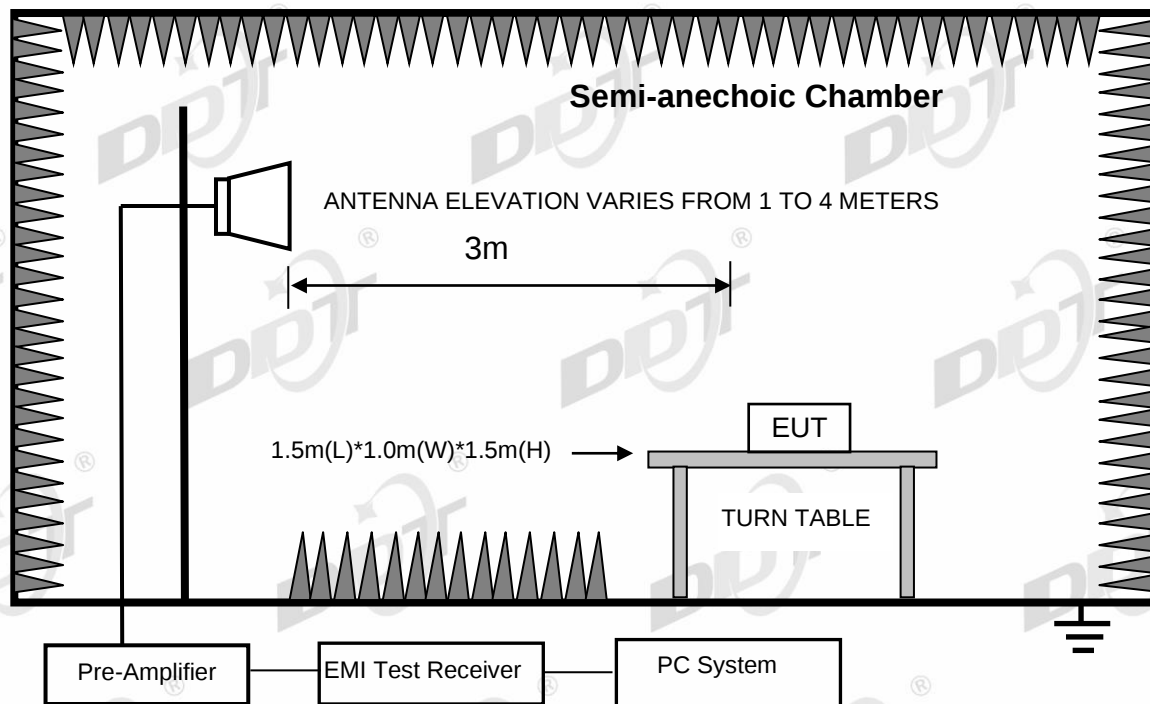

### 12.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

### 12.3. Test Procedure

Same with clause 10.3 except change investigated frequency range from 2310 MHz to 2410 MHz and 2475 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

### 12.4. Test result


Pass. (See below detailed test result)

Remark: hopping on and hopping off mode all have been test, hopping off mode is worse and reported only.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\90  
**Memo:** DH5 2402 Power:1

### Test Graph

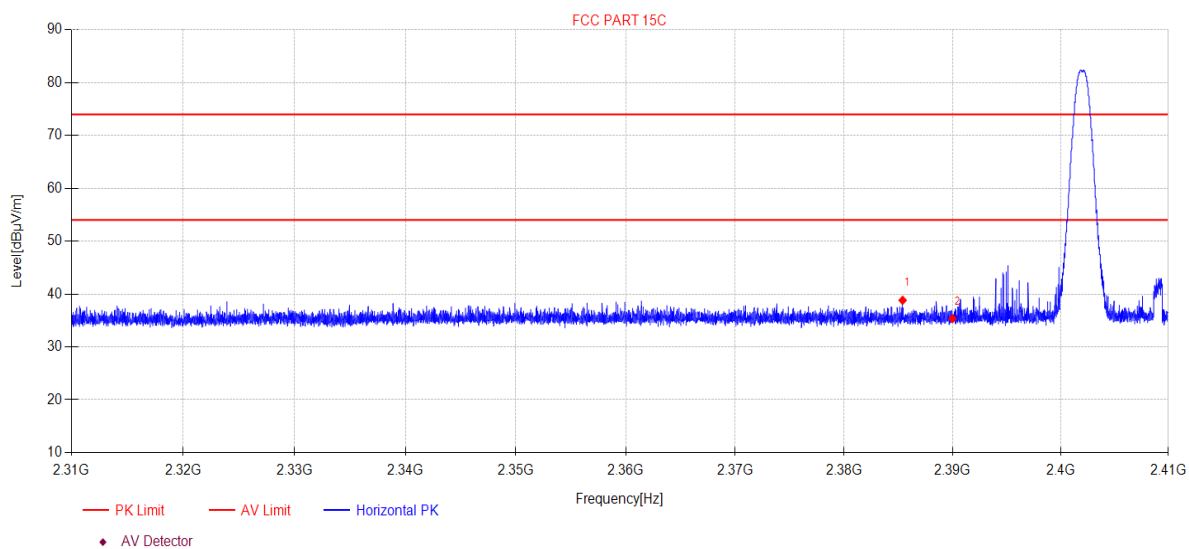

### Suspected Data List

| NO. | Freq.<br>[MHz] | Reading<br>[dBμV] | Factor<br>[dB] | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Detector | Polarity   |
|-----|----------------|-------------------|----------------|-------------------|-------------------|----------------|----------|------------|
| 1   | 2385.39        | 48.55             | -9.73          | 38.82             | 74.00             | 35.18          | PK       | Horizontal |
| 2   | 2390.00        | 45.07             | -9.72          | 35.35             | 74.00             | 38.65          | PK       | Horizontal |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\91  
**Memo:** DH5 2402 Power:1

### Test Graph

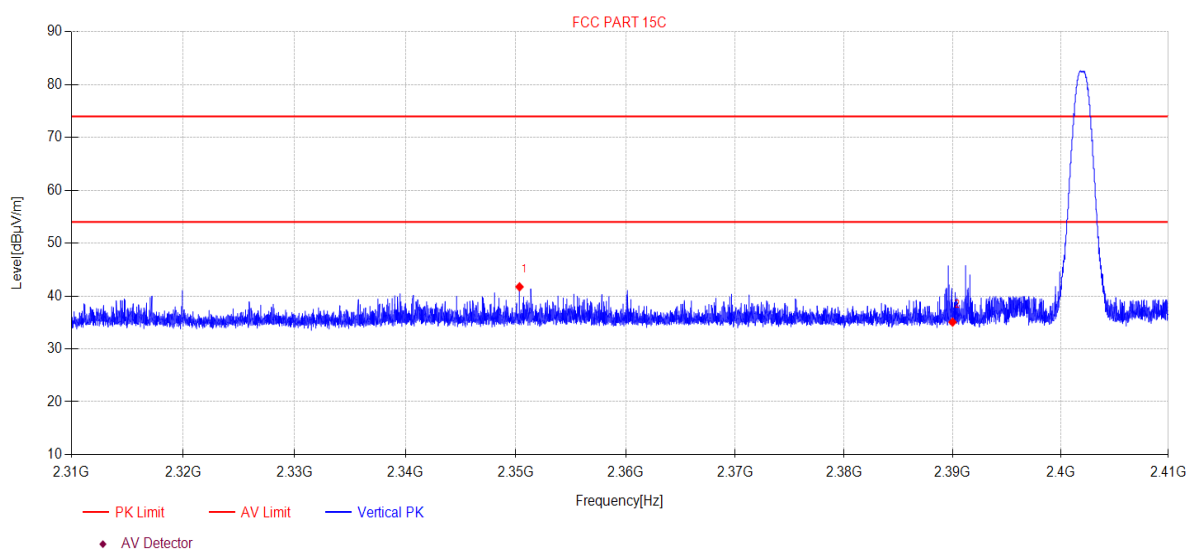

| Suspected Data List |             |                |             |                |                |             |          |          |
|---------------------|-------------|----------------|-------------|----------------|----------------|-------------|----------|----------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
| 1                   | 2350.34     | 51.53          | -9.80       | 41.73          | 74.00          | 32.27       | PK       | Vertical |
| 2                   | 2390.00     | 44.78          | -9.72       | 35.06          | 74.00          | 38.94       | PK       | Vertical |


#### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\92  
**Memo:** 2DH5 2402 Power:1

### Test Graph

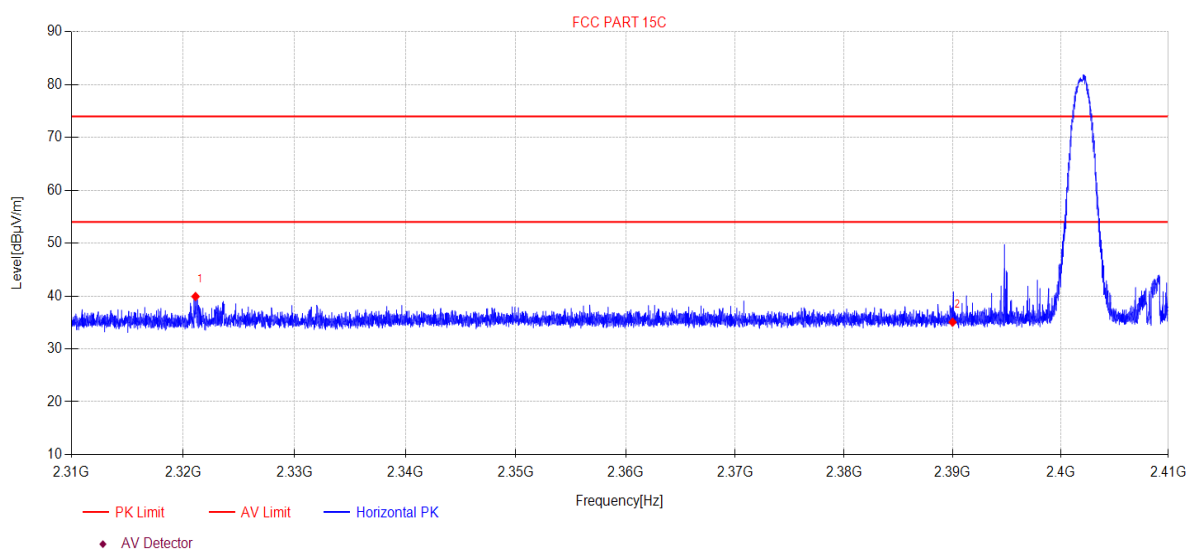

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| 1   | 2321.10     | 49.77          | -9.86       | 39.91          | 74.00          | 34.09       | PK       | Horizontal |
| 2   | 2390.00     | 44.77          | -9.72       | 35.05          | 74.00          | 38.95       | PK       | Horizontal |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\93  
**Memo:** 2DH5 2402 Power:1

### Test Graph

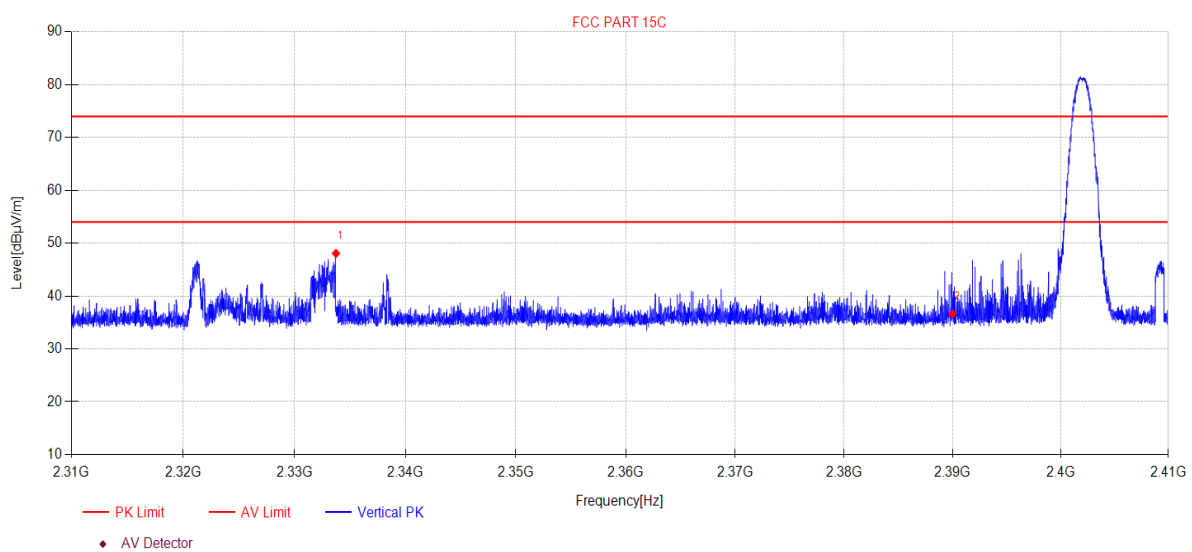

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|----------|
| 1   | 2333.73     | 57.90          | -9.83       | 48.07          | 74.00          | 25.93       | PK       | Vertical |
| 2   | 2390.00     | 46.36          | -9.72       | 36.64          | 74.00          | 37.36       | PK       | Vertical |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\94  
**Memo:** 3DH5 2402 Power:1

### Test Graph

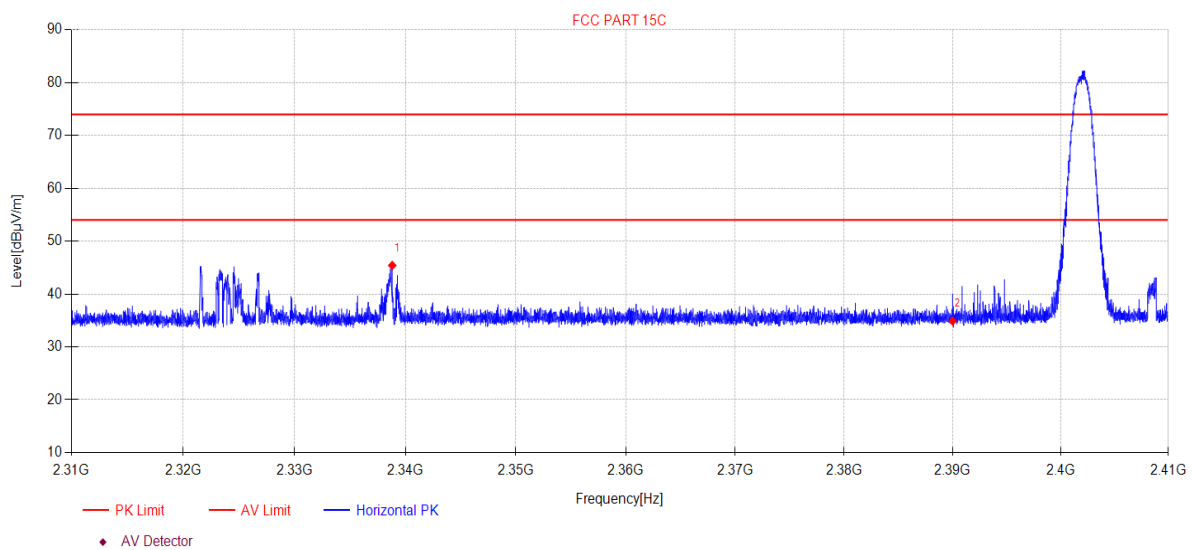

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| 1   | 2338.81     | 55.23          | -9.82       | 45.41          | 74.00          | 28.59       | PK       | Horizontal |
| 2   | 2390.00     | 44.60          | -9.72       | 34.88          | 74.00          | 39.12       | PK       | Horizontal |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\95  
**Memo:** 3DH5 2402 Power:1

### Test Graph

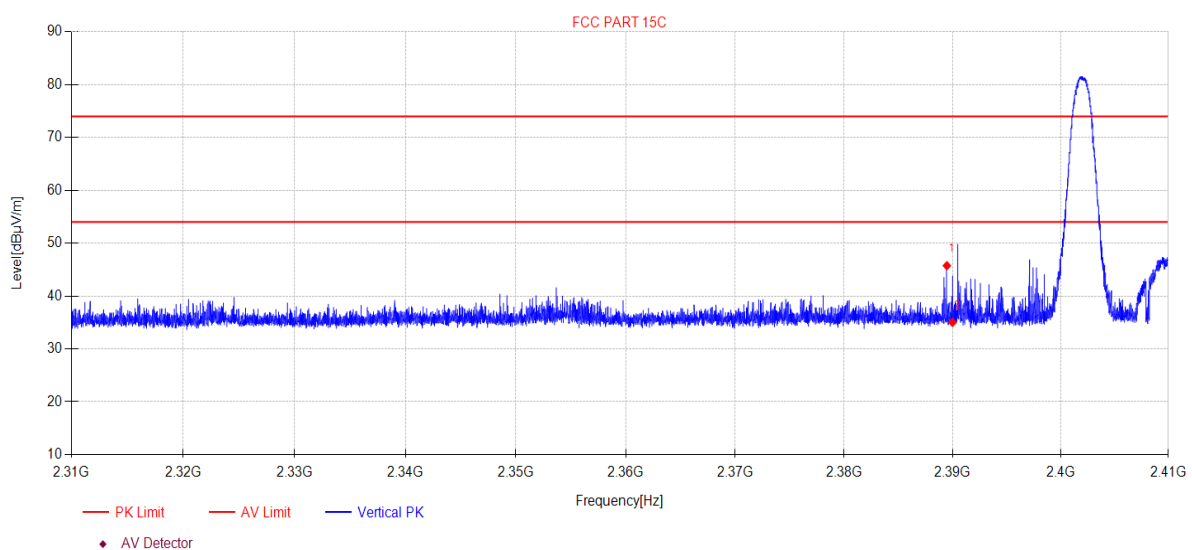

### Suspected Data List

| NO. | Freq.<br>[MHz] | Reading<br>[dBμV] | Factor<br>[dB] | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Detector | Polarity |
|-----|----------------|-------------------|----------------|-------------------|-------------------|----------------|----------|----------|
| 1   | 2389.47        | 55.46             | -9.72          | 45.74             | 74.00             | 28.26          | PK       | Vertical |
| 2   | 2390.00        | 44.74             | -9.72          | 35.02             | 74.00             | 38.98          | PK       | Vertical |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\98  
**Memo:** DH5 2480 Power:1

### Test Graph

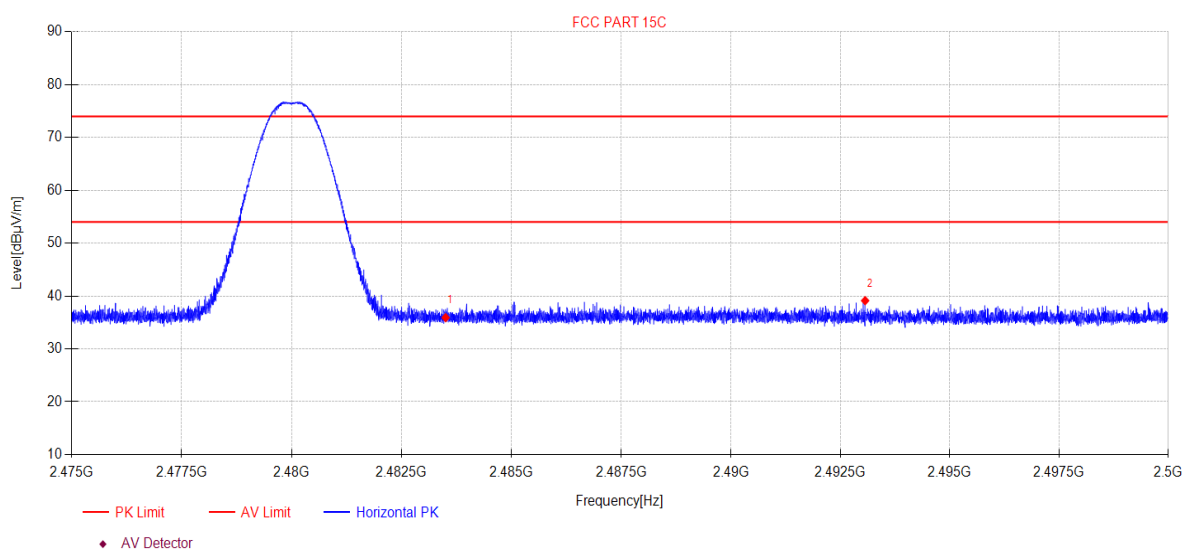

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| 1   | 2483.50     | 45.37          | -9.46       | 35.91          | 74.00          | 38.09       | PK       | Horizontal |
| 2   | 2493.07     | 48.55          | -9.42       | 39.13          | 74.00          | 34.87       | PK       | Horizontal |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\99  
**Memo:** DH5 2480 Power:1

### Test Graph

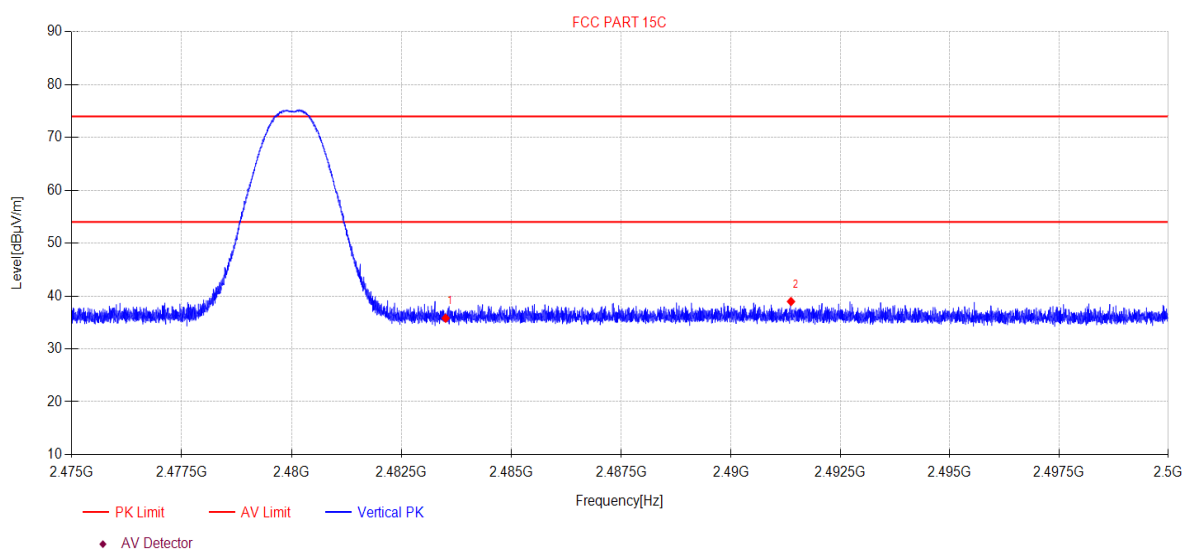

### Suspected Data List

| NO. | Freq.<br>[MHz] | Reading<br>[dBμV] | Factor<br>[dB] | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Detector | Polarity |
|-----|----------------|-------------------|----------------|-------------------|-------------------|----------------|----------|----------|
| 1   | 2483.50        | 45.26             | -9.46          | 35.80             | 74.00             | 38.20          | PK       | Vertical |
| 2   | 2491.37        | 48.38             | -9.42          | 38.96             | 74.00             | 35.04          | PK       | Vertical |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\100  
**Memo:** 2DH5 2480 Power:1

### Test Graph

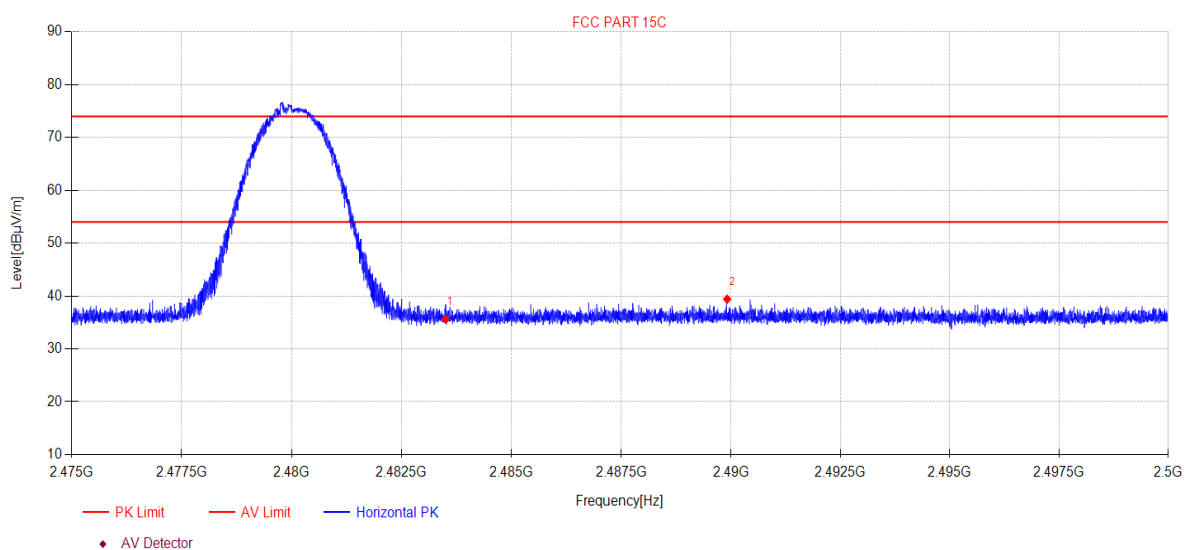

### Suspected Data List

| NO. | Freq.<br>[MHz] | Reading<br>[dBμV] | Factor<br>[dB] | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Detector | Polarity   |
|-----|----------------|-------------------|----------------|-------------------|-------------------|----------------|----------|------------|
| 1   | 2483.50        | 45.06             | -9.46          | 35.60             | 74.00             | 38.40          | PK       | Horizontal |
| 2   | 2489.92        | 48.83             | -9.43          | 39.40             | 74.00             | 34.60          | PK       | Horizontal |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\101  
**Memo:** 2DH5 2480 Power:1

### Test Graph

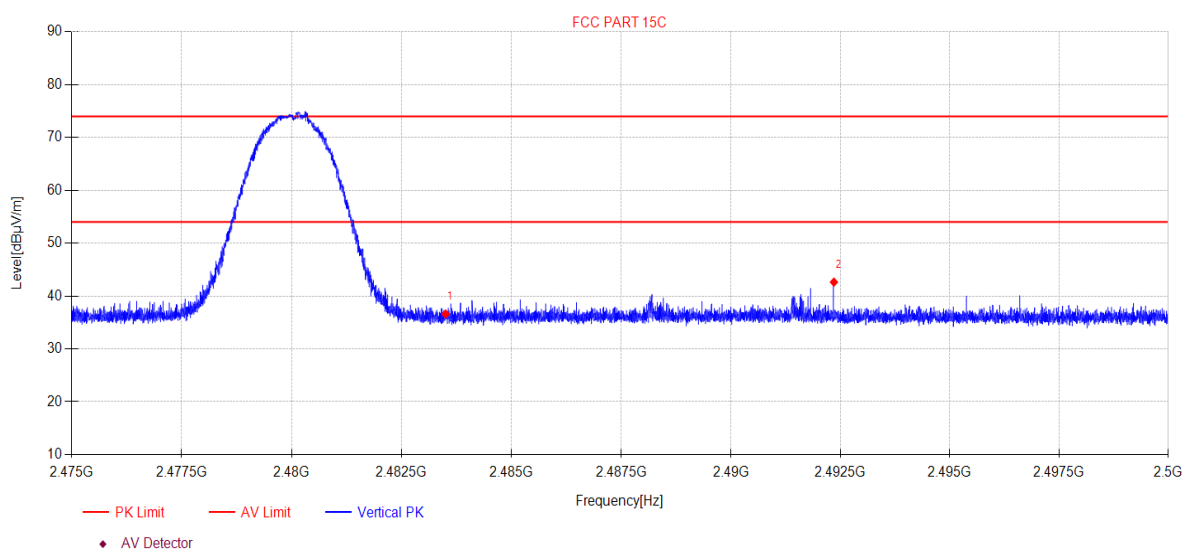

### Suspected Data List

| NO. | Freq.<br>[MHz] | Reading<br>[dBμV] | Factor<br>[dB] | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Detector | Polarity |
|-----|----------------|-------------------|----------------|-------------------|-------------------|----------------|----------|----------|
| 1   | 2483.50        | 46.06             | -9.46          | 36.60             | 74.00             | 37.40          | PK       | Vertical |
| 2   | 2492.35        | 52.05             | -9.42          | 42.63             | 74.00             | 31.37          | PK       | Vertical |


### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\96  
**Memo:** 3DH5 2480 Power:1

### Test Graph

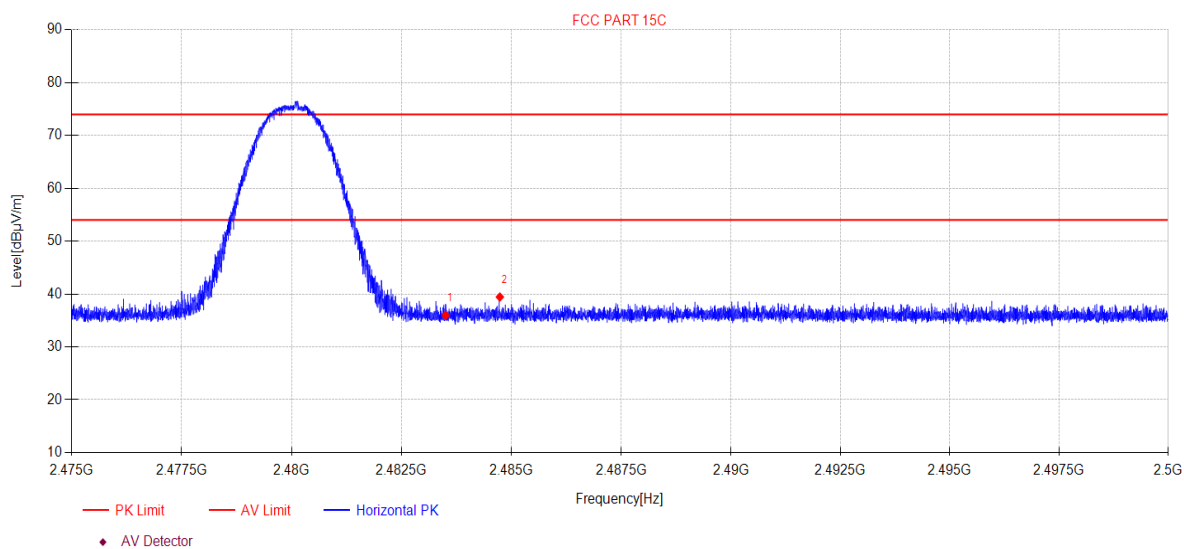

### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Detector | Polarity   |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|------------|
| 1   | 2483.50     | 45.43          | -9.46       | 35.97          | 74.00          | 38.03       | PK       | Horizontal |
| 2   | 2484.74     | 48.89          | -9.45       | 39.44          | 74.00          | 34.56       | PK       | Horizontal |


Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Date:** 2022-11-30 **Tested By:** James Gan  
**EUT:** Portable Audio Amplifier System **Model Number:** PASSPORT EVENT SERIES 2  
**Test Mode:** TX Mode **Power Supply:** AC 120V/60Hz  
**Condition:** Temp:23.1°C;Humi:52.5%;Press:100.3kPa **Test Site:** DDT 3# Chamber  
**File Path:** d:\ts\2022 report data\Q22102518-2E EVENT 2 845\FCC ABOVE 1G\97  
**Memo:** 3DH5 2480 Power:1

### Test Graph

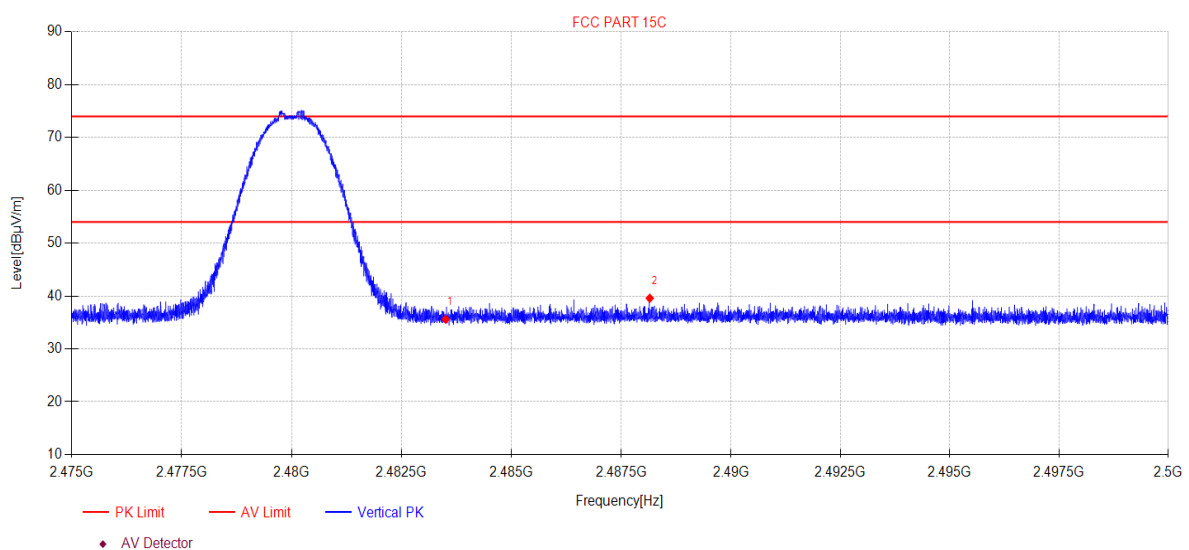

### Suspected Data List


| NO. | Freq.<br>[MHz] | Reading<br>[dBμV] | Factor<br>[dB] | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Detector | Polarity |
|-----|----------------|-------------------|----------------|-------------------|-------------------|----------------|----------|----------|
| 1   | 2483.50        | 45.07             | -9.46          | 35.61             | 74.00             | 38.39          | PK       | Vertical |
| 2   | 2488.15        | 49.02             | -9.44          | 39.58             | 74.00             | 34.42          | PK       | Vertical |

### Note:

1. Level = Reading + Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

### 13. Power Line Conducted Emission

#### 13.1. Block diagram of test setup

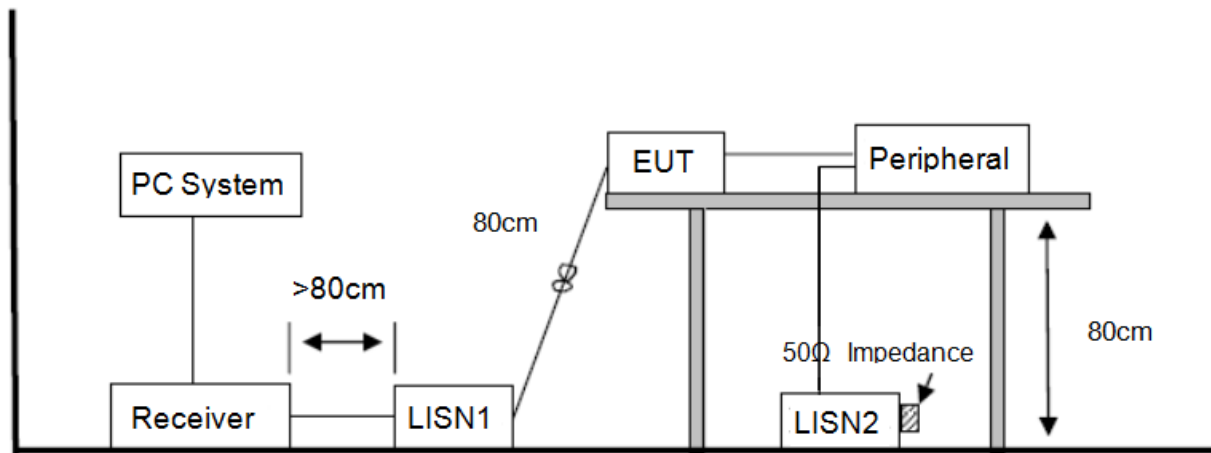

#### 13.2. Power Line Conducted Emission Limits

| Frequency         | Quasi-Peak Level<br>dB(μV) | Average Level<br>dB(μV) |
|-------------------|----------------------------|-------------------------|
| 150 kHz ~ 500 kHz | 66 ~ 56*                   | 56 ~ 46*                |
| 500 kHz ~ 5 MHz   | 56                         | 46                      |
| 5 MHz ~ 30 MHz    | 60                         | 50                      |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

#### 13.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test setup as described in clause 13.1 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were

recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### 13.4. Test Result

**Pass. (See below detailed test result)**


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means Peak detection; "----" means Average detection.

## TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room **D:\2022 CE report date\Q22102518-2E EVENT2\FCC.EM6**  
**Test Date** : 2022-12-01 **Tested By** : Johnson Huang  
**EUT** : Portable Audio Amplifier System **Model Number** : PASSPORT EVENT SERIES 2/PR 845  
**Power Supply** : AC 120V/60Hz **Test Mode** : TX  
**Condition** : TEMP:24.6°C, RH:54.1%, BP:101.1kPa **LISN** : 2021 1# ENV216/NEUTRAL  
**Memo** : BT

Data: 2

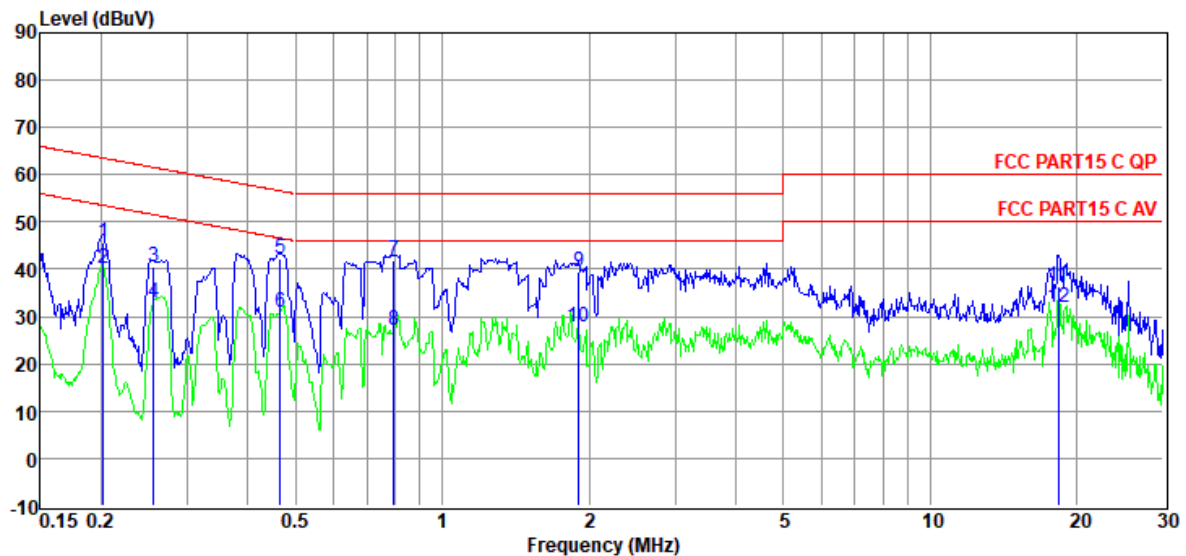

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase   |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|---------|
| (Mark) | (MHz) | (dBμV)     | (dB)        | (dB)       | (dB)                 | (dBμV)       | (dBμV)     | (dB)       |          |         |
| 1      | 0.20  | 25.79      | 9.80        | 0.01       | 9.92                 | 45.52        | 63.54      | -18.02     | QP       | NEUTRAL |
| 2      | 0.20  | 20.52      | 9.80        | 0.01       | 9.92                 | 40.25        | 53.54      | -13.29     | Average  | NEUTRAL |
| 3      | 0.26  | 20.94      | 9.72        | 0.02       | 9.92                 | 40.60        | 61.56      | -20.96     | QP       | NEUTRAL |
| 4      | 0.26  | 13.22      | 9.72        | 0.02       | 9.92                 | 32.88        | 51.56      | -18.68     | Average  | NEUTRAL |
| 5      | 0.47  | 22.82      | 9.52        | 0.02       | 9.91                 | 42.27        | 56.58      | -14.31     | QP       | NEUTRAL |
| 6      | 0.47  | 11.36      | 9.52        | 0.02       | 9.91                 | 30.81        | 46.58      | -15.77     | Average  | NEUTRAL |
| 7      | 0.80  | 22.16      | 9.76        | 0.03       | 9.90                 | 41.85        | 56.00      | -14.15     | QP       | NEUTRAL |
| 8      | 0.80  | 7.32       | 9.76        | 0.03       | 9.90                 | 27.01        | 46.00      | -18.99     | Average  | NEUTRAL |
| 9      | 1.91  | 20.05      | 9.61        | 0.04       | 9.89                 | 39.59        | 56.00      | -16.41     | QP       | NEUTRAL |
| 10     | 1.91  | 8.31       | 9.61        | 0.04       | 9.89                 | 27.85        | 46.00      | -18.15     | Average  | NEUTRAL |
| 11     | 18.33 | 16.57      | 9.74        | 0.16       | 9.95                 | 36.42        | 60.00      | -23.58     | QP       | NEUTRAL |
| 12     | 18.33 | 12.16      | 9.74        | 0.16       | 9.95                 | 32.01        | 50.00      | -17.99     | Average  | NEUTRAL |


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

## TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room **D:\2022 CE report date\Q22102518-2E EVENT2\FCC.EM6**  
**Test Date** : 2022-12-01 **Tested By** : Johnson Huang  
**EUT** : Portable Audio Amplifier System **Model Number** : PASSPORT EVENT SERIES 2/PR 845  
**Power Supply** : AC 120V/60Hz **Test Mode** : TX  
**Condition** : TEMP:24.6°C, RH:54.1%, BP:101.1kPa **LISN** : 2021 1# ENV216/LINE  
**Memo** : BT

Data: 8

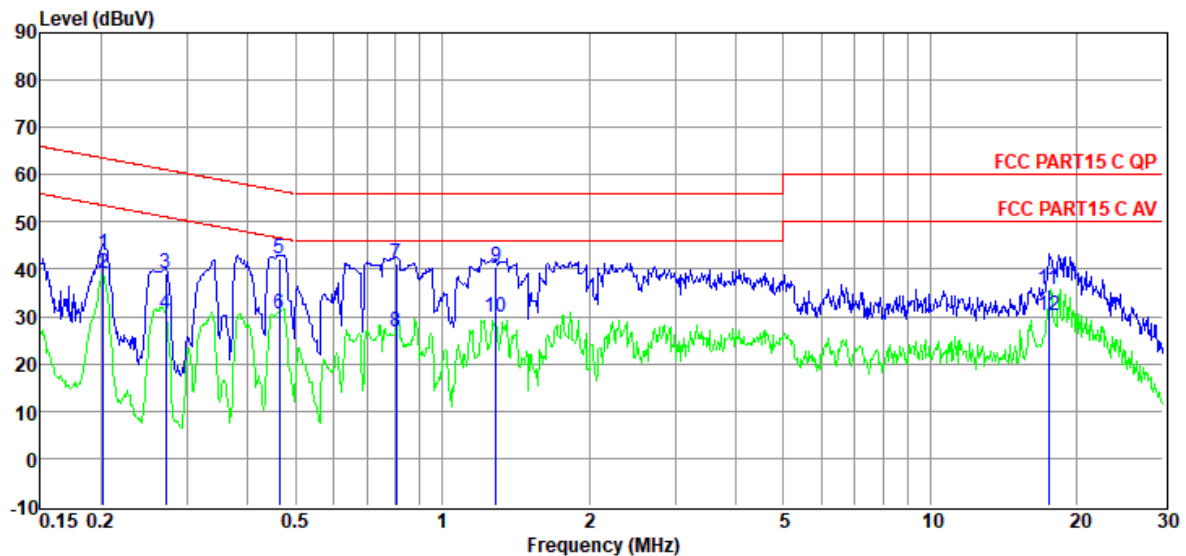

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|-------|
| (Mark) | (MHz) | (dBμV)     | (dB)        | (dB)       | (dB)                 | (dBμV)       | (dBμV)     | (dB)       |          |       |
| 1      | 0.20  | 23.43      | 9.80        | 0.01       | 9.92                 | 43.16        | 63.54      | -20.38     | QP       | LINE  |
| 2      | 0.20  | 19.35      | 9.80        | 0.01       | 9.92                 | 39.08        | 53.54      | -14.46     | Average  | LINE  |
| 3      | 0.27  | 19.48      | 9.73        | 0.02       | 9.92                 | 39.15        | 61.07      | -21.92     | QP       | LINE  |
| 4      | 0.27  | 10.76      | 9.73        | 0.02       | 9.92                 | 30.43        | 51.07      | -20.64     | Average  | LINE  |
| 5      | 0.46  | 22.55      | 9.62        | 0.02       | 9.91                 | 42.10        | 56.63      | -14.53     | QP       | LINE  |
| 6      | 0.46  | 11.10      | 9.62        | 0.02       | 9.91                 | 30.65        | 46.63      | -15.98     | Average  | LINE  |
| 7      | 0.80  | 21.57      | 9.54        | 0.03       | 9.90                 | 41.04        | 56.00      | -14.96     | QP       | LINE  |
| 8      | 0.80  | 7.17       | 9.54        | 0.03       | 9.90                 | 26.64        | 46.00      | -19.36     | Average  | LINE  |
| 9      | 1.29  | 21.00      | 9.56        | 0.03       | 9.89                 | 40.48        | 56.00      | -15.52     | QP       | LINE  |
| 10     | 1.29  | 10.48      | 9.56        | 0.03       | 9.89                 | 29.96        | 46.00      | -16.04     | Average  | LINE  |
| 11     | 17.48 | 15.94      | 9.69        | 0.16       | 9.95                 | 35.74        | 60.00      | -24.26     | QP       | LINE  |
| 12     | 17.48 | 10.45      | 9.69        | 0.16       | 9.95                 | 30.25        | 50.00      | -19.75     | Average  | LINE  |

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

## 14. Antenna Requirements

### 14.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

### 14.2. Result

The antenna used for this product is PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is -1.07 dBi.

## 16. Photos of the EUT

Please refer to Appendix I: Photos of the EUT.

**END OF REPORT**