# FCC RADIO TEST REPORT

# according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : O&A Bluetooth module

Model No. : ONA\_BT\_01
Brand Name : BlueChip

Filing Type : Existing Change

Applicant : Venture Corporation Limited

5006 Ang Mo Kio Ave 5 #05-01/12 TECHplace II

Singapore 569873

FCC ID : XSP-ONA-BT-02

Manufacturer : Venture Corporation Limited

5006 Ang Mo Kio Ave 5 #05-01/12 TECHplace II

Singapore 569873

Received Date : Aug. 25, 2009 Final Test Date : Aug. 11, 2010

#### Statement

## Test result included is only for the Bluetooth part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003 and 47 CFR FCC Part 15 Subpart C.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





#### SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

# **Table of Contents**

1	SUM	IMARY OF THE TEST RESULT	
2	GEN	IERAL INFORMATION	3
	2.1	Product Details	
	2.2	Table for Filed Antenna	3
	2.3	Table for Carrier Frequencies	3
	2.4	Table for Test Modes	
	2.5	Table for Testing Locations	4
	2.6	Table for Supporting Units	4
	2.7	Table for Parameters of Test Software Setting	5
	2.8	EUT Operation during Test	5
	2.9	Test Configurations	6
3	TEST	T RESULT	8
	3.1	AC Power Line Conducted Emissions Measurement	8
	3.2	Maximum Peak Output Power Measurement	12
	3.3	Hopping Channel Separation Measurement	14
	3.4	Number of Hopping Frequency Measurement	19
	3.5	Dwell Time Measurement	21
	3.6	Radiated Emissions Measurement	28
	3.7	Band Edge and Fundamental Emissions Measurement	40
	3.8	Antenna Requirements	45
4	LIST	OF MEASURING EQUIPMENTS	46
5	TEST	T LOCATION	48
6	TAF	CERTIFICATE OF ACCREDITATION	49
Α	PPEN	NDIX A. TEST PHOTOS	A1 ~ A7
Δ	PPFN	NOIX B. PHOTOGRAPHS OF FUT	R1 R/

TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Issued Date : Aug. 16, 2010 FCC ID : XSP-ONA-BT-02

# **History of This Test Report**

Report No.: FR9O0124-02

Original Issue Date: Aug. 16, 2010

Report No.: FR9O0124-02

Do additional attachment.

■ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description
FR900124	Oct. 07, 2009	Original.
FR9O0124-01	Feb. 01, 2010	It was added a LC on the matching whose test result was better, so that the original test result remained the same in this report.
FR9O0124-02	Aug. 16, 2010	Version change: X05→X07; 1.Remove HP logo on the PCB silkscreen; 2.Clean up the reference designators to reflect correct component type. Update RF conducted in this report.

SPORTON International Inc. Page No. : ii of ii

Report No.: FR9O0124-02

# CERTIFICATE OF COMPLIANCE

# according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : O&A Bluetooth module

Model No. : ONA\_BT\_01

Brand Name: BlueChip

Applicant : Venture Corporation Limited

5006 Ang Mo Kio Ave 5 #05-01/12 TECHplace

II Singapore 569873

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 25, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Wayne Hsu / Vice Manager

## SPORTON International Inc.

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

 SPORTON International Inc.
 Page No.
 : 1 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# 1 SUMMARY OF THE TEST RESULT

	Applied Standard: 47 CFR FCC Part 15 Subpart C					
Part	Part Rule Section Description of Test		Result	Under Limit		
3.1	15.207	AC Power Line Conducted Emissions	Complies	6.45 dB		
3.2	15.247(b)(1)	Maximum Peak Conducted Output Power	Complies	29.42 dB		
3.3	15.247(a)(1)	Hopping Channel Separation	Complies	-		
3.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-		
3.5	15.247(a)(1)	Dwell Time	Complies	-		
3.6	3.6 15.247(d) Radiated Emissions		Complies	3.06 dB		
3.7	15.247(d)	Band Edge Emissions	Complies	4.35 dB		
3.8	15.203	Antenna Requirements	Complies	-		

Report No.: FR9O0124-02

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

 SPORTON International Inc.
 Page No. : 2 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# **2 GENERAL INFORMATION**

# 2.1 Product Details

Only the radio detail of Bluetooth is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Report No.: FR9O0124-02

<u> </u>		
Items	Description	
Power Type	From host	
Modulation	FHSS (GFSK/ π/4-DQPSK/ 8DPSK)	
Data Rate (Mbps)	GFSK: 1/ π/4-DQPSK: 2/ 8DPSK: 3	
Frequency Range	2400 ~ 2483.5MHz	
Channel Number	79	
Channel Band Width (99%)	1.221 MHz	
Conducted Output Power	0.58 dBm	

# 2.2 Table for Filed Antenna

Ant.	Antenna Type	Connector	Gain (dBi)
1	SMD Antenna	Fix on board	2.10

# 2.3 Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
	0	2402 MHz
	1	2403 MHz
	:	:
	38	2440 MHz
2400~2483.5MHz	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

 SPORTON International Inc.
 Page No.
 : 3 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

#### 2.4 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Report No.: FR9O0124-02

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Charger Mode	Auto	-	NA
Max. Conducted Output Power	GFSK/ π/4-DQPSK/ 8DPSK	1 Mbps/ 2 Mbps/ 3 Mbps	0/39/78	NA
Hopping Channel Separation	8DPSK	3 Mbps	0~1/39~40/77~78	NA
Number of Hopping Frequency	8DPSK	3 Mbps	0~78	NA
Dwell Time	DH1/DH3/DH5	3 Mbps	0/39/78	NA
Radiated Emissions Below 1GHz	GFSK	1 Mbps	39	NA
Radiated Emissions Above 1GHz	GFSK	1 Mbps	0/39/78	1
Band Edge Emissions	GFSK/ π/4-DQPSK/ 8DPSK	1 Mbps/ 2 Mbps/ 3 Mbps	0/78	1

# 2.5 Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
CO01-HY	Conduction	Hwa Ya	643075	IC 4086B-1	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-
03CH02-HY	SAC	Hwa Ya	643075	IC 4086B-1	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

# 2.6 Table for Supporting Units

Support Unit	Brand	Model	FCC ID	Remark	
Notebook	DELL	D505	DoC		
Modem	ACEEX	DM1414	IFAXDM1414	Conducted	
Test Fixture	-	-	-		
Notebook	DELL	D505	DoC	Dedicted	
Test Fixture	-	-	-	Radiated	

 SPORTON International Inc.
 Page No. : 4 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# 2.7 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Report No.: FR9O0124-02

#### **Power Parameters of Bluetooth**

Test Software Version	Blue Test3		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters ( 1Mbps )	63	63	63
Power Parameters ( 2Mbps )	120	120	120
Power Parameters ( 3Mbps )	120	120	120

# 2.8 EUT Operation during Test

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows:

The NB sends "H" messages to the panel, and the panel displays "H" patterns on the screen.

The NB sends "H" messages to the modem.

At the same time, the following programs were executed:

- Executed "Blue Test3" to keep transmitting signals at fixed frequency.

 SPORTON International Inc.
 Page No. : 5 of 49


 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# 2.9 Test Configurations

# 2.9.1 Radiation Emissions Test Configuration

#### For radiated emissions 9kHz~1GHz

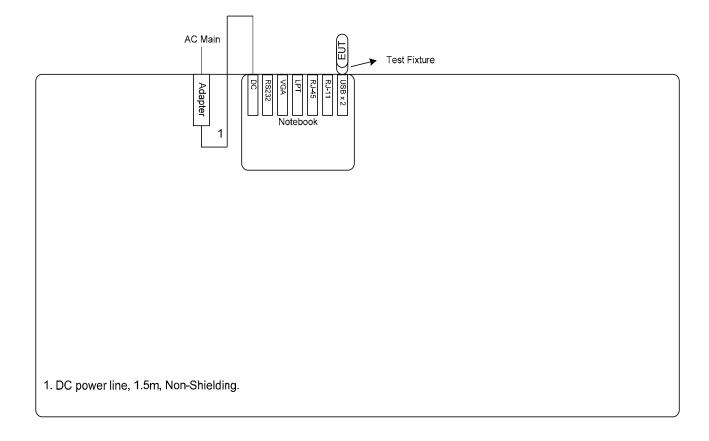


 SPORTON International Inc.
 Page No.
 : 6 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

#### For radiated emissions above 1GHz

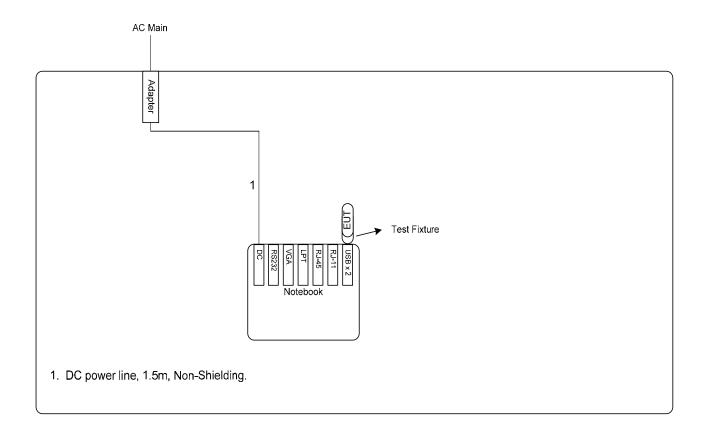

 SPORTON International Inc.
 Page No. : 7 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

## 3 TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

#### 3.1.1 Limit

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Report No.: FR9O0124-02

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

## 3.1.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 3.1.3 Test Procedures

- 1. The EUT warm up about 15 minutes then start test.
- 2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
- 3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
- The frequency range from 150 KHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 7. The measurement has to be done between each power line and ground at the power terminal.


 SPORTON International Inc.
 Page No. : 8 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# Report No.: FR900124-02

#### 3.1.4 Test Setup Layout

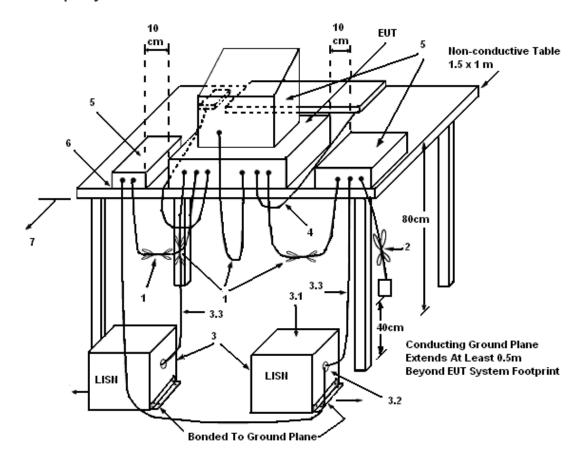

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

 SPORTON International Inc.
 Page No. : 9 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

#### 3.1.5 Test Deviation

There is no deviation with the original standard.


# 3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

#### 3.1.7 Results of AC Power Line Conducted Emissions Measurement

Final Test Date	Sep. 22, 2009	Test Site No.	CO01-HY
Temperature	28.6	Humidity	51%
Test Engineer	Ken	Configuration	Charger Mode

#### Line

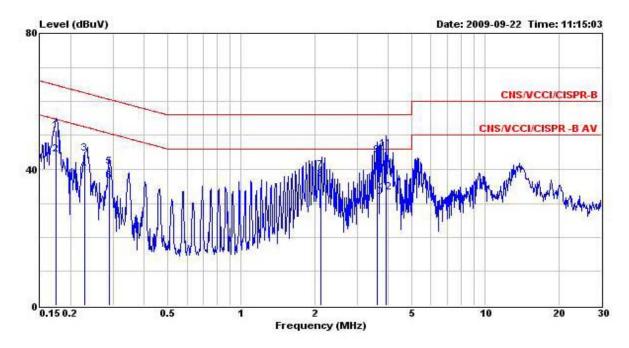


	T		Over	Limit	Read	Probe	Cable	Descrip
	Freq	Level	Limit	Line	rever	Factor	ross	Remark
-	MHz	dBuV	dB	dBuV	dBuV	dB	dB	-
1	0.173	51.41	-13.38	64.79	51.29	0.08	0.04	QP
2	0.173	44.29	-10.50	54.79	44.17	0.08	0.04	Average
3	0.229	44.72	-17.77	62.49	44.60	0.08	0.04	QP
4 5	0.229	39.86	-12.63	52.49	39.74	0.08	0.04	Average
5	0.288	40.86	-19.72	60.58	40.72	0.09	0.05	QP
6	0.288	36.53	-14.05	50.58	36.39	0.09	0.05	Average
7	2.127	39.66	-16.34	56.00	39.43	0.13	0.10	QP
8	2.127	37.16	-8.84	46.00	36.93	0.13	0.10	Average
9	3.620	44.24	-11.76	56.00	43.96	0.16	0.12	QP
10	3.620	31.98	-14.02	46.00	31.70	0.16	0.12	Average
11	3.909	45.92	-10.08	56.00	45.63	0.17	0.12	QP
12	3.909	33.36	-12.64	46.00	33.07	0.17	0.12	Average

 SPORTON International Inc.
 Page No.
 : 10 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

#### Neutral

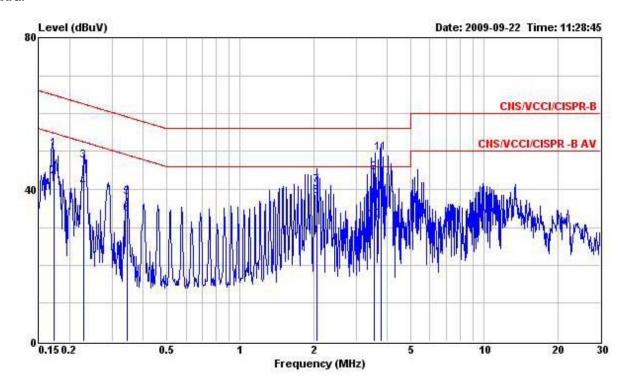

Deed Deele Calife

			Over	Limit	Read	Probe	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
-	MHz	dBuV	dB	dBu∀	dBuV	dB	dB	
1	0.173	50.61	-14.21	64.82	50.51	0.06	0.04	QP
2	0.173	43.39	-11.43	54.82	43.29	0.06	0.04	Average
3	0.229	47.59	-14.90	62.49	47.49	0.06	0.04	QP
4	0.229	40.48	-12.01	52.49	40.38	0.06	0.04	Average
-5	0.345	37.89	-21.19	59.08	37.76	0.07	0.06	QP
6	0.345	33.42	-15.66	49.08	33.29	0.07	0.06	Average
7	2.069	40.96	-15.04	56.00	40.75	0.11	0.10	QP
8	2.069	38.13	-7.87	46.00	37.92	0.11	0.10	Average
9	3.559	44.30	-11.70	56.00	44.05	0.13	0.12	QP
10	3.559	31.93	-14.07	46.00	31.68	0.13	0.12	Average
11	3.789	49.55	-6.45	56.00	49.29	0.14	0.12	QP
12	3.789	36.90	-9.10	46.00	36.64	0.14	0.12	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

**SPORTON International Inc.** TEL: 886-2-2696-2468 FAX: 886-2-2696-2255 Page No. : 11 of 49 Issued Date : Aug. 16, 2010 FCC ID : XSP-ONA-BT-02

# 3.2 Maximum Peak Output Power Measurement

#### 3.2.1 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Report No.: FR9O0124-02

## 3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

#### 3.2.3 Test Procedures

- 1. The transmitter output (antenna port) was connected to the power meter.
- 2. Turn on the EUT and power meter and then record the peak power value.
- 3. Repeat above procedures on all channels needed to be tested.

#### 3.2.4 Test Setup Layout



#### 3.2.5 Test Deviation

There is no deviation with the original standard.

## 3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 SPORTON International Inc.
 Page No.
 : 12 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# 3.2.7 Test Result of Maximum Peak Output Power

Final Test Date	Aug. 10, 2010	Test Site No.	TH01-HY
Temperature	24	Humidity	61%
Test Engineer	lan	Configurations	GFSK / π/4-DQPSK / 8DPSK

Report No.: FR900124-02

# 1Mbps

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	-0.69	30.00	Complies
39	2441 MHz	0.58	30.00	Complies
78	2480 MHz	0.37	30.00	Complies

# 2Mbps

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	-2.52	30.00	Complies
39	2441 MHz	-1.68	30.00	Complies
78	2480 MHz	-2.16	30.00	Complies

# 3Mbps

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	-2.37	30.00	Complies
39	2441 MHz	-1.51	30.00	Complies
78	2480 MHz	-2.03	30.00	Complies

 SPORTON International Inc.
 Page No. : 13 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# 3.3 Hopping Channel Separation Measurement

#### 3.3.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Report No.: FR9O0124-02

## 3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 3.3.3 Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
- 2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
- 3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

#### 3.3.4 Test Setup Layout



#### 3.3.5 Test Deviation

There is no deviation with the original standard.

#### 3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 SPORTON International Inc.
 Page No. : 14 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# 3.3.7 Test Result of Hopping Channel Separation

Final Test Date	Aug. 10, 2010	Test Site No.	TH01-HY
Temperature	24	Humidity	61%
Test Engineer	lan	Configurations	8DPSK

Report No.: FR9O0124-02

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.000	1.375	1.207	Complies
2441 MHz	1.000	1.341	1.188	Complies
2480 MHz	1.000	1.389	1.221	Complies


Ch. Separation Limits: >2/3 of 20dB bandwidth

 SPORTON International Inc.
 Page No.
 : 15 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010


 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

#### 20 dB Bandwidth Plot on Channel 0 / 2402 MHz

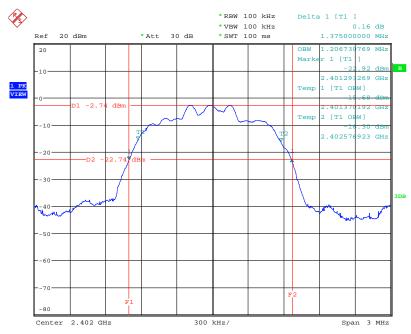

Date: 10.AUG.2010 11:33:54

#### 20 dB Bandwidth Plot on Channel 39 / 2441 MHz

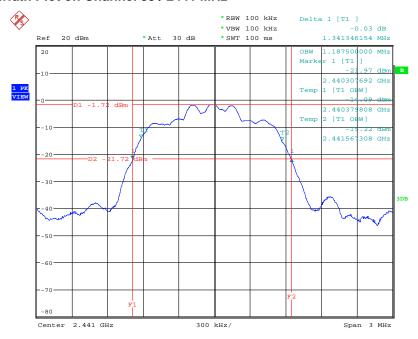


Date: 10.AUG.2010 11:48:10

 SPORTON International Inc.
 Page No.
 : 16 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010


 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

#### 20 dB Bandwidth Plot on Channel 78 / 2480 MHz

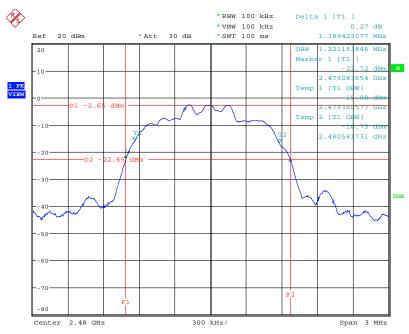

Date: 10.AUG.2010 12:03:45

#### Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz

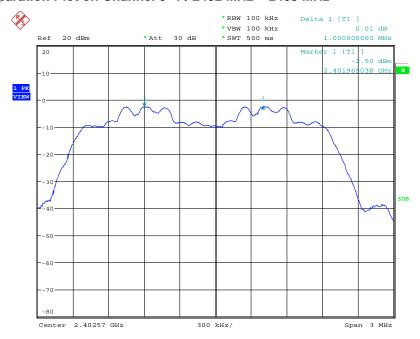

Date: 10.AUG.2010 11:45:25

 SPORTON International Inc.
 Page No.
 : 17 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010


 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz



Date: 10.AUG.2010 11:59:49

# Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

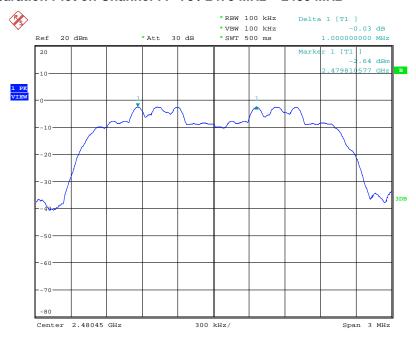

Date: 10.AUG.2010 23:08:17

 SPORTON International Inc.
 Page No.
 : 18 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# 3.4 Number of Hopping Frequency Measurement

#### 3.4.1 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

Report No.: FR9O0124-02

# 3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 3.4.3 Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
- 2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized.
- 3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

#### 3.4.4 Test Setup Layout



#### 3.4.5 Test Deviation

There is no deviation with the original standard.

# 3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 SPORTON International Inc.
 Page No.
 : 19 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010


 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# 3.4.7 Test Result of Number of Hopping Frequency

Final Test Date	Aug. 11, 2010	Test Site No.	TH01-HY
Temperature	24	Humidity	61%
Test Engineer	lan	Configurations	8DPSK

Modulation	Channel	Frequency	Hopping Ch.	Min. Limit	Test Result
Туре	No.	(MHz)	(Channels)	(Channels)	iest Result
8DPSK	0 ~ 78	2402 ~ 2480	79	75	Complies

# Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

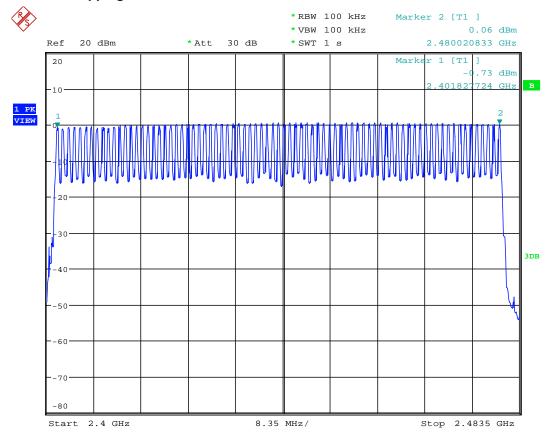

Date: 11.AUG.2010 19:31:25

 SPORTON International Inc.
 Page No. : 20 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

#### 3.5 Dwell Time Measurement

#### 3.5.1 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Report No.: FR9O0124-02

#### 3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1 MHz
VB	1 MHz
Detector	Peak
Trace	Single Trigger

#### 3.5.3 Test Procedures


- 1. The transmitter output (antenna port) was connected to the spectrum analyzer
- 2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- 3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- 4. Sweep Time is more than once pulse time.
- 5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- 6. Measure the maximum time duration of one single pulse.
- 7. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- 8. Measure the maximum time duration of one single pulse.
- 9. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds
- 10. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds.
- 11. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds.

 SPORTON International Inc.
 Page No. : 21 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# 3.5.4 Test Setup Layout



Report No.: FR9O0124-02

# 3.5.5 Test Deviation

There is no deviation with the original standard.

# 3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 3.5.7 Test Result of Dwell Time

Final Test Date	Aug. 10, 2010	Test Site No.	TH01-HY
Temperature	24	Humidity	61%
Took Engineer	Test Frainces	8DPSK	
Test Engineer	lan	Configurations	3DH1/3DH3/3DH5

Data Backet	Data Packet Frequency		Dwell Time	Limits	Test Result
Data Packet	Frequency	(ms)	(s)	(s)	rest Result
DH5	2402 MHz	3.0608	0.3265	0.4000	Complies
DH3	2402 MHz	1.8108	0.2897	0.4000	Complies
DH1	2402 MHz	0.5609	0.1795	0.4000	Complies
DH5	2441 MHz	3.0929	0.3299	0.4000	Complies
DH3	2441 MHz	1.8108	0.2897	0.4000	Complies
DH1	2441 MHz	0.5609	0.1795	0.4000	Complies
DH5	2480 MHz	3.0608	0.3265	0.4000	Complies
DH3	2480 MHz	1.8429	0.2949	0.4000	Complies
DH1	2480 MHz	0.5609	0.1795	0.4000	Complies


 SPORTON International Inc.
 Page No. : 22 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02


#### Report No.: FR9O0124-02

#### DH5 Dwell Time Plot on Channel 0 / 2402 MHz

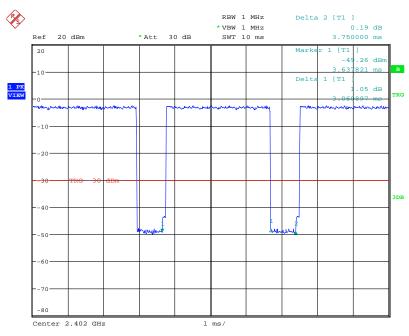

Date: 10.AUG.2010 13:49:46

#### DH3 Dwell Time Plot on Channel 0 / 2402 MHz

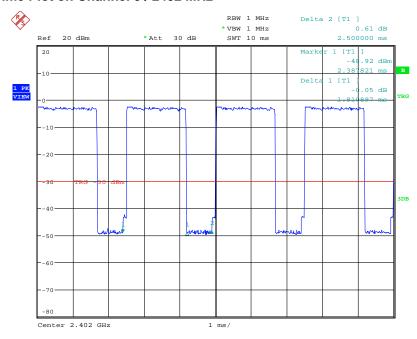


Date: 10.AUG.2010 13:51:04

 SPORTON International Inc.
 Page No.
 : 23 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010


 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# DH1 Dwell Time Plot on Channel 0 / 2402 MHz

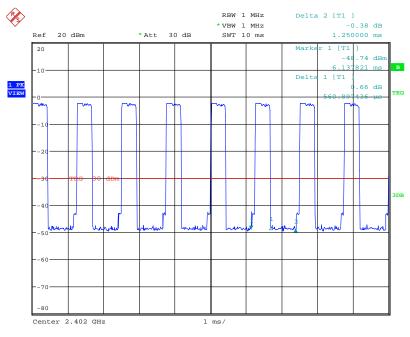

Date: 10.AUG.2010 13:52:26

#### DH5 Dwell Time Plot on Channel 39 / 2441 MHz

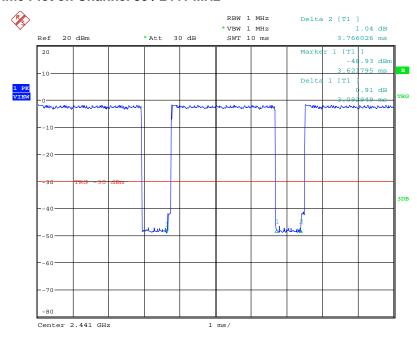


Date: 10.AUG.2010 11:55:07

 SPORTON International Inc.
 Page No.
 : 24 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010


 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

#### DH3 Dwell Time Plot on Channel 39 / 2441 MHz

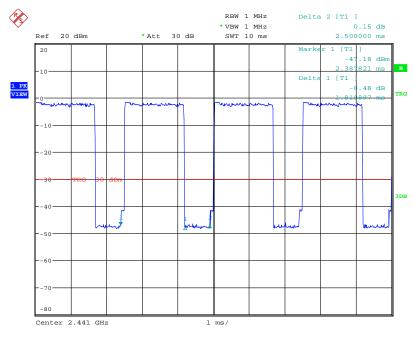

Date: 10.AUG.2010 11:53:16

#### DH1 Dwell Time Plot on Channel 39 / 2441 MHz

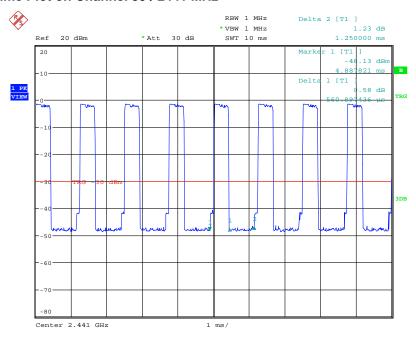


Date: 10.AUG.2010 11:50:55

 SPORTON International Inc.
 Page No. : 25 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010


 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

#### DH5 Dwell Time Plot on Channel 78 / 2480 MHz

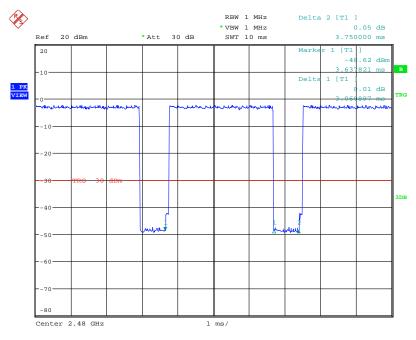

Date: 10.AUG.2010 13:42:44

#### DH3 Dwell Time Plot on Channel 78 / 2480 MHz

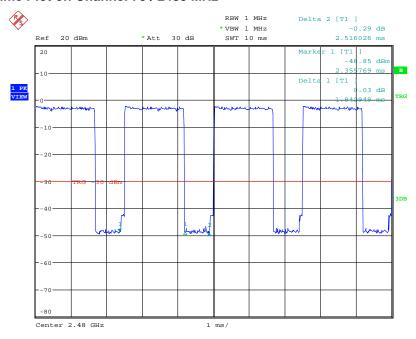


Date: 10.AUG.2010 13:44:36

 SPORTON International Inc.
 Page No. : 26 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

#### DH1 Dwell Time Plot on Channel 78 / 2480 MHz

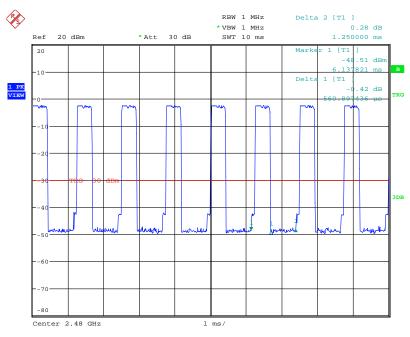

Date: 10.AUG.2010 13:46:14

 SPORTON International Inc.
 Page No. : 27 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

## 3.6 Radiated Emissions Measurement

#### 3.6.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Report No.: FR9O0124-02

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

# 3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

 SPORTON International Inc.
 Page No.
 : 28 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

#### 3.6.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

Report No.: FR900124-02

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

 SPORTON International Inc.
 Page No.
 : 29 of 49


 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02


## Report No.: FR9O0124-02

#### 3.6.4 Test Setup Layout

#### For radiated emissions below 30MHz

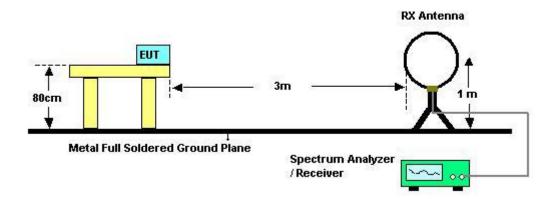

#### For radiated emissions above 30MHz

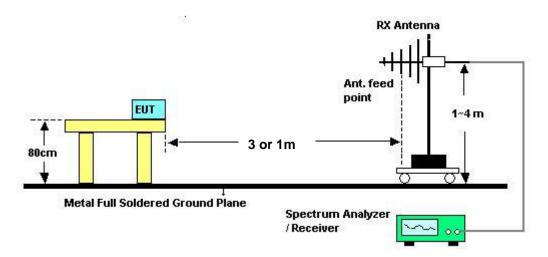

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

#### 3.6.5 Test Deviation

There is no deviation with the original standard.

#### 3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 SPORTON International Inc.
 Page No. : 30 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# 3.6.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	Aug. 25, 2009	Test Site No.	03CH02-HY
Temperature	24.8	Humidity	52.3%
Test Engineer	Eddie		

Report No.: FR9O0124-02

Freq.	Level	Over Limit	Limit Line	Remark
(MHz)	(dBuV)	(dB)	(dBuV)	
-	-	-	-	See Note

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

 SPORTON International Inc.
 Page No. : 31 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010


 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# Report No.: FR9O0124-02

# 3.6.8 Results of Radiated Emissions (30MHz~1GHz)

Final Test Date	Aug. 25, 2009	Test Site No.	03CH02-HY
Temperature	24.8	Humidity	52.3%
Test Engineer	Eddie	Configurations	Channel 39

#### Horizontal

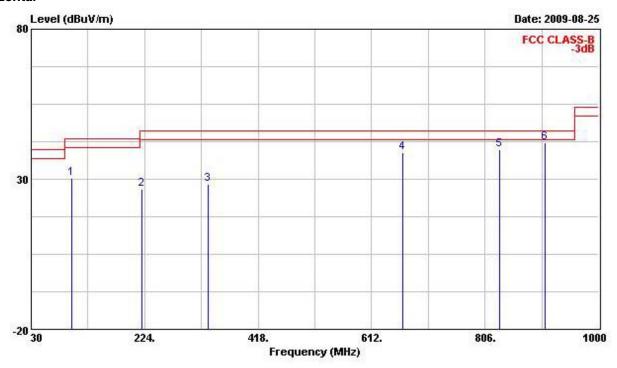


			Level	Limit	Limit Line dBuV/m	ReadAntenna		Cable	Preamp	Ant	Table	
							Factor dB/m	Loss	Factor dB	Pos	Pos deg	Remark
	97											
1		98.870	30.49	-13.01	43.50	48.26	11.01	2.02	30.80			Peak
2		219.150	26.87	-19.13	46.00	42.50	11.98	2.94	30.56			Peak
3		331.670	28.39	-17.61	46.00	40.96	14.20	3.57	30.34			Peak
4		665.350	38.75	-7.25	46.00	43.64	19.31	5.14	29.34			Peak
5		831.220	39.86	-6.14	46.00	43.05	20.19	5.52	28.91			Peak
6 @		908.820	42.30	-3.70	46.00	44.75	20.25	5.96	28.67			Peak

 SPORTON International Inc.
 Page No. : 32 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

#### Vertical

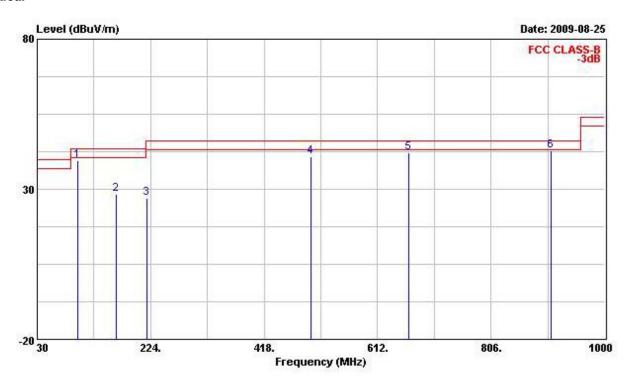

				Over	Limit	Readi	Intenna	Cable	Preamp	Ant	Table	
		Freq	Level		Line dBuV/m		Factor  dB/m			Pos		Remark
	92	MHz										
1		98.870	39.66	-3.84	43.50	57.43	11.01	2.02	30.80			Peak
2 3		164.830	28.23	-15.27	43.50	45.99	10.34	2.57	30.67			Peak
3		218.180	27.01	-18.99	46.00	42.68	11.95	2.94	30.56			Peak
4		497.540	40.97	-5.03	46.00	49.38	17.24	4.26	29.91			Peak
5		665.350	42.05	-3.95	46.00	46.94	19.31	5.14	29.34	9		Peak
6 0		908.820	42.94	-3.06	46.00	45.39	20.25	5.96	28.67	-		Peak

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level  $(dBuV/m) = 20 \log Emission level (uV/m)$ .

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 SPORTON International Inc.
 Page No. : 33 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010


 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# Report No.: FR9O0124-02

# 3.6.9 Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Final Test Date	Aug. 25, 2009	Test Site No.	03CH02-HY
Temperature	24.8	Humidity	52.3%
Test Engineer	Eddie	Configurations	Channel 0

#### Horizontal

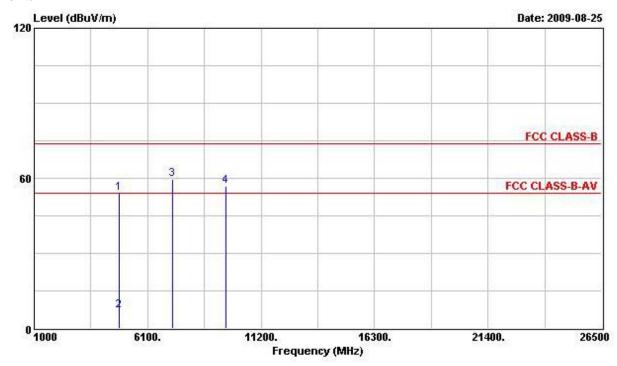

	Freq	Level	Over Limit	0.0000		Antenna Factor		Preamp Factor	Ant Pos		Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	₫В	dB -	cm	deg	
1	4804.000	54.09	-19.91	74.00	48.33	35.73	4.58	34.55			PEAK
2	4804.000	7.06	-46.94	54.00	1.29	35.73	4.58	34.55	100000	8555	Average
3	7200.000	59.68			50.50	37.84	5.62	34.29			PEAK
4	9608.000	56.86			45.83	39.32	6.34	34.64			PEAK


Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.7.7).

 SPORTON International Inc.
 Page No. : 34 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

#### Vertical

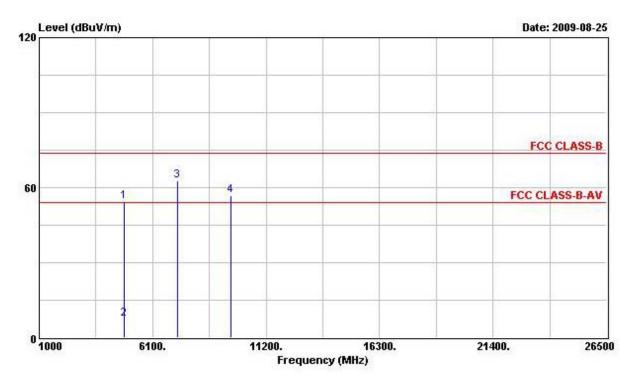

	Freq	Level		Limit Line		Antenna Factor		Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB -	cm	deg	
1	4804.000	54.51	-19.49	74.00	49.37	35.11	4.58	34.55			PEAK
2	4804.000	7.38	-46.62	54.00	2.24	35.11	4.58	34.55			Average
3	7204.000	62.84			54.62	36.88	5.62	34.29			PEAK
4	9608.000	56.91			46.69	38.52	6.34	34.64			PEAK

Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.7.7).


 SPORTON International Inc.
 Page No. : 35 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

Final Test Date	Aug. 25, 2009	Test Site No.	03CH02-HY
Temperature	24.8	Humidity	52.3%
Test Engineer	Eddie	Configurations	Channel 39

#### Horizontal

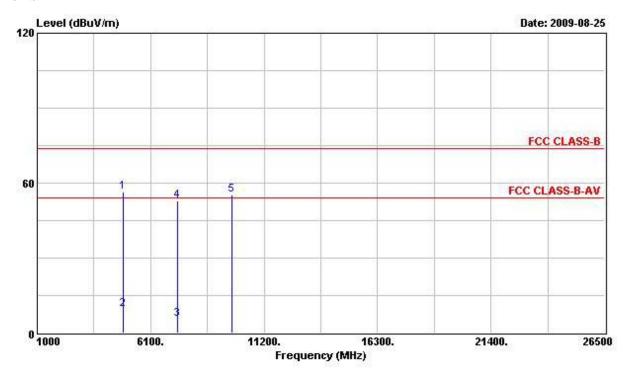

		Freq	Level	Over Limit	0.0000		Intenna Factor		Preamp Factor	Ant Pos	Table Pos	Remark
	<u> </u>	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB ·	cm	deg	
1	4884	1.000	56.57	-17.43	74.00	50.54	35.83	4.64	34.45	1000		PEAK
2	4884	1.000	9.54	-44.46	54.00	3.51	35.83	4.64	34.45	127,000	865 546	Average
3	7323	3.000	5.63	-48.37	54.00	-3.58	37.87	5.64	34.29			Average
4	7323	3.000	52.76	-21.24	74.00	43.55	37.87	5.64	34.29			PEAK
5	9762	2.000	55.24			43.94	39.51	6.36	34.57	1000		PEAK


Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.7.7).

 SPORTON International Inc.
 Page No. : 36 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

#### Vertical

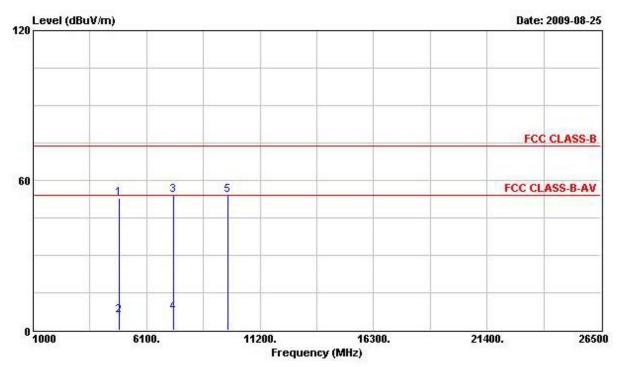

		Freq	Level		Limit Line		Antenna Factor		Preamp Factor	Ant Pos	Table Pos	Remark
	9	MKz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1		4884.000	53.02	-20.98	74.00	47.65	35.18	4.64	34.45			PEAK
2		4884.000	5.89	-48.11	54.00	0.52	35.18	4.64	34.45			Average
3		7323.000	54.13	-19.87	74.00	45.85	36.93	5.64	34.29			PEAK
4		7323.000	7.00	-47.00	54.00	-1.28	36.93	5.64	34.29			Average
5		9764.000	53.93			43.40	38.73	6.36	34.57			PEAK

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.7.7).


 SPORTON International Inc.
 Page No.
 : 37 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

Final Test Date	Aug. 25, 2009	Test Site No.	03CH02-HY
Temperature	24.8	Humidity	52.3%
Test Engineer	Eddie	Configurations	Channel 78

#### Horizontal

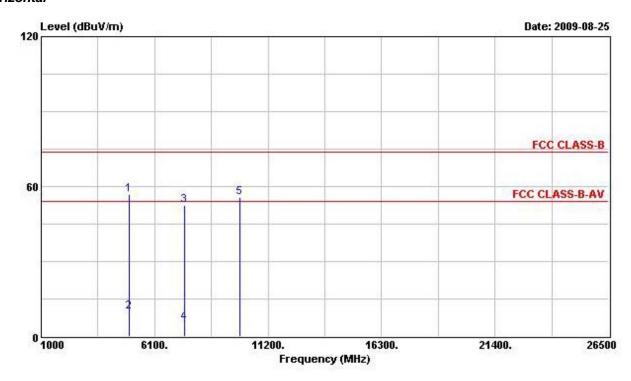

	Fre	I Level	Over Limit			Antenna Factor		Preamp Factor	Ant Pos	Table Pos	Remark
	мн	z dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	4964.00	0 56.98	-17.02	74.00	50.67	35.95	4.71	34.35	8444		PEAK
2	4964.00	0 9.85	-44.15	54.00	3.54	35.95	4.71	34.35	80000		Average
3	7441.00	0 52.56	-21.44	74.00	43.32	37.89	5.65	34.29			PEAK
4	7441.00	0 5.43	-48.57	54.00	-3.82	37.89	5.65	34.29			Average
5	9920.00	0 55.70			44.10	39.72	6.39	34.51	8444		PEAK


Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.7.7).

 SPORTON International Inc.
 Page No. : 38 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

#### Vertical

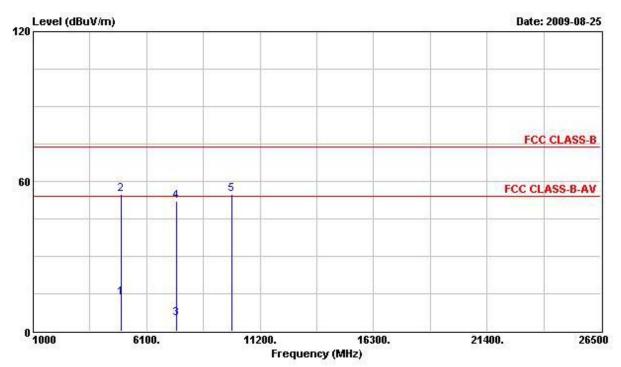

			Level	Over Limit	Limit Line		Antenna Factor		Preamp Factor	Ant Pos		Remark
	2	No.				- ID - W				1000	114170	
		MHZ	dBuV/m	ав	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1		4960.000	13.47	-40.53	54.00	7.85	35.27	4.71	34.35			Average
2		4960.000	54.98	-19.02	74.00	49.36	35.27	4.71	34.35	\$ <del>7.000.00</del>	(5000)	PEAK
3		7440.000	5.02	-48.98	54.00	-3.32	36.98	5.65	34.29			Average
4		7440.000	52.15	-21.85	74.00	43.81	36.98	5.65	34.29			PEAK
5		9912.000	55.02			44.25	38.90	6.39	34.52			PEAK

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.7.7).

The amplitude of spurious emissions, which are attenuated by more than 20dB below, the permissible value has no need to be reported.

Emission level  $(dBuV/m) = 20 \log Emission level (uV/m)$ .

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 SPORTON International Inc.
 Page No. : 39 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# 3.7 Band Edge and Fundamental Emissions Measurement

#### 3.7.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Report No.: FR9O0124-02

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.7.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz/1MHz for Peak

#### 3.7.3 Test Procedures

- 1. The test procedure is the same as section 3.5.3, only the frequency range investigated is limited to 100MHz around band edges.
- 2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### 3.7.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.6.4.

#### 3.7.5 Test Deviation

There is no deviation with the original standard.

#### 3.7.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

 SPORTON International Inc.
 Page No. : 40 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# 3.7.7 Test Result of Band Edge and Fundamental Emissions

Final Test Date	Aug. 25, 2009	Test Site No.	03CH02-HY
Temperature	24.8	Humidity	52.3%
Test Engineer	Eddie	Configurations	Channel 0, 39, 78

Report No.: FR9O0124-02

# 1Mbps

#### Channel 0

			Over	Limit	Readi	Antenna	Cable	Preamp	Ant	Table	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Remark
	MKz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB -	cm	deg	1-
1	2327.100	61.62	-12.38	74.00	27.15	31.51	2.96	0.00			Peak
2 @	2402.340	104.77			69.96	31.79	3.02	0.00			Peak
1	2340.020	47.97	-6.03	54.00	13.43	31.58	2.96	0.00			Average
2 @	2401.770	81.01			46.20	31.79	3.02	0.00			Average

The item 2 is Fundamental Emissions.

# **Channel 39**

	Freq	Level				Antenna Factor		and the second second second	Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm.	deg	
1 0	2441.100 2441.100					31.99 31.99	3.05 3.05				Peak Average

The item 1 is Fundamental Emissions.

#### **Channel 78**

	Freq	Level	Over Limit			Antenna Factor			Ant	Table Pos	Remark
	Mc	dBuV/m	dВ	dBuV/m	dBuV	dB/m	- В		cm	deg	
10	2480.050	102.76			67.55	32.13	3.08	0.00			Peak
2	2483.500	69.65	-4.35	74.00	34.44	32.13	3.08	0.00			Peak
1 @	2480.050	79.90	3		44.69	32.13	3.08	0.00			Average
2	2483.500	37.26	-16.74	54.00	2.05	32.13	3.08	0.00			Average

The item 1 is Fundamental Emissions.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 SPORTON International Inc.
 Page No.
 : 41 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# 2Mbps

#### Channel 0

	Freq	Level	Over Limit			Intenna Factor		Preamp Factor	Ant Pos		Remark
	MKz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB -	CIN.	deg	1
1	2341.730	61.62	-12.38	74.00	27.08	31.58	2.96	0.00			Peak
2 @	2401.770	102.77			67.96	31.79	3.02	0.00			Peak
1	2338.500	47.96	-6.04	54.00	13.42	31.58	2.96	0.00			Average
2 @	2401.770	79.23			44.42	31.79	3.02	0.00			Average

The item 2 is Fundamental Emissions.

#### Channel 39

	Freq	Level		Limit Line					Pos	Table Pos	Remark
	MKz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 0	2440.530	101.82			66.78	31.99	3.05	0.00			Peak
1 @	2441.100	78.68			43.64	31.99	3.05	0.00			Average

The item 1 is Fundamental Emissions.

# Channel 78

	Freq	Level	Over Limit	11.5000000000000		Antenna Factor		Preamp Factor	Ant Pos	Table Pos	Remark
	MX	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 0	2479.860	100.17			64.96	32.13	3.08	0.00			Peak
2	2483.500	69.36	-4.64	74.00	34.15	32.13	3.08	0.00			Peak
1 @	2480.050	77.71			42.50	32.13	3.08	0.00			Average
2	2483.500	38.52	-15.48	54.00	3.31	32.13	3.08	0.00			Average

The item 1 is Fundamental Emissions.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 SPORTON International Inc.
 Page No.
 : 42 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# 3Mbps

#### Channel 0

Freq		Over	Limit	Readi	Antenna	Cable	Preamp	Ant	Table	
	Freq Le	eq Level	el Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB -	cm	deg	
2312.090	60.90	-13.10	74.00	26.50	31.44	2.96	0.00			Peak
2401.770	101.60			66.79	31.79	3.02	0.00			Peak
2389.610	48.00	-6.00	54.00	13.19	31.79	3.02	0.00			Average
2401.770	78.53			43.72	31.79	3.02	0.00			Average
	MHz 2312.090 2401.770 2389.610	MHz dBuV/m 2312.090 60.90 2401.770 101.60 2389.610 48.00	MHz dBuV/m dB  2312.090 60.90 -13.10 2401.770 101.60	### Hevel Limit Line    MHz   dBuV/m   dB   dBuV/m	### Freq Level Limit Line Level    MHz dBuV/m	### Freq Level Limit Line Level Factor    MHz   dBuV/m   dB   dBuV/m   dBuV   dB/m	### Freq Level Limit Line Level Factor Loss   MHz   dBuV/m   dB   dBuV/m   dBuV   dB/m   dB	### Freq Level Limit Line Level Factor Loss Factor    MHz dBuV/m   dB dBuV/m   dBuV   dB/m   dB   dB	Freq Level Limit Line Level Factor Loss Factor Pos  MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm  2312.090 60.90 -13.10 74.00 26.50 31.44 2.96 0.00 2401.770 101.60 66.79 31.79 3.02 0.00 2389.610 48.00 -6.00 54.00 13.19 31.79 3.02 0.00	Freq Level Limit Line Level Factor Loss Factor Pos Pos  MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg  2312.090 60.90 -13.10 74.00 26.50 31.44 2.96 0.00  2401.770 101.60 66.79 31.79 3.02 0.00  2389.610 48.00 -6.00 54.00 13.19 31.79 3.02 0.00

The item 2 is Fundamental Emissions.

#### Channel 39

	Freq	Level				Antenna Factor			Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	ф	dB -	cm	deg	
1 0	2441.100	100.83			65.79	31.99	3.05	0.00			Peak
1 @	2441.100	77.81			42.77	31.99	3.05	0.00	(		Average

The item 1 is Fundamental Emissions.

# Channel 78

	Freq		Level	Over Limit			Antenna Factor		Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB -	cm	deg		
1 0	2480.050	99.62			64.41	32.13	3.08	0.00			Peak	
2	2483.500	69.09	-4.91	74.00	33.88	32.13	3.08	0.00	2777	1000	Peak	
1 0	2480.050	77.23			42.02	32.13	3.08	0.00			Average	
2	2483.500	38.94	-15.06	54.00	3.73	32.13	3.08	0.00			Average	

The item 1 is Fundamental Emissions.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

 SPORTON International Inc.
 Page No.
 : 43 of 49


 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

#### For Emission not in Restricted Band


Final Test Date	Aug. 10, 2010	Test Site No.	TH01-HY
Temperature	24	Humidity	61%
Test Engineer	lan	Configurations	8DPSK

# Low Band Edge Plot on Channel 0 / 2402 MHz

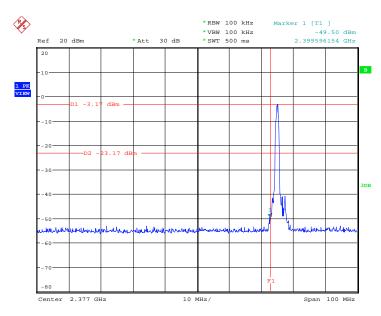

Date: 10.AUG.2010 22:59:44

# High Band Edge Plot on Channel 78 / 2480 MHz

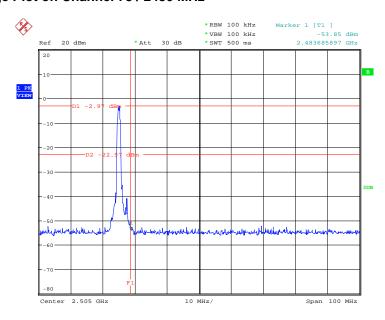

Date: 10.AUG.2010 22:57:39

 SPORTON International Inc.
 Page No.
 : 44 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

FCC RADIO TEST REPORT

3.8 Antenna Requirements

3.8.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: FR900124-02

3.8.2 Antenna Connector Construction

Please refer to section 2.2 in this test report; antenna connector complied with the requirements.

 SPORTON International Inc.
 Page No. : 45 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# **4 LIST OF MEASURING EQUIPMENTS**

# Original

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Sep. 01, 2009	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Mar. 18, 2009	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Feb. 24, 2009	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010001	9kHz – 30MHz	May 05, 2009	Conduction (CO01-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO01-HY)

Report No.: FR9O0124-02

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Horn Antenna	ETS-LINDGREN	3117	00091920	1GHz~18GHz	Oct. 22, 2008	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Nov. 30, 2008	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB020	30 MHz - 1 GHz	Dec. 17, 2008	Radiation (03CH02-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX106	03CH02-HY	1GHz~40GHz	Dec. 17, 2008	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Feb. 04, 2009	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 11, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz – 1.3 GHz	Jul. 07, 2009	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz – 26.5 GHz	Jul. 16, 2009	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

 SPORTON International Inc.
 Page No.
 : 46 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# **Update**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted
						(TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 25, 2010	Conducted
1 Ower Serisor						(TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Apr. 16, 2010	Conducted
DC Power Source						(TH01-HY)
Temp. and Humidity	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 05, 2010	Conducted
Chamber						(TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2009	Conducted
KI CABLE-IIII						(TH01-HY)
DE CARLE 2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2009	Conducted
RF CABLE-2m						(TH01-HY)
Dawer Career	Anritsu	MA2411B	0917017	300MHz~40GHz	Dec. 03, 2009	Conducted
Power Sensor						(TH01-HY)
Dower Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Dec. 03, 2009	Conducted
Power Meter						(TH01-HY)

Report No.: FR9O0124-02

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 26, 2010*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

 SPORTON International Inc.
 Page No. : 47 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02

# **5 TEST LOCATION**

SHIJR	ADD	:	6FI., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C.
	TEL	:	886-2-2696-2468
	FAX	:	886-2-2696-2255
HWA YA	ADD	:	No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
	TEL	:	886-3-327-3456
	FAX	:	886-3-318-0055
LINKOU ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C		No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C	
	TEL	:	886-2-2601-1640
	FAX	:	886-2-2601-1695
DUNGHU	ADD	:	No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C.
	TEL	:	886-2-2631-4739
	FAX	:	886-2-2631-9740
JUNGHE	ADD	:	7FI., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C.
	TEL	:	886-2-8227-2020
	FAX	:	886-2-8227-2626
NEIHU	ADD	:	4FI., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C.
	TEL	:	886-2-2794-8886
	FAX	:	886-2-2794-9777
JHUBEI	ADD	:	No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.
	TEL	:	886-3-656-9065
	FAX	:	886-3-656-9085

Report No.: FR9O0124-02

 SPORTON International Inc.
 Page No.
 : 48 of 49

 TEL: 886-2-2696-2468
 Issued Date
 : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID
 : XSP-ONA-BT-02

# 6 TAF CERTIFICATE OF ACCREDITATION



Certificate No.: L1190-100529

Report No.: FR900124-02

# 財團法人全國認證基金會

Taiwan Accreditation Foundation

# Certificate of Accreditation

This is to certify that

#### Sporton International Inc.

#### **EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

#### is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005

Accreditation Number : 1190

Originally Accredited : December 15, 2003

Effective Period : January 10, 2010 to January 09, 2013

Accredited Scope : Testing Field, see described in the Appendix

Specific Accreditation : Accreditation Program for Designated Testing Laboratory

Program for Commodities Inspection

Accreditation Program for Telecommunication Equipment

Testing Laboratory

Accreditation Program for BSMI Mutual Recognition

Arrangment with Foreign Authorities

Jay-San Chen

President, Taiwan Accreditation Foundation

Date: May 29, 2010

PI, total 23 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix

 SPORTON International Inc.
 Page No. : 49 of 49

 TEL: 886-2-2696-2468
 Issued Date : Aug. 16, 2010

 FAX: 886-2-2696-2255
 FCC ID : XSP-ONA-BT-02



# Annex Declaration for Bluetooth Device acc to Part 15.247



# 1 Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason the check of these RF parameters in one op-mode is sufficient.

# 2 Frequency range of a Bluetooth device:

Hereby we declare that the maximum frequency of this device is: 2402 – 2480 MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E). Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

# 3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organised in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

#### 4 Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode: 40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67, 56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59, 72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75, 09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06, 01, 51, 03, 55, 05, 04



# 5 Equally average use of frequencies in data mode and behaviour for short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection
- 2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD\_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5  $\mu$ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire

LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR- operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour: The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5  $\mu$ s). The hopping sequence will always differ from the first one.

# 6 Receiver input bandwidth and behaviour for repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master.

Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.



#### 7 Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is a follows:

Dwell time = time slot length \* hop rate / number of hopping channels \*30s

Example for a DH1 packet (with a maximum length of one time slot) Dwell time =  $625 \mu s$  \* 1600 1/s / 79 \* 30s = 0.3797s (in a 30s period)

For multislot packet the hopping is reduced according to the length of the packet. Example for a DH5 packet (with a maximum length of five time slots)

Dwell time =  $5 * 625 \mu s$  \* 1600 \* 1/5 \* 1/s / 79 \* 30s = 0.3797s (in a 30s period). This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefor all Bluetooth devices **comply** with the FCC dwell time requirement in data mode. This was checked during the Bluetooth Qualification tests. The Dwell time in hybrid mode is measured and stated in the test report.

#### 8 Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is fcenter = 75 kHz.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

Additionally an example for the channel separation is given in the test report

#### 9 Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see chapter 5), but this time with different input vectors:

- For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.
- For the page hop sequence, the device address of the paged unit is used as input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.

So it is ensured that also in hybrid mode the frequency use equally averaged.

Example of a hopping sequence in inquiry mode: 48, 50, 09, 13, 52, 54,41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23



Example of a hopping sequence in paging mode: 08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

#### 10 Receiver input bandwidth and synchronisation in hybrid mode:

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code, the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, an special access code, derived from the BD\_ADDRESS of the paged device will be, will be sent by the master of this connection.

Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced considerable.

# 11 Spread rate / data rate of the direct sequence signal

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate

/ Data rate will be 68/1.

# 12 Spurious emission in hybrid mode

The dwell time in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.

# 13 Peak power spectral density measurement

Since the transmitter is only active for some milliseconds on one channel you would get a result with many interruptions if using a sweep time of e.g. 1s as stated in the FCC rules. Therefore a fast sweep in maxhold function is used instead and the EUT is activated several times until the measurement curve has stabilized.