



CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http:// www.sz-ctc.org.cn

TEST REPORT

Report No. - - : CTC20201547E02
FCC ID.....: XUJTSUNG
Applicant - - : LAUNCH TECH CO., LTD
Address - - : Launch Industrial Park, North of Wuhe Avenue, Banxuegang, Bantian, Longgang, Shenzhen, Guangdong, P.R. China
Manufacturer - - : LAUNCH TECH CO., LTD
Address - - : Launch Industrial Park, North of Wuhe Avenue, Banxuegang, Bantian, Longgang, Shenzhen, Guangdong, P.R. China
Product Name : TPMS WAND
Trade Mark.....: LAUNCH
Model/Type reference : X-431 TSGUN
Listed Model(s) - : /
Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of receipt of test sample....: Oct. 13, 2020
Date of testing.....: Oct. 13, 2020 to Nov. 06, 2020
Date of issue.....: Nov. 26, 2020
Result.....: PASS

Compiled by:
(Printed name+signature) Jim Jiang 
Supervised by:
(Printed name+signature) Miller Ma 
Approved by:
(Printed name+signature) Walter Chen 
Testing Laboratory Name.....: CTC Laboratories, Inc.
Address.....: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

	Page
1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY.....	5
1.6. ENVIRONMENTAL CONDITIONS.....	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT.....	7
2.3. ACCESSORY EQUIPMENT INFORMATION	8
2.4. OPERATION STATE	9
2.5. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS	12
3.1. CONDUCTED EMISSION.....	12
3.2. RADIATED EMISSION	15
3.3. BAND EDGE EMISSIONS.....	37
3.4. 20dB BANDWIDTH.....	65
3.5. CHANNEL SEPARATION.....	72
3.6. NUMBER OF HOPPING CHANNEL.....	76
3.7. DWELL TIME	78
3.8. PEAK OUTPUT POWER	83
3.9. ANTENNA REQUIREMENT	87



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS 247 Issue 2](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSs) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Date of issue	Description
01	Nov. 26, 2020	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247)/ RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jim Jiang
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Jim Jiang
Hopping Channel Separation	15.247(a)(1)	RSS 247 5.1 (b)	Pass	Jim Jiang
Dwell Time	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Jim Jiang
Peak Output Power	15.247(b)(1)	RSS 247 5.4 (b)	Pass	Jim Jiang
Number of Hopping Frequency	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Jim Jiang
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS 247 5.5	Pass	Jim Jiang
Radiated Band Edge and Spurious Emissions	15.247(d)&15.209	RSS 247 5.5& RSS-Gen 8.9	Pass	Jim Jiang
99% Occupied Bandwidth & 20dB Bandwidth	15.247(a)	RSS 247 5.1 (b)	Pass	Jim Jiang

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation. Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug. 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21~25°C
Relative Humidity:	40~45%RH
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	LAUNCH TECH CO., LTD
Address:	Launch Industrial Park, North of Wuhe Avenue, Banxuegang, Bantian, Longgang, Shenzhen, Guangdong, P.R. China
Manufacturer:	LAUNCH TECH CO., LTD
Address:	Launch Industrial Park, North of Wuhe Avenue, Banxuegang, Bantian, Longgang, Shenzhen, Guangdong, P.R. China

2.2. General Description of EUT

Product Name:	TPMS WAND
Trade Mark:	LAUNCH
Model/Type reference:	X-431 TSGUN
Listed Model(s):	/
Model Difference:	/
Power supply:	5.0Vdc 1A From AC/DC Adapter 3.63Vdc From 3000mAh Li-ion Battery
Hardware version:	V1.0
Software version:	V1.23
Bluetooth 4.2 + BR/EDR	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	2.0dBi



2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Automotive Diagnosis Tool	X-431 PAD V	/	LAUNCH
RF-SENSOR	LTR-01	/	LAUNCH
Notebook	X220	/	Lenovo
Adapter	A1401	/	Apple

Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	1.5m

Test Software Information			
Name	Software Version	/	/
Bluetooth RF Test Tool	V2017.10.20	/	/



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in grey were the channel selected for testing.

Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.5. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 27, 2020
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Dec. 27, 2020
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 27, 2020
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 27, 2020
5	Power Sensor	Agilent	U2021XA	MY5365004	Dec. 27, 2020
6	Power Sensor	Agilent	U2021XA	MY5365006	Dec. 27, 2020
7	Simultaneous Sampling DAQ	Agilent	U2531A	TW54493510	Dec. 27, 2020
8	Climate Chamber	TABAI	PR-4G	A8708055	Dec. 27, 2020
9	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 27, 2020
10	Climate Chamber	ESPEC	MT3065	/	Dec. 27, 2020
11	300328 v2.1.1 test system	TONSCEND	v2.6	/	/

Radiated Emission and Transmitter spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100658	Dec. 27, 2020
2	High pass filter	micro-tranics	HPM50111	142	Dec. 27, 2020
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Dec. 27, 2020
4	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Dec. 27, 2020
5	Loop Antenna	LAPLAC	RF300	9138	Dec. 27, 2020
6	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 27, 2020
7	Horn Antenna	Schwarzbeck	BBHA 9120D	647	Dec. 27, 2020
8	Pre-Amplifier	HP	8447D	1937A03050	Dec. 27, 2020
9	Pre-Amplifier	EMCI	EMC051835	980075	Dec. 27, 2020
10	Antenna Mast	UC	UC3000	N/A	N/A
11	Turn Table	UC	UC3000	N/A	N/A
12	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Dec. 27, 2020
13	Cable Above 1GHz	Hubersuhner	SUCOFLEX 102	DA1580	Dec. 27, 2020
14	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 27, 2020
15	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	Dec. 27, 2020
16	RF Connection Cable	Chengdu E-Microwave	---	---	Dec. 27, 2020

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



17	High pass filter	Compliance Direction systems	BSU-6	34202	Dec. 27, 2020
18	Attenuator	Chengdu E-Microwave	EMCAXX-10 RNZ-3	---	Dec. 27, 2020
19	High and low temperature box	ESPEC	MT3065	12114019	Dec. 27, 2020

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 27, 2020
2	LISN	R&S	ENV216	101113	Dec. 27, 2020
3	EMI Test Receiver	R&S	ESCI	100658	Dec. 27, 2020

Note: 1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS – Gen 8.8

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

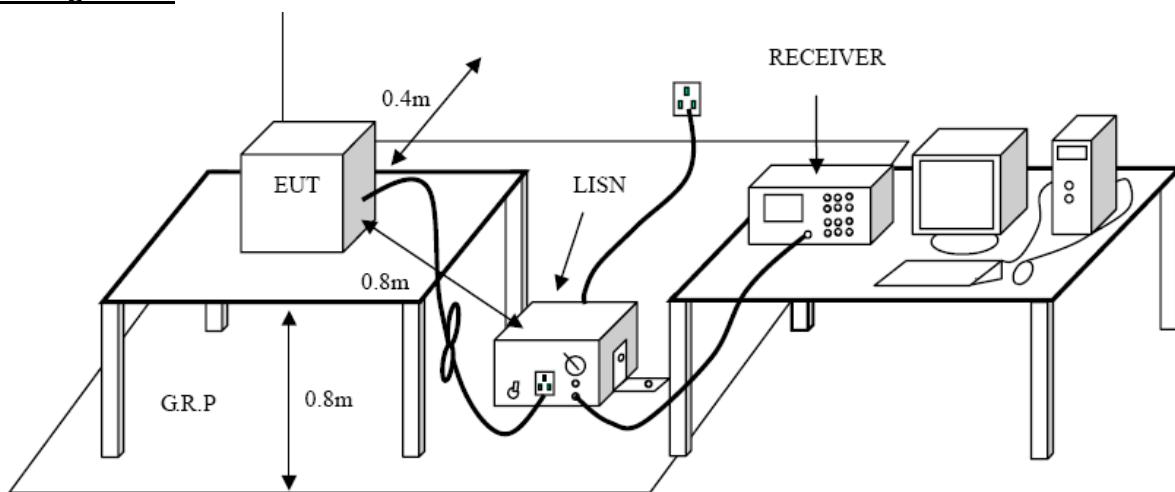

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode:

Please refer to the clause 2.3.

Test Results

CTC Laboratories, Inc.


2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059


Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

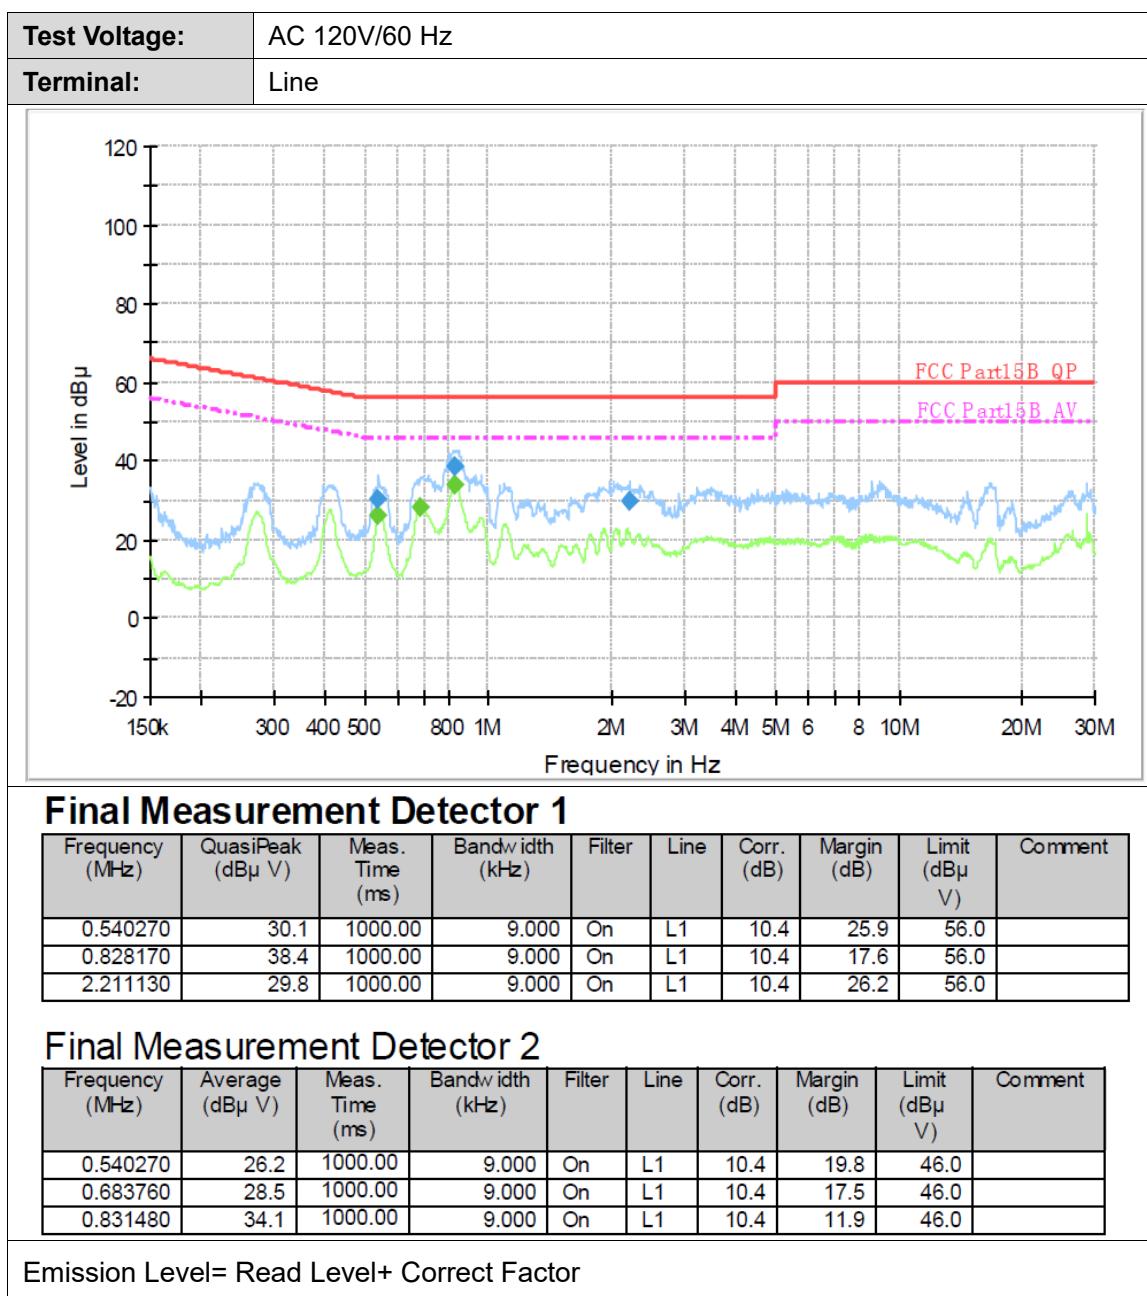

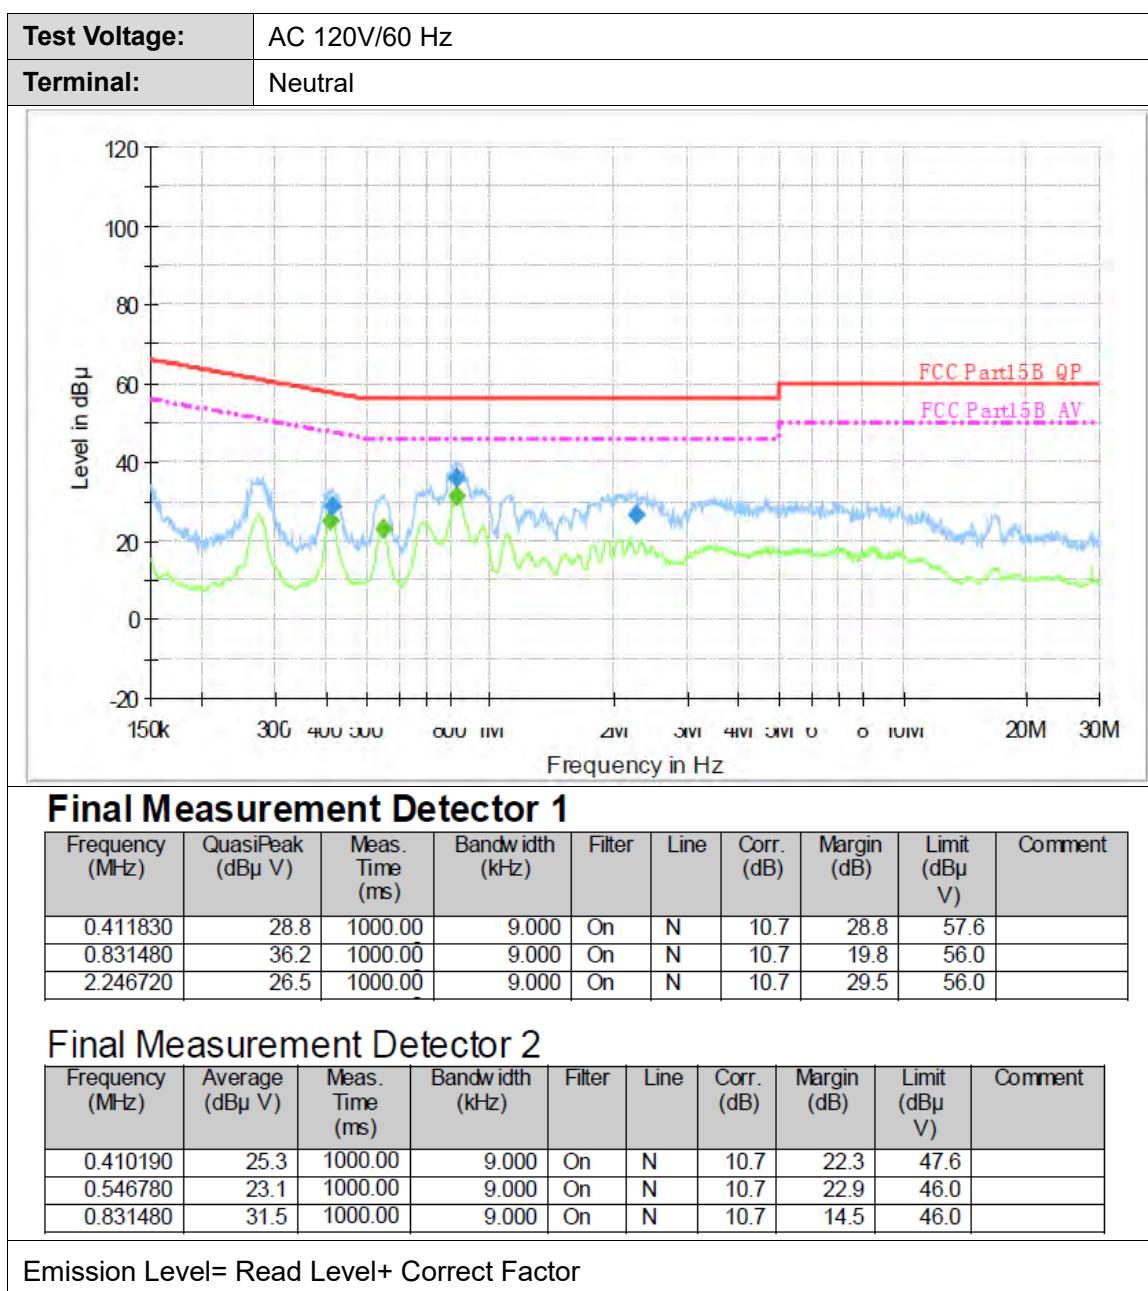

3.2. Radiated Emission

Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9

Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).

Test Configuration

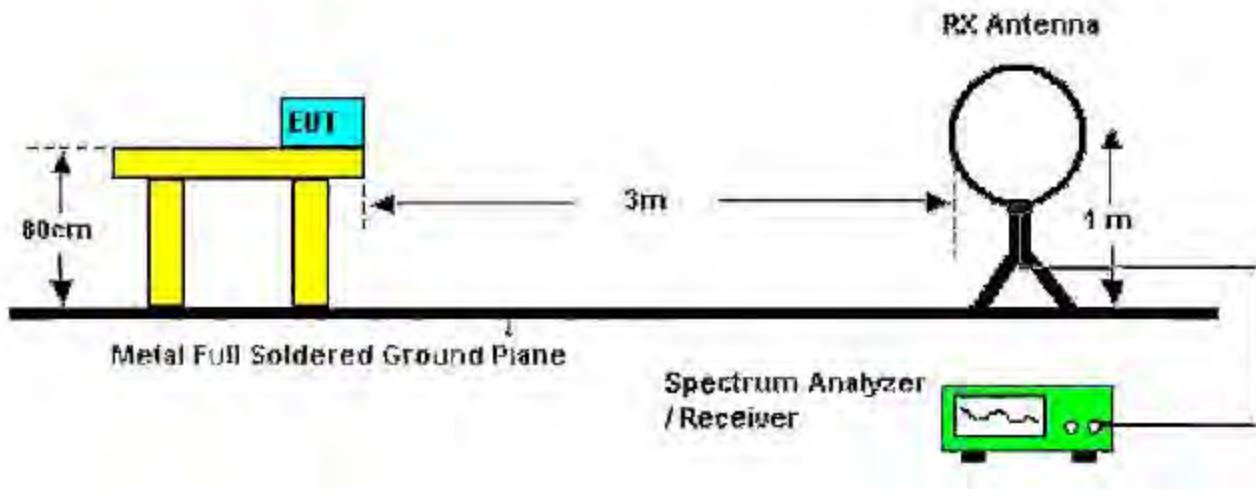

Below 1000MHz Test Setup

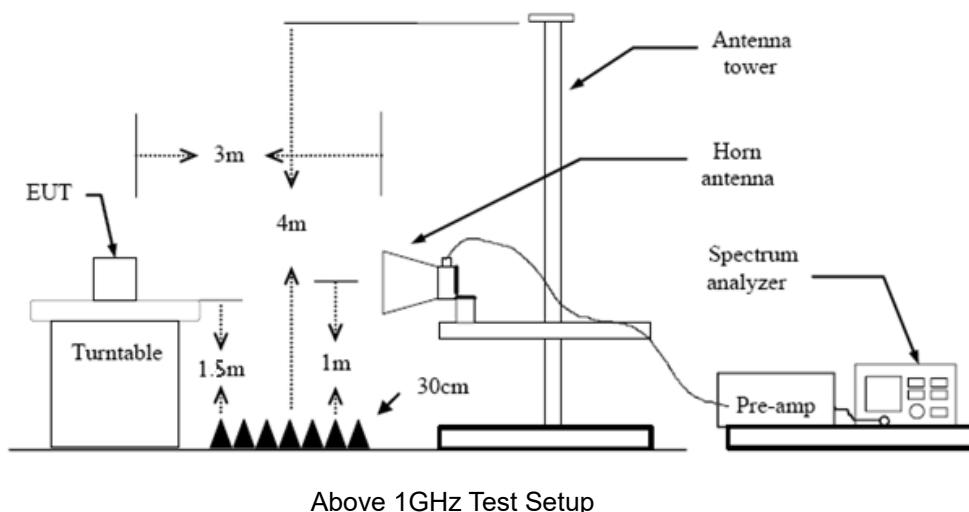

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode

Please refer to the clause 2.3.

Test Result


9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

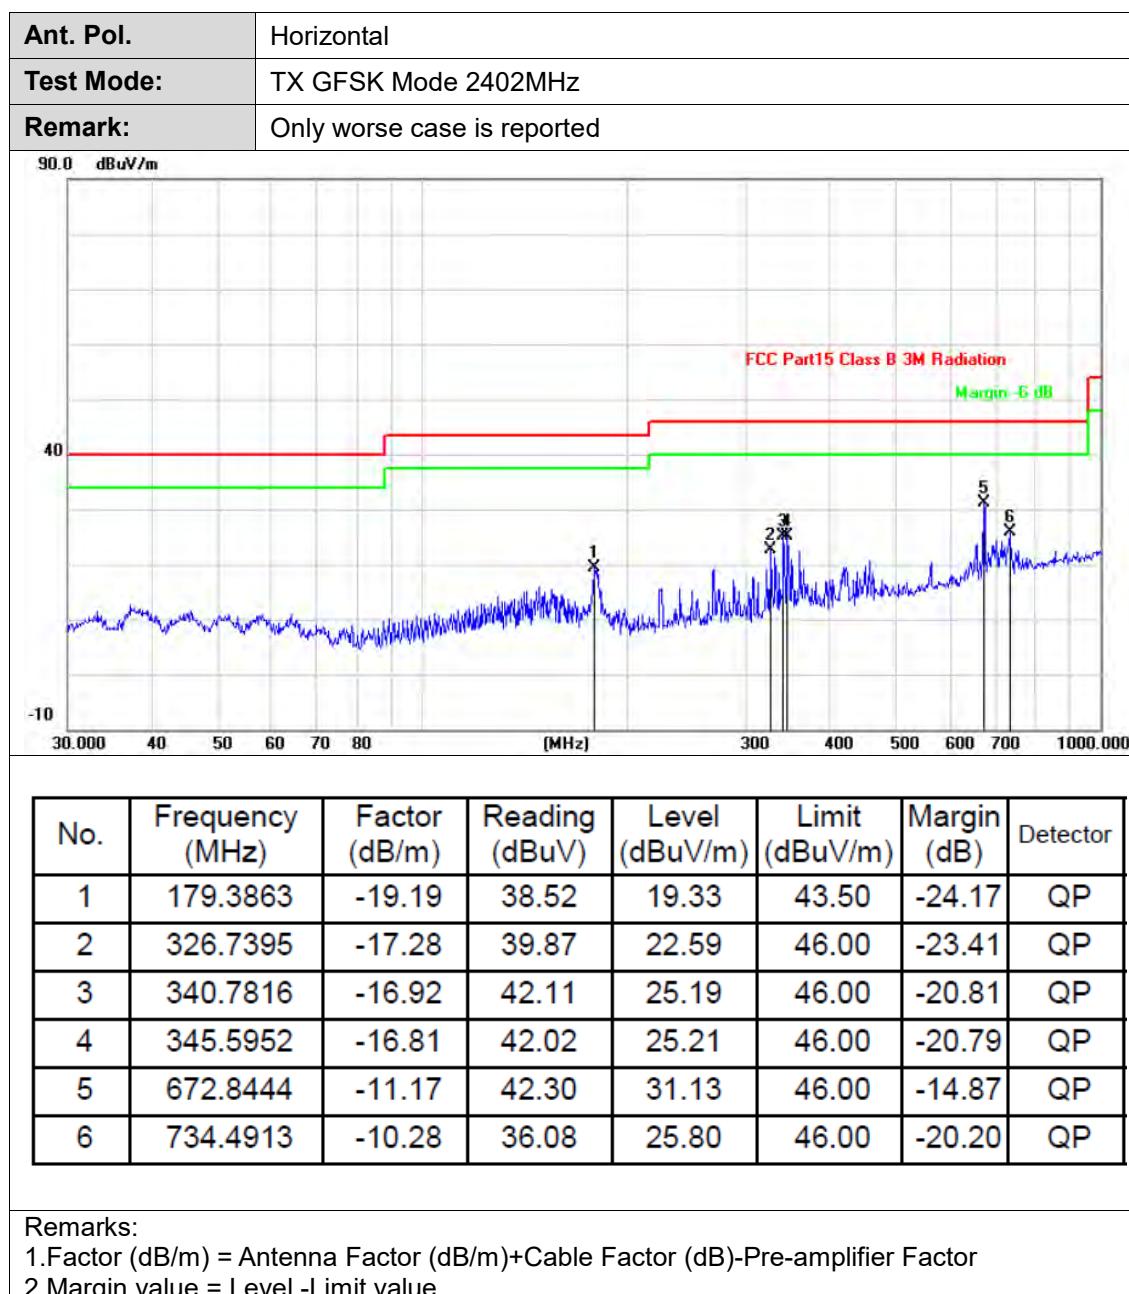





Ant. Pol.	Vertical																																																														
Test Mode:	TX GFSK Mode 2402MHz																																																														
Remark:	Only worse case is reported																																																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Factor (dB/m)</th><th>Reading (dBuV)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>179.3863</td><td>-19.19</td><td>38.27</td><td>19.08</td><td>43.50</td><td>-24.42</td><td>QP</td></tr><tr><td>2</td><td>326.7395</td><td>-17.28</td><td>38.92</td><td>21.64</td><td>46.00</td><td>-24.36</td><td>QP</td></tr><tr><td>3</td><td>340.7816</td><td>-16.92</td><td>38.96</td><td>22.04</td><td>46.00</td><td>-23.96</td><td>QP</td></tr><tr><td>4</td><td>562.6623</td><td>-12.81</td><td>43.40</td><td>30.59</td><td>46.00</td><td>-15.41</td><td>QP</td></tr><tr><td>5</td><td>654.2318</td><td>-11.42</td><td>39.38</td><td>27.96</td><td>46.00</td><td>-18.04</td><td>QP</td></tr><tr><td>6</td><td>672.8444</td><td>-11.17</td><td>46.83</td><td>35.66</td><td>46.00</td><td>-10.34</td><td>QP</td></tr></tbody></table>								No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	179.3863	-19.19	38.27	19.08	43.50	-24.42	QP	2	326.7395	-17.28	38.92	21.64	46.00	-24.36	QP	3	340.7816	-16.92	38.96	22.04	46.00	-23.96	QP	4	562.6623	-12.81	43.40	30.59	46.00	-15.41	QP	5	654.2318	-11.42	39.38	27.96	46.00	-18.04	QP	6	672.8444	-11.17	46.83	35.66	46.00	-10.34	QP
No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																								
1	179.3863	-19.19	38.27	19.08	43.50	-24.42	QP																																																								
2	326.7395	-17.28	38.92	21.64	46.00	-24.36	QP																																																								
3	340.7816	-16.92	38.96	22.04	46.00	-23.96	QP																																																								
4	562.6623	-12.81	43.40	30.59	46.00	-15.41	QP																																																								
5	654.2318	-11.42	39.38	27.96	46.00	-18.04	QP																																																								
6	672.8444	-11.17	46.83	35.66	46.00	-10.34	QP																																																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																																															





Above 1GHz

Ant. Pol.	Horizontal																															
Test Mode:	TX GFSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Factor (dB/m)</th><th>Reading (dBuV)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4804.066</td><td>-2.82</td><td>52.12</td><td>49.30</td><td>74.00</td><td>-24.70</td><td>peak</td></tr><tr><td>2</td><td>4804.312</td><td>-2.82</td><td>37.62</td><td>34.80</td><td>54.00</td><td>-19.20</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4804.066	-2.82	52.12	49.30	74.00	-24.70	peak	2	4804.312	-2.82	37.62	34.80	54.00	-19.20	AVG
No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4804.066	-2.82	52.12	49.30	74.00	-24.70	peak																									
2	4804.312	-2.82	37.62	34.80	54.00	-19.20	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

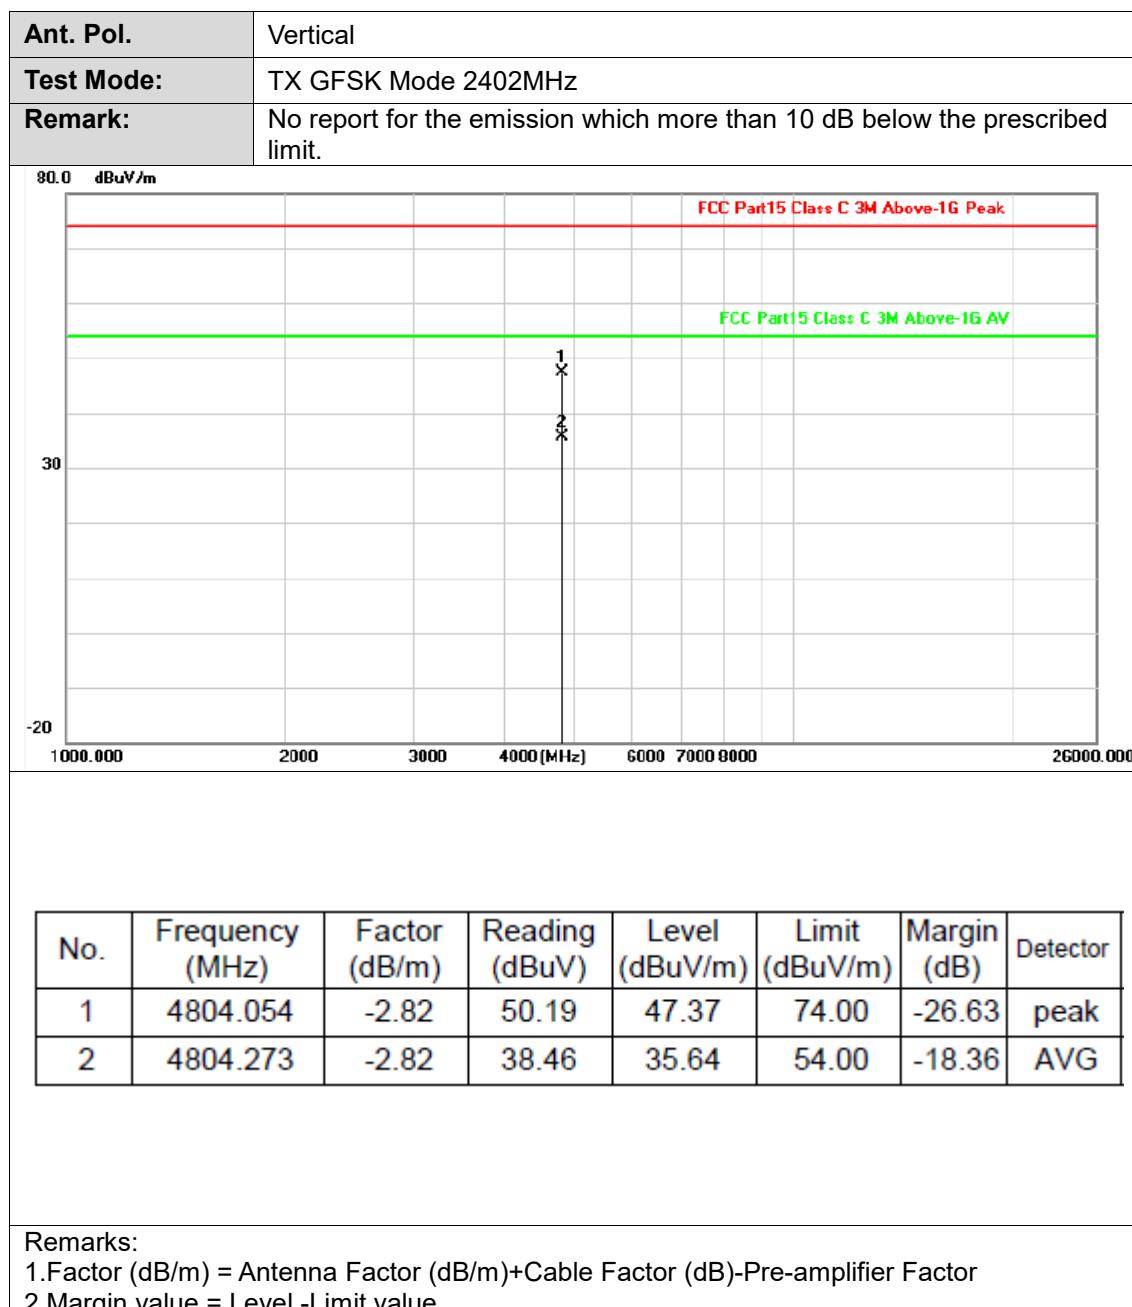

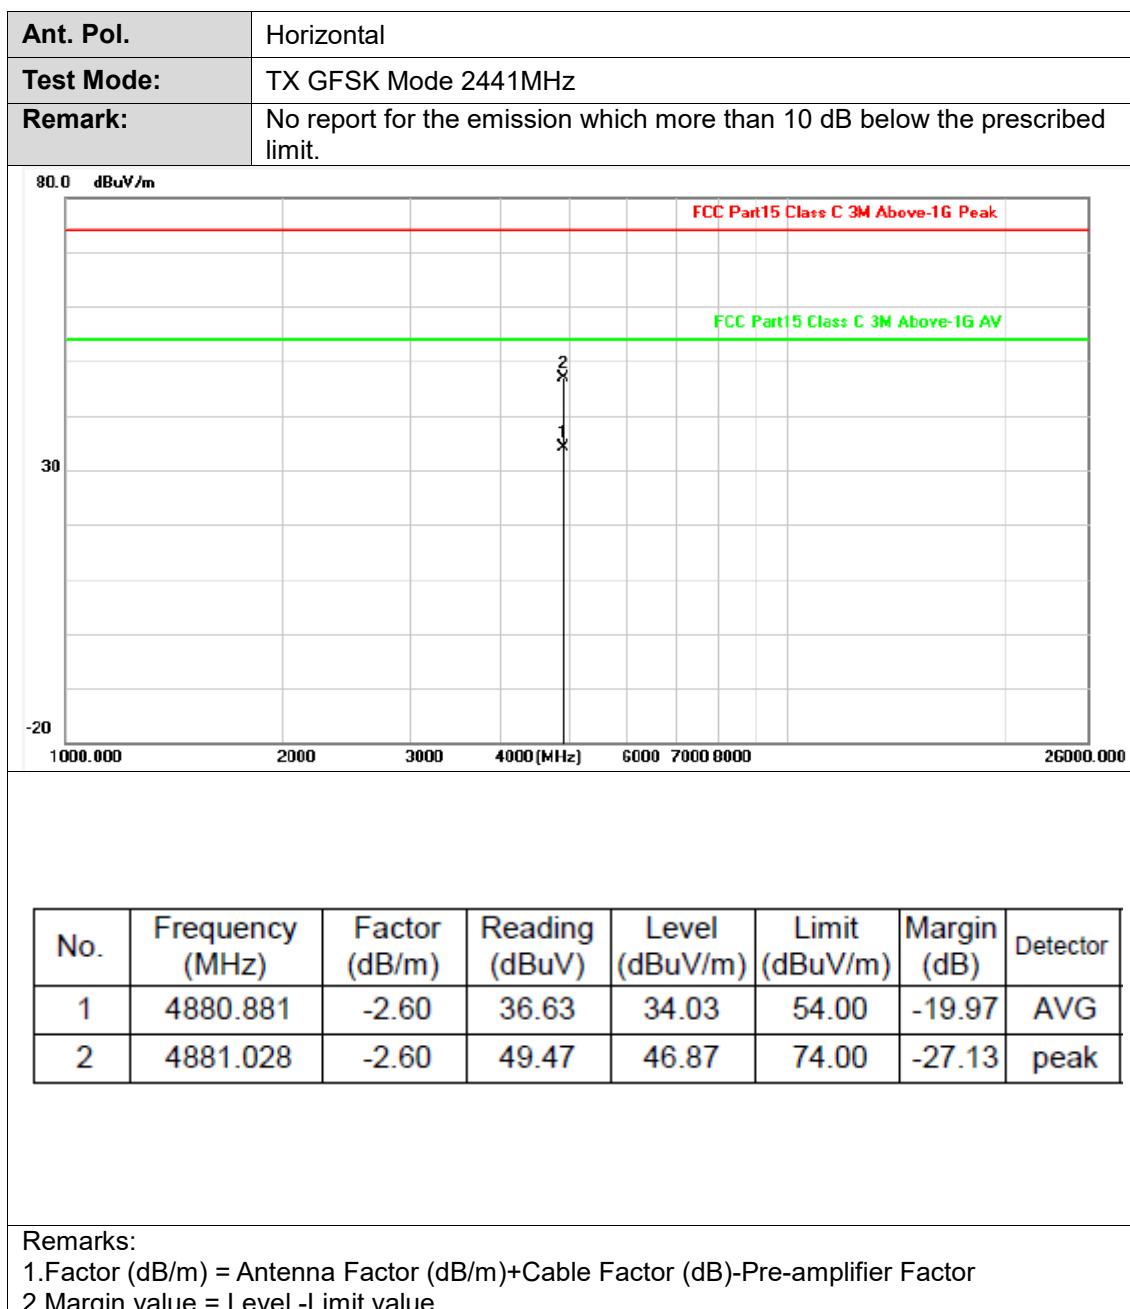


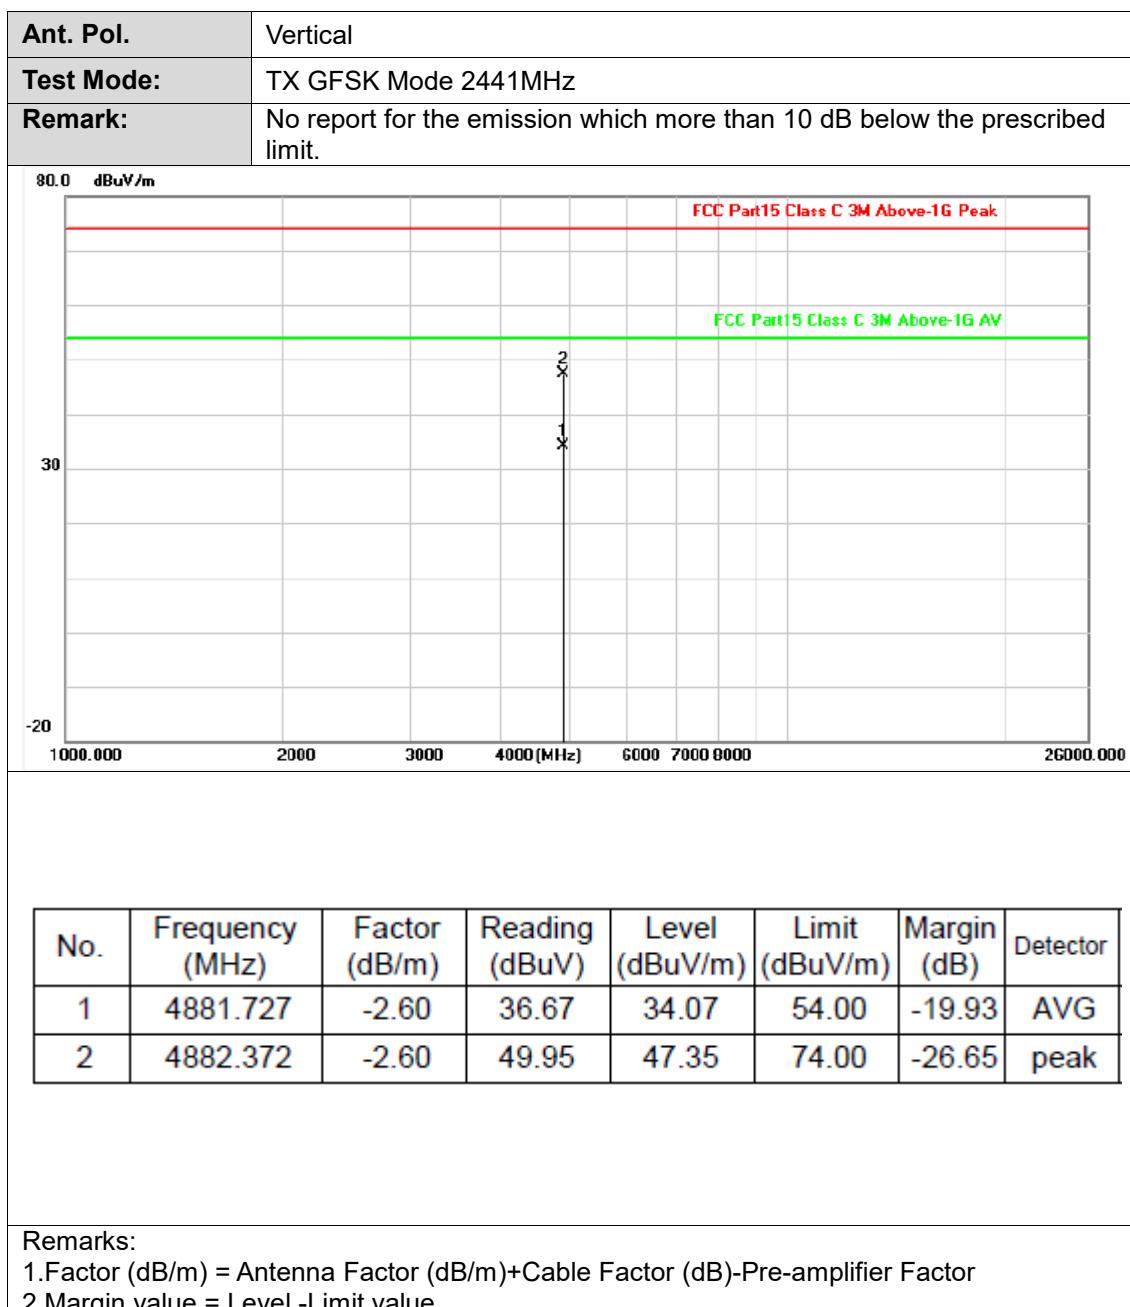


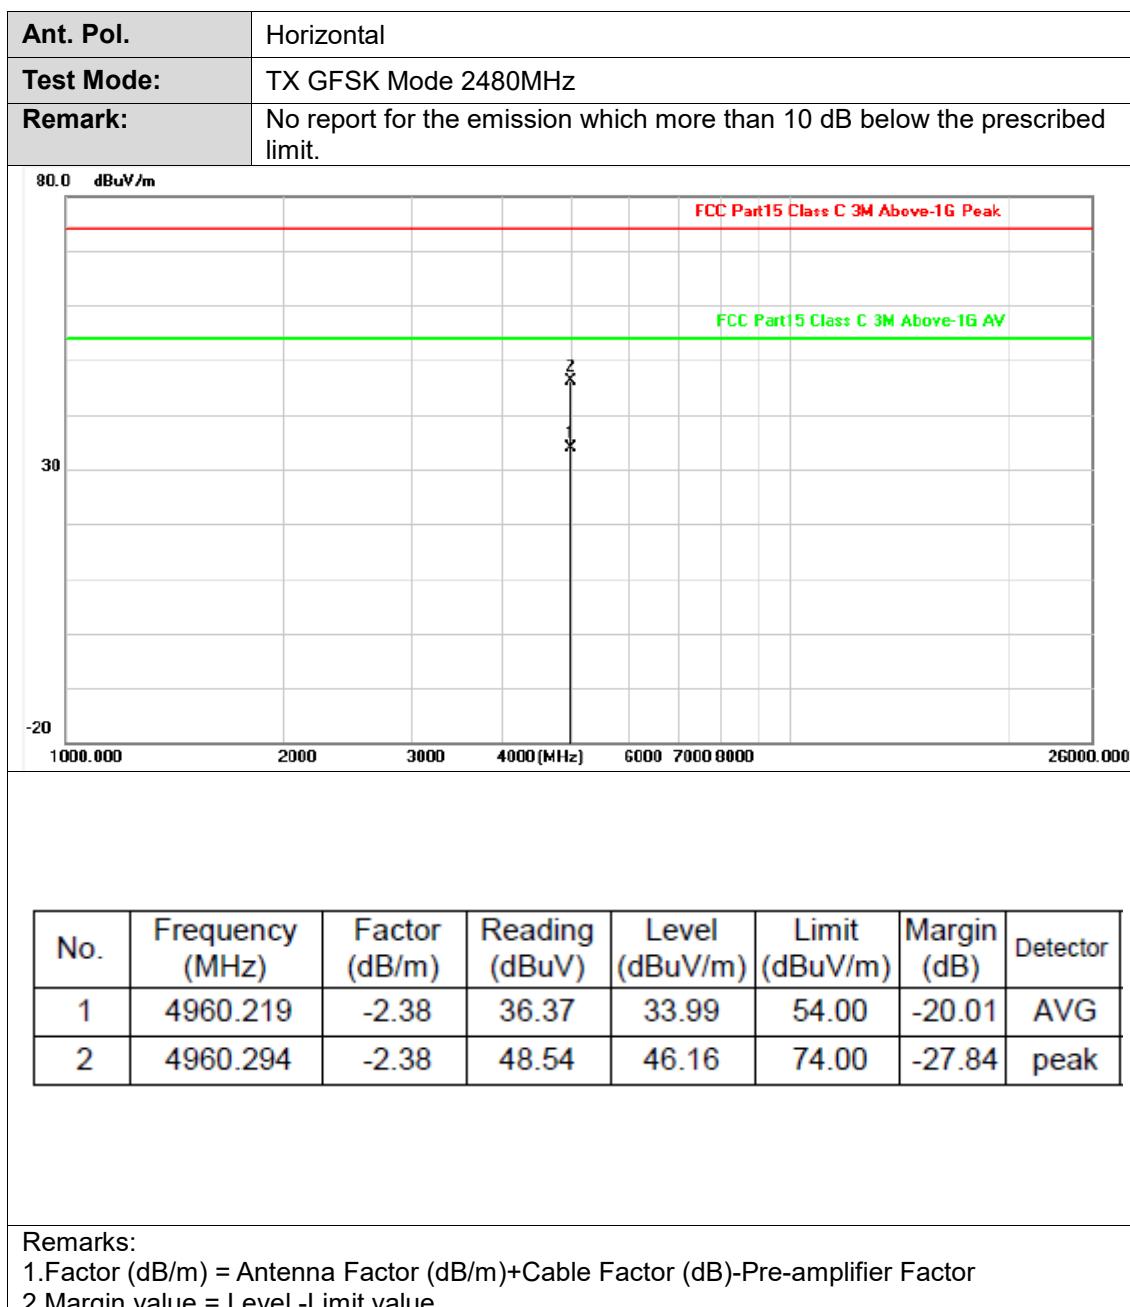






Ant. Pol.	Vertical																														
Test Mode:	TX GFSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Factor (dB/m)</th><th>Reading (dBuV)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4958.620</td><td>-2.38</td><td>49.50</td><td>47.12</td><td>74.00</td><td>-26.88</td><td>peak</td></tr><tr><td>2</td><td>4960.378</td><td>-2.38</td><td>36.51</td><td>34.13</td><td>54.00</td><td>-19.87</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4958.620	-2.38	49.50	47.12	74.00	-26.88	peak	2	4960.378	-2.38	36.51	34.13	54.00	-19.87	AVG
No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4958.620	-2.38	49.50	47.12	74.00	-26.88	peak																								
2	4960.378	-2.38	36.51	34.13	54.00	-19.87	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															

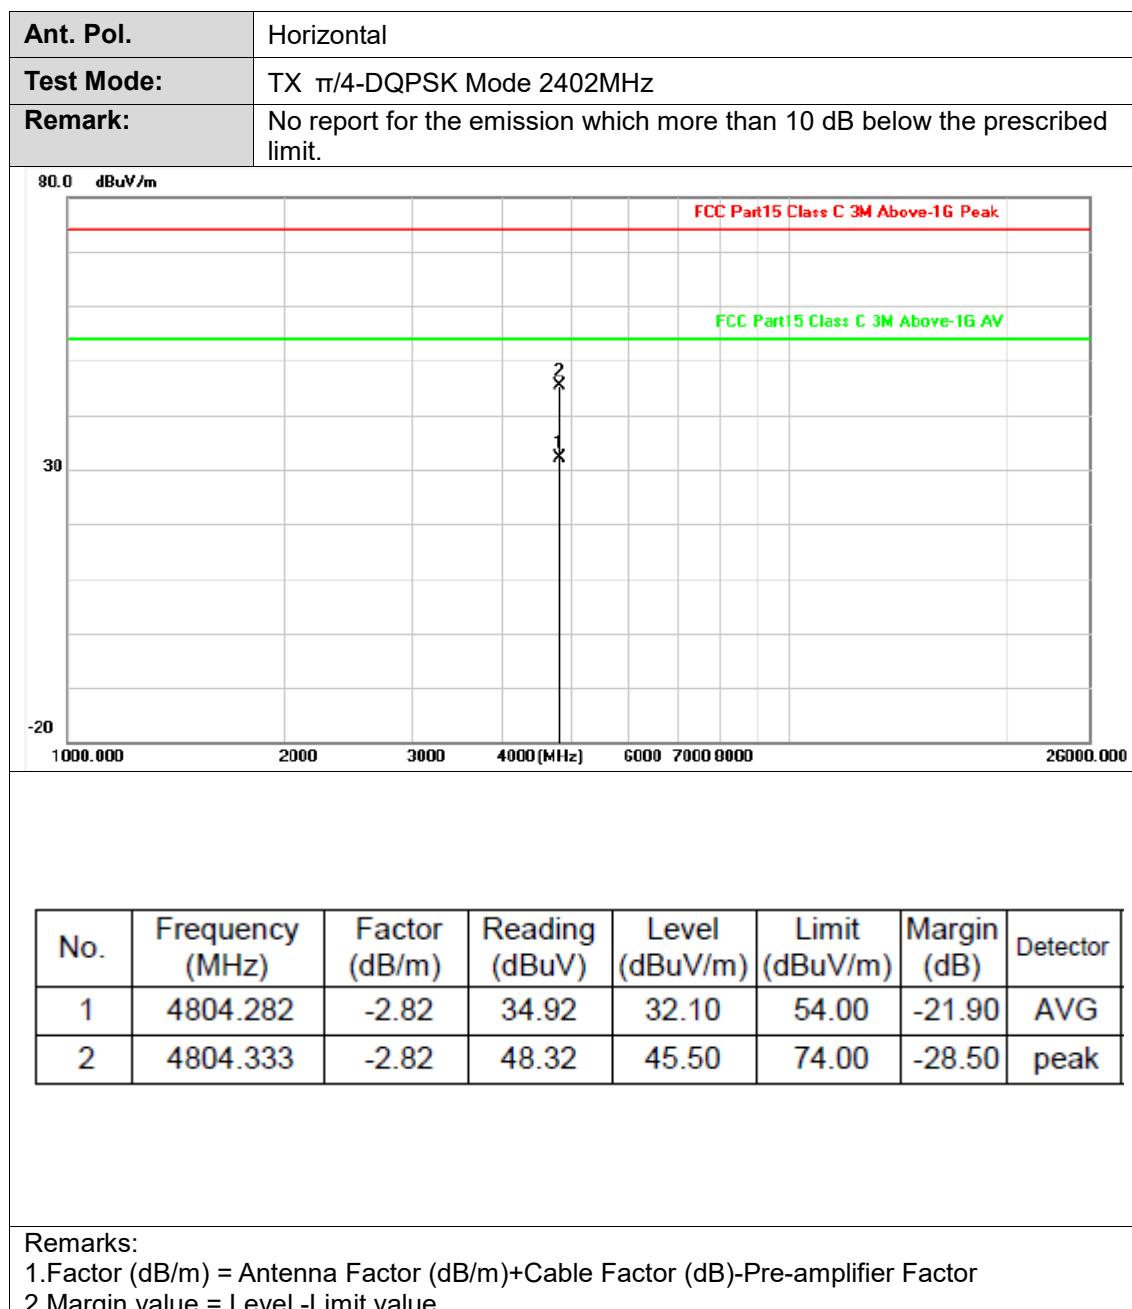


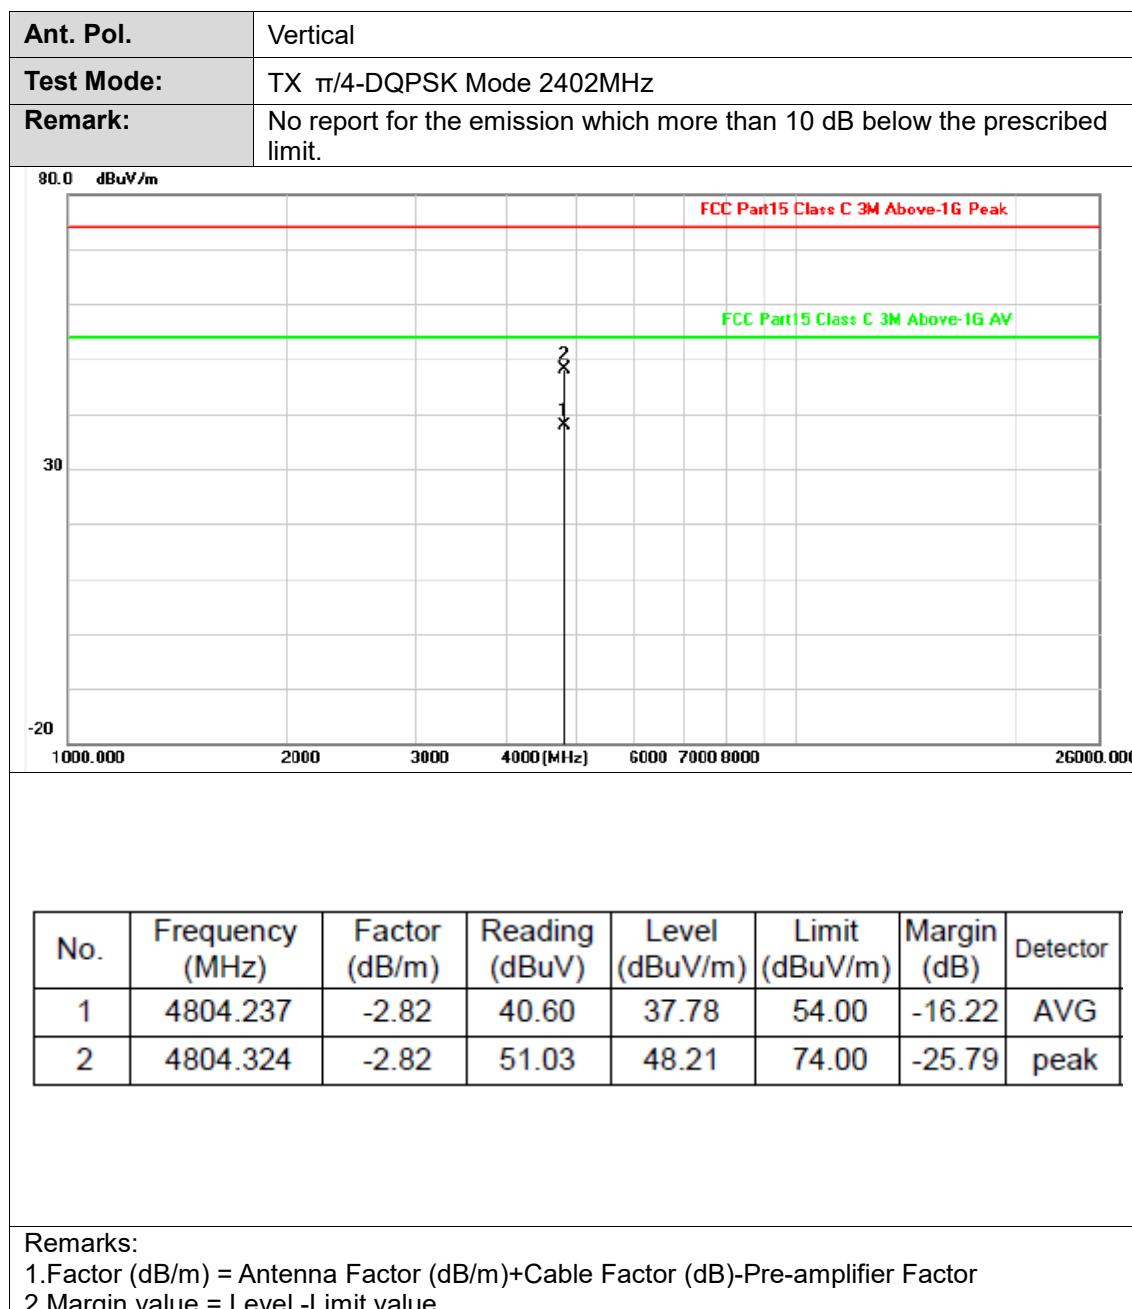

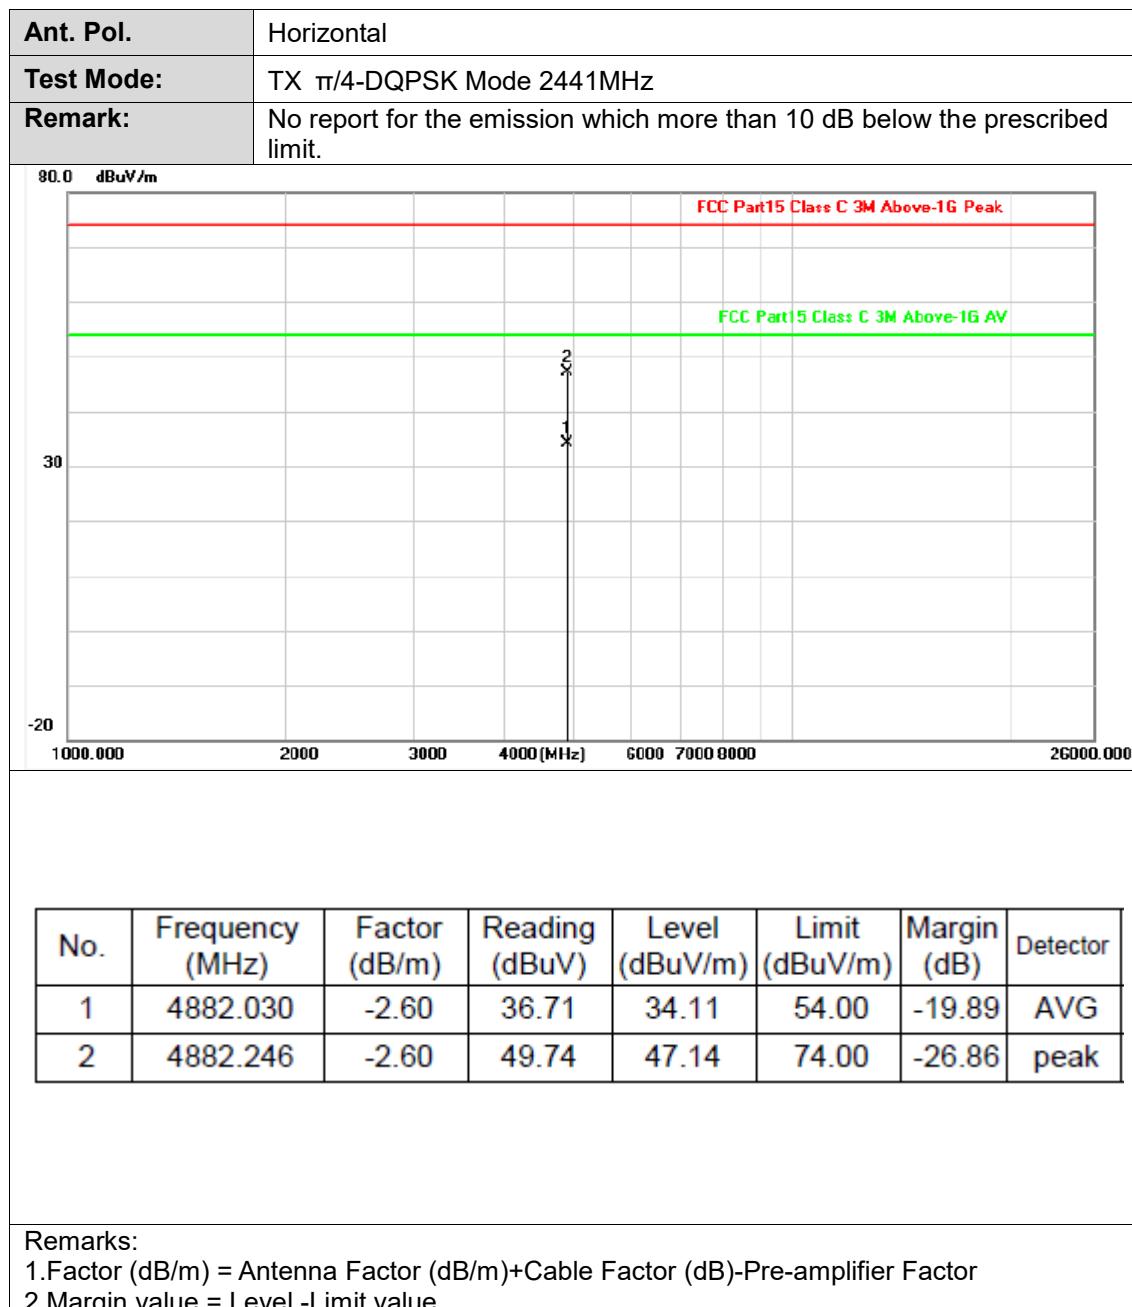

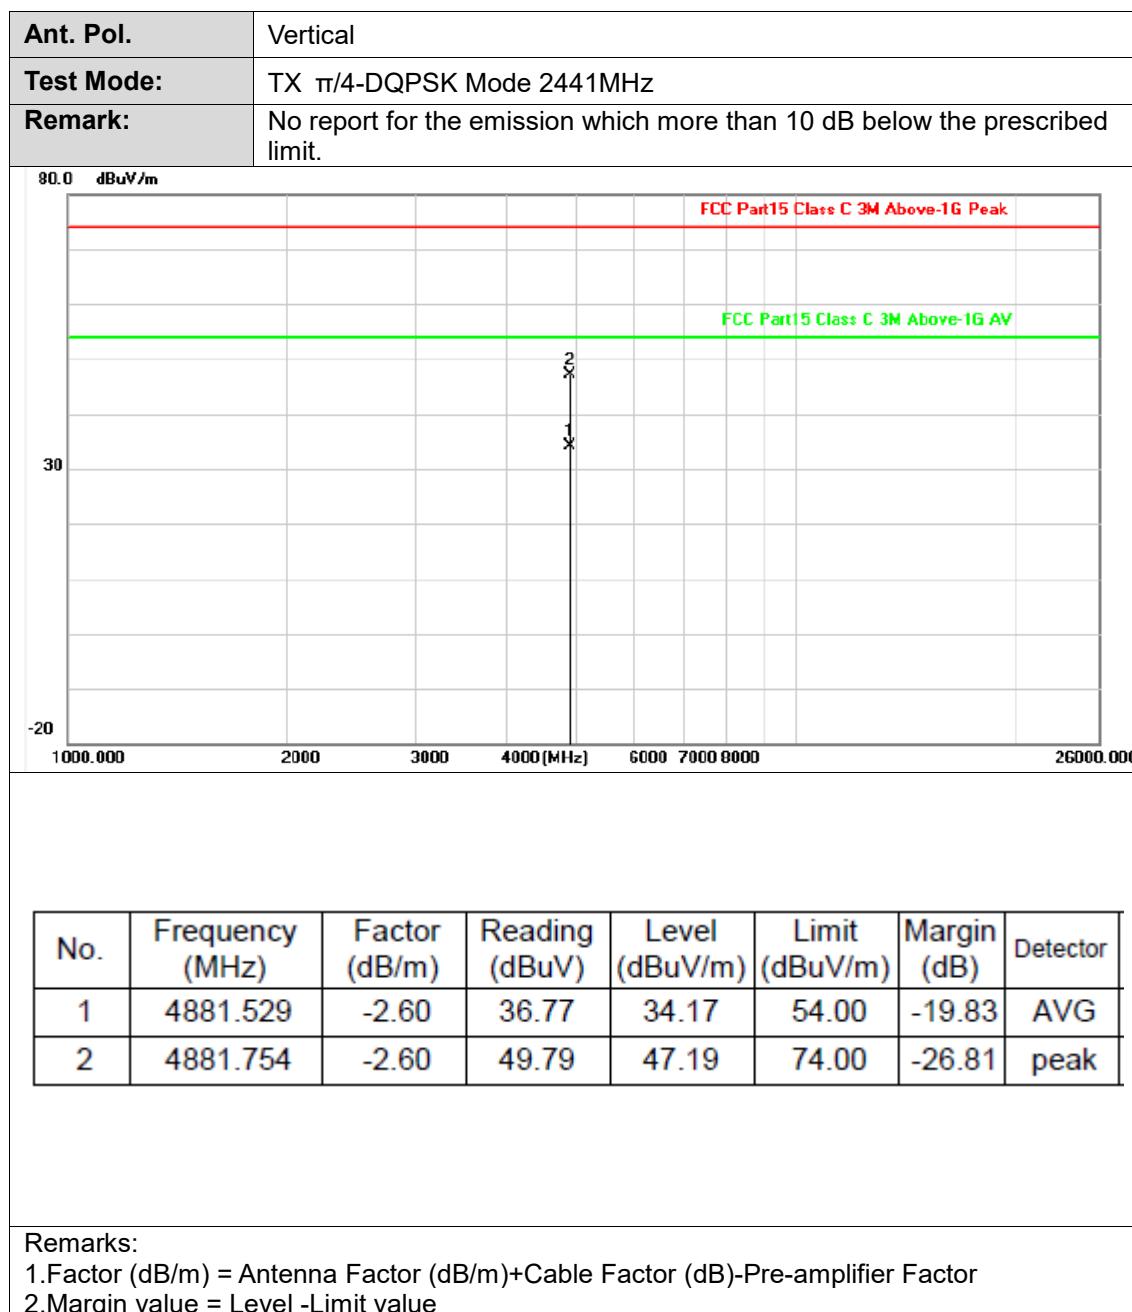


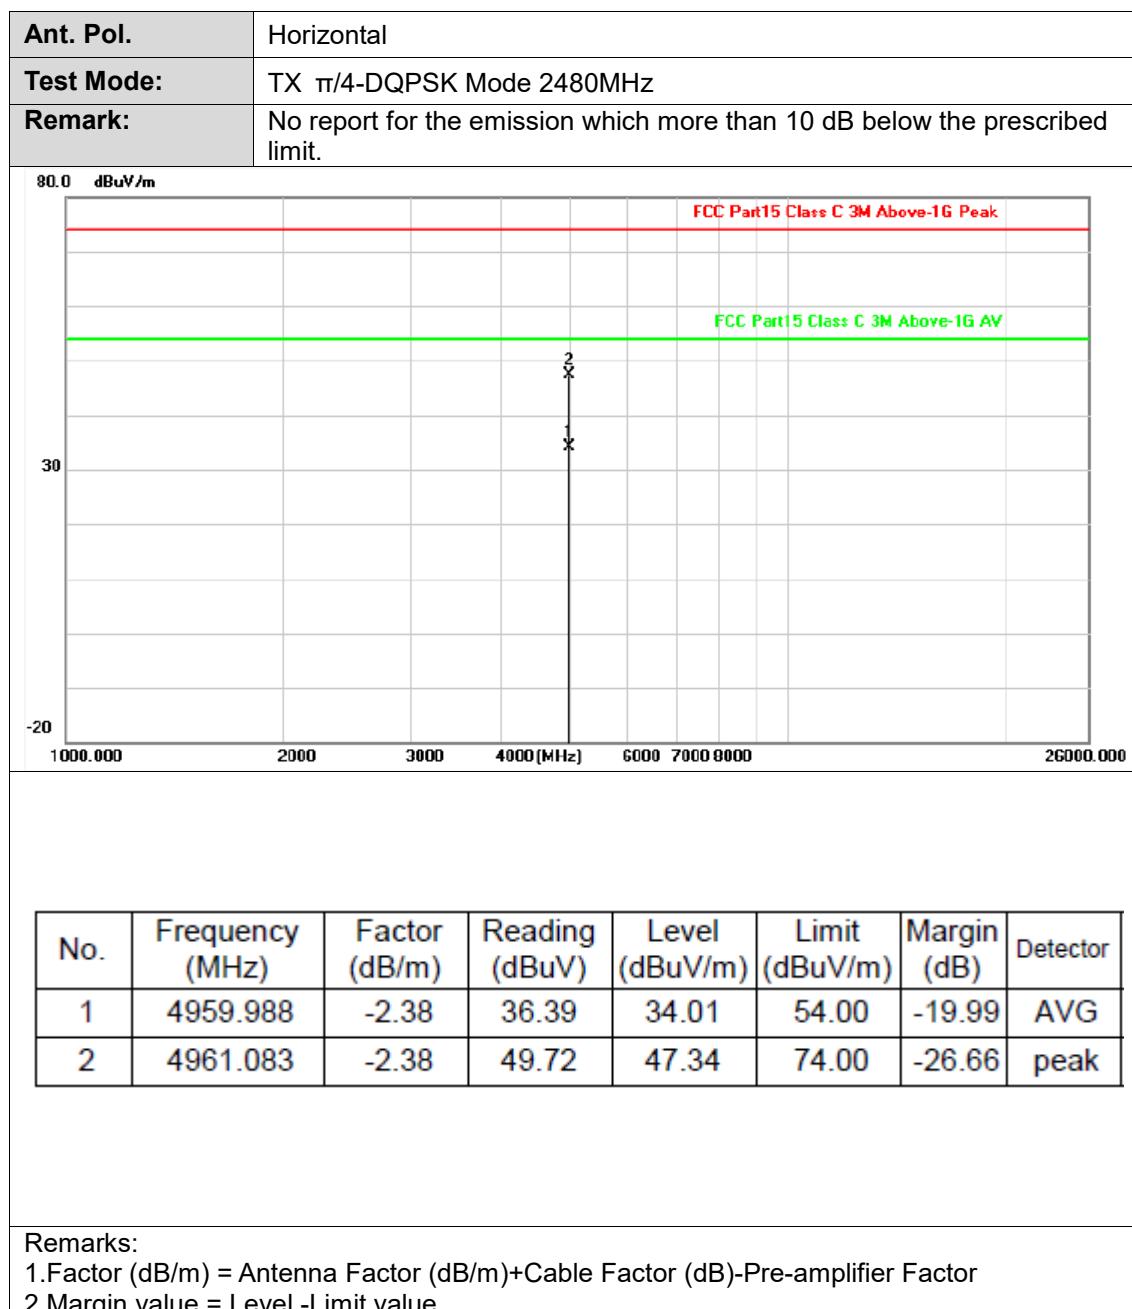


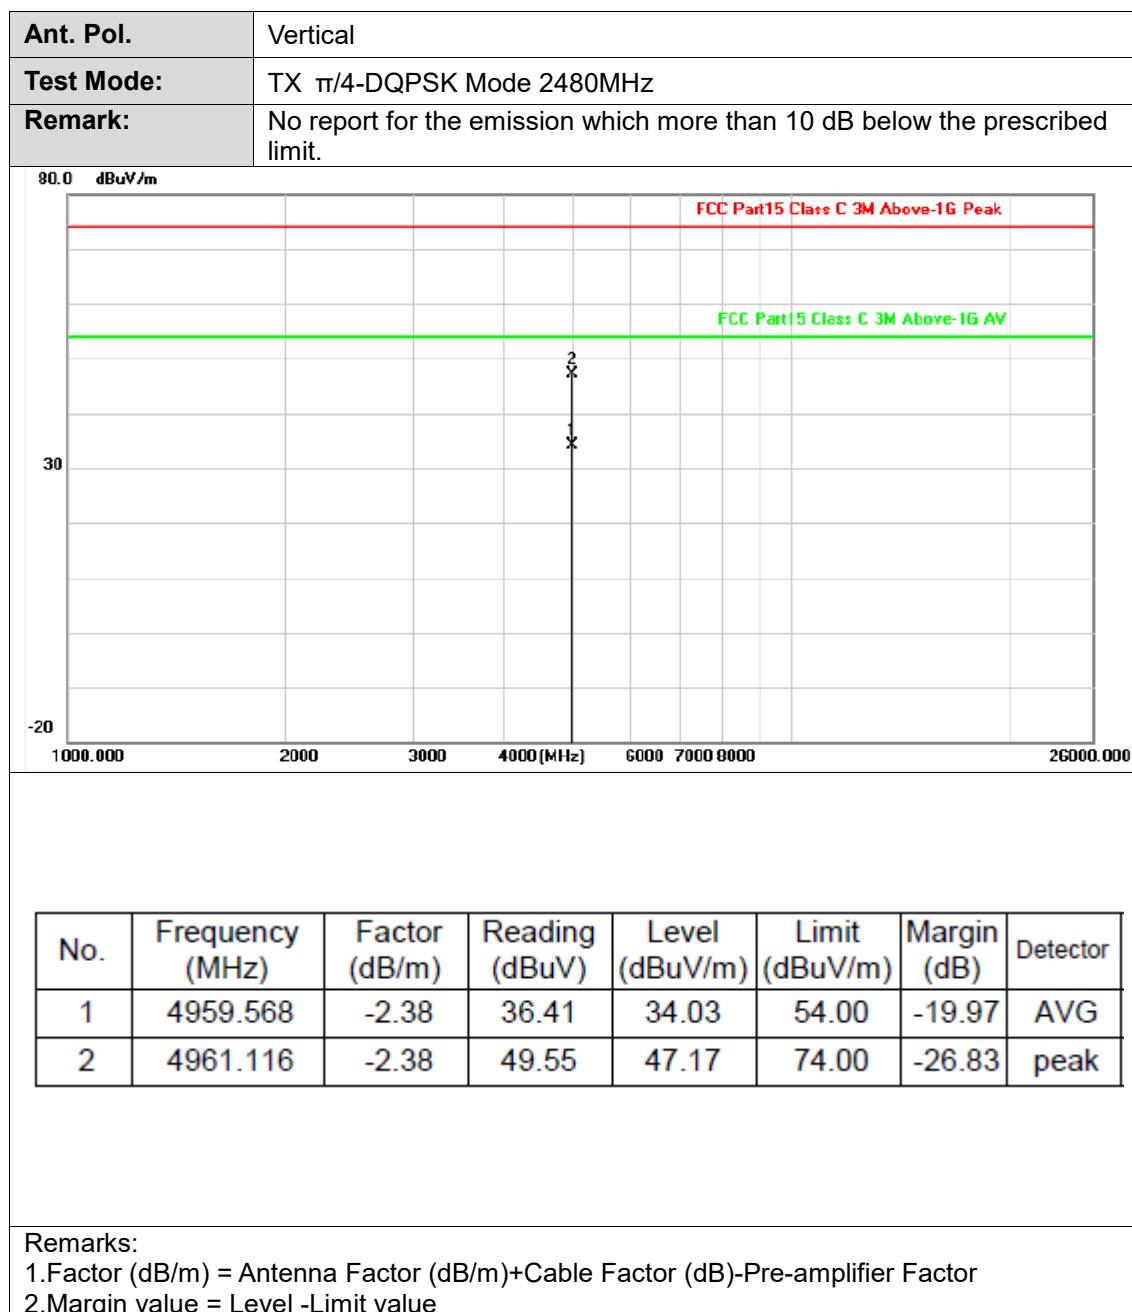




Ant. Pol.	Horizontal																															
Test Mode:	TX 8-DPSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																															
90.0 dBuV/m																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Factor (dB/m)</th><th>Reading (dBuV)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4804.198</td><td>-2.82</td><td>51.11</td><td>48.29</td><td>74.00</td><td>-25.71</td><td>peak</td></tr><tr><td>2</td><td>4804.282</td><td>-2.82</td><td>37.15</td><td>34.33</td><td>54.00</td><td>-19.67</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4804.198	-2.82	51.11	48.29	74.00	-25.71	peak	2	4804.282	-2.82	37.15	34.33	54.00	-19.67	AVG
No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4804.198	-2.82	51.11	48.29	74.00	-25.71	peak																									
2	4804.282	-2.82	37.15	34.33	54.00	-19.67	AVG																									
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																

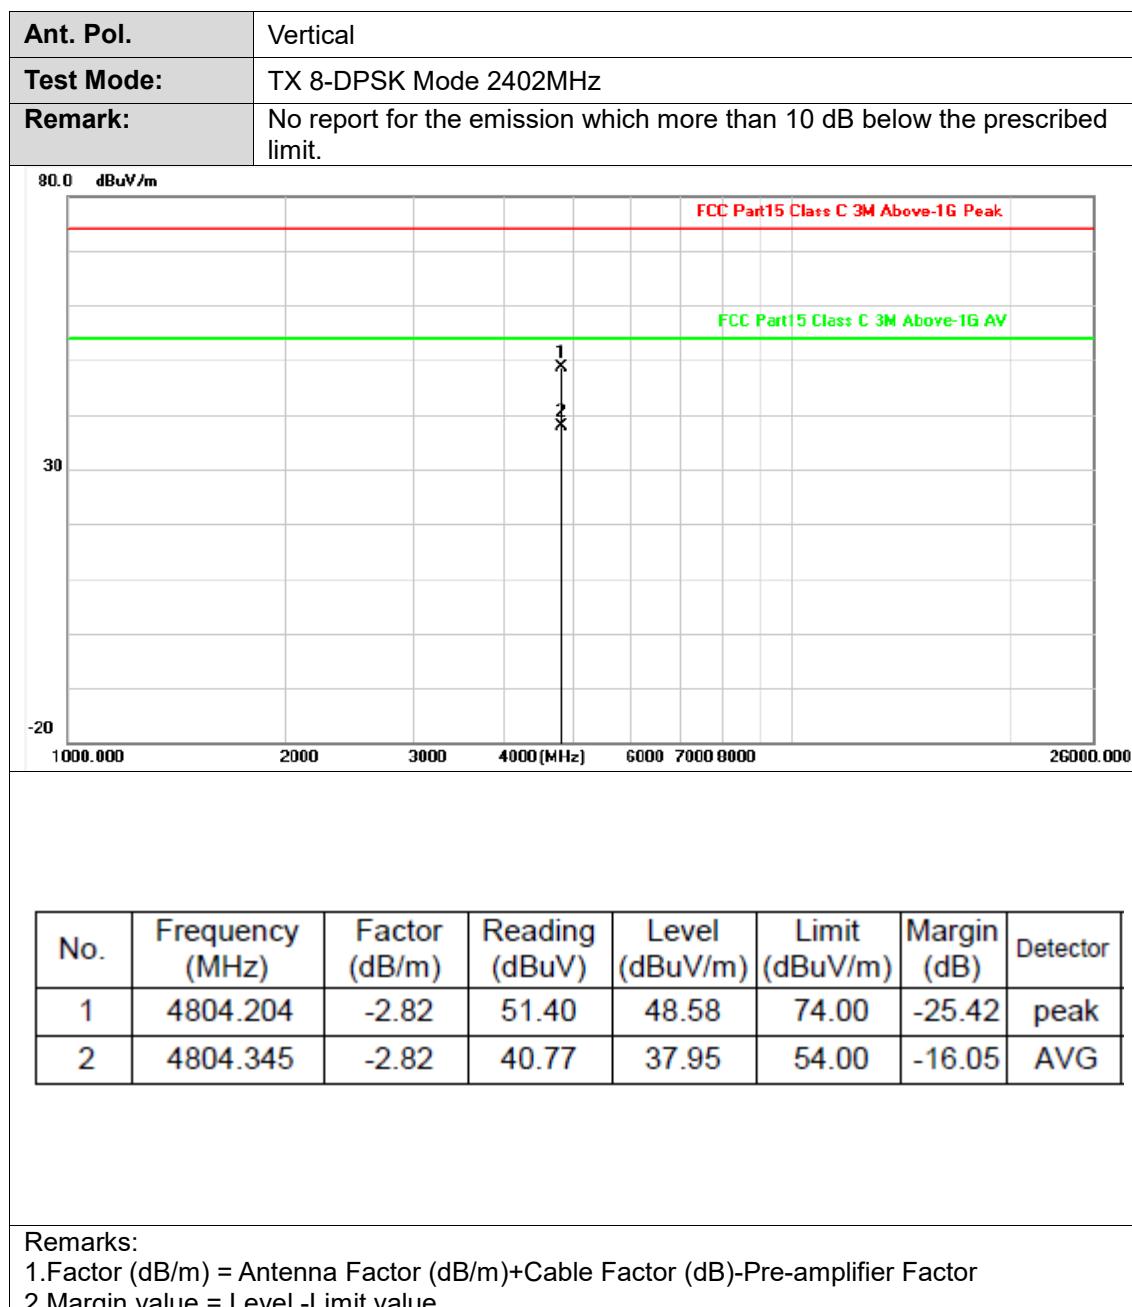

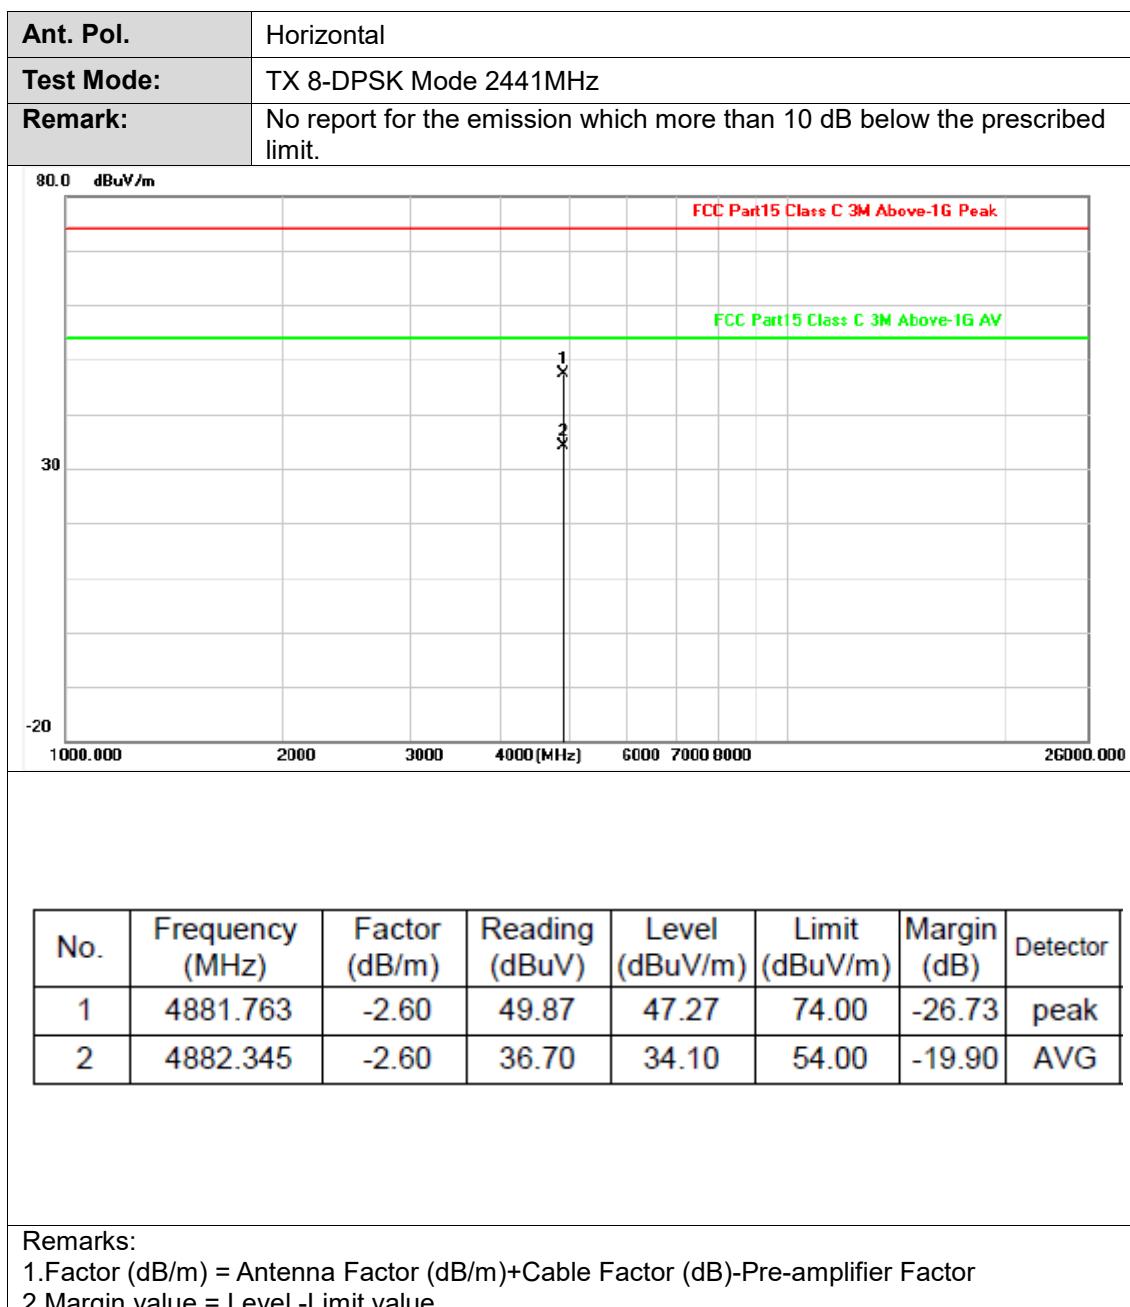


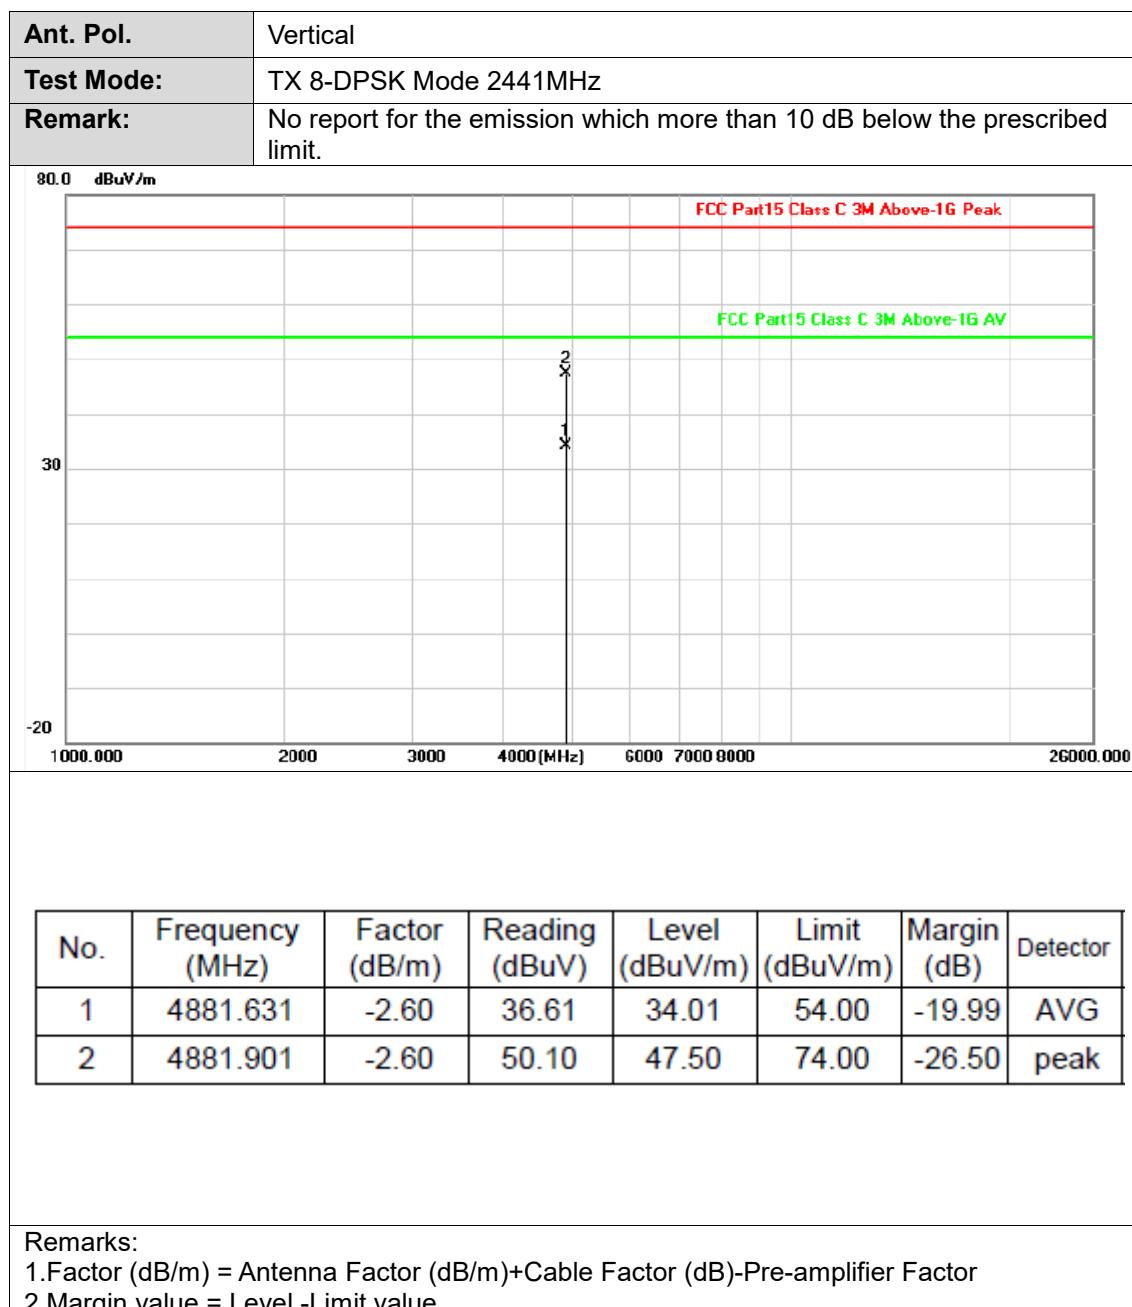

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.631	-2.60	36.61	34.01	54.00	-19.99	AVG
2	4881.901	-2.60	50.10	47.50	74.00	-26.50	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value

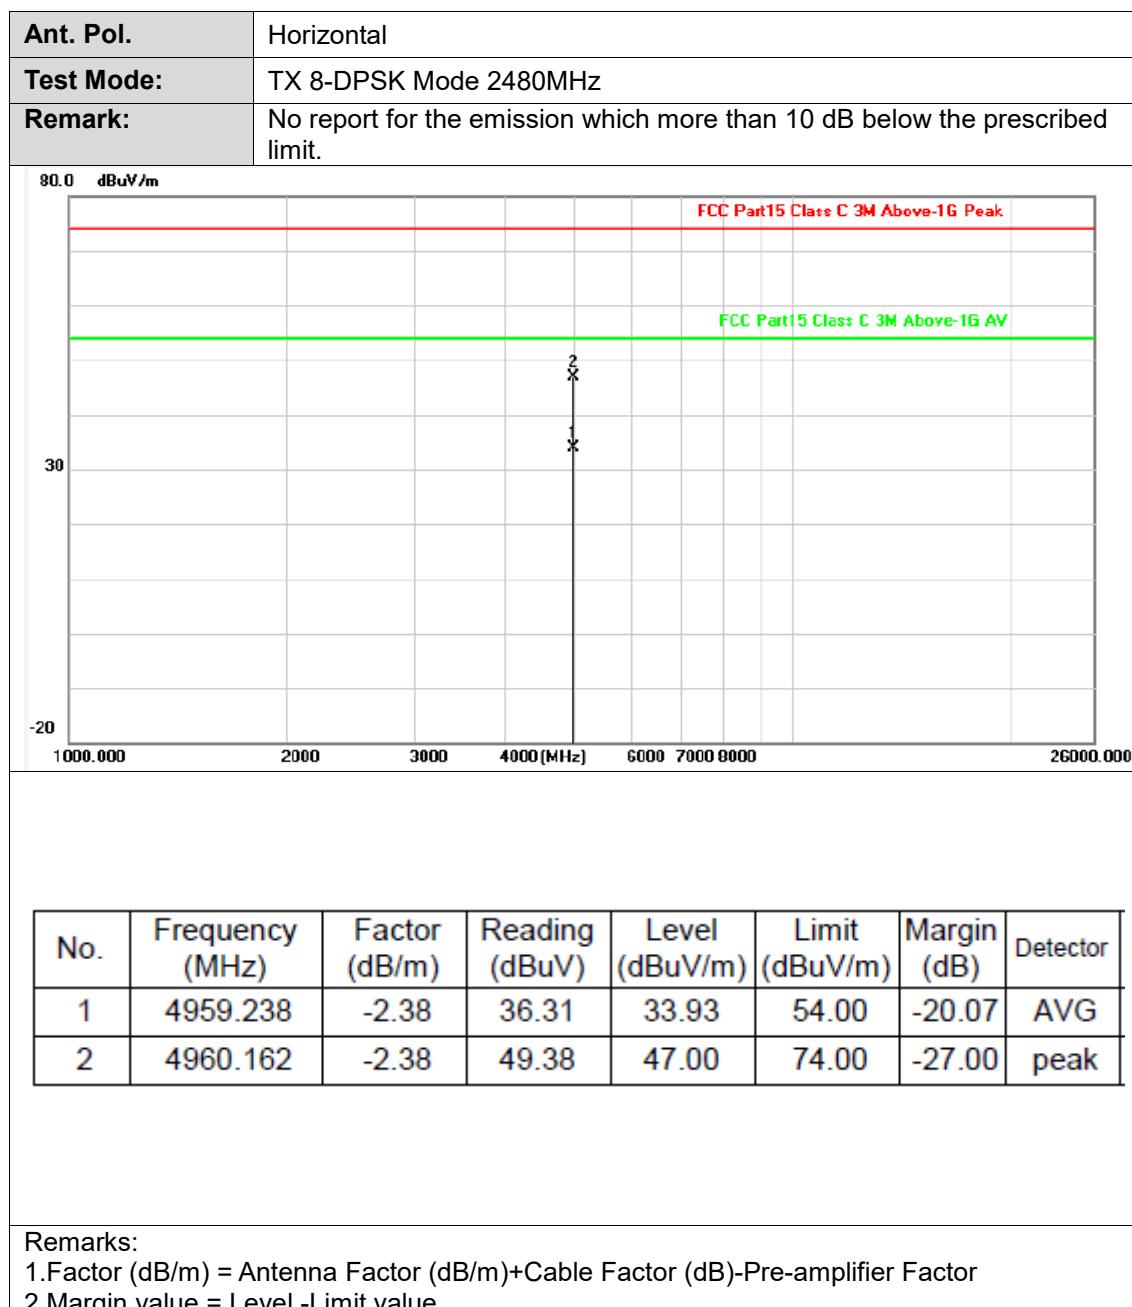


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.238	-2.38	36.31	33.93	54.00	-20.07	AVG
2	4960.162	-2.38	49.38	47.00	74.00	-27.00	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value

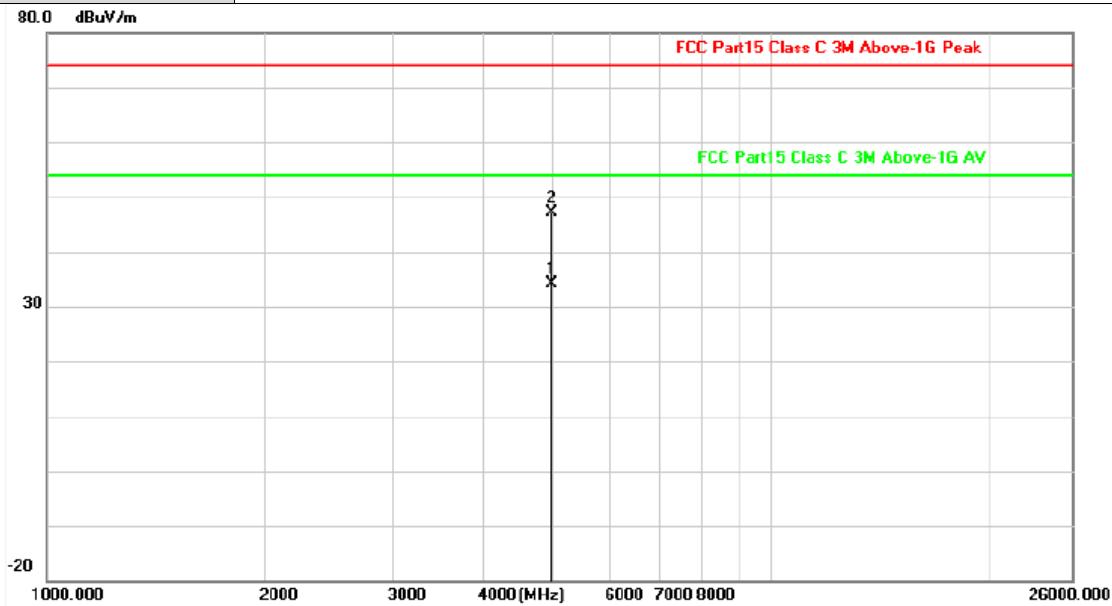

Ant. Pol.	Vertical																														
Test Mode:	TX 8-DPSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Factor (dB/m)</th><th>Reading (dBuV)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4958.689</td><td>-2.38</td><td>36.41</td><td>34.03</td><td>54.00</td><td>-19.97</td><td>AVG</td></tr><tr><td>2</td><td>4960.381</td><td>-2.38</td><td>49.47</td><td>47.09</td><td>74.00</td><td>-26.91</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4958.689	-2.38	36.41	34.03	54.00	-19.97	AVG	2	4960.381	-2.38	49.47	47.09	74.00	-26.91	peak
No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4958.689	-2.38	36.41	34.03	54.00	-19.97	AVG																								
2	4960.381	-2.38	49.47	47.09	74.00	-26.91	peak																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															

3.3. Band Edge Emissions


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Conducted Band Edge and Conducted Spurious Emissions limit: The highest point of the operating frequency waveform down 20dB

Test Configuration

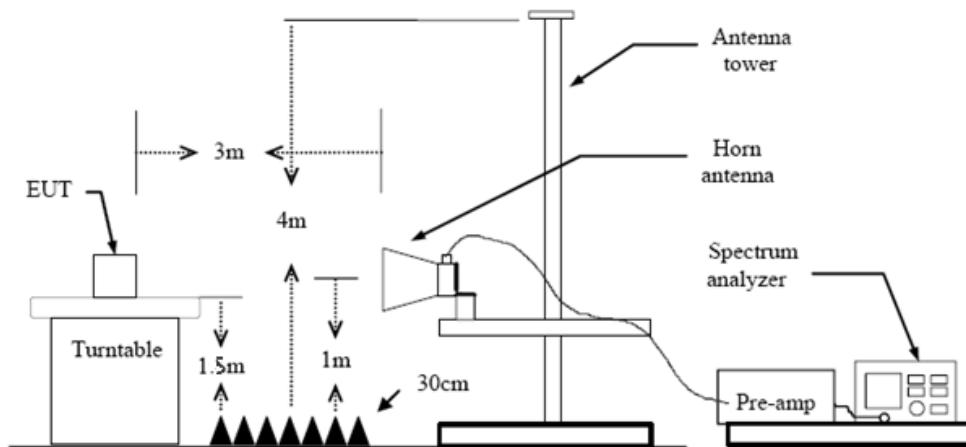



Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
RBW=1MHz, VBW=10Hz with PEAK Detector for Average Value.
The conducted spurious emissions set as follow:
 1. Set RBW = 100 kHz.
 2. Set the video bandwidth (VBW) \geq 3 RBW.
 3. Detector = Peak.
 4. Trace mode = Max hold.
 5. Sweep = Auto couple.


Test Mode


Please refer to the clause 2.3.

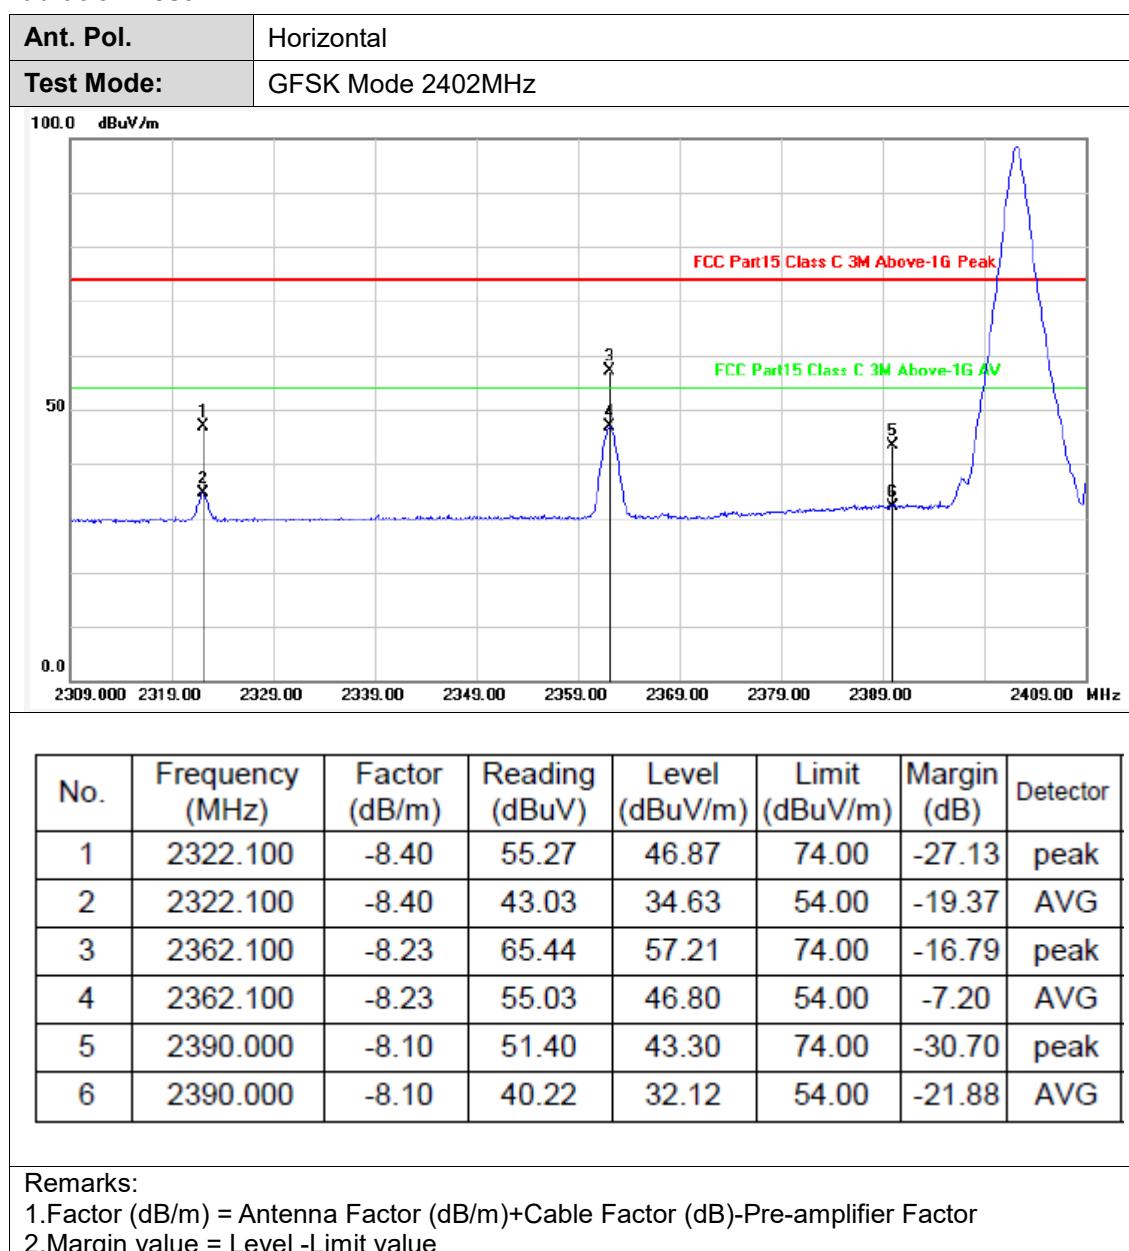
Test Results**(1) Radiation Test**

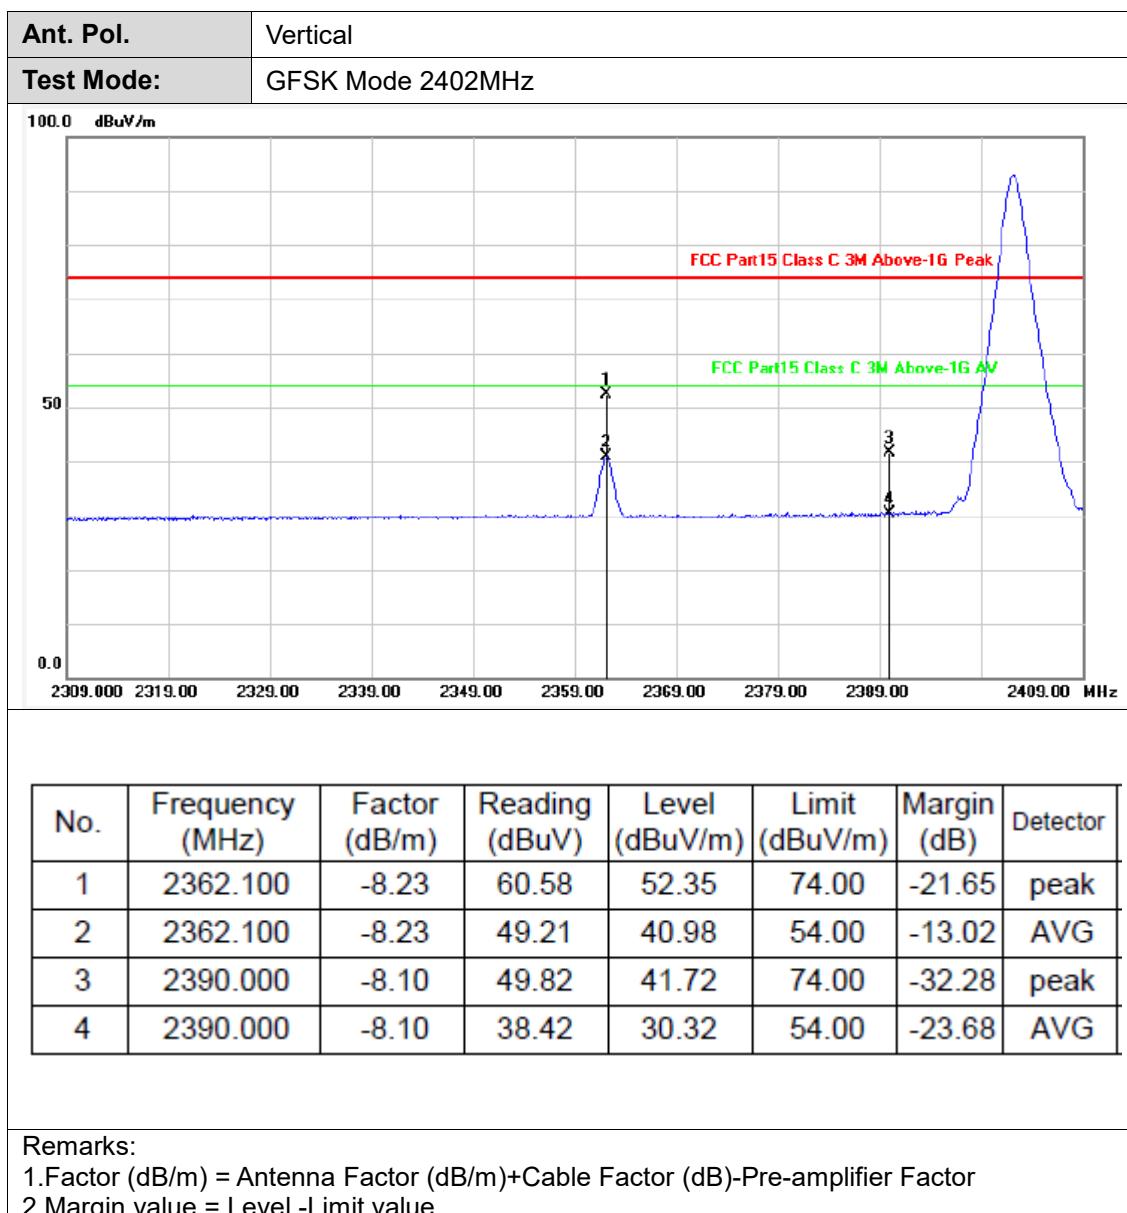


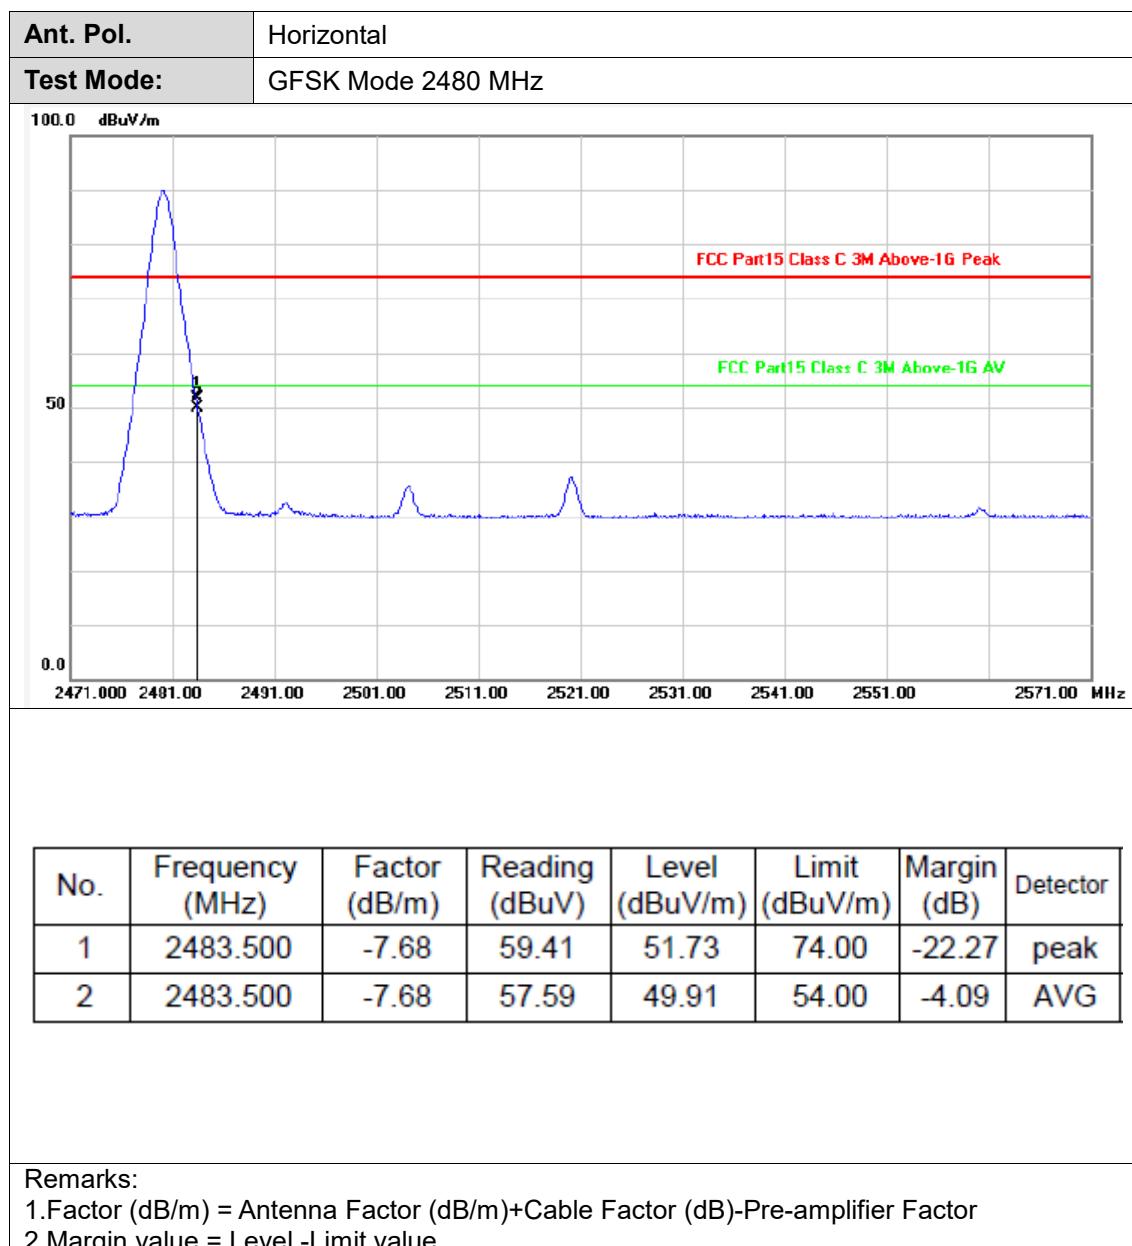


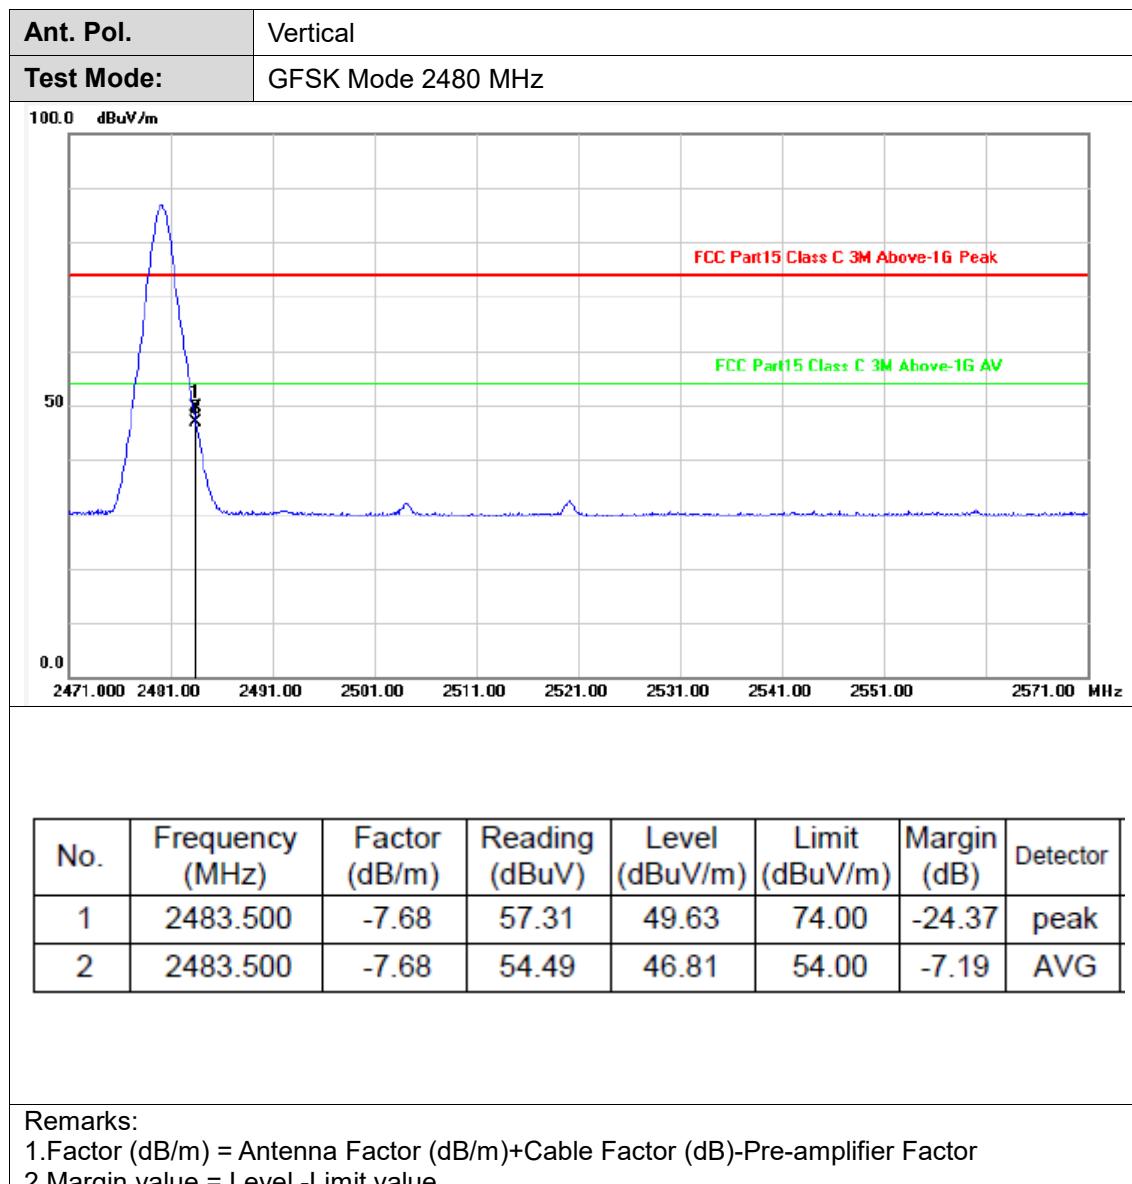


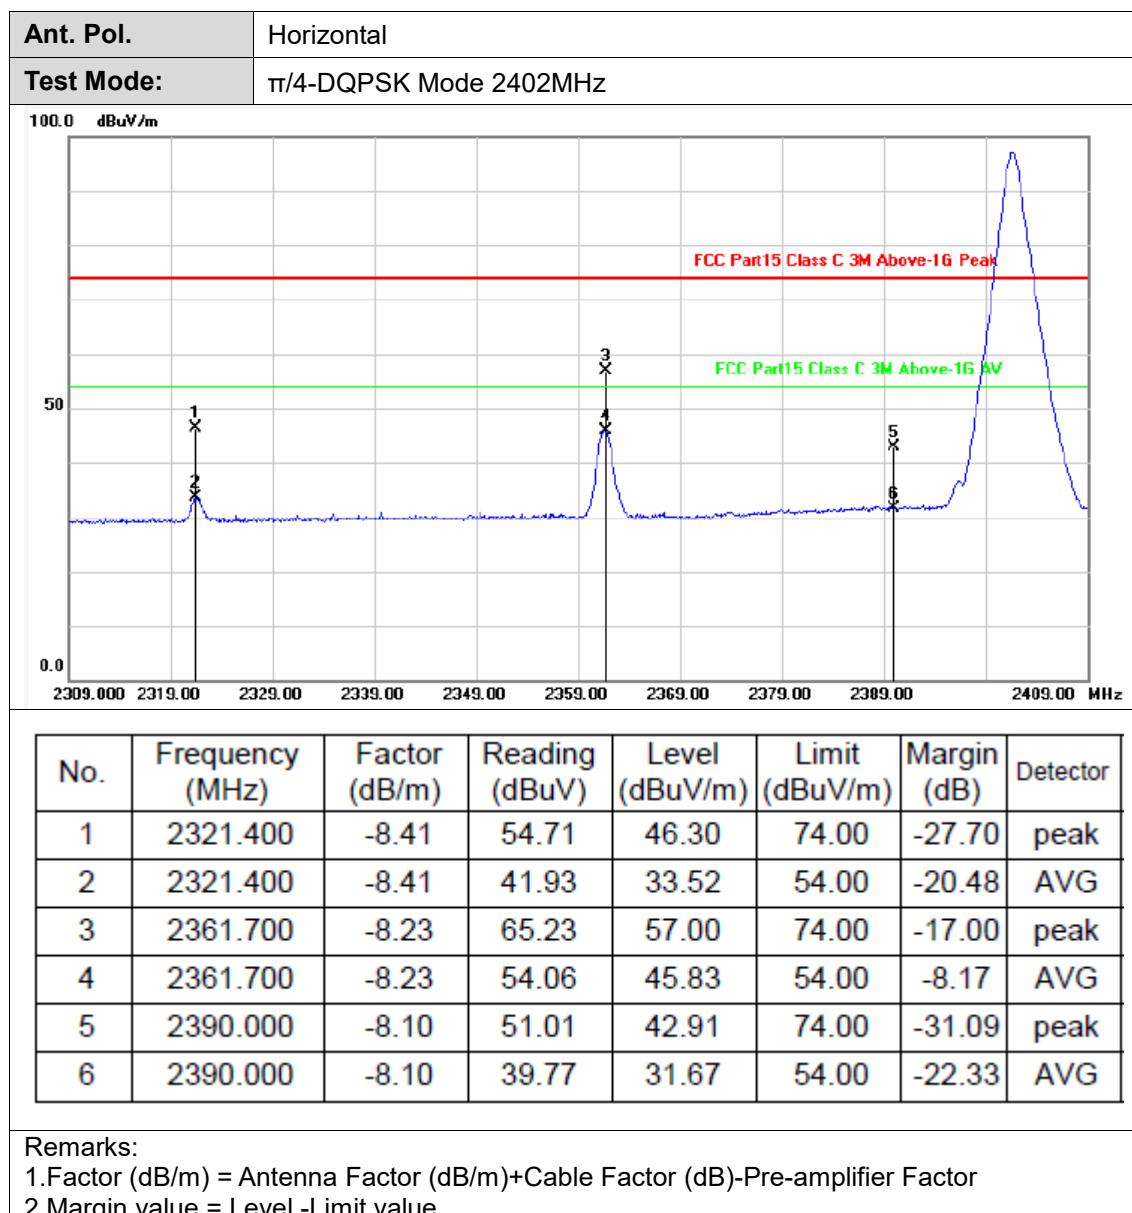


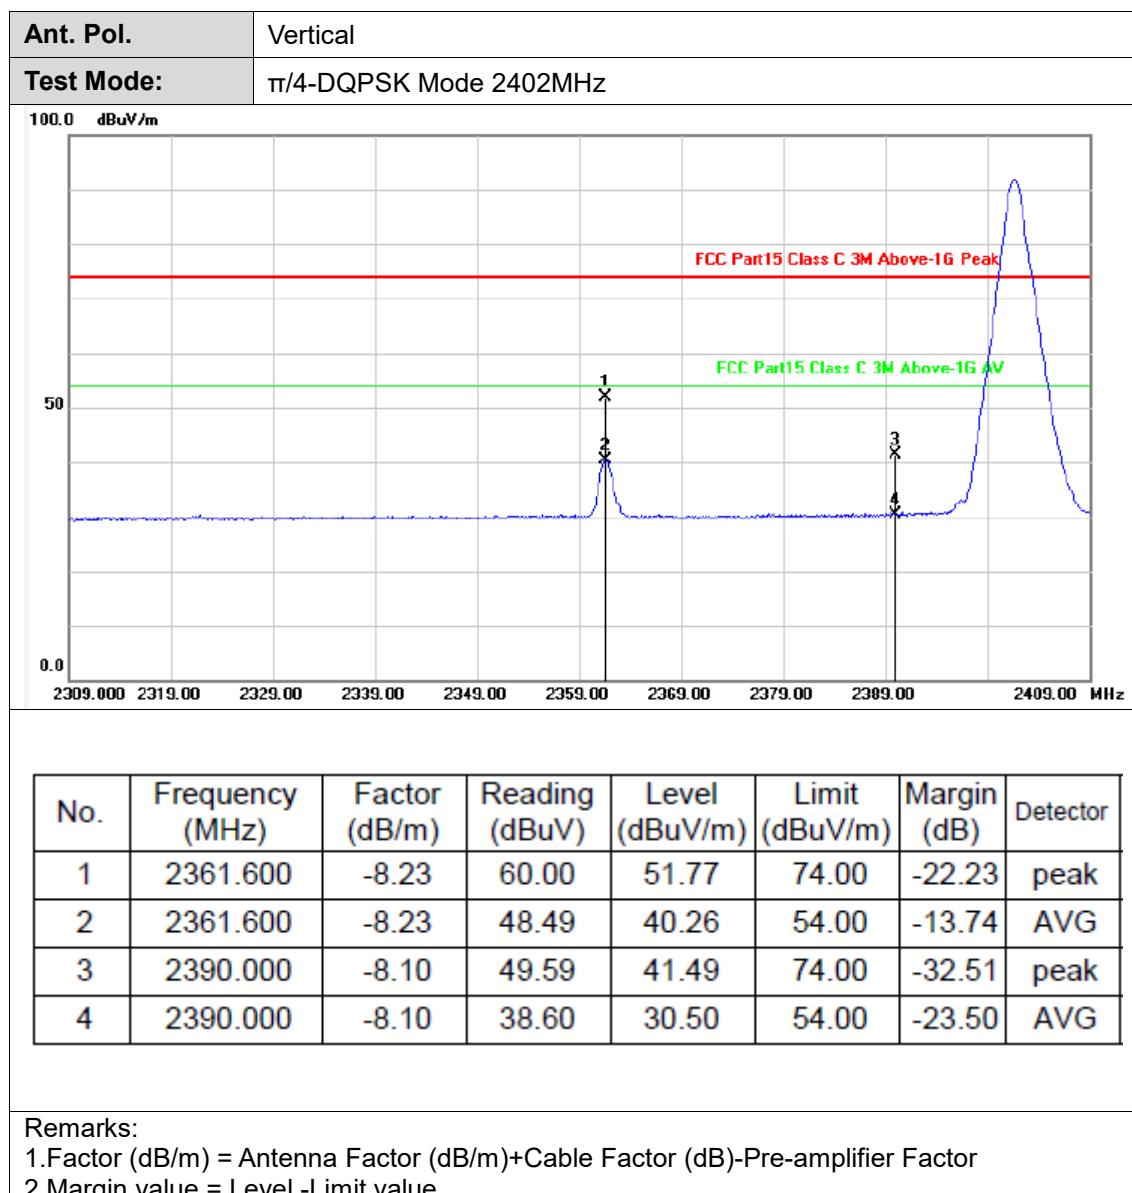


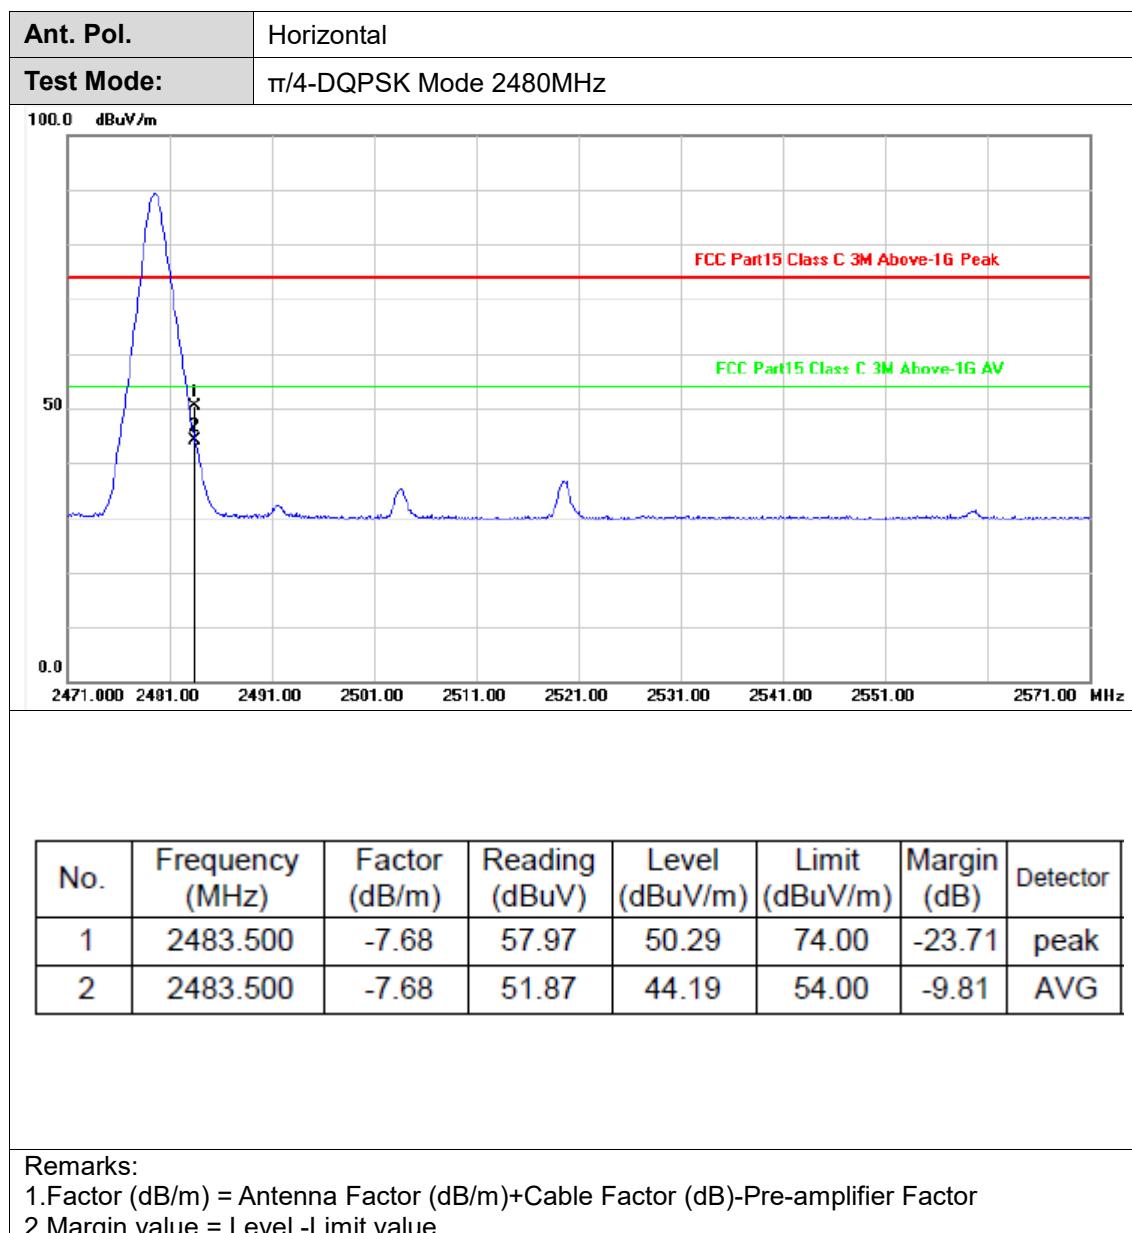


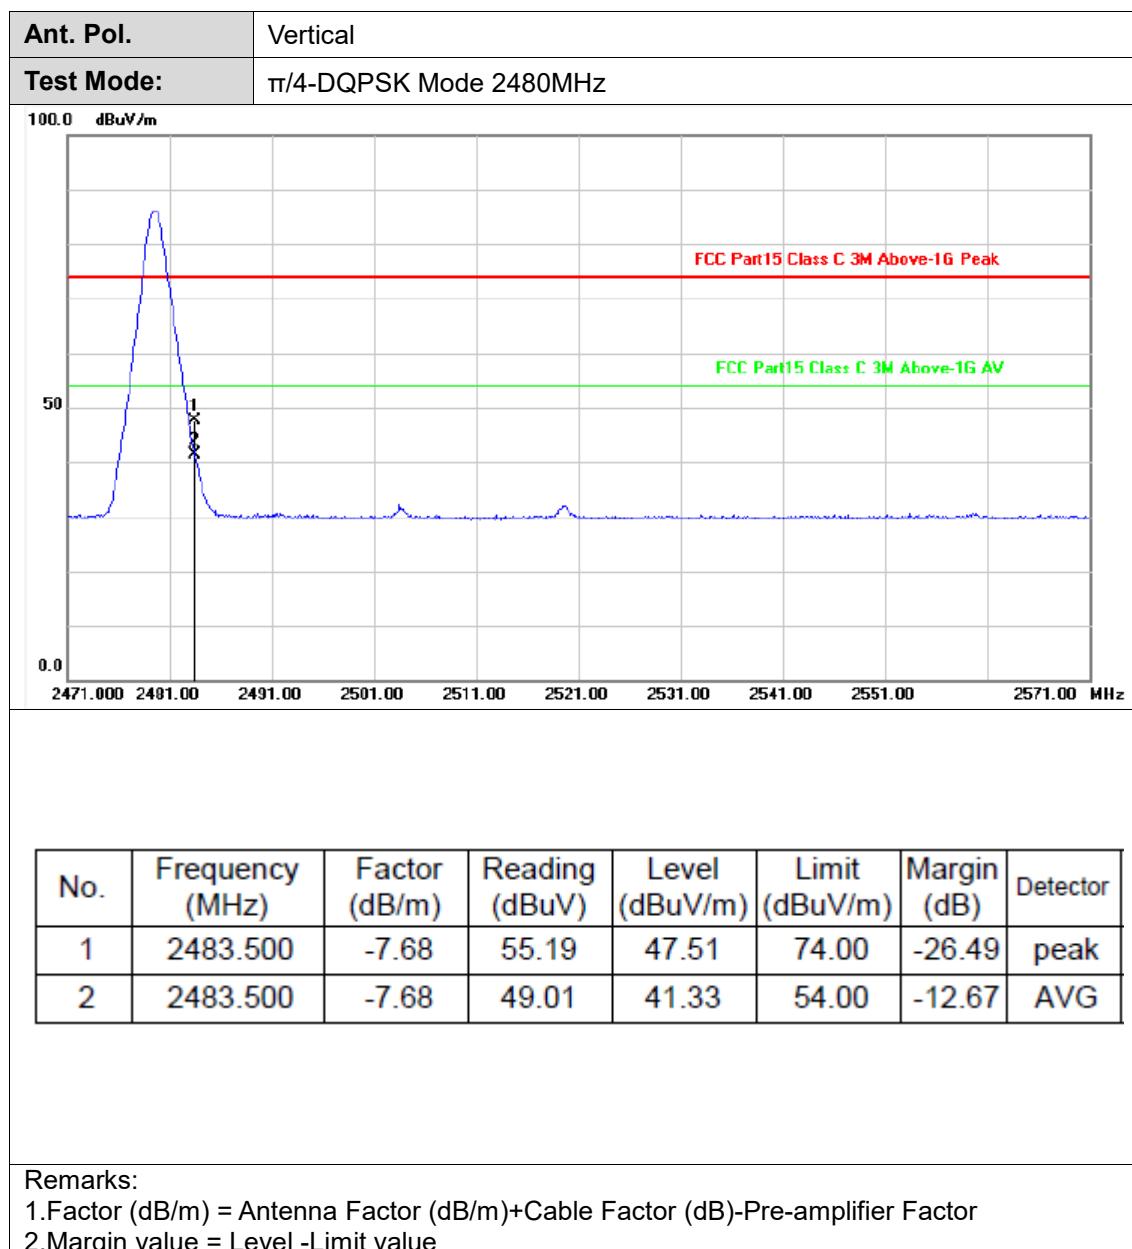

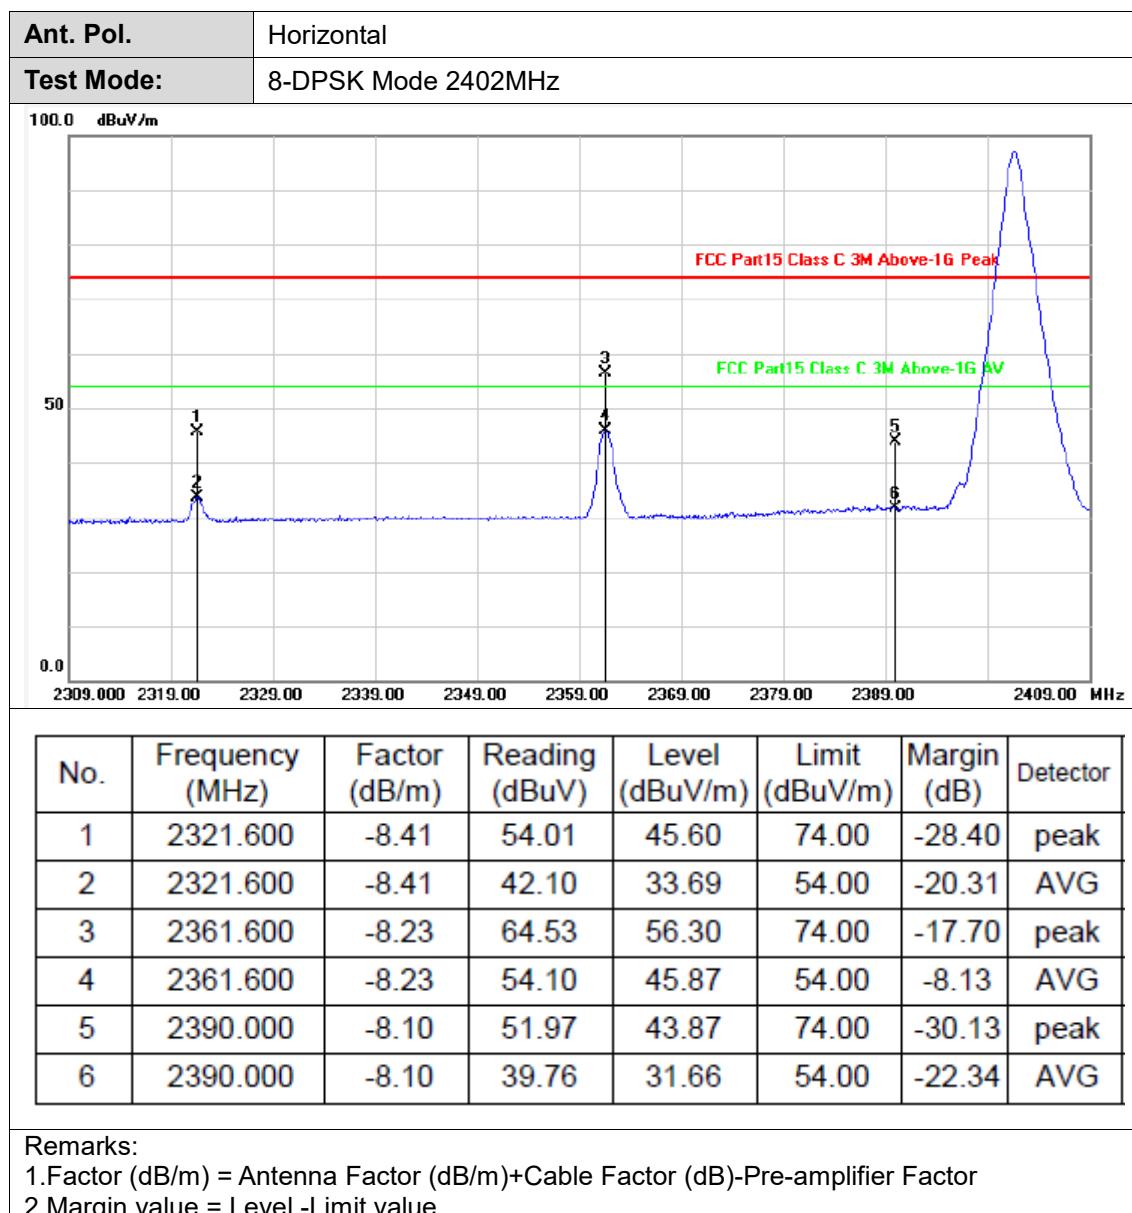

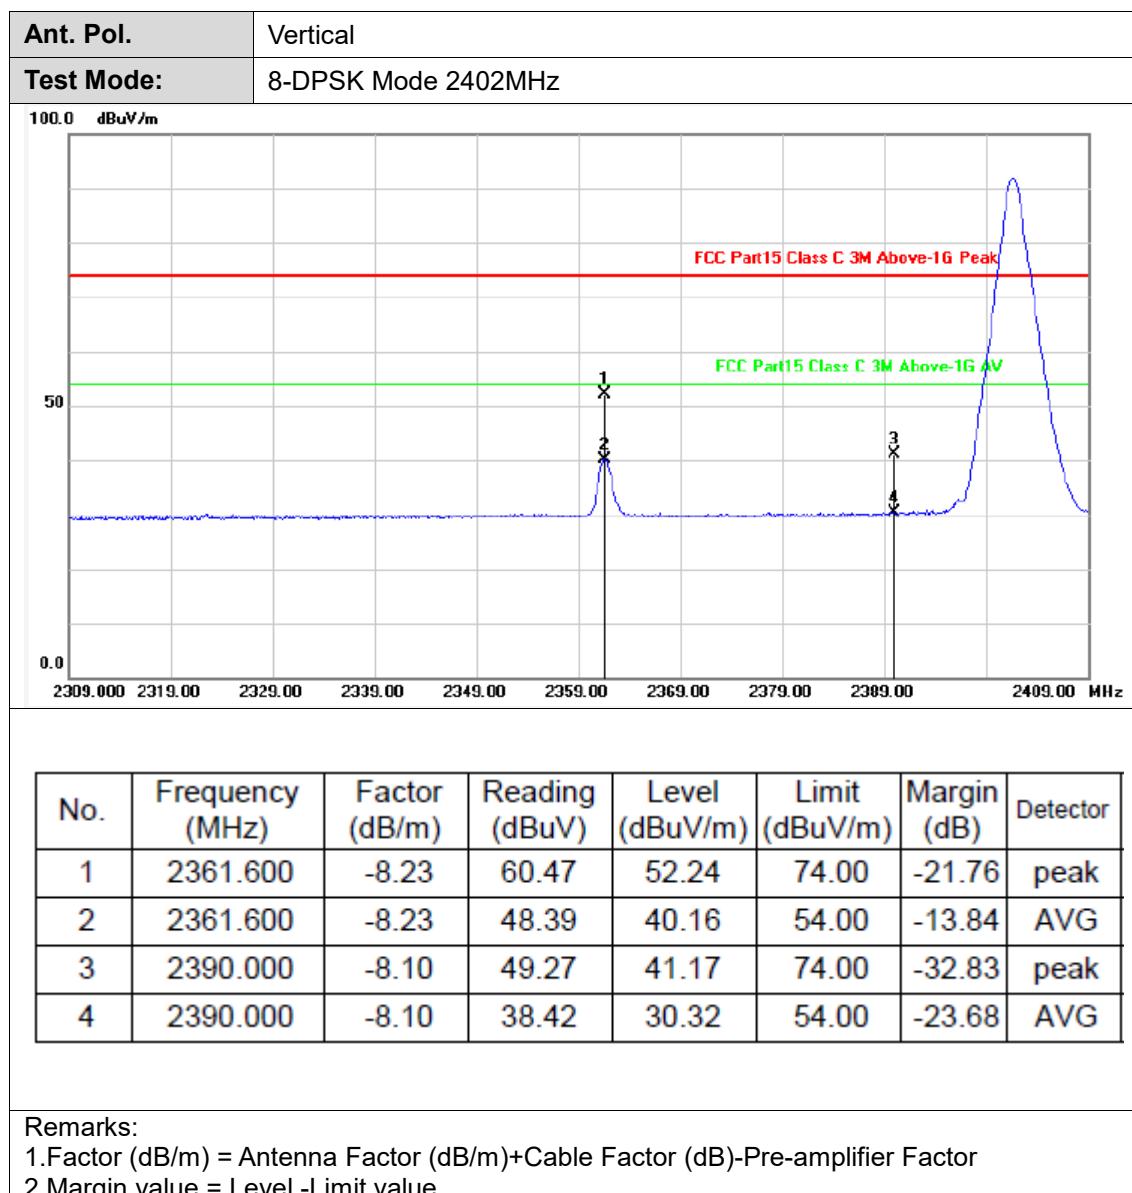


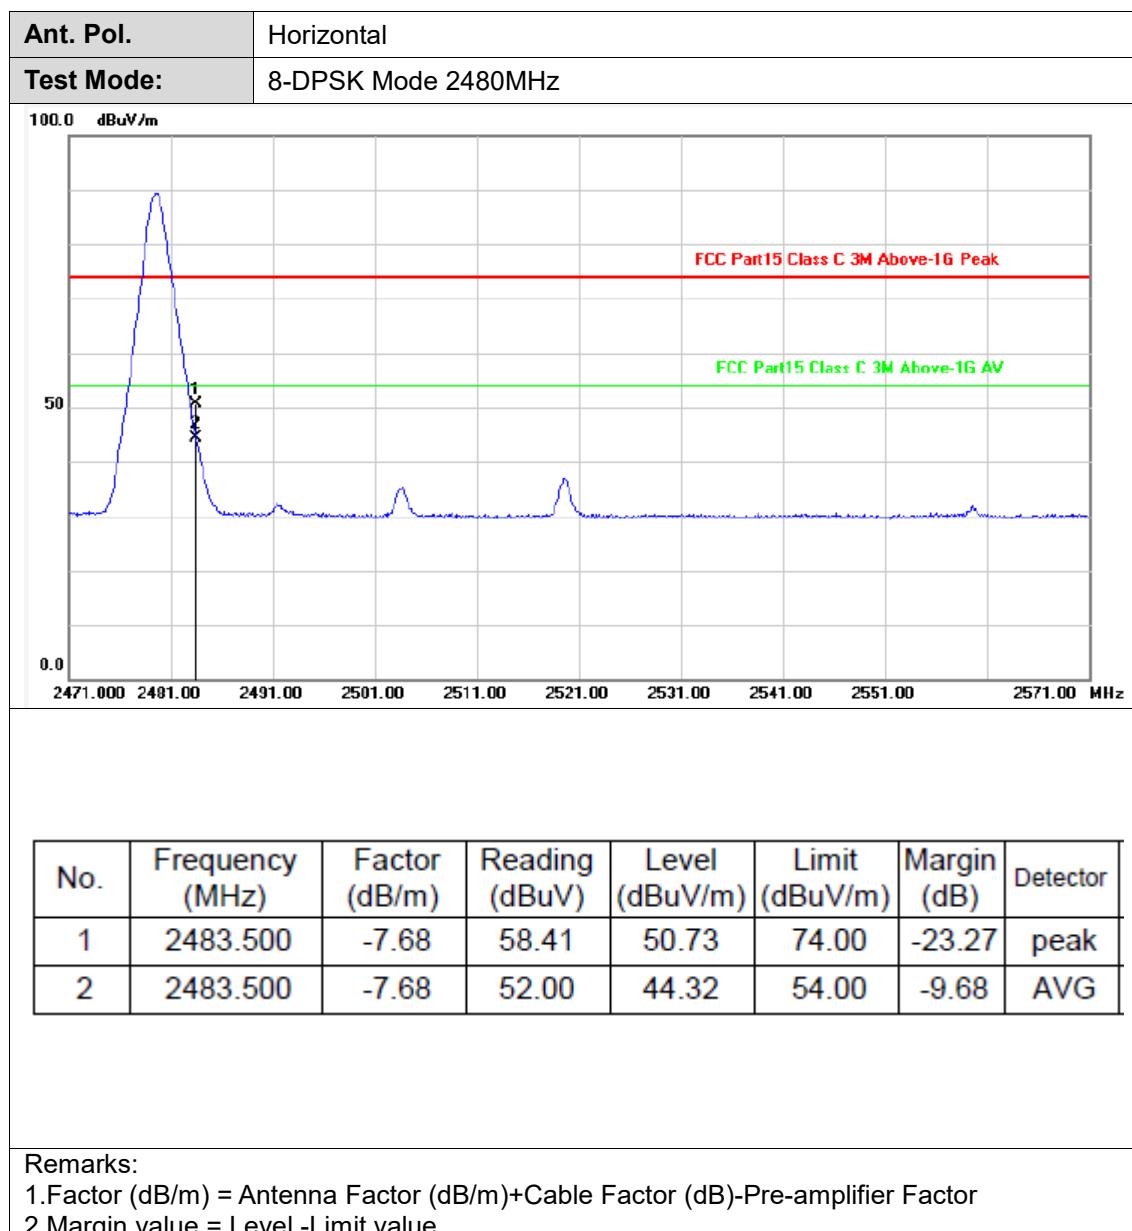


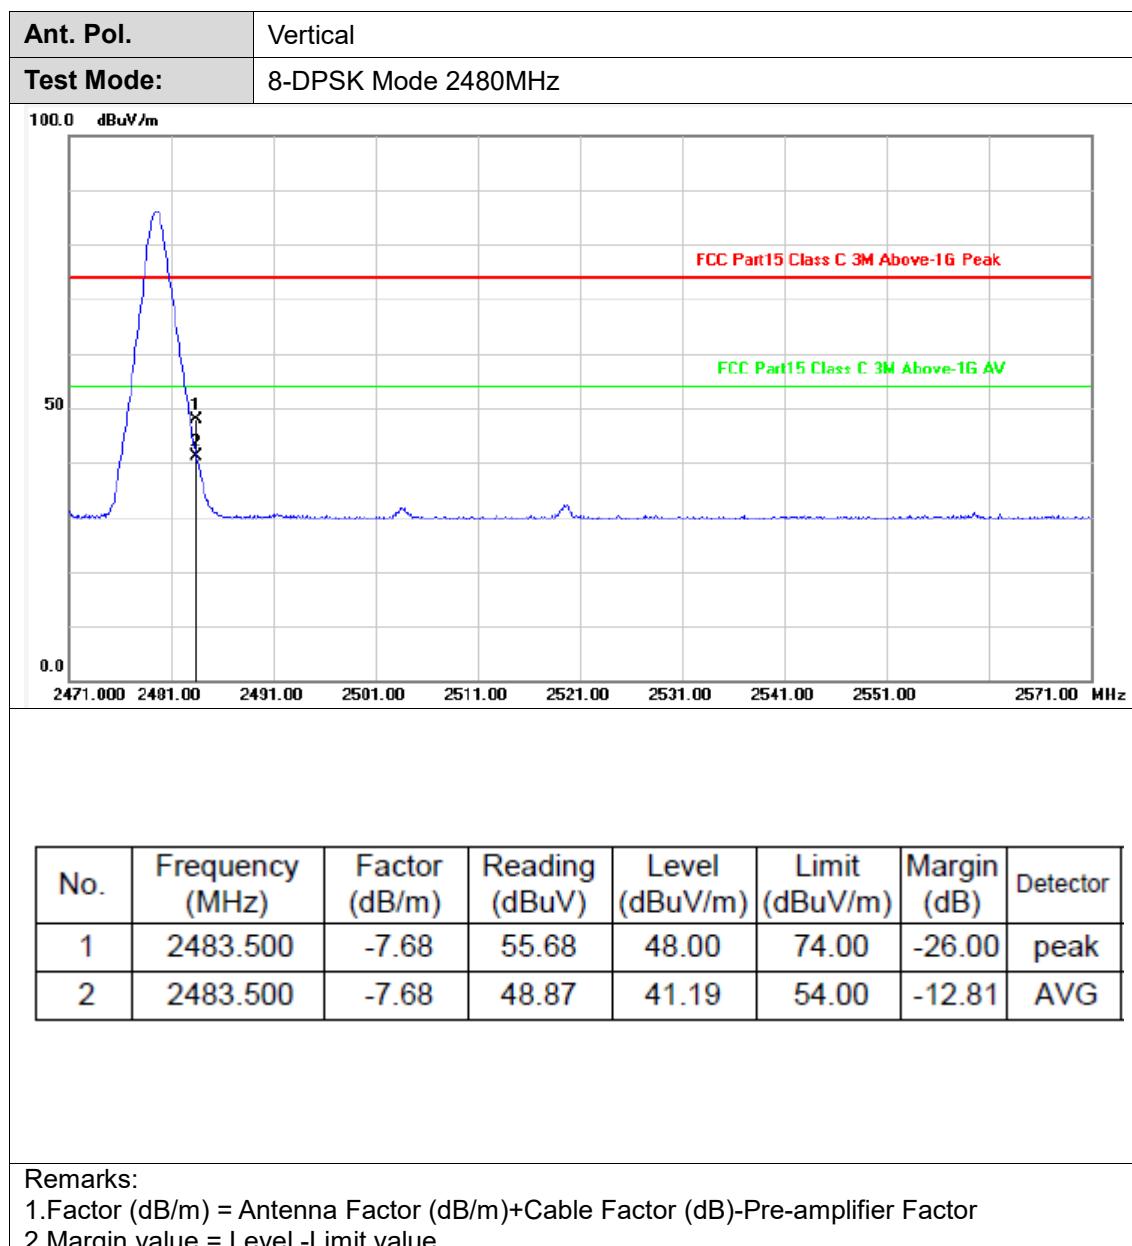

(2) Conducted Band Edge Test

Test Mode: GFSK Mode 2402MHz

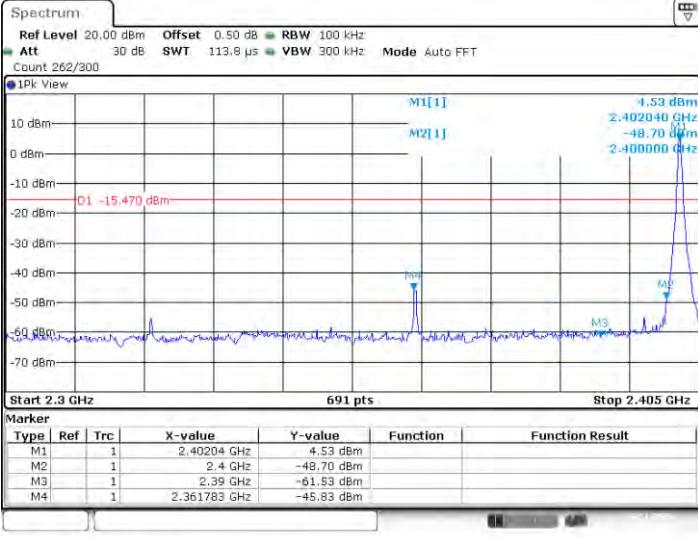CH00	 <table border="1"> <thead> <tr> <th colspan="6">Marker</th> </tr> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40204 GHz</td> <td>4.53 dBm</td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-48.70 dBm</td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-61.53 dBm</td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.361783 GHz</td> <td>-45.83 dBm</td> <td></td> </tr> </tbody> </table> <p>Date: 4.NOV.2020 16:34:35</p>	Marker						Type	Ref	Trc	X-value	Y-value	Function	M1	1		2.40204 GHz	4.53 dBm		M2	1		2.4 GHz	-48.70 dBm		M3	1		2.39 GHz	-61.53 dBm		M4	1		2.361783 GHz	-45.83 dBm			
Marker																																							
Type	Ref	Trc	X-value	Y-value	Function																																		
M1	1		2.40204 GHz	4.53 dBm																																			
M2	1		2.4 GHz	-48.70 dBm																																			
M3	1		2.39 GHz	-61.53 dBm																																			
M4	1		2.361783 GHz	-45.83 dBm																																			
Mark frequency(MHz)	Value (dBm)																																						
2400.00	-48.70	-15.47	Pass																																				
2390.00	-61.53																																						
2361.78	-45.83																																						

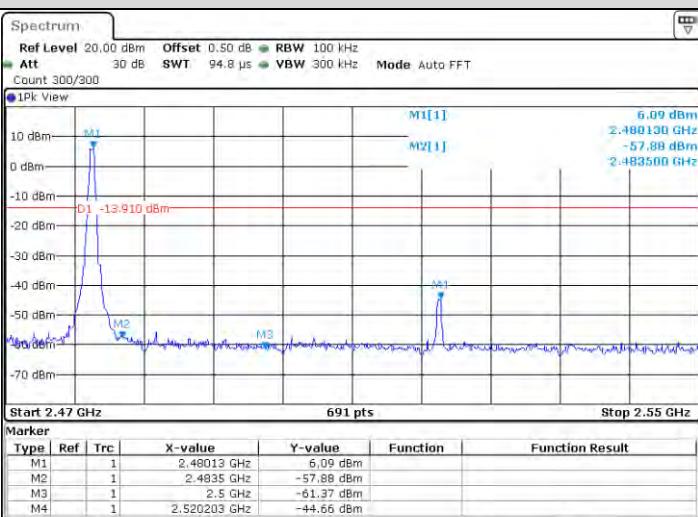CH78	 <table border="1"> <thead> <tr> <th colspan="6">Marker</th> </tr> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.48013 GHz</td> <td>6.09 dBm</td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-57.88 dBm</td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-61.37 dBm</td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.520203 GHz</td> <td>-44.66 dBm</td> <td></td> </tr> </tbody> </table> <p>Date: 4.NOV.2020 16:35:30</p>	Marker						Type	Ref	Trc	X-value	Y-value	Function	M1	1		2.48013 GHz	6.09 dBm		M2	1		2.4835 GHz	-57.88 dBm		M3	1		2.5 GHz	-61.37 dBm		M4	1		2.520203 GHz	-44.66 dBm			
Marker																																							
Type	Ref	Trc	X-value	Y-value	Function																																		
M1	1		2.48013 GHz	6.09 dBm																																			
M2	1		2.4835 GHz	-57.88 dBm																																			
M3	1		2.5 GHz	-61.37 dBm																																			
M4	1		2.520203 GHz	-44.66 dBm																																			
Mark frequency(MHz)	Value (dBm)																																						
2483.50	-57.88	-13.91	Pass																																				
2500.00	-61.37																																						
2520.20	-44.66																																						




Test Mode: GFSK Hopping Mode


CH00	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION (WTH)</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.409 855 GHz</td><td>-4.443 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-44.215 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-44.706 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.310 000 GHz</td><td>-63.233 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>2.382 870 GHz</td><td>-42.440 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION (WTH)	FUNCTION VALUE	1	N	1	f	2.409 855 GHz	-4.443 dBm				2	N	1	f	2.400 000 GHz	-44.215 dBm				3	N	1	f	2.390 000 GHz	-44.706 dBm				4	N	1	f	2.310 000 GHz	-63.233 dBm				5	N	1	f	2.382 870 GHz	-42.440 dBm				6									7									8									9									10									11										
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION (WTH)	FUNCTION VALUE																																																																																																							
1	N	1	f	2.409 855 GHz	-4.443 dBm																																																																																																										
2	N	1	f	2.400 000 GHz	-44.215 dBm																																																																																																										
3	N	1	f	2.390 000 GHz	-44.706 dBm																																																																																																										
4	N	1	f	2.310 000 GHz	-63.233 dBm																																																																																																										
5	N	1	f	2.382 870 GHz	-42.440 dBm																																																																																																										
6																																																																																																															
7																																																																																																															
8																																																																																																															
9																																																																																																															
10																																																																																																															
11																																																																																																															
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result																																																																																																												
2400.00	-42.22	-15.56	Pass																																																																																																												
2390.00	-44.71																																																																																																														
2382.87	-42.44																																																																																																														

CH78	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION (WTH)</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.470 95 GHz</td><td>-3.899 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-58.706 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-46.432 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.514 96 GHz</td><td>-44.013 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION (WTH)	FUNCTION VALUE	1	N	1	f	2.470 95 GHz	-3.899 dBm				2	N	1	f	2.483 50 GHz	-58.706 dBm				3	N	1	f	2.500 00 GHz	-46.432 dBm				4	N	1	f	2.514 96 GHz	-44.013 dBm				5									6									7									8									9									10									11										
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION (WTH)	FUNCTION VALUE																																																																																																							
1	N	1	f	2.470 95 GHz	-3.899 dBm																																																																																																										
2	N	1	f	2.483 50 GHz	-58.706 dBm																																																																																																										
3	N	1	f	2.500 00 GHz	-46.432 dBm																																																																																																										
4	N	1	f	2.514 96 GHz	-44.013 dBm																																																																																																										
5																																																																																																															
6																																																																																																															
7																																																																																																															
8																																																																																																															
9																																																																																																															
10																																																																																																															
11																																																																																																															
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result																																																																																																												
2483.50	-58.71	-16.11	Pass																																																																																																												
2500.00	-46.43																																																																																																														
2514.96	-44.01																																																																																																														

Test Mode: $\pi/4$ -DQPSK Mode 2402MHz

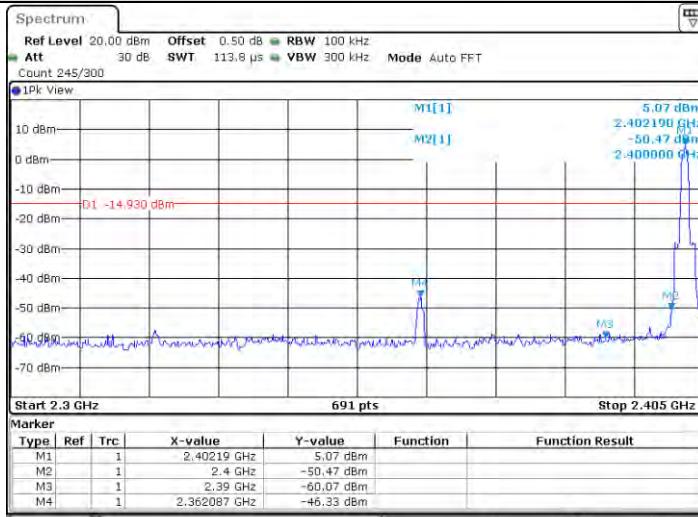CH00			Result
	Mark frequency(MHz)	Value (dBm)	
2400.00	-50.47	-14.93	Pass
2390.00	-60.07		
2362.09	-46.33		

Test Mode: $\pi/4$ -DQPSK Mode 2480 MHz

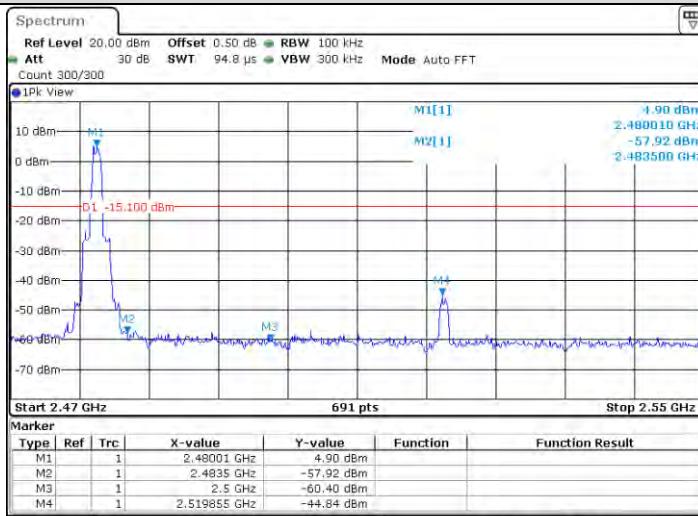CH78			Result
	Mark frequency(MHz)	Value (dBm)	
2483.50	-57.92	-15.10	Pass
2500.00	-60.40		
2519.86	-44.84		



Test Mode:π/4-DQPSK Hopping Mode

CH00



Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.00	-48.87	-17.15	Pass
2390.00	-47.49		
2388.83	-43.63		

Test Mode:π/4-DQPSK Hopping Mode

CH78




Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.50	-50.35	-17.30	Pass
2500.00	-49.88		
2508.96	-43.88		



Test Mode: 8-DPSK Mode 2402MHz

CH00

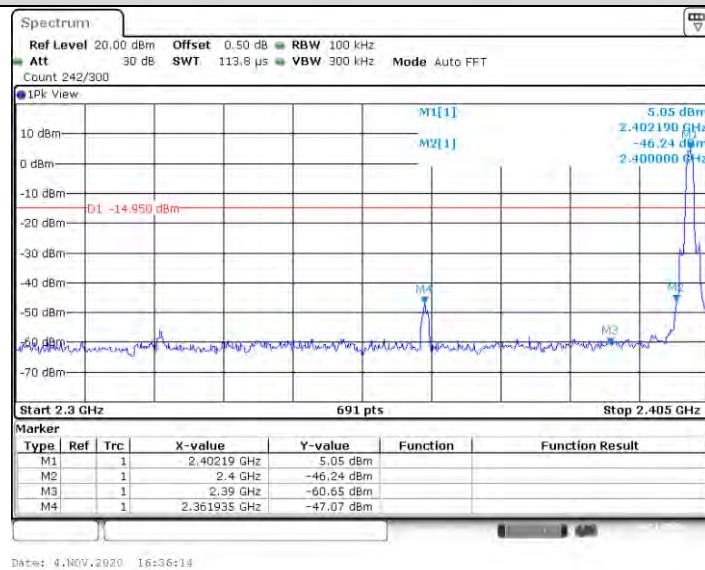

Mark frequency(MHz)

Value (dBm)

Limit (dBm)

Result

2400.00

-46.24

-14.95

Pass

2390.00


-60.65

2361.94

-47.07

Test Mode: 8-DPSK Mode 2480 MHz

CH78

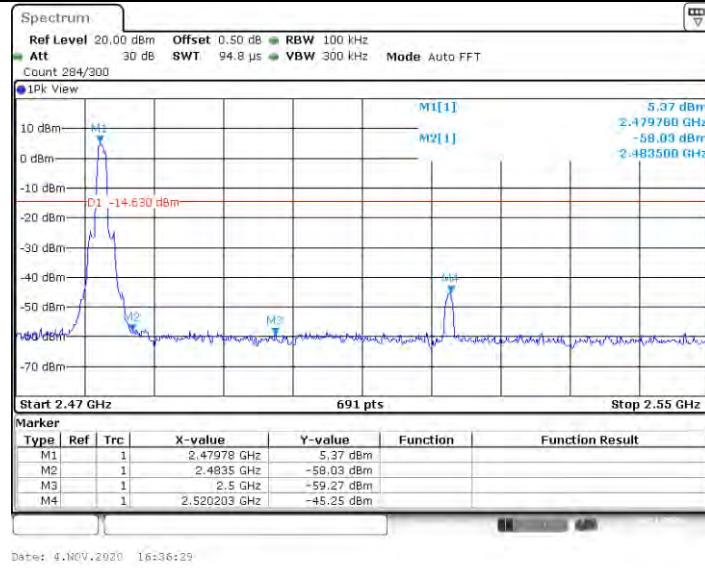

Mark frequency(MHz)

Value (dBm)

Limit (dBm)

Result

2483.50

-58.03

-14.63

Pass

2500.00

-59.27

2520.20

-45.25

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



Test Mode: 8-DPSK Hopping Mode

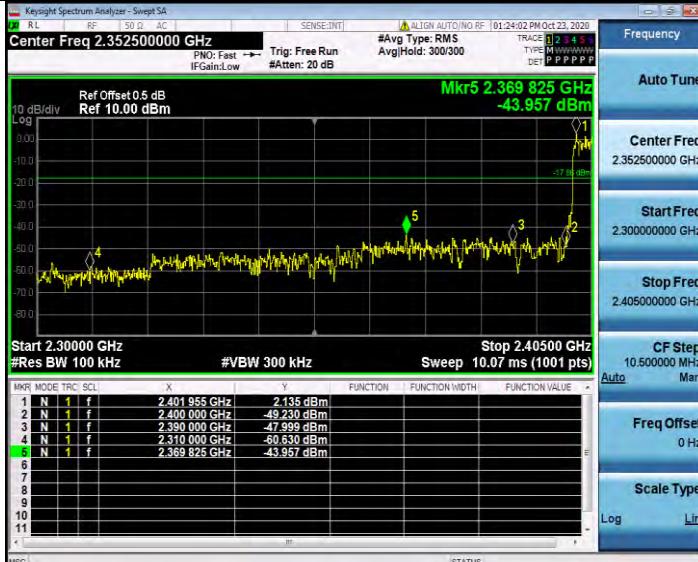
CH00				
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result	
2400.00	-49.23	-17.86	Pass	
2390.00	-48.00			
2369.83	-43.96			

Test Mode: 8-DPSK Hopping Mode

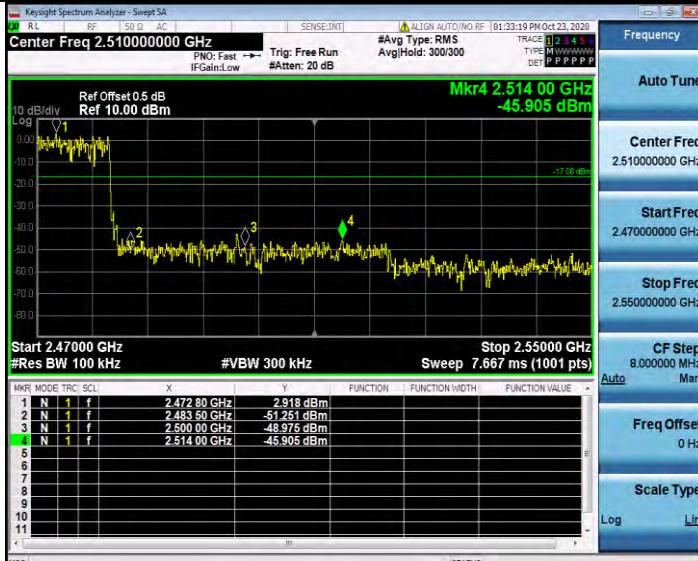CH78				
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result	
2483.50	-51.25	-17.08	Pass	
2500.00	-48.98			
2514.00	-45.91			

(3) Conducted Spurious Emissions Test

Test Mode: GFSK Mode 2402MHz

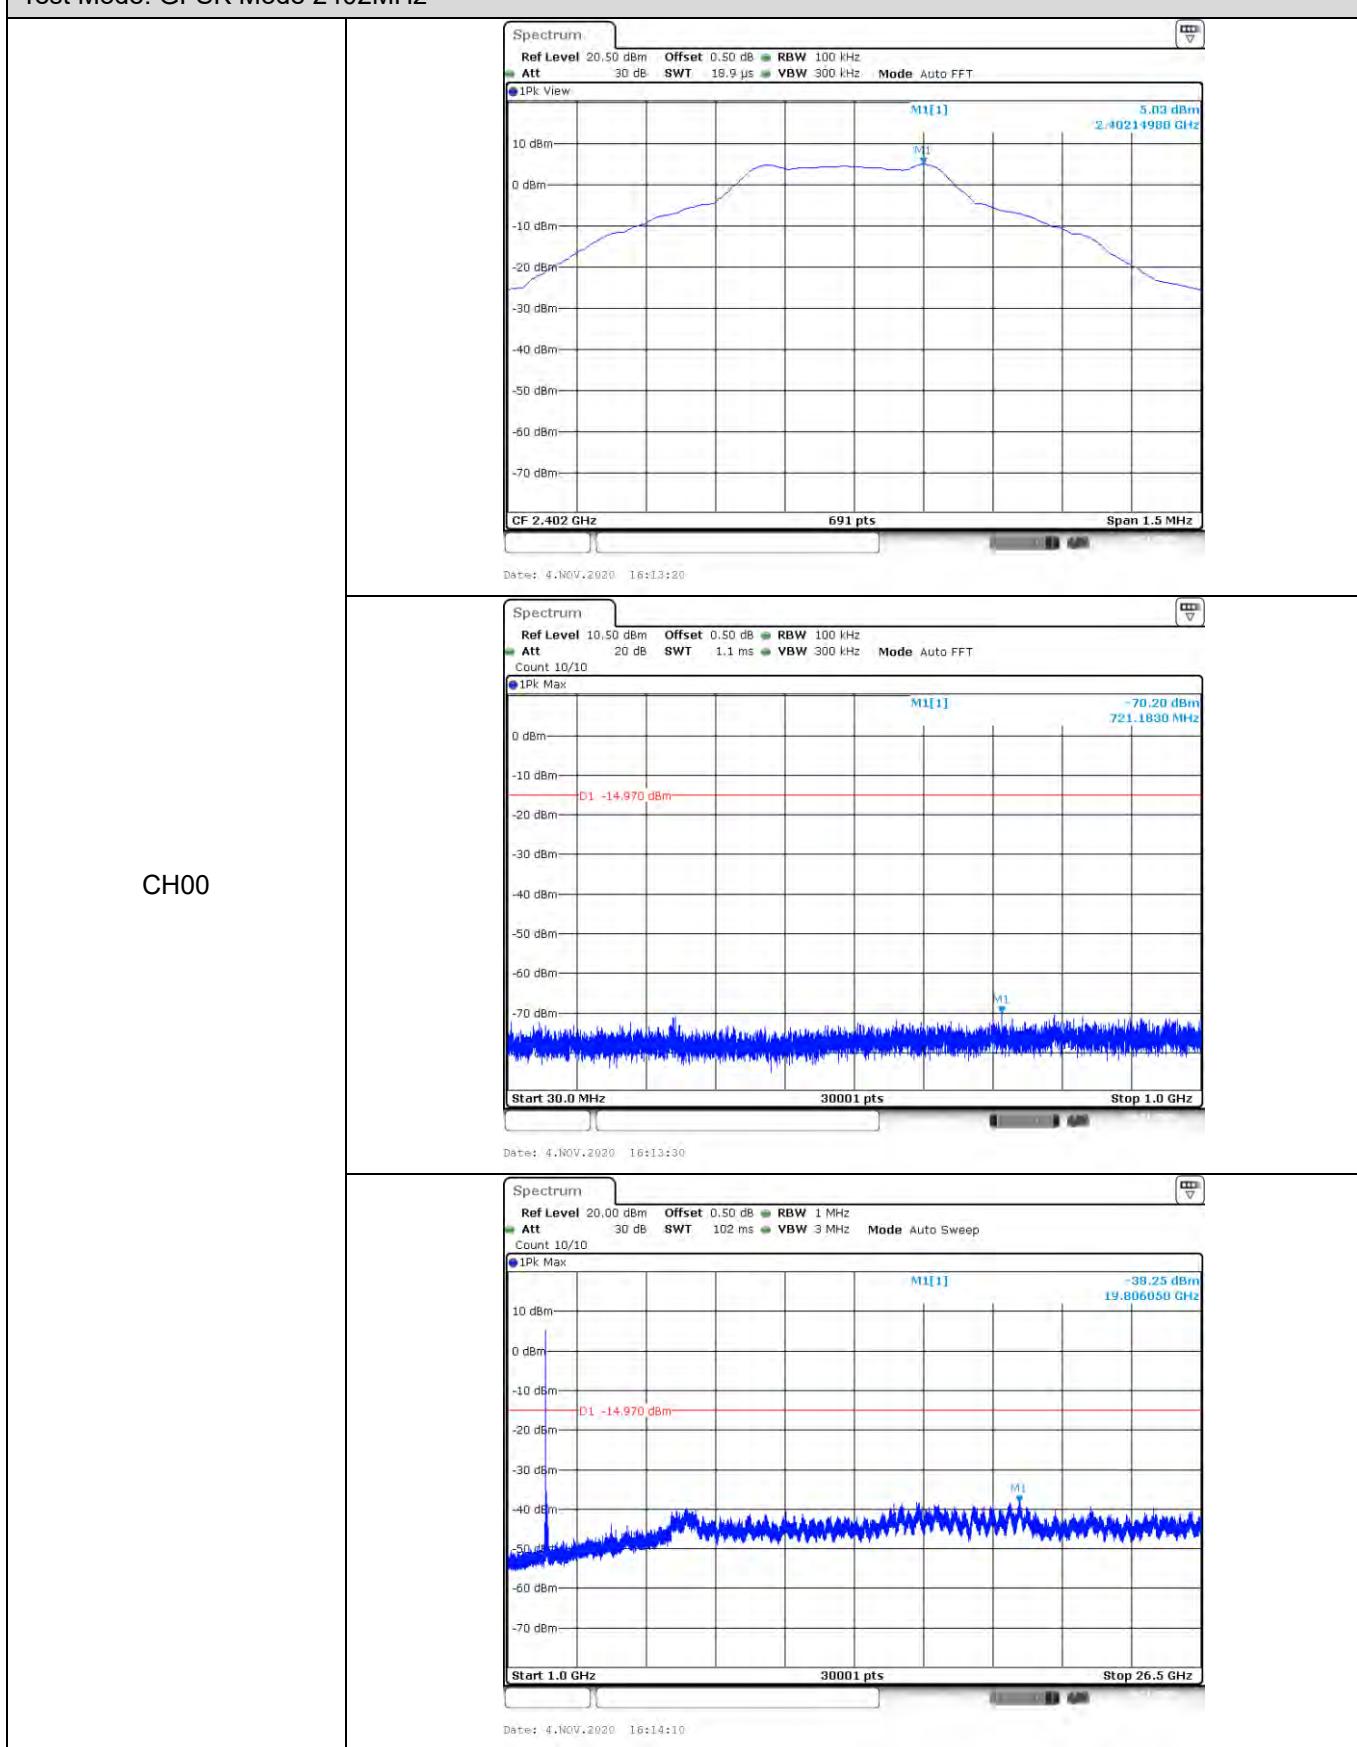

CTC Laboratories, Inc.



2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

Test Mode: GFSK Mode 2441 MHz

CH39

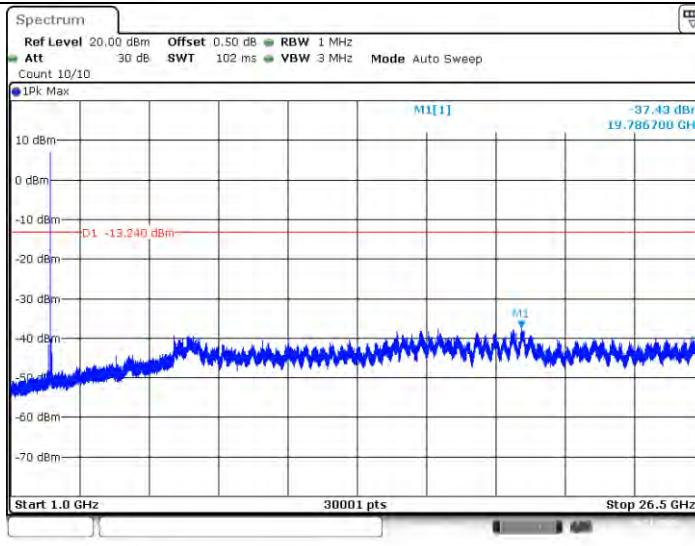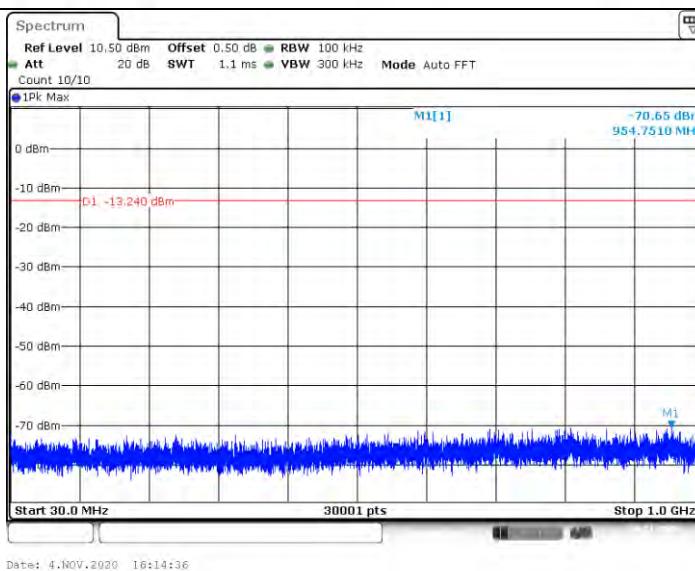

CTC Laboratories, Inc.



2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



Test Mode: GFSK Mode 2480 MHz

CH78

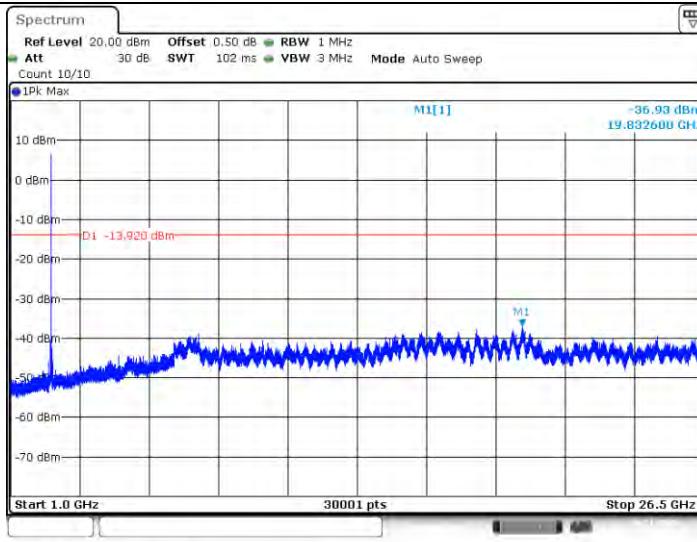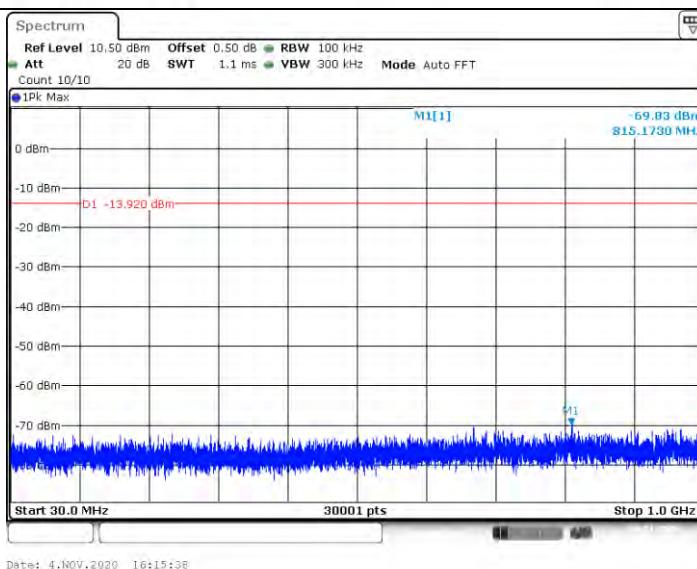


CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

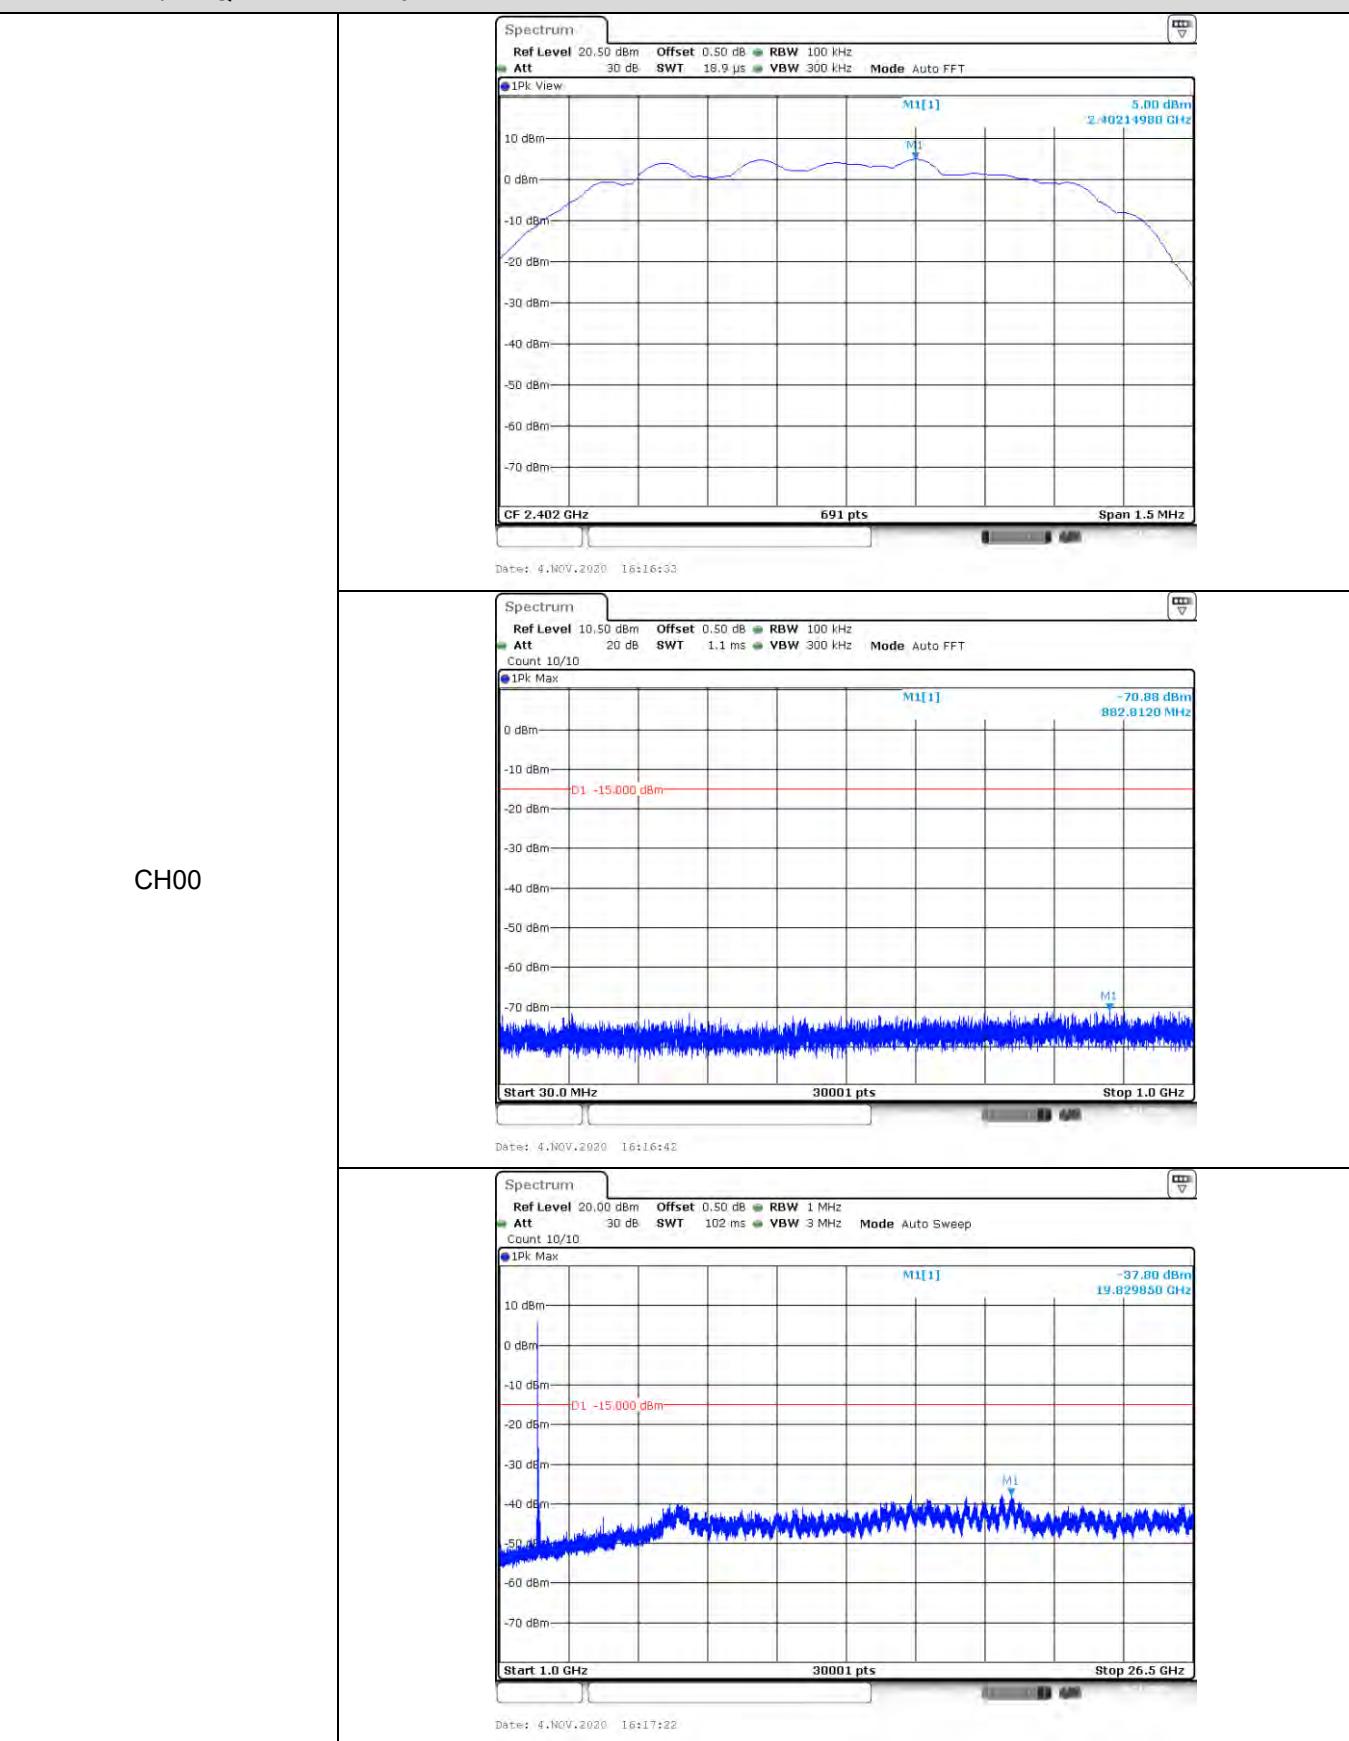Test Mode: $\pi/4$ -DQPSK Mode 2402MHz


CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

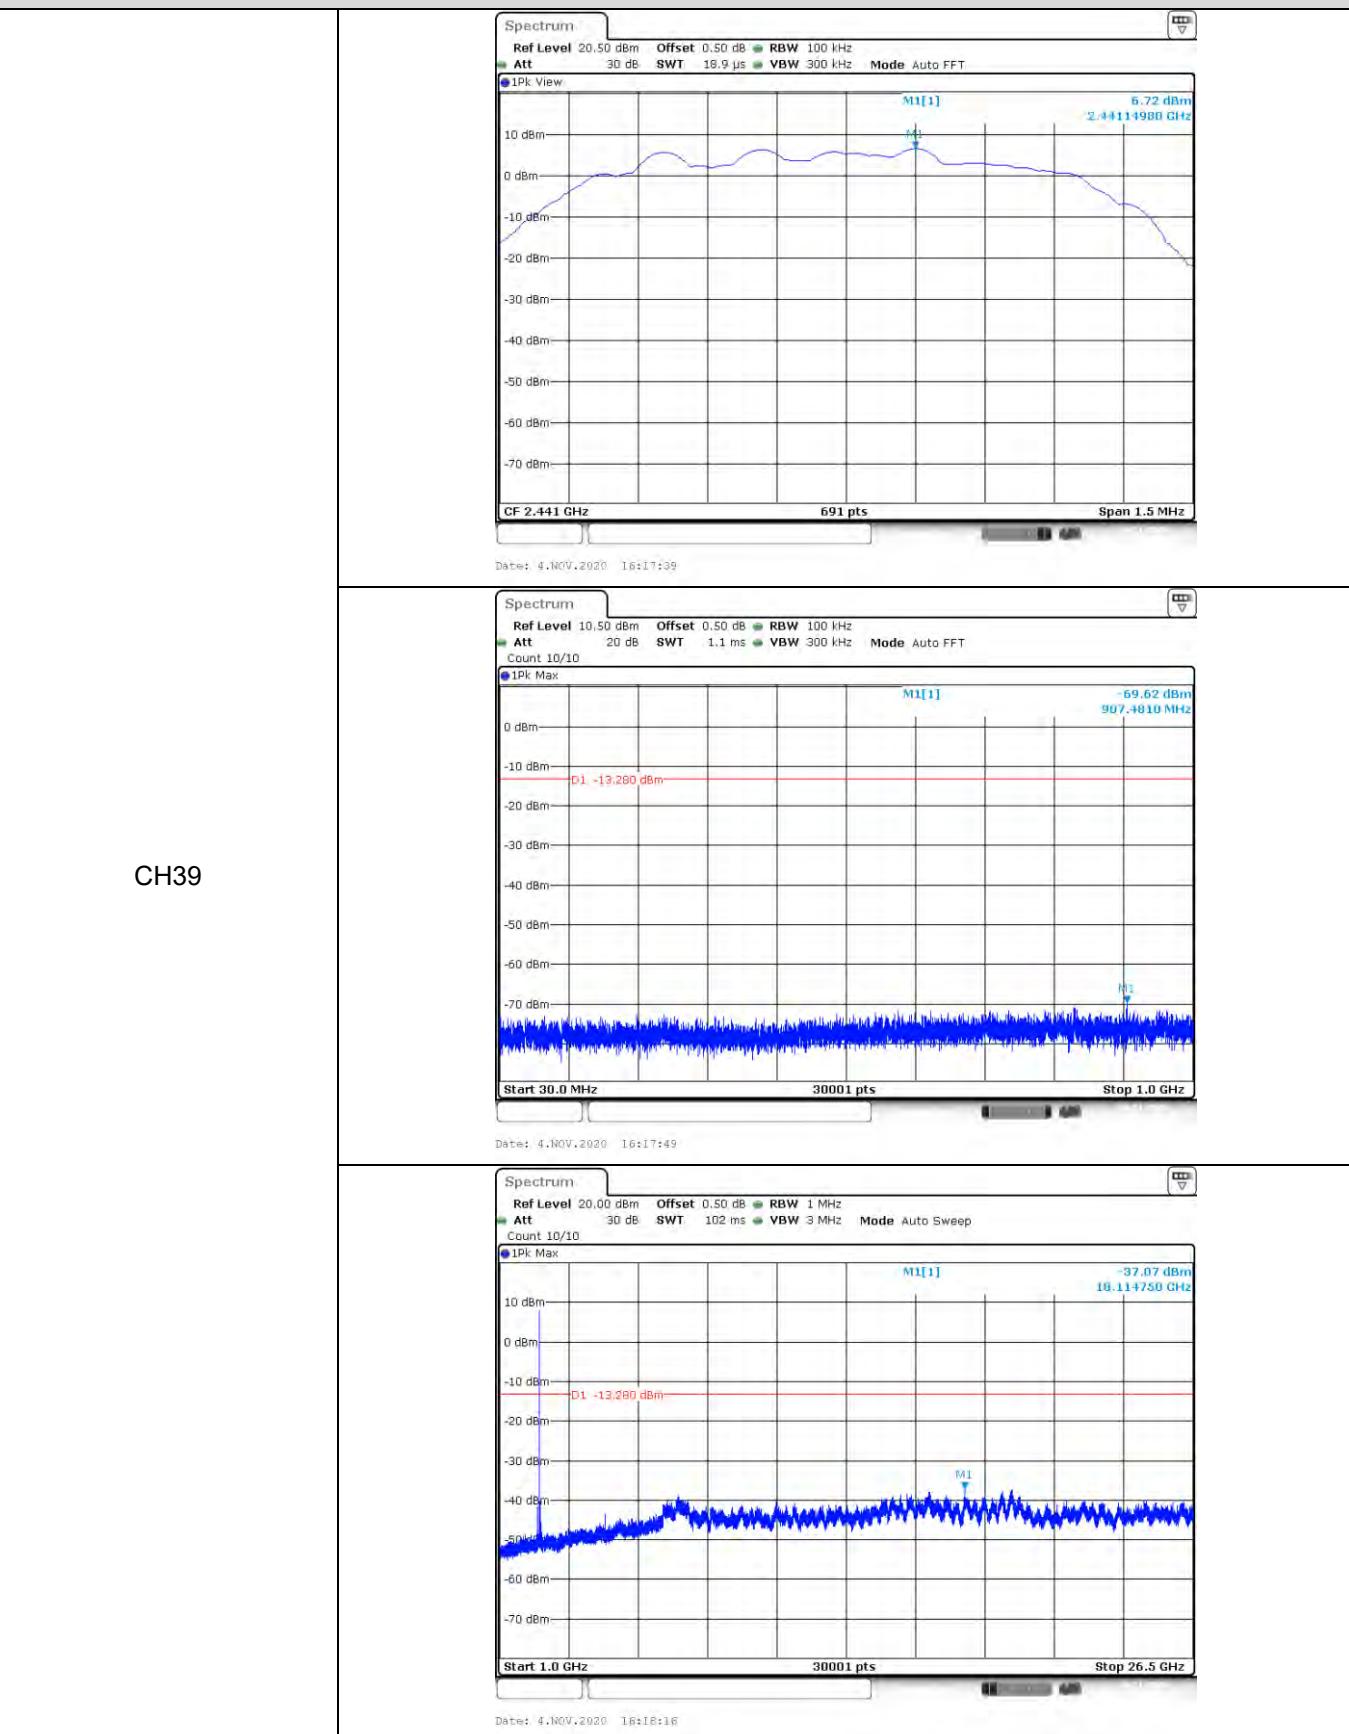Test Mode: $\pi/4$ -DQPSK Mode 2441 MHz

CTC Laboratories, Inc.


2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

Test Mode: $\pi/4$ -DQPSK Mode 2480 MHz


CH78



Date: 4.NOV.2020 16:18:42

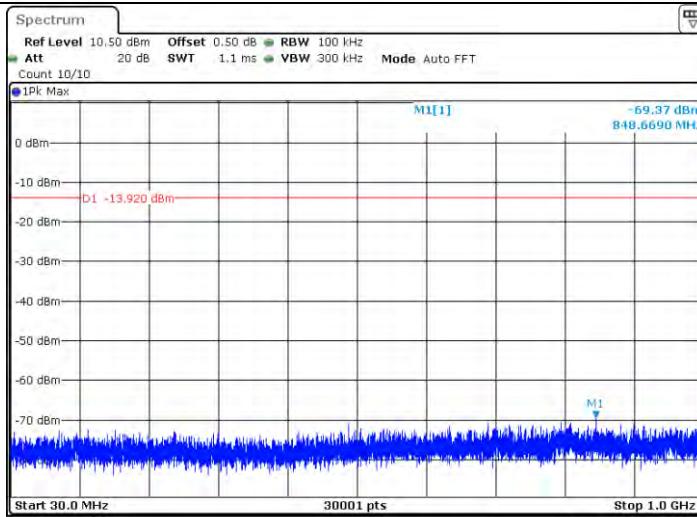

Date: 4.NOV.2020 16:18:52

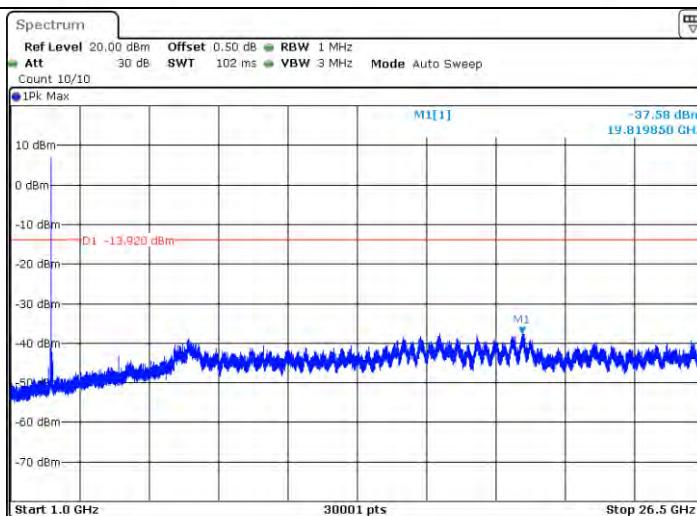

Date: 4.NOV.2020 16:19:19

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011


Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




Test Mode: 8-DPSK Mode 2402MHz


CH00

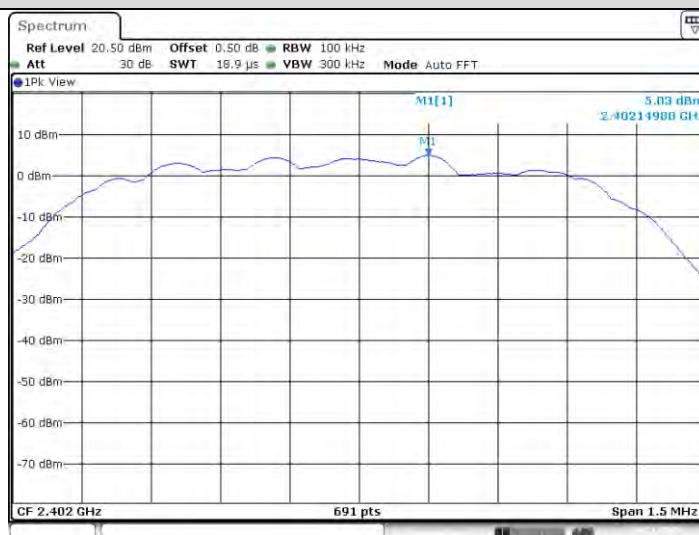

Date: 4.NOV.2020 16:19:48

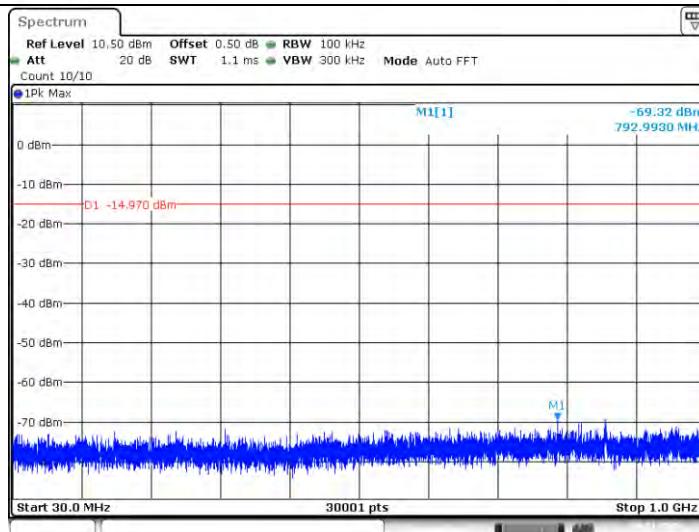

Date: 4.NOV.2020 16:19:55

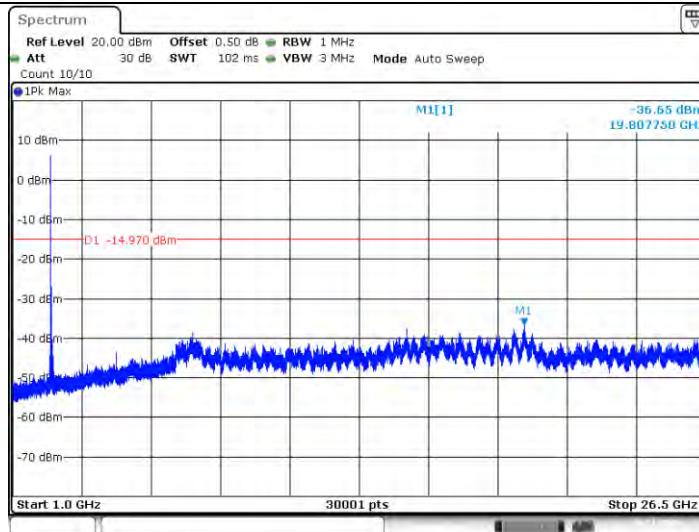

Date: 4.NOV.2020 16:20:36

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011


Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




Test Mode: 8-DPSK Mode 2441 MHz


CH39

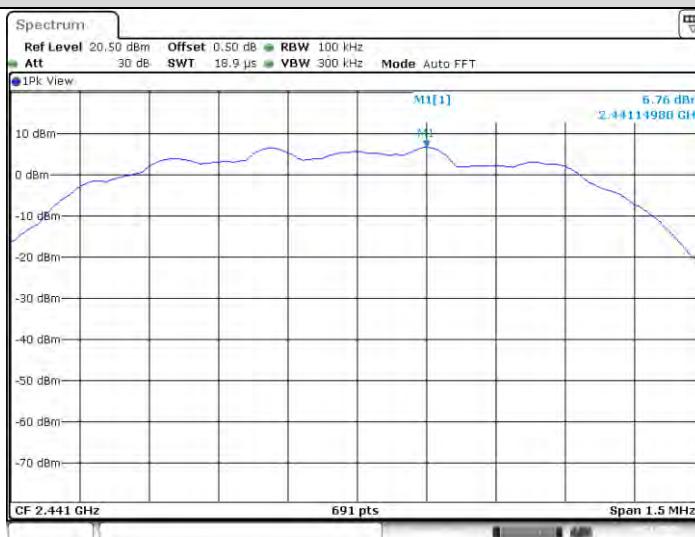

Date: 4.NOV.2020 16:20:52

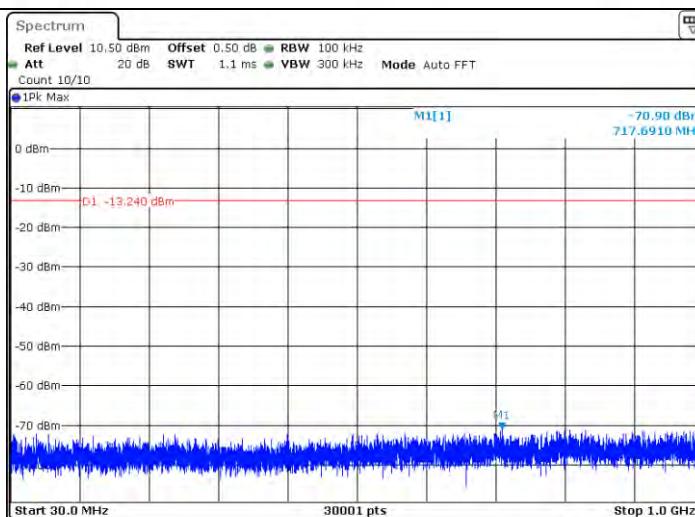

Date: 4.NOV.2020 16:21:02

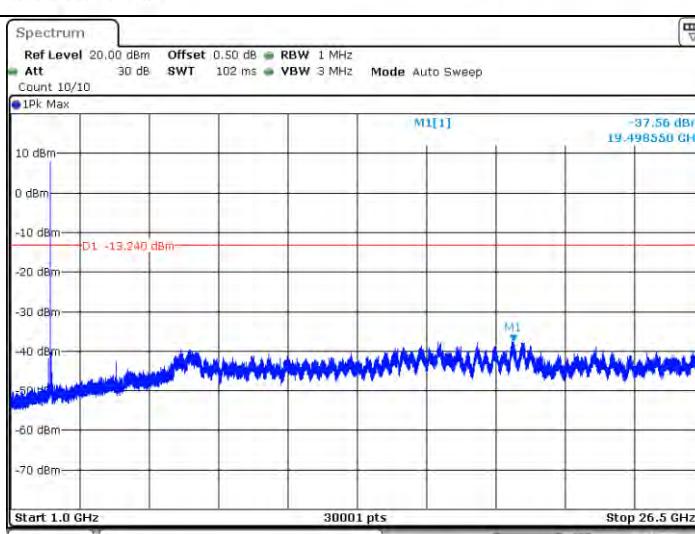

Date: 4.NOV.2020 16:21:30

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




Test Mode: 8-DPSK Mode 2480 MHz


CH78



Date: 4.NOV.2020 16:22:09

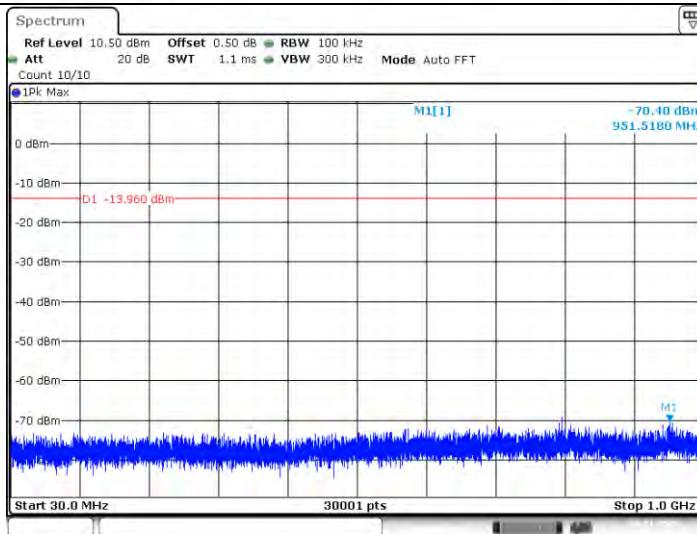

Date: 4.NOV.2020 16:22:05

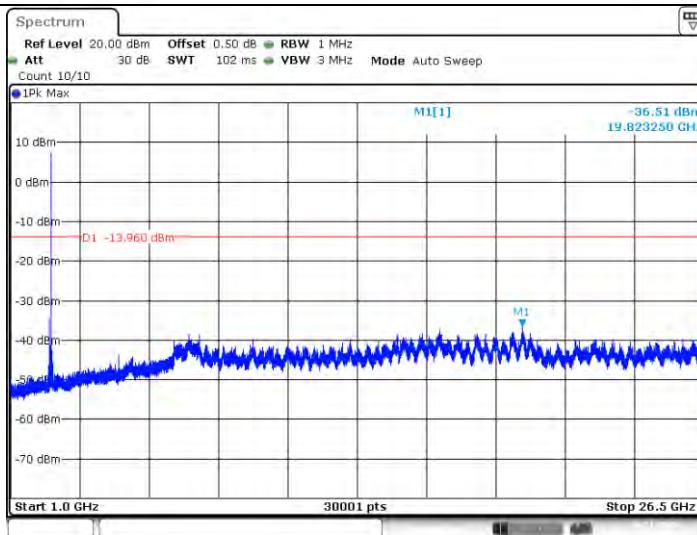

Date: 4.NOV.2020 16:22:32

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.4. 20dB Bandwidth

Limit

N/A

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3.


Test Results

Modulation type	Channel	99% Bandwidth (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
GFSK	00	863.2	939.0	626.0
	39	864.7	951.0	634.0
	78	880.6	942.0	628.0
$\pi/4$ -DQPSK	00	1208.5	1314.0	876.0
	39	1208.9	1323.0	882.0
	78	1206.2	1332.0	888.0
8-DPSK	00	1192.0	1335.0	890.0
	39	1201.8	1320.0	880.0
	78	1201.5	1338.0	892.0




99% Bandwidth		Modulation Type:	GFSK
	CH00		
	CH39		
	CH78		

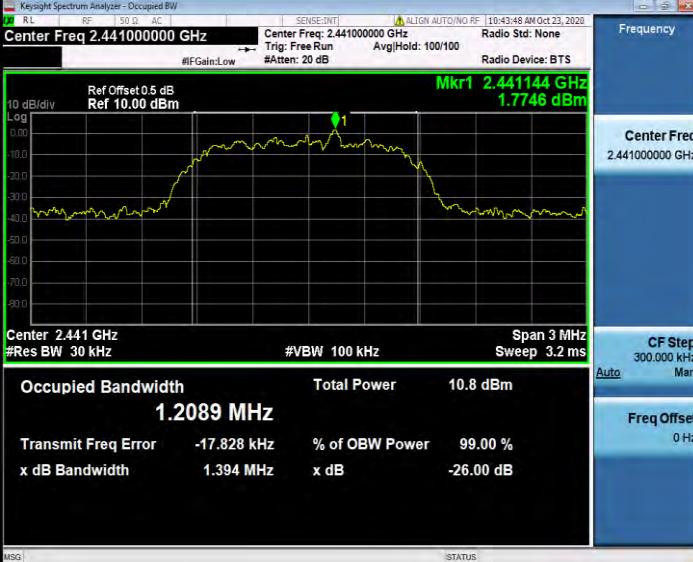

99% Bandwidth		Modulation Type: $\pi/4$ -DQPSK
CH00		 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Mkr1 2.402135 GHz 1.2631 dBm</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Center Freq 2.402000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 1.2085 MHz</p> <p>Total Power 10.8 dBm</p> <p>Transmit Freq Error -16.926 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.394 MHz x dB -26.00 dB</p>
CH39		 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Mkr1 2.441144 GHz 1.7746 dBm</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Center Freq 2.441000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 1.2089 MHz</p> <p>Total Power 10.8 dBm</p> <p>Transmit Freq Error -17.828 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.394 MHz x dB -26.00 dB</p>
CH78		 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Mkr1 2.479613 GHz -0.50756 dBm</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Center Freq 2.480000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 1.2062 MHz</p> <p>Total Power 10.3 dBm</p> <p>Transmit Freq Error -25.693 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 1.407 MHz x dB -26.00 dB</p>

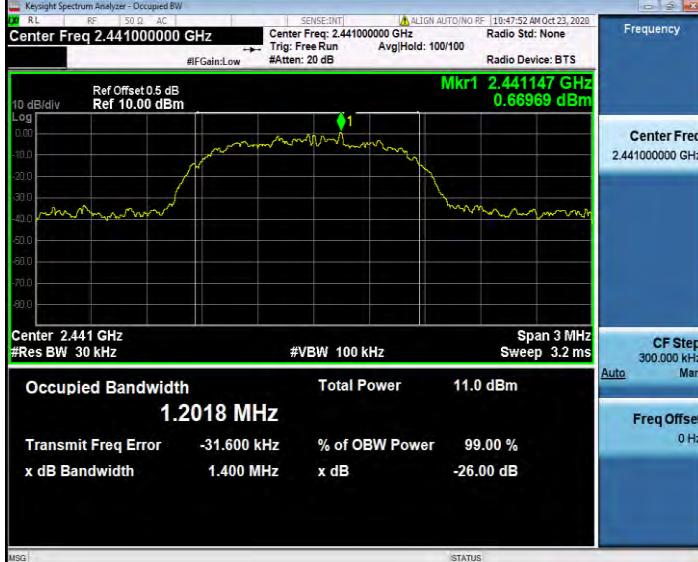

99% Bandwidth		Modulation Type:	8-DPSK
	CH00		
	CH39		
	CH78		



20 dB Bandwidth		Modulation Type:	GFSK																																				
	CH00	 <p>Keystream Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Span 3.000 MHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Sweep 3.200 ms (1001 pts)</p> <p>ΔMKr3 939 kHz 0.088 dB</p> <p>Marker Data:</p> <table border="1"><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 517 GHz</td><td>-31.929 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402 147 GHz</td><td>-11.140 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>A1</td><td>1</td><td>f (Δ)</td><td>939 kHz (Δ)</td><td>0.088 dB</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 517 GHz	-31.929 dBm				2	N	1	f	2.402 147 GHz	-11.140 dBm				3	A1	1	f (Δ)	939 kHz (Δ)	0.088 dB				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	1	f	2.401 517 GHz	-31.929 dBm																																		
2	N	1	f	2.402 147 GHz	-11.140 dBm																																		
3	A1	1	f (Δ)	939 kHz (Δ)	0.088 dB																																		
	CH39	 <p>Keystream Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Span 3.000 MHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Sweep 3.200 ms (1001 pts)</p> <p>ΔMKr3 951 kHz 0.133 dB</p> <p>Marker Data:</p> <table border="1"><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 511 GHz</td><td>-31.218 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.441 138 GHz</td><td>2.986 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>A1</td><td>1</td><td>f (Δ)</td><td>951 kHz (Δ)</td><td>0.133 dB</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 511 GHz	-31.218 dBm				2	N	1	f	2.441 138 GHz	2.986 dBm				3	A1	1	f (Δ)	951 kHz (Δ)	0.133 dB				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	1	f	2.440 511 GHz	-31.218 dBm																																		
2	N	1	f	2.441 138 GHz	2.986 dBm																																		
3	A1	1	f (Δ)	951 kHz (Δ)	0.133 dB																																		
	CH78	 <p>Keystream Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Span 3.000 MHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Sweep 3.200 ms (1001 pts)</p> <p>ΔMKr3 942 kHz -0.216 dB</p> <p>Marker Data:</p> <table border="1"><thead><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 517 GHz</td><td>-16.083 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.480 144 GHz</td><td>4.142 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>A1</td><td>1</td><td>f (Δ)</td><td>942 kHz (Δ)</td><td>-0.216 dB</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 517 GHz	-16.083 dBm				2	N	1	f	2.480 144 GHz	4.142 dBm				3	A1	1	f (Δ)	942 kHz (Δ)	-0.216 dB				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																															
1	N	1	f	2.479 517 GHz	-16.083 dBm																																		
2	N	1	f	2.480 144 GHz	4.142 dBm																																		
3	A1	1	f (Δ)	942 kHz (Δ)	-0.216 dB																																		



20 dB Bandwidth		Modulation Type:	π/4-DQPSK
	CH00		<p>Frequency Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.400500000 GHz</p> <p>Stop Freq 2.403500000 GHz</p> <p>CF Step 300.000 kHz Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
	CH39		<p>Frequency Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.439500000 GHz</p> <p>Stop Freq 2.442500000 GHz</p> <p>CF Step 300.000 kHz Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
	CH78		<p>Frequency Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.478500000 GHz</p> <p>Stop Freq 2.481500000 GHz</p> <p>CF Step 300.000 kHz Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>



CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.5. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b :

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration



Test Procedure

3. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
4. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) \geq 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.


Test Mode

Please refer to the clause 2.3.

Test Results

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	00	0.984	626.0	Pass
	39	1.002	634.0	
	78	0.998	628.0	
$\pi/4$ -DQPSK	00	1.011	876.0	Pass
	39	1.002	882.0	
	78	1.007	888.0	
8-DPSK	00	1.005	890.0	Pass
	39	0.993	880.0	
	78	1.021	892.0	

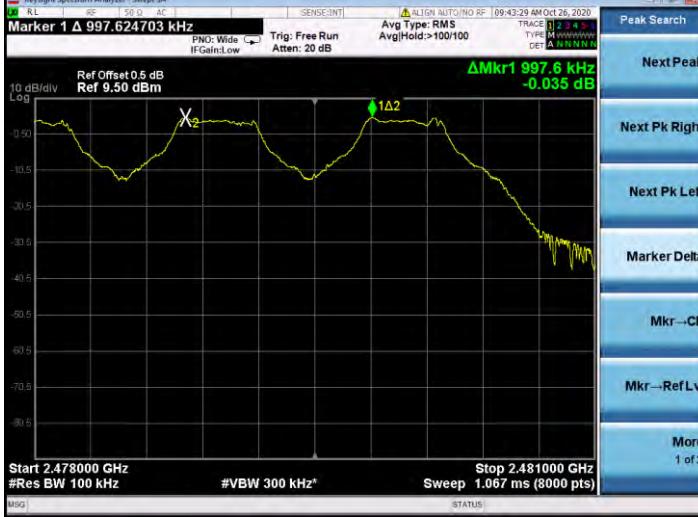

Modulation Type:		GFSK
CH00		 <p>Keystream Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.402500000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Start 2.401000 GHz Stop 2.404000 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)</p> <p>ΔMkr2 984 kHz -0.304 dB</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402500000 GHz</p> <p>Start Freq 2.401000000 GHz</p> <p>Stop Freq 2.404000000 GHz</p> <p>CF Step 300.000 kHz Auto</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
CH39		 <p>Keystream Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.441500000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Start 2.440000 GHz Stop 2.443000 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)</p> <p>ΔMkr2 1.002 MHz -0.037 dB</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441500000 GHz</p> <p>Start Freq 2.440000000 GHz</p> <p>Stop Freq 2.443000000 GHz</p> <p>CF Step 300.000 kHz Auto</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
CH78		 <p>Keystream Spectrum Analyzer - Sweep SA</p> <p>Marker 1 Δ 997.624703 kHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 9.50 dBm</p> <p>Start 2.478000 GHz Stop 2.481000 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (8000 pts)</p> <p>ΔMkr1 997.6 kHz -0.035 dB</p> <p>Peak Search</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Marker Delta</p> <p>Mkr→CF</p> <p>Mkr→Ref Lvl</p> <p>More 1 of 2</p>



Modulation Type:		$\pi/4$ -DQPSK
CH00		
CH39		
CH78		



Modulation Type:		8-DPSK
CH00		 <p>Keystream Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.402500000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Start 2.401000 GHz Stop 2.404000 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz</p> <p>Sweep 1.000 ms (1001 pts)</p> <p>ΔMkr2 1.005 MHz 0.046 dB</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402500000 GHz</p> <p>Start Freq 2.401000000 GHz</p> <p>Stop Freq 2.404000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
CH39		 <p>Keystream Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.441500000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Start 2.440000 GHz Stop 2.443000 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz</p> <p>Sweep 1.000 ms (1001 pts)</p> <p>ΔMkr2 993 kHz 0.086 dB</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441500000 GHz</p> <p>Start Freq 2.440000000 GHz</p> <p>Stop Freq 2.443000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
CH78		 <p>Keystream Spectrum Analyzer - Sweep SA</p> <p>Marker 1 Δ 1.020877610 MHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 9.50 dBm</p> <p>Start 2.478000 GHz Stop 2.481000 GHz</p> <p>#Res BW 100 kHz #VBW 300 kHz</p> <p>Sweep 1.067 ms (8000 pts)</p> <p>ΔMkr1 1.020 9 MHz 0.485 dB</p> <p>Peak Search</p> <p>Next Peak</p> <p>Next Pk Right</p> <p>Next Pk Left</p> <p>Marker Delta</p> <p>Mkr→CF</p> <p>Mkr→Ref Lvl</p> <p>More 1 of 2</p>


3.6. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15

Test Configuration



Test Procedure


1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.

Test Mode

Please refer to the clause 2.3.

Test Result

Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4-DQPSK	79		
8DPSK	79		

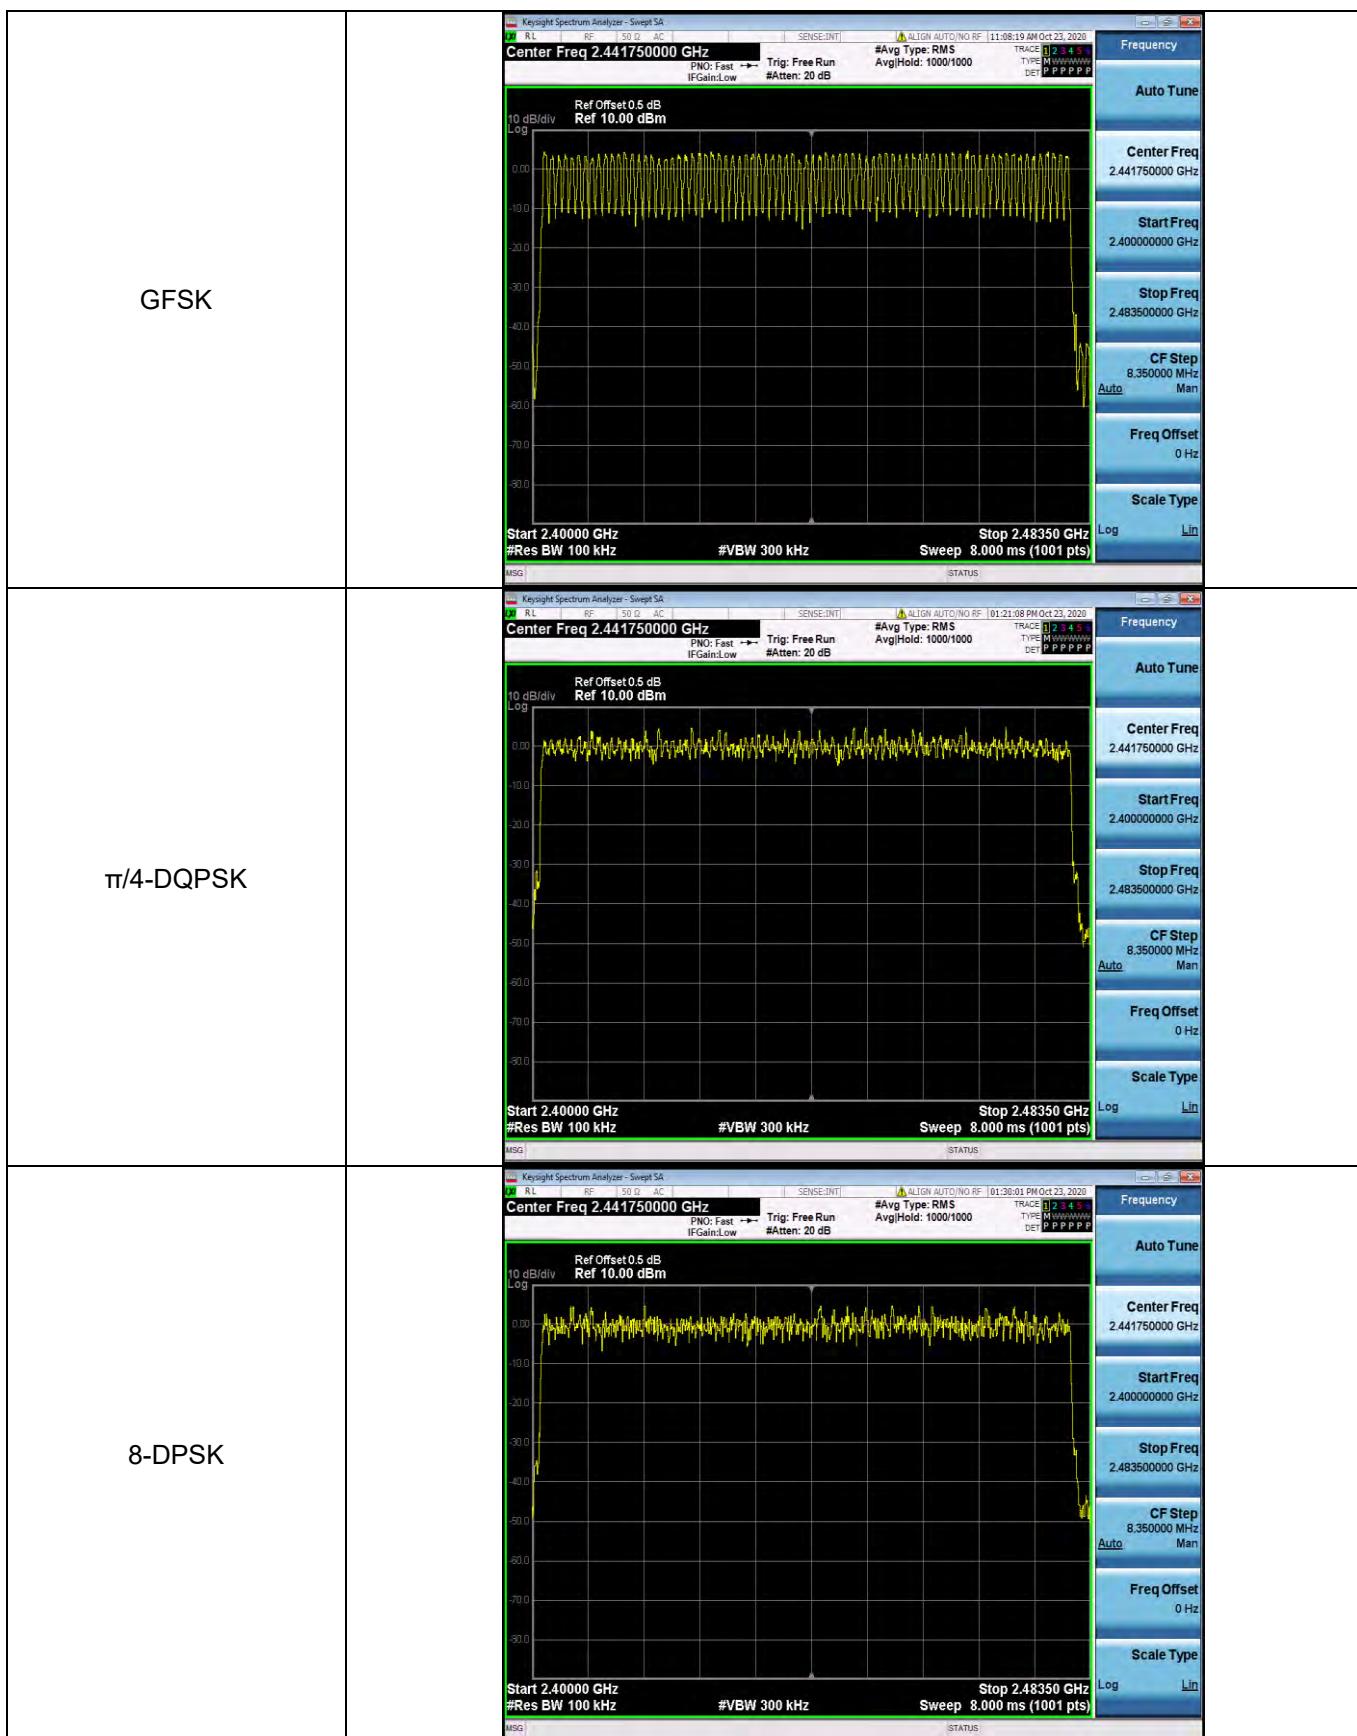

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.7. Dwell Time

Limit

Section	Test Item	Limit
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW \geq RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.3.


**Test Result**

Modulation type	Channel	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
GFSK	DH1	2441	0.393	125.76	31.60	≤ 0.40	Pass
	DH3	2441	1.650	264.00	31.60		
	DH5	2441	2.896	308.91	31.60		
$\pi/4$ -DQPSK	2DH1	2441	0.398	127.36	31.60	≤ 0.40	Pass
	2DH3	2441	1.654	264.64	31.60		
	2DH5	2441	2.903	309.65	31.60		
8-DPSK	3DH1	2441	0.403	128.96	31.60	≤ 0.40	Pass
	3DH3	2441	1.654	264.64	31.60		
	3DH5	2441	2.905	309.87	31.60		




Note: 1DH1/2DH1/3DH1 Total of Dwell= Pulse Time*(1600/2)*31.6/79


1DH3/2DH3/3DH3 Total of Dwell= Pulse Time*(1600/4)*31.6/79

1DH5/2DH5/3DH5 Total of Dwell= Pulse Time*(1600/6)*31.6/79

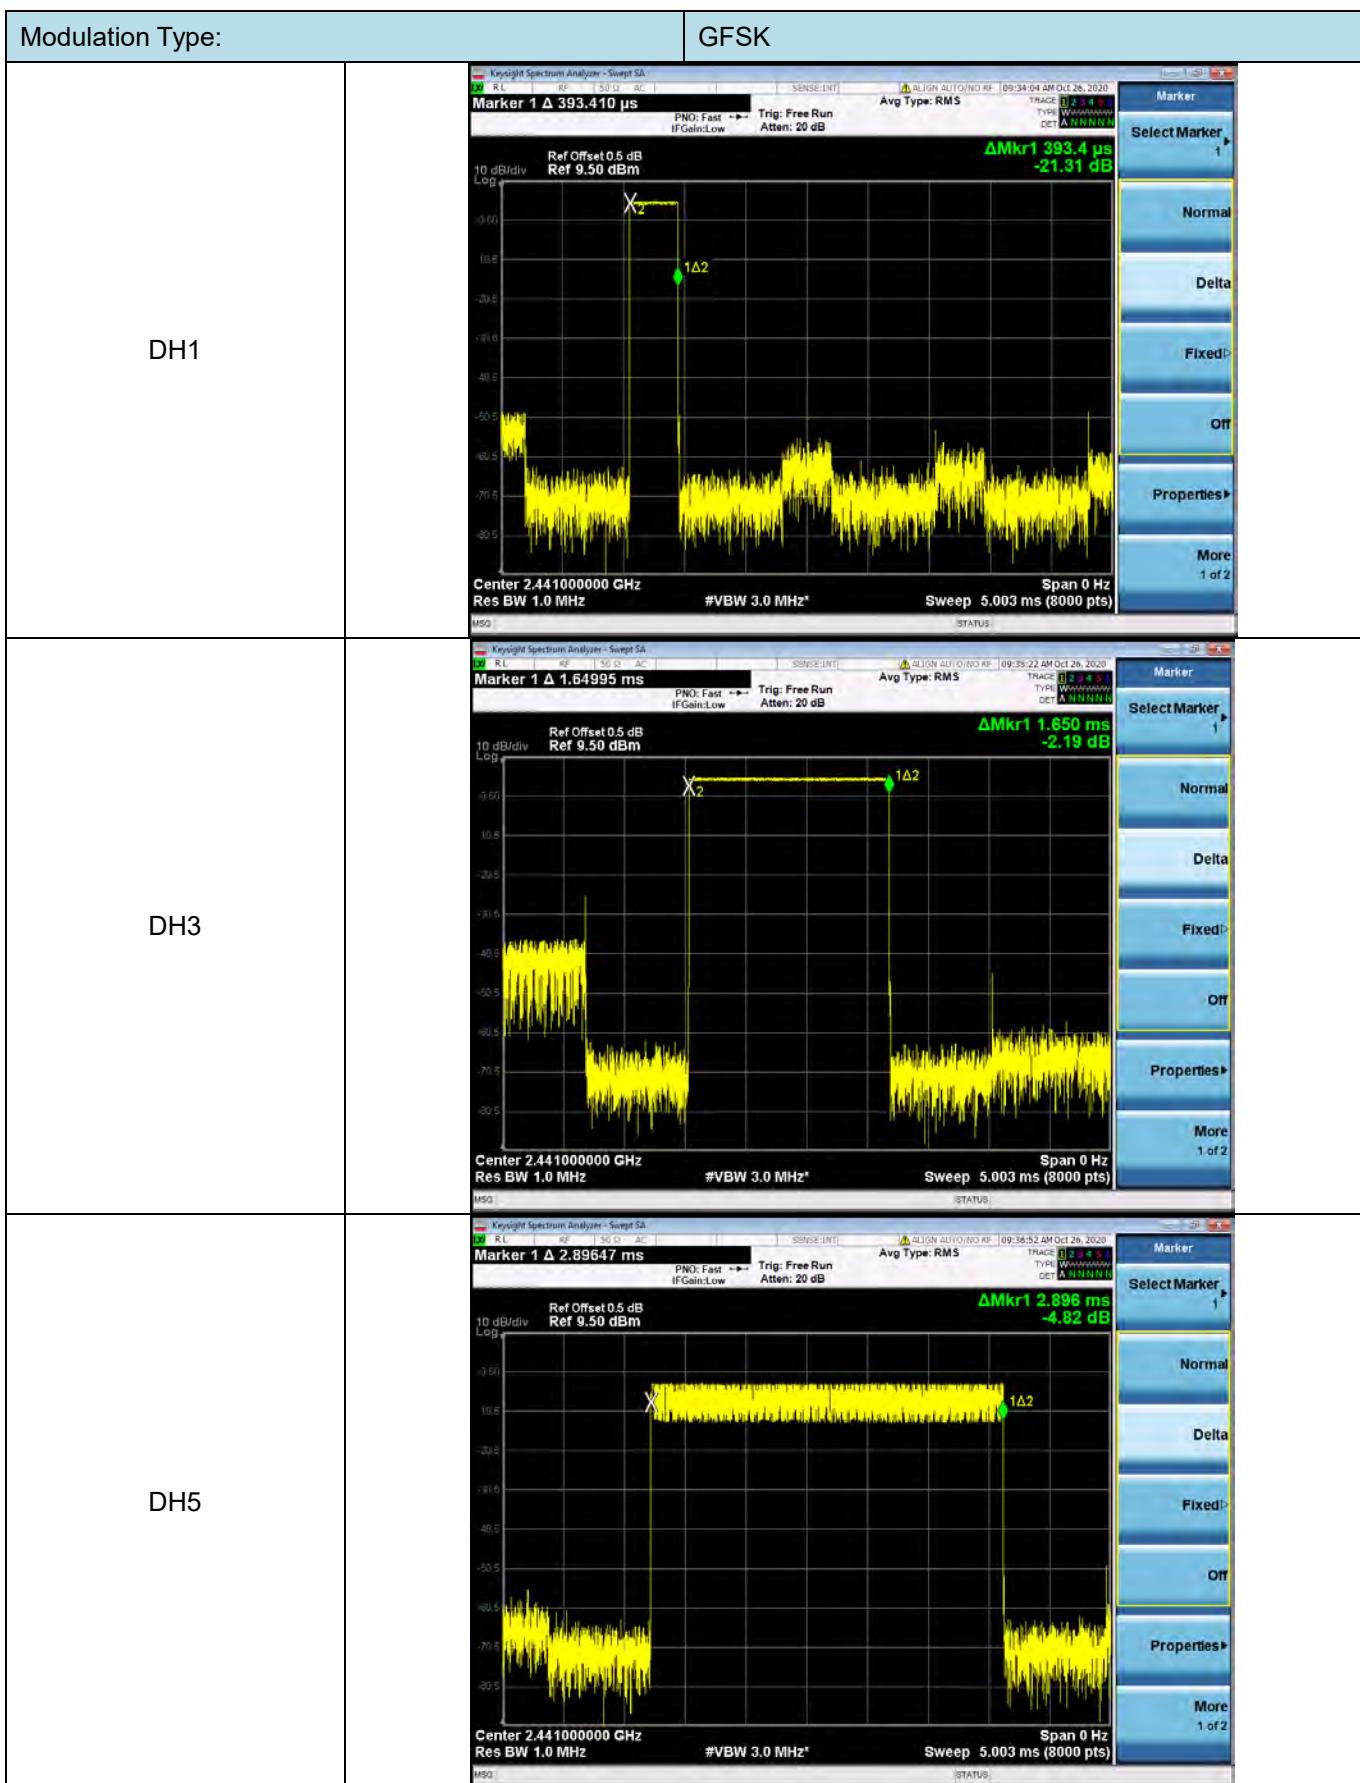

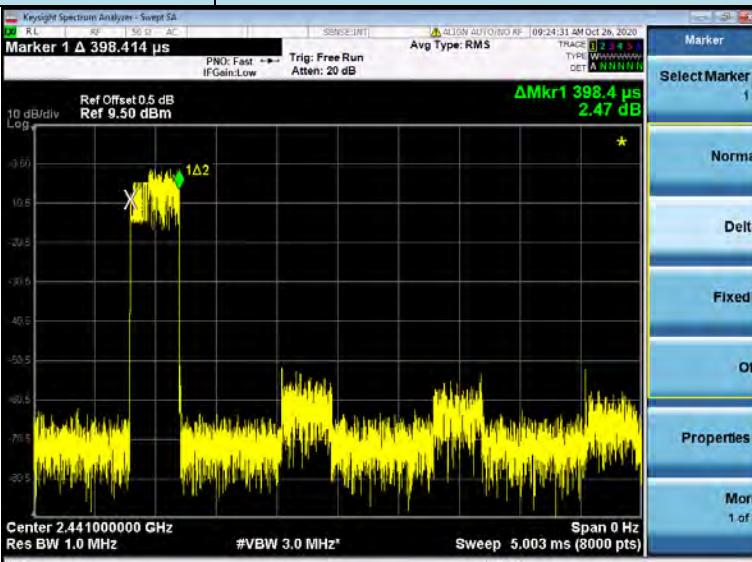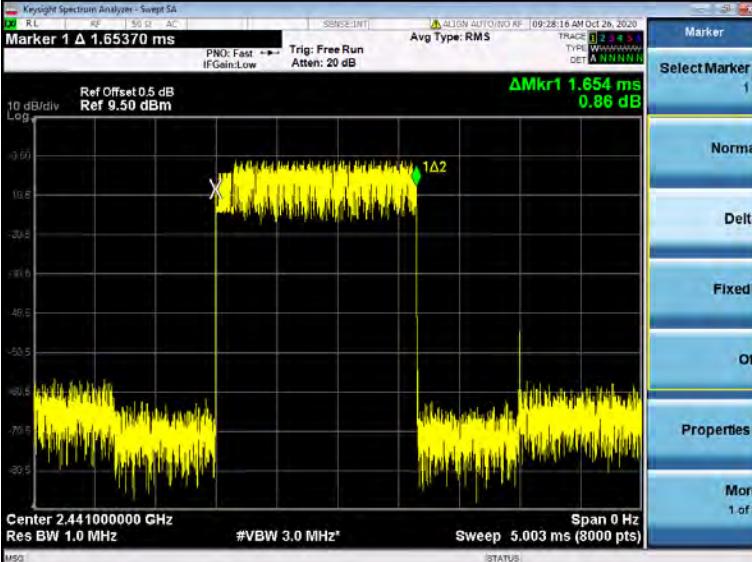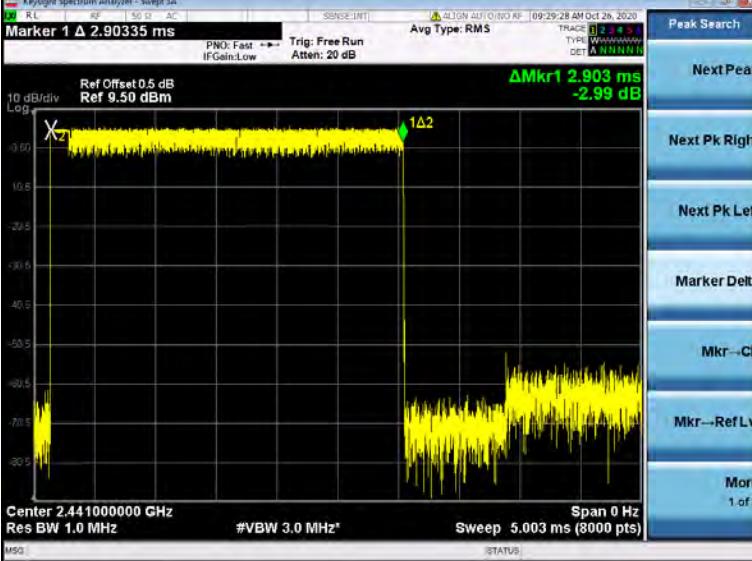

Modulation Type:		$\pi/4$ -DQPSK
2DH1		
2DH3		
2DH5		

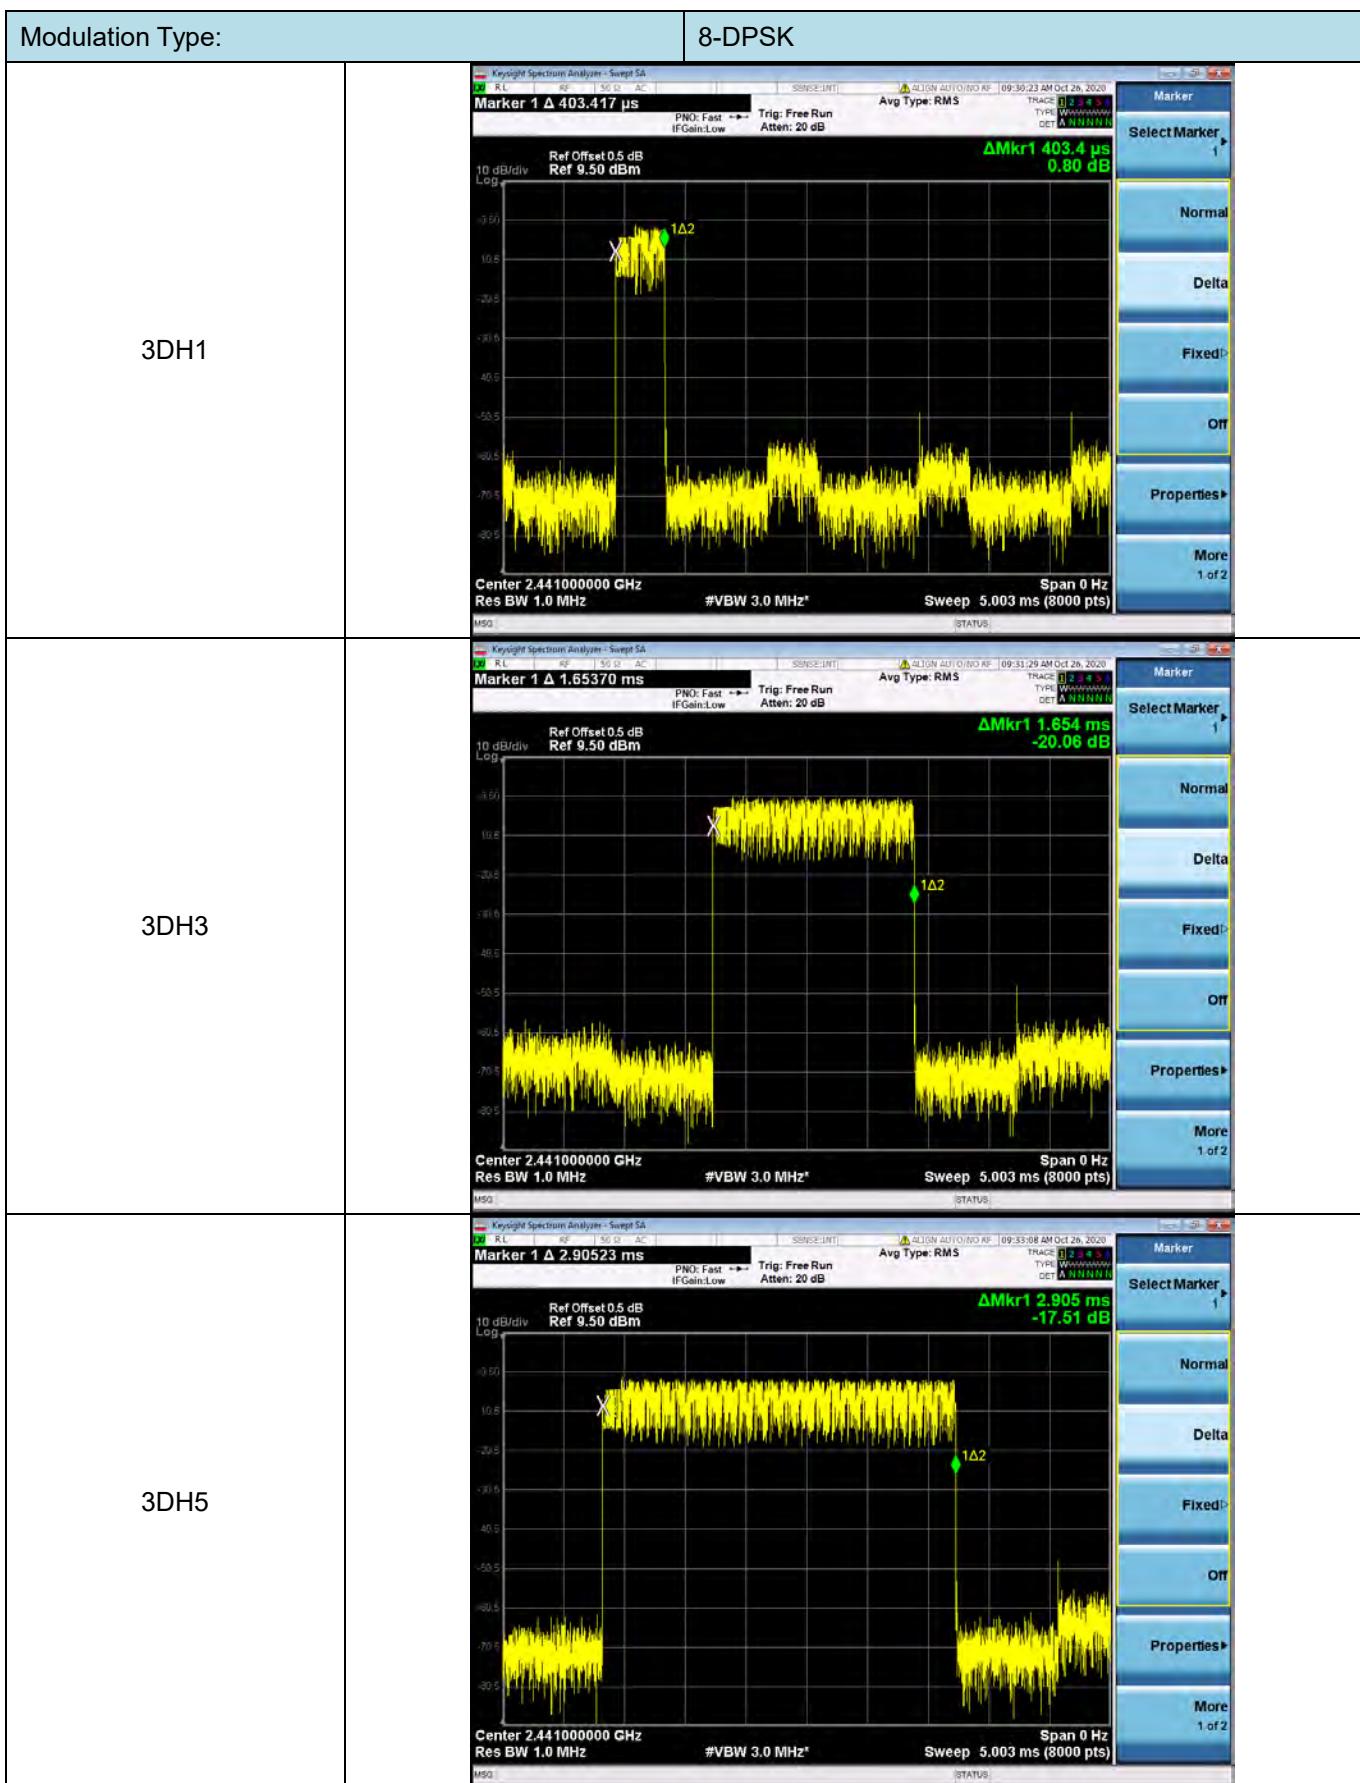




3.8. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.
RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

Test Mode

Please refer to the clause 2.3.


Test Result

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	4.55	≤ 21.00	Pass
	39	4.66		
	78	4.67		
π/4-DQPSK	00	5.92	≤ 21.00	Pass
	39	5.97		
	78	5.95		
8-DPSK	00	6.32	≤ 21.00	Pass
	39	6.42		
	78	6.36		



Modulation Type:		GFSK
CH00		 <p>Keysight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Mkr1 2.401 853 GHz 4.554 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00</p> <p>Center 2.402000 GHz</p> <p>#Res BW 2.0 MHz</p> <p>#VBW 3.0 MHz</p> <p>Span 3.000 MHz</p> <p>Sweep 1.000 ms (1001 pts)</p> <p>MSG</p> <p>ALIGN AUTO/NO RF</p> <p>#Avg Type: RMS</p> <p>#Avg Hold: 100/100</p> <p>TRACE 1 2 3 4 5</p> <p>TYPE M M M M M</p> <p>DET P P P P P</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.400500000 GHz</p> <p>Stop Freq 2.403500000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p> <p>STATUS</p>
CH39		 <p>Keysight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Mkr1 2.440 811 GHz 4.663 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00</p> <p>Center 2.441000 GHz</p> <p>#Res BW 2.0 MHz</p> <p>#VBW 3.0 MHz</p> <p>Span 3.000 MHz</p> <p>Sweep 1.000 ms (1001 pts)</p> <p>MSG</p> <p>ALIGN AUTO/NO RF</p> <p>#Avg Type: RMS</p> <p>#Avg Hold: 100/100</p> <p>TRACE 1 2 3 4 5</p> <p>TYPE M M M M M</p> <p>DET P P P P P</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.439500000 GHz</p> <p>Stop Freq 2.442500000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p> <p>STATUS</p>
CH78		 <p>Keysight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Mkr1 2.479 885 GHz 4.666 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00</p> <p>Center 2.480000 GHz</p> <p>#Res BW 2.0 MHz</p> <p>#VBW 3.0 MHz</p> <p>Span 3.000 MHz</p> <p>Sweep 1.000 ms (1001 pts)</p> <p>MSG</p> <p>ALIGN AUTO/NO RF</p> <p>#Avg Type: RMS</p> <p>#Avg Hold: 100/100</p> <p>TRACE 1 2 3 4 5</p> <p>TYPE M M M M M</p> <p>DET P P P P P</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.478500000 GHz</p> <p>Stop Freq 2.481500000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p> <p>STATUS</p>

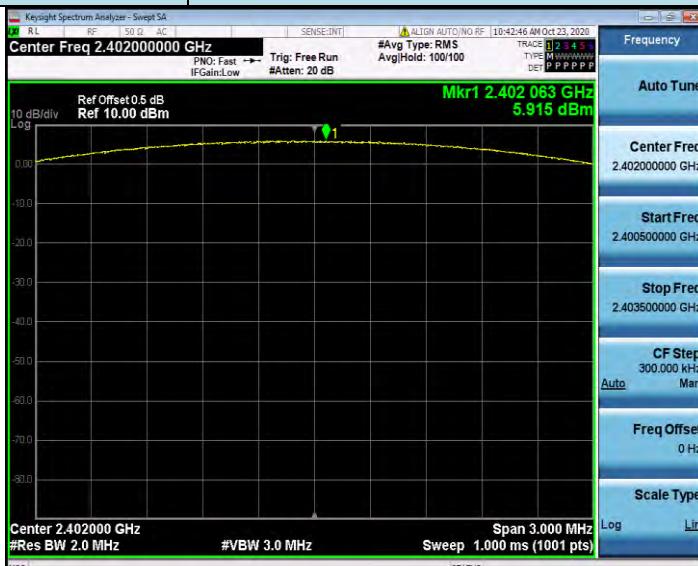

Modulation Type:		$\pi/4$ -DQPSK
CH00		
CH39		
CH78		



Modulation Type:		8-DPSK
CH00		 <p>Keysight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Mkr1 2.402 015 GHz 6.315 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>0.00</p> <p>10.0</p> <p>20.0</p> <p>30.0</p> <p>40.0</p> <p>50.0</p> <p>60.0</p> <p>70.0</p> <p>80.0</p> <p>Center 2.402000 GHz</p> <p>#Res BW 2.0 MHz</p> <p>#VBW 3.0 MHz</p> <p>Span 3.000 MHz</p> <p>Sweep 1.000 ms (1001 pts)</p> <p>MSG</p> <p>ALIGN AUTO/NO RF</p> <p>10:46:48 AM Oct 23, 2020</p> <p>#Avg Type: RMS</p> <p>Avg/Hold: 100/100</p> <p>TRACE 1 2 3 4 5</p> <p>TYPE M W W W W W</p> <p>DET P P P P P P</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.400500000 GHz</p> <p>Stop Freq 2.403500000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p> <p>STATUS</p>
CH39		 <p>Keysight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Mkr1 2.441 042 GHz 6.423 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>0.00</p> <p>10.0</p> <p>20.0</p> <p>30.0</p> <p>40.0</p> <p>50.0</p> <p>60.0</p> <p>70.0</p> <p>80.0</p> <p>Center 2.441000 GHz</p> <p>#Res BW 2.0 MHz</p> <p>#VBW 3.0 MHz</p> <p>Span 3.000 MHz</p> <p>Sweep 1.000 ms (1001 pts)</p> <p>MSG</p> <p>ALIGN AUTO/NO RF</p> <p>10:47:59 AM Oct 23, 2020</p> <p>#Avg Type: RMS</p> <p>Avg/Hold: 100/100</p> <p>TRACE 1 2 3 4 5</p> <p>TYPE M W W W W W</p> <p>DET P P P P P P</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.439500000 GHz</p> <p>Stop Freq 2.442500000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p> <p>STATUS</p>
CH78		 <p>Keysight Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 0.5 dB</p> <p>Ref 10.00 dBm</p> <p>Mkr1 2.480 009 GHz 6.356 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>0.00</p> <p>10.0</p> <p>20.0</p> <p>30.0</p> <p>40.0</p> <p>50.0</p> <p>60.0</p> <p>70.0</p> <p>80.0</p> <p>Center 2.480000 GHz</p> <p>#Res BW 2.0 MHz</p> <p>#VBW 3.0 MHz</p> <p>Span 3.000 MHz</p> <p>Sweep 1.000 ms (1001 pts)</p> <p>MSG</p> <p>ALIGN AUTO/NO RF</p> <p>10:50:17 AM Oct 23, 2020</p> <p>#Avg Type: RMS</p> <p>Avg/Hold: 100/100</p> <p>TRACE 1 2 3 4 5</p> <p>TYPE M W W W W W</p> <p>DET P P P P P P</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.478500000 GHz</p> <p>Stop Freq 2.481500000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p> <p>STATUS</p>



3.9. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

Note: The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END*****