

TEST REPORT

of

FCC Part 15 Subpart C

Limited Modular Approval

New Application; Class I PC; Class II PC

Product : Aria
Brand: amino, entone
Model: XYZazzzzzz where "X" can be 6, 7, 8 for marketing purpose."Y" can be 0~9 for marketing purpose."Z" - can be 0~9. Among 0~9, number 1 & 3 are fixed for WiFi model, others are for marketing purpose.
"a" - can be 0~9, A~Z, a~z, "-", "/", "~". Capital letter "T" is fixed for Bluetooth model; lowercase letter "r" is fixed for RF4CE model; others are for marketing purpose.
"zzzzzzzz" - can be any combination of "0-9", "A-Z", "a-z", "-", "/", "~" or blank for marketing purpose.
Model Difference: For market segmentation
FCC ID: XVG50-0102-BT-00
FCC Rule Part: §15.247, Cat: DTS
Applicant: Amino Communications Ltd
Address: Buckingway Business Park, Anderson Road, Swavesey, Cambridge CB24 4UQ, United Kingdom

Test Performed by:
International Standards Laboratory

<Lung-Tan LAB>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

*Address:

No. 120, Lane 180, Hsin Ho Rd.

Lung-Tan Dist., Tao Yuan City 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-17LR134FC**

Issue Date : **2017/11/24**

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.



VERIFICATION OF COMPLIANCE

Applicant: Amino Communications Ltd

Product Description: Aria

Brand Name: amino, entone

Model No.: XYZazzzzzz where "X" can be 6, 7, 8 for marketing purpose."Y" can be 0~9 for marketing purpose."Z" - can be 0~9. Among 0~9, number 1 & 3 are fixed for WiFi model, others are for marketing purpose.

"a" - can be 0~9, A~Z, a~z, "-", "/", "~". Capital letter "I" is fixed for Bluetooth model; lowercase letter "r" is fixed for RF4CE model; others are for marketing purpose.

"zzzzzzzz" – can be any combination of "0-9", "A-Z", "a-z", "-", "/", "~" or blank for marketing purpose.

Model Difference: For market segmentation

Date of test: 2017/06/03 ~ 2017/07/23

Date of EUT Received: 2017/06/03

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:



Date:

2017/11/24

Lake Cheng / Engineer

Prepared By:



Date:

2017/11/24

Gigi Yeh / Specialist

Approved By:



Date:

2017/11/24

Dino Chen / Sr. Engineer

Version

Version No.	Date	Description
00	2017/11/24	Initial creation of document

Uncertainty of Measurement

Description Of Test	Uncertainty
Conducted Emission (AC power line)	2.586 dB
Field Strength of Spurious Radiation	<=30MHz: 2.96dB 30-1GHz: 4.22 dB 1-40 GHz: 4.08 dB
Conducted Power	2.412 GHz: 1.30 dB 5.805 GHz: 1.55 dB
Power Density	2.412 GHz: 1.30 dB 5.805 GHz: 1.67 dB
Frequency	0.0032%
Time	0.01%
DC Voltage	1%

Table of Contents

1 GENERAL INFORMATION	6
1.1 Related Submittal(s) / Grant (s)	8
1.2 Test Methodology	8
1.3 Test Facility	8
1.4 Special Accessories	8
1.5 Equipment Modifications	8
2 SYSTEM TEST CONFIGURATION	9
2.1 EUT Configuration	9
2.2 EUT Exercise	9
2.3 Test Procedure	9
2.4 Configuration of Tested System	10
3 SUMMARY OF TEST RESULTS	11
4 DESCRIPTION OF TEST MODES	11
5 CONDUCTED EMISSION TEST	12
5.1 Standard Applicable:	12
5.2 Measurement Equipment Used:	12
5.3 EUT Setup:	12
5.4 Measurement Procedure:	13
5.5 Measurement Result:	13
6 PEAK /AVERAGE OUTPUT POWER MEASUREMENT	16
6.1 Standard Applicable:	16
6.2 Measurement Equipment Used:	17
6.3 Test Set-up:	17
6.4 Measurement Procedure:	17
6.5 Measurement Result:	17
7 6dB Bandwidth	18
7.1 Standard Applicable:	18
7.2 Measurement Equipment Used:	18
7.3 Test Set-up:	18
7.4 Measurement Procedure:	18
7.5 Measurement Result:	18
8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT	21
8.1 Standard Applicable:	21
8.2 Measurement Equipment Used:	21
8.3 Test SET-UP:	23
8.4 Measurement Procedure:	24
8.5 Field Strength Calculation:	24
8.6 Measurement Result:	24
9 SPURIOUS RADIATED EMISSION TEST	31
9.1 Standard Applicable	31
9.2 Measurement Equipment Used:	31
9.3 Test SET-UP:	31
9.4 Measurement Procedure:	31
9.5 Field Strength Calculation	32
9.6 Measurement Result:	32

10	Peak Power Spectral Density	39
10.1	Standard Applicable:	39
10.2	Measurement Equipment Used:	39
10.3	Test Set-up:	39
10.4	Measurement Procedure:	39
10.5	Measurement Result:	39
11	ANTENNA REQUIREMENT	42
11.1	Standard Applicable	42
11.2	Antenna Connected Construction	42

1 GENERAL INFORMATION

General:

Product Name:	Aria
Brand:	amino, entone
Model:	XYZazzzzzz where "X" can be 6, 7, 8 for marketing purpose. "Y" can be 0~9 for marketing purpose. "Z" - can be 0~9. Among 0~9, number 1 & 3 are fixed for WiFi model, others are for marketing purpose. "a" - can be 0~9, A~Z, a~z, "-", "/", "~". Capital letter "I" is fixed for Bluetooth model; lowercase letter "r" is fixed for RF4CE model; others are for marketing purpose. "zzzzzzzz" - can be any combination of "0-9", "A-Z", "a-z", "-", "/", "~" or blank for marketing purpose.
Model different:	For market segmentation
Power Supply:	3.3Vdc

Host product details:

Product Name:	Aria	
Brand:	amino, entone	
Model:	XYZazzzzzz where "X" can be 6, 7, 8 for marketing purpose. "Y" can be 0~9 for marketing purpose. "Z" - can be 0~9. Among 0~9, number 1 & 3 are fixed for WiFi model, others are for marketing purpose. "a" - can be 0~9, A~Z, a~z, "-", "/", "~". Capital letter "I" is fixed for Bluetooth model; lowercase letter "r" is fixed for RF4CE model; others are for marketing purpose. "zzzzzzzz" - can be any combination of "0-9", "A-Z", "a-z", "-", "/", "~" or blank for marketing purpose.	
Model different:	For market segmentation	
Power Supply:	12Vdc from AC/DC adapter Adapter: Model: MSA-C1000IC12.0-12W-DE	

Bluetooth:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V4.0
Channel number:	40 channels, 2MHz step
Modulation type:	GFSK
Tune-up power	3.62 dBm
Power Tolerance:	+/- 1.0 dBm
Dwell Time:	N/A
Antenna Designation:	Printed Ant , 2.3 dBi

The EUT is compliance with Bluetooth 4.0 Standard.

The Test report is applied for BT 4.0 (BLE).

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **XVG50-0102-BT-00** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 558074 D01 DTS Meas Guidance v03r05

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory** <Lung-Tan LAB> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents , ANSI C63.10: 2013. FCC Registration Number is: 872200; Designation Number is: TW1036, Canada Registration Number: 4067B-3.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 5 and 7 of ANSI C63.10: 2013..Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m/1.5m(Frequency above 1GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 6 and 11 of ANSI C63.10: 2013.

2.4 Configuration of Tested System

Fig. 1 Radiated/Conducted Emission Configuration



Table 1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	NB	HP	440G1	2CE40911GZ	Non-shield	Non-shield

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3),(4)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth & 99% Power Bandwidth	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

BT LE mode: Channel low (2402MHz), mid (2442MHz) and high (2480MHz) are chosen for full testing.

5 CONDUCTED EMISSION TEST

5.1 Standard Applicable:

According to §15.207 & RSS-Gen §7.2.4, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Conduction 04-3 Cable	WOKEN	CFD 300-NL	Conduction 04 -3	09/11/2017	09/10/2018
EMI Receiver 16	Rohde & Schwarz	ESCI	101221	10/23/2017	10/22/2018
LISN 18	ROHDE & SCHWARZ	ENV216	101424	02/05/2017	02/04/2018
LISN 19	ROHDE & SCHWARZ	ENV216	101425	03/07/2017	03/06/2018
Test Software	Farad	EZEMC Ver:ISL-03A2	N/A	N/A	N/A

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the .
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:


1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

AC POWER LINE CONDUCTED EMISSION TEST DATA


Operation Mode:	Normal Operation	Test Date:	2017/06/22
-----------------	------------------	------------	------------

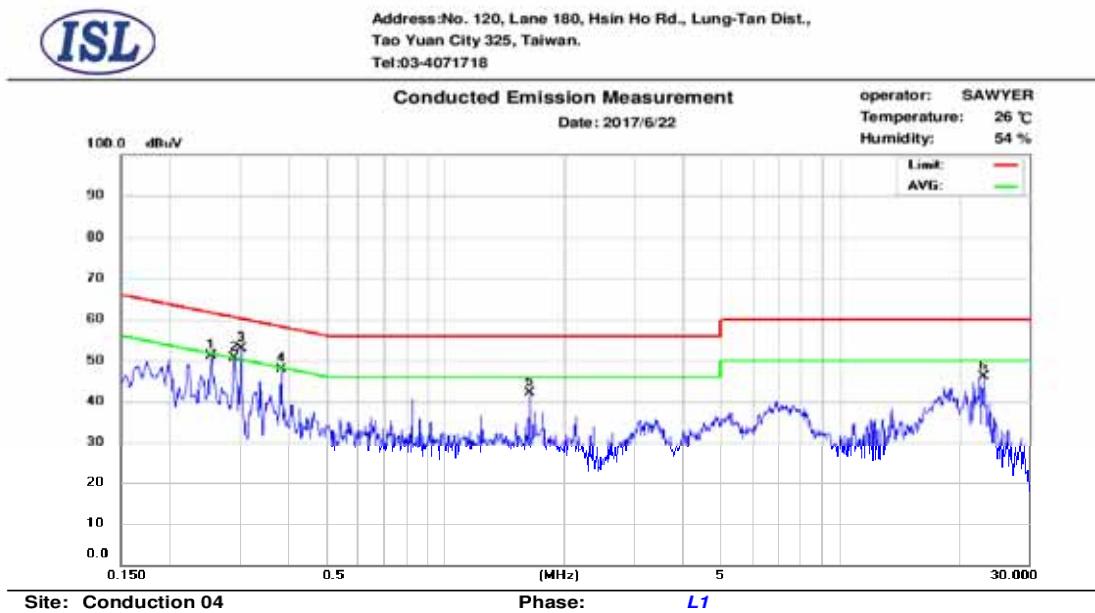

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.254	31.10	19.84	9.69	40.79	61.63	-20.84	29.53	51.63	-22.10
2	0.290	27.57	16.70	9.70	37.27	60.52	-23.25	26.40	50.52	-24.12
3	0.302	26.33	12.91	9.69	36.02	60.19	-24.17	22.60	50.19	-27.59
4	0.382	22.70	9.37	9.69	32.39	58.24	-25.85	19.06	48.24	-29.18
5	1.630	16.99	7.90	9.74	26.73	56.00	-29.27	17.64	46.00	-28.36
6	23.130	35.78	31.87	10.09	45.87	60.00	-14.13	41.96	50.00	-8.04



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
 Tao Yuan City 325, Taiwan.
 Tel: 03-4071718

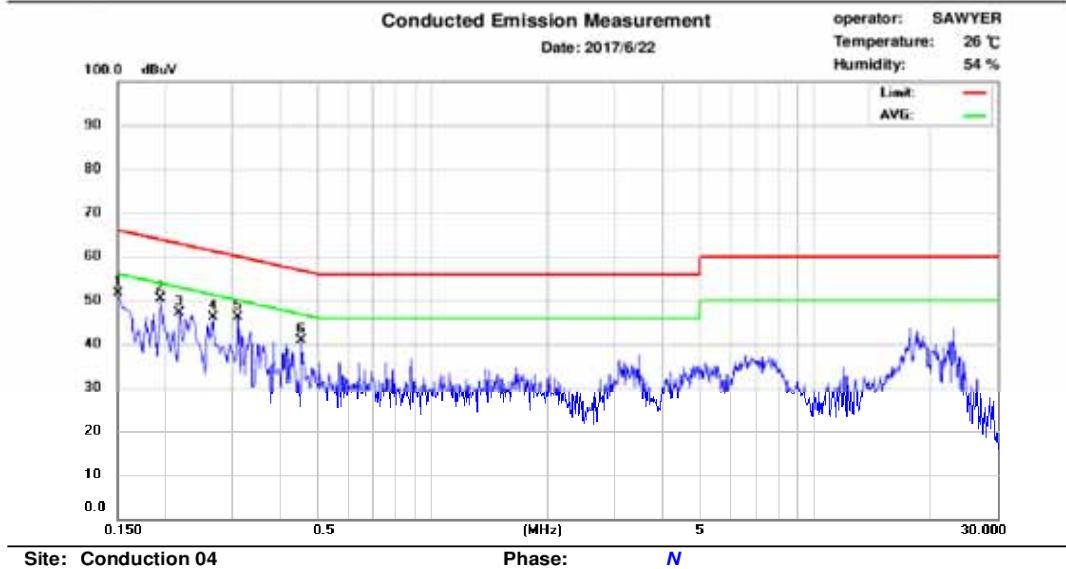

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	0.150	37.96	19.69	9.68	47.64	66.00	-18.36	29.37	56.00	-26.63
2	0.194	35.14	20.16	9.68	44.82	63.86	-19.04	29.84	53.86	-24.02
3	0.218	33.40	20.50	9.68	43.08	62.89	-19.81	30.18	52.89	-22.71
4	0.266	26.62	13.51	9.68	36.30	61.24	-24.94	23.19	51.24	-28.05
5	0.310	26.40	11.56	9.68	36.08	59.97	-23.89	21.24	49.97	-28.73
6	0.454	22.36	10.77	9.69	32.05	56.80	-24.75	20.46	46.80	-26.34

6 PEAK /AVERAGE OUTPUT POWER MEASUREMENT

6.1 Standard Applicable:

According to §15.247(b)(3),(4)(b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multipath 802.11n_40Ms of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:


(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

6.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter 05	Anritsu	ML2495A	1116010	09/07/2017	09/06/2018
Power Sensor 05	Anritsu	MA2411B	34NKF50	09/07/2017	09/06/2018
Power Sensor 06	DARE	RPR3006W	13I00030SNO3 3	11/03/2017	11/02/2018
Power Sensor 07	DARE	RPR3006W	13I00030SNO3 4	11/03/2017	11/02/2018
Temperature Chamber	KSON	THS-B4H100	2287	06/27/2017	06/26/2018
DC Power supply	ABM	8185D	N/A	10/05/2017	10/04/2018
AC Power supply	EXTECH	CFC105W	NA	12/25/2016	12/24/2017
Attenuator	Woken	Watt-65m3502	11051601	NA	NA
Splitter	MCLI	PS4-199	12465	12/26/2015	12/25/2017
Spectrum analyzer	keysight	N9010A	MY56070257	05/31/2017	05/30/2018
Spectrum analyzer	R&S	FSP40	100143	08/07/2017	08/06/2018
Test Software	DARE	Radimation Ver:2013.1.23	NA	NA	NA

6.3 Test Set-up:

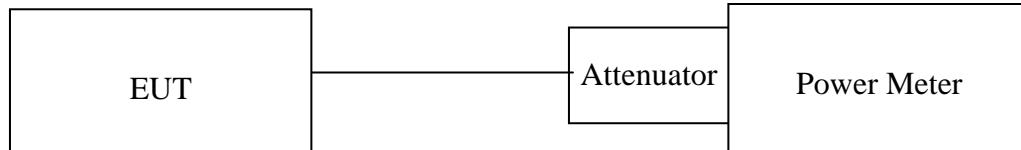

6.4 Measurement Procedure:

Refer to section 9.1.3 and 9.2.3 Peak and Average Conducted Output Power Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

6.5 Measurement Result:

LE Mode

Frequency (MHz)	Peak Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
Low	2.54	0.00	2.54	0.00179	1
Mid	3.09	0.00	3.09	0.00204	1
High	3.62	0.00	3.62	0.00230	1

Note: offset 1dB for cable loss.

7 6dB Bandwidth

7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

Refer to section 6.3 for details.

7.4 Measurement Procedure:

Refer to section 8.1 DTS bandwidth Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

1. Set resolution bandwidth (RBW) = 100KHz.
2. Set the video bandwidth (VBW) = 300KHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement.

7.5 Measurement Result:


LE Mode

Frequency (MHz)	Bandwidth (MHz)	Bandwidth (KHz)	Result
Low	0.8383	> 500	PASS
Mid	0.8445	> 500	PASS
High	0.8613	> 500	PASS


Note: Refer to next page for plots.

BT BLE


6dB Band Width Test Data CH-Low

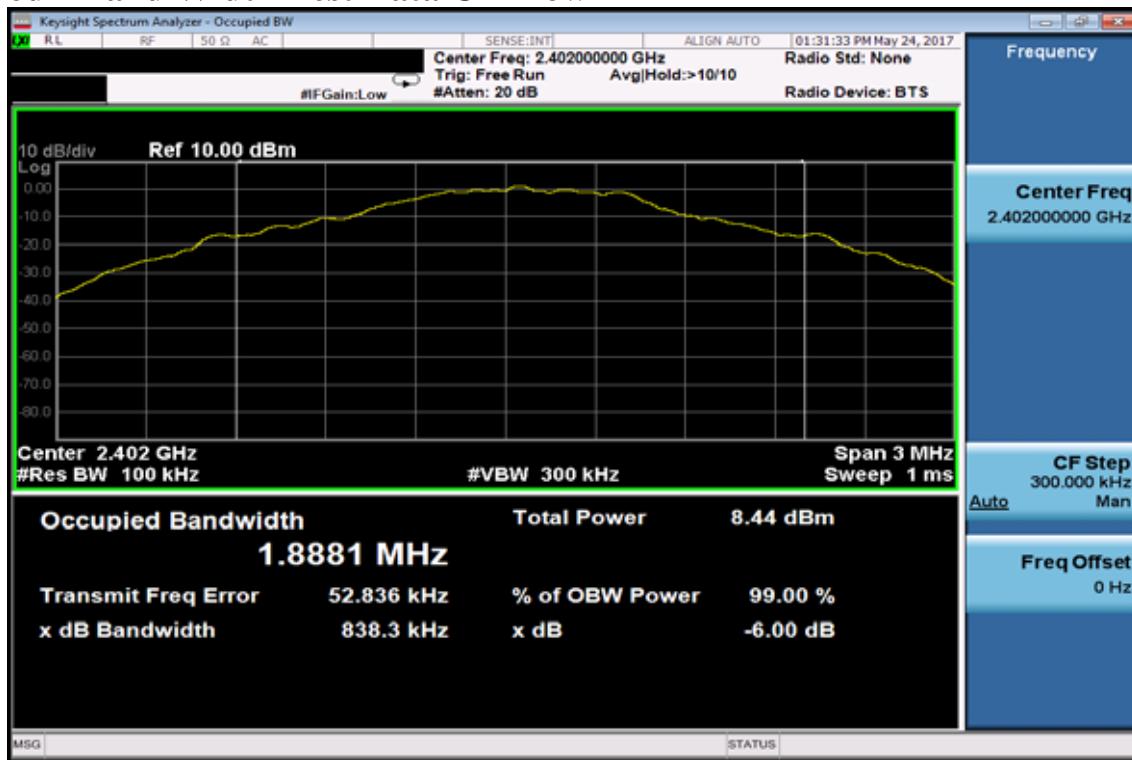

6dB Band Width Test Data CH-Mid

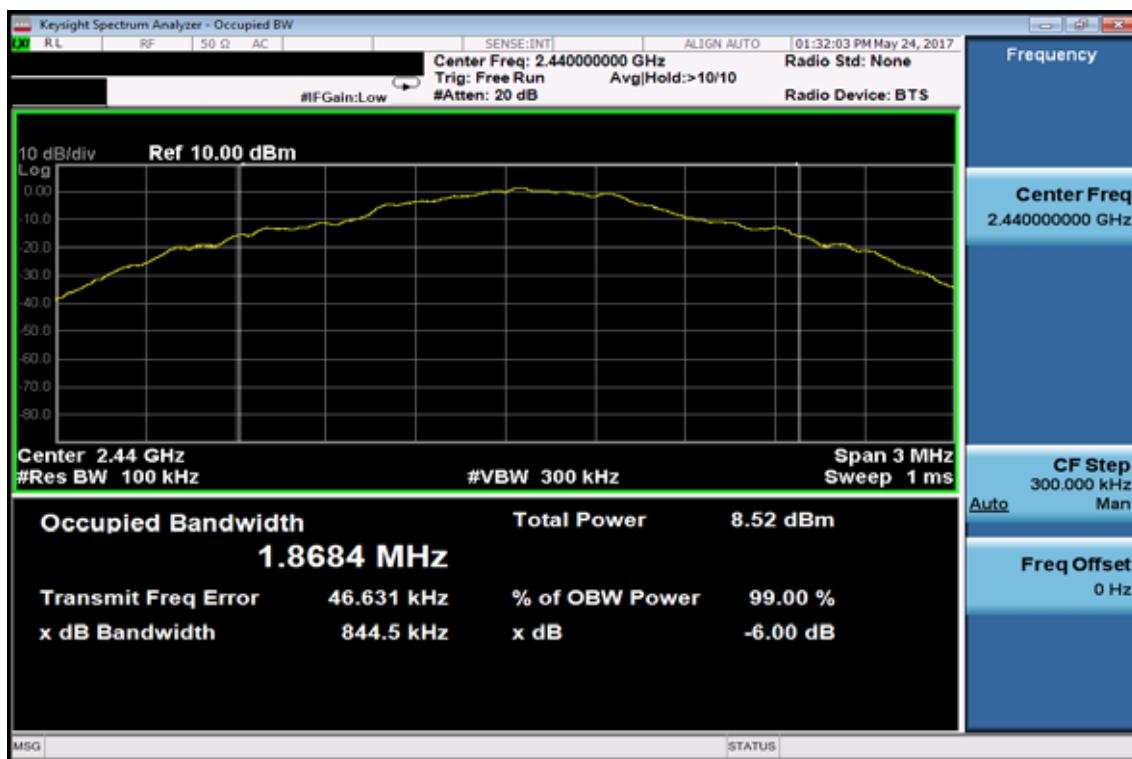

6dB Band Width Test Data CH-High

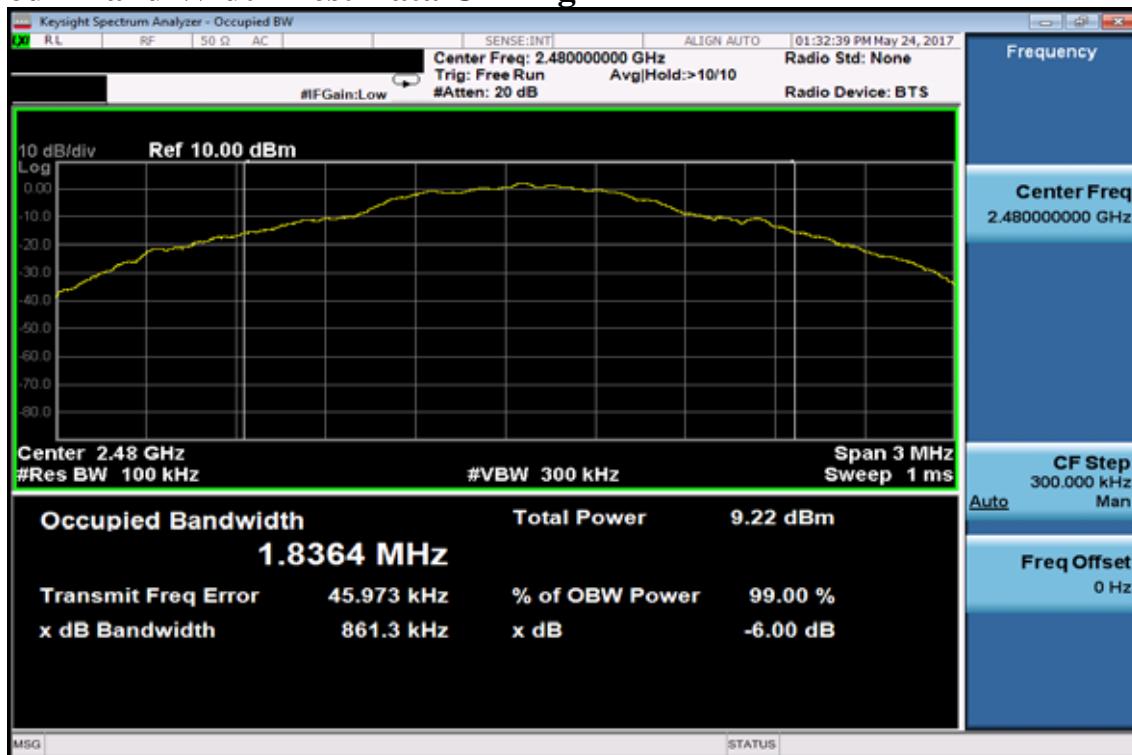

8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2 Measurement Equipment Used:

8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2 Radiated emission:

Chamber 19(966 Chamber)					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
966 Chamber	Chance Most	Chamber 19	N/A	08/14/2017	08/13/2018
Spectrum Analyzer 21(3Hz-44GHz)	Agilent	N9030A	MY51360021	11/14/2017	11/13/2018
EMI Receiver	SCHWARZBECK	FCVU1534	1534149	11/30/2016	11/29/2017
Loop Antenna(9K-30M)	EM	EM-6879	271	11/01/2016	10/31/2018
Bilog Antenna (30M-1G)	SCHWARZBECK	VULB9168 w 5dB Att	736	07/21/2017	07/20/2018
Horn antenna (1G-18G)	SCHWARZBECK	9120D	9120D-1627	07/21/2016	07/20/2018
Horn antenna (18G-26G)	Com-power	AH-826	081001	07/23/2017	07/22/2019
Horn antenna (26G-40G)	Com-power	AH-640	100A	02/22/2017	02/21/2019
Preamplifier (9k-1000M)	HP	8447F	3113A06362	11/13/2017	11/12/2018
Preamplifier(1G-26G)	Agilent	8449B	3008A02471	08/24/2017	08/23/2018
Preamplifier (26G-40G)	MITEQ	JS4-26004000-27-5A	818471	07/22/2017	07/21/2019
RF Cable (9k-18G)	HUBER SUHNER	SUCOFLEX 104A	MY1397/4A	08/24/2017	08/23/2018
RF cable (18G~40G)	HUBER SUHNER	Sucoflex 102	27963/2&37421/2	11/03/2017	11/02/2019
Turn Table	MF	Turn Table-19	Turn Table-19	N/A	N/A
Mast Tower	MF	JSDES-15A	1308283	N/A	N/A
Controller	MF	MF-7802BS	MF780208460	N/A	N/A
AC power source	T-Power	TFC-1005	40006471	N/A	N/A
Signal Generator	R&S	SMU200A	102330	03/15/2017	03/14/2018
Signal Generator	Anritsu	MG3692A	20311	11/04/2017	11/03/2018
2.4G Filter	Micro-Tronics	Brm50702	76	12/25/2016	12/24/2017
Test Software	Audix	E3 Ver:6.12023	N/A	N/A	N/A


8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

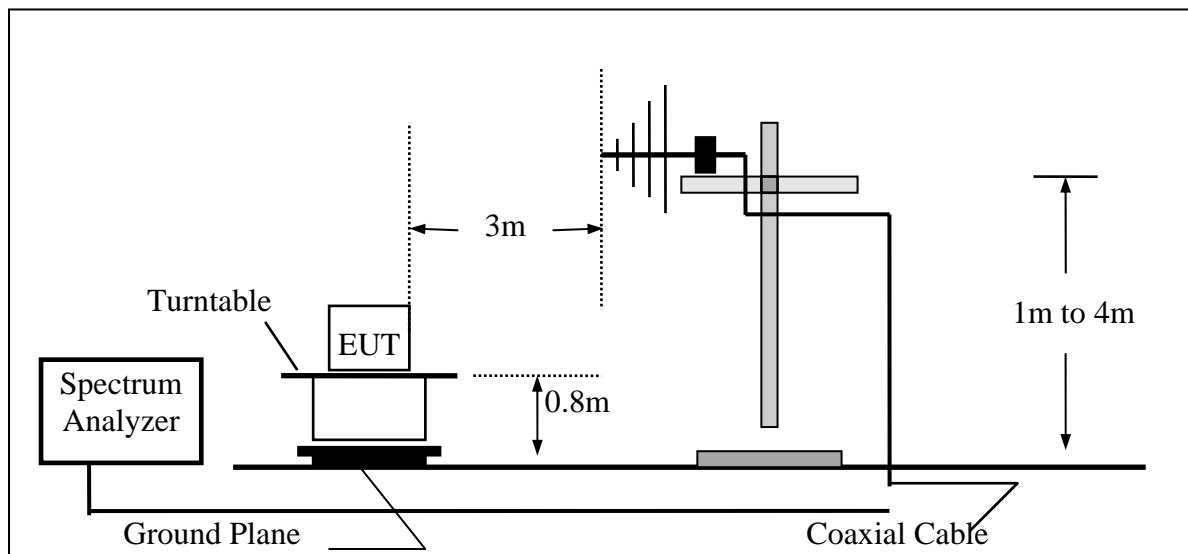

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

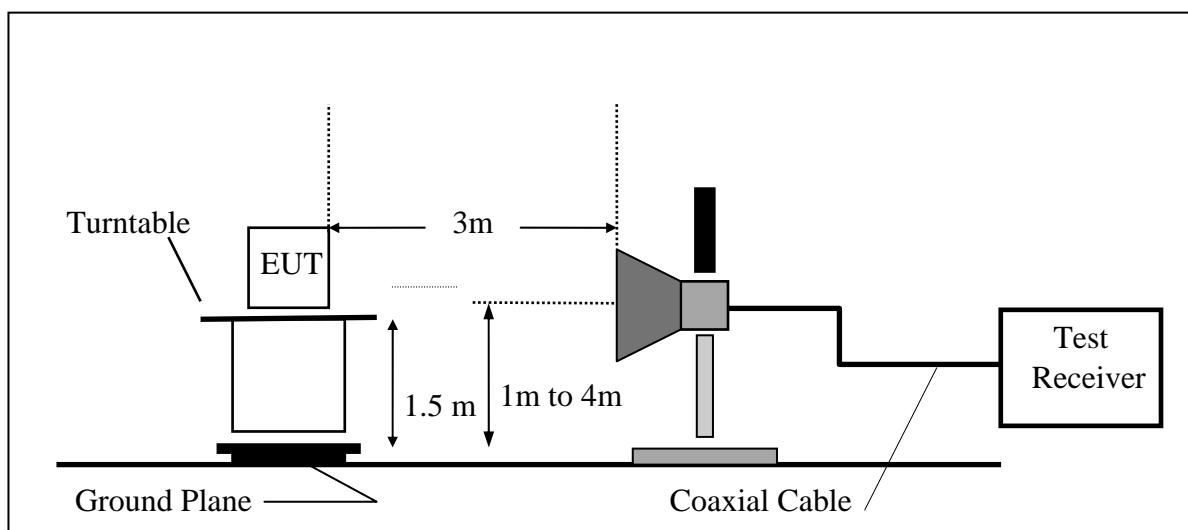

8.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW=100kHz, VBW=3* RBW, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

Refer to section 11 and 12 emissions in restricted and non-restricted frequency bands Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

The measurement of unwanted emissions at the edge of the authorized frequency bands can be complicated by the leakage of RF energy from the fundamental emission into the RBW pass band. Thus, for measurements at the band edges, a narrower resolution bandwidth (no less than 10 kHz) can be used within the first 1 MHz beyond the fundamental emission, provided that that measured energy is subsequently integrated over the appropriate reference bandwidth (i.e., 100 kHz or 1 MHz). This integration can be performed using the band power function of the spectrum analyzer or by summing the spectral levels (in linear power units) over the appropriate reference bandwidth.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Band Edges:
Radiated Emission: BLE mode

Operation Mode TX CH Low
 Fundamental Frequency 2412 MHz
 Temperature 25

Test Date 2017/06/13
 Test By Lake
 Humidity 60 %

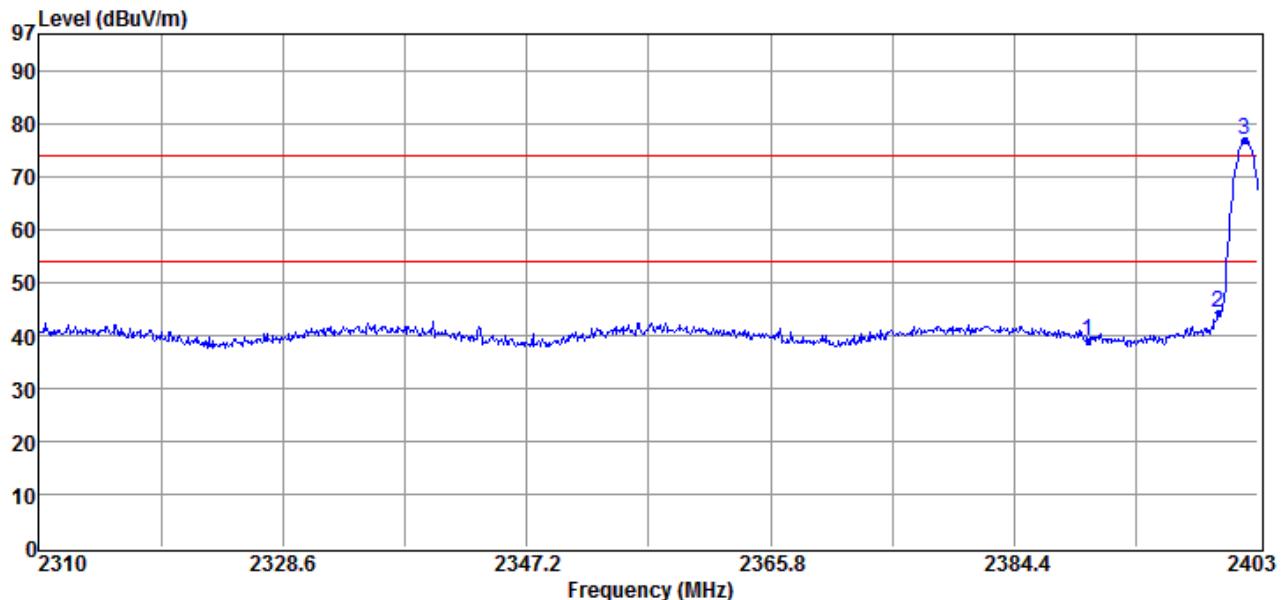


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Over limit dB	Remark	Pol V/H
1	2390.00	44.61	-5.70	38.91	74.00	-35.09	Peak	VERTICAL
2	2400.00	49.98	-5.66	44.32	57.05	-12.73	Peak	VERTICAL
3	2401.98	82.71	-5.66	77.05	F	--	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

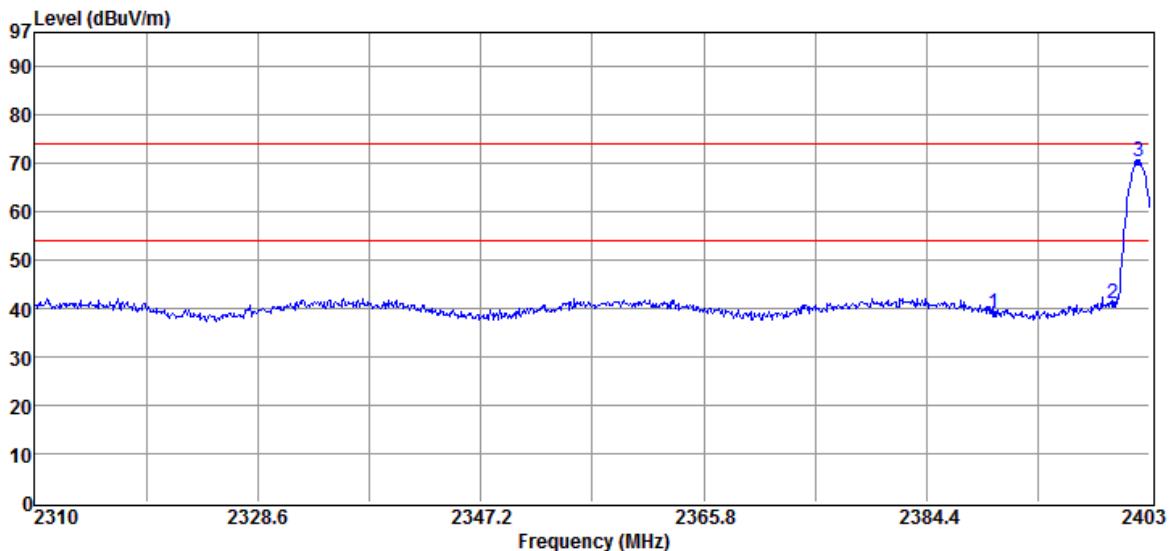

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Over L imit dB	Remark	Pol V/H
1	2390.00	44.55	-5.70	38.85	74.00	-35.15	Peak	HORIZONTAL
2	2400.00	46.74	-5.66	41.08	50.45	-9.37	Peak	HORIZONTAL
3	2402.07	76.11	-5.66	70.45	F	--	Peak	HORIZONTAL


Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

Operation Mode TX CH High
 Fundamental Frequency 2462 MHz
 Temperature 25

Test Date 2017/06/13
 Test By Lake
 Humidity 60 %

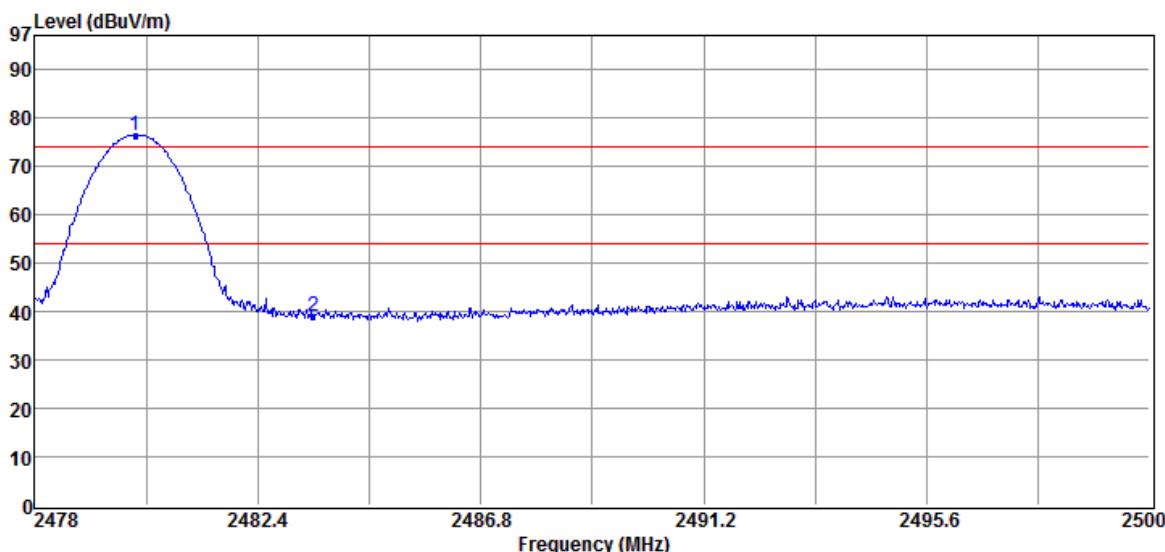


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Over Li mit dB	Remark	Pol V/H
1	2479.98	81.92	-5.43	76.49	F	--	Peak	VERTICAL
2	2483.50	44.35	-5.41	38.94	74.00	-35.06	Peak	VERTICAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

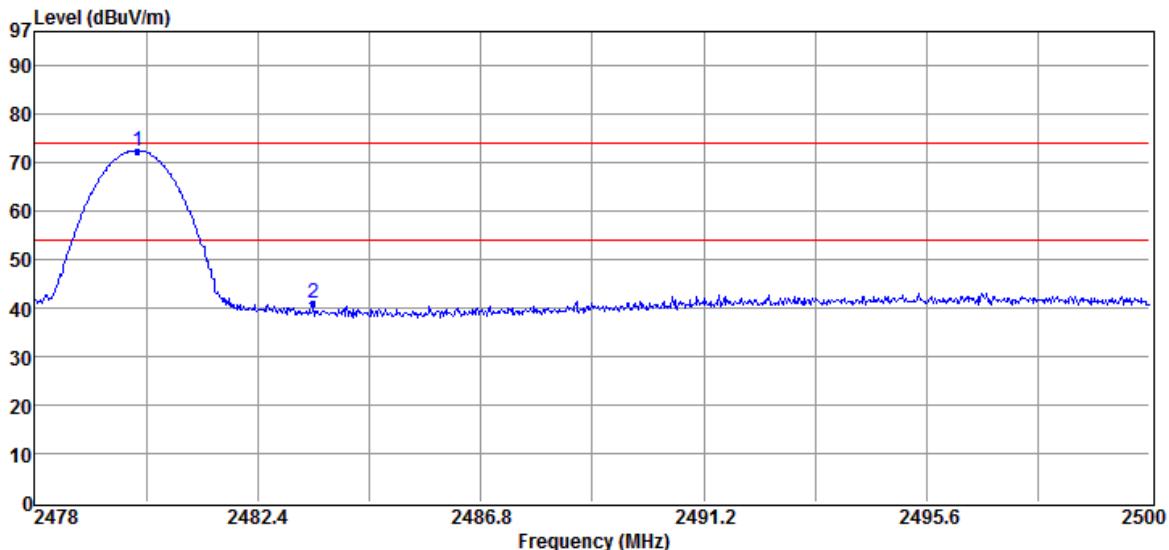

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Over L imit dB	Remark	Pol V/H
1	2480.02	77.91	-5.43	72.48	F	--	Peak	HORIZONTAL
2	2483.50	46.32	-5.41	40.91	74.00	-33.09	Peak	HORIZONTAL


Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency


Out of Bands

Low

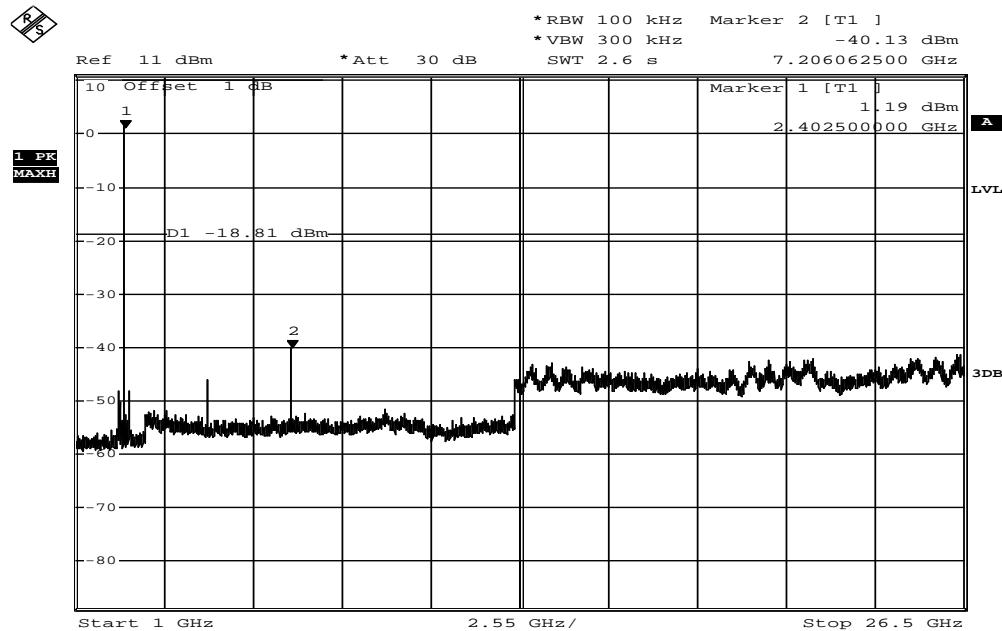


Date: 9.FEB.2018 11:08:10

Mid

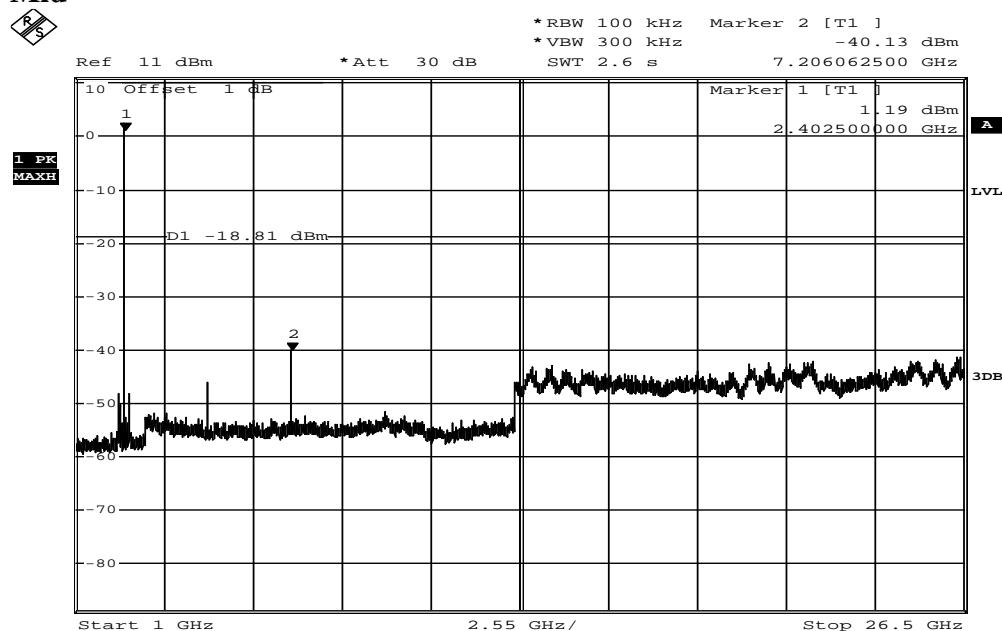

Date: 9.FEB.2018 11:08:10

High

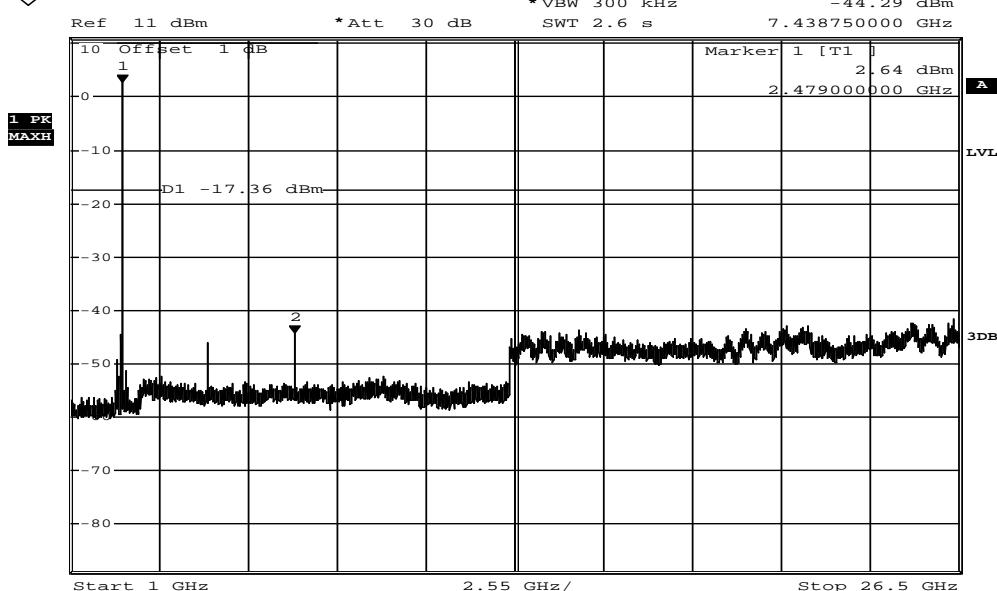

Date: 9.FEB.2018 11:12:17

9 SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2 Measurement Equipment Used:

9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2 Radiated emission:

Refer to section 7.2 for details.

9.3 Test SET-UP:

9.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2 Radiated emission:

Refer to section 7.3 for details.

9.4 Measurement Procedure:

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

Refer to section 11 and 12 emissions in restricted and non-restricted frequency bands Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX mode	Test Date	2017/06/13
Channel Number	CH Low	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	83.35	40.53	-12.52	28.01	40.00	-11.99	Peak	VERTICAL
2	336.52	34.02	-5.40	28.62	46.00	-17.38	Peak	VERTICAL
3	585.81	31.14	-0.58	30.56	46.00	-15.44	Peak	VERTICAL
4	809.88	34.46	2.96	37.42	46.00	-8.58	Peak	VERTICAL
5	860.32	35.19	3.84	39.03	46.00	-6.97	Peak	VERTICAL
6	894.27	37.44	4.49	41.93	46.00	-4.07	Peak	VERTICAL
1	84.32	40.26	-12.72	27.54	40.00	-12.46	Peak	HORIZONTAL
2	196.84	42.96	-9.77	33.19	43.50	-10.31	Peak	HORIZONTAL
3	336.52	42.26	-5.40	36.86	46.00	-9.14	Peak	HORIZONTAL
4	585.81	30.91	-0.58	30.33	46.00	-15.67	Peak	HORIZONTAL
5	860.32	33.27	3.84	37.11	46.00	-8.89	Peak	HORIZONTAL
6	894.27	36.68	4.49	41.17	46.00	-4.83	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX mode	Test Date	2017/06/13
Channel Number	CH Mid	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	83.35	41.65	-12.52	29.13	40.00	-10.87	Peak	VERTICAL
2	261.83	35.15	-7.57	27.58	46.00	-18.42	Peak	VERTICAL
3	585.81	29.79	-0.58	29.21	46.00	-16.79	Peak	VERTICAL
4	760.41	34.29	2.39	36.68	46.00	-9.32	Peak	VERTICAL
5	860.32	35.31	3.84	39.15	46.00	-6.85	Peak	VERTICAL
6	890.39	37.54	4.42	41.96	46.00	-4.04	Peak	VERTICAL
1	135.73	34.21	-7.79	26.42	43.50	-17.08	Peak	HORIZONTAL
2	197.81	42.58	-9.78	32.80	43.50	-10.70	Peak	HORIZONTAL
3	336.52	40.85	-5.40	35.45	46.00	-10.55	Peak	HORIZONTAL
4	735.19	29.98	1.92	31.90	46.00	-14.10	Peak	HORIZONTAL
5	895.24	28.89	4.51	33.40	46.00	-12.60	Peak	HORIZONTAL
6	959.26	28.45	5.58	34.03	46.00	-11.97	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX mode	Test Date	2017/06/13
Channel Number	CH High	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	83.35	40.80	-12.52	28.28	40.00	-11.72	Peak	VERTICAL
2	336.52	32.23	-5.40	26.83	46.00	-19.17	Peak	VERTICAL
3	594.54	29.05	-0.40	28.65	46.00	-17.35	Peak	VERTICAL
4	823.46	33.85	3.20	37.05	46.00	-8.95	Peak	VERTICAL
5	860.32	34.30	3.84	38.14	46.00	-7.86	Peak	VERTICAL
6	897.18	36.62	4.54	41.16	46.00	-4.84	Peak	VERTICAL
1	197.81	43.18	-9.78	33.40	43.50	-10.10	Peak	HORIZONTAL
2	296.75	37.86	-6.15	31.71	46.00	-14.29	Peak	HORIZONTAL
3	336.52	41.85	-5.40	36.45	46.00	-9.55	Peak	HORIZONTAL
4	735.19	30.04	1.92	31.96	46.00	-14.04	Peak	HORIZONTAL
5	784.66	30.45	2.64	33.09	46.00	-12.91	Peak	HORIZONTAL
6	895.24	29.54	4.51	34.05	46.00	-11.95	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX mode	Test Date	2017/06/13
Channel Number	CH Low	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	4804.00	40.18	0.93	41.11	74.00	-32.89	Peak	VERTICAL
1	4804.00	38.79	0.93	39.72	74.00	-34.28	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX mode	Test Date	2017/06/13
Channel Number	CH Mid	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	4880.00	39.18	1.10	40.28	74.00	-33.72	Peak	VERTICAL
1	4880.00	38.86	1.10	39.96	74.00	-34.04	Peak	HORIZONTAL

Remark:

- 1 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 2 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 4 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX mode	Test Date	2017/06/13
Channel Number	CH High	Test By	Lake
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	4960.00	37.51	1.24	38.75	74.00	-35.25	Peak	VERTICAL
1	4960.00	39.60	1.24	40.84	74.00	-33.16	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9MHz to 1000MHz were made with an instrument detector setting 9-90KHz/110-490KHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100KHz, VBW=300KHz.

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

Refer to section 10.2 Peak Power Density(PKPPSD) Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

1. Set analyzer center frequency to DTS channel frequency
2. Set the span to 1.5 times the DTS bandwidth.
3. Set resolution bandwidth $3\text{KHz} \leq \text{RBW} \leq 100\text{KHz}$.
4. Set the video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.5 Measurement Result:


LE Mode

CH	Power Density	Maximum Limit
	Level (dBm)	(dBm)
Low	-12.542	8
Mid	-11.61	8
High	-11.22	8


Note: offset 1dB for cable lose.

BT BLE


Power Spectral Density Test Plot (CH-Low)

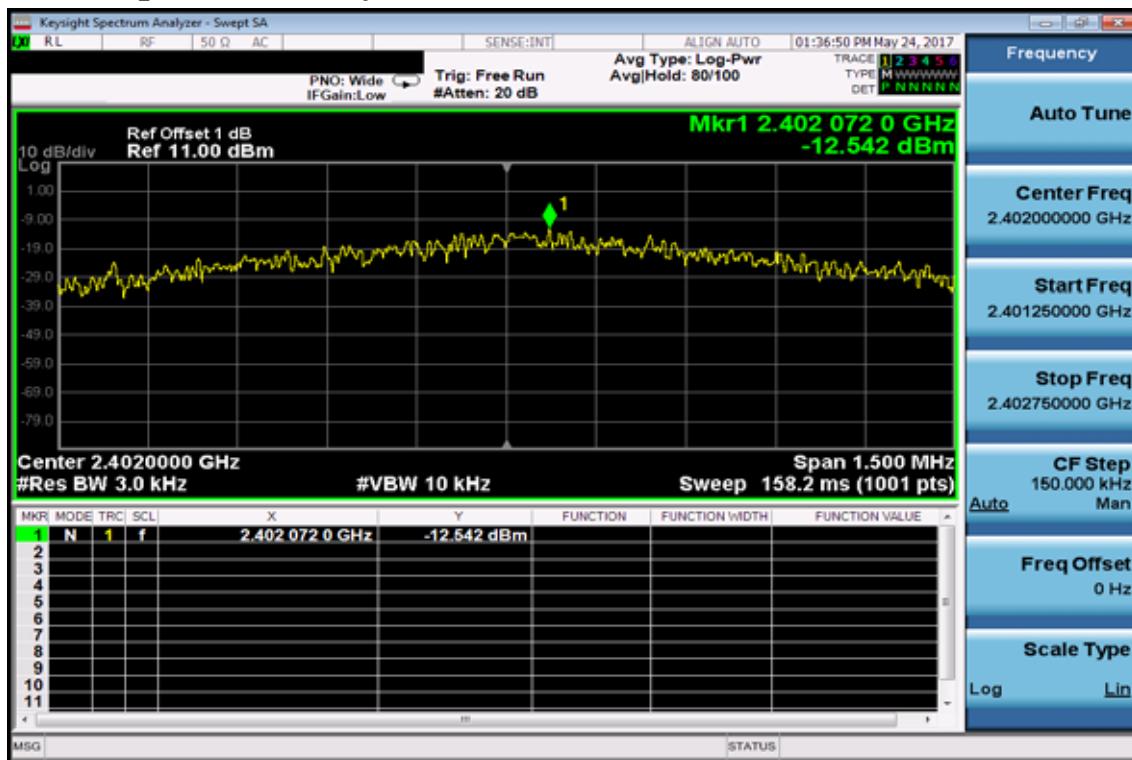

Power Spectral Density Test Plot (CH-Mid)

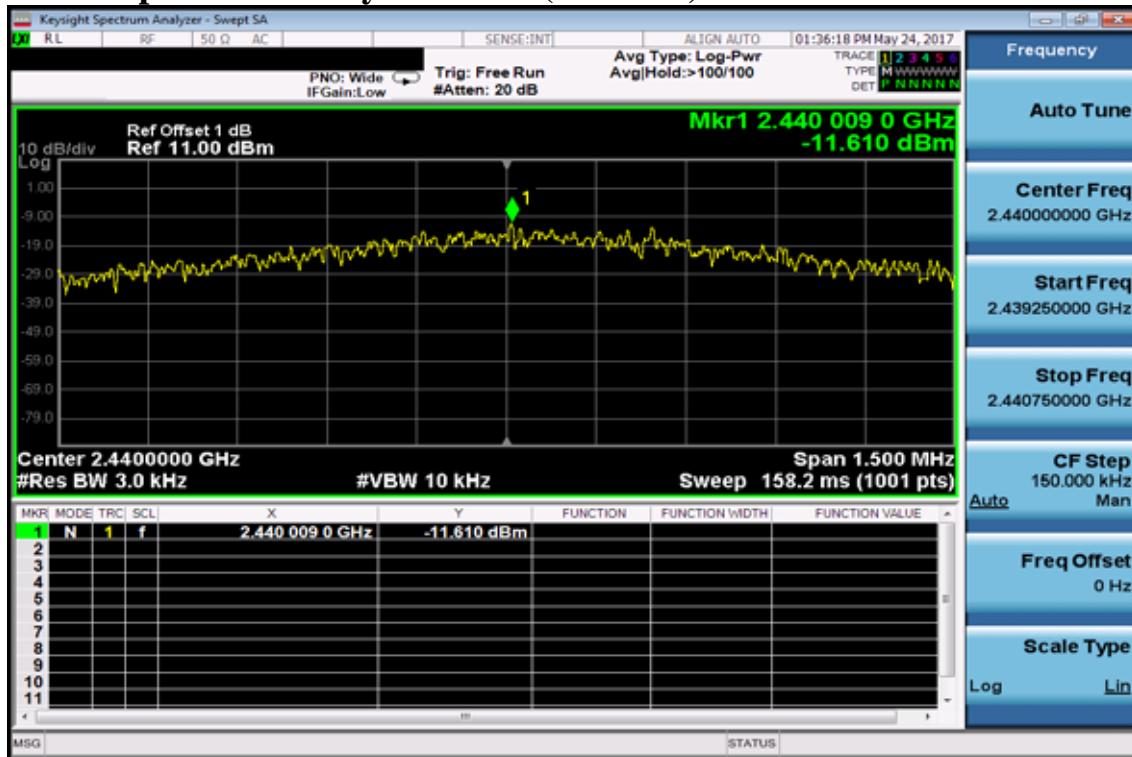

Power Spectral Density Test Plot (CH-High)

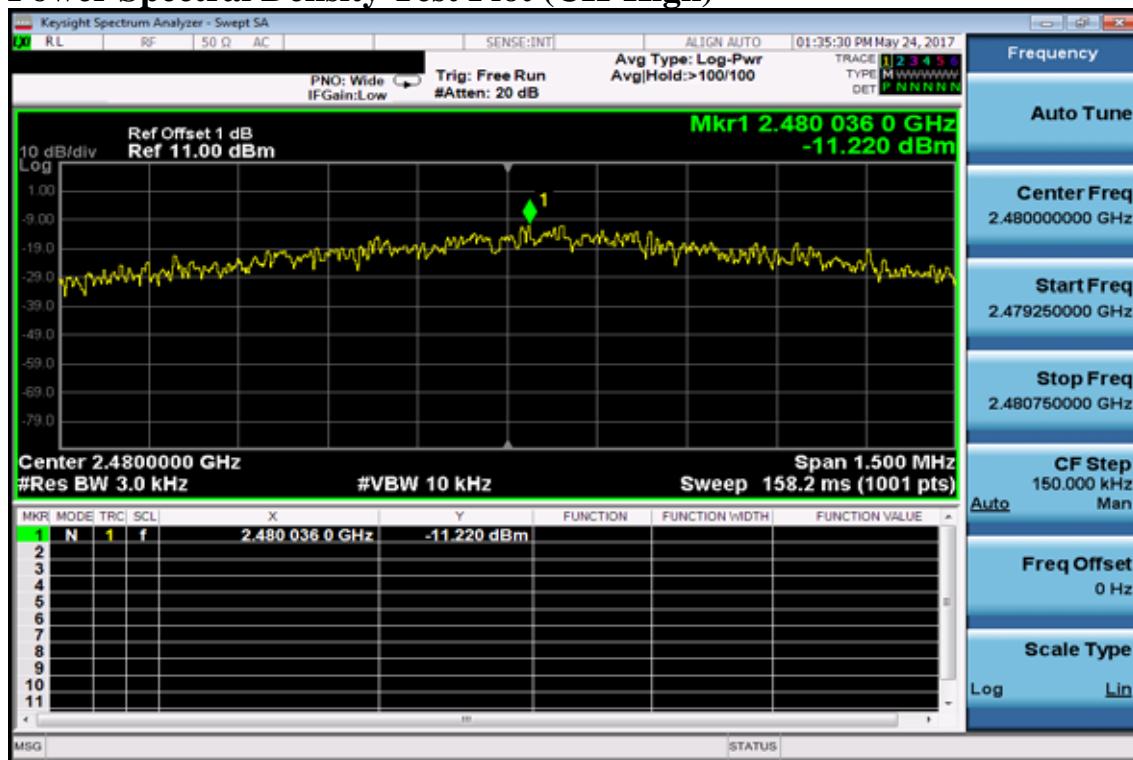

11 ANTENNA REQUIREMENT

11.1 Standard Applicable

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

11.2 Antenna Connected Construction

The directional gain of antenna used for transmitting is 2.3dBi, and the antenna is designed with fixed type and no consideration of replacement. Please see EUT photo and antenna spec. for details.