

**FCC 47 CFR PART 15 SUBPART C: 2014 AND ANSI C63.10: 2013****TEST REPORT****For****Turntable****Model: BT100****Brand Name: AKAI**

Issued for

**inMusic Brands, Inc.**  
**200 Scenic View Drive, Cumberland, RI 02864, U.S.A.**

Issued By

**Compliance Certification Services Inc.****Tainan Laboratory**

**No.8,Jiucengling, Xinhua Dist., Tainan City**  
**712, Taiwan (R.O.C.)**

TEL: 886-6-580-2201

FAX: 886-6-580-2202

<http://www.ccsrf.com>E-Mail : [service@ccsrf.com](mailto:service@ccsrf.com)**Issued Date: February 02, 2016**

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.

**REVISION HISTORY**

<b>Rev.</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Effect Page</b>	<b>Revised By</b>
00	February 02, 2016	Initial Issue	ALL	Sunny Chang

## TABLE OF CONTENTS

TITLE	PAGE NO.
<b>1. TEST REPORT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
2.1 DESCRIPTION OF EUT & POWER .....	5
<b>3. DESCRIPTION OF TEST MODES .....</b>	<b>6</b>
<b>4. TEST METHODOLOGY .....</b>	<b>7</b>
<b>5. FACILITIES AND ACCREDITATIONS.....</b>	<b>8</b>
5.1 FACILITIES .....	8
5.2 EQUIPMENT .....	8
5.3 LABORATORY ACCREDITATIONS LISTINGS .....	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS .....	9
<b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>10</b>
6.1 SETUP CONFIGURATION OF EUT .....	10
6.2 SUPPORT EQUIPMENT .....	11
<b>7. APPLICABLE LIMITS AND TEST RESULTS.....</b>	<b>14</b>
7.1 20DB BANDWIDTH FOR HOPPING .....	14
7.2 MAXIMUM PEAK OUTPUT POWER.....	20
7.3 HOPPING CHANNEL SEPARATION .....	26
7.4 NUMBER OF HOPPING FREQUENCY USED .....	31
7.5 DWELL TIME ON EACH CHANNEL.....	34
7.6 DUTY CYCLE .....	48
7.7 CONDUCTED SPURIOUS EMISSION.....	51
7.8 RADIATED EMISSIONS .....	60
7.7.1 TRANSMITTER RADIATED SUPURIOUS EMESSIONS .....	60
7.7.2 WORST-CASE RADIATED EMISSION BELOW 1 GHZ .....	64
7.7.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHZ .....	66
7.7.4 RESTRICTED BAND EDGES.....	72
7.9 POWERLINE CONDUCTED EMISSIONS.....	80
<b>APPENDIX I PHOTOGRPHS OF TEST SETUP .....</b>	<b>84</b>
<b>APPENDIX II PHOTOGRAPHS OF EUT .....</b>	<b>A1</b>

## 1. TEST REPORT CERTIFICATION

<b>Applicant</b>	:	inMusic Brands, Inc.
<b>Address</b>	:	200 Scenic View Drive, Cumberland, RI 02864, U.S.A.
<b>Manufacturer</b>	:	inMusic Brands, Inc.
<b>Address</b>	:	200 Scenic View Drive, Cumberland, RI 02864, U.S.A.
<b>Equipment Under Test</b>	:	Turntable
<b>Model Number</b>	:	BT100
<b>Brand Name</b>	:	AKAI
<b>Date of Test</b>	:	December 28, 2015 ~ January 12, 2016

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C: 2014 AND ANSI C63.10: 2013	PASS

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.


The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:



Jeter Wu  
Assistant Manager

Reviewed by:



Eric Huang  
Assistant Section Manager

## 2. EUT DESCRIPTION

### 2.1 DESCRIPTION OF EUT & POWER

<b>Product</b>	Turntable
<b>Model Number</b>	BT100
<b>Brand Name</b>	AKAI
<b>Identify Number</b>	T160106N12
<b>Received Date</b>	December 28, 2015
<b>Frequency Range</b>	2402 ~ 2480 MHz
<b>Transmit Peak Power</b>	GFSK : 6.102dBm / 4.075679266mW 8DPSK: 6.157dBm / 4.127622774mW
<b>Channel Spacing</b>	1MHz
<b>Transmit Data Rate</b>	GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps), 8-DPSK (3Mbps)
<b>Modulation Technique</b>	Frequency Hopping Spread Spectrum
<b>Number of Channels</b>	79 Channels
<b>Power Supply</b>	DC 12V, 500mA, 6W (Powered by Adapter)
<b>Antenna Type</b>	Manufacturer: BRITO TECHNOLOGY Type: PIFA antenna Model: ANT-200 Gain: 2.04dBi
<b>Hardware Version</b>	V.0
<b>Software Version</b>	AT02BT_00

#### Power Adapter :

No.	Manufacturer	Model No.	Power Input	Power Output
1	GPE	GPE053A-V120050-Z	100-240Vac, 50/60Hz, 0.2A	12Vdc, 500mA

#### Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for **FCC ID: Y40-BT-100** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.

### 3. DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2402
Middle	2441
High	2480

#### Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Normal Operation

#### Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH5
Low, Mid, High	FHSS	8-DPSK	3-DH5

#### Bandedge Measurement :

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, High	FHSS	GFSK	DH5
Low, High	FHSS	8-DPSK	3-DH5

**Antenna Port Conducted Measurement :**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH5
Low, Mid, High	FHSS	8-DPSK	3-DH5

**4. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.10 : 2013 and FCC CFR 47 15.207, 15.209 and 15.247.

## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

No.8,Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3 LABORATORY ACCREDITATIONS LISTINGS**

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW-1037).

## 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan	TAF
--------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.


Canada	INDUSTRY CANADA
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>


## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

EMI

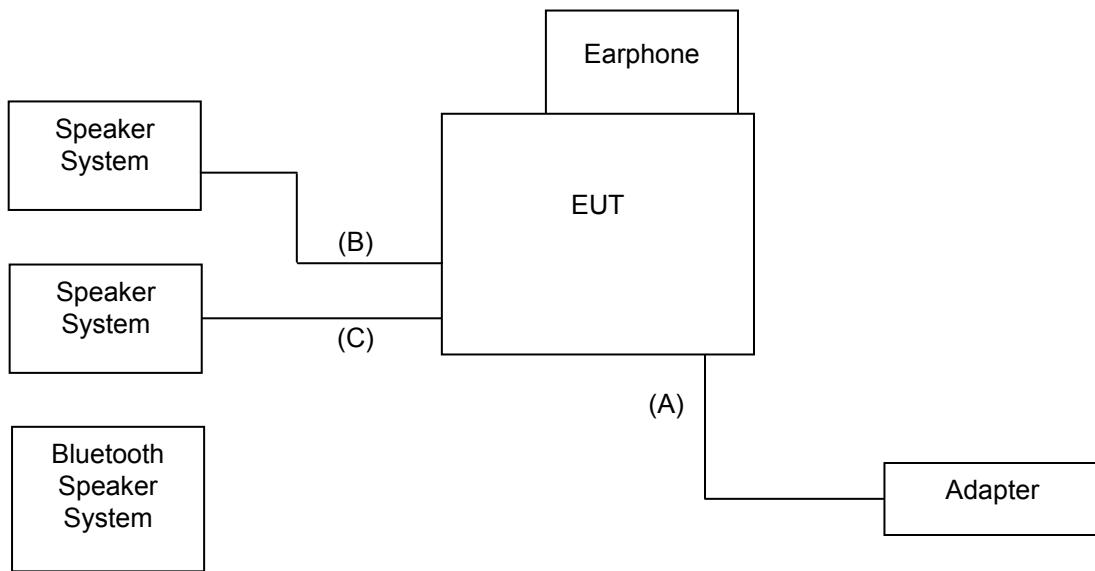

RF

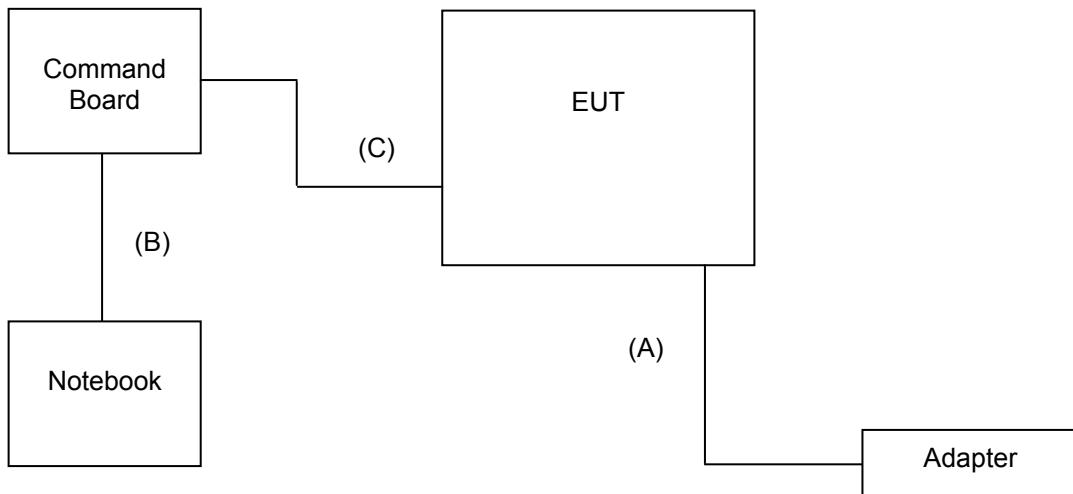

## 6.2 SUPPORT EQUIPMENT

### For EMI test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Notebook	TOSHIBA	Satellite L730	DOC	Power cable, unshd, 1.6m
2	Speaker System	ECHO	LA-227	DOC	Audio cable, unshd, 1.6m
3.	Earphone	N/A	N/A	N/A	Earphone cable, unshd, 1.6m
4.	Bluetooth Speaker System	ADIN	F2	N/A	N/A

No.	Signal cable description	
A	DC Power	Unshielded, 1.5m, 1 pcs.
B	USB	Shielded, 1.8m, 1 pcs. with 2cores
C	Audio	Unshielded, 0.7m, 1 pcs.

### For RF test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Notebook	Acer	AS 3830TG	DOC	Power cable, unshd, 1.6m

No.	Signal cable description	
A	Power	Unshielded, 1.5m, 1pcs
B	USB	Shielded, 1.8m, 1pcs. with one core
C	Command	Unshielded, 1.0m, 1pcs

**EUT OPERATING CONDITION****RF Setup**

1. Set up all computers like the setup diagram.
2. The "ISRT\_V1.0.37.2841" software was used for testing
3. Choose Chip Number "IS1621S\_393\_SRC\_V3.1" , COM "COM21" and BAUDRATE "115200".

**TX Mode:****GFSK(DH1):****Packet Type > DH1****BDR MAX > CH0 : 0x5a**

CH39 : 0x60

CH78 : 0x64

**GFSK(DH3):****Packet Type > DH3****BDR MAX > CH0 : 0x5a**

CH39 : 0x60

CH78 : 0x64

**GFSK(DH5):****Packet Type > DH5****BDR MAX > CH0 : 0x5a**

CH39 : 0x60

CH78 : 0x64

**8-DPSK(3DH1):****Packet Type > 3DH1****EDR MAX > CH0 : 0x5a**

CH39 : 0x60

CH78 : 0x64

**8-DPSK(3DH3):****Packet Type > 3DH3****EDR MAX > CH0 : 0x5a**

CH39 : 0x60

CH78 : 0x64

**8-DPSK(3DH5):****Packet Type > 3DH5****EDR MAX > CH0 : 0x5a**

CH39 : 0x60

CH78 : 0x64

**RX Mode:****RX**

4. All of the function are under run.
5. Start test.

## 7. APPLICABLE LIMITS AND TEST RESULTS

### 7.1 20dB BANDWIDTH FOR HOPPING

#### LIMIT

None; for reporting purposes only.

#### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2017

#### TEST SETUP



#### TEST PROCEDURE

The 20dB band width was measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20dB band width of the emission was determined.

**TEST RESULTS**

<b>Model Name</b>	BT100	<b>Test By</b>	Ted Huang
<b>Temp &amp; Humidity</b>	26.5°C, 53%	<b>Test Date</b>	2016/01/12


**Modulation Type: GFSK / DH5**

<b>Channel</b>	<b>Channel Frequency (MHz)</b>	<b>20dB Bandwidth (kHz)</b>	<b>Pass / Fail</b>
Low	2402	1019.00	N/A
Middle	2441	1027.00	N/A
High	2480	959.00	N/A


**Modulation Type: 8-DPSK / 3-DH5**

<b>Channel</b>	<b>Channel Frequency (MHz)</b>	<b>20dB Bandwidth (kHz)</b>	<b>Pass / Fail</b>
Low	2402	1275.00	N/A
Middle	2441	1319.00	N/A
High	2480	1326.00	N/A

## 20dB BANDWIDTH

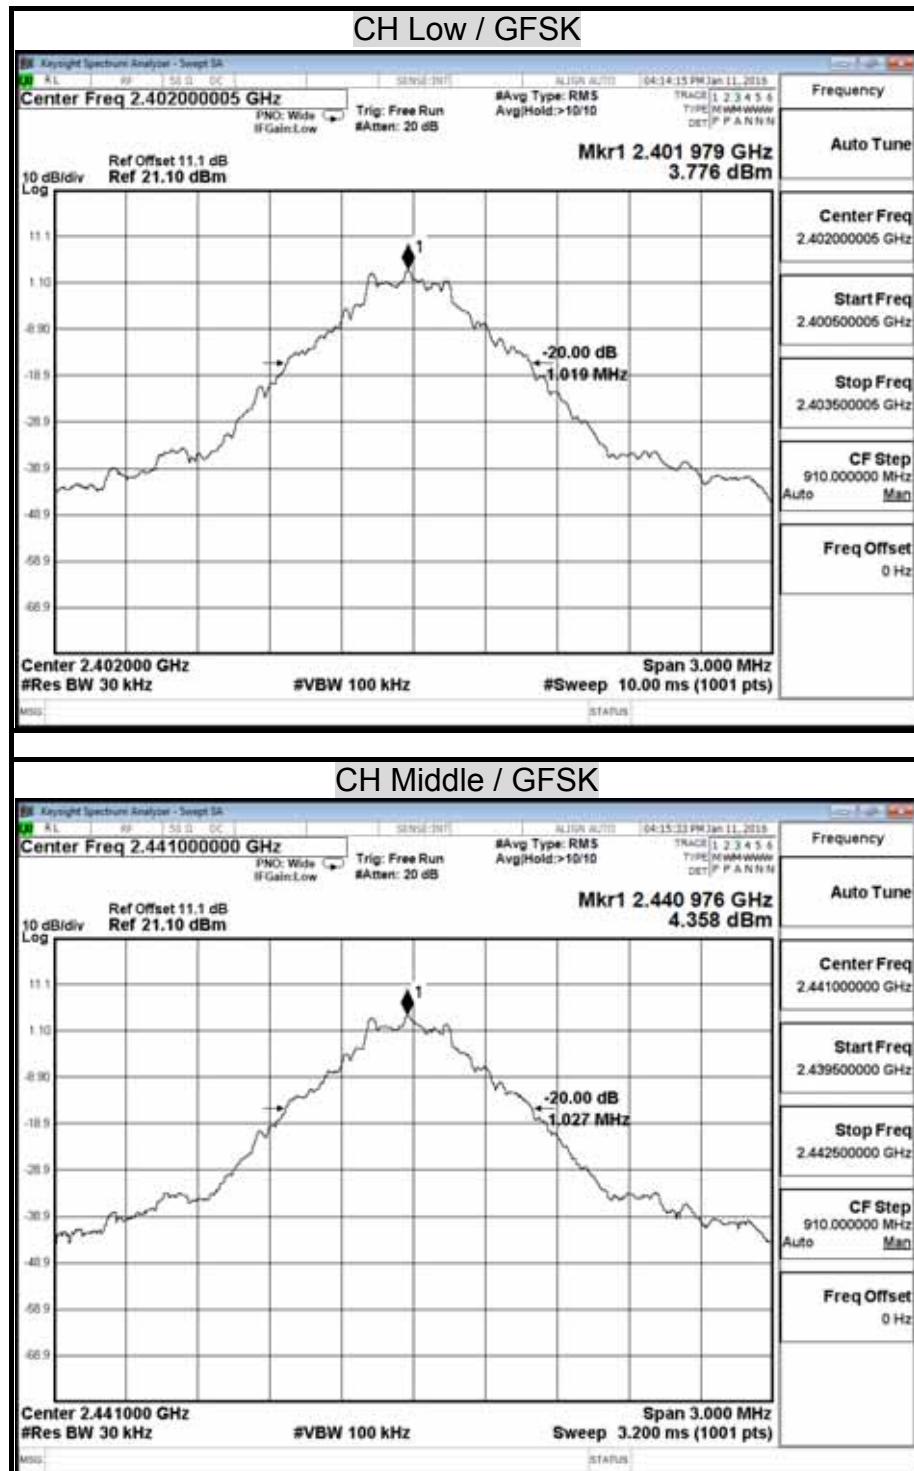



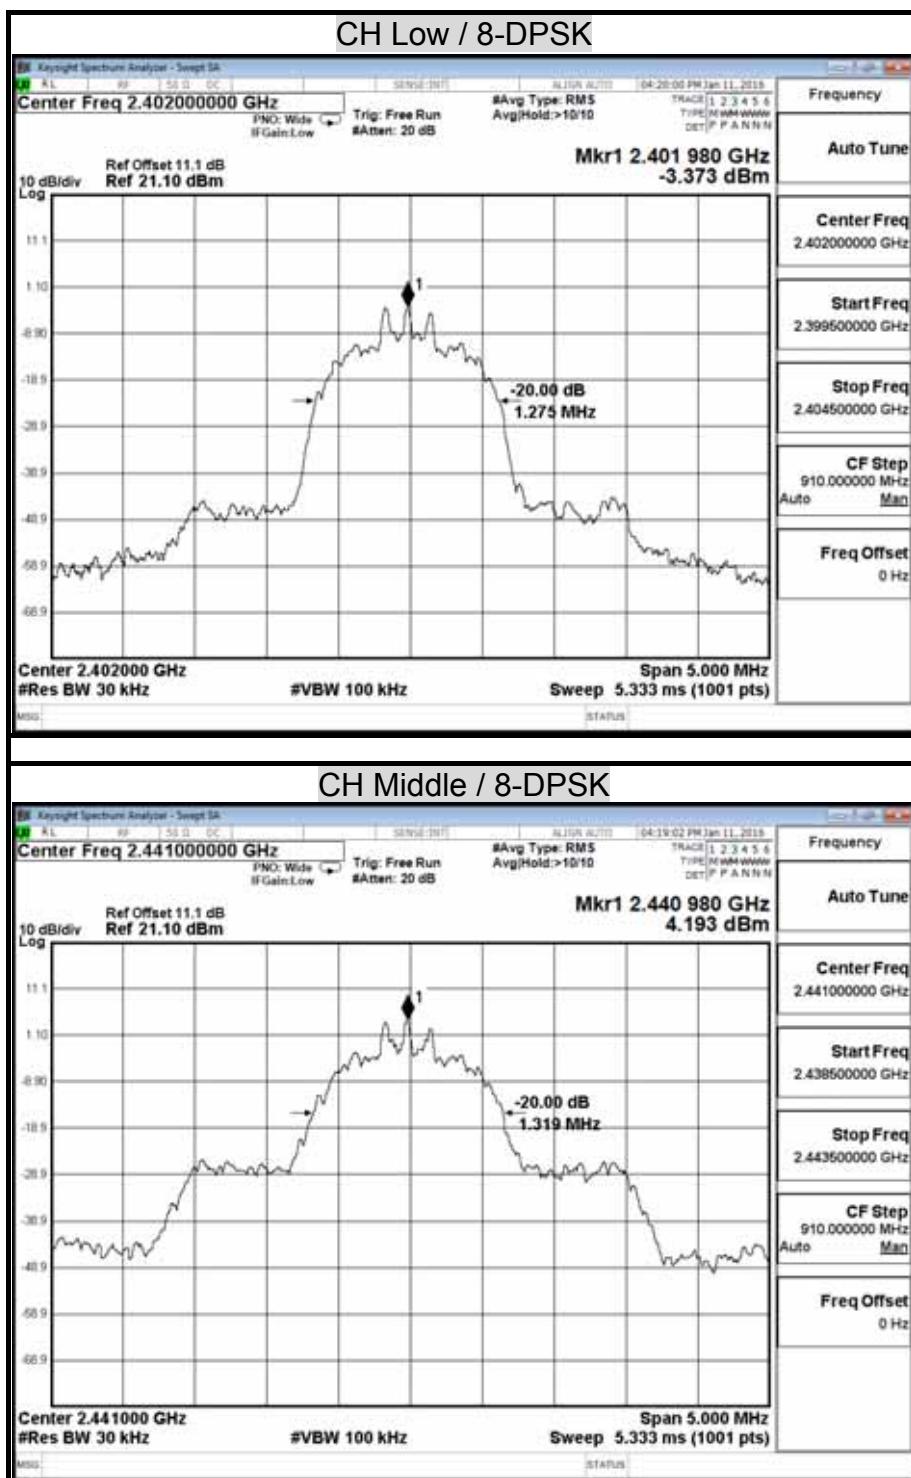



## 7.2 MAXIMUM PEAK OUTPUT POWER


### LIMIT

§15.247(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2017

### Test Configuration



### TEST PROCEDURE

The RF power output was measured with a Spectrum Analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. A power meter was used to record the shape of the transmit signal.

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold


**TEST RESULTS****Modulation Type: GFSK / DH5**


<b>Model Name</b>	BT100	<b>Test By</b>	Ted Huang
<b>Temp &amp; Humidity</b>	26.5°C, 53%	<b>Test Date</b>	2016/01/12


Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)	Limit (mW)	Result
Low	2402	5.10	3.23519	125	PASS
Mid	2441	5.78	3.78181		PASS
High	2480	6.10	4.07568		PASS


**Modulation Type: 8-DPSK / 3-DH5**

Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)	Limit (mW)	Result
Low	2402	5.21	3.31971	125	PASS
Mid	2441	5.90	3.89224		PASS
High	2480	6.16	4.12762		PASS

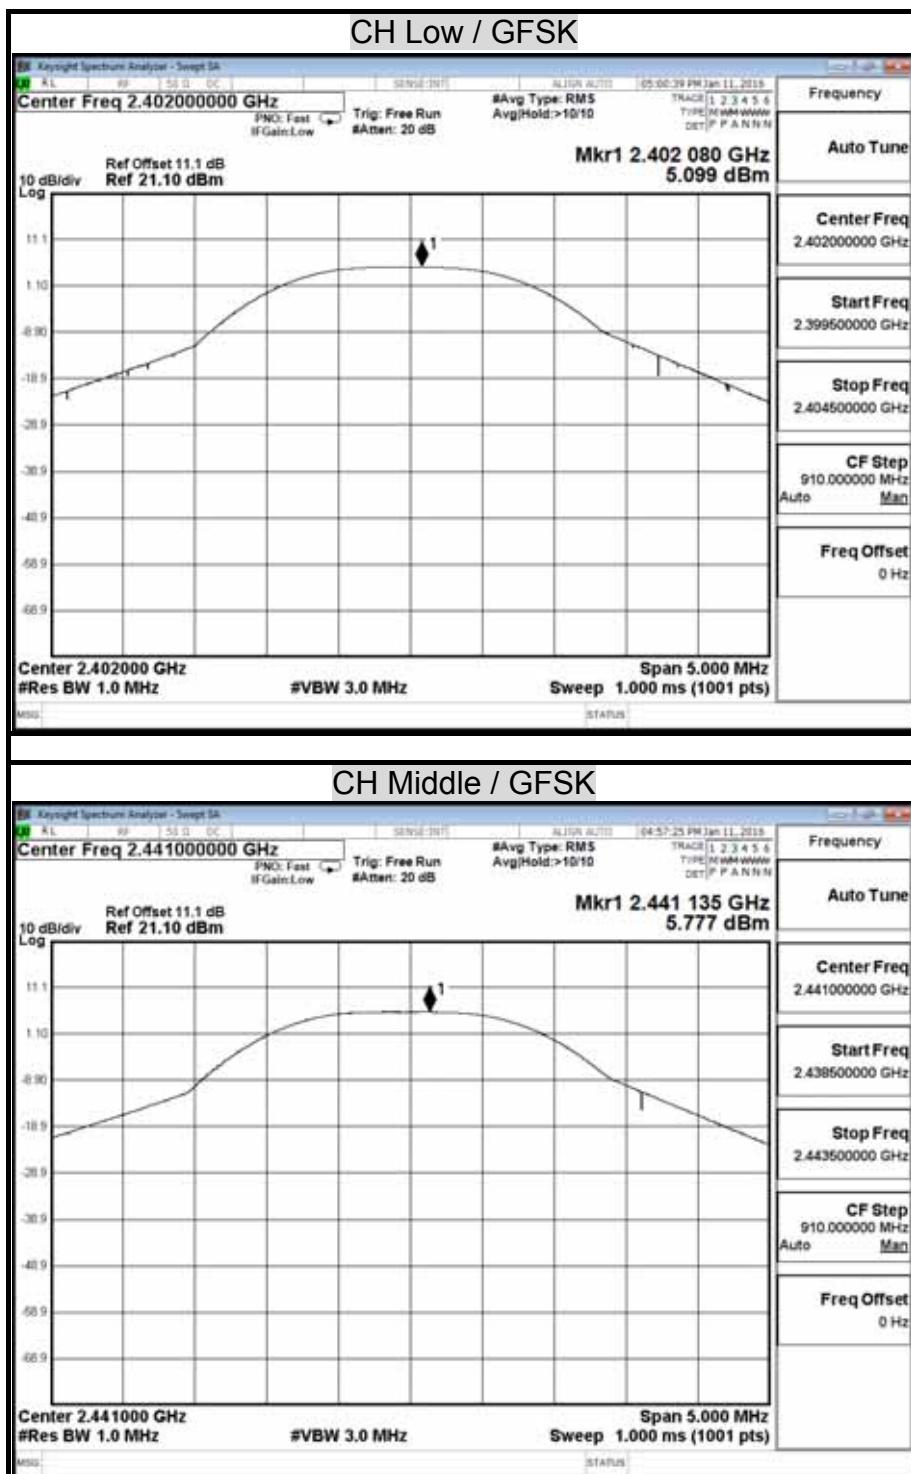**MAXIMUM PEAK OUTPUT POWER**

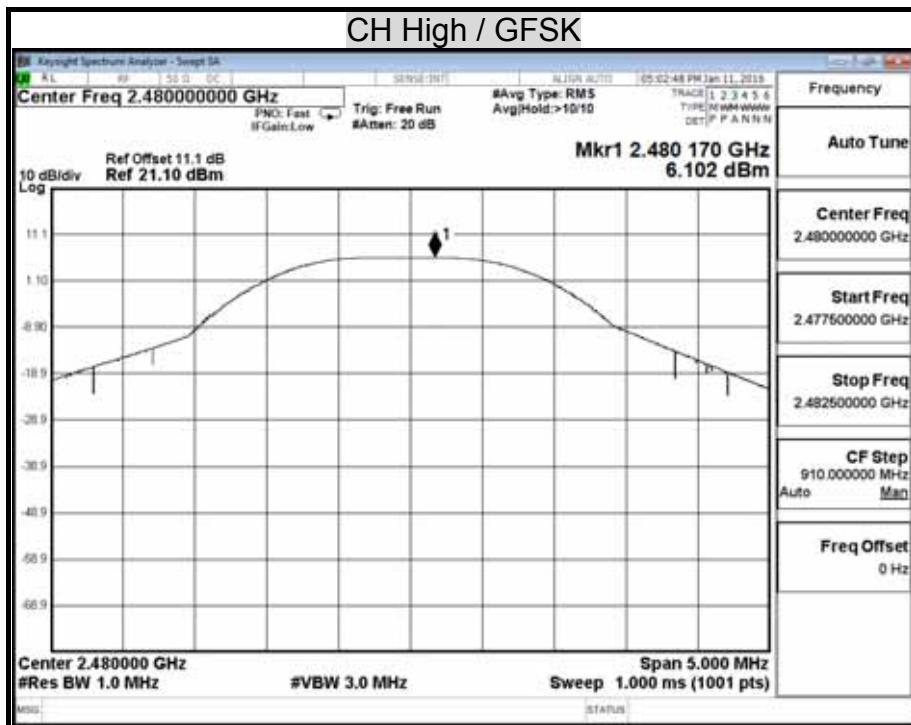

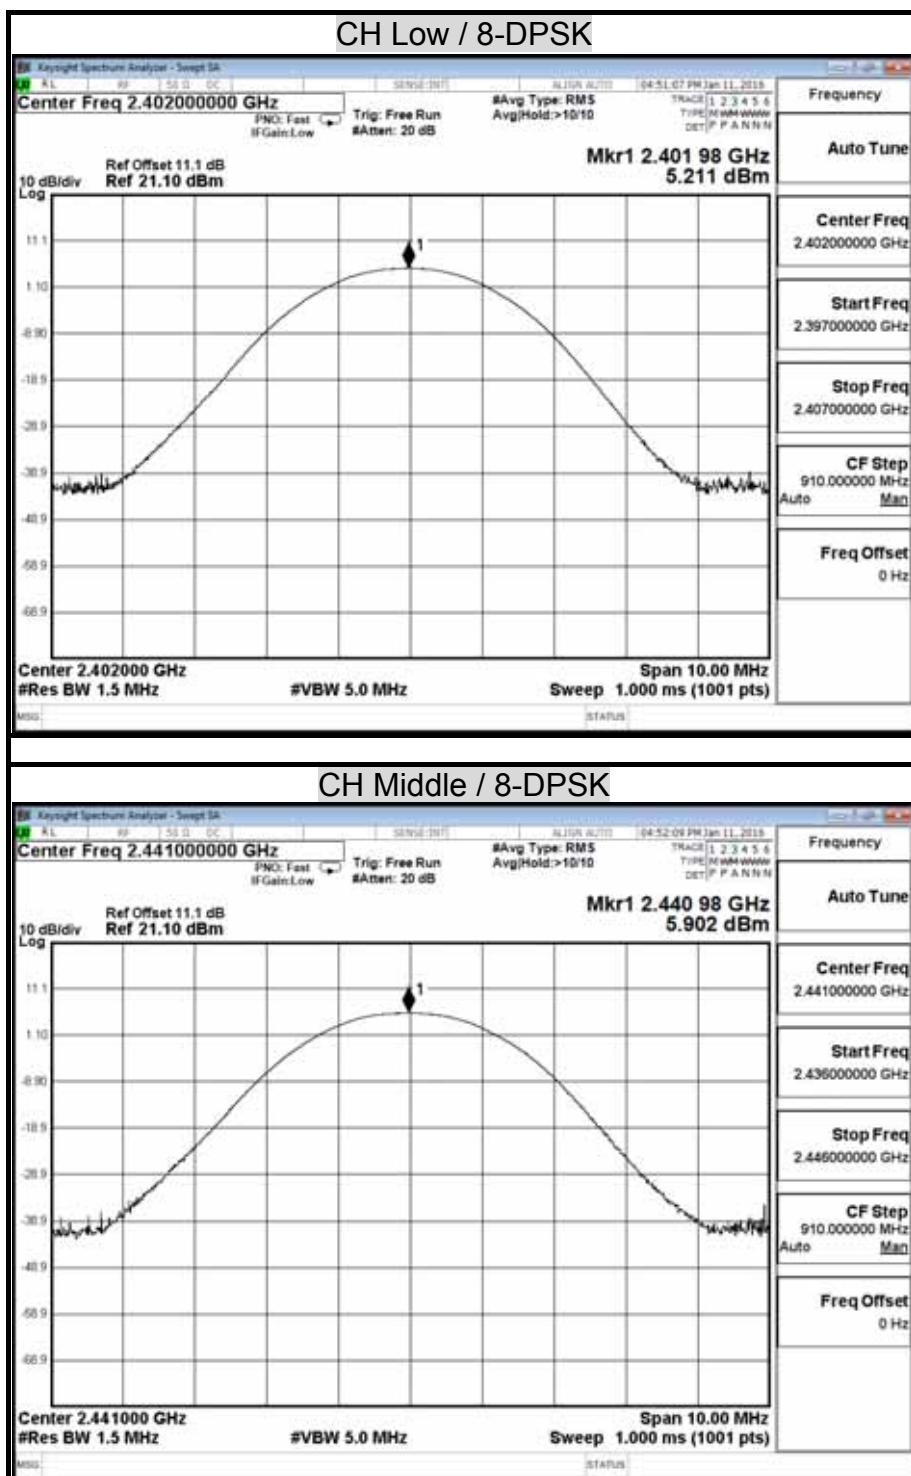

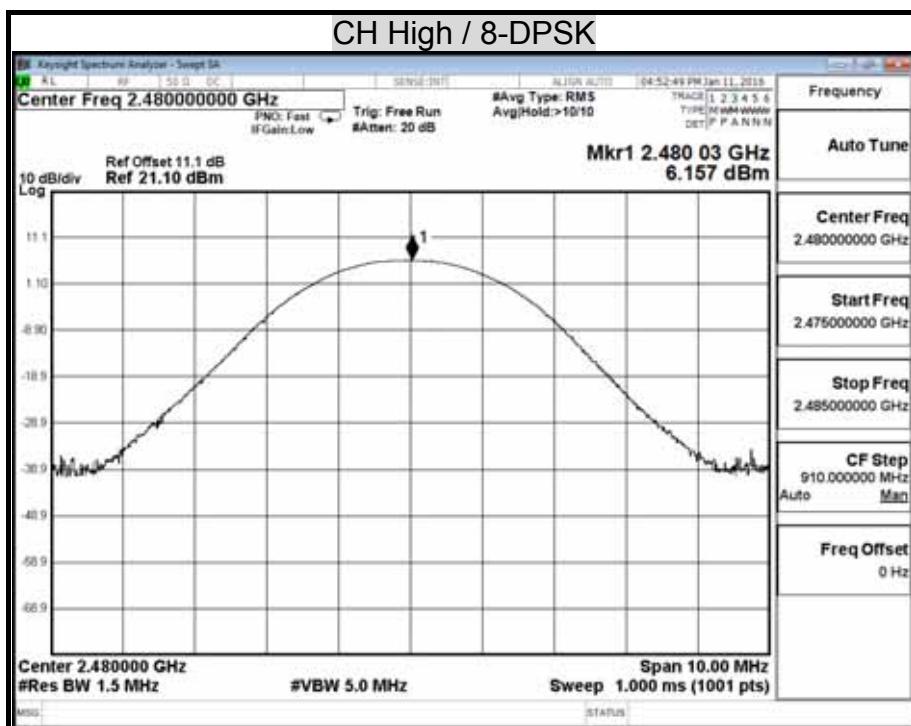

## 7.3 HOPPING CHANNEL SEPARATION


### LIMIT

§15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2017

### TEST SETUP



### TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer MARK function. And then plot the result on spectrum analyzer screen.
5. Repeat above procedures until all frequencies measured were complete.

**TEST RESULTS**

Refer to section 8.1, 20dB bandwidth measurement, the measured channel separation should be greater than two-third of 20dB bandwidth or Minimum bandwidth.

**Modulation Type: GFSK / DH5**



<b>Model Name</b>	BT100	<b>Test By</b>	Ted Huang
<b>Temp &amp; Humidity</b>	26.5°C, 53%	<b>Test Date</b>	2016/01/12



Channel	Adjacent Hopping Channel Separation (MHz)	Two –third of 20dB bandwidth (MHz)	Minimum Bandwidth (kHz)	Result
2402MHz	1.00	0.68	25 KHz	PASS
2441MHz	1.00	0.68	25 KHz	PASS
2480MHz	1.00	0.64	25 KHz	PASS



**Modulation Type: 8-DPSK / 3-DH5**

Channel	Adjacent Hopping Channel Separation (kHz)	Two –third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2402MHz	1.00	0.85	25 KHz	PASS
2441MHz	1.01	0.88	25 KHz	PASS
2480MHz	1.00	0.88	25 KHz	PASS

## HOPPING CHANNEL SEPARATION

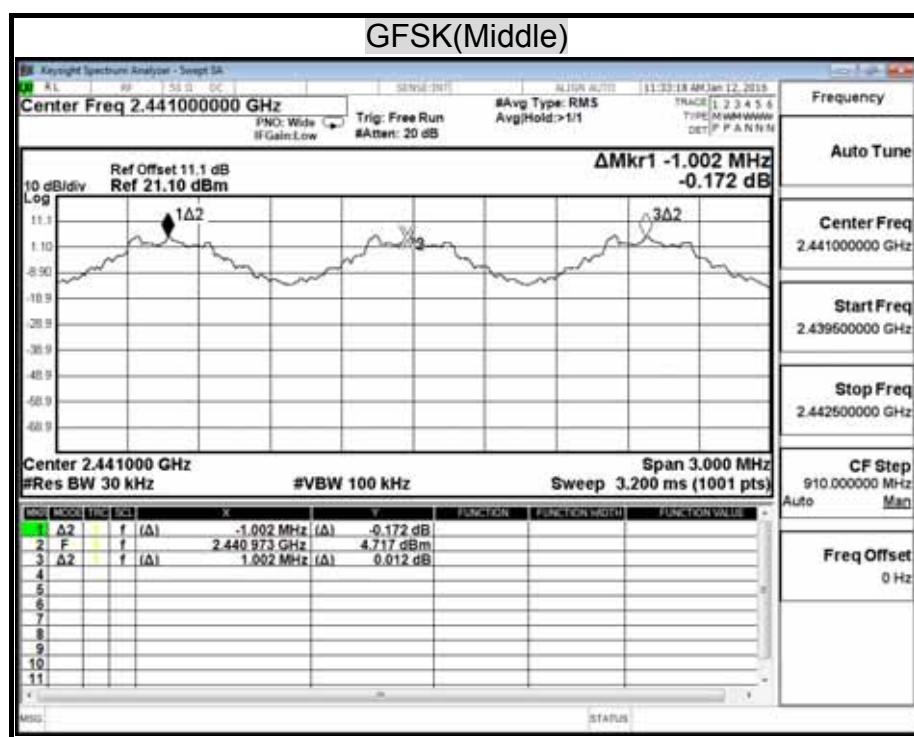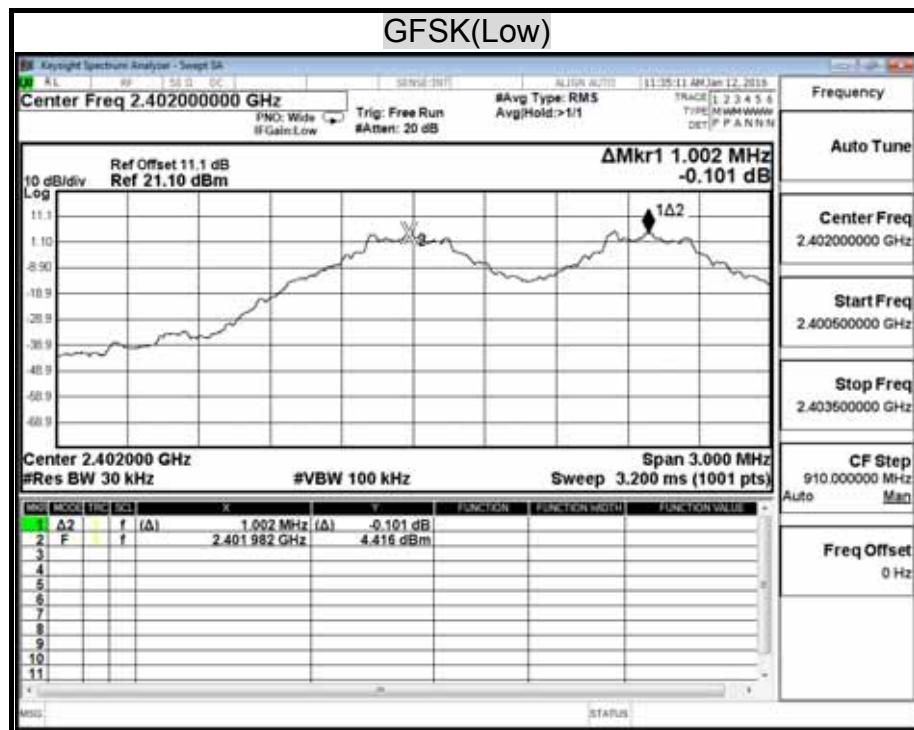

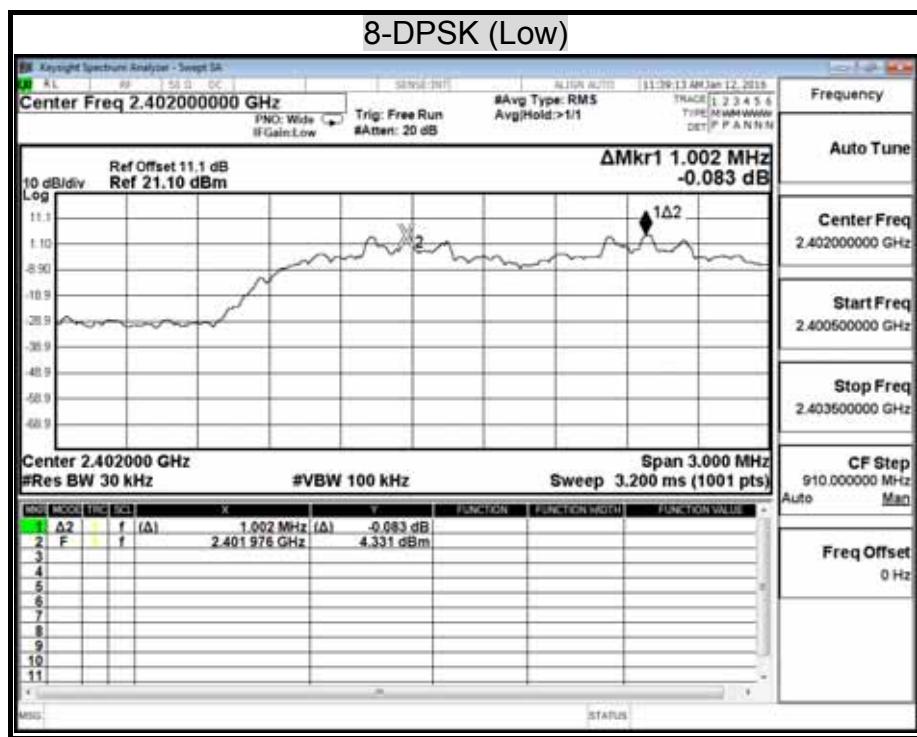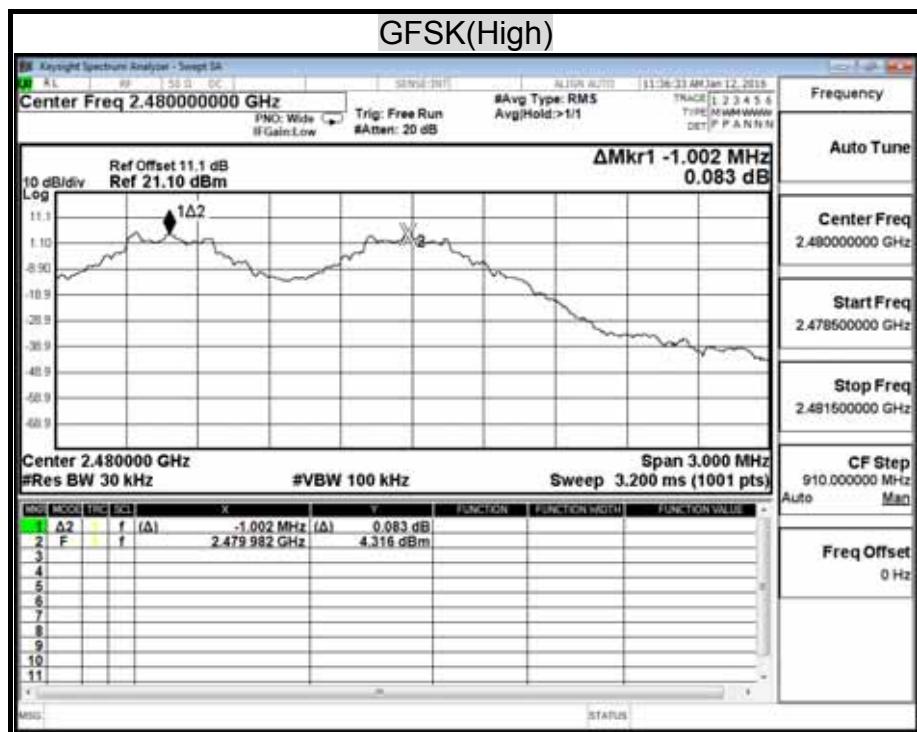

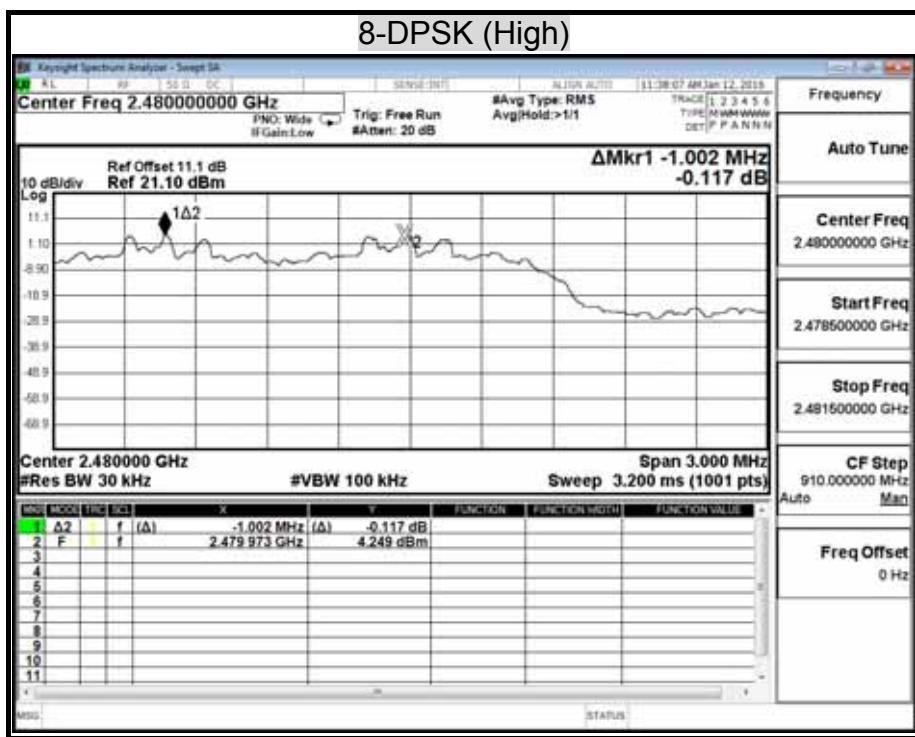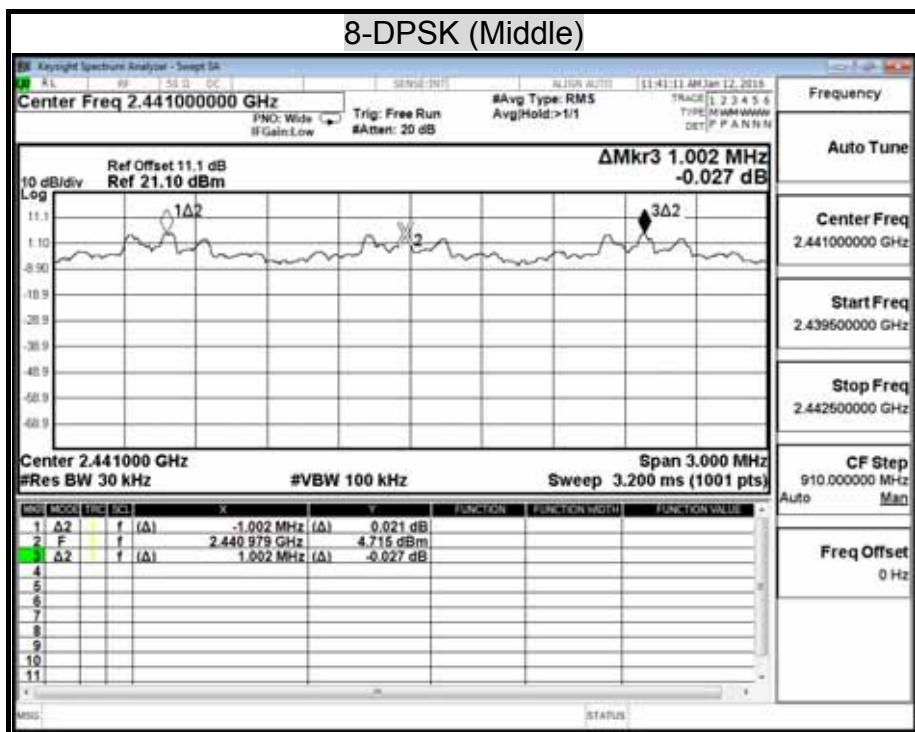

## 7.4 NUMBER OF HOPPING FREQUENCY USED


### LIMIT

§15.247(a)(1)(iii) For frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2017

### TEST SETUP



### TEST PROCEDURE

- 1 Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2 Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- 3 Set the spectrum analyzer on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- 4 Set the spectrum analyzer on View mode and then plot the result on spectrum analyzer screen.
- 5 Repeat above procedures until all frequencies measured were complete.

**TEST RESULTS**



<b>Model Name</b>	BT100	<b>Test By</b>	Ted Huang
<b>Temp &amp; Humidity</b>	26.5°C, 53%	<b>Test Date</b>	2016/01/12

**Modulation Type: GFSK / DH5**

Result(No.of CH)	Limit(No.of CH)	Result
79	>75	PASS

**Modulation Type: 8-DPSK / 3-DH5**

Result(No.of CH)	Limit(No.of CH)	Result
79	>75	PASS

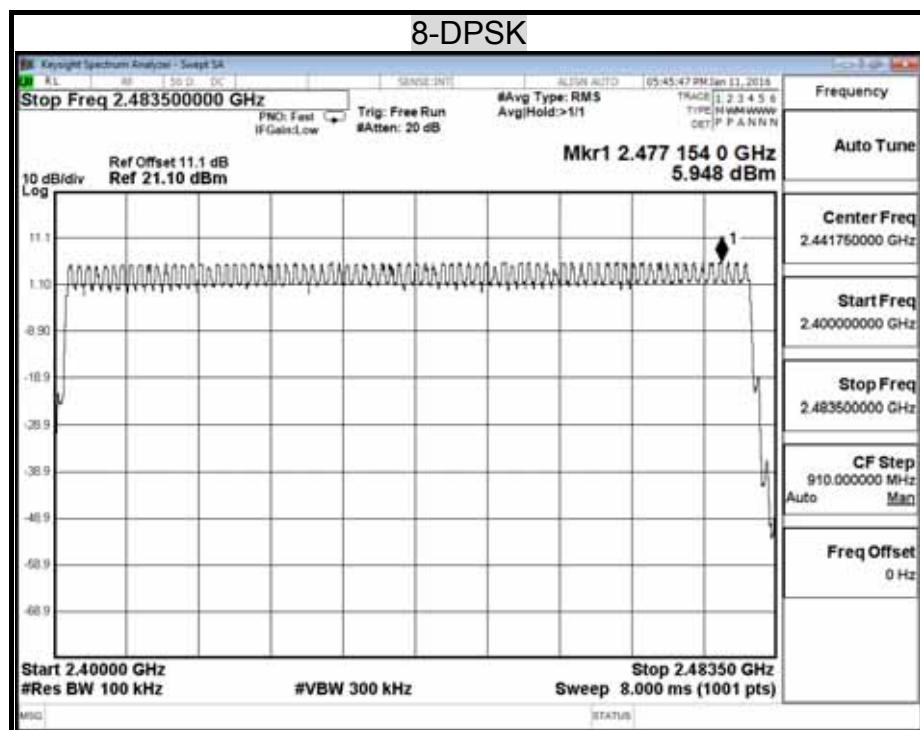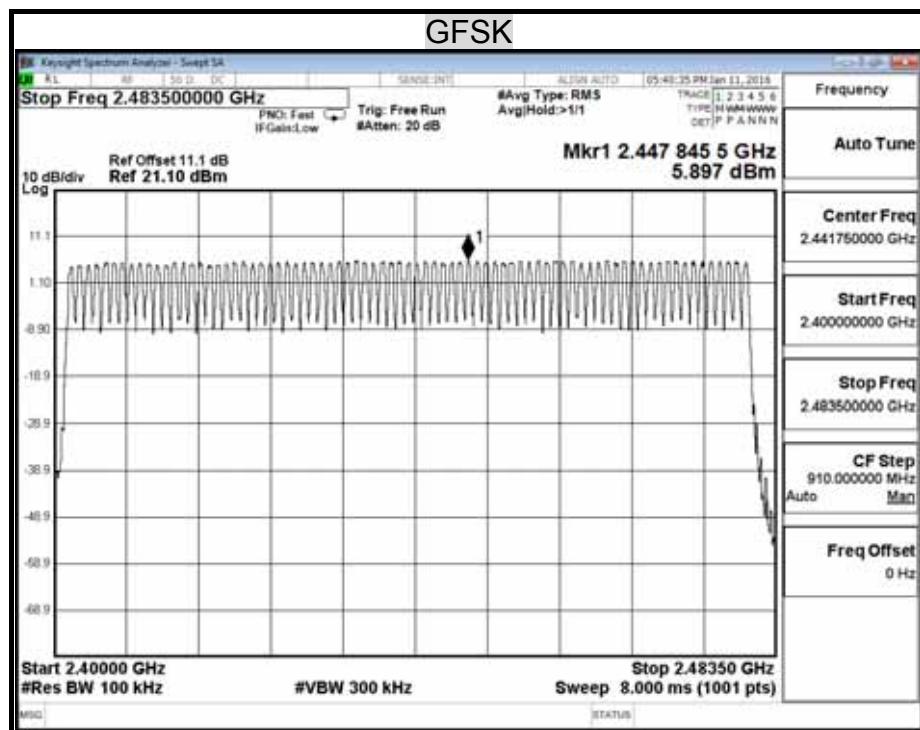NUMBER OF HOPPING FREQUENCY USED

## 7.5 DWELL TIME ON EACH CHANNEL


### LIMIT

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2017

### TEST SETUP



### TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency to be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The Bluetooth Headset has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second. The longer the payload is, the slower the hopping rate is.

## TEST RESULTS

Time of occupancy on the TX channel in 31.6sec = time domain slot length × hop rate ÷ number of hop per channel × 31.6

Refer to the attached graph.

The hopping rates of Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

<b>Model Name</b>	BT100	<b>Test By</b>	Ted Huang
<b>Temp &amp; Humidity</b>	26.5°C, 53%	<b>Test Date</b>	2016/01/12

### Modulation Type: GFSK / DH5

Transmitting Frequency	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of occupancy on the TX channel in 31.6sec (ms)	Results
2441MHz	DH1	0.410	131.20	400.00	PASS
2441MHz	DH3	1.670	267.20	400.00	PASS
2441MHz	DH5	2.900	309.33	400.00	PASS
2441MHz	AFH	2.900	154.67	400.00	PASS

DH1 Dwell time=  $0.410 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 131.20 \text{ (ms)}$

DH3 Dwell time=  $1.670 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 267.20 \text{ (ms)}$

DH5 Dwell time=  $2.900 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ (ms)}$

AFH Dwell time=  $2.900 \text{ ms} \times (800 \div 6) \div 20 \times 8 = 154.67 \text{ (ms)}$

### Modulation Type: 8-DPSK / 3-DH5


Transmitting Frequency	Packet type	Dwell time (ms)	Time of occupancy on the TX channel in 31.6sec (ms)	Limit for Time of occupancy on the TX channel in 31.6sec (ms)	Results
2441MHz	3DH1	0.420	134.40	400.00	PASS
2441MHz	3DH3	1.670	267.20	400.00	PASS
2441MHz	3DH5	2.900	309.33	400.00	PASS
2441MHz	AFH	2.900	154.67	400.00	PASS


3DH1 Dwell time=  $0.420 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 134.40 \text{ (ms)}$



3DH3 Dwell time=  $1.670 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 267.20 \text{ (ms)}$


3DH5 Dwell time=  $2.900 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.33 \text{ (ms)}$



AFH Dwell time=  $2.900 \text{ ms} \times (800 \div 6) \div 20 \times 8 = 154.67 \text{ (ms)}$

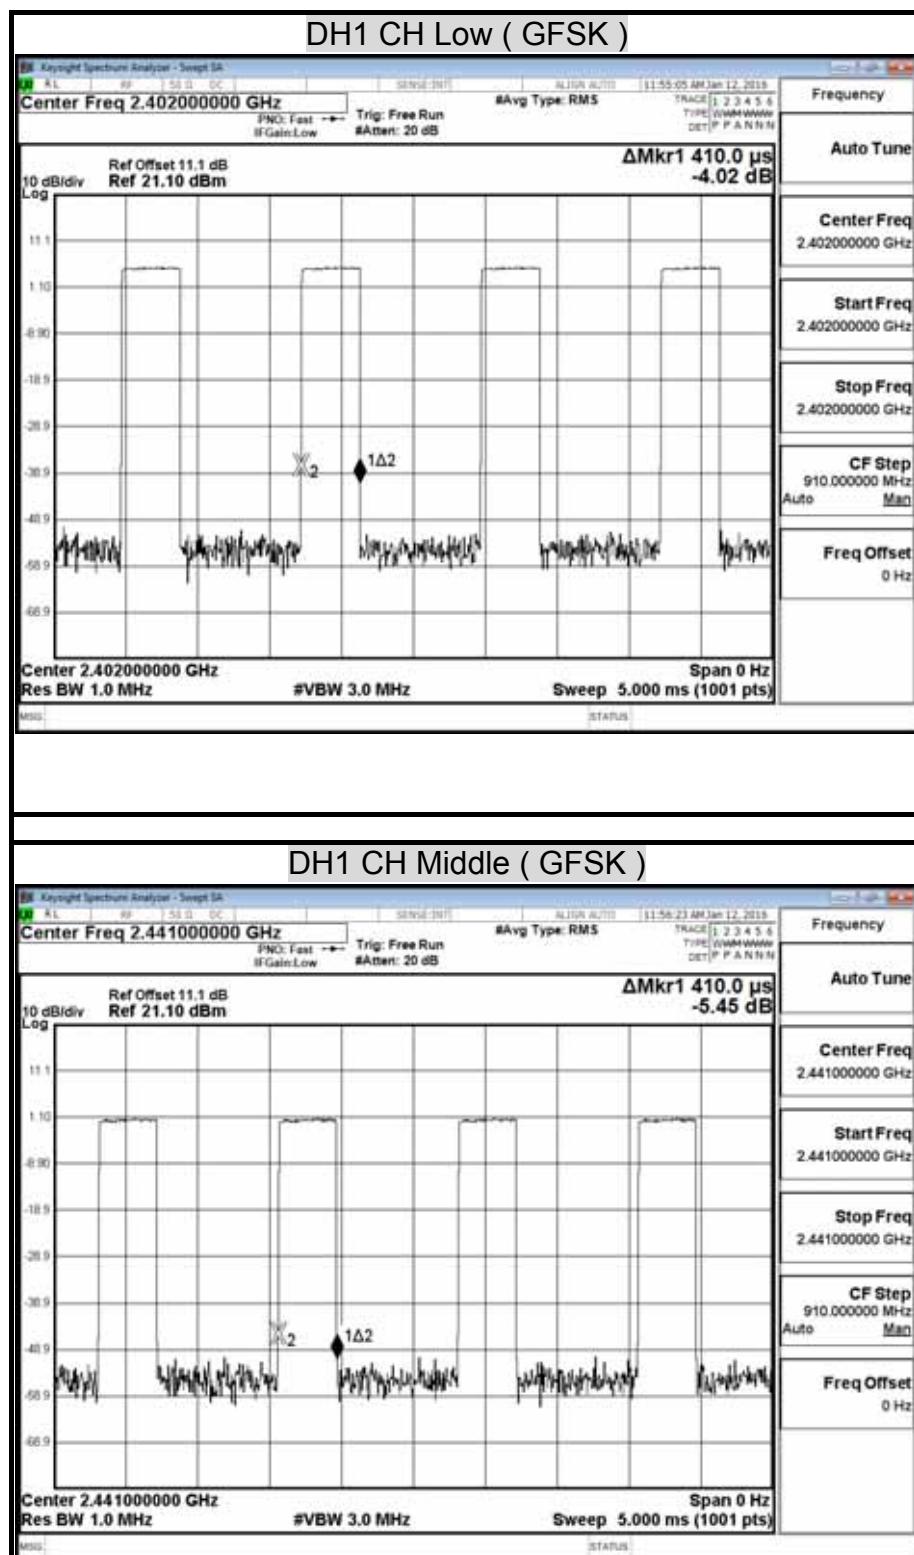
DWELL TIME ON EACH PAYLOAD

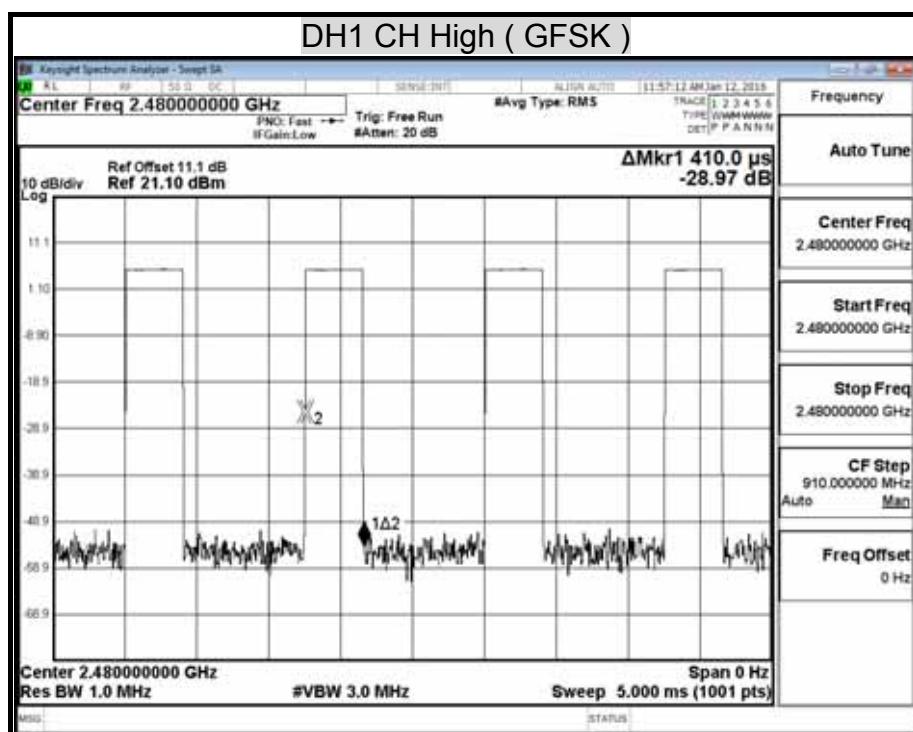


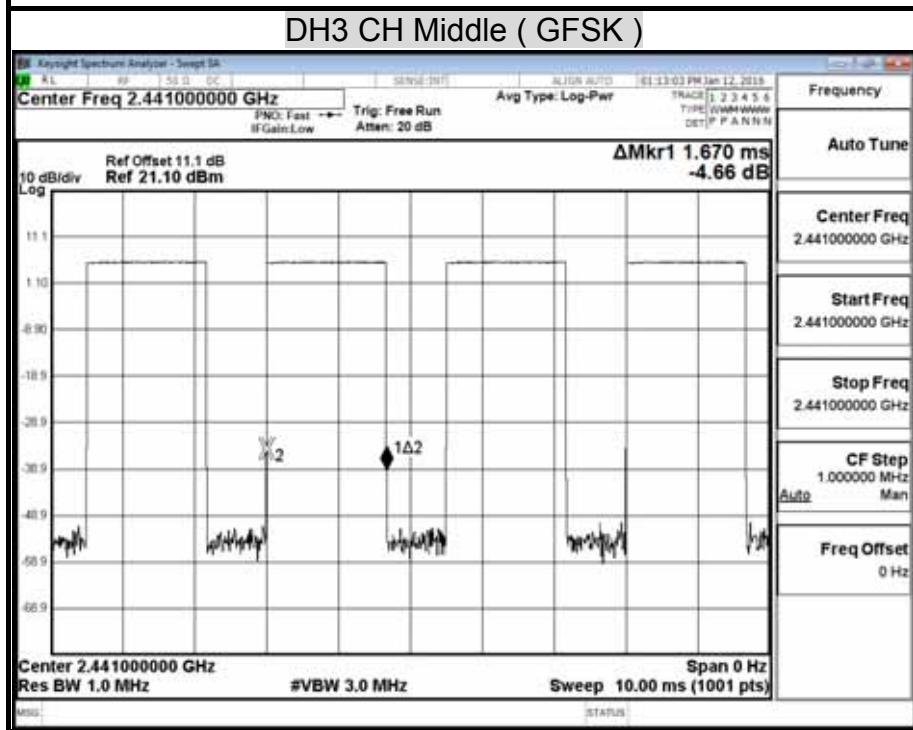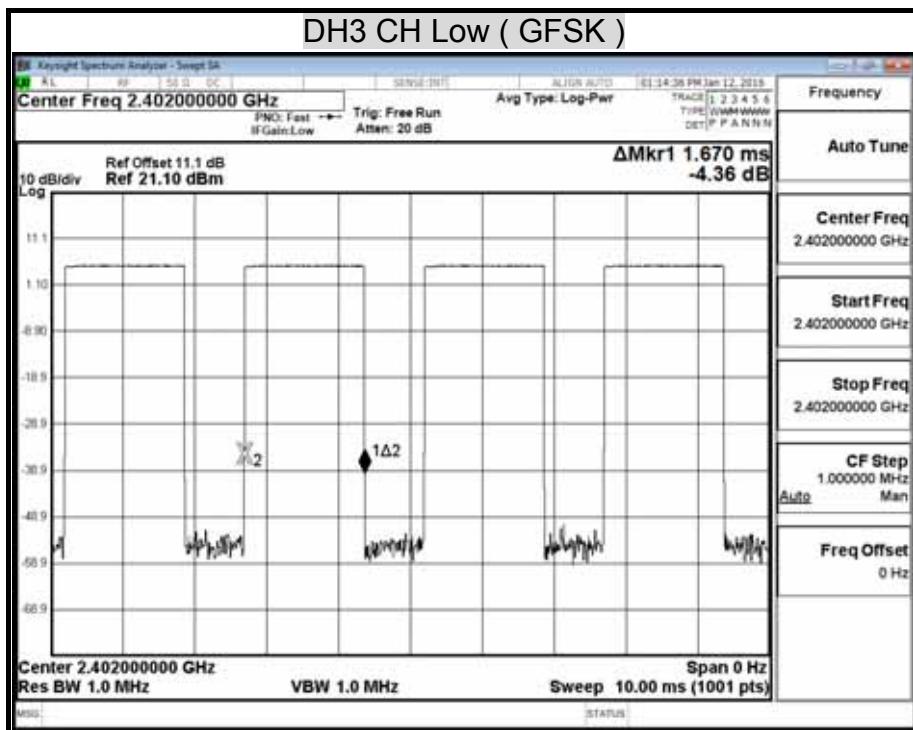


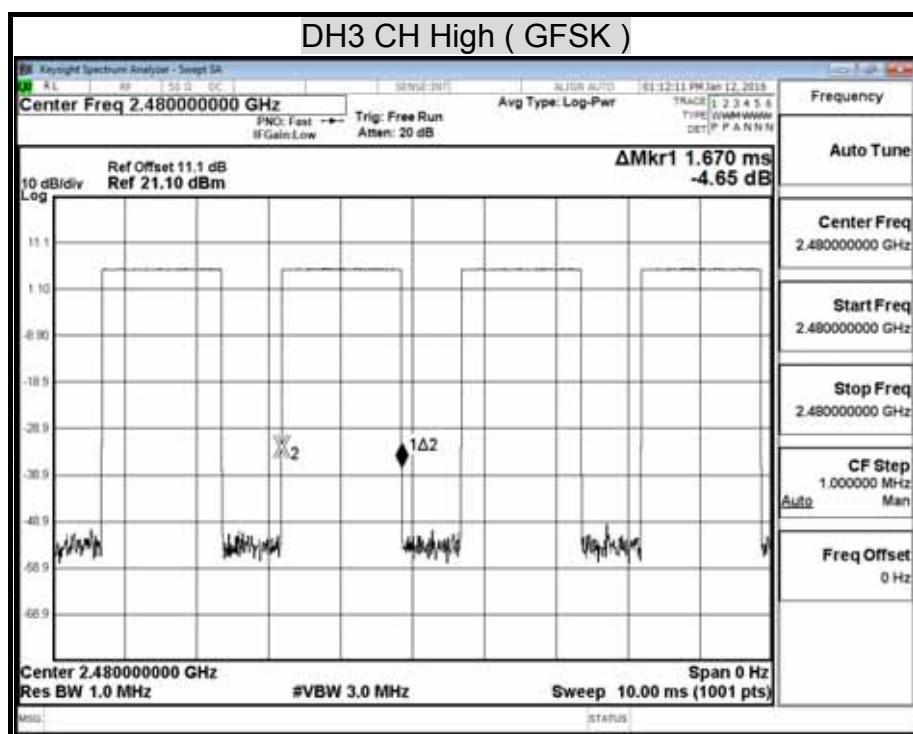


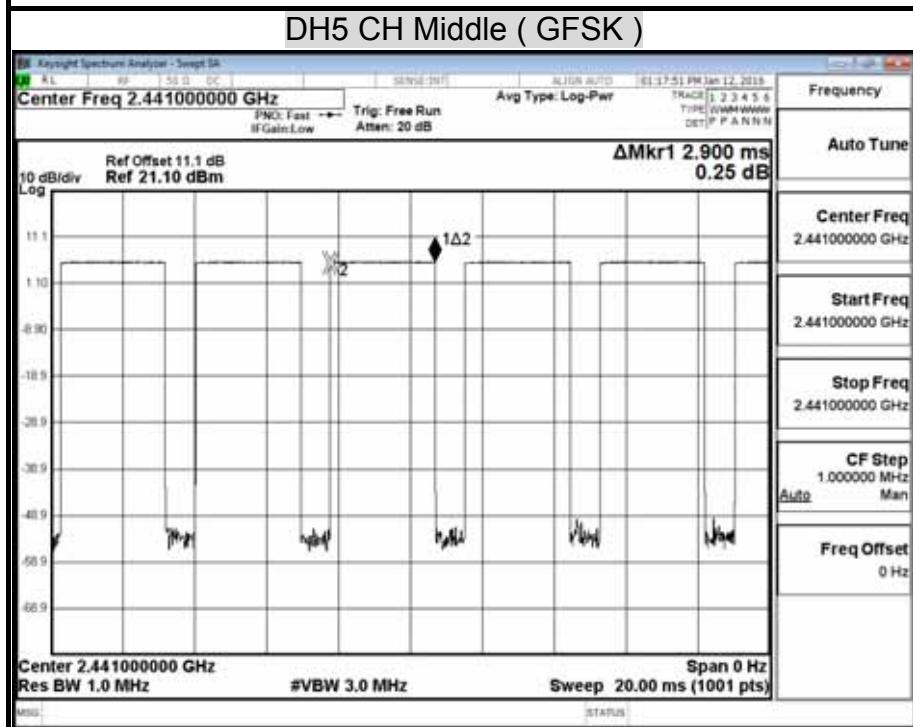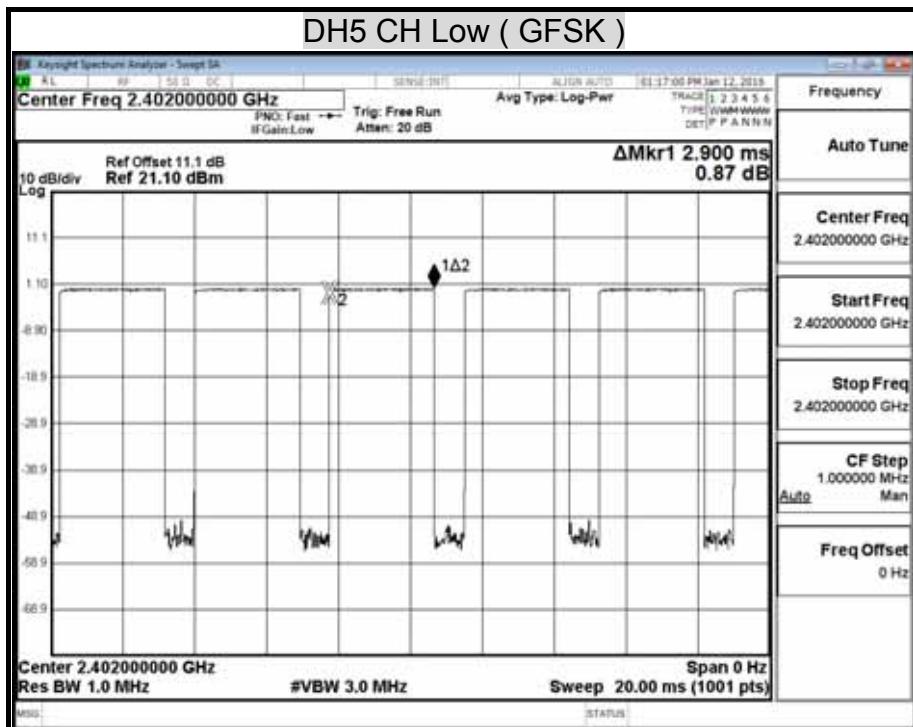



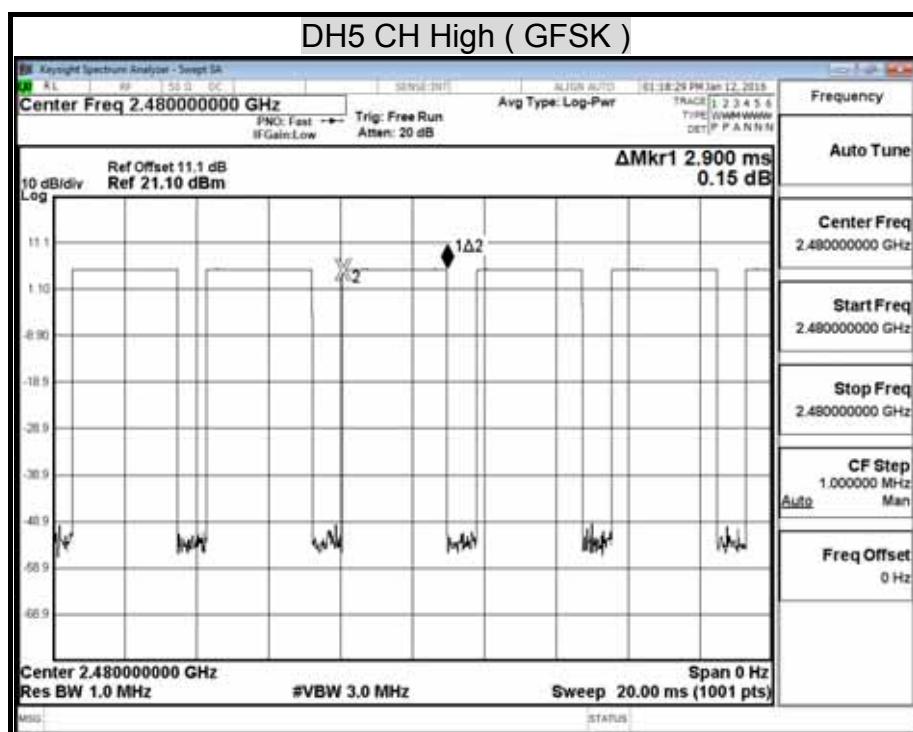


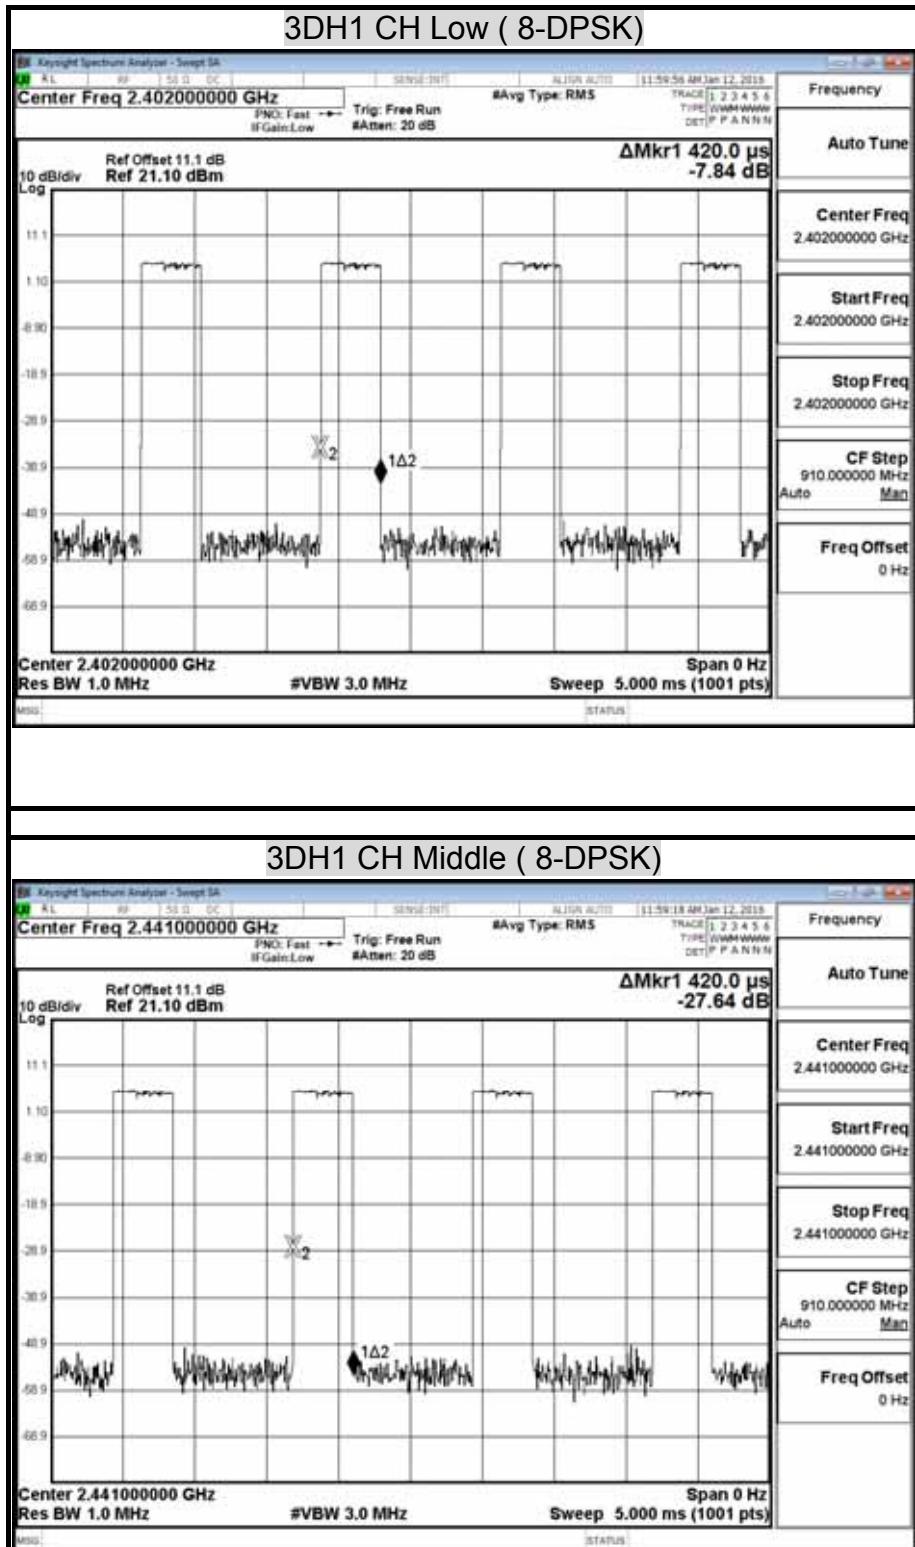


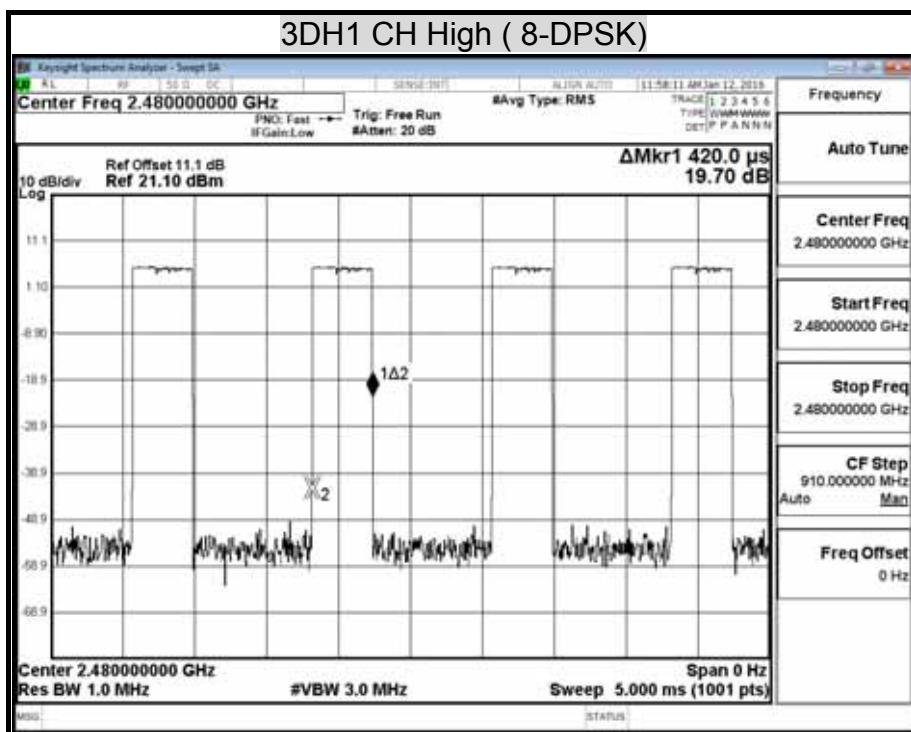

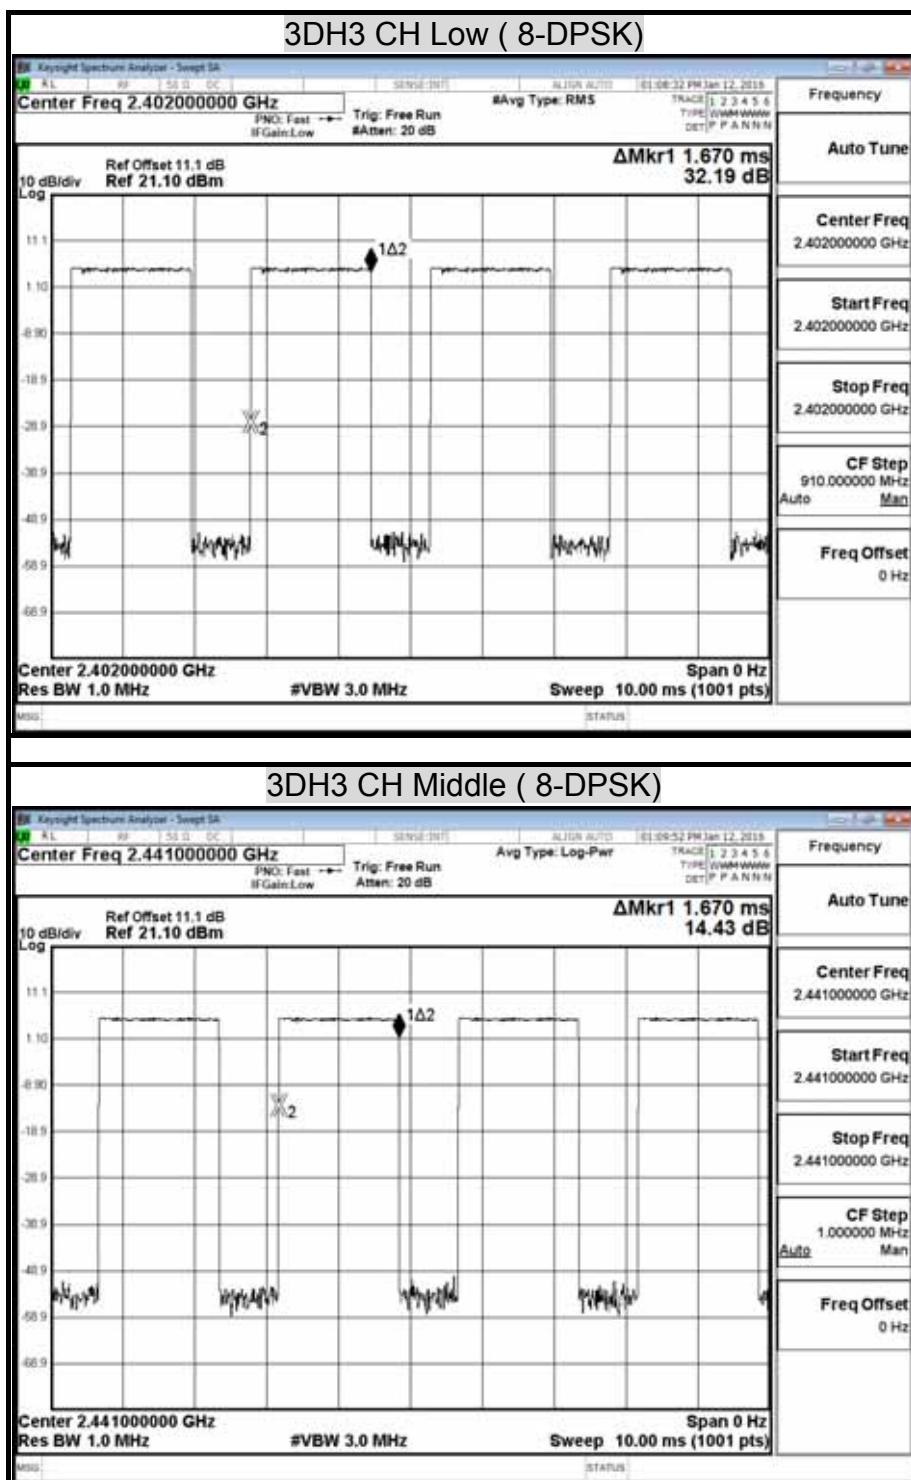

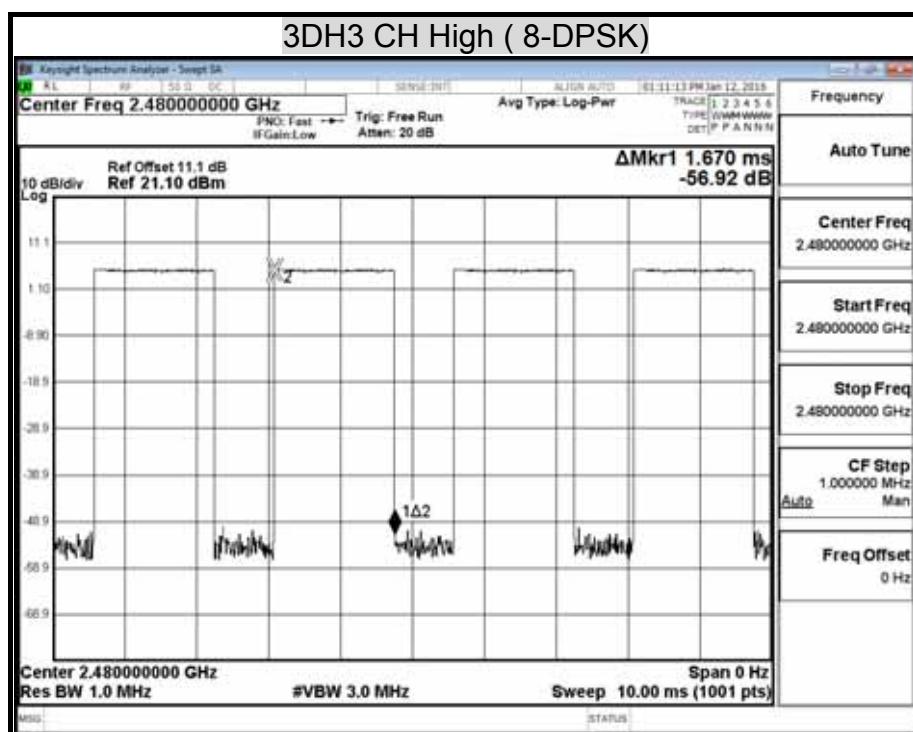

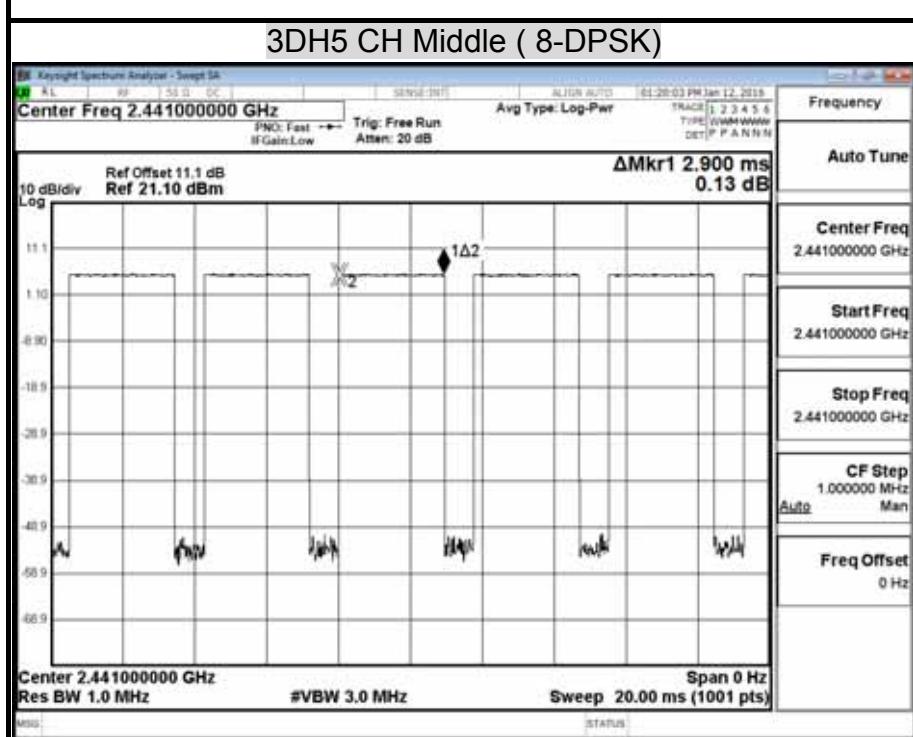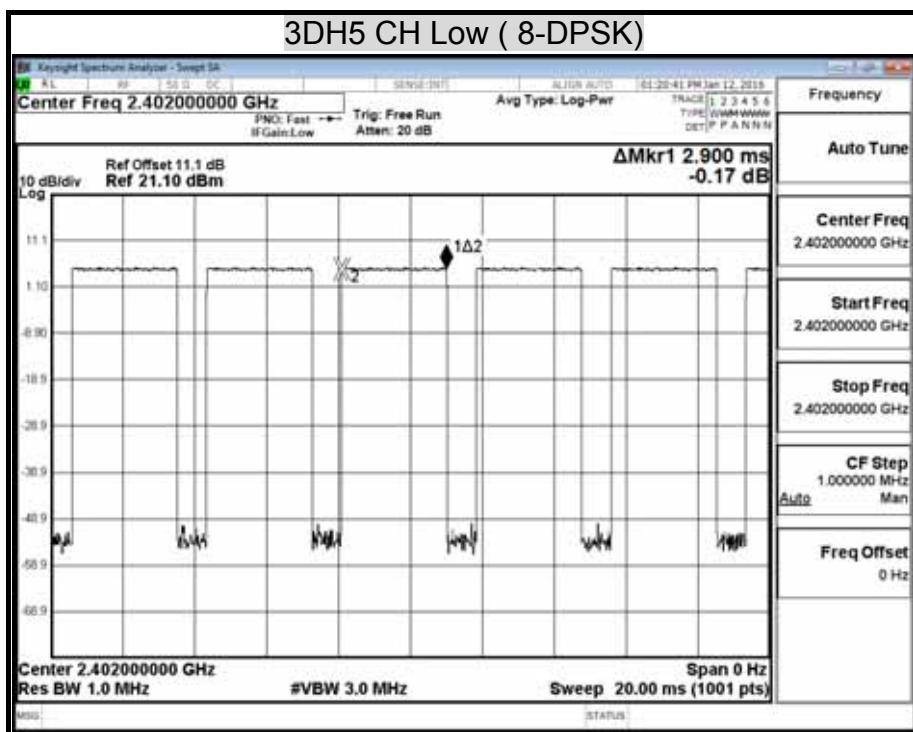

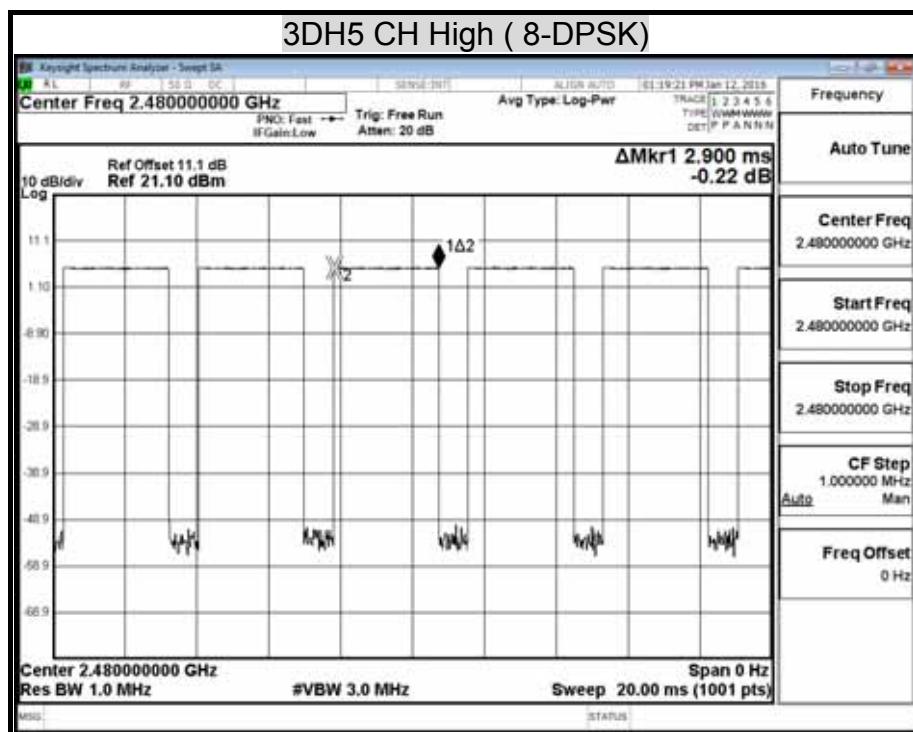

## 7.6 DUTY CYCLE

### LIMIT

Nil (No dedicated limit specified in the Rules)

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2017

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### TEST SETUP



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value. Set VBW  $\geq$  RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

**TEST RESULTS**

No non-compliance noted.

**TEST DATA**

<b>Model Name</b>	BT100	<b>Test By</b>	Ted Huang
<b>Temp &amp; Humidity</b>	26.5°C, 53%	<b>Test Date</b>	2016/01/12

**Modulation Type: GFSK / DH5**


	us	Times	Ton	Total Ton time(ms)
Ton1	2920.000	1	2920	2.92
Ton2		0	0	
Ton3			0	
Tp				3.75

Ton	2.92
Tp(Ton+Toff)	3.75
Duty Cycle	0.778666667
Duty Factor	1.086484163

**Modulation Type: G8-DPSK / 3-DH5**

	us	Times	Ton	Total Ton time(ms)
Ton1	2.930	1	2.93	0.00293
Ton2		0	0	
Ton3			0	
Tp				3.75

Ton	0.00293
Tp(Ton+Toff)	3.75
Duty Cycle	0.000781333
Duty Factor	31.07163647

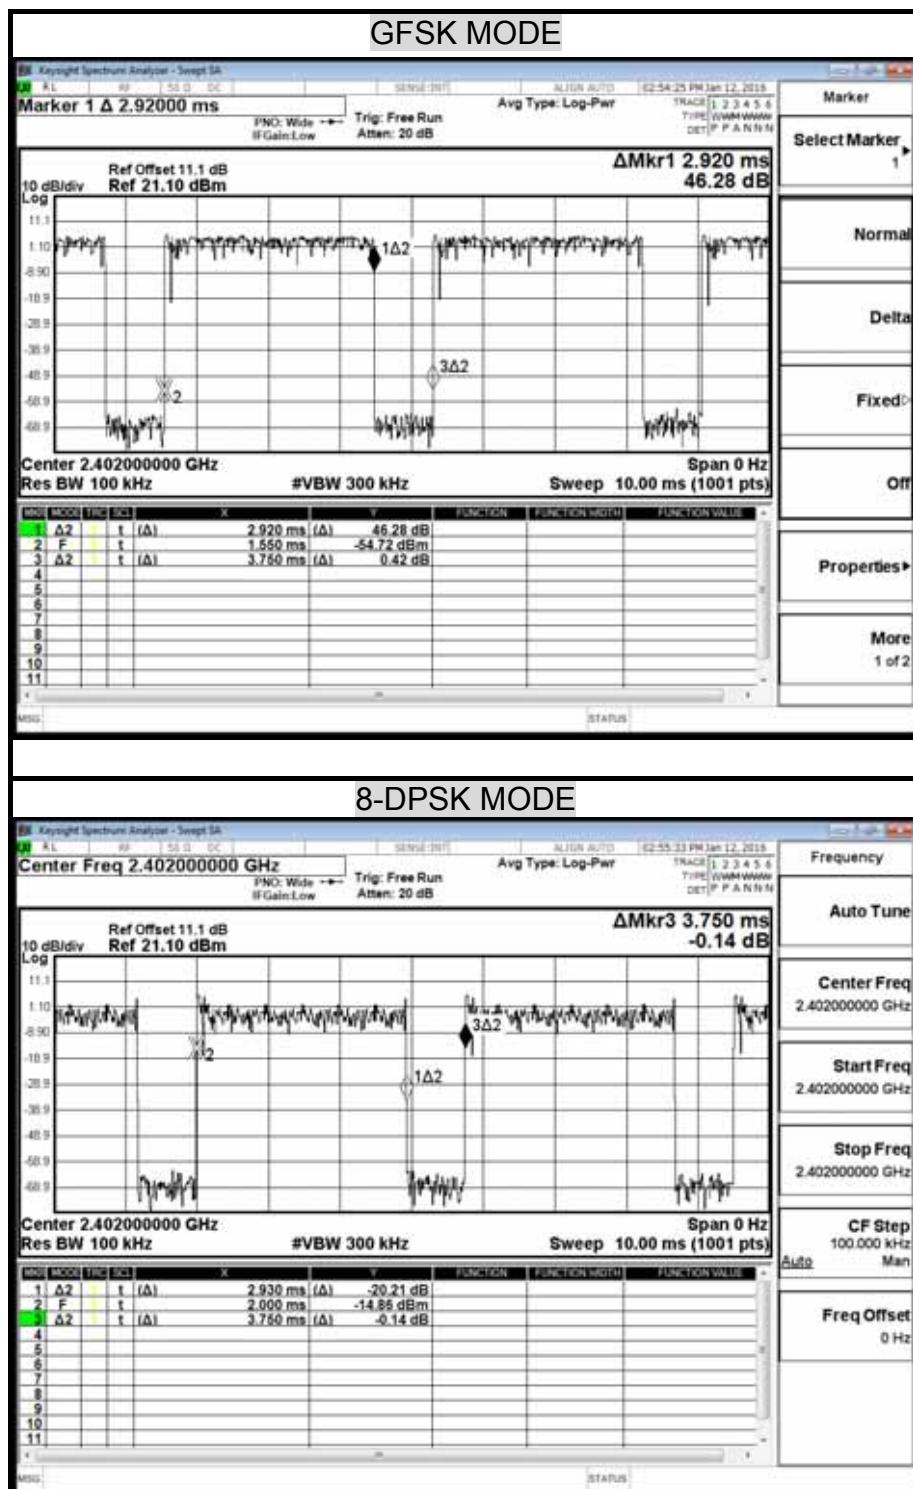TEST PLOTDuty Cycle

## 7.7 CONDUCTED SPURIOUS EMISSION


### LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2017

### TEST SETUP





### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



**TEST RESULTS**

Model Name	BT100	Test By	Ted Huang
Temp & Humidity	26.5°C, 53%	Test Date	2016/01/12

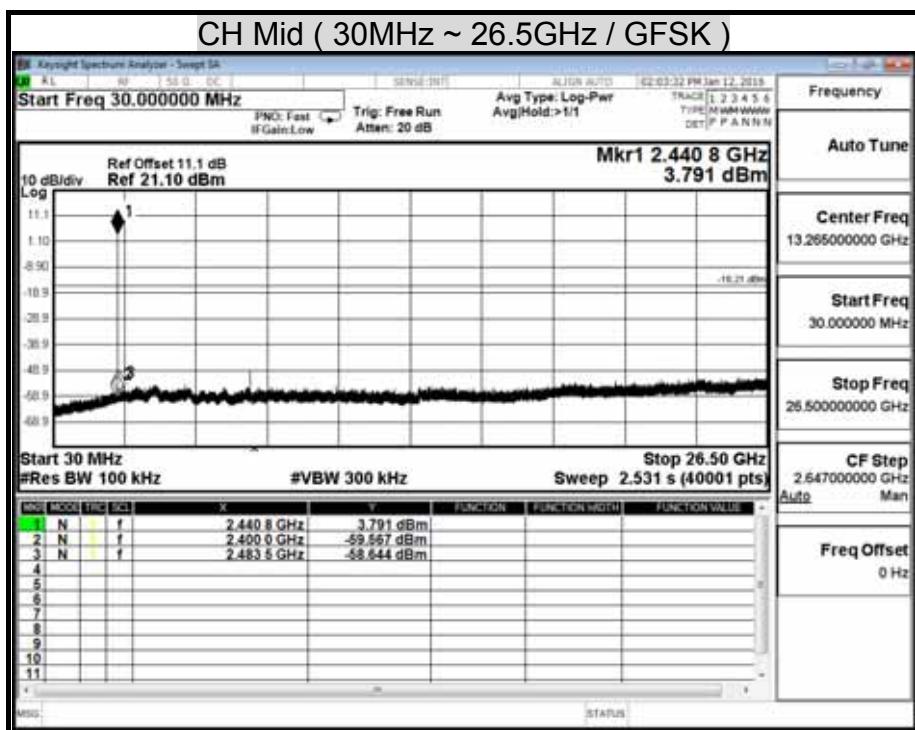
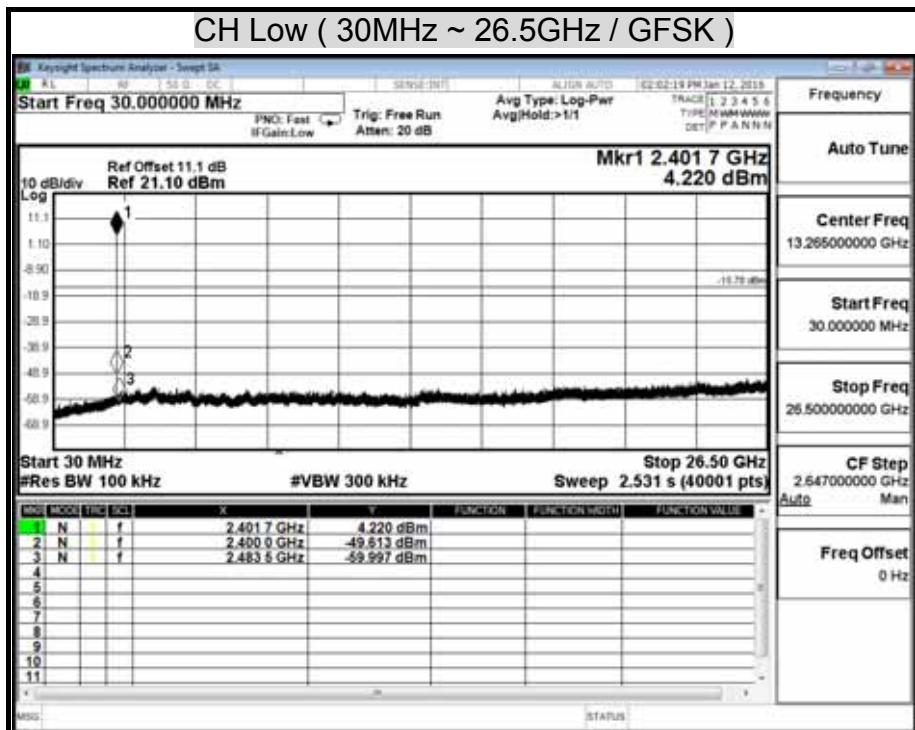
**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT**

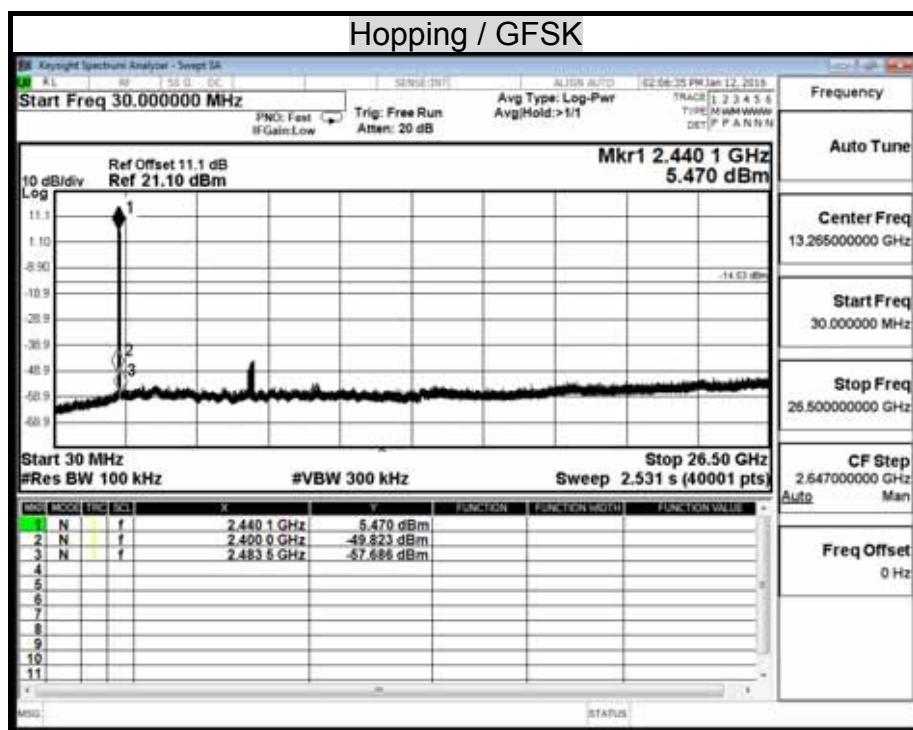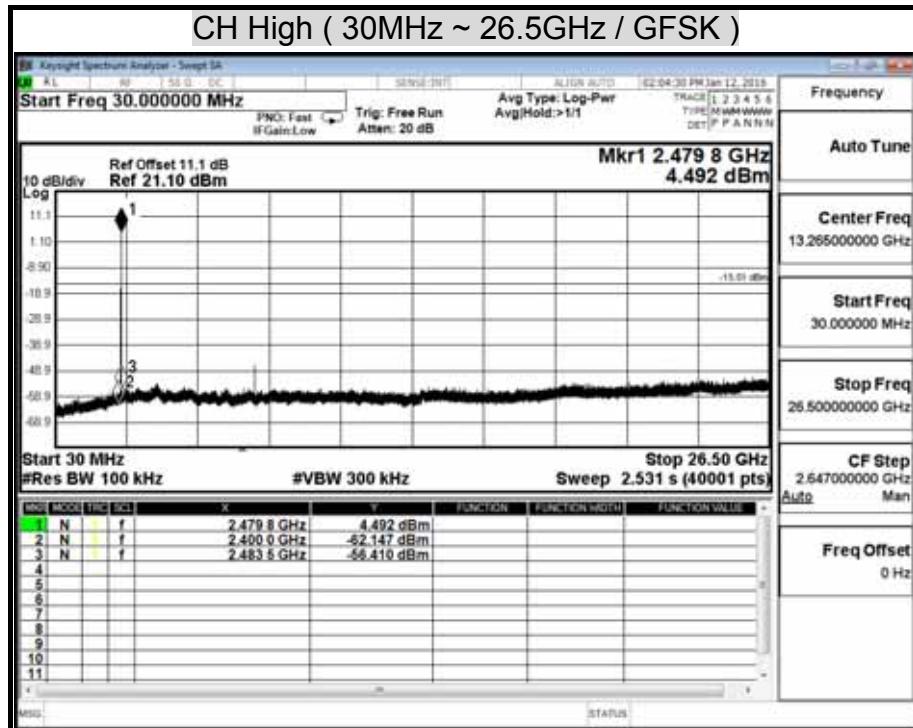


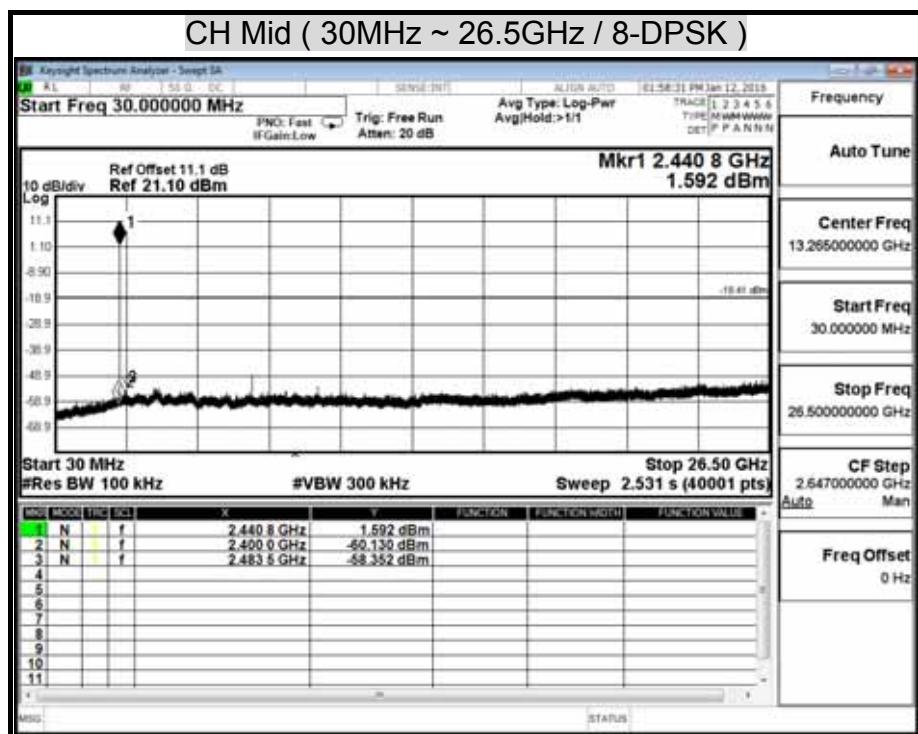
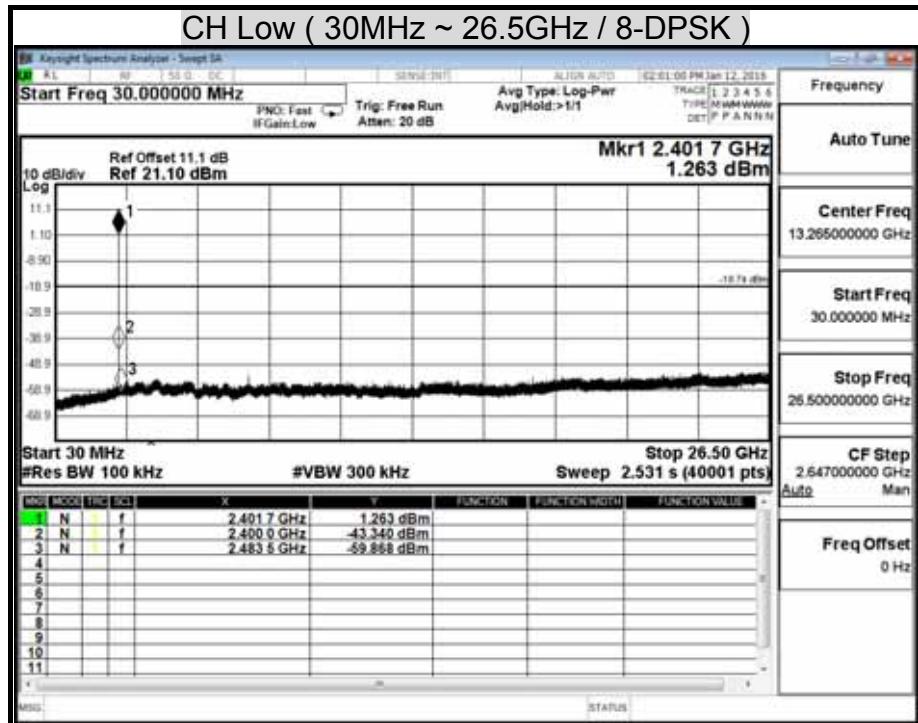


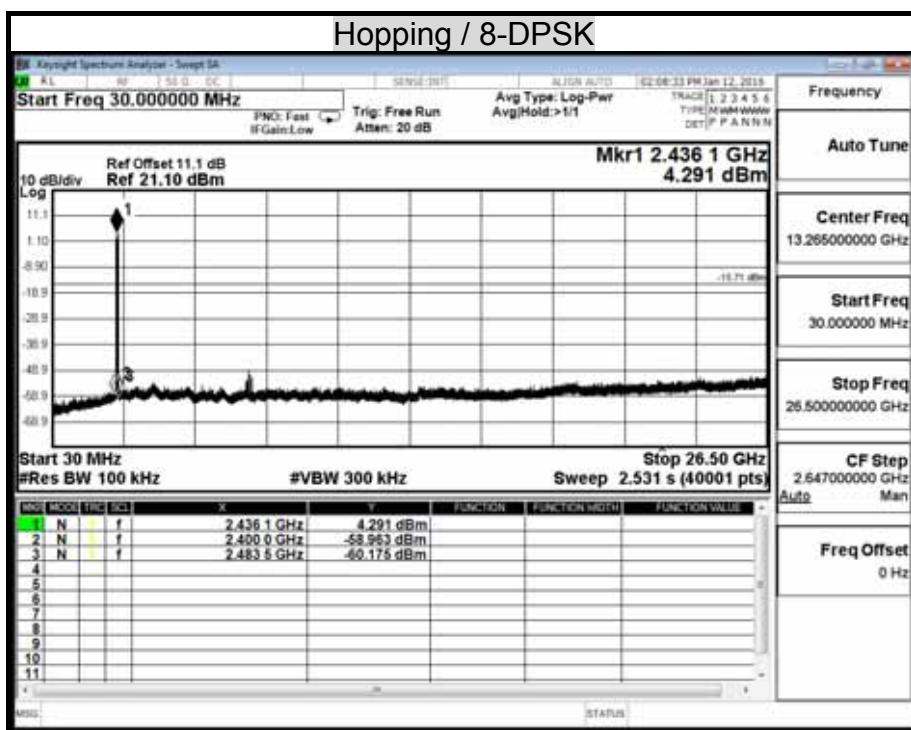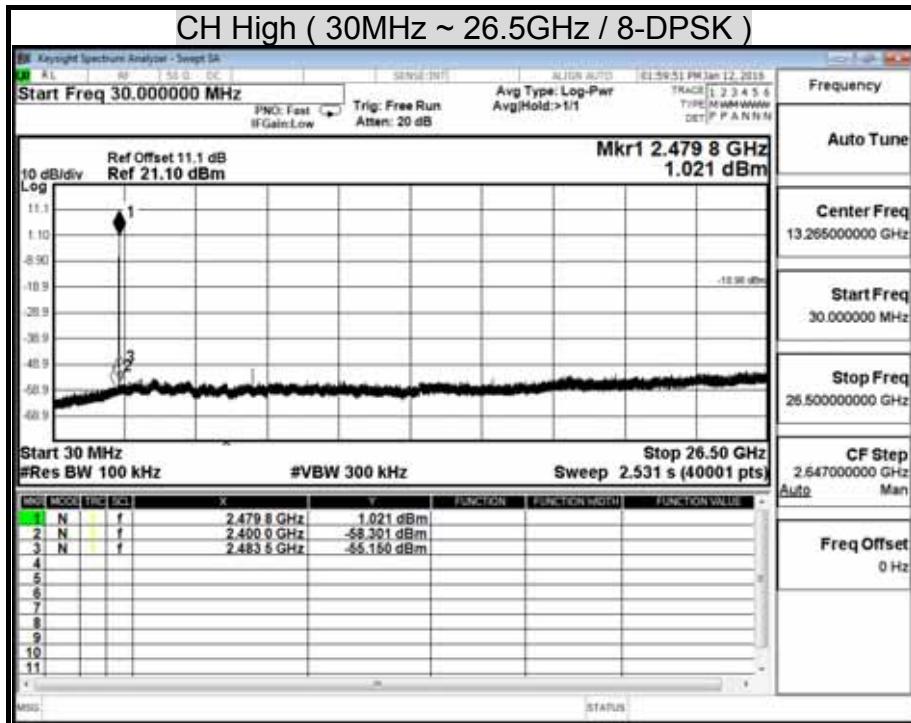


## Band-edge Compliance of RF Conducted Emissions

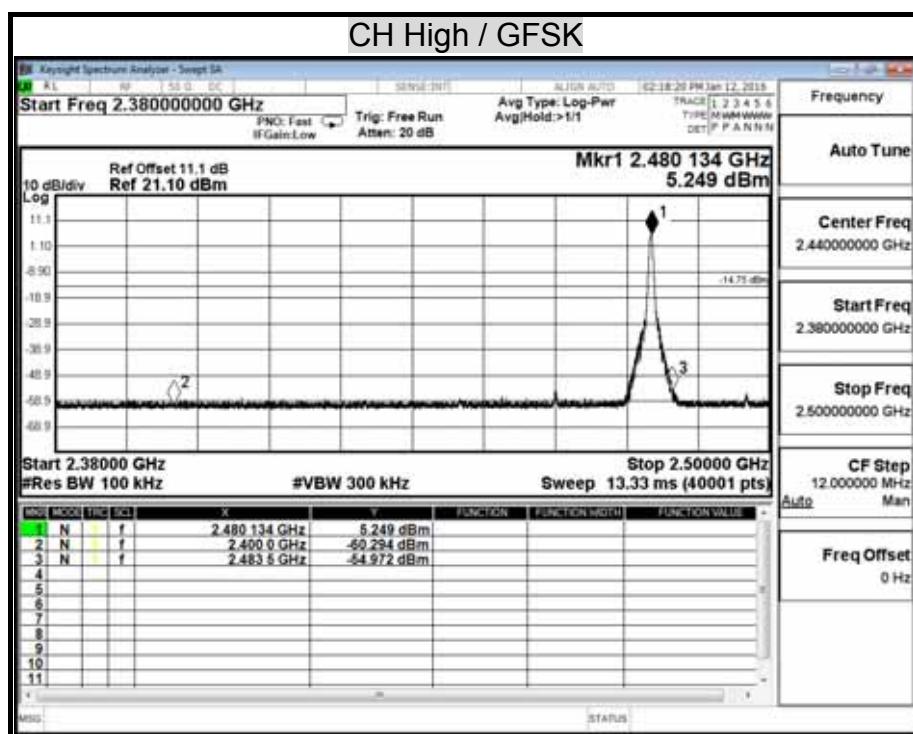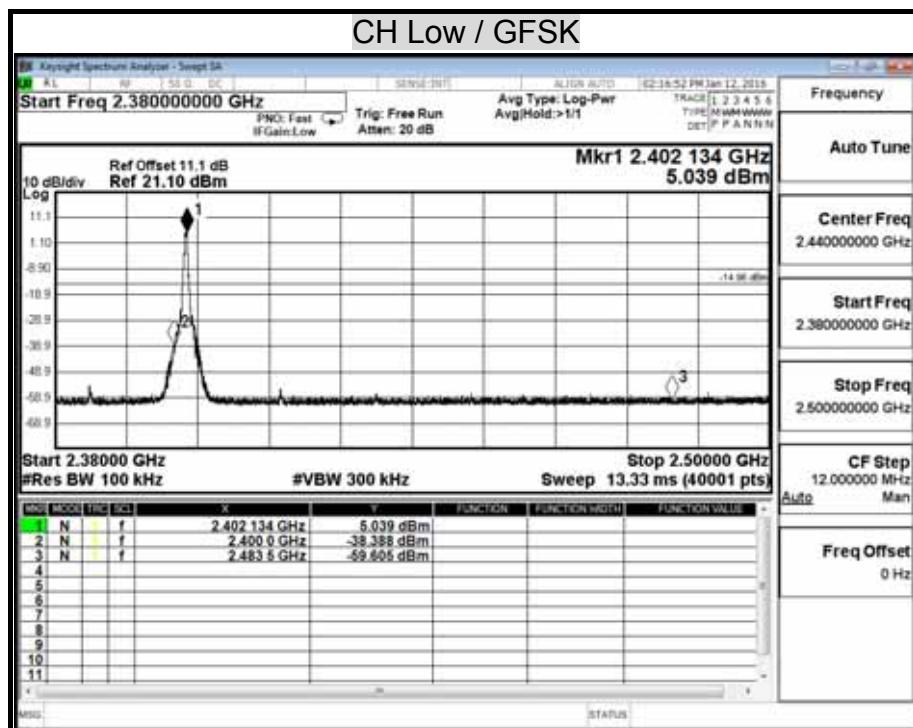

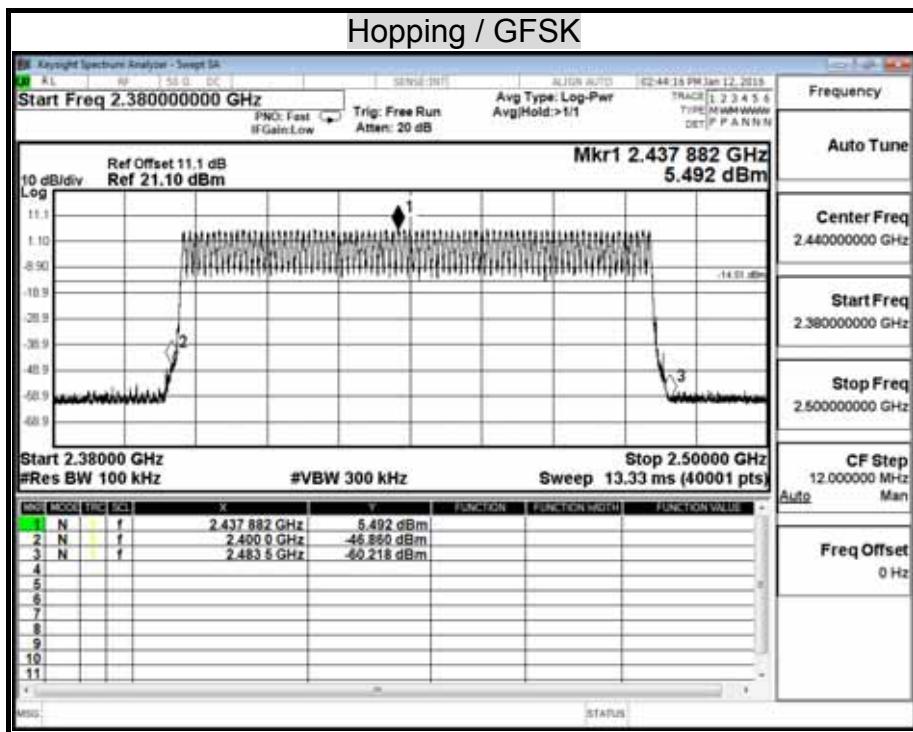

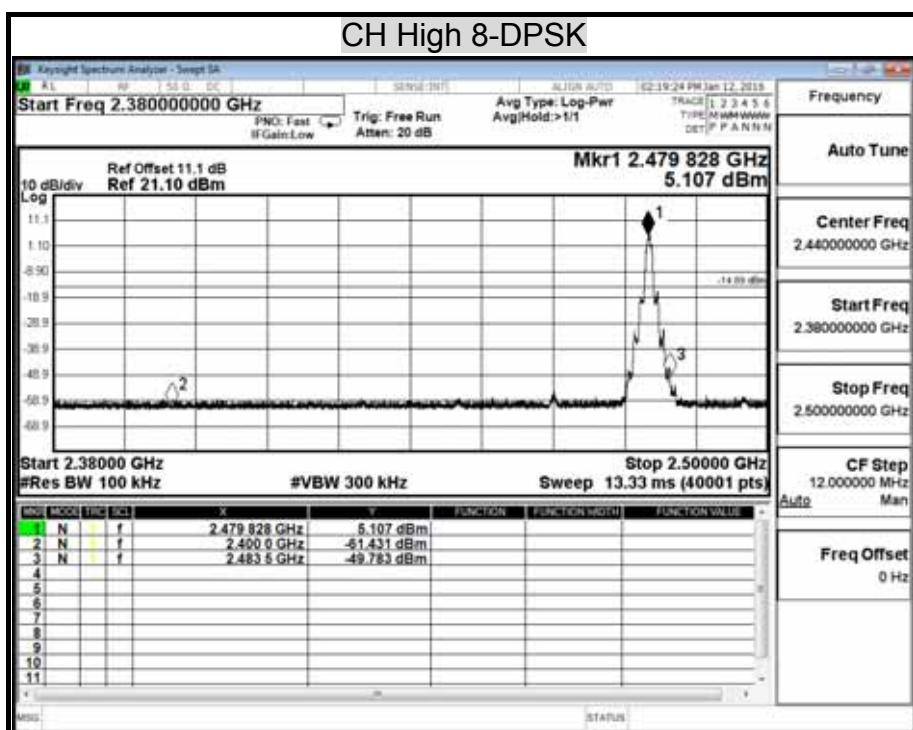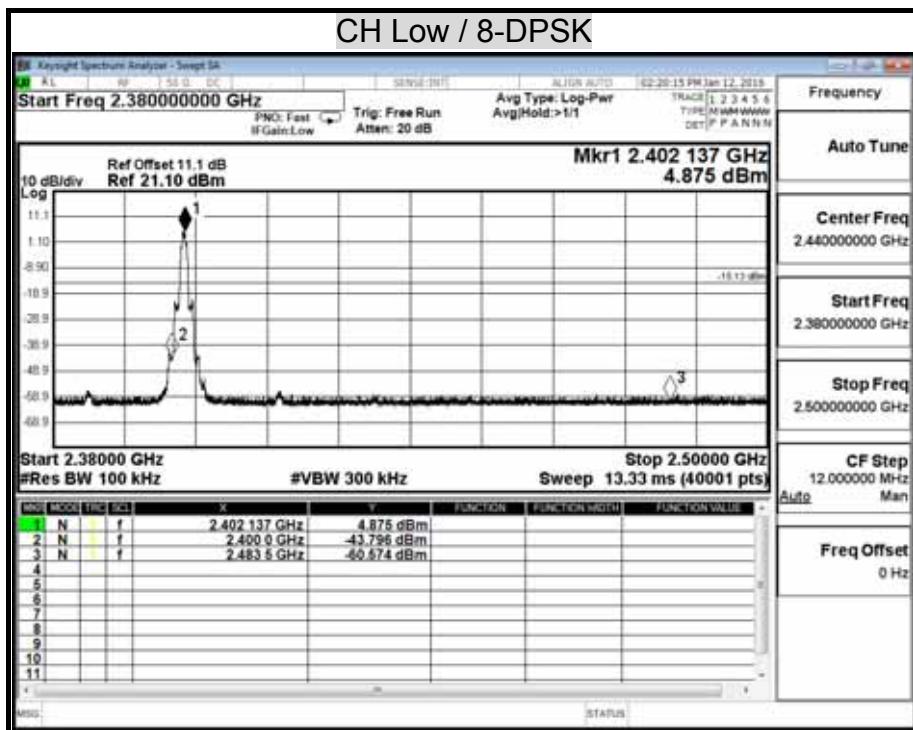

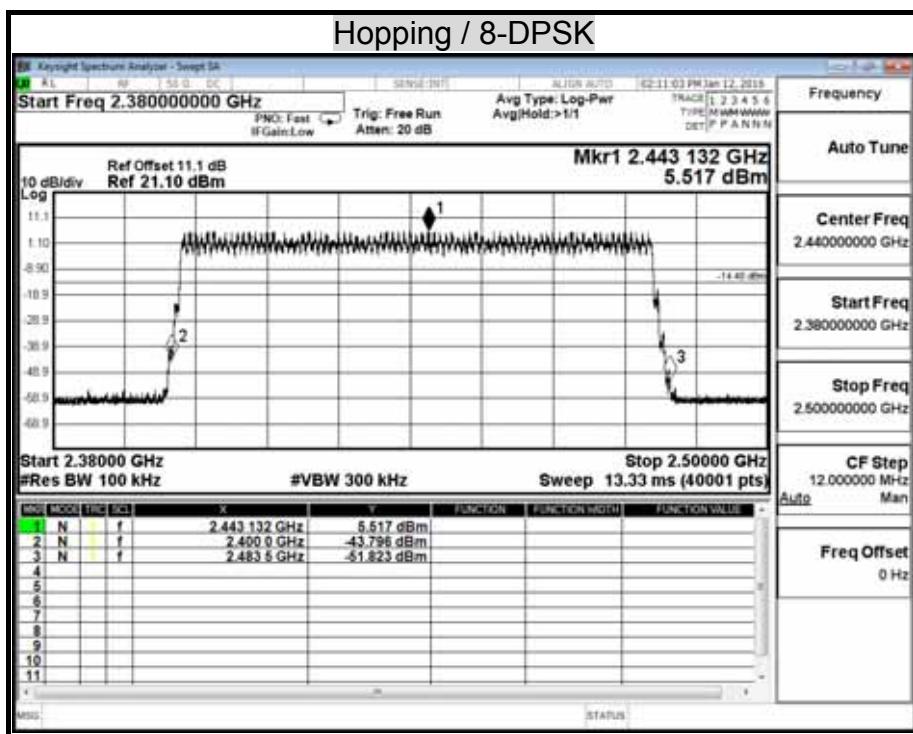

## 7.8 RADIATED EMISSIONS

### 7.7.1 TRANSMITTER RADIATED SUPURIOUS EMISSIONS

#### LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## TEST EQUIPMENT

Chamber 966				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
HUBER+SUHNER	Cable	SUCOFLEX 104PEA	SN25737 /4PEA	JAN. 14, 2017
Antenna	Sunol sciences	JB1	A021306	AUG. 02, 2016
LOOP ANTENNA	EMCO	6502	8905-2356	JUN. 10, 2016
Pre-Amplifier	HP	8447F	2443A01671	JAN. 14, 2017
Pre-Amplifier	EMCI	EMC 012645	980098	DEC. 04, 2016
Horn Antenna	Com-Power	AH-118	071032	JAN. 09, 2017
3116 Double Ridge Antenna (40G)	ETS-LINDGREN	3116	00078900	MAR. 04, 2016
Turn Table	Yo Chen	001	-----	N.C.R.
Antenna Tower	AR	TP1000A	309874	N.C.R.
Controller	UC	UC300	-----	N.C.R.
RF Switch	E-INSTRUMENT TELH LTD	ERS-180A	EC1204141	N.C.R
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	JAN. 23, 2017
Test S/W	e-3 (5.04303e)			


**Remark:** 1. Each piece of equipment is scheduled for calibration once a year.

2. N.C.R = No Calibration Request.


## TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.


### **9kHz ~ 30MHz**

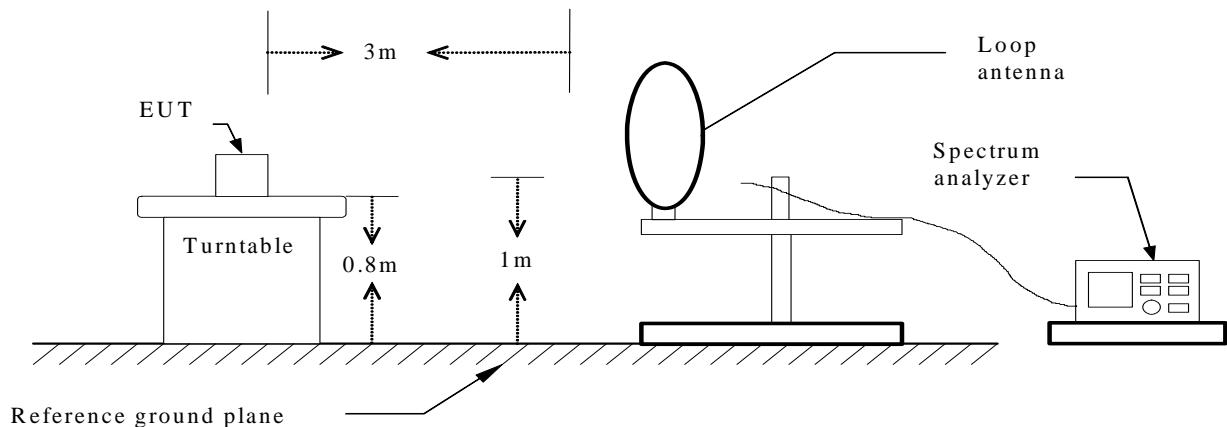

### **30MHz ~ 1GHz**

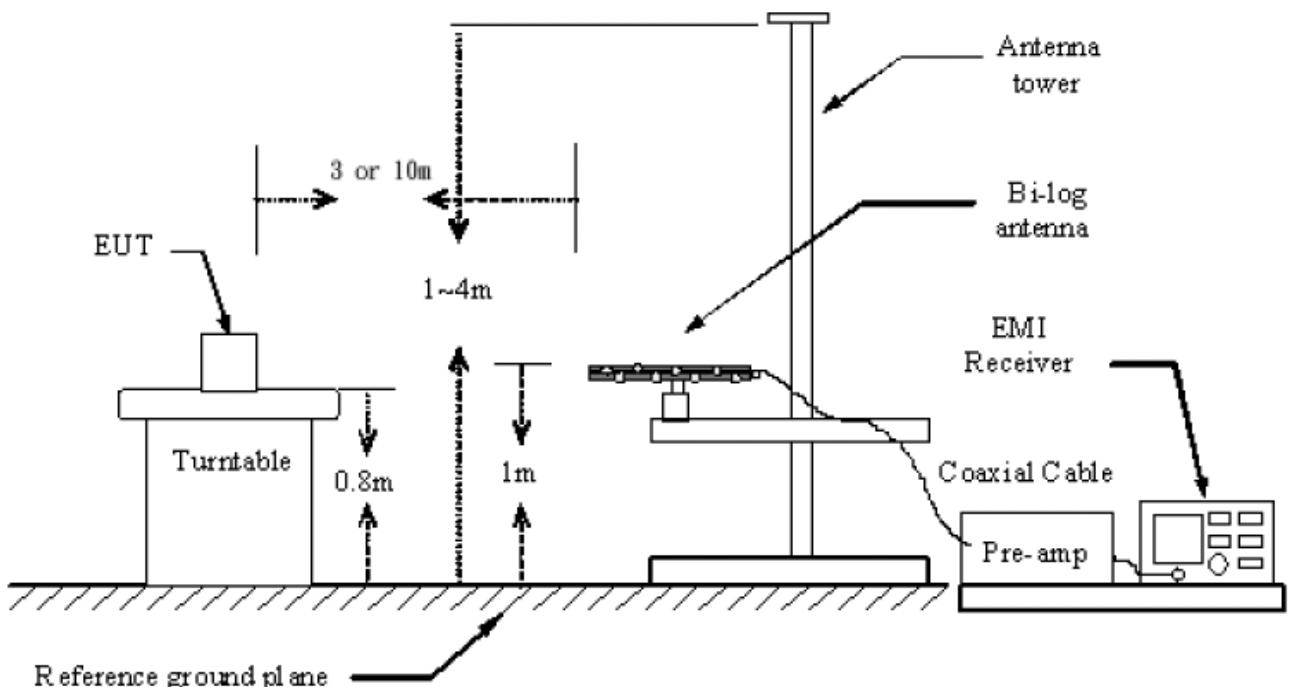

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

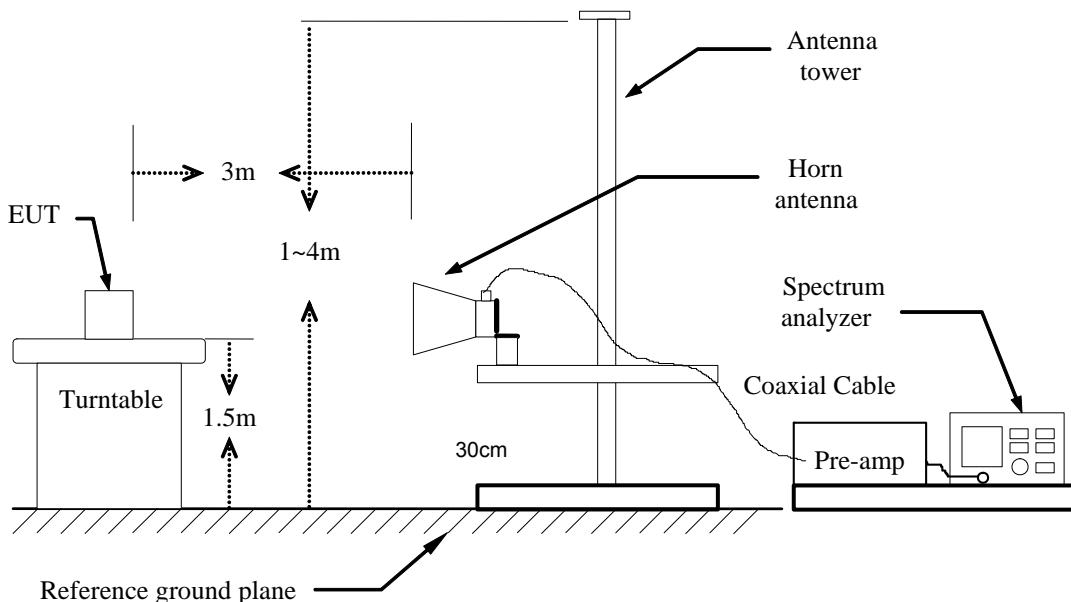

## TEST PROCEDURE

- The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 10/3 meter open site/chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- White measuring the radiated emission below 1GHz, the EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. White measuring the radiated emission above 1GHz, the EUT was set 3 or 10 meters away from the interference-receiving antenna
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note :

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 510 Hz for Average detection (AV) at frequency above 1GHz.

## 7.7.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz


### BELOW 1 GHz (9kHz ~ 30MHz)

No emission found between lowest internal used/generated frequency to 30MHz.

### BELOW 1 GHz (30MHz ~ 1GHz)

Product Name	Turntable	Test Date	2016/12/28
Model Name	BT100	Test By	Taiyu Cyu
Test Mode	Normal Operation (worst case)	Temp & Humidity	23°C, 54%

Vertical

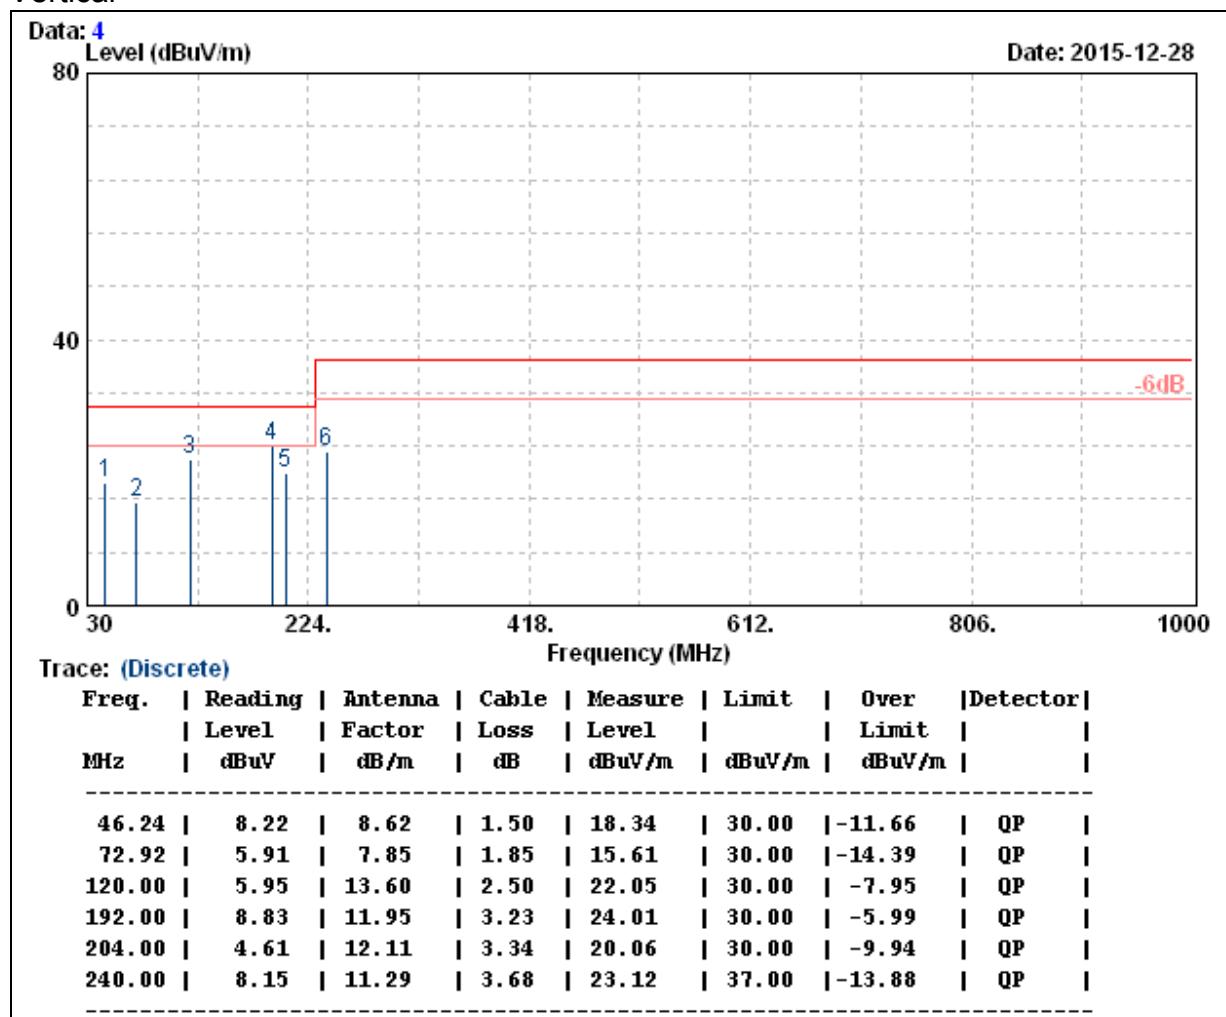


#### Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A "remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

<b>Product Name</b>	Turntable	<b>Test Date</b>	2016/12/28
<b>Model Name</b>	BT100	<b>Test By</b>	Taiyu Cyu
<b>Test Mode</b>	Normal Operation (worst case)	<b>Temp &amp; Humidity</b>	23°C, 54%

## Horizontal

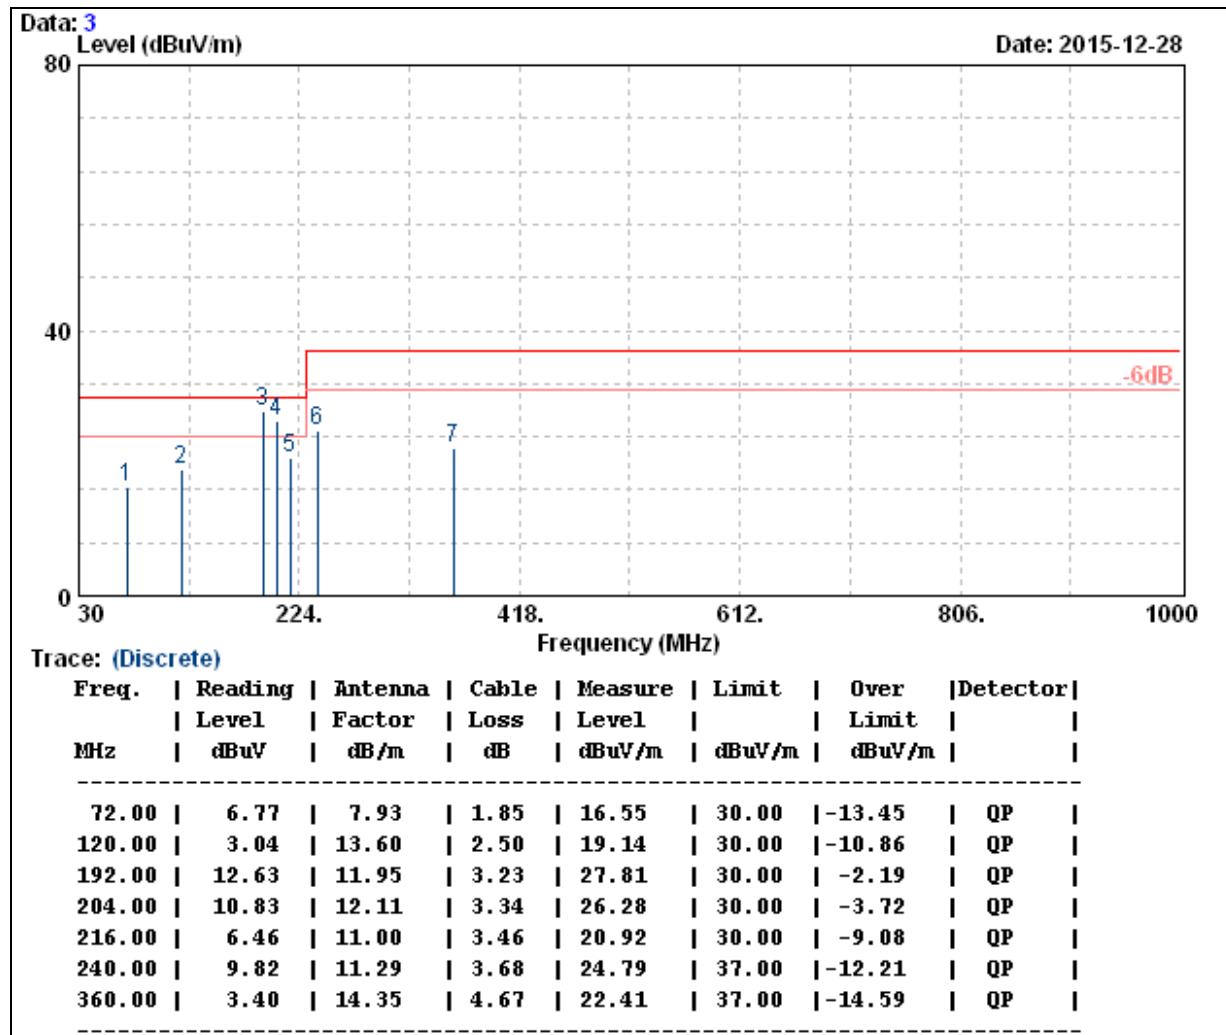**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A "remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

### 7.7.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

<b>Product Name</b>	Turtable	<b>Test Date</b>	2016/01/11
<b>Model Name</b>	BT100	<b>Test By</b>	Ted Huang
<b>Test Mode</b>	CH Low TX / GFSK	<b>Temp &amp; Humidity</b>	26.5°C, 53%

Horizontal

	TX mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
	1991.82	65.48	30.44	2.32	48.09	0.30	50.45	74.00	-23.55	P
	1991.82	54.94	30.44	2.32	48.09	0.30	39.91	54.00	-14.09	A
*	4803.86	65.66	33.81	3.77	48.29	0.40	55.35	74.00	-18.65	P
*	4803.86	57.83	33.81	3.77	48.29	0.40	47.51	54.00	-6.49	A
	7205.97	65.33	39.45	4.55	47.82	0.44	61.96	74.00	-12.04	P
	7205.97	56.16	39.45	4.55	47.82	0.44	52.79	54.00	-1.21	A

Vertical

	TX mode / CH Low				Measurement Distance at 3m				Vertical polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
*	1332.74	66.05	26.13	1.87	48.87	0.30	45.48	74.00	-28.52	P
*	1332.74	56.88	26.13	1.87	48.87	0.30	36.31	54.00	-17.69	A
*	4803.96	67.79	33.81	3.77	48.29	0.40	57.47	74.00	-16.53	P
*	4803.96	61.23	33.81	3.77	48.29	0.40	50.92	54.00	-3.08	A
	7206.19	64.39	39.45	4.55	47.82	0.44	61.01	74.00	-12.99	P
	7206.19	55.34	39.45	4.55	47.82	0.44	51.96	54.00	-2.04	A

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=510Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamplifier + Filter, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

<b>Product Name</b>	Turntable			<b>Test Date</b>	2016/01/11			
<b>Model Name</b>	BT100			<b>Test By</b>	Ted Huang			
<b>Test Mode</b>	CH Mid TX / GFSK			<b>Temp &amp; Humidity</b>	26.5°C, 53%			

## Horizontal

	TX mode / CH Mid				Measurement Distance at 3m				Horizontal polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
	1991.88	65.69	30.44	2.32	48.09	0.30	50.66	74.00	-23.34	P
	1991.88	54.87	30.44	2.32	48.09	0.30	39.85	54.00	-14.15	A
*	4882.07	66.22	34.05	3.80	48.30	0.40	56.18	74.00	-17.82	P
*	4882.07	59.29	34.05	3.80	48.30	0.40	49.24	54.00	-4.76	A
*	7332.96	63.11	39.73	4.56	47.86	0.47	60.01	74.00	-13.99	P
*	7332.96	55.76	39.73	4.56	47.86	0.47	52.66	54.00	-1.34	A

## Vertical

	TX mode / CH Mid				Measurement Distance at 3m				Vertical polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
*	1332.52	66.62	26.13	1.87	48.87	0.30	46.05	74.00	-27.95	P
*	1332.52	57.55	26.13	1.87	48.87	0.30	36.98	54.00	-17.02	A
*	4882.04	65.68	34.05	3.80	48.30	0.40	55.63	74.00	-18.37	P
*	4882.04	61.37	34.05	3.80	48.30	0.40	51.32	54.00	-2.68	A
*	7322.94	62.53	39.71	4.56	47.86	0.46	59.41	74.00	-14.59	P
*	7322.94	55.38	39.71	4.56	47.86	0.46	52.25	54.00	-1.75	A

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=510Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

<b>Product Name</b>	Turntable			<b>Test Date</b>	2016/01/11			
<b>Model Name</b>	BT100			<b>Test By</b>	Ted Huang			
<b>Test Mode</b>	CH High TX / GFSK			<b>Temp &amp; Humidity</b>	26.5°C, 53%			

## Horizontal

TX mode / CH High				Measurement Distance at 3m				Horizontal polarity			
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark		
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)		
1991.74	65.63	30.44	2.32	48.09	0.30	50.60	74.00	-23.40	P		
1991.74	54.97	30.44	2.32	48.09	0.30	39.94	54.00	-14.06	A		
*	4959.97	67.04	34.28	3.83	48.30	0.40	57.26	74.00	-16.74	P	
*	4959.97	60.43	34.28	3.83	48.30	0.40	50.64	54.00	-3.36	A	
*	7440.06	63.85	39.97	4.57	47.89	0.49	60.98	74.00	-13.02	P	
*	7440.06	54.76	39.97	4.57	47.89	0.49	51.89	54.00	-2.11	A	

## Vertical

TX mode / CH High				Measurement Distance at 3m				Vertical polarity			
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark		
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)		
*	1332.88	66.33	26.13	1.87	48.87	0.30	45.76	74.00	-28.24	P	
*	1332.88	57.12	26.13	1.87	48.87	0.30	36.55	54.00	-17.45	A	
*	4959.96	67.87	34.28	3.83	48.30	0.40	58.08	74.00	-15.92	P	
*	4959.96	62.33	34.28	3.83	48.30	0.40	52.55	54.00	-1.45	A	
*	7439.87	64.27	39.97	4.57	47.89	0.49	61.40	74.00	-12.60	P	
*	7439.87	55.73	39.97	4.57	47.89	0.49	52.86	54.00	-1.14	A	

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=510Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamplifier + Filter, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

<b>Product Name</b>	Turntable	<b>Test Date</b>	2016/01/11
<b>Model Name</b>	BT100	<b>Test By</b>	Ted Huang
<b>Test Mode</b>	CH Low TX / 8-DPSK	<b>Temp &amp; Humidity</b>	26.5°C, 53%

## Horizontal

TX mode / CH Low				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)	
1991.82	65.42	30.44	2.32	48.09	0.30	50.40	74.00	-23.60	P	
1991.82	54.33	30.44	2.32	48.09	0.30	39.30	54.00	-14.70	A	
*	4803.98	65.82	33.81	3.77	48.29	0.40	55.51	74.00	-18.49	P
*	4803.98	57.81	33.81	3.77	48.29	0.40	47.50	54.00	-6.50	A
	7205.96	64.75	39.45	4.55	47.82	0.44	61.38	74.00	-12.62	P
	7205.96	56.03	39.45	4.55	47.82	0.44	52.65	54.00	-1.35	A

## Vertical

TX mode / CH Low				Measurement Distance at 3m				Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)	
*	1332.83	65.76	26.13	1.87	48.87	0.30	45.19	74.00	-28.81	P
*	1332.83	56.68	26.13	1.87	48.87	0.30	36.11	54.00	-17.89	A
*	4804.05	66.46	33.81	3.77	48.29	0.40	56.15	74.00	-17.85	P
*	4804.05	60.59	33.81	3.77	48.29	0.40	50.27	54.00	-3.73	A
	7205.78	63.78	39.45	4.55	47.82	0.44	60.41	74.00	-13.59	P
	7205.78	54.78	39.45	4.55	47.82	0.44	51.40	54.00	-2.60	A

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=510Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

<b>Product Name</b>	Turntable			<b>Test Date</b>	2016/01/11			
<b>Model Name</b>	BT100			<b>Test By</b>	Ted Huang			
<b>Test Mode</b>	CH Mid TX / 8-DPSK			<b>Temp &amp; Humidity</b>	26.5°C, 53%			

## Horizontal

	TX mode / CH Mid				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
	1991.76	65.79	30.44	2.32	48.09	0.30	50.76	74.00	-23.24	P
	1991.76	54.87	30.44	2.32	48.09	0.30	39.84	54.00	-14.16	A
*	4881.88	65.34	34.05	3.80	48.30	0.40	55.29	74.00	-18.71	P
*	4881.88	58.63	34.05	3.80	48.30	0.40	48.58	54.00	-5.42	A
*	7322.67	64.82	39.71	4.56	47.86	0.46	61.70	74.00	-12.30	P
*	7322.67	55.24	39.71	4.56	47.86	0.46	52.11	54.00	-1.89	A

## Vertical

	TX mode / CH Mid				Measurement Distance at 3m				Vertical polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
*	1332.57	66.38	26.13	1.87	48.87	0.30	45.81	74.00	-28.19	P
*	1332.57	57.13	26.13	1.87	48.87	0.30	36.56	54.00	-17.44	A
*	4881.96	66.64	34.05	3.80	48.30	0.40	56.59	74.00	-17.41	P
*	4881.96	61.26	34.05	3.80	48.30	0.40	51.22	54.00	-2.78	A
*	7322.66	63.63	39.71	4.56	47.86	0.46	60.51	74.00	-13.49	P
*	7322.66	54.72	39.71	4.56	47.86	0.46	51.60	54.00	-2.40	A

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=510Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamplifier + Filter, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

<b>Product Name</b>	Turntable			<b>Test Date</b>	2016/01/11			
<b>Model Name</b>	BT100			<b>Test By</b>	Ted Huang			
<b>Test Mode</b>	CH High TX / 8-DPSK			<b>Temp &amp; Humidity</b>	26.5°C, 53%			

## Horizontal

	TX mode / CH High				Measurement Distance at 3m				Horizontal polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
	1991.79	65.54	30.44	2.32	48.09	0.30	50.52	74.00	-23.48	P
	1991.79	54.83	30.44	2.32	48.09	0.30	39.81	54.00	-14.19	A
*	4959.86	65.20	34.28	3.83	48.30	0.40	55.42	74.00	-18.58	P
*	4959.86	58.19	34.28	3.83	48.30	0.40	48.40	54.00	-5.60	A
*	7439.86	63.26	39.97	4.57	47.89	0.49	60.39	74.00	-13.61	P
*	7439.86	54.43	39.97	4.57	47.89	0.49	51.56	54.00	-2.44	A

## Vertical

	TX mode / CH High				Measurement Distance at 3m				Vertical polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
*	1332.57	66.34	26.13	1.87	48.87	0.30	45.77	74.00	-28.23	P
*	1332.57	57.04	26.13	1.87	48.87	0.30	36.47	54.00	-17.53	A
*	4959.92	67.23	34.28	3.83	48.30	0.40	57.44	74.00	-16.56	P
*	4959.92	60.82	34.28	3.83	48.30	0.40	51.04	54.00	-2.96	A
*	7440.04	62.92	39.97	4.57	47.89	0.49	60.05	74.00	-13.95	P
*	7440.04	54.65	39.97	4.57	47.89	0.49	51.78	54.00	-2.22	A

**Remark:**


1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=510Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

## 7.7.4 RESTRICTED BAND EDGES

Model Name	BT100	Test By	Ted Huang
Temp & Humidity	26.5°C, 53%	Test Date	2016/01/12


Detector Mode : Peak

Polarity : Horizontal

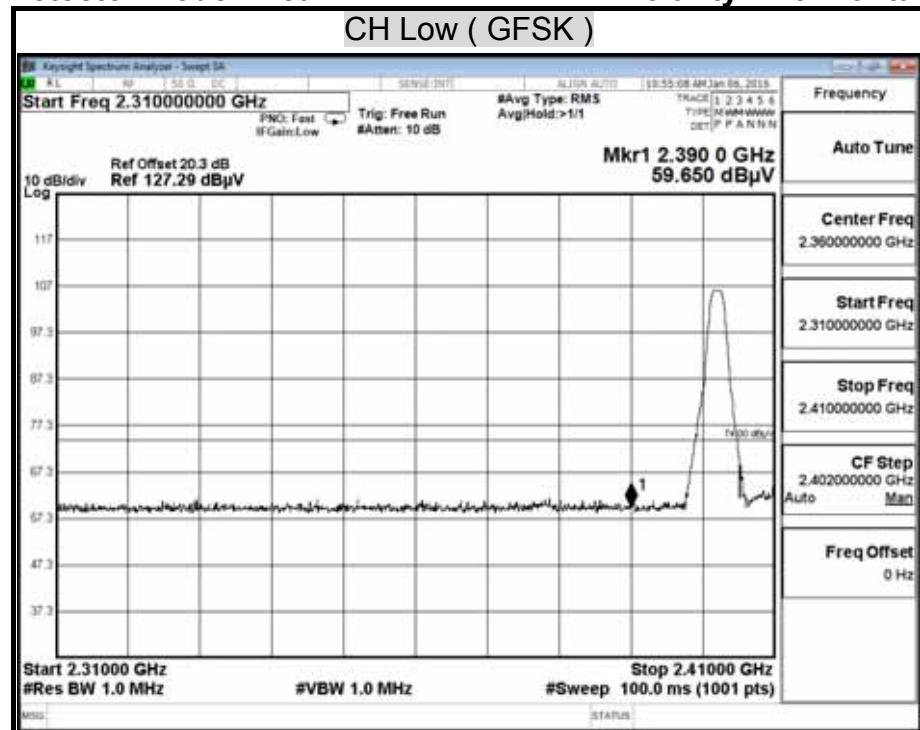

Detector Mode : Average


Polarity : Horizontal

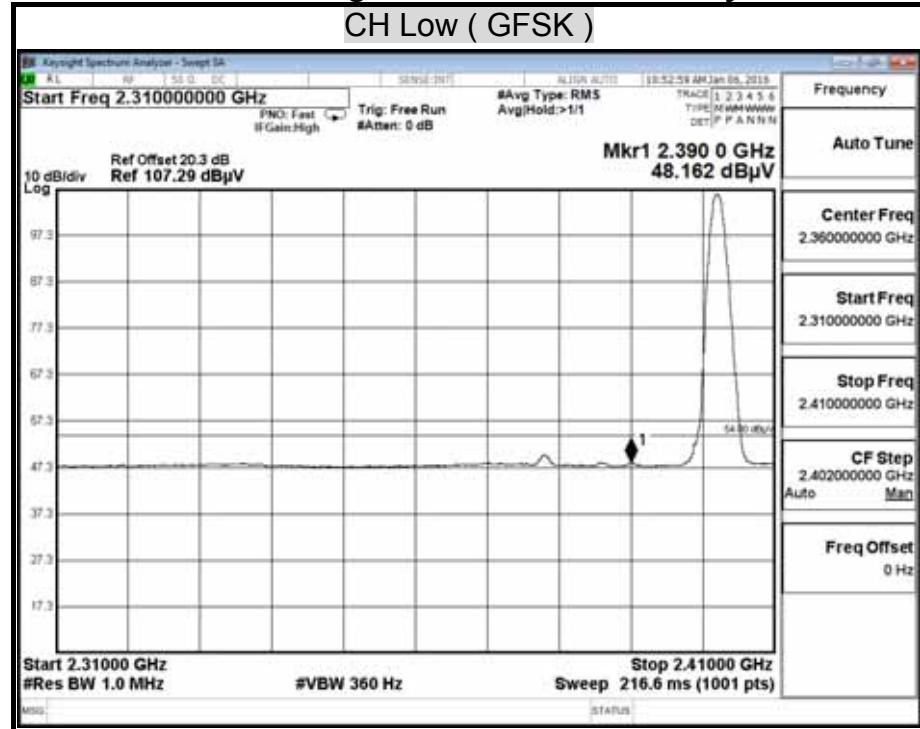

## Detector Mode : Peak

## Polarity : Vertical


CH Low ( GFSK )

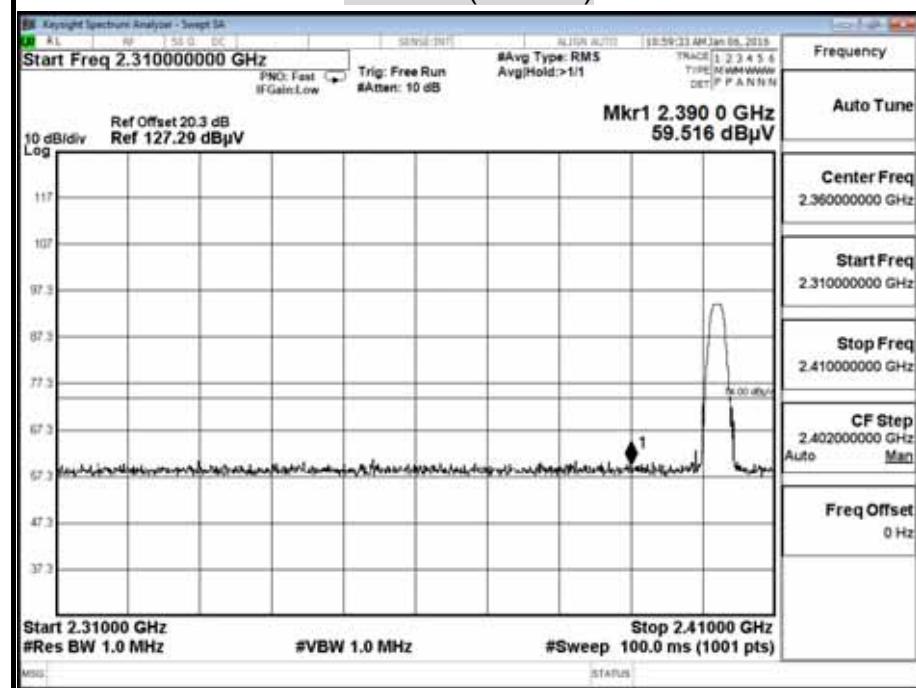

## Detector Mode : Average

## Polarity : Vertical


CH Low ( GFSK )

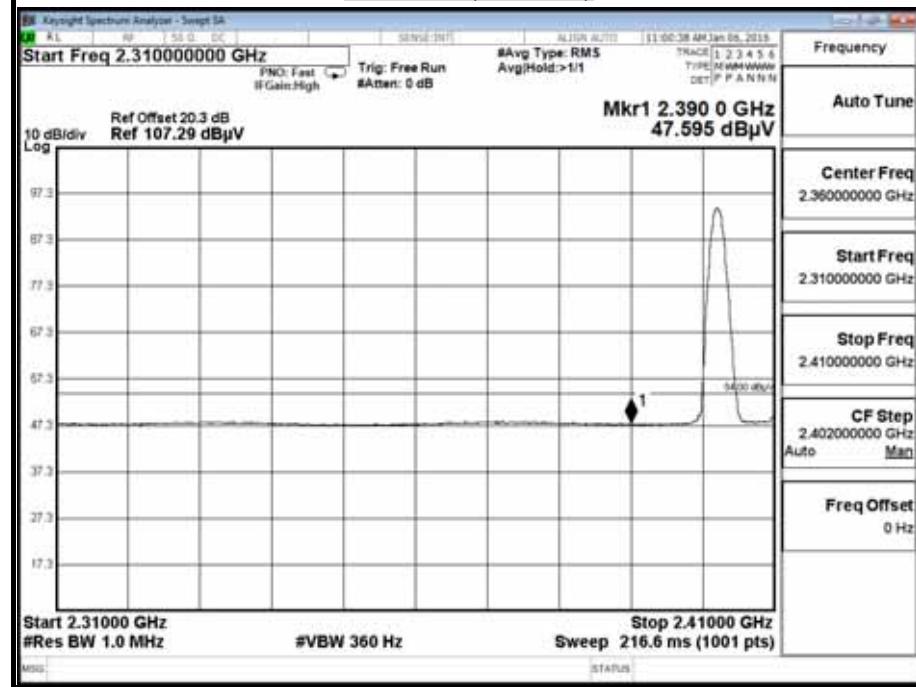

## Detector Mode : Peak

## Polarity : Horizontal


CH High ( GFSK )

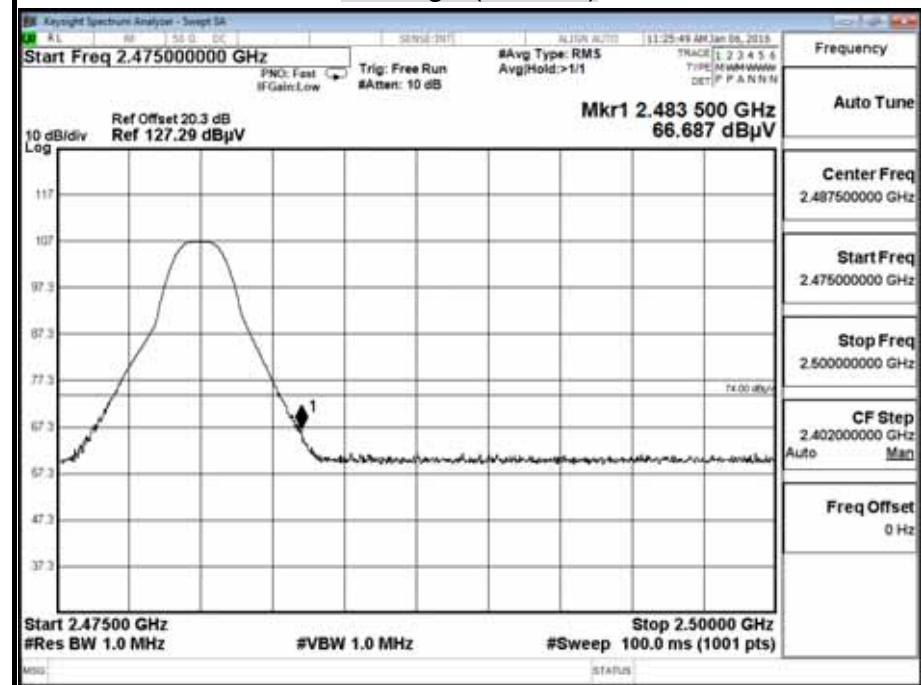

**Detector Mode : Average**


## Polarity : Horizontal

## CH High ( GFSK )

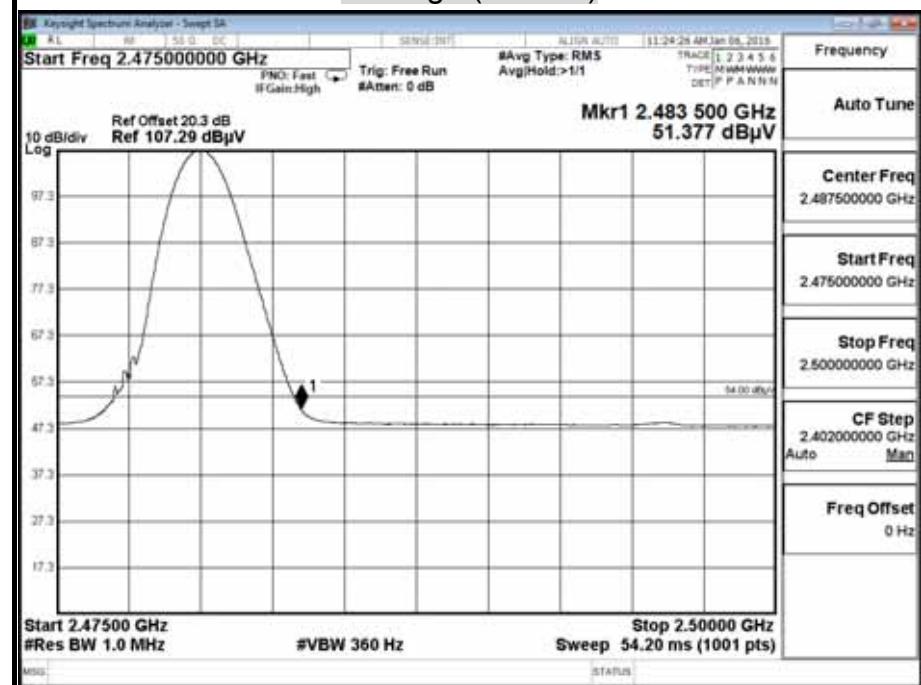


## Detector Mode : Peak

## Polarity : Vertical

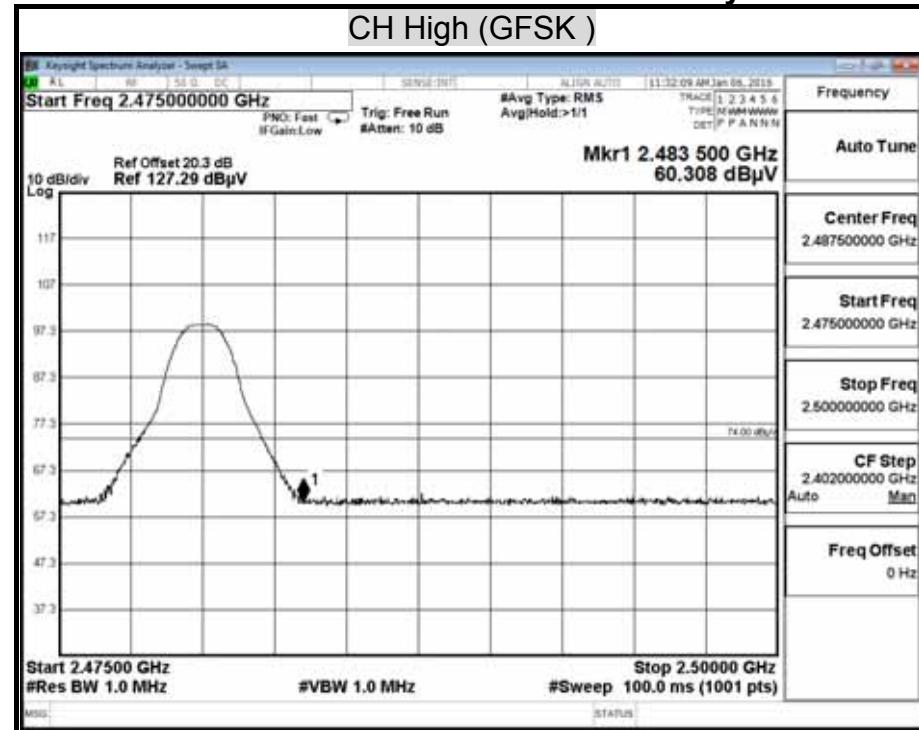

## **Detector Mode : Average**


## Polarity : Vertical

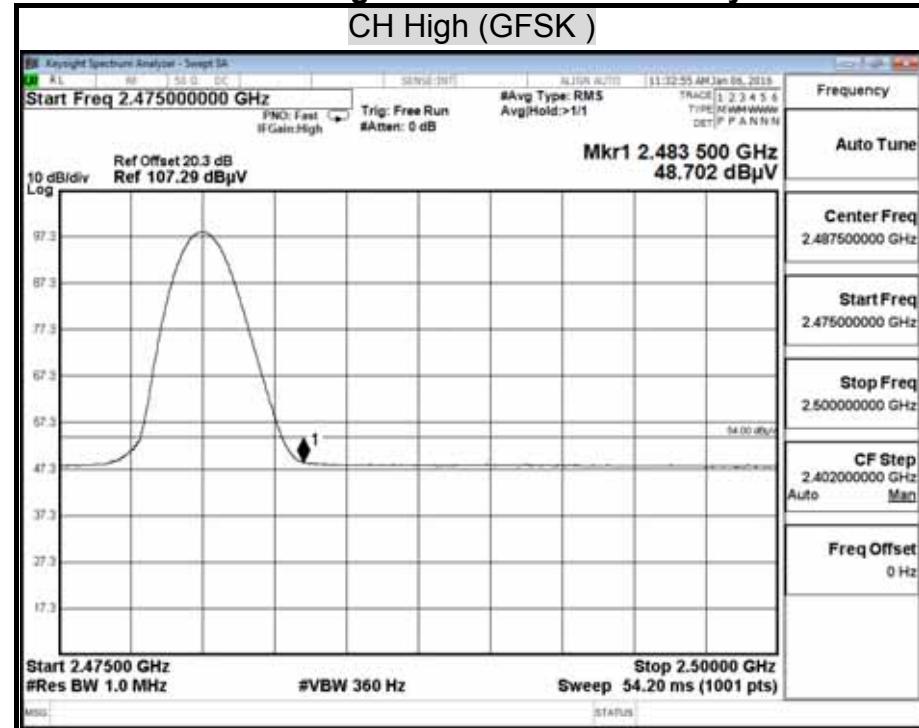

## Detector Mode : Peak

## Polarity : Horizontal


CH Low (8-DPSK )

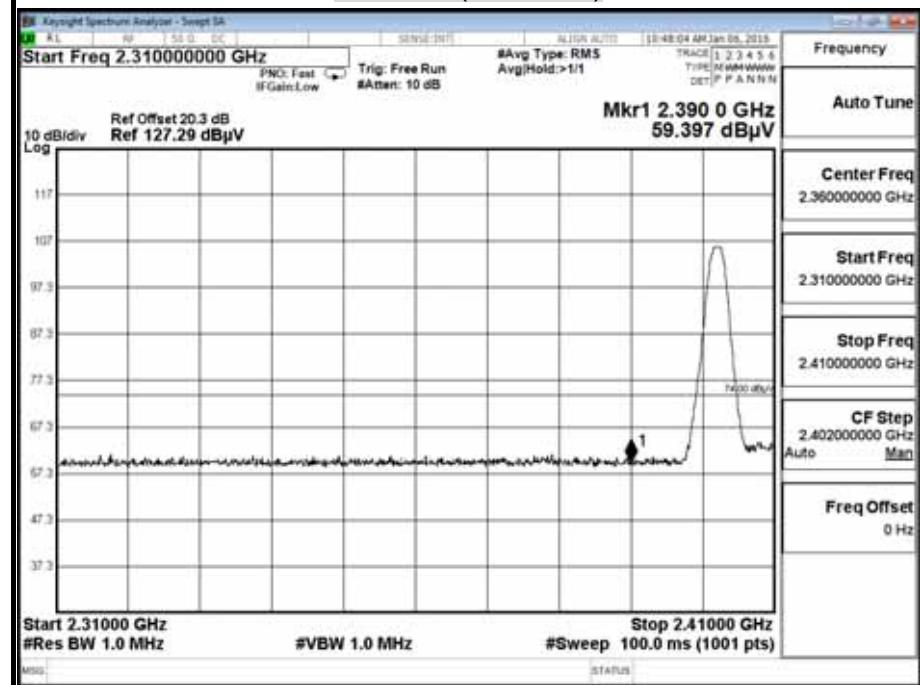

## Detector Mode : Average

## Polarity : Horizontal


CH Low (8-DPSK )

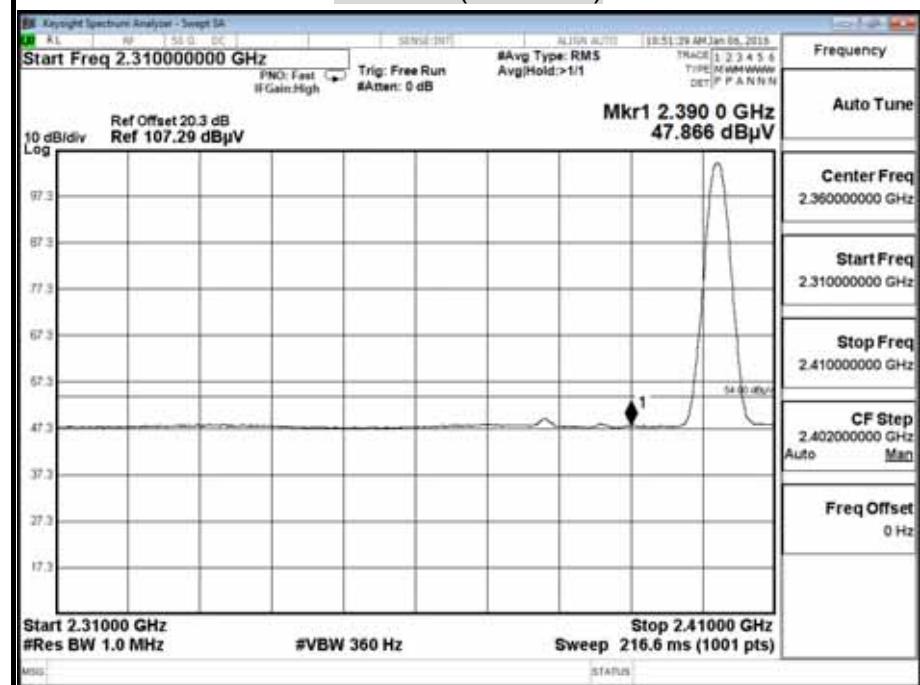

## Detector Mode : Peak

## Polarity : Vertical


CH Low (8-DPSK )

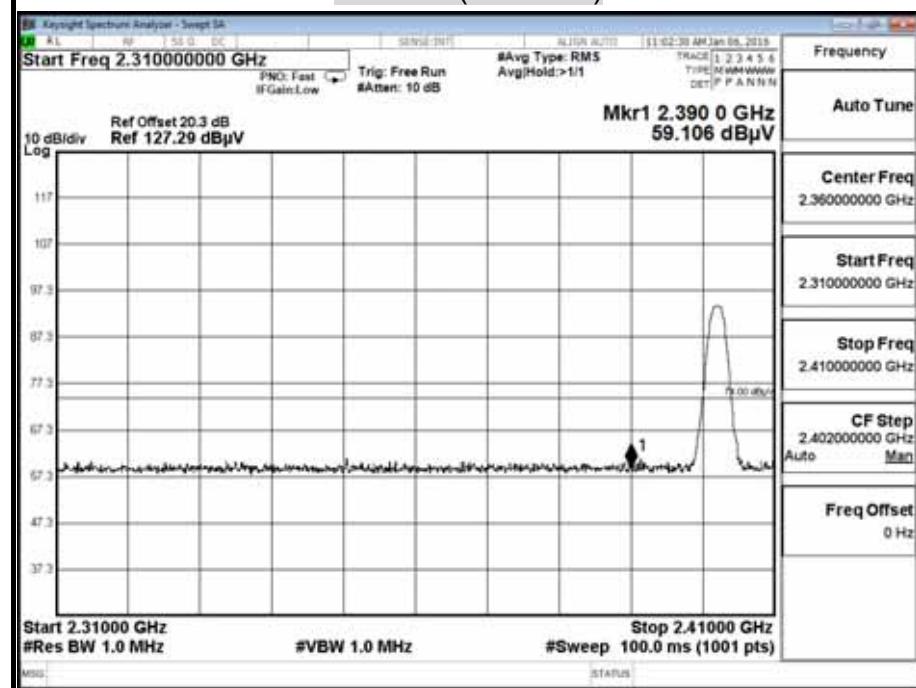

## Detector Mode : Average


## Polarity : Vertical

CH Low (8-DPSK )

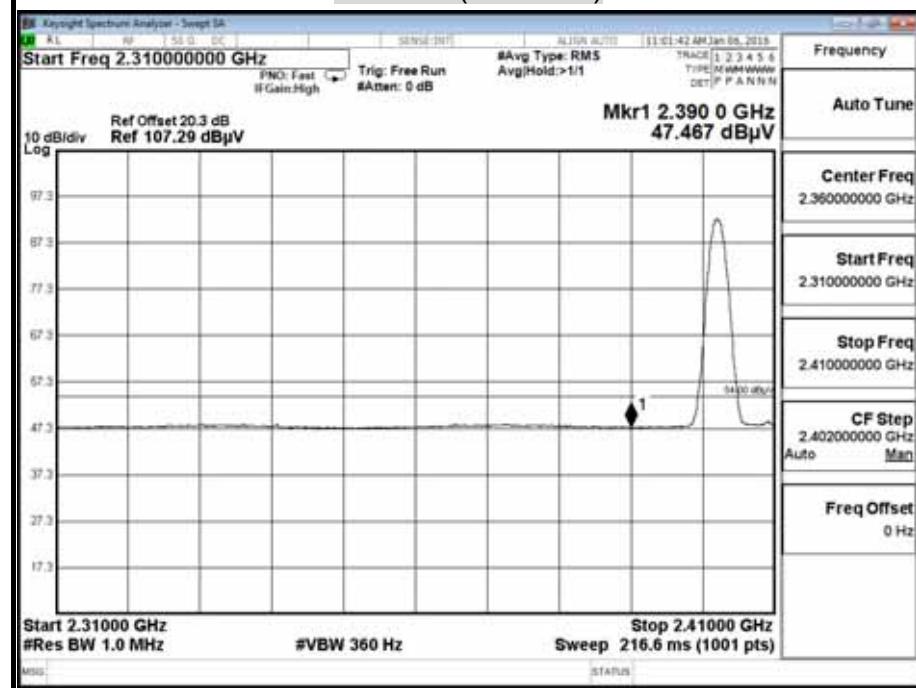


## Detector Mode : Peak

## Polarity : Horizontal

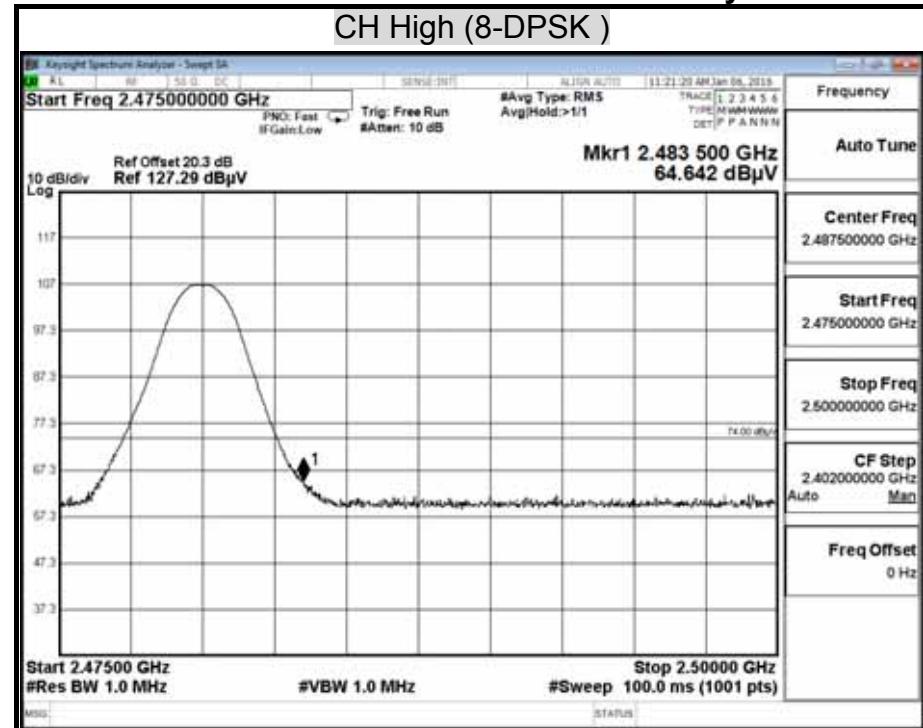

**Detector Mode : Average**


## Polarity : Horizontal

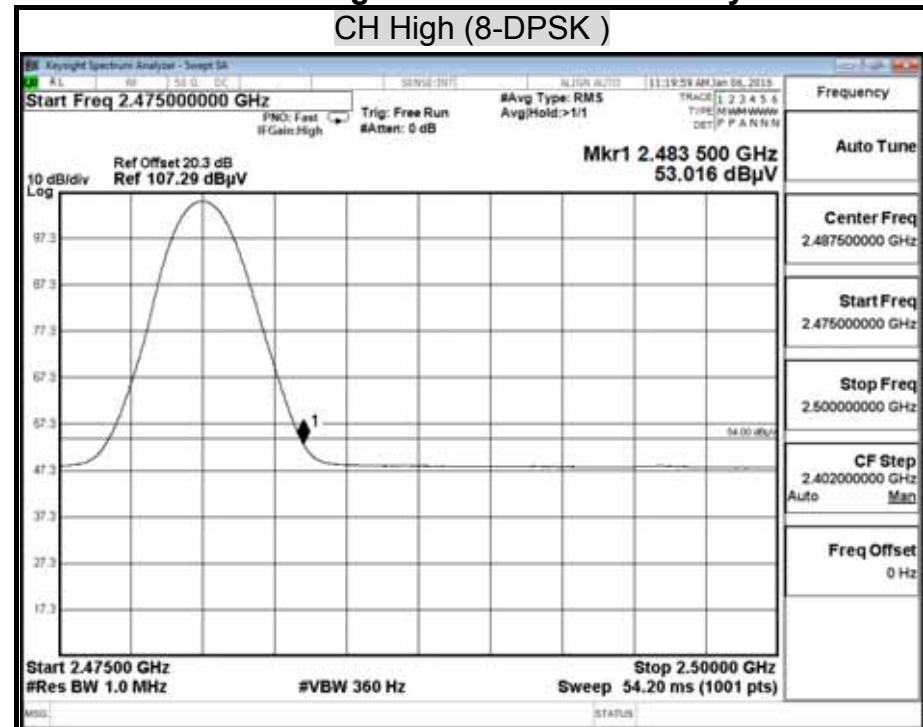

## Detector Mode : Peak

## Polarity : Vertical


## CH High (8-DPSK )

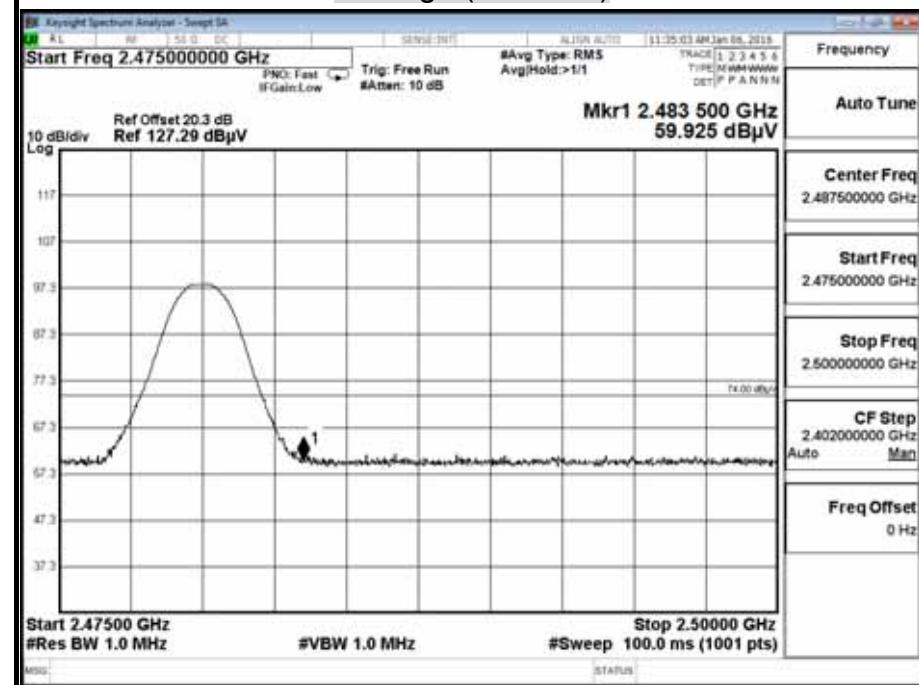

## **Detector Mode : Average**

## Polarity : Vertical

## CH High (8-DPSK )

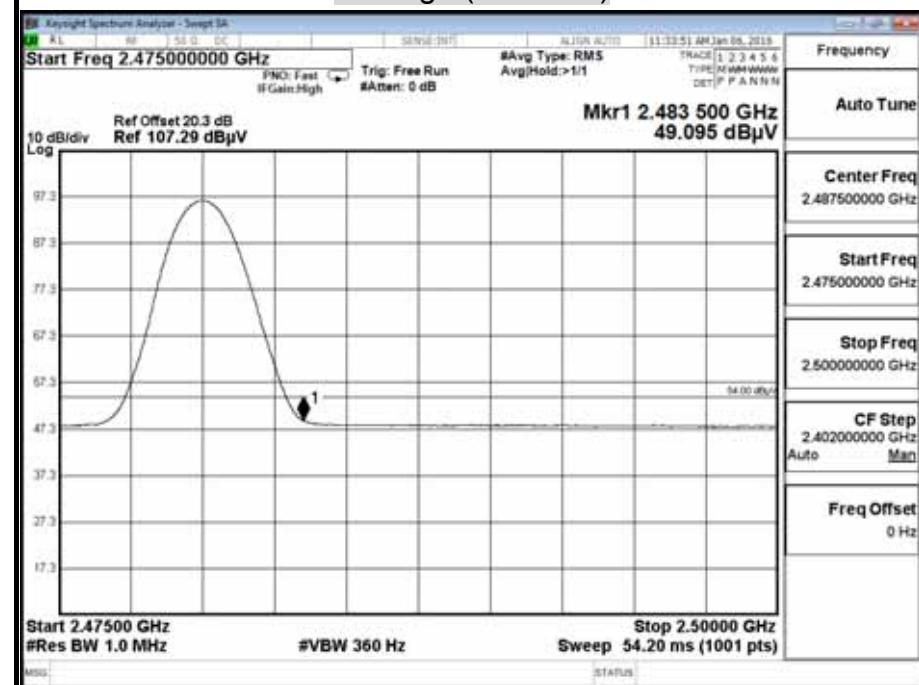

## 7.9 POWERLINE CONDUCTED EMISSIONS

### LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.



Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

### TEST EQUIPMENT

Conducted Emission room #1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N.	SCHWARZBECK	NNLK 8130	8130124	OCT. 27, 2016
	Rohde & Schwarz	ESH 3-Z5	893540/015	APR. 12, 2016
TEST RECEIVER	Rohde & Schwarz	ESCS 30	100348	DEC. 06, 2016
BNC COAXIAL CABLE	CCS	BNC50	11	DEC. 04, 2016
Test S/W	e-3 (5.04211c) R&S (2.27)			

**Remark:** Each piece of equipment is scheduled for calibration once a year.

## TEST SETUP

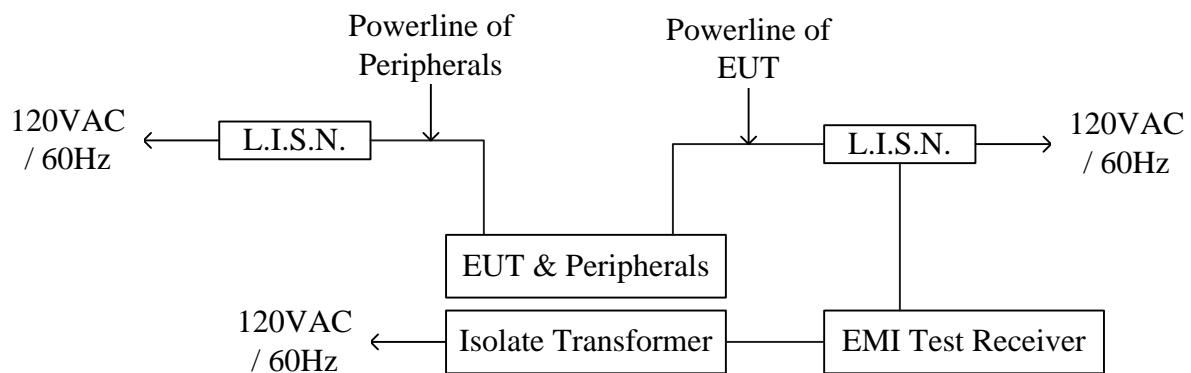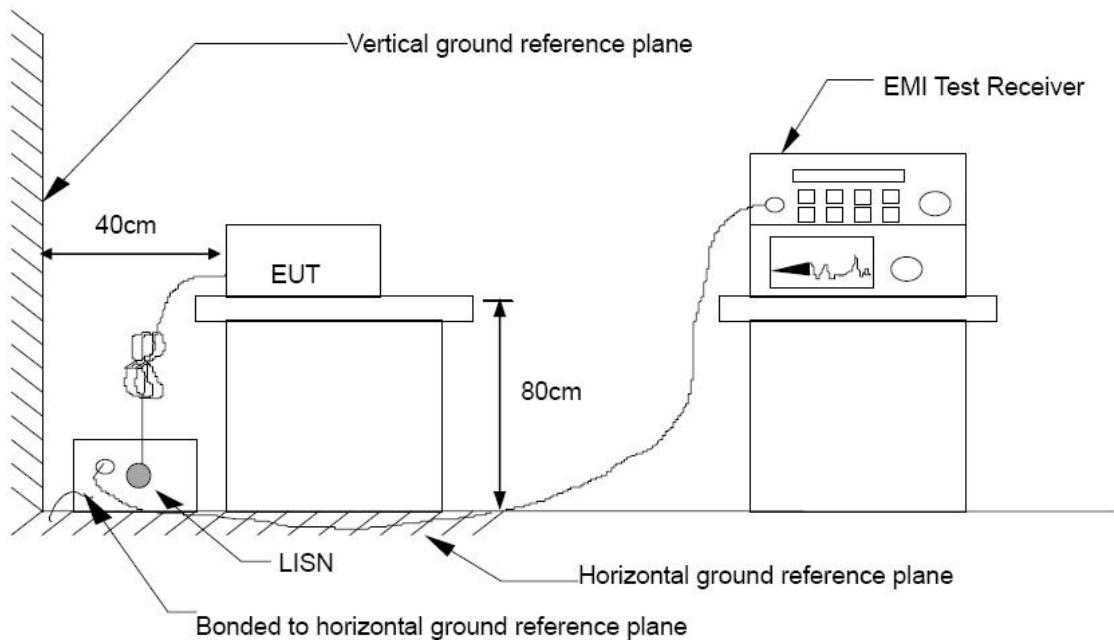

## TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.10 : 2013.


The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

**TEST RESULTS**

Product Name	Turntable	Test Date	2015/12/30
Model Name	BT100	Test By	Peter Chu
Test Mode	Normal Operation	Temp & Humidity	26°C, 56%


LINE

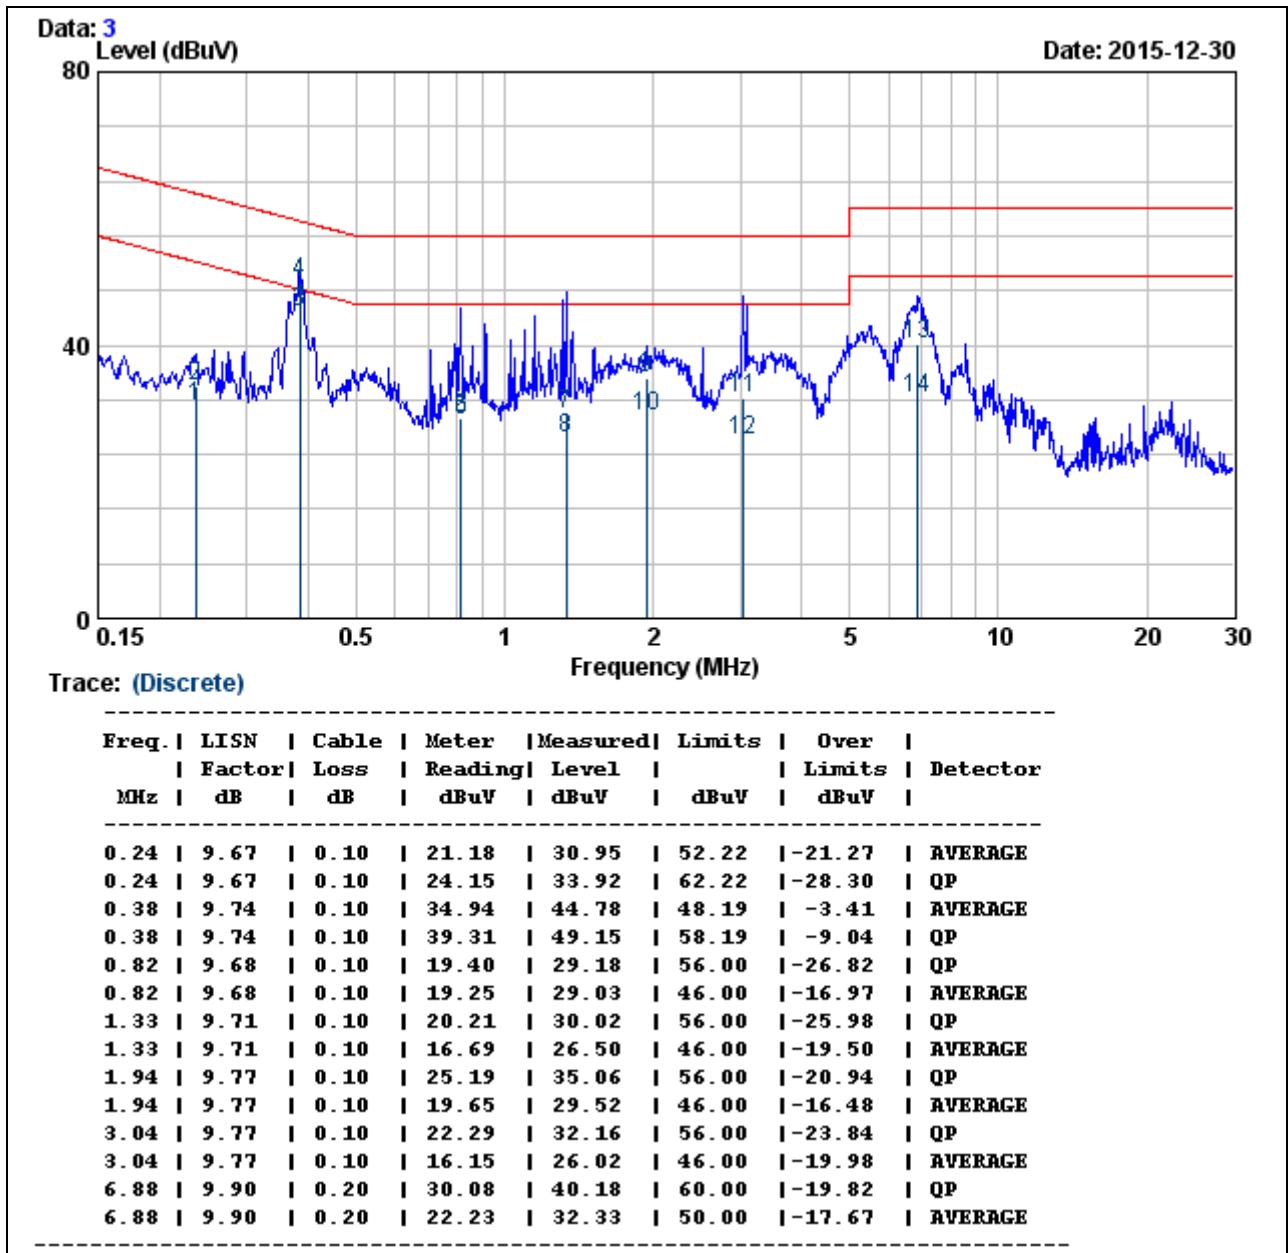**Remark:**

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value

Product Name	Turntable	Test Date	2015/12/30
Model Name	BT100	Test By	Peter Chu
Test Mode	Normal Operation	Temp & Humidity	26°C, 56%

## NEUTRAL

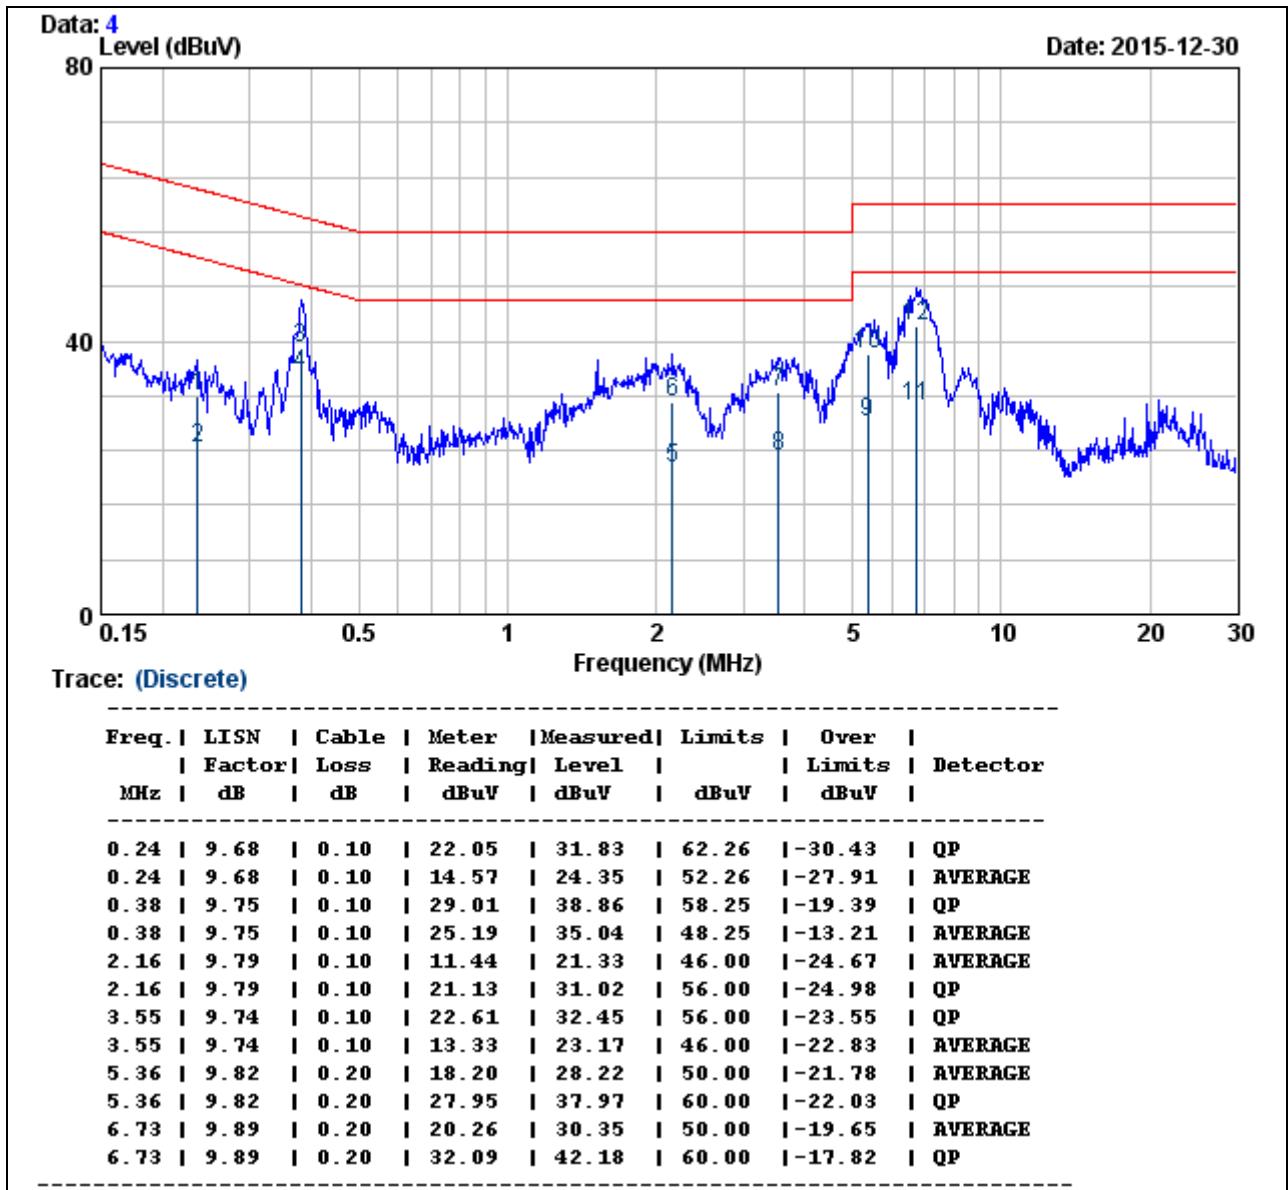

## Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level - Limit value