

# TEST REPORT

OF

FCC Part 15 Subpart C §15.209, §15.231

FCC ID : Y5CSB5HNW

Equipment Under Test : Wireless Motion Sensor  
Model Name : SB-5HNW  
Serial No. : N/A  
Applicant : Security & Best Co., Ltd.  
Manufacturer : Security & Best Co., Ltd.  
Date of Test(s) : 2010.12.23 ~ 2011.01.11  
Date of Issue : 2011.01.25

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2011.01.25

Duke Ko

Approved By



Date

2011.01.25

Charles Kim

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

# INDEX

<u>TABLE OF CONTENTS</u>	<u>Page</u>
<b>1. General Information -----</b>	<b>3</b>
<b>2. Field Strength of Fundamental -----</b>	<b>6</b>
<b>3. Spurious Emission -----</b>	<b>11</b>
<b>4. Bandwidth of Operation Frequency -----</b>	<b>13</b>
<b>5. Transmission Time -----</b>	<b>15</b>
<b>6. The total duration of transmission -----</b>	<b>17</b>

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1. General Information

### 1.1. Testing Laboratory

SGS Testing Korea Co., Ltd.  
705,Dongchun-dong, Yongin-city, Gyeonggi-Do, Korea 449-840

[www.electrolab.kr.sgs.ccom](http://www.electrolab.kr.sgs.ccom)

Telephone : +82 +31 428 5700  
FAX : +82 +31 427 2371

### 1.2. Details of Applicant

Applicant : Security & Best Co., Ltd.  
Address : #1005, 1006, Dojeong B/D, 548-6, Anyang8-dong, Manan-gu,  
Anyang-city, Gyeonggi-do, Korea  
Contact Person : MinJung Kim  
Phone No. : +82 +31 341 8513  
Fax No. : +82 +31 341 8669

### 1.3. Description of EUT

<b>Kind of Product</b>	Wireless Motion Sensor
<b>Model Name</b>	SB-5HNW
<b>Serial Number</b>	N/A
<b>Power Supply</b>	DC 3 V
<b>Frequency Range</b>	447.275 MHz
<b>Modulation Technique</b>	FSK
<b>Number of Channels</b>	1
<b>Antenna Type</b>	Integral Type (PCB Antenna)

### 1.4. Details of Modification

-This is an alarm system for the security and the equipment transmits RF alarm signal when it detects changes of light and temperature.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**1.5. Test Equipment List**

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Signal Generator	Agilent	E4438C	Mar. 31, 2011
Spectrum Analyzer	Rohde & Schwarz	FSV30	Mar. 31, 2011
Preamplifier	H.P.	8447F	Jul. 05, 2011
Preamplifier	Agilent	8449B	Mar. 31, 2011
Attenuator	Agilent	8494B	Apr. 02, 2011
Test Receiver	Rohde & Schwarz	ESU26	Apr. 21, 2011
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	396	Jul. 22, 2011
Horn Antenna	Rohde & Schwarz	HF906	Oct. 08, 2011
DC power Supply	Agilent	U8002A	Jan. 05, 2012
Anechoic Chamber	SY Corporation	L x W x H 9.6 m x 6.4 m x 6.6 m	N. C. R.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD		
Section in FCC 15 Subpart C §15.209	Test Item	Result
15.209(a) 15.231(b)	Radiated emission, Spurious Emission and Field Strength of Fundamental	Complied
15.231(c)	Bandwidth of Operation frequency	Complied
15.231(a)(2)	Transmission Time	Complied
15.231(a)(3)	Total duration of transmissions	Complied

## 1.7 Test Report Revision


Revision	Report number	Description
0	F690501/RF-RTL004430	Initial

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*


## 2. Field Strength of Fundamental

### 2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

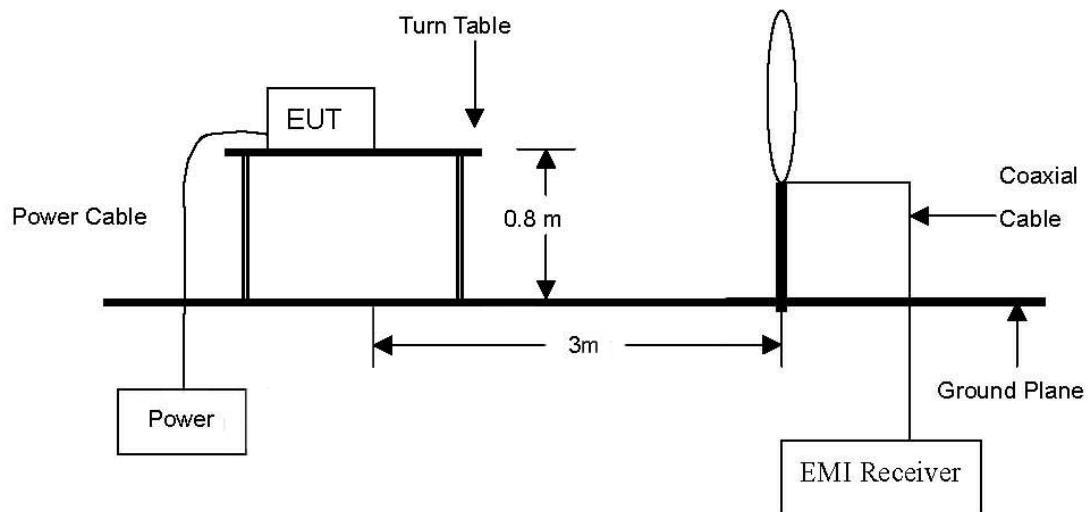


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

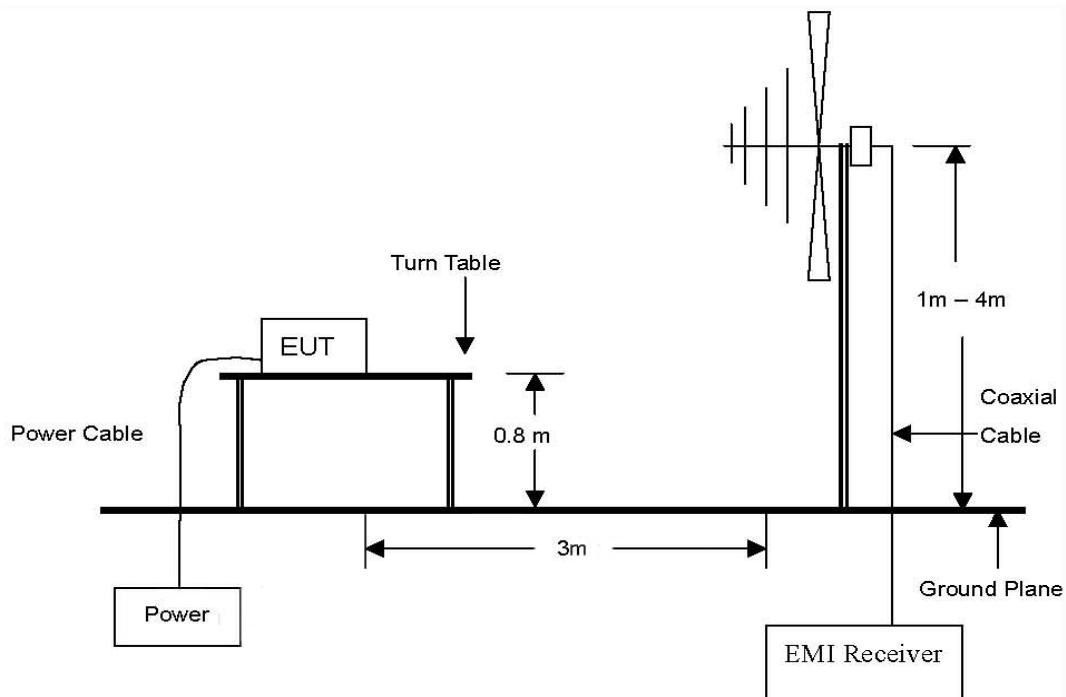

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 18 GHz Emissions.

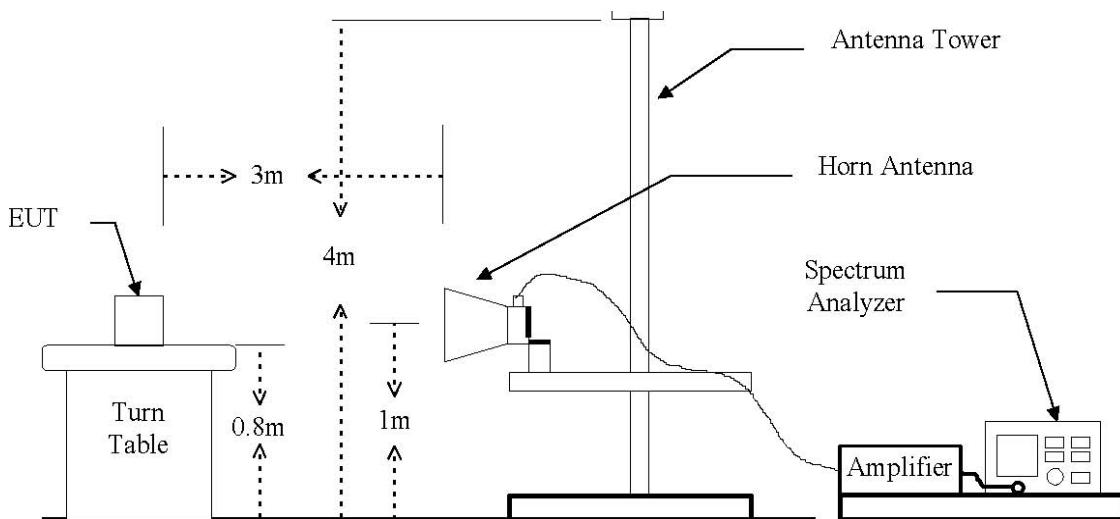

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.2. Limit

### 2.2.1. Radiated emission limits, general requirements

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	2400/F(kHz)	30
1.705 – 30.0	30	30
30 -88	100**	3
88 -216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241

### 2.2.2. Periodic operation in the band 40.66-40.70 MHz and above 70 MHz

In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 – 47.70	2,250	225
70 - 130	1,250	125
130 – 174	1,250 to 3,750 **	125 to 375 **
174 – 260	3,750	375
260 – 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

\*\* linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows : for the band 130-174 MHz,  $\mu\text{V}/\text{m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu\text{V}/\text{m}$  at 3 meters =  $41.6667(F) - 7083.333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

### 2.3.1. Test Procedures for emission from 9 kHz to 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

### 2.3.2. Test Procedures for emission from 30 MHz to 1000 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

## 2.4. Test Result

Ambient temperature : (24 ± 2) °C  
Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical

Freq. (MHz)	Ant. Pol	Reading (dB $\mu$ N)	Correction Factor (dB/m)	Duty Cycle Correction Factor (dB)	Result (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)	Detect Mode
447.277	V	58.70	18.45	0	77.15	81.25	4.10	Average

**Note:**

1. A Peak limit is 20 dB above the average limit.
2. 3m Limit(dBuV/m) =  $20\log[41.6667(F_{(MHz)})-7083.3333] = 81.25$
3. Average Reading = Peak Reading + Duty Cycle Correction Factor
  - Duty Cycle Correction Factor :  $20\log(T_{on} / T_{on+off})$  when  $T_{on} < 100$  ms.
  - When  $T_{on} \leq 100$  ms, Duty cycle is considered 100 % and correction factor will be 0 dB.
  - In this case, fundamental and spurious emission could be measured with average detect directly.
4. Correction Factor = Antenna Factor + Cable Loss

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 3. Spurious Emission

#### 3.1. Test Setup

Same as section 2.1 of this report

#### 3.2. Limit

Same as section 2.2 of this report

#### 3.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

##### 3.3.1. Test Procedures for emission from 9 kHz to 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### 3.3.2. Test Procedures for emission from 30 MHz to 1000 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 3.4. Test Result

Ambient temperature : (24 ± 2) °C  
Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF/CL (dB/m)/(dB)	Amp Gain (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
894.554	20.00	Average	V	25.07	-	45.07	61.25	16.18
1 341.906	58.11	Average	H	25.06	-31.95	51.22	54.00	2.78
Above 1 400.000	Not detected	-	-	-	-	-	-	-

**Remark:**

To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

**Note:**

1. A Peak limit is 20 dB above the average limit.
2. Other spurious Frequencies were not detected up to 1 400 MHz

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 4. Bandwidth of Operation Frequency

### 4.1. Test Setup



### 4.2. Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 4.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=100 Hz, VBW=100 Hz and Span=30 kHz.
3. The bandwidth of fundamental frequency was measured and recorded.

---


*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

#### 4.4. Test Result

Ambient temperature : (24 ± 2) °C

Relative humidity : 47 % R.H.

Carrier Frequency (MHz)	Bandwidth of the emission (kHz)	Limit (kHz)	Remark
447.725	5.82	1 118.19	The point 20 dB down from the modulated carrier

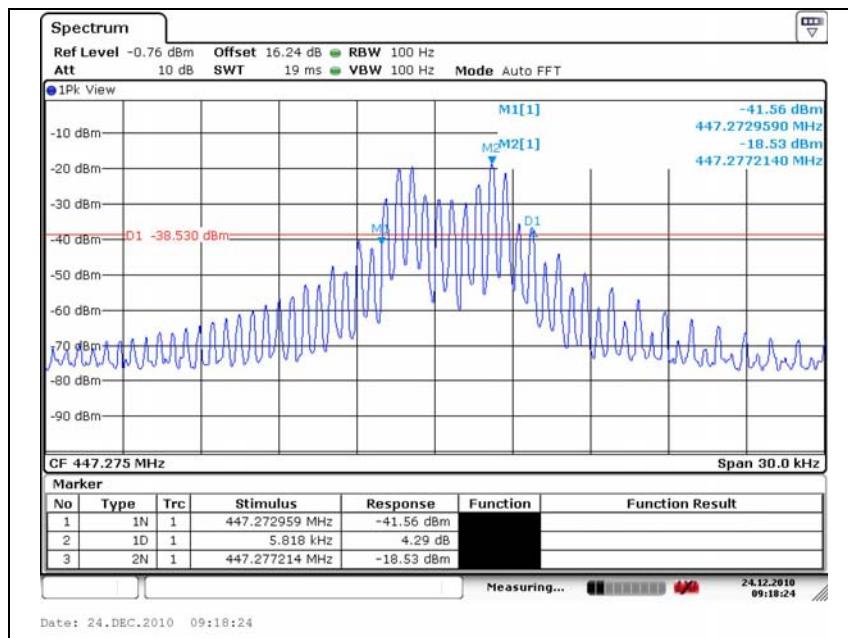

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 5. Transmission Time

### 5.1. Test Setup



### 5.2. Limit

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 5.3. Test Procedure

1. The transmitter output is connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Sweep Time=20 sec
3. The bandwidth of fundamental frequency was measured and recorded.


---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 5.4. Test Result

Ambient temperature : (24  $\pm$  2) °C  
Relative humidity : 47 % R.H.

Carrier Frequency (MHz)	Transmission Time (sec)	Limit (sec)	Remark
447.275	0.51	Same or less than 5 s	-

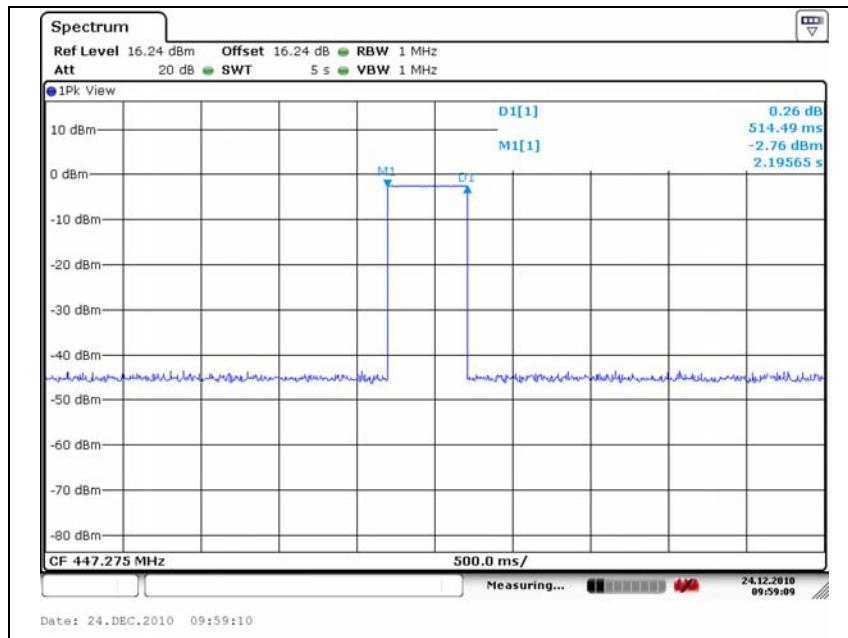

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 6. The total duration of transmissions

### 6.1. Limit

Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

### 6.2. Declaration

In addition to sending an alarm for the transient, the device sends and receives a signal once only to synchronize.

### 6.3. Test Result

See Transmission Time as above

Carrier Frequency (MHz)	Transmission Time (sec)	Total Transmit in an hour	The total duration of transmissions (sec)	Limit (sec)	Remark
447.275	0.51	1	0.51	Same or less than 2 sec	-

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*