

STS

LAB



# RADIO TEST REPORT

Report No:STS1807040W01

Issued for

Canon Electronic Business Machines (H.K.) Co., Ltd.

17/F, Tower One, Ever Gain Plaza, 82-100 Container Port Road,  
Kwai Chung, New Territories, Hong Kong

<b>Product Name:</b>	Wireless Presenter
<b>Brand Name:</b>	Canon
<b>Model Name:</b>	PR3
<b>Series Model:</b>	N/A
<b>FCC ID:</b>	Y7J-PR3
<b>IC:</b>	9472A-PR3
<b>Test Standard:</b>	FCC Part 15.247 RSS-247 Issue 2, February 2017

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.  
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China  
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





## TEST RESULT CERTIFICATION

**Applicant's name** .....: Canon Electronic Business Machines (H.K.) Co., Ltd.  
Address .....: 17/F, Tower One, Ever Gain Plaza, 82-100 Container Port Road, Kwai Chung, New Territories, Hong Kong  
**Manufacture's Name** .....: Canon Electronic Business Machines (H.K.) Co., Ltd.  
Address .....: 17/F, Tower One, Ever Gain Plaza, 82-100 Container Port Road, Kwai Chung, New Territories, Hong Kong

### Product description

Product Name .....: Wireless Presenter

Brand Name .....: Canon

Model Name .....: PR3

Series Model .....: N/A

**Test Standards** .....: FCC Part15.247

RSS-247 Issue 2, February 2017

Test procedure .....: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test** .....:

Date (s) of performance of tests .....: 29 Nov. 2018 ~11 Dec. 2018

Date of Issue .....: 13 Dec. 2018

Test Result .....: **Pass**

Testing Engineer : 

( Chris chen )

Technical Manager : 

( Sunday Hu )

Authorized Signatory : 

( Vita Li )





## Table of Contents

<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2. GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
<b>3. EMC EMISSION TEST</b>	<b>15</b>
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 TEST PROCEDURE	16
3.3 TEST SETUP	16
3.4 EUT OPERATING CONDITIONS	16
3.5 TEST RESULTS	17
<b>4. RADIATED EMISSION MEASUREMENT</b>	<b>19</b>
4.1 RADIATED EMISSION LIMITS	19
4.2 TEST PROCEDURE	20
4.3 TEST SETUP	21
4.4 EUT OPERATING CONDITIONS	21
4.5 FIELD STRENGTH CALCULATION	22
4.6 TEST RESULTS	23
<b>5. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>32</b>
5.1 REQUIREMENT	32
5.2 TEST PROCEDURE	32
5.3 TEST SETUP	32
5.4 EUT OPERATION CONDITIONS	32
5.5 TEST RESULTS	33
<b>6. POWER SPECTRAL DENSITY TEST</b>	<b>36</b>
6.1 LIMIT	36
6.2 TEST PROCEDURE	36
6.3 TEST SETUP	36
6.4 EUT OPERATION CONDITIONS	36



## Table of Contents

6.5 TEST RESULTS	37
<b>7. BANDWIDTH TEST</b>	<b>39</b>
7.1 LIMIT	39
7.2 TEST PROCEDURE	39
7.3 TEST SETUP	39
7.4 EUT OPERATION CONDITIONS	39
7.5 TEST RESULTS	40
<b>8. PEAK OUTPUT POWER TEST</b>	<b>44</b>
8.1 LIMIT	44
8.2 TEST PROCEDURE	44
8.3 TEST SETUP	44
8.4 EUT OPERATION CONDITIONS	44
8.5 TEST RESULTS	45
<b>9. ANTENNA REQUIREMENT</b>	<b>46</b>
9.1 STANDARD REQUIREMENT	46
9.2 EUT ANTENNA	46
<b>10. FREQUENCY STABILITY</b>	<b>47</b>
10.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	47
10.2 TEST PROCEDURE	47
10.3 TEST RESULT	47
<b>11. EUT TEST PHOTO</b>	<b>48</b>

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	13 Dec. 2018	STS1807040W01	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 DTS Meas Guidance v05

<b>FCC Part 15.247,Subpart C RSS-247 Issue 2</b>			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-Gen Issue 5 April 2018	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
RSS-GEN clause 6.7	99% Bandwidth	PASS	--
15.247 (b)(3) RSS-247 Issue 2, February 2017 (5.4)	Output Power	PASS	--
15.247 (c) RSS-247 Issue 2, February 2017 (5.5)	Radiated Spurious Emission	PASS	--
15.247 (d) RSS-247 Issue 2, February 2017 (5.5)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e) RSS-247 Issue 2, February 2017	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/part 15.209(a) RSS-247 Issue 2, February 2017	Band Edge Emission	PASS	--
15.203 RSS-Gen Issue 5 April 2018	Antenna Requirement	PASS	--
RSS-Gen Issue 5 April 2018	Frequency Stability	PASS	--

### NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013



## 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

FCC Registration No.: 625569

IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  · where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** · providing a level of confidence of approximately **95 %** ·

No.	Item	Uncertainty
1	RF output power,conducted	$\pm 0.71\text{dB}$
2	Unwanted Emissions,conducted	$\pm 0.63\text{dB}$
3	All emissions,radiated 30-200MHz	$\pm 3.43\text{dB}$
4	All emissions,radiated 200MHz-1GHz	$\pm 3.57\text{dB}$
5	All emissions,radiated>1G	$\pm 4.13\text{dB}$
6	Conducted Emission(9KHz-150KHz)	$\pm 3.18\text{dB}$
7	Conducted Emission(150KHz-30MHz)	$\pm 2.70\text{dB}$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Wireless Presenter
Trade Name	Canon
Model Name	PR3
Series Model	N/A
Model Difference	N/A
Product Description	The EUT is a Wireless Presenter
	Operation Frequency: 2402~2480 MHz
	Modulation Type: GFSK
	Radio Technology: BLE
	Number Of Channel: 40
	Antenna Designation: Please see Note 3.
	Antenna Gain (dBi): 2.01 dBi
Channel List	Please refer to the Note 2.
Battery	Battery(rating): Rated Voltage: 3.7V Charge Limit: 4.2V Capacity: 125mAh
Power Rating	Input DC 5V, 400mA
Hardware version number	T000
Software version number	V02
Radio Hardware version	T000
Radio Software version	V02
Test Software	nrfgostudio_win-64_1.21.2_installer
RF Power Setting TEST Software (power class)	(1)2.4 GHz:GFSK(1Mbps):-6.5
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	09	2422	18	2442	28	2462
00	2404	10	2424	19	2444	29	2464
01	2406	38	2426	20	2446	30	2466
02	2408	11	2428	21	2448	31	2468
03	2410	12	2430	22	2450	32	2470
04	2412	13	2432	23	2452	33	2472
05	2414	14	2434	24	2454	34	2474
06	2416	15	2436	25	2456	35	2476
07	2418	16	2438	26	2458	36	2478
08	2420	17	2440	27	2460	39	2480

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	Canon	PR3	PCB Antenna	N/A	2.01	BLE ANT.



## 2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

Worst Mode	Description	Data/Modulation
Mode 1	TX CH37(2402MHz)	1 MHz/GFSK
Mode 2	TX CH17(2440MHz)	1 MHz/GFSK
Mode 3	TX CH39(2480MHz)	1 MHz/GFSK

Note:


- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (2) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report
- (3) We tested two power states of when the EUT working is by USB charging and a separate lithium battery to power. the EUT working by USB charging power is higher, so all the test data is tested by USB charging mode.
- (4) Controlled using a bespoke application on the laptop PC supplied by the customer. The application was used to enable a continuous transmission mode and to select the test channels, data rates and modulation schemes as required.

For AC Conducted Emission


Test Case	
AC Conducted Emission	Mode 4 : Keeping BT TX

## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

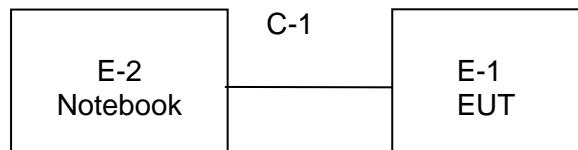

Conduction Test Set

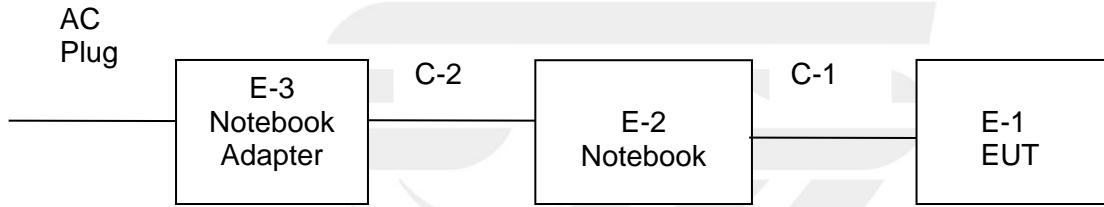



## 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
C-1	USB Cable	NO	10cm	N/A	N/A

### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Notebook	HP	500-320cx	N/A	N/A
E-3	Notebook Adapter	HP	HSTNN-CA15	N/A	N/A
C-2	DC Cable	NO	100cm	N/A	N/A

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.01
Horn Antenna	Schwarzbeck	BBHA 9120D(1201)	9120D-1343	2017.10.27	2020.10.26
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	N/A	2018.03.11	2021.03.10
Temperature & Humidity	HH660	Mieo	N/A	2018.10.13	2019.10.12
Pre-amplifier (0.1M-3GHz)	EM	EM330	N/A	2018.03.09	2019.03.08
PreAmplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK201808090 1	2018.10.13	2019.10.12
Passive Loop (9K--30MHz)	ZHINAN	ZN30900C	16035	2017.03.11	2020.03.10
Low frequency cable	EM	R01	N/A	2018.03.11	2019.03.10
Low frequency cable	EM	R06	N/A	2018.03.11	2019.03.10
High frequency cable	SCHWARZBECK	R04	N/A	2018.03.11	2019.03.10
High frequency cable	SCHWARZBECK	R02	N/A	2018.03.11	2019.03.10
Semi-anechoic chamber	Changling	966	N/A	2018.10.24	2020.10.23
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Max-full Antenna Corp	MF	MFA-440H	N/A	N/A	N/A

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
LISN	R&S	ENV216	101242	2018.10.13	2019.10.12
conduction Cable	EM	C01	N/A	2018.03.11	2019.03.10
Temperature & Humidity	Mieo	HH660	N/A	2018.10.13	2019.10.12



## RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2018.10.13	2019.10.12
MXA Signal analyzer	Agilent	N9020A	MY51110105	2018.03.08	2019.03.07
MXA Signal analyzer	Agilent	N9020A	MY49100060	2018.10.13	2019.10.12





### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) and RSS-Gen Issue 5 limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

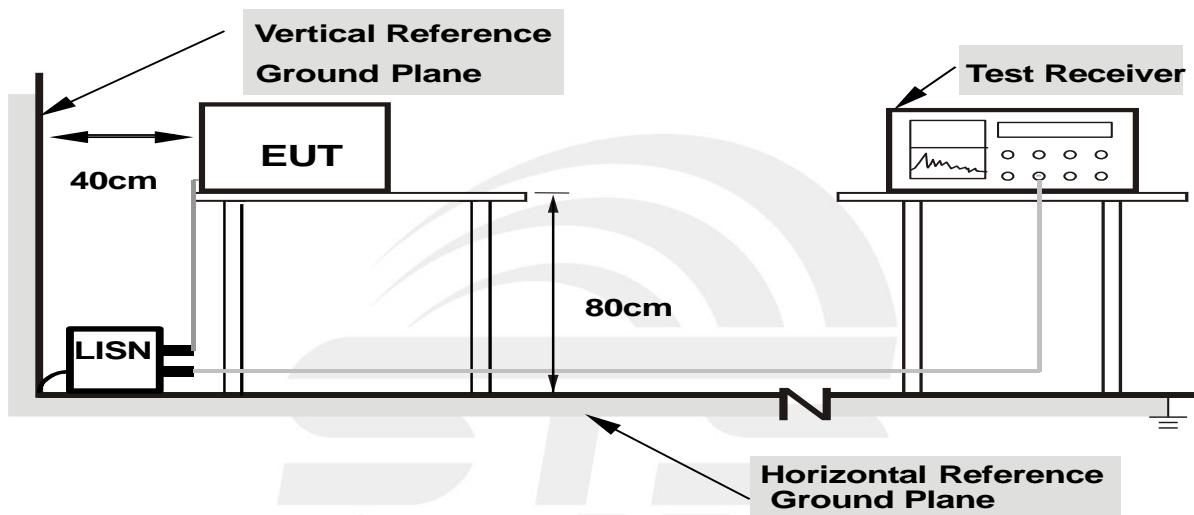

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.5 TEST RESULTS


Temperature:	24 °C	Relative Humidity:	62.5%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1540	45.12	9.79	54.91	65.78	-10.87	QP
0.1540	27.59	9.79	37.38	55.78	-18.40	AVG
0.1750	41.42	9.79	51.21	64.72	-13.51	QP
0.1750	23.46	9.79	33.25	54.72	-21.47	AVG
0.2260	34.61	9.90	44.51	62.60	-18.09	QP
0.2260	19.09	9.90	28.99	52.60	-23.61	AVG
0.5220	23.23	10.01	33.24	56.00	-22.76	QP
0.5220	9.37	10.01	19.38	46.00	-26.62	AVG
3.5540	23.31	9.82	33.13	56.00	-22.87	QP
3.5540	7.79	9.82	17.61	46.00	-28.39	AVG
9.2980	25.74	10.14	35.88	60.00	-24.12	QP
9.2980	17.38	10.14	27.52	50.00	-22.48	AVG

#### Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit

100.0 dBuV

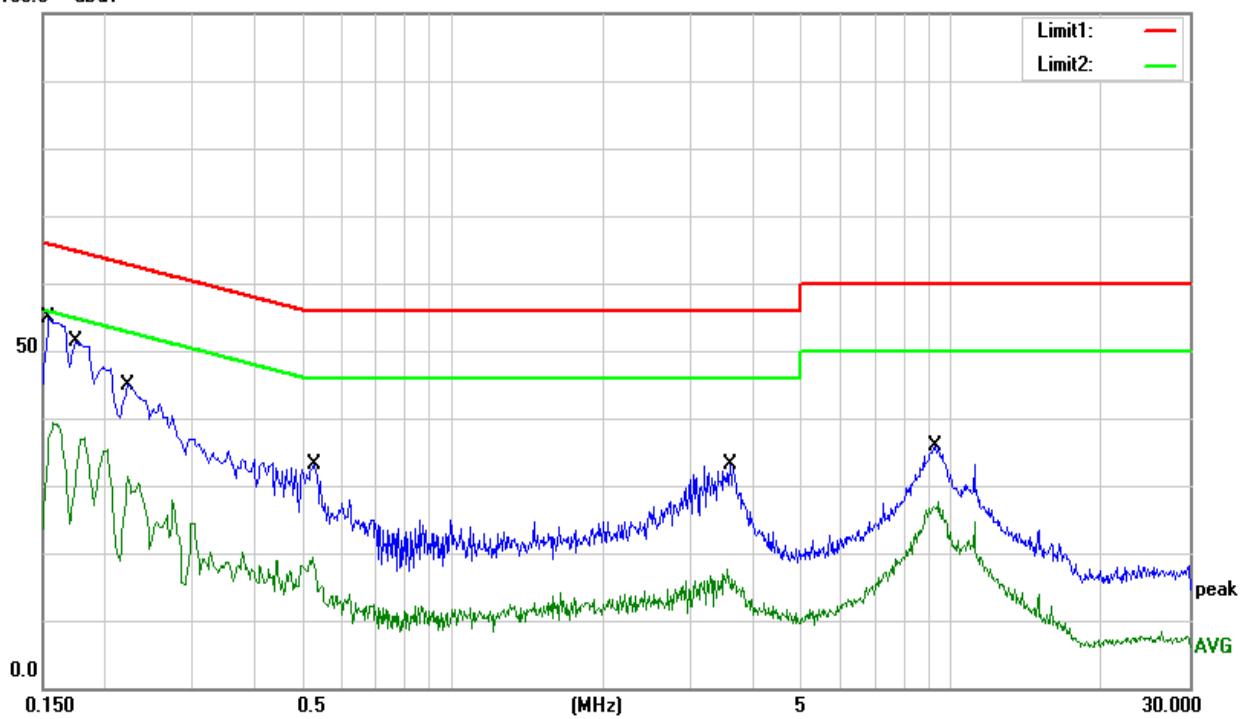




Temperature:	24°C	Relative Humidity:	62.5%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
0.1500	45.74	9.79	55.53	66.00	-10.47	QP
0.1500	34.22	9.79	44.01	56.00	-11.99	AVG
0.3860	26.11	10.06	36.17	58.15	-21.98	QP
0.3860	11.50	10.06	21.56	48.15	-26.59	AVG
0.4980	24.20	10.03	34.23	56.03	-21.80	QP
0.4980	11.29	10.03	21.32	46.03	-24.71	AVG
3.3060	24.49	9.82	34.31	56.00	-21.69	QP
3.3060	7.63	9.82	17.45	46.00	-28.55	AVG
9.2700	26.38	10.13	36.51	60.00	-23.49	QP
9.2700	17.23	10.13	27.36	50.00	-22.64	AVG
18.8940	13.13	10.41	23.54	60.00	-36.46	QP
18.8940	2.40	10.41	12.81	50.00	-37.19	AVG

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit

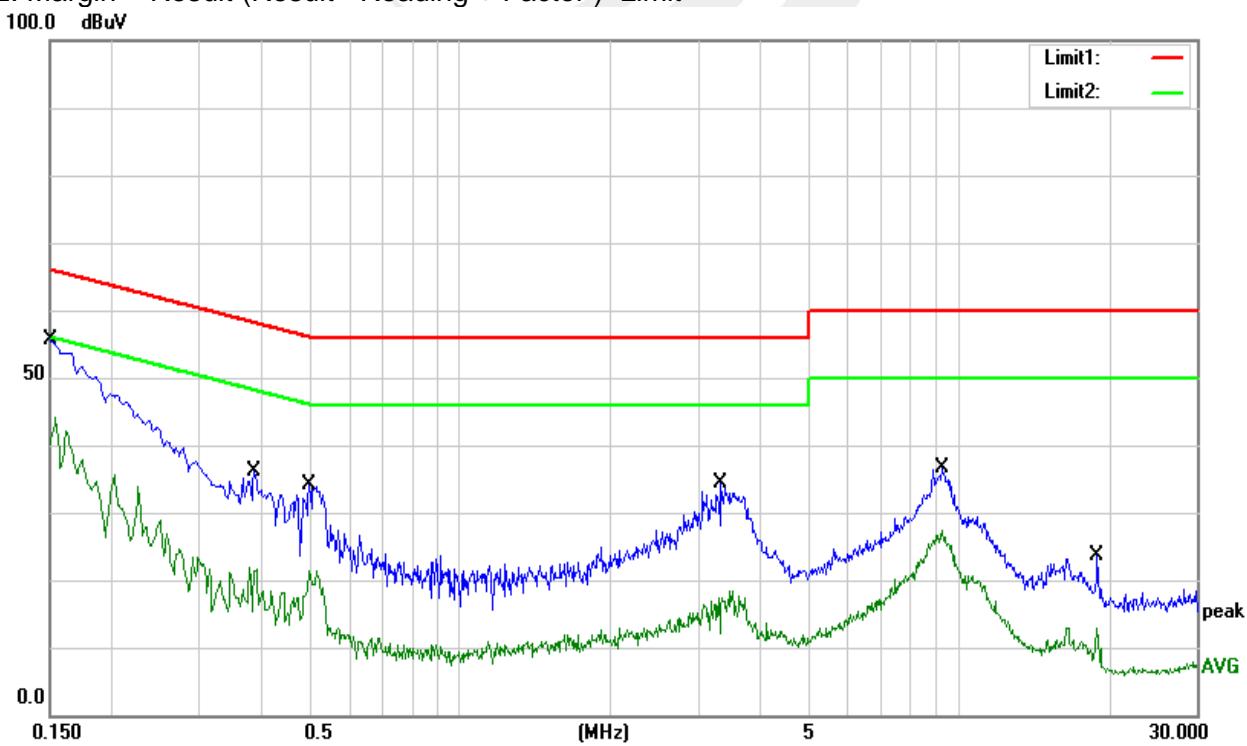



## 4. RADIATED EMISSION MEASUREMENT

### 4.1 RADIATED EMISSION LIMITS

in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) and RSS-247 Issue 2 limit in the table and according to ANSI C63.10-2013 below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz

#### For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz
RB / VB (emission in restricted band)	1 MHz / 3 MHz



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

#### 4.3 TEST SETUP


##### (A) Radiated Emission Test-Up Frequency Below 30MHz

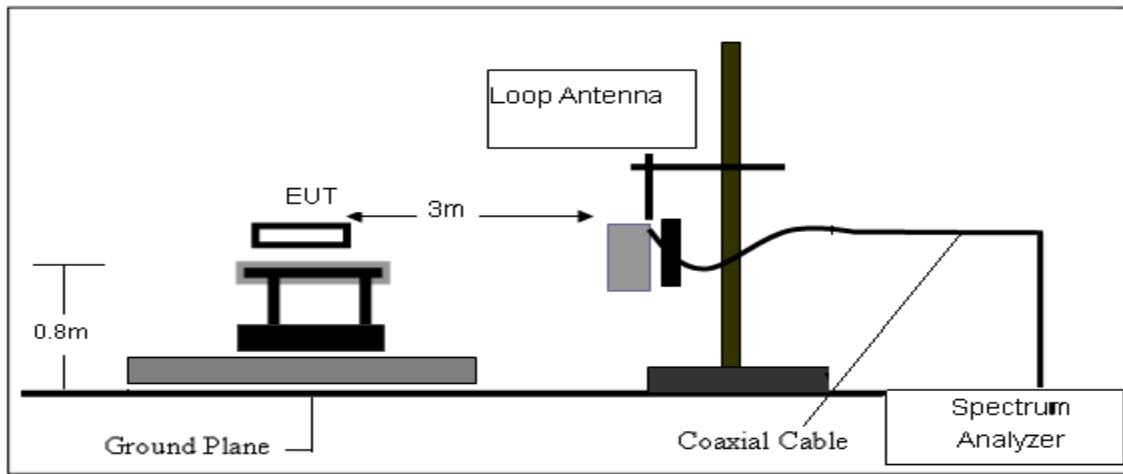

##### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

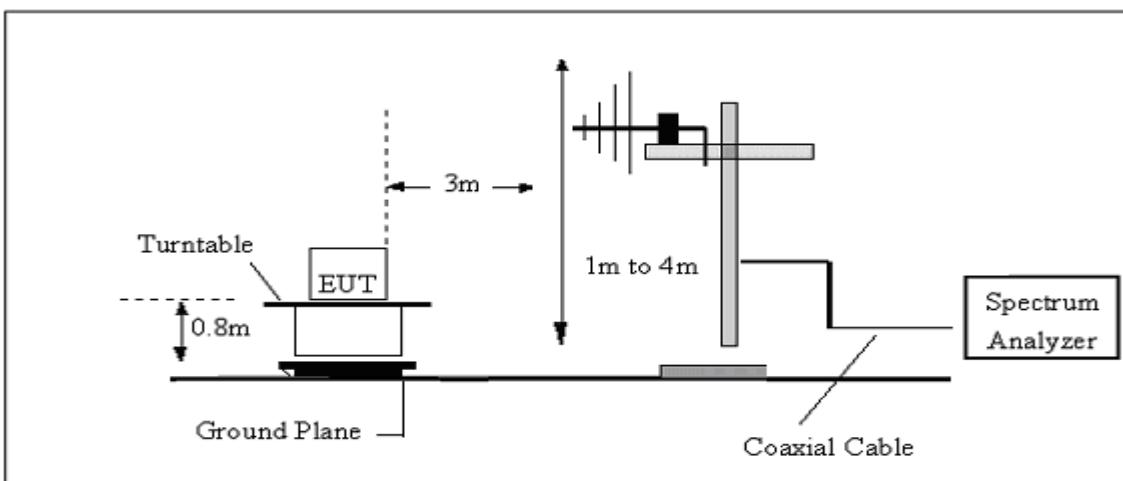

##### (C) Radiated Emission Test-Up Frequency Above 1GHz

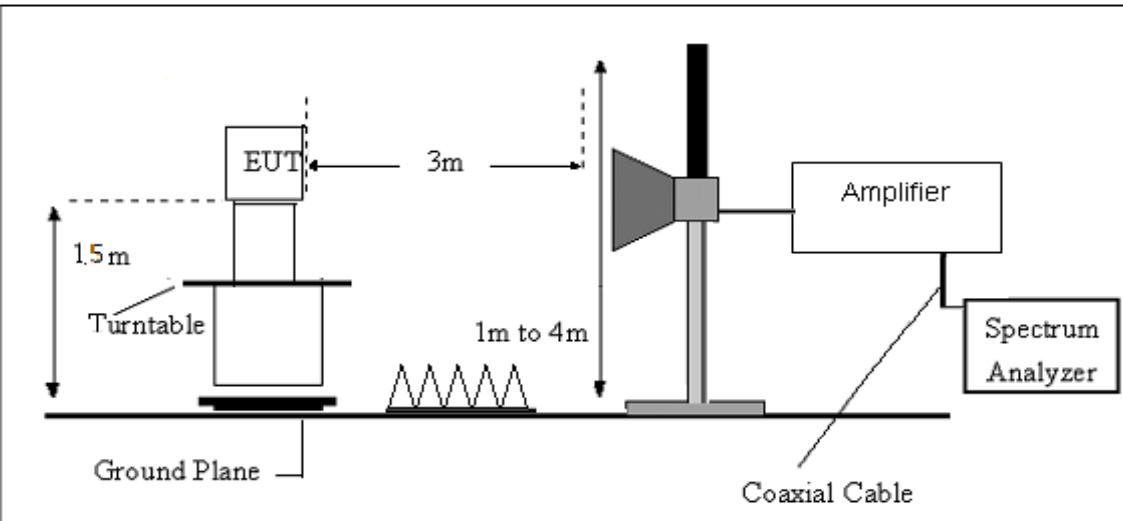

#### 4.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



#### 4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$





## 4.6 TEST RESULTS

(Between 9KHz – 30 MHz)

Temperature:	25.6 °C	Relative Humidity:	51%
Test Voltage:	DC 5V from USB	Polarization:	--
Test Mode:	TX Mode		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);  
Limit line = specific limits(dBuV) + distance extrapolation factor.




(30MHz -1000MHz)

Temperature:	25.6 °C	Relative Humidity:	51%
Test Voltage:	DC 5V from USB	Phase:	Horizontal
Test Mode:	Mode1/2/3(Mode1-1M worst mode)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
49.5328	37.80	-21.24	16.56	40.00	-23.44	QP
67.6751	38.93	-24.16	14.77	40.00	-25.23	QP
222.1698	42.80	-18.98	23.82	46.00	-22.18	QP
323.3204	40.73	-14.14	26.59	46.00	-19.41	QP
480.5276	35.60	-9.38	26.22	46.00	-19.78	QP
798.9797	35.15	-3.45	31.70	46.00	-14.30	QP

Remark:

1. Margin = Result (Result =Reading + Factor )–Limit

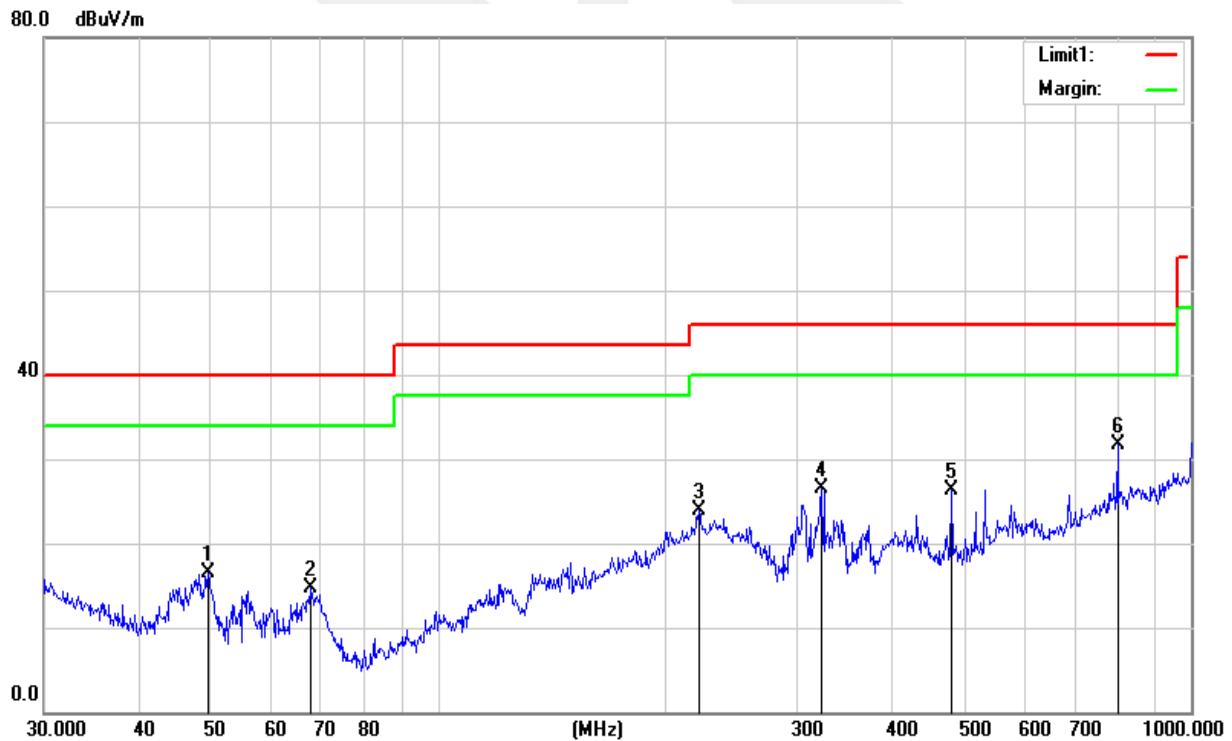




Temperature:	25.6 °C	Relative Humidity:	51%
Test Voltage:	DC 5V from USB	Phase:	Vertical
Test Mode:	Mode1/2/3(Mode 1-1M worst mode)		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
30.8535	27.66	-11.62	16.04	40.00	-23.96	QP
69.6005	39.41	-24.11	15.30	40.00	-24.70	QP
125.0066	40.13	-17.61	22.52	43.50	-20.98	QP
302.4812	39.30	-14.75	24.55	46.00	-21.45	QP
531.9635	40.07	-7.75	32.32	46.00	-13.68	QP
798.9796	35.69	-3.45	32.24	46.00	-13.76	QP

## Remark:

1. Margin = Result (Result =Reading + Factor )–Limit

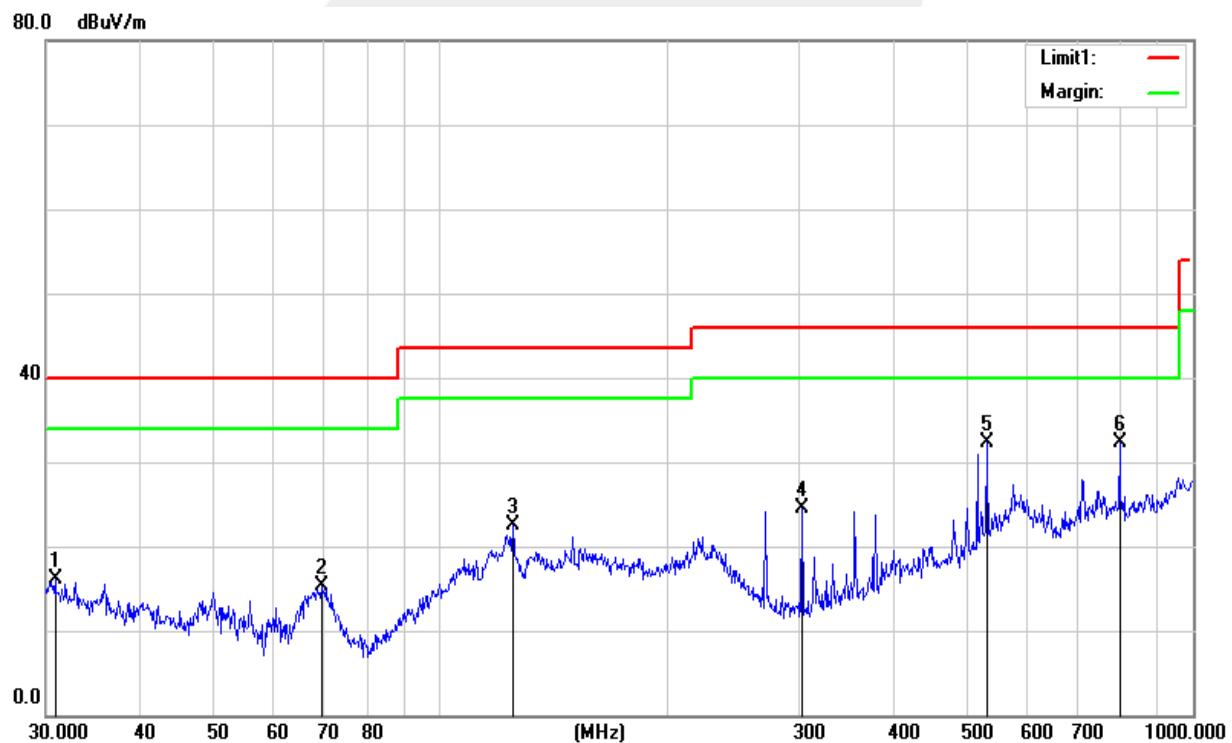




## (1GHz-25GHz) Restricted band and Spurious emission Requirements

Low Channel  
Horizontal

RE\_FCC Test Case\_FCC 15B 1GHz-25GHz

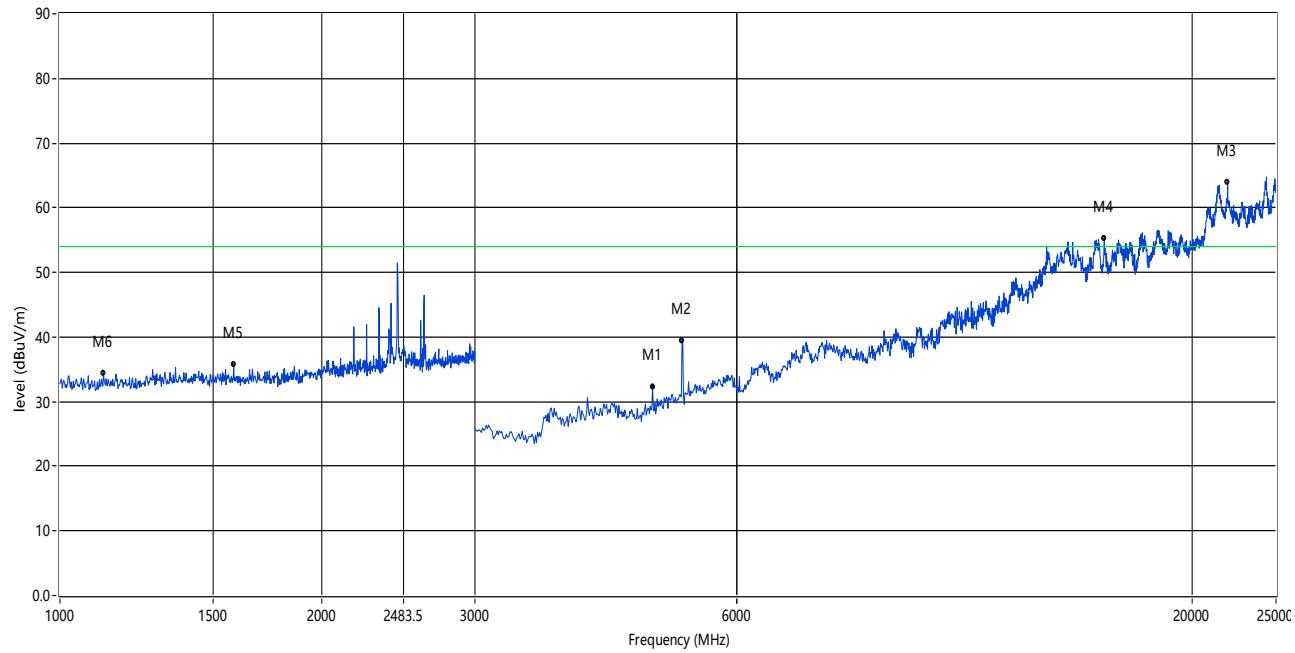


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	4800.000	32.33	0.63	74.0	-41.67	Peak	215.30	100	H	Pass
2	5190.000	39.45	2.33	74.0	-34.55	Peak	358.50	200	H	Pass
3	22000.001	63.92	23.88	74.0	-10.08	Peak	329.20	200	H	Pass
4	15868.000	55.33	22.22	74.0	-18.67	Peak	360.00	200	H	Pass
5	1584.000	35.76	-3.95	74.0	-38.24	Peak	356.70	100	H	Pass
6	1122.000	34.34	-4.94	74.0	-39.66	Peak	0.00	100	H	Pass



## Vertical

RE\_FCC Test Case\_FCC 15B 1GHz-25GHz

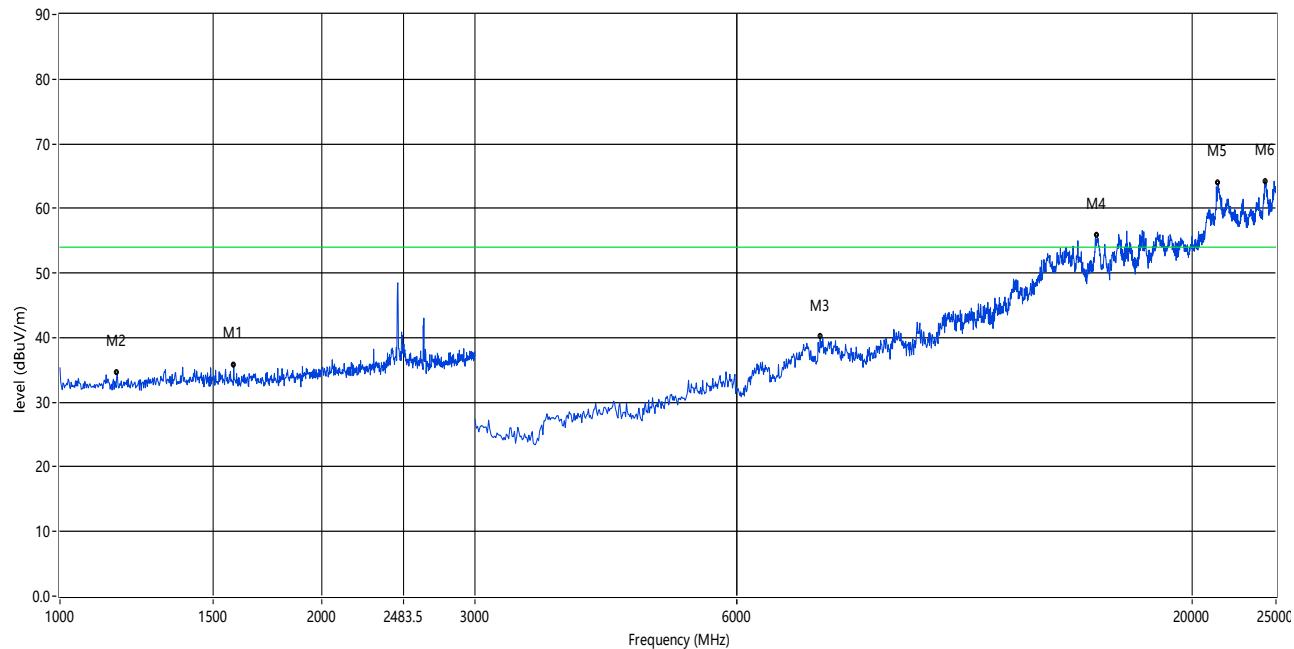


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1584.000	35.78	-3.95	74.0	-38.22	Peak	358.60	100	V	Pass
2	1164.000	34.50	-4.90	74.0	-39.50	Peak	258.40	100	V	Pass
3	7480.000	40.08	10.48	74.0	-33.92	Peak	86.10	200	V	Pass
4	15580.000	55.87	23.54	74.0	-18.13	Peak	135.00	200	V	Pass
5	21447.999	63.86	24.02	74.0	-10.14	Peak	200.40	200	V	Pass
6	24292.000	64.19	23.21	74.0	-9.81	Peak	248.40	200	V	Pass



## High Channel Horizontal

RE\_FCC Test Case\_FCC 15B 1GHz-25GHz

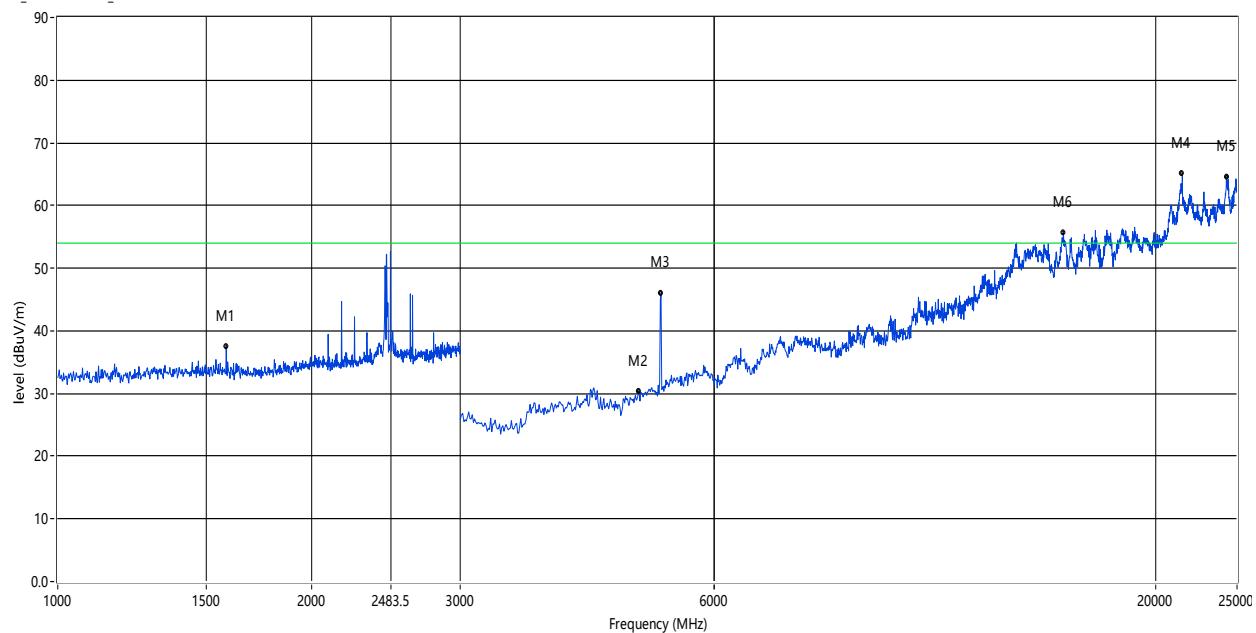


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1584.000	37.40	-3.95	74.0	-36.60	Peak	94.60	100	H	Pass
2	4880.000	30.40	0.63	74.0	-43.60	Peak	288.20	200	H	Pass
3	5190.000	45.90	2.33	74.0	-28.10	Peak	0.00	200	H	Pass
4	21532.000	65.13	24.00	74.0	-8.87	Peak	196.70	200	H	Pass
5	24292.000	64.59	23.21	74.0	-9.41	Peak	206.40	200	H	Pass
6	15568.000	55.66	23.55	74.0	-18.34	Peak	182.60	200	H	Pass



## Vertical


RE\_FCC Test Case\_FCC 15B 1GHz-25GHz

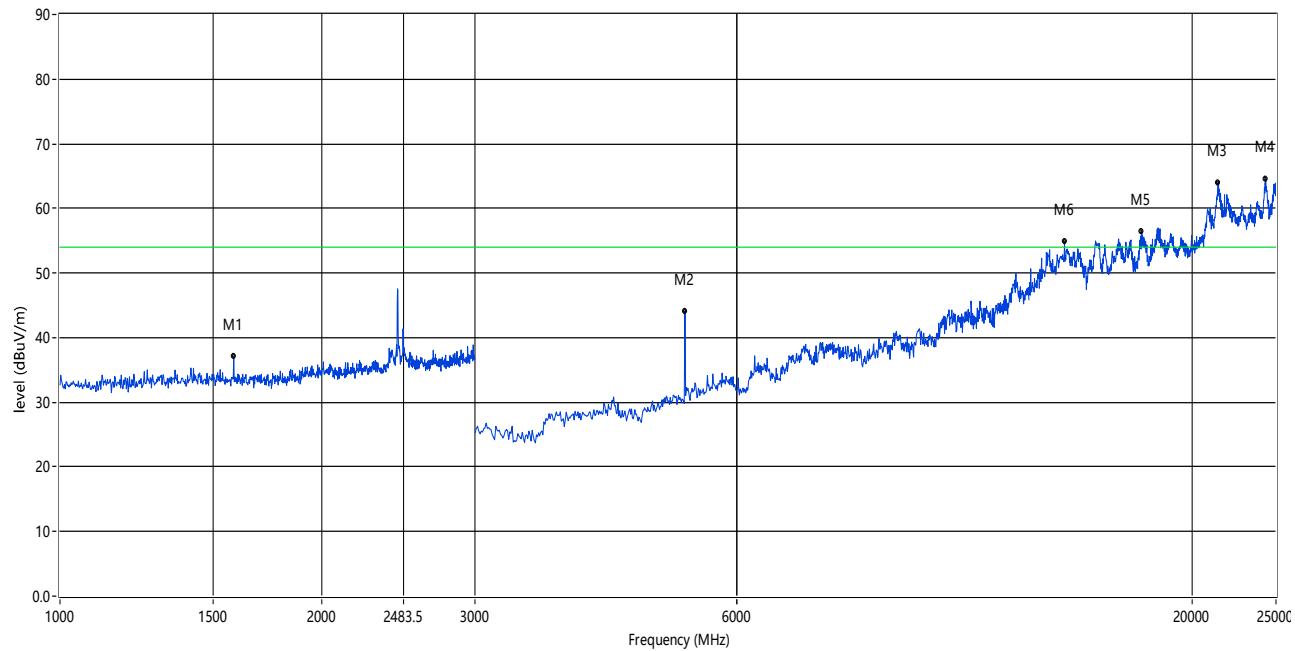

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1584.000	37.07	-3.95	74.0	-36.93	Peak	162.30	100	V	Pass
2	5230.000	44.11	2.59	74.0	-29.89	Peak	268.50	100	V	Pass
3	21472.000	64.01	24.02	74.0	-9.99	Peak	359.50	200	V	Pass
4	24327.999	64.59	23.20	74.0	-9.41	Peak	329.90	200	V	Pass
5	17524.001	56.46	22.96	74.0	-17.54	Peak	339.20	200	V	Pass
6	14284.000	54.85	24.46	74.0	-19.15	Peak	186.70	200	V	Pass




## 4.6 TEST RESULTS (Restricted Bands Requirements)

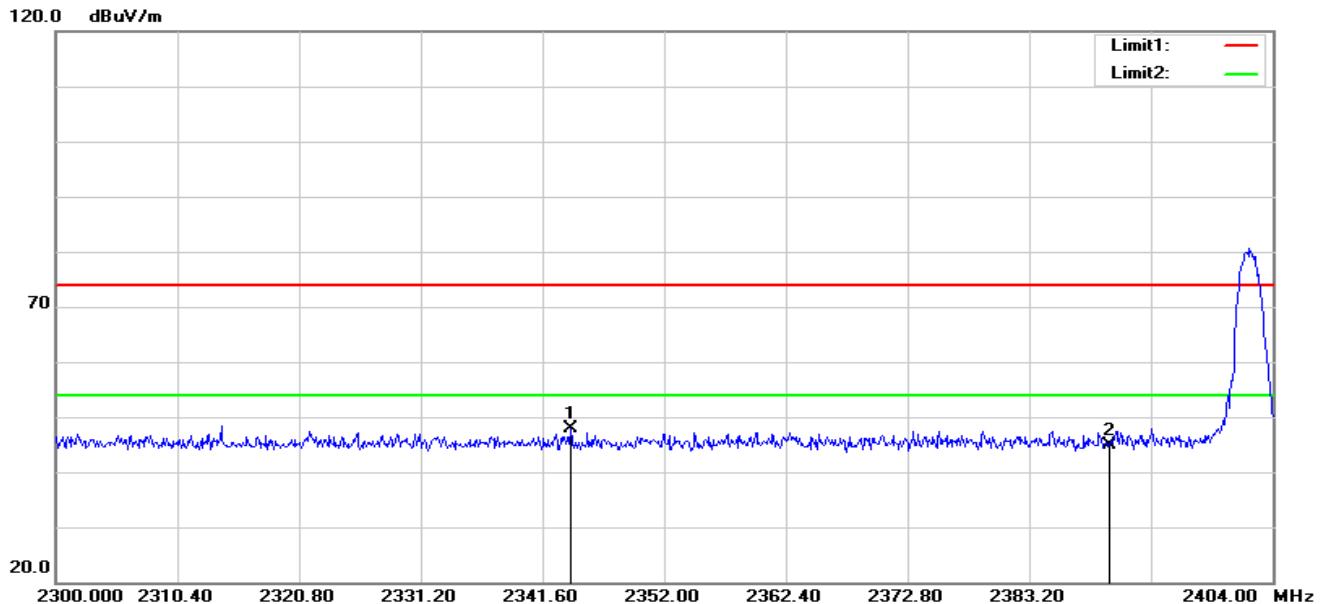
GFSK-Low  
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2343.992	58.91	-11.05	47.86	74.00	-26.14	peak
2	2390.000	55.68	-10.75	44.93	74.00	-29.07	peak

Vertical

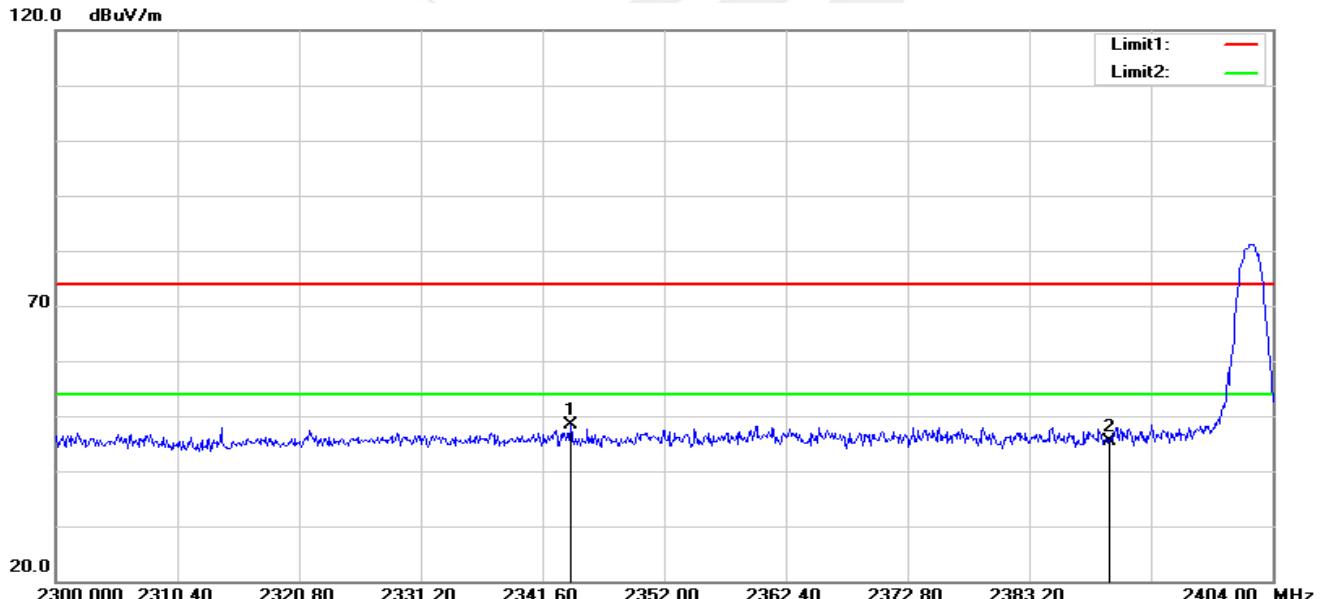


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2343.992	59.41	-11.05	48.36	74.00	-25.64	peak
2	2390.000	56.18	-10.75	45.43	74.00	-28.57	peak

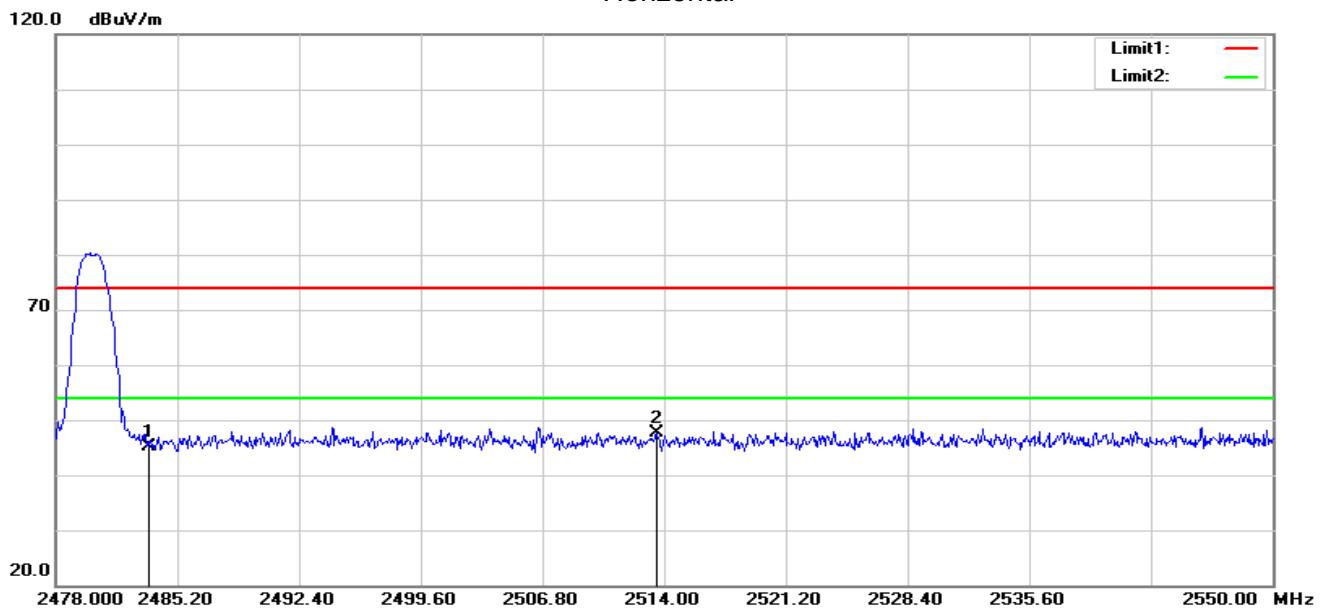**GFSK-High**  
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.51	-10.29	45.22	74.00	-28.78	peak
2	2513.568	57.69	-10.17	47.52	74.00	-26.48	peak

## Vertical

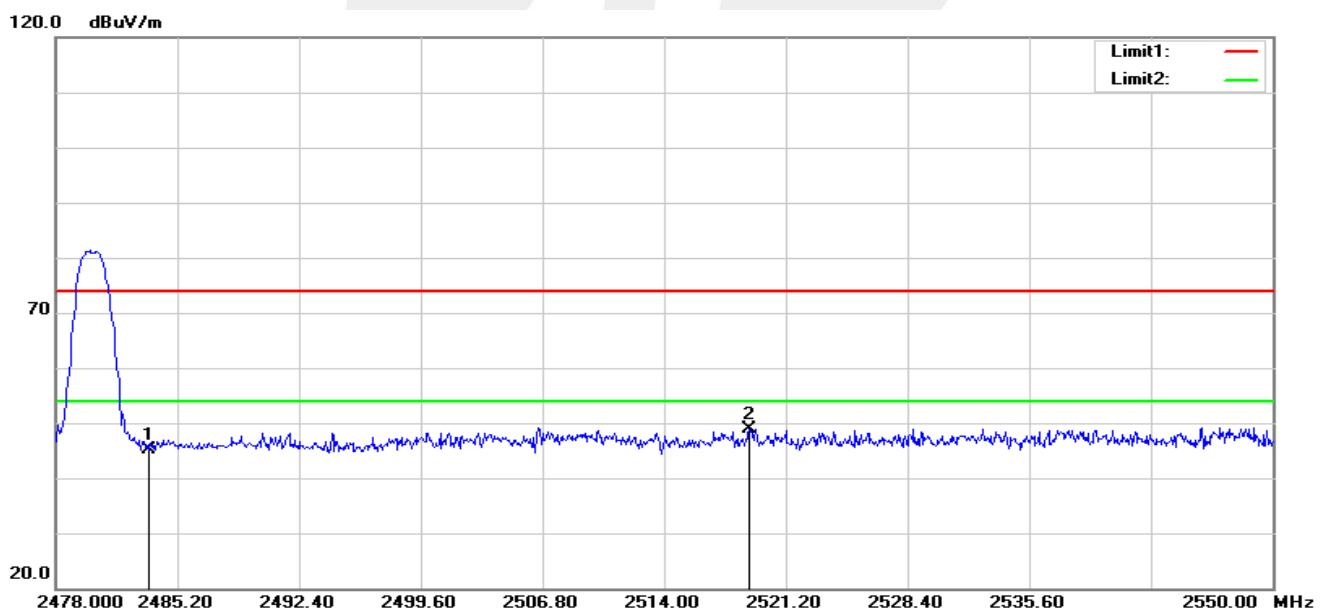

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.51	-10.29	45.22	74.00	-28.78	peak
2	2519.040	59.00	-10.16	48.84	74.00	-25.16	peak

## 5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 5.1 REQUIREMENT

According to FCC section 15.247(d) and RSS-247 Issue 2, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


### 5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2403 MHz Upper Band Edge: 2479 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

### 5.3 TEST SETUP

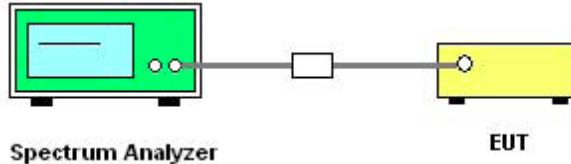

The EUT which is powered by the PC, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 5.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



## 5.5 TEST RESULTS


Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	DC 5V from USB	Test Mode:	TX Mode /CH37, CH17, CH39

CH 37

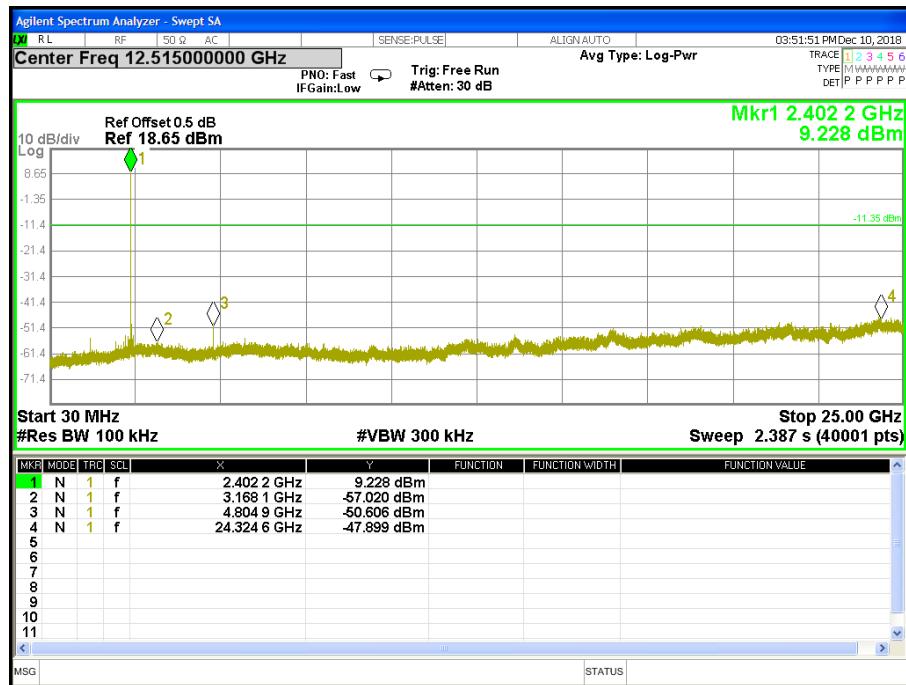




## CH 17

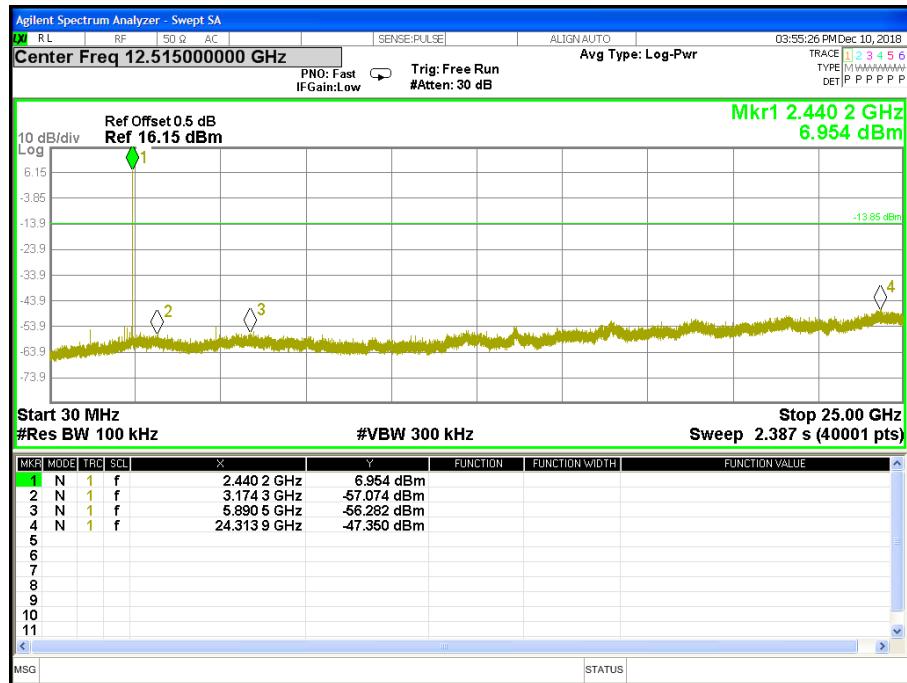


## CH 39

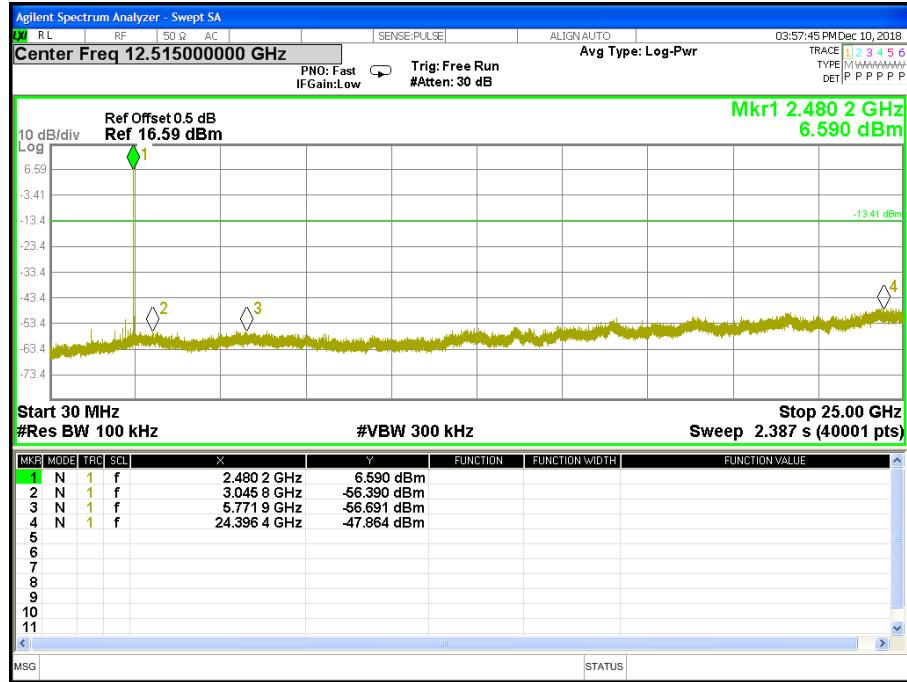




For Band edge

## CH 37

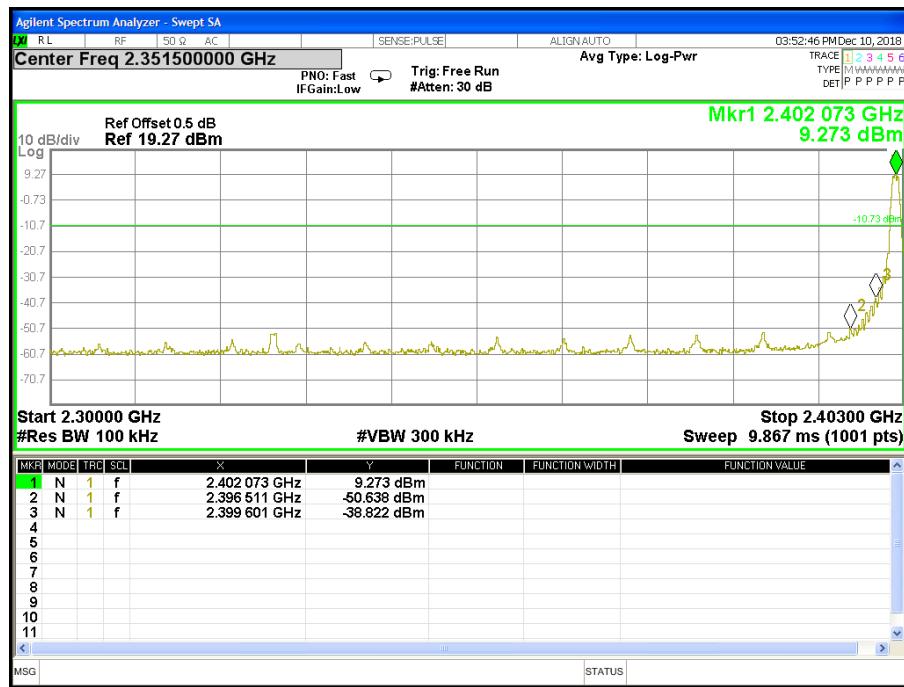

## CH 39

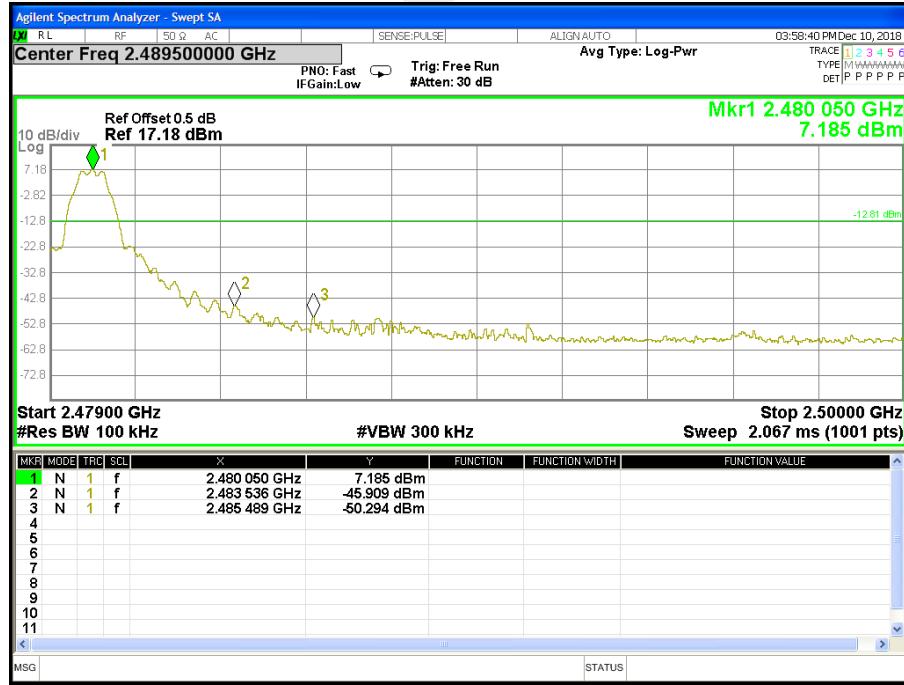



## 6. POWER SPECTRAL DENSITY TEST

### 6.1 LIMIT

FCC Part 15.247, Subpart C RSS-247 Issue 2				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e) RSS-247 Issue 2	Power Spectral Density	$\leq 8 \text{ dBm}$ (RBW $\geq 3 \text{ kHz}$ )	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3 TEST SETUP



### 6.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




## 6.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Voltage:	DC 5V from USB	Test Mode:	TX Mode /CH37, CH17, CH39

Frequency	Power Density (dBm/3kHz)	Limit (dBm/3KHz)	Result
2402 MHz	-4.028	≤8	PASS
2440 MHz	-4.863	≤8	PASS
2480 MHz	-5.867	≤8	PASS

TX CH37

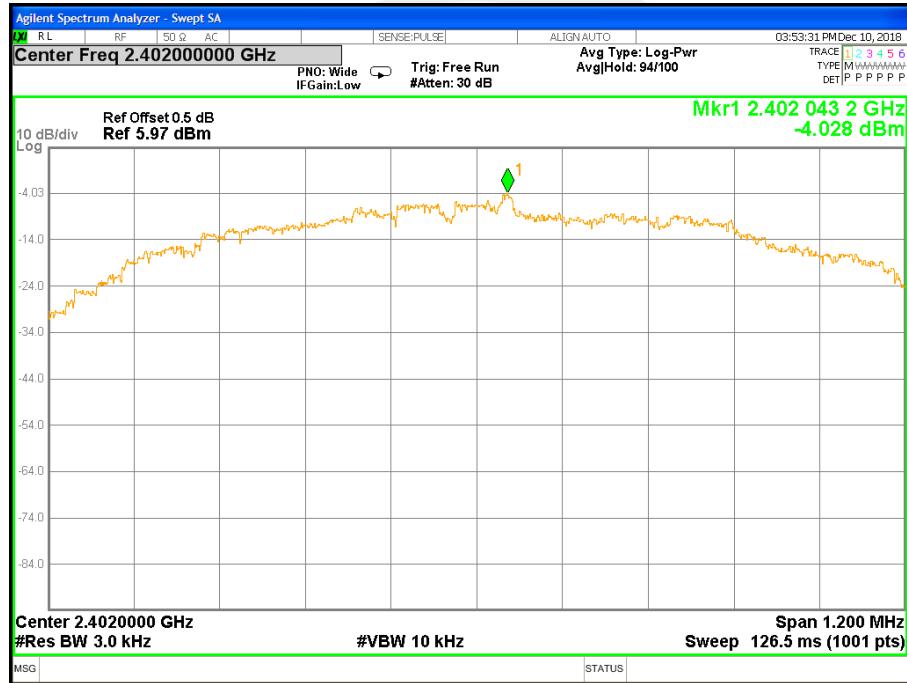




## TX CH17



## TX CH39

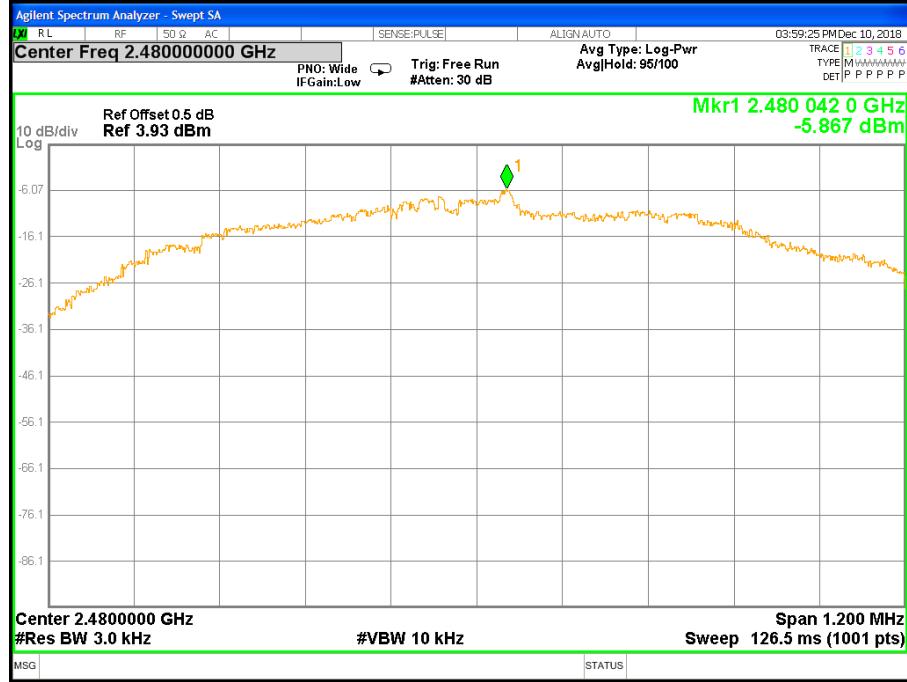



## 7. BANDWIDTH TEST

### 7.1 LIMIT

FCC Part 15.247,Subpart C RSS-Gen Clause 6.7				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	6dB Bandwidth	>= 500KHz	2400-2483.5	PASS
RSS-Gen Clause 6.7	99% Bandwidth	For reporting purposes only.	2400-2483.5	PASS

### 7.2 TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth :100KHz For 99% Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 6dB Bandwidth : $\geq 3 \times$ RBW For 99% Bandwidth : approximately $3 \times$ RBW
Trace	Max hold
Sweep	Auto

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

### 7.3 TEST SETUP



### 7.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




## 7.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Voltage:	DC 5V from USB	Test Mode:	TX Mode /CH37, CH17, CH39

Frequency	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Result
2402 MHz	0.713	1.050	>=500KHz	PASS
2440 MHz	0.719	1.051	>=500KHz	PASS
2480 MHz	0.703	1.050	>=500KHz	PASS


## 6dB Bandwidth

## TX CH 37

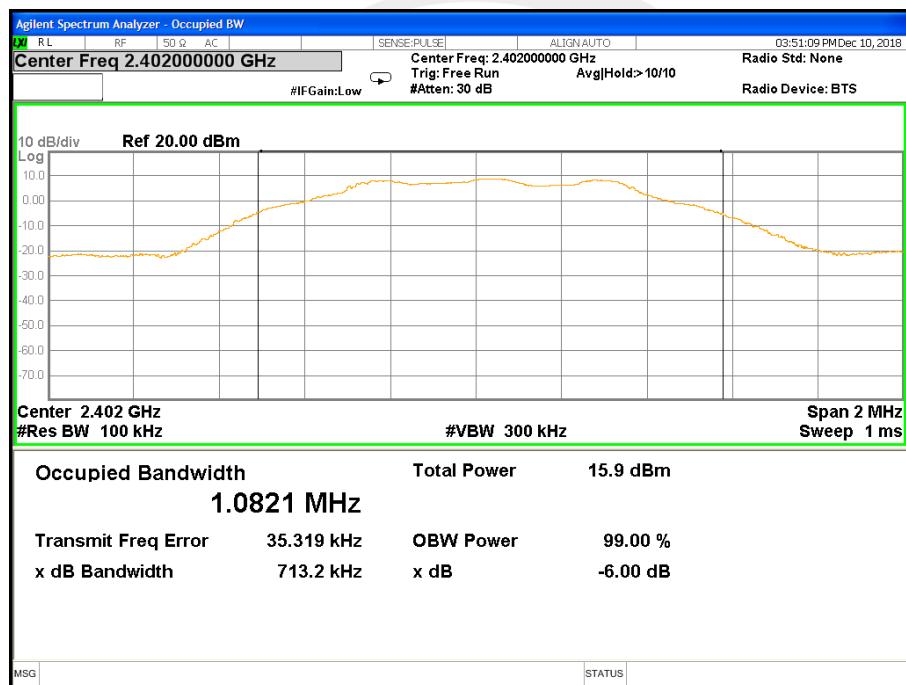






## TX CH 17

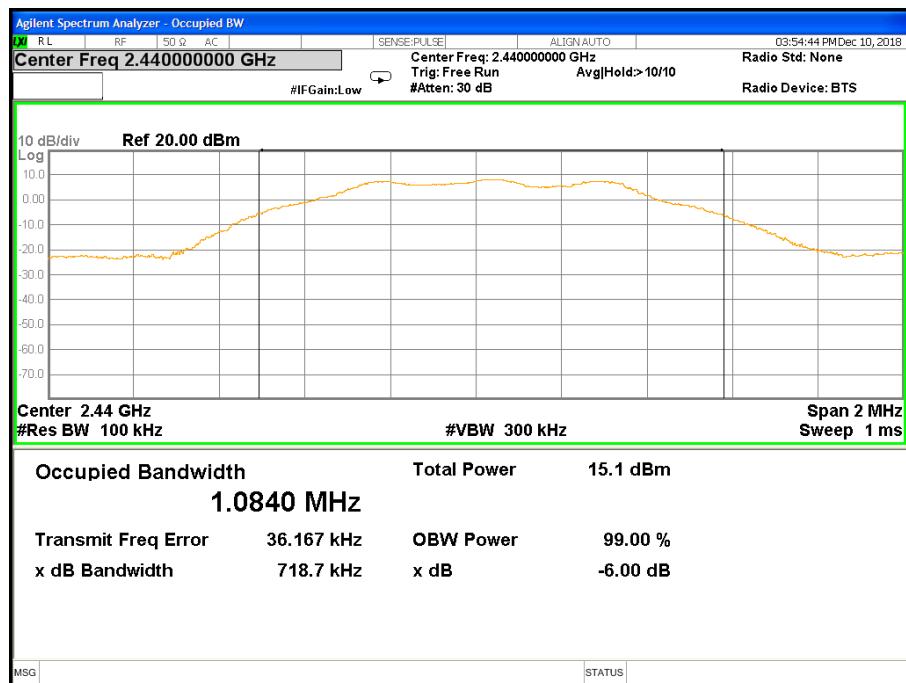


## TX CH 39

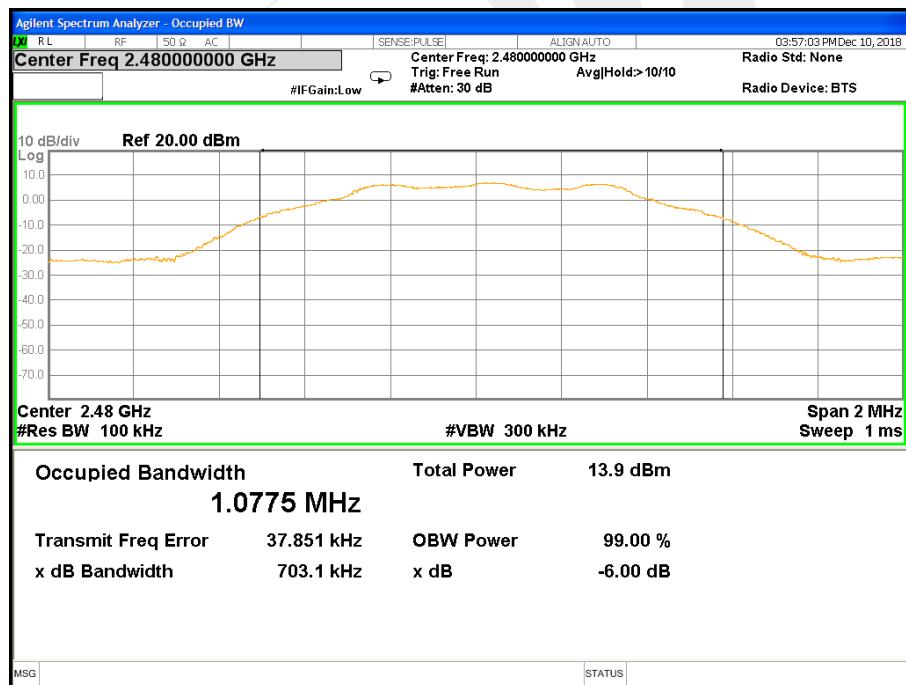

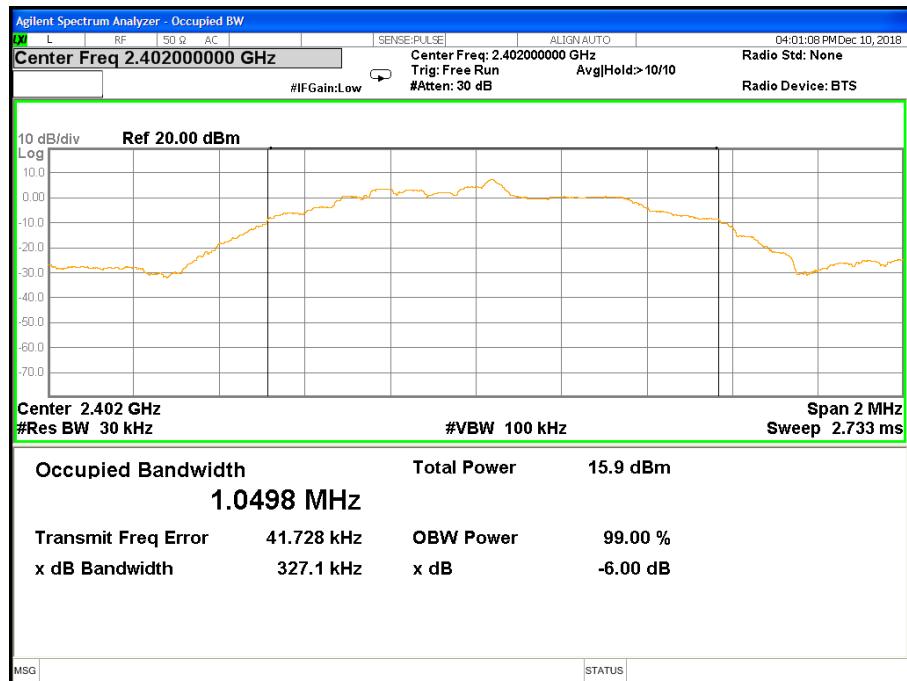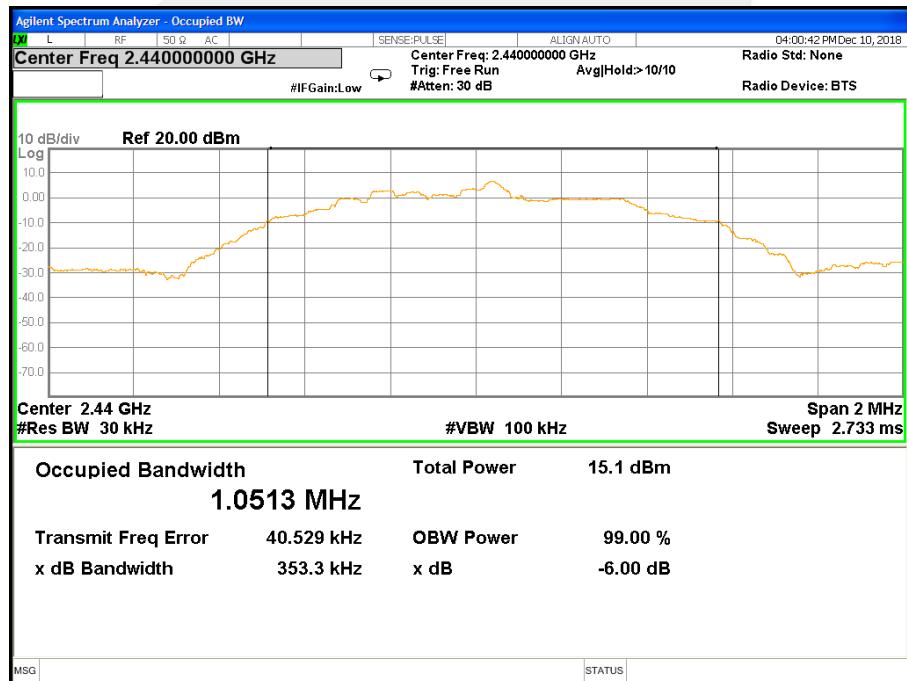**99% Bandwidth****TX CH 37****TX CH 17**



## TX CH 39

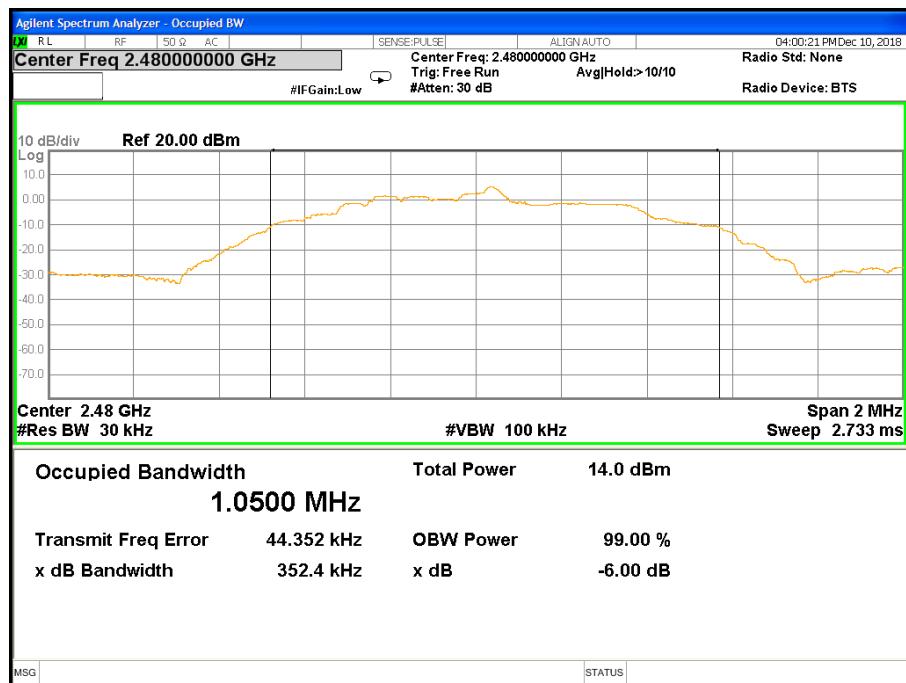



## 8. PEAK OUTPUT POWER TEST

### 8.1 LIMIT

FCC Part 15.247, Subpart C RSS-247 Issue 2				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS 247 Issue 2	Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the Power Sensor&PC

### 8.3 TEST SETUP



### 8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



## 8.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Voltage:	DC 5V from USB	Test Mode:	TX Mode /CH37, CH17, CH39

TX Mode				
Test Channel	Frequency	Conducted Output Power		LIMIT
	(MHz)	Peak (dBm)	AVG (dBm)	dBm
CH37	2402	9.85	8.24	30
CH17	2440	8.64	7.08	30
CH39	2480	7.66	6.05	30



## 9. ANTENNA REQUIREMENT

### 9.1 STANDARD REQUIREMENT

15.203 and RSS-GenIssue 5 requirement: For intentional device, according to 15.203 and RSS-GenIssue 5: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 9.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.





## 10.FREQUENCY STABILITY

### 10.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/-0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees.

### 10.2 TEST PROCEDURE

- 1.The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2.Turn the EUT on and couple its output to spectrum analyzer.
- 3.Turn the EUT off and set the chamber to the highest temperature specified.
- 4.Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2,5, and 10 minutes.
- 5.Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- 6.The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 10.3 TEST RESULT

Channel 17 (2440MHz)

#### Voltage vs. Frequency Stability

Voltage vs. Frequency	Measurement
Stability Voltage(V)	Frequency(MHz)
5.75	2440.0028
5	2440.0018
4.25	2440.0020
Max.Deviation(MHz)	0.0028
Max.Deviation(ppm)	1.15

Rated working voltage:DC 5V

#### Temperature vs. Frequency Stability

Temperature(°C)	Measurement
	Frequency(MHz)
-30	2440.0033
-20	2440.0032
-10	2440.0024
0	2440.0029
10	2440.0027
20	2440.0023
30	2440.0026
40	2440.0024
50	2440.0028
Max.Deviation(MHz)	0.0033
Max.Deviation(ppm)	1.35



## 11. EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*

