



**Solutions**

**FCC 47 CFR PART 15 SUBPART F  
ISED RSS-220 ISSUE 1 + A1**

**TEST REPORT**

**FOR**

**ULTRA-WIDEBAND ANCHOR**

**MODEL NUMBER: HD5310**

**FCC ID: YGP5300-01  
IC: 9016A-HD5300A**

**REPORT NUMBER: R15655515-E3**

**ISSUE DATE: 2025-06-30**

*Prepared for*  
**CROWN EQUIPMENT CORP**  
**44 S WASHINGTON ST**  
**NEW BREMEN, OH, 45869-1247 USA**

*Prepared by*  
**UL LLC**  
**12 LABORATORY DR.**  
**RESEARCH TRIANGLE PARK, NC 27709 USA**  
**TEL: (919) 549-1400**



Revision History

Rev.	Issue Date	Revisions	Revised By
1	2025-05-08	Initial Issue	M. Antola
2	2025-06-13	Misc. editorial updates	M. Antola
3	2025-06-30	Updated measurement uncertainty section	M. Antola

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST RESULTS SUMMARY.....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>5. DECISION RULE AND MEASUREMENT UNCERTAINTY .....</b>	<b>6</b>
5.1. <i>METROLOGICAL TRACEABILITY.....</i>	<i>6</i>
5.2. <i>SAMPLE CALCULATION.....</i>	<i>6</i>
5.3. <i>DECISION RULES .....</i>	<i>6</i>
5.4. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
<b>6. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
6.1. <i>DESCRIPTION OF EUT .....</i>	<i>7</i>
6.2. <i>OPERATING FREQUENCY RANGE.....</i>	<i>7</i>
6.3. <i>MAXIMUM OUTPUT POWER .....</i>	<i>7</i>
6.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>7</i>
6.5. <i>SOFTWARE AND FIRMWARE.....</i>	<i>8</i>
6.6. <i>WORST-CASE CONFIGURATION.....</i>	<i>8</i>
6.7. <i>DESCRIPTION OF TEST SETUP .....</i>	<i>8</i>
<b>7. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>8. LIMITS AND RESULTS.....</b>	<b>12</b>
8.1. <i>99% BANDWIDTH.....</i>	<i>12</i>
8.2. <i>OPERATING BANDWIDTH.....</i>	<i>15</i>
8.3. <i>PEAK POWER &amp; MAXIMUM AVERAGE EMISSIONS .....</i>	<i>19</i>
8.4. <i>RADIATED EMISSIONS AT OR BELOW 960 MHz .....</i>	<i>25</i>
8.4.1. <i>RADIATED EMISSIONS 9 kHz – 30 MHz.....</i>	<i>27</i>
8.4.2. <i>RADIATED EMISSIONS 30 – 960 MHz .....</i>	<i>29</i>
8.5. <i>RADIATED EMISSIONS ABOVE 960 MHz .....</i>	<i>31</i>
8.5.1. <i>RADIATED EMISSIONS 1164 - 1240 MHz &amp; 1559 - 1610 MHz.....</i>	<i>33</i>
8.5.2. <i>RADIATED EMISSIONS 960 MHz – 18 GHz .....</i>	<i>37</i>
8.5.3. <i>RADIATED EMISSIONS 18 – 26.5 GHz .....</i>	<i>41</i>
8.5.4. <i>RADIATED EMISSIONS 26.5 – 40 GHz .....</i>	<i>43</i>
8.6. <i>AC POWER LINE CONDUCTED EMISSIONS .....</i>	<i>45</i>
<b>9. SETUP PHOTOS.....</b>	<b>48</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** CROWN EQUIPMENT CORP  
44 S WASHINGTON ST  
BERMEN, OH, 45869-1247 USA

**EUT DESCRIPTION:** ULTRA-WIDEBAND ANCHOR

**MODEL:** HD5310

**SERIAL NUMBER:** Non-serialized product unit

**DATE TESTED:** 2025-02-06 to 2025-04-02

**SAMPLE RECEIPT DATE:** 2025-02-04 to 2025-03-25

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart F	Refer to Section 2
ISED RSS-220 Issue 1 + A1	Refer to Section 2
ISED RSS-GEN Issue 5 + A1 + A2	Refer to Section 2

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document.

Approved & Released For  
UL LLC By:



Prepared By:



---

Jeff Moser  
Operations Manager  
CONSUMER TECHNOLOGY DIVISION  
UL LLC

---

Mike Antola  
Sr. Staff Engineer  
CONSUMER TECHNOLOGY DIVISION  
UL LLC

## 2. TEST RESULTS SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer. Below is a list of the data provided by the customer:

- Antenna gain and type (see section 5.4)

FCC Clause	ISED Clause	Requirement	Results	Comment
-	RSS-Gen Section 6.7	99% OBW	Reporting purposes only	ANSI C63.10 Section 6.9.4
15.503 & 15.517 (b)	RSS-220 Section 5.1 (a)	-10 dB Bandwidth	Complies	ANSI C63.10 Section 10.1
15.517 (c) (e)	RSS-220 Section 5.2.1 (d) (g)	Pk and Max Av Emissions	Complies	ANSI C63.10 Section 10.3
15.517 (c) & 15.209	RSS-220 Section 3.4 & 5.2.1 (c)	Emissions Below 960 MHz	Complies	ANSI C63.10 Section 10.2
15.517 (c) (d)	RSS-220 Section 5.2.1 (d) (e)	Emissions Above 960 MHz	Complies	ANSI C63.10 Section 10.3
15.207 (a)	RSS-Gen Section 8.8	AC Line Conducted Emissions	Complies	ANSI C63.10 Section 6.2

## 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2020, KDB 393764 D01, RSS-GEN Issue 5 + A1 + A2, and RSS-220 Issue 1 + A1.

## 4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, Certificate Number 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 2800 Suite Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

## 5. DECISION RULE AND MEASUREMENT UNCERTAINTY

### 5.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. SAMPLE CALCULATION

#### RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{EIRP (dBm)} &= \text{Meter Reading (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \\ &\quad \text{Preamp Gain (dB)} + \text{dBm-to-dBm Unit Conversion Factor @ 3m (dB)} \\ -60 \text{ dBm} + 28 \text{ dB/m} + 2 \text{ dB} - 30 \text{ dB} + 11.8 &= -48.2 \text{ dBm} \end{aligned}$$

#### MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Final Voltage (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \text{LISN Insertion Loss.} \\ 36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} &= 46.6 \text{ dBuV} \end{aligned}$$

### 5.3. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

### 5.4. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emissions, All ranges	6.3 dB*
Conducted Emissions, Mains	3.4 dB

\*-A 0.3dB correction has been added to this uncertainty value to account for spectrum analyzer temperature deviations.

Uncertainty figures are valid to a confidence level of 95%.

## 6. EQUIPMENT UNDER TEST

### 6.1. DESCRIPTION OF EUT

The Anchor utilizes UWB technology to determine the presence of RAM devices located on forklifts. Anchor devices are intended for indoor use only and are permanently mounted in a warehouse environment for the purpose of tracking the location of forklifts. The UWB transceiver allows for 10cm accuracy. The Anchor is powered and communicates via an ethernet connection to an external server for location processing.

The system consists of single RF board containing two (2) unique UWB transceiver chipsets. Only one transceiver is permitted to transmit at a time and each chipset shares the same antenna. Transceiver part number DW1000 is used to cover channels 3 and 5 and transceiver QM33 covers channel 5 and 9.

### 6.2. OPERATING FREQUENCY RANGE

The UWB radio operates at the following channels, bandwidths:

Channel	Center Frequency	Bandwidth	Frequency range	Region
3	4492.8 MHz	499.2 MHz	4243.2 ~ 4742.4 MHz	US only
5	6489.6 MHz	499.2 MHz	6240 ~ 6739.2 MHz	US, Canada
9	7987.2 MHz	499.2 MHz	7737.6 ~ 8236.8 MHz	US, Canada

### 6.3. MAXIMUM OUTPUT POWER

The UWB transmitter has a maximum radiated average output power as follows:

Transceiver	Channel	Center Frequency	Average Power (dBm EIRP)
DW1000	3	4492.8 MHz	-41.76
	5	6489.6 MHz	-41.44
QM33	5	6489.6 MHz	-41.99
	9	7987.2 MHz	-41.32

### 6.4. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:

The radio utilizes an integral omnidirectional custom copper PCB antenna, P/N 067843-002, with a maximum gain of 0 dBi.

## 6.5. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was D-856, Rev. A.

## 6.6. WORST-CASE CONFIGURATION

Since the EUT is intended to be mounted from a ceiling, it has only a single installation orientation – pointing down. It is in this orientation that all testing was performed. Each transceiver module is intended to be configured using the following settings. It is these settings that were used during testing and will be implemented in the field:

- PRF = 64
- Preamble Code = 9
- Preamble Length = 64
- Data Rate = 6810
- PHR Rate Bit = Locked
- PHR Rate Value = 850
- Std SFD = Non-Std 8
- Std PHR = False
- Packet Length 127

## 6.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number
Power-over-Ethernet Module	BVSecurity	POE-I100G-LITE	202211POEI100GL0966
Laptop	Dell	Latitude E6540	JMYWH12

### I/O CABLES

Cable No.	Port	# of Identical Ports	Connector Type	Cable Length	Remarks
1	Ethernet	2	RJ-45	> 3M	Power & communication
2	USB	1	USB	< 3M	Not typically an available port. Used for test purposes only

### **TEST SETUP**

The EUT is a stand-alone device. Test software exercised the radio transceivers.

### **SETUP DIAGRAM FOR TESTS**

Refer to R15655515-EP1 for setup diagram.

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

### Test Equipment Used - Morrisville Radiated Emissions – Chamber 1

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
<b>0.009-30MHz</b>					
135144	Active Loop Antenna	ETS-Lindgren	6502	2024-10-02	2025-10-02
<b>30-1000 MHz</b>					
90629	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2024-01-30	2026-01-30
<b>1-18 GHz</b>					
135143	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2024-02-07	2026-02-07
<b>Gain-Loss Chains</b>					
91974	Gain-loss string: 0.009-30MHz	Various	Various	2024-05-08	2025-05-08
91976	Gain-loss string: 25-1000MHz	Various	Various	2024-05-08	2025-05-08
91979	Gain-loss string: 1-18GHz	Various	Various	2024-05-08	2025-05-08
<b>Receiver &amp; Software</b>					
206496	Spectrum Analyzer	Rohde & Schwarz	ESW44	2024-08-29	2025-08-29
214284	Spectrum Analyzer	Rohde & Schwarz	FSW50	2024-02-04	2025-02-28
214284	Spectrum Analyzer	Rohde & Schwarz	FSW50	2025-03-14	2026-03-14
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
<b>Additional Equipment used</b>					
241205	Environmental Meter	Fisher Scientific	15-077-963	2023-09-05	2025-09-05
261056	9GHz High Pass Filter	RF-Lambda	RHPF23G09G18	2025-04-01	2026-04-01

Note: All equipment was in calibration at the time of test

Test Equipment Used - Morrisville mmWave – Chamber 3

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	<b>18-40 GHz</b>				
204907	Horn Antenna, 18-26.5GHz	Com Power	AH-826	2024-02-14	2025-02-28
204908	Horn Antenna, 26.5-40GHz	Com Power	AH-640	2024-02-14	2025-02-28
240019	18-40GHz Amplifier	Amplical	AMP18G40-50	2024-03-05	2025-03-31
	<b>Receiver &amp; Software</b>				
206459	Spectrum Analyzer	Rohde & Schwarz	FSW50	2024-12-23	2025-12-23
mmWave	mmWave Software	UL	V2022.7.29		
	<b>Additional Equipment used</b>				
239539	Environmental Meter	Fisher Scientific	15-077-963	2023-07-19	2025-07-19

Test Equipment Used - Morrisville Conducted Emissions – Conducted 1

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
70374	EMI Test Receiver	Rohde & Schwarz	ESCI7	2024-07-30	2025-07-30
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2024-04-04	2025-04-04
179892	Environmental Meter	Fisher Scientific	15-077-963	2024-08-12	2025-08-12
80391	LISN, 50-ohm/50-uH, 250uH 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50/250-25-2-01	2024-08-01	2025-08-01
52859	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2024-04-04	2025-04-04
236852	CW-AC Power Source	Ametek	CW2501	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		

Note: All equipment was in calibration at the time of test

## 8. LIMITS AND RESULTS

### 8.1. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE


ANSI C63.10 Section 6.9.3


All measurements are made via radiated method. The RBW is in the range of 1% to 5% of the occupied bandwidth. The VBW is set to  $\geq 3 \times \text{RBW}$ . The sweep time is coupled.

#### RESULTS

Employee IDs: 11322  
Location: Chamber 1  
Test Date: 2025-02-18

<u>Transceiver</u>	<u>Channel</u>	<u>Center Frequency</u>	<u>99% Bandwidth</u>
DW1000	3	4492.8 MHz	681.568 MHz
	5	6489.6 MHz	759.955 MHz
QM33	5	6489.6 MHz	681.699 MHz
	9	7987.2 MHz	623.121 MHz

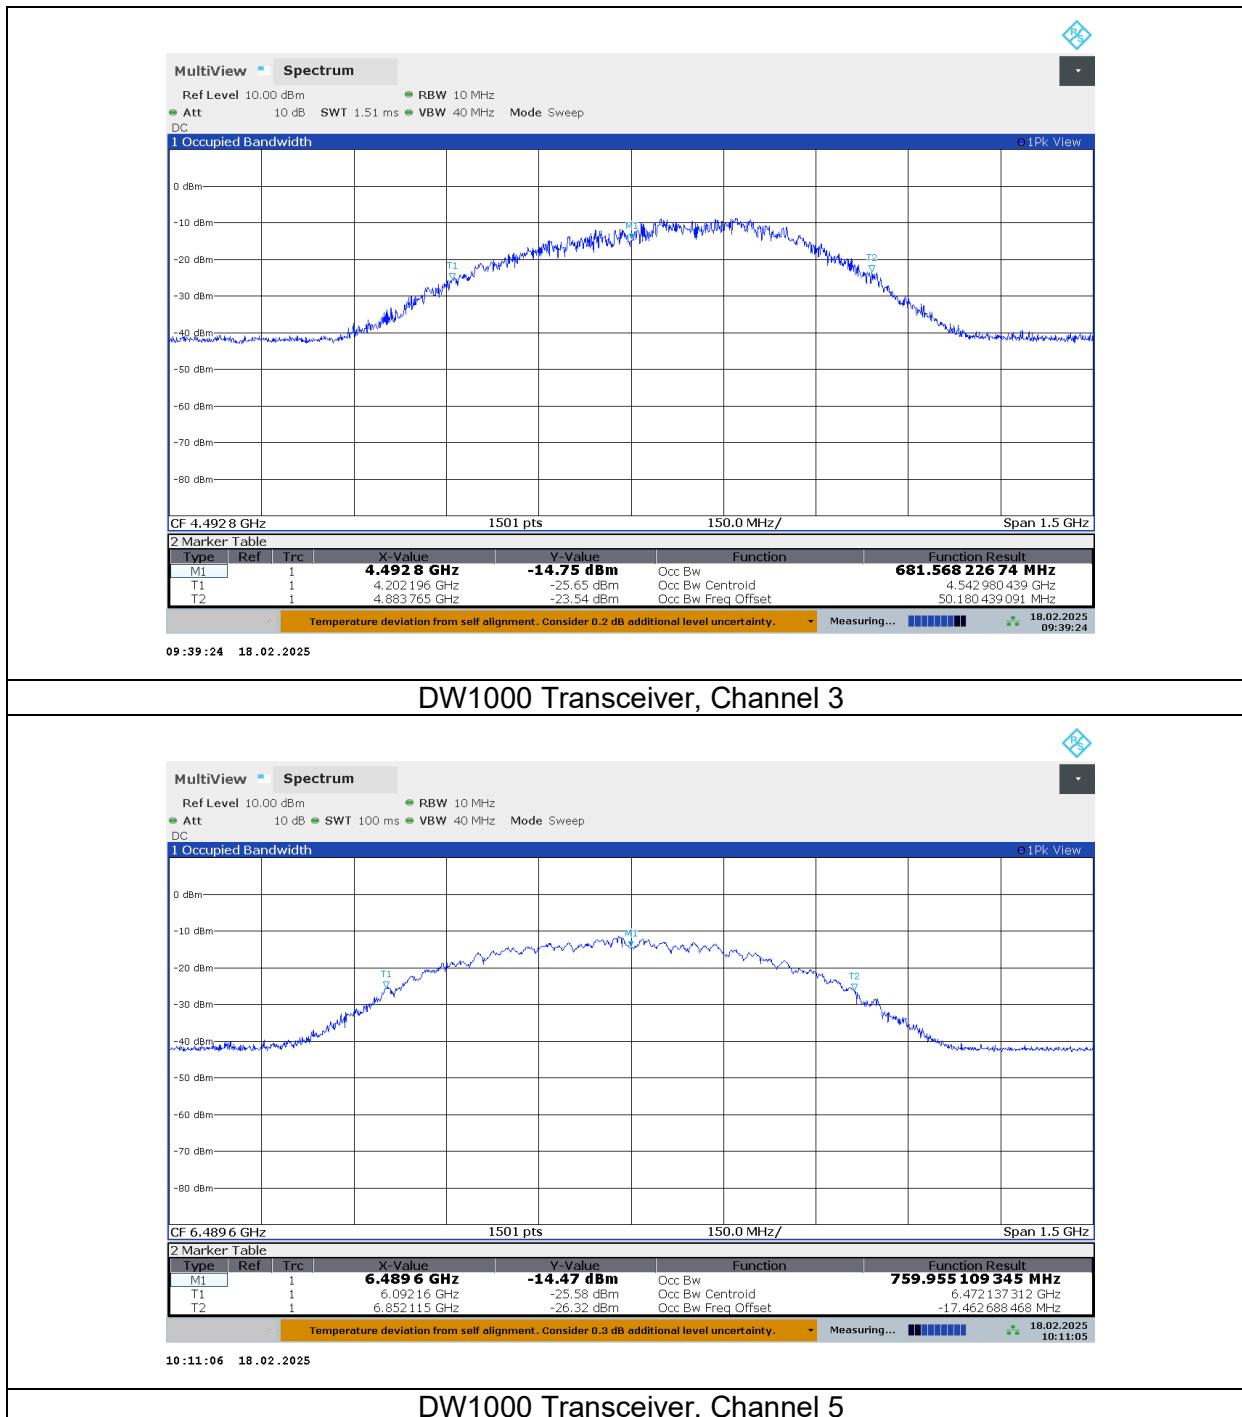

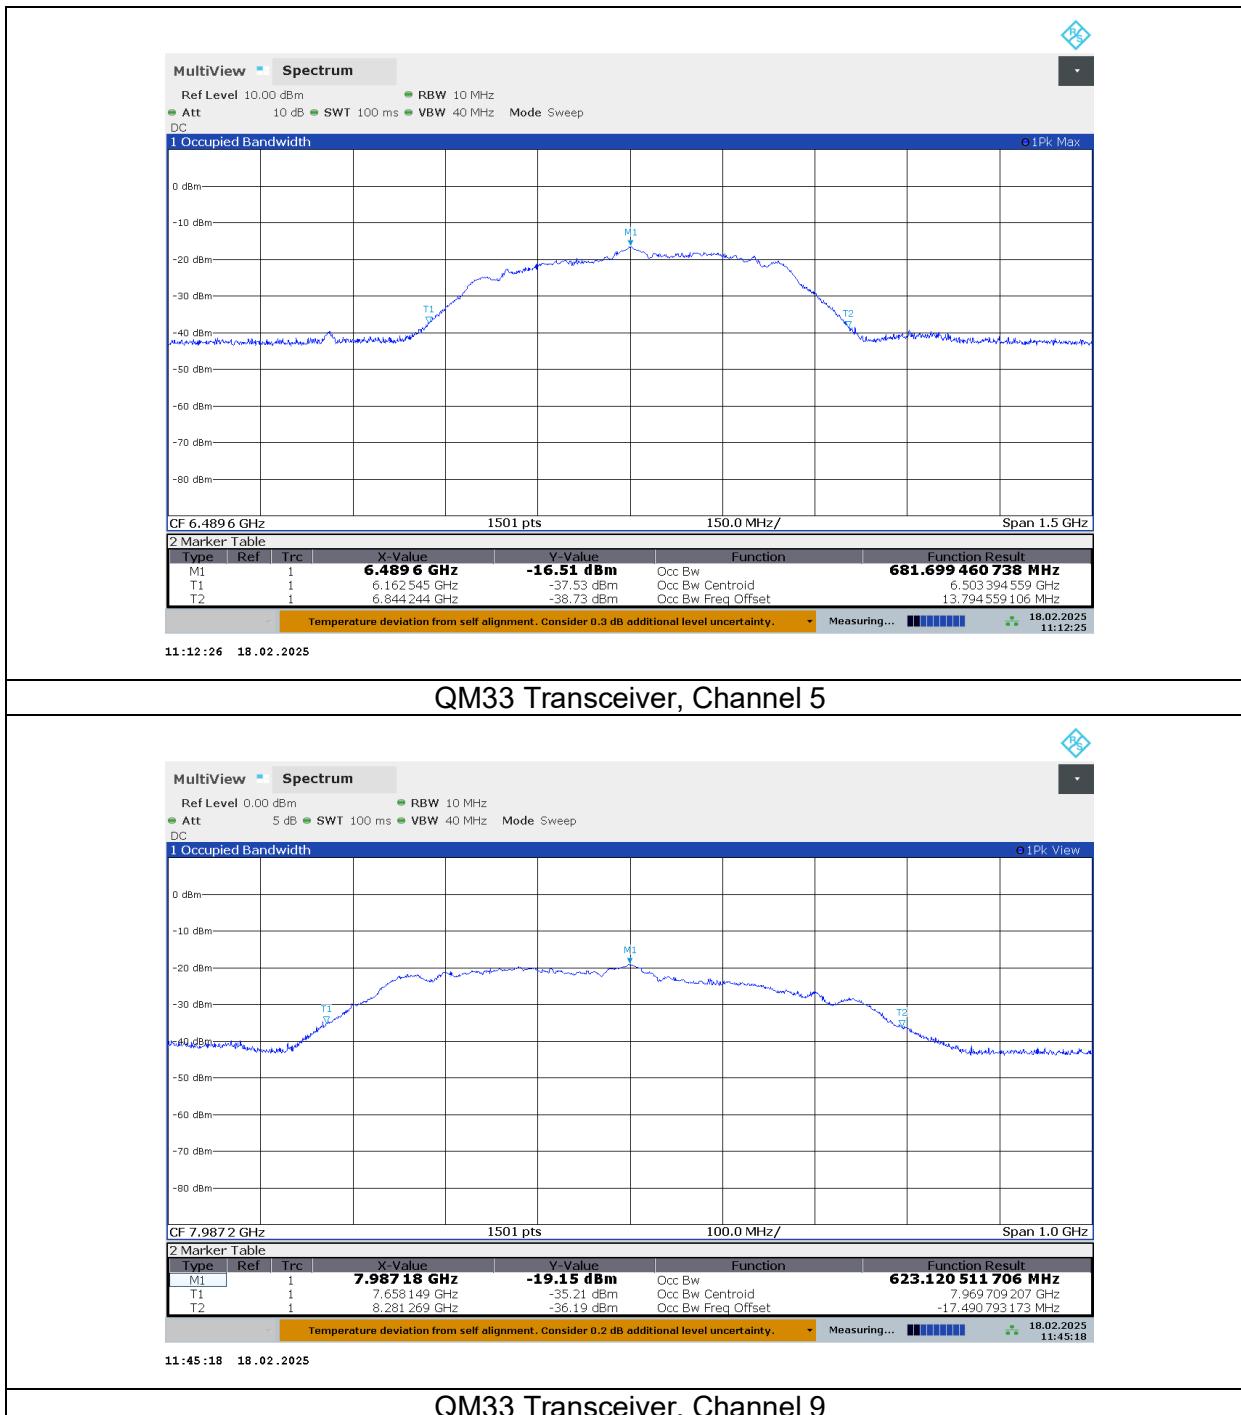

## 8.2. OPERATING BANDWIDTH

### LIMITS

#### FCC

§15.503 (a) *UWB Bandwidth*. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated  $f_H$  and the lower boundary is designated  $f_L$ . The frequency at which the highest radiated emission occurs is designated  $f_M$ .

§15.503 (b) *Center frequency*. The center frequency,  $f_C$ , equals  $(f_H + f_L)/2$ .

§15.503 (c) *Fractional bandwidth*. The fractional bandwidth equals  $2(f_H - f_L)/(f_H + f_L)$ .

§15.503 (d) *Ultra-wideband (UWB) transmitter*. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

§15.517 (b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

#### RSS-220

Section 2 A *UWB* device is an intentional radiator that has either a *-10 dB bandwidth* of at least 500 MHz or a *-10 dB fractional bandwidth* greater than 0.2.

Section 5.1 (a) The -10 dB bandwidth of the device shall be totally contained in the band 3.1 – 10.6 GHz.

“-10 dB bandwidth  $B_{-10}$ ” and “-10 dB fractional bandwidth  $\mu_{-10}$ ” are defined as follows:

$$B_{-10} = f_H - f_L$$
$$\mu_{-10} = B_{-10}/f_C$$

where:

$f_M$  is the frequency of maximum UWB transmission;

$f_H$  is the highest frequency at which the power spectral density of the UWB transmission is -10 dB relative to  $f_M$ ;

$f_L$  is the lowest frequency at which the power spectral density of the UWB transmission is -10 dB relative to  $f_M$ ; and

$f_C = (f_H + f_L)/2$  is the centre frequency of the -10 dB bandwidth.

## TEST PROCEDURE

ANSI C63.10 Clause 10.1

RSS-220 Section 2 of the Annex

Radiated measurements are made using the procedures described above. The detection mode is set to peak detection, the sweep time is AUTO, and the Max Hold trace function is utilized.

The frequency at which the maximum EIRP is measured is designated as  $f_M$ . A major graticule line of the plot is adjusted to exactly equal the peak EIRP at  $f_M$ . The spectral envelope at the major graticule line that is 10 dB below the reference graticule is examined to determine the frequency band bounded by the points that are 10 dB below the highest radiated emission. The upper boundary is designated  $f_H$  and the lower boundary is designated  $f_L$ .

The center frequency,  $f_c$ , is calculated as  $(f_H + f_L)/2$ .


The antenna polarization that yields the highest EIRP at  $f_M$  is used to calculate the above parameters.


Calculations are made independently for each channel.

## RESULTS

Employee IDs: 11322  
Location: Chamber 1  
Test Date: 2025-02-18

<u>Transceiver</u>	<u>Channel</u>	<u><math>F_M</math> (GHz)</u>	<u><math>F_L</math> (GHz)</u>	<u><math>F_H</math> (GHz)</u>	<u><math>F_c</math> (GHz)</u>	<u>-10dB BW (MHz)</u>	<u>Min. BW (MHz)</u>	<u>Margin (MHz)</u>
DW1000	3	4.6577	4.2683	4.8274	4.54785	559.1	500	59.1
	5	6.4626	6.1434	6.7633	6.45335	619.9	500	119.9
QM33	5	6.4896	6.2469	6.7646	6.50575	517.7	500	17.7
	9	7.8673	7.6979	8.2182	7.95805	520.3	500	20.3

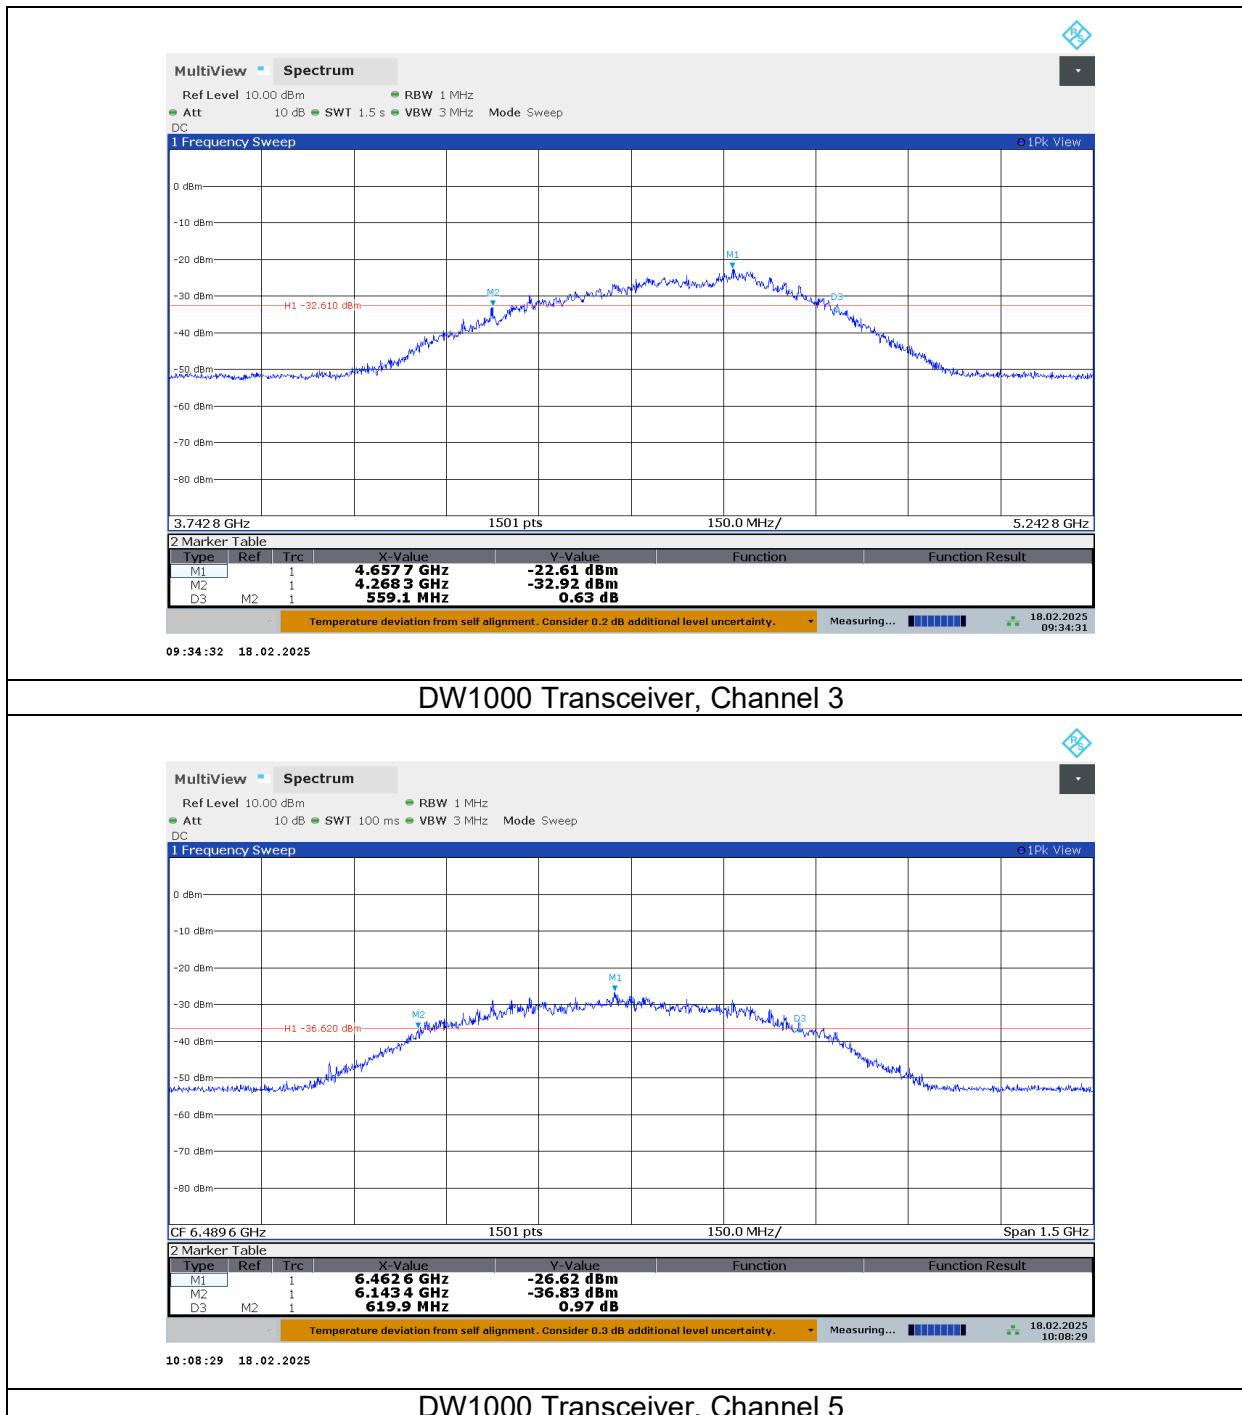

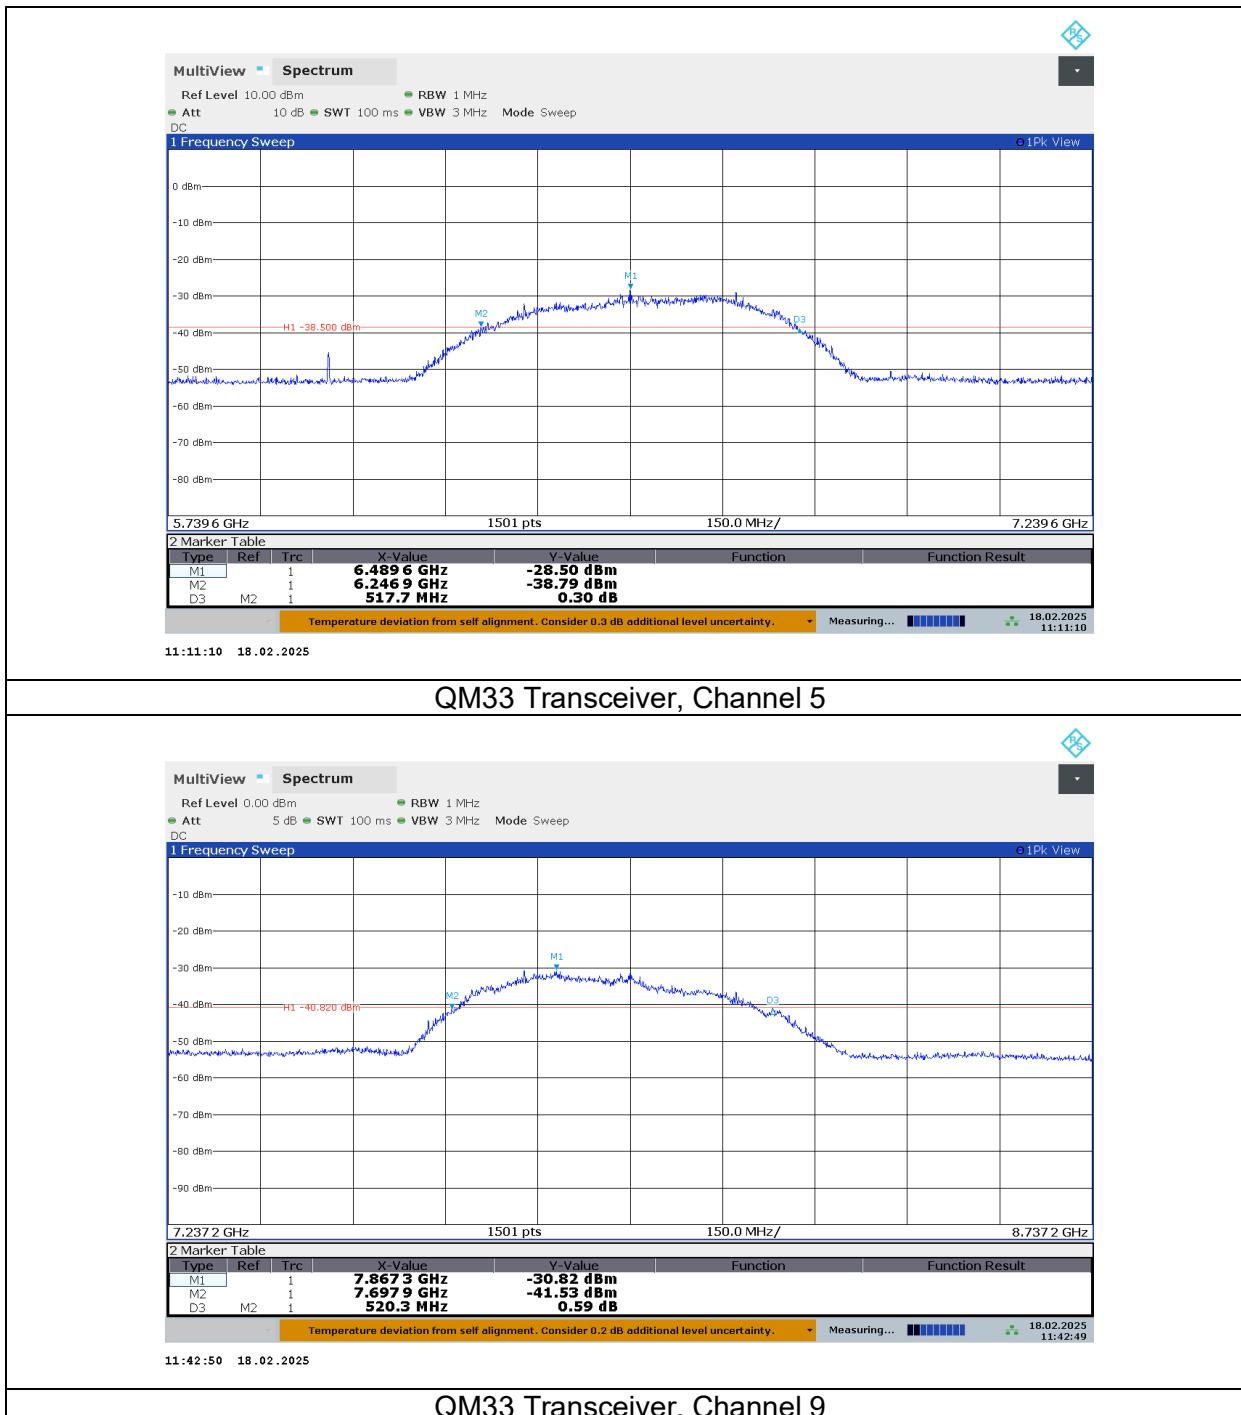

### 8.3. PEAK POWER & MAXIMUM AVERAGE EMISSIONS

#### LIMIT

#### FCC

§15.517 (e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs,  $f_M$ . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in Section 15.521 of this chapter.

§15.517 (c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in § 15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
3100 – 10600	-41.3

#### RSS-220

Annex, Section 4 (c) Peak measurements shall be made in addition to average measurements. Transmissions shall not exceed 0 dBm e.i.r.p. in any 50 MHz bandwidth when the average limit is -41.3 dBm/MHz.

Section 5.2.1 (d) Radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.

Indoor Communication, Measurement, Location Sensing and Tracking Devices	
Frequency	EIRP in Resolution Bandwidth of 1 MHz
4.75 – 10.6 GHz	-41.3 dBm

#### TEST PROCEDURE

ANSI C63.10 Clause 10.3

RSS-220 Annex


Peak EIRP power is measured using an RBW of 50 MHz. Radiated emissions of these in-band measurements are performed at a 3-meter distance.

## RESULTS

Employee IDs: 11322, 23854  
Location: Chamber 1  
Test Date: 2025-03-19 to 2025-03-31

DW1000 Transceiver									
<u>Channel</u>	<u>Antenna Polarity</u>	<u>F<sub>M</sub> (GHz)</u>	<u>Pk Value (dBm)</u>	<u>Pk Limit (dB)</u>	<u>Margin (dB)</u>	<u>F<sub>M</sub> (GHz)</u>	<u>Av Value (dBm)</u>	<u>Av Limit (dB)</u>	<u>Margin (dB)</u>
3	H	4.74	-3.02	0	-3.02	4.66	-46.77	-41.3	-5.47
3	V	4.48	-1.89	0	-1.89	4.64	-41.76	-41.3	-0.46
5	H	6.48	-8.71	0	-8.71	6.39	-49.78	-41.3	-8.48
5	V	6.49	-0.27	0	-0.27	6.52	-41.44	-41.3	-0.14

QM33 Transceiver									
<u>Channel</u>	<u>Antenna Polarity</u>	<u>F<sub>M</sub> (GHz)</u>	<u>Pk Value (dBm)</u>	<u>Pk Limit (dB)</u>	<u>Margin (dB)</u>	<u>F<sub>M</sub> (GHz)</u>	<u>Av Value (dBm)</u>	<u>Av Limit (dB)</u>	<u>Margin (dB)</u>
5	H	6.49	-12.18	0	-12.18	6.59	-51.94	-41.3	-10.64
5	V	6.49	-1.7	0	-1.7	6.39	-41.99	-41.3	-0.69
9	H	7.99	-4.94	0	-4.94	7.91	-45.19	-41.3	-3.89
9	V	7.99	-1.62	0	-1.62	7.89	-41.32	-41.3	-0.02

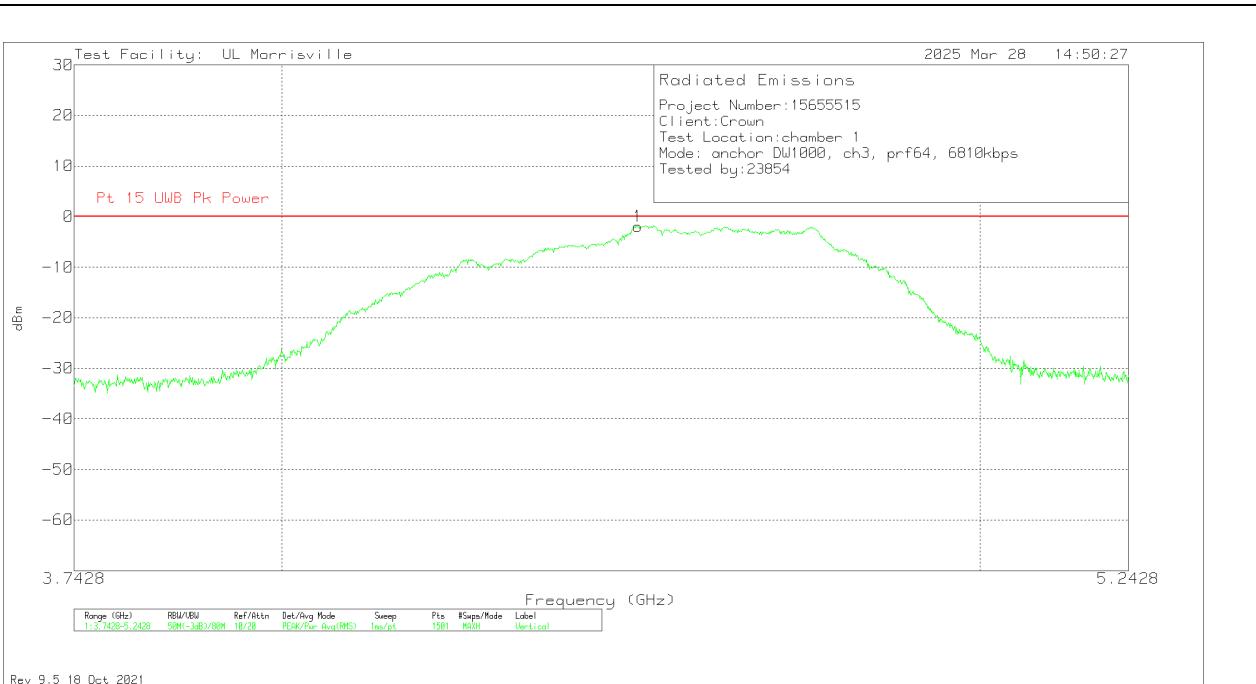

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Conversion factor (dB)	Corrected Reading dBm	Pt 15 UWB Pk Power	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	4.4818	.51	Pk	33.9	-48.1	11.8	-1.89	0	-1.89	310	200	V

Pk - Peak detector


DW1000 Transceiver, Channel 3, Peak



Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Conversion factor (dB)	Corrected Reading dBm	Pt 15 UWB Avg Power	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	4.6438	-39.26	RMS	33.8	-48.1	11.8	-41.76	-41.3	-.46	355	117	V

RMS - RMS detection

DW1000 Transceiver, Channel 3, Average

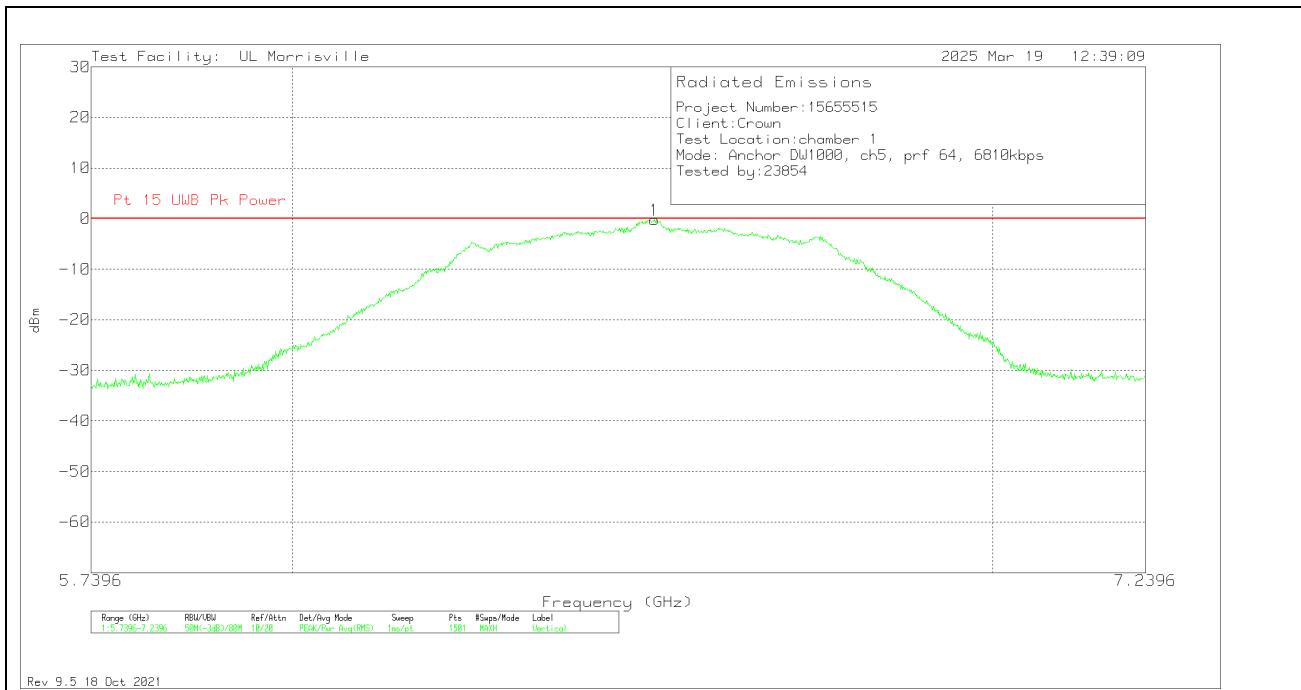

Rev 9.5 18 Oct 2021

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Conversion factor (dB)	Corrected Reading dBm	Pt 15 UWB Pk Power	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.4976	-2.27	Pk	35.6	-45.4	11.8	-0.27	0	-0.27	58	131	V

Pk - Peak detector

### DW1000 Transceiver, Channel 5, Peak




Rev 9.5 18 Oct 2021

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Conversion factor (dB)	Corrected Reading dBm	Pt 15 UWB Avg Power	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.5206	-43.44	RMS	35.6	-45.4	11.8	-41.44	-41.3	-0.14	58	131	V

RMS - RMS detection


### DW1000 Transceiver, Channel 5, Average

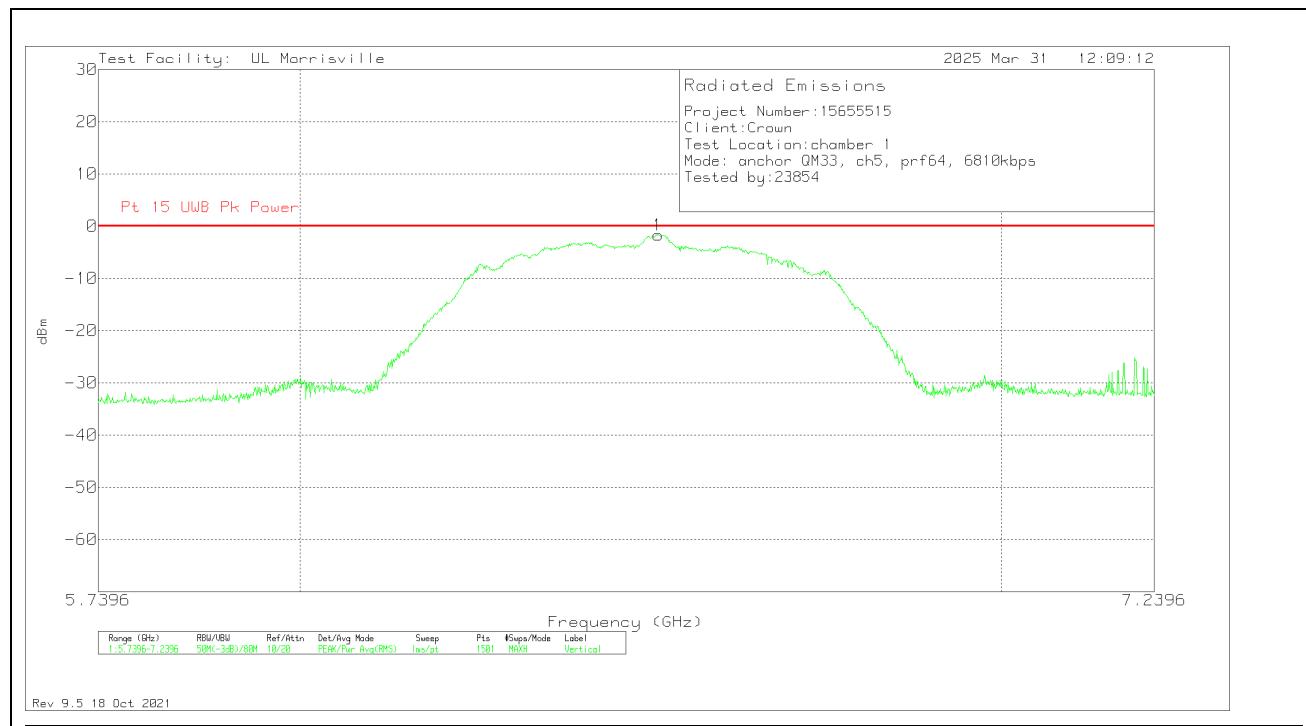

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Conversion factor (dB)	Corrected Reading dBm	Pt 15 UWB Pk Power	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.4916	-3.6	Pk	35.6	-45.5	11.8	-1.7	0	-1.7	83	106	V

Pk - Peak detector


### QM33 Transceiver, Channel 5, Peak

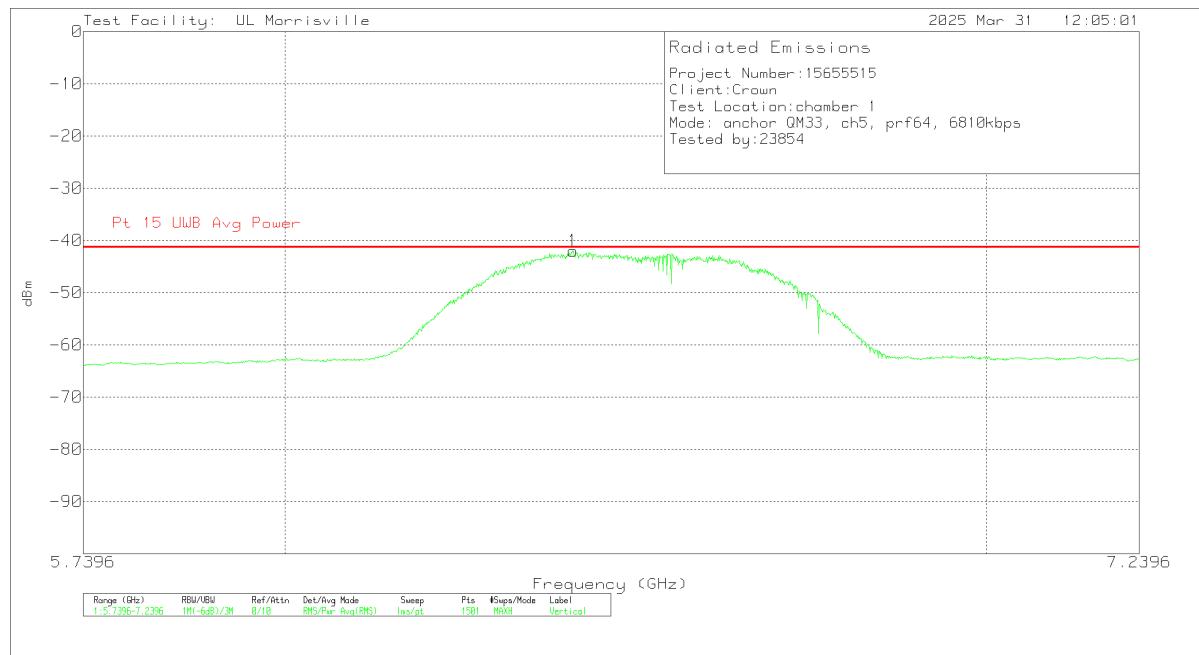

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Conversion factor (dB)	Corrected Reading dBm	Pt 15 UWB Avg Power	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.3926	-44.19	RMS	35.7	-45.3	11.8	-41.99	-41.3	-.69	83	106	V

RMS - RMS detection

### QM33 Transceiver, Channel 5, Average

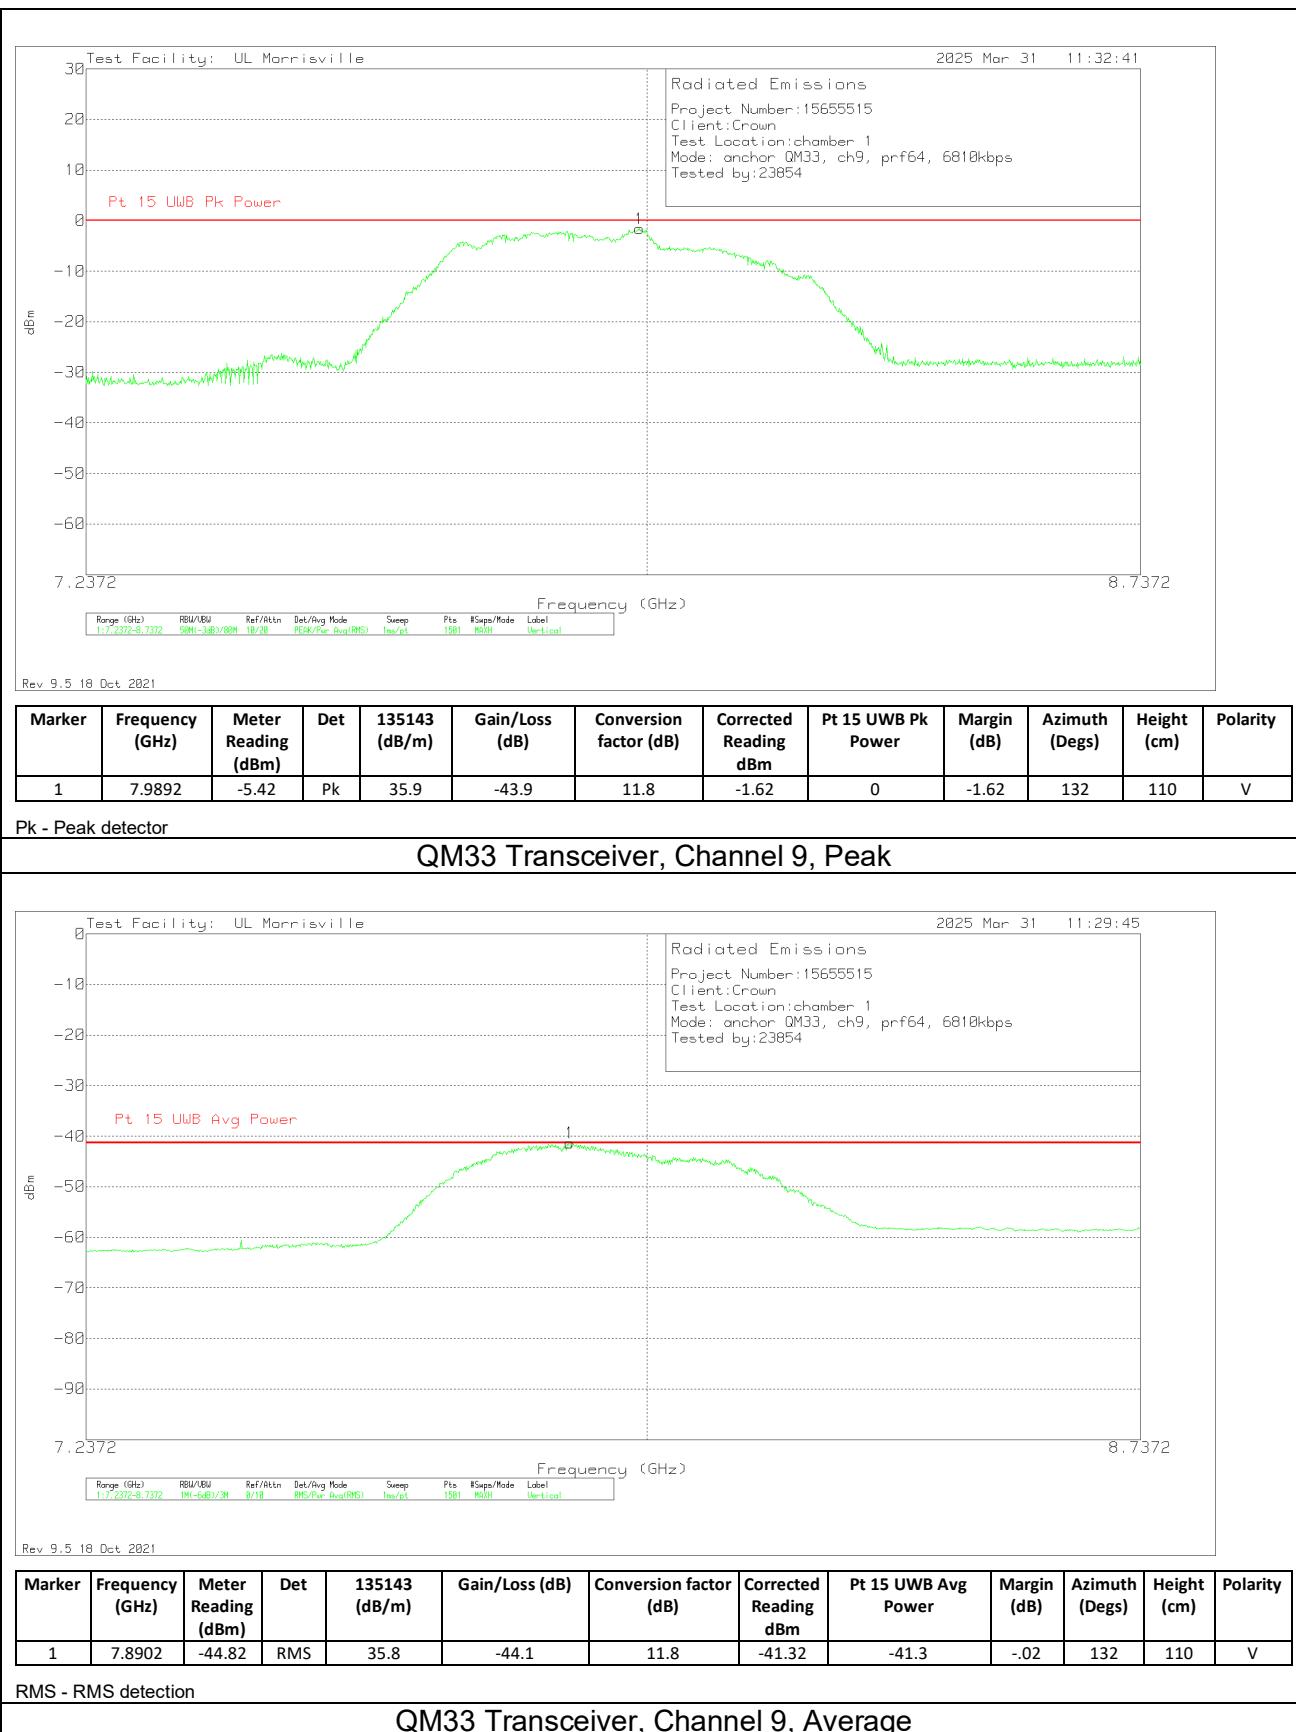

## 8.4. RADIATED EMISSIONS AT OR BELOW 960 MHz

### LIMITS

### FCC

§15.517 (c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209 of this chapter.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

### RSS-220

Section 3.4 Radiated emissions at or below 960 MHz for all subclauses of UWB device shall not exceed the following limits. Measurements of radiated emissions at and below 960 MHz are to be made using a CISPR quasi-peak detector. CISPR measurement bandwidth specifications are to be used.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)	E.i.r.p. (dBmW)
0.009-0.490	2400/F (F in kHz)	300	10 log (17.28 / F <sup>2</sup> ) (F in kHz)
0.490-1.705	24000/F (F in kHz)	30	10 log (17.28 / F <sup>2</sup> ) (F in kHz)
1.705-30.0	30	30	-45.7
30-88	100	3	-55.2
88-216	150	3	-51.7
216-960	200	3	-49.2

Note: The emission limits for the bands 9-90kHz and 110-490kHz are based on measurements employing an average detector.

## **TEST PROCEDURE**

ANSI C63.10 Clause 10.2

RSS-220 Annex

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables, at a maximum distance of 3m from the EUT.

For below 30 MHz testing, investigation was done on three antenna orientations: RX antenna Face-on, Face-off and horizontal (parallel to ground).

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 meter open area test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

A final test is made at any frequencies at which emissions are found. During this final scan, the antenna is kept no further from the EUT than the maximum distance calculated for each band that yields a minimum system noise floor.

Testing was performed on both transceivers only that the channel that yielded the highest power as worst-case. This was found to be:


DW1000 Transceiver: Channel 5

QM33 Transceiver: Channel 9

## **RESULTS**

Employee IDs: 23854  
Location: Chamber 1  
Test Date: 2025-04-02


### 8.4.1. RADIATED EMISSIONS 9 kHz – 30 MHz

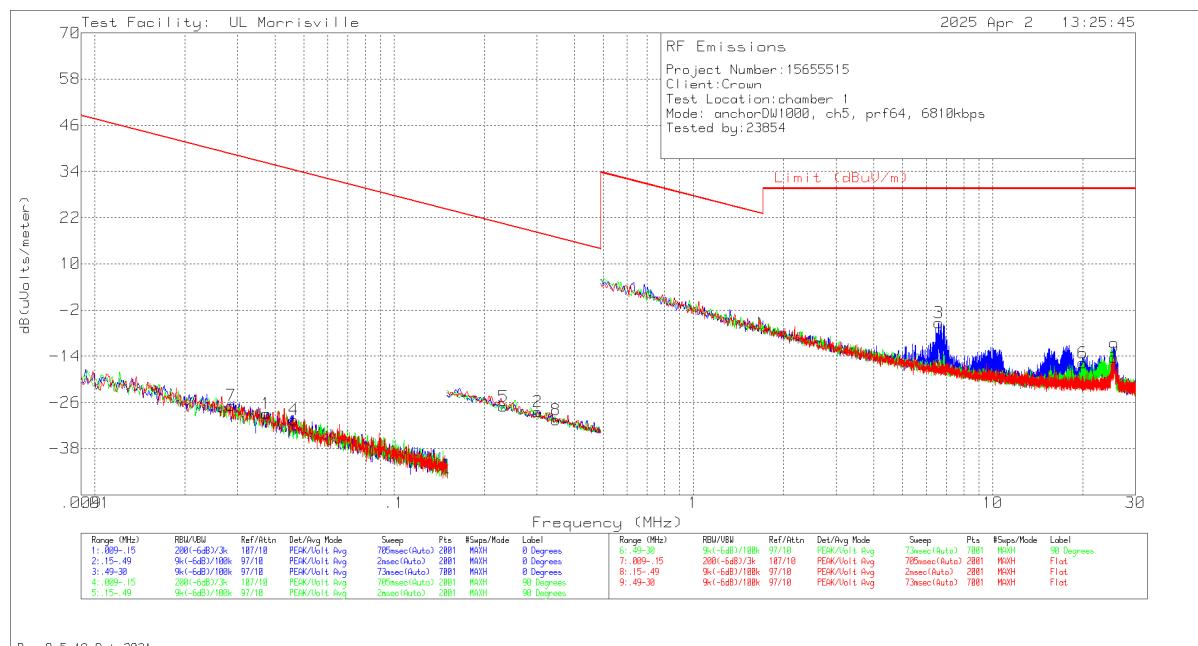

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ANT (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
7	.02853	39.8	Pk	13.3	.1	-80	-26.8	38.5	58.5	-65.3	0-360	Flat
1	.03747	38.57	Pk	12.5	.1	-80	-28.83	36.13	56.13	-64.96	0-360	0 degs
4	.0462	37.62	Pk	11.8	.1	-80	-30.48	34.31	54.31	-64.79	0-360	90 degs
5	.23211	41.96	Pk	10.9	.1	-80	-27.04	20.29	40.29	-47.33	0-360	90 degs
2	.30198	40.58	Pk	10.9	.1	-80	-28.42	18	38	-46.42	0-360	0 degs
8	.34729	38.45	Pk	10.9	.1	-80	-30.55	16.79	36.79	-47.34	0-360	Flat
3	6.61585	23.55	Pk	10.7	.4	-40	-5.35	29.54	-	-34.89	0-360	0 degs
6	20.03116	13.37	Pk	10.2	.7	-40	-15.73	29.54	-	-45.27	0-360	90 degs
9	25.44872	15.77	Pk	9.1	.8	-40	-14.33	29.54	-	-43.87	0-360	Flat

Pk - Peak detector

DW1000 Transceiver, Channel 5


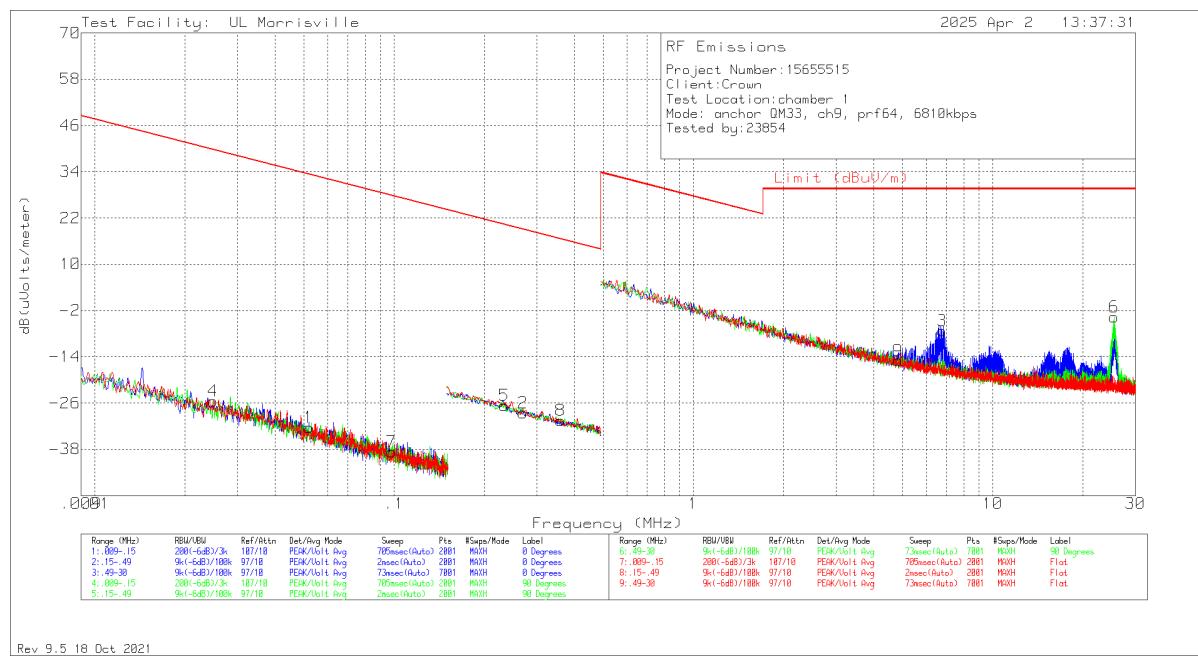


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ANT (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
4	.02483	40.82	Pk	13.6	.1	-80	-25.48	39.7	59.7	-65.18	0-360	90 degs
1	.05181	36.13	Pk	11.5	.1	-80	-32.27	33.32	53.32	-65.59	0-360	0 degs
7	.09796	30.12	Pk	11.1	.1	-80	-38.68	27.78	47.78	-66.46	0-360	Flat
5	.23373	42.35	Pk	10.9	.1	-80	-26.65	20.23	40.23	-46.88	0-360	90 degs
2	.26934	40.42	Pk	10.9	.1	-80	-28.58	19	39	-47.58	0-360	0 degs
8	.35927	38.48	Pk	10.9	.1	-80	-30.52	16.5	36.5	-47.02	0-360	Flat
9	4.82405	13.91	Pk	10.8	.3	-40	-14.99	29.54	-	-44.53	0-360	Flat
3	6.78449	21.63	Pk	10.7	.4	-40	-7.27	29.54	-	-36.81	0-360	0 degs
6	25.46558	26.38	Pk	9.1	.8	-40	-3.72	29.54	-	-33.26	0-360	90 degs

Pk - Peak detector

### QM33 Transceiver, Channel 9

## 8.4.2. RADIATED EMISSIONS 30 – 960 MHz

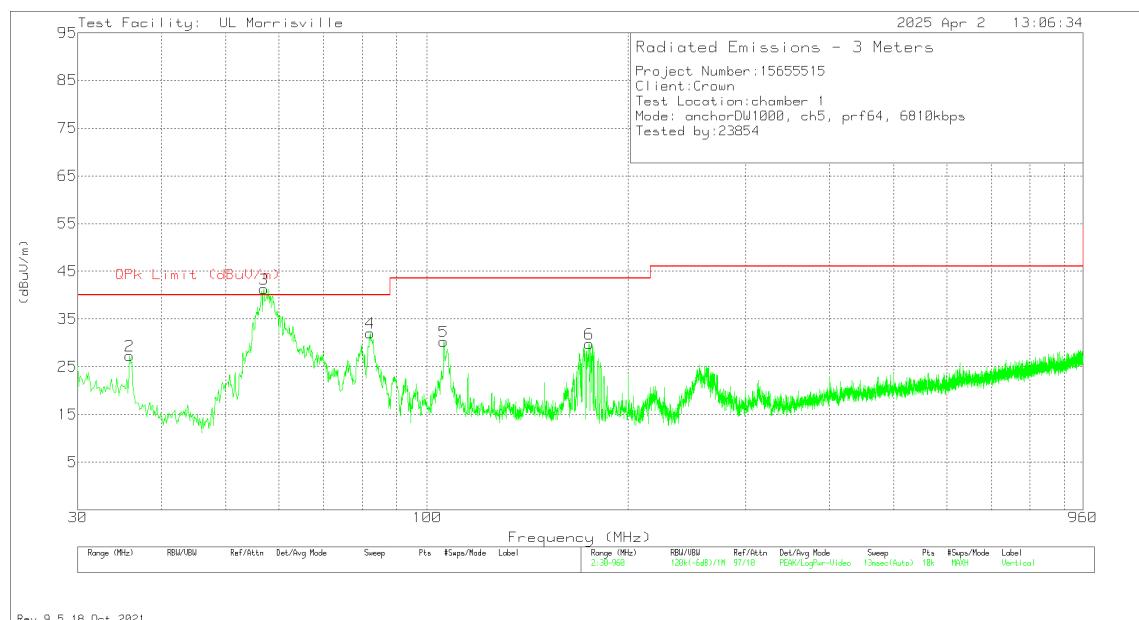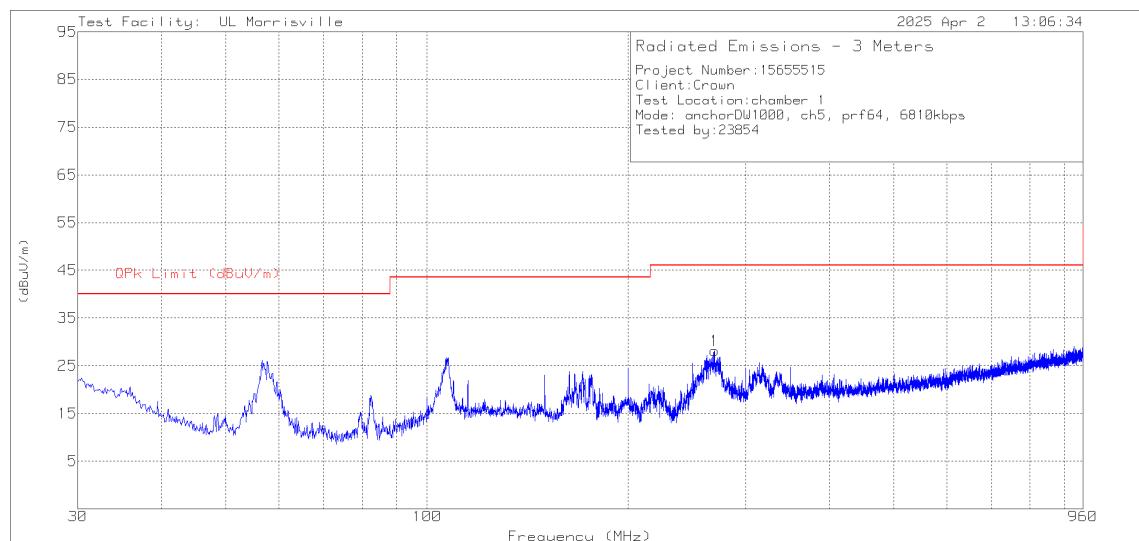


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	90629 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	35.859	35.95	Pk	22.8	-31.5	27.25	40	-12.75	0-360	100	V
3	56.9916	53.92	Qp	13.7	-31.3	36.32	40	-3.68	84	107	V
4	82.266	49.48	Pk	13.7	-31.1	32.08	40	-7.92	0-360	100	V
5	105.981	42.64	Pk	18.2	-30.6	30.24	43.52	-13.28	0-360	100	V
6	174.801	42	Pk	17.8	-30	29.8	43.52	-13.72	0-360	100	V
1	269.661	38.4	Pk	19.2	-29.4	28.2	46.02	-17.82	0-360	100	H


Pk - Peak detector

Qp - Quasi-Peak detector

DW1000 Transceiver, Channel 5

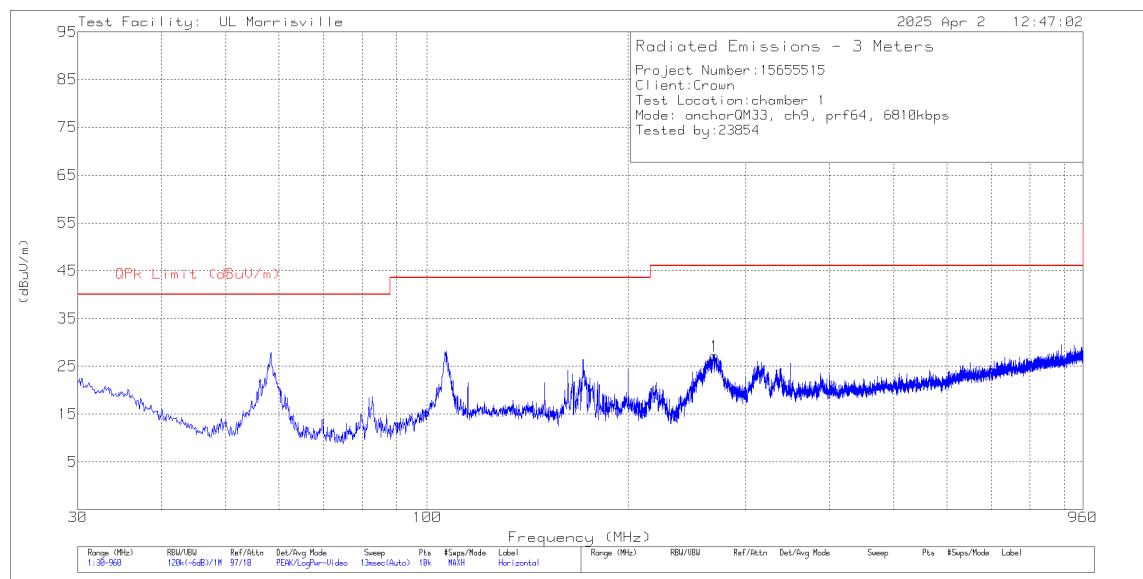

Rev. 9.5 18 Oct 2021

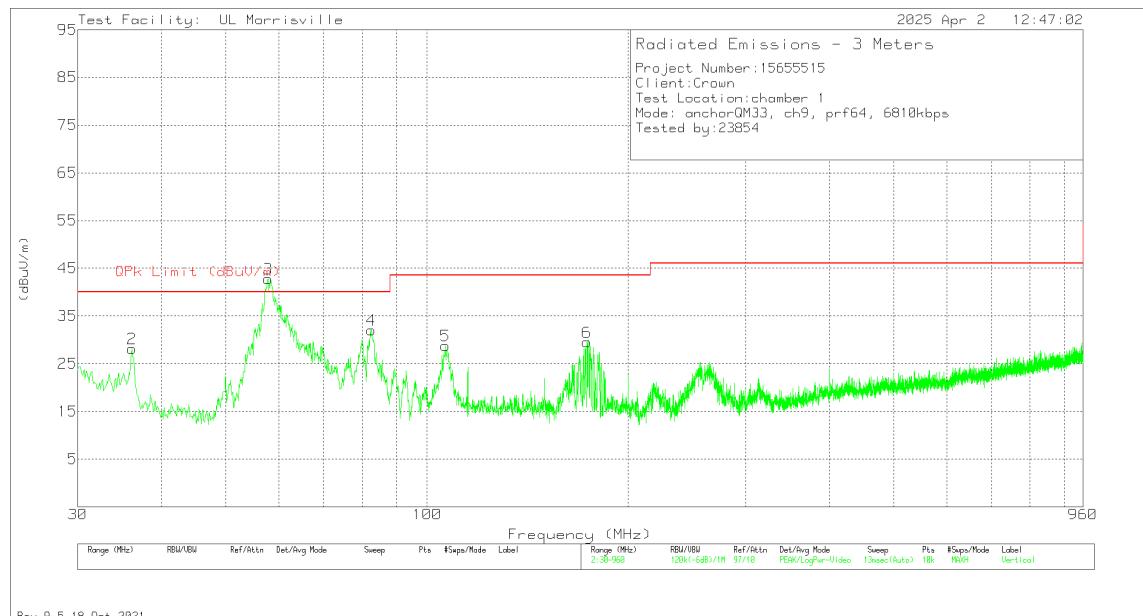

Rev. 9.5 18 Oct 2021

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	90629 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	36.138	37.27	Pk	22.6	-31.7	28.17	40	-11.83	0-360	100	V
3	57.7974	54.36	Qp	13.7	-31.4	36.66	40	-3.34	63	104	V
4	82.545	49.42	Pk	13.7	-31.1	32.02	40	-7.98	0-360	100	V
5	106.539	40.87	Pk	18.3	-30.4	28.77	43.52	-14.75	0-360	100	V
6	173.685	41.99	Pk	17.9	-30.4	29.49	43.52	-14.03	0-360	100	V
1	269.475	37.36	Pk	19.2	-29.4	27.16	46.02	-18.86	0-360	99	H

Pk - Peak detector

Qp - Quasi-Peak detector

### QM33 Transceiver, Channel 9

## 8.5. RADIATED EMISSIONS ABOVE 960 MHz

### LIMITS

#### FCC

§15.517 (c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-53.3
1990-3100	-51.3
3100-10600	-41.3
Above 10600	-51.3

§15.517 (d) In addition to the radiated emission limits specified in the above table, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

#### RSS-220

Section 5.2.1. (d) Radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.

Indoor Communication, Measurement, Location Sensing and Tracking Devices	
Frequency	EIRP in a Resolution Bandwidth of 1 MHz
960-1610 MHz	-75.3 dBm
1.61-4.75 GHz	-70.0 dBm
4.75-10.6 GHz	-41.3 dBm
Above 10.6 GHz	-51.3 dBm

Section 5.2.1. (e) In addition to the limits specified in paragraph (d) of this section, radiated emissions shall not exceed the following average limits when measured using a resolution bandwidth greater than or equal to 1 kHz. The measurements shall demonstrate compliance with the stated limits at whatever resolution bandwidth is used.

Frequency	EIRP in a Resolution Bandwidth of no less than 1 kHz
1164-1240 MHz	-85.3 dBm
1559-1610 MHz	-85.3 dBm

Section 5.2.1. (f) Within the tables in paragraphs (d) and (e) above, the tighter emission limit applies at the band edges.

#### **TEST PROCEDURE**

ANSI C63.10 Clause 10.3

RSS-220 Annex

#### **PROCEDURE FOR 0.96 TO 18 GHz**

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables at a maximum distance of 0.5-meter from the EUT per ANSI C63.10 Section 6.6.4.2. A high pass filter with a pass band frequency beyond 9 GHz was used to suppress the fundamental and perform measurements up to 18 GHz. A RBW of 1MHz and VBW of 3MHz was used for these measurements.

#### **PROCEDURE FOR 1.164 TO 1.240 GHz & 1.559 TO 1.610 GHz**

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables at a maximum distance of 1-meter from the EUT per ANSI C63.10 Section 6.6.4.2. A RBW of 3 kHz and VBW of 10 kHz was used for the pre-scans. A RBW of 3kHz and VBW of 10kHz was used for these measurements.

#### **PROCEDURE FOR 18 TO 40 GHz**

Measurements are made with the antenna feeding a spectrum analyzer via a preamplifier and cables at a maximum distance of 0.5-meters from the EUT per ANSI C63.10 Section 6.6.5.



EIRP values are derived using equations G.7, G.8, G.9 from Annex G of ANSI C63.10. Correction factors are pre-loaded onto the spectrum analyzer.

Distance correction factor from 3-meter to 0.5-meter =  $20 \log (0.5/3) = -15.56\text{dB}$   
Distance correction factor from 3-meter to 1-meter =  $20 \log (1/3) = -9.5\text{dB}$

#### **RESULTS**

Employee IDs: 23854, 11322  
Location: Chamber 1, 3  
Test Date: 2025-02-25 to 2025-04-10



### 8.5.1. RADIATED EMISSIONS 1164 - 1240 MHz & 1559 - 1610 MHz

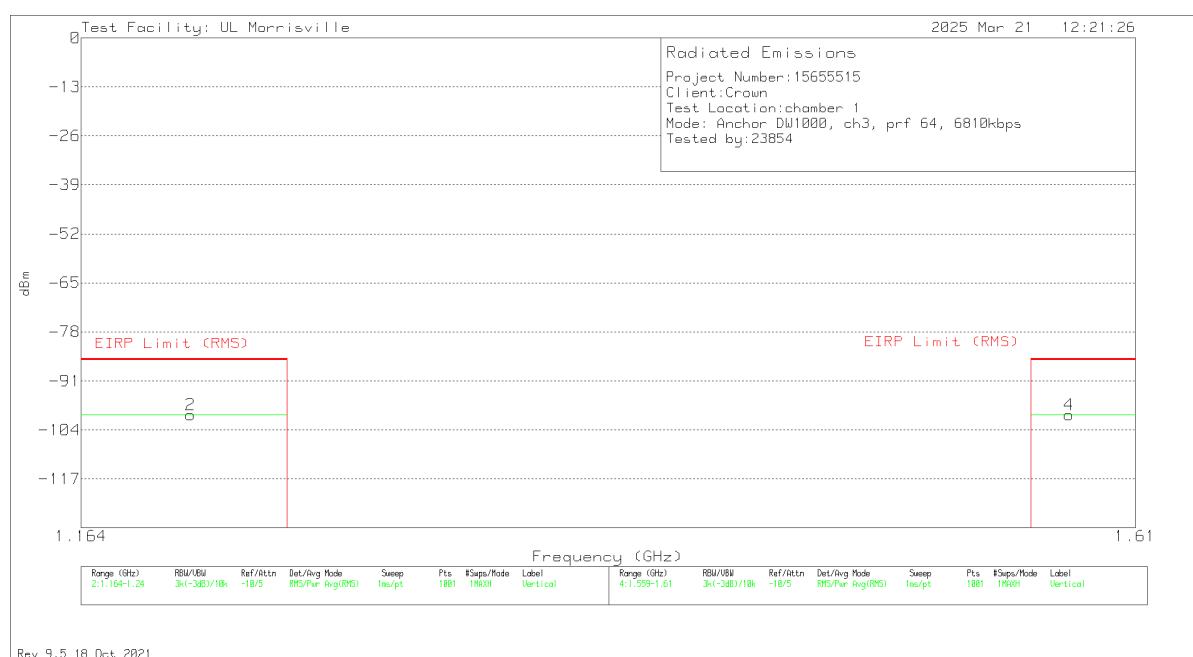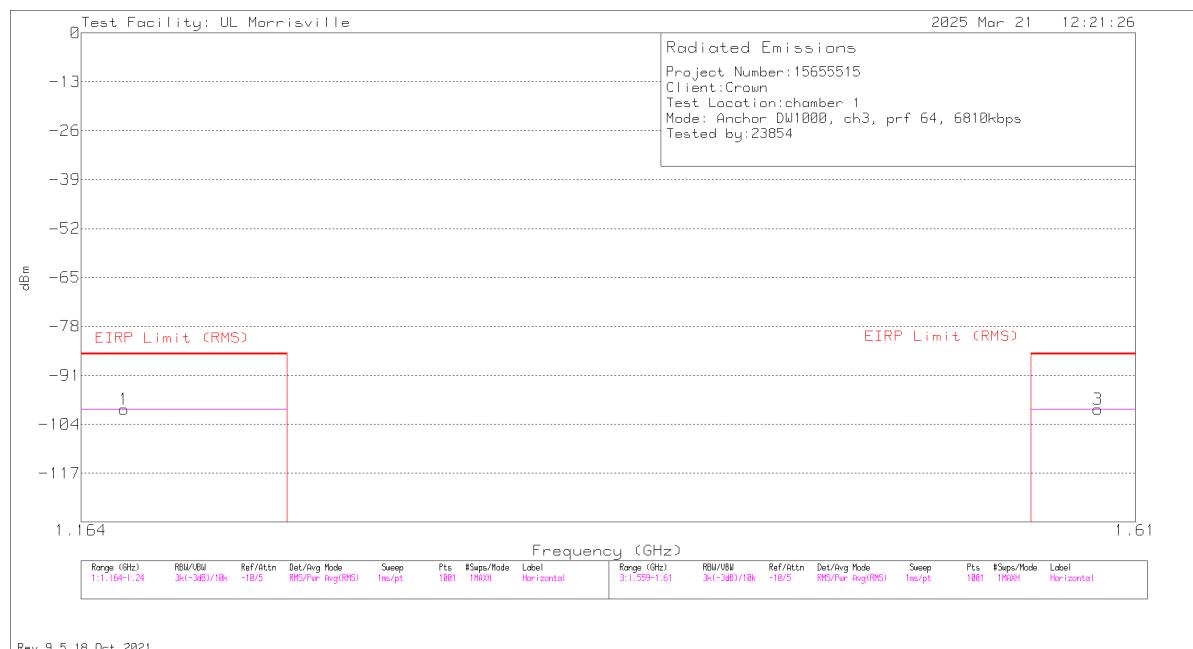

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Corrected Reading dBm	EIRP Limit (RMS)	Margin (dB)	EIRP Limit (RMS)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.17962	-75.09	RMS	28.5	-53.4	-99.99	-85.3	-14.69	-	-	22	155	H
2	1.20386	-75.29	RMS	28.7	-53.4	-99.99	-85.3	-14.69	-	-	338	155	V
3	1.59136	-75.19	RMS	28.1	-52.9	-99.99	-	-	-85.3	-14.69	22	155	H
4	1.57739	-74.99	RMS	28	-53	-99.99	-	-	-85.3	-14.69	339	155	V

RMS - RMS detection



DW1000 Transceiver, Channel 3

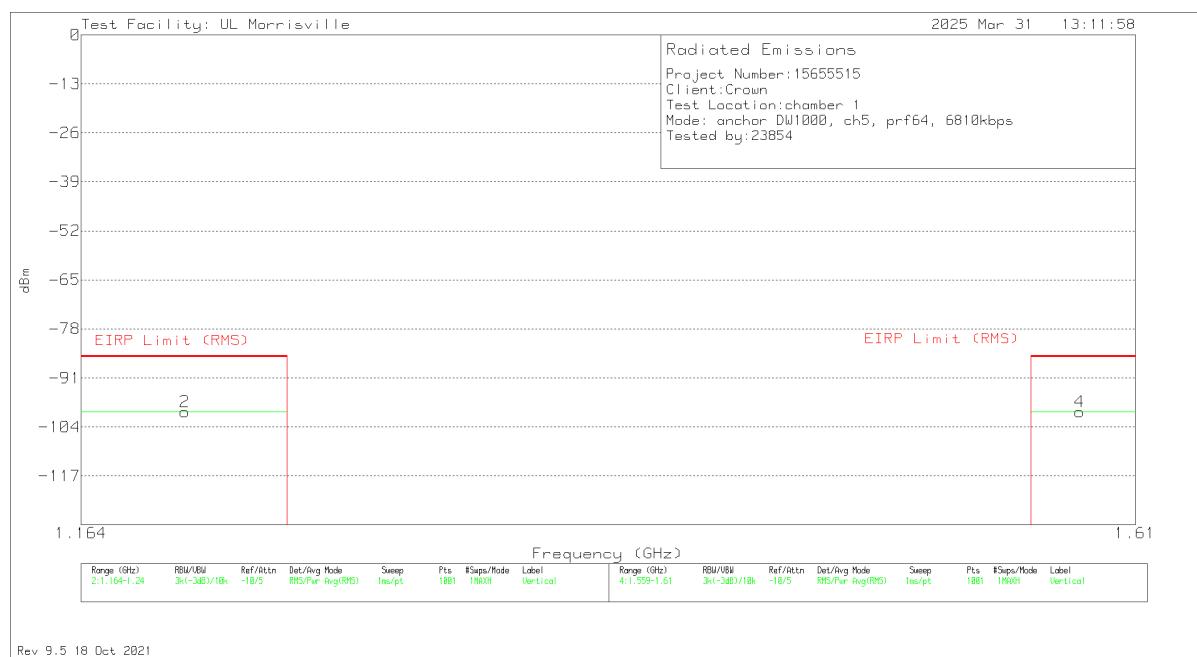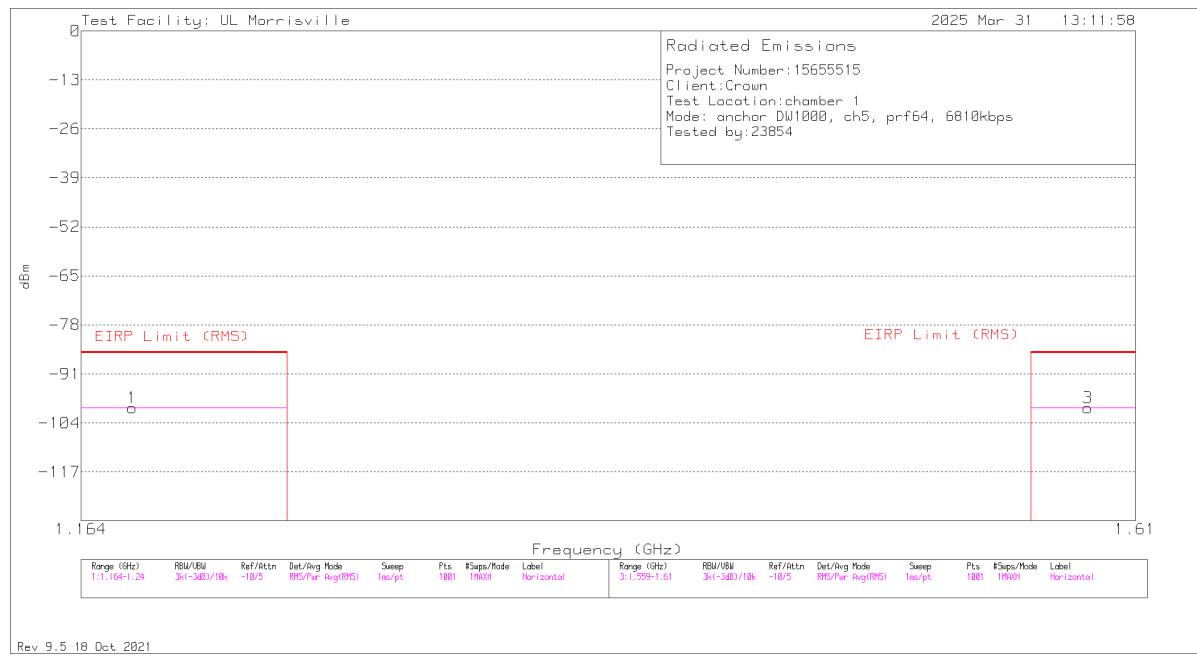

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Corrected Reading dBm	EIRP Limit (RMS)	Margin (dB)	EIRP Limit (RMS)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.18243	-75.09	RMS	28.5	-53.4	-99.99	-85.3	-14.69	-	-	22	155	H
2	1.20166	-75.29	RMS	28.7	-53.4	-99.99	-85.3	-14.69	-	-	339	155	V
3	1.58651	-75.19	RMS	28.1	-52.9	-99.99	-	-	-85.3	-14.69	22	155	H
4	1.58254	-75.19	RMS	28.1	-52.9	-99.99	-	-	-85.3	-14.69	338	155	V

RMS - RMS detection


DW1000 Transceiver, Channel 5

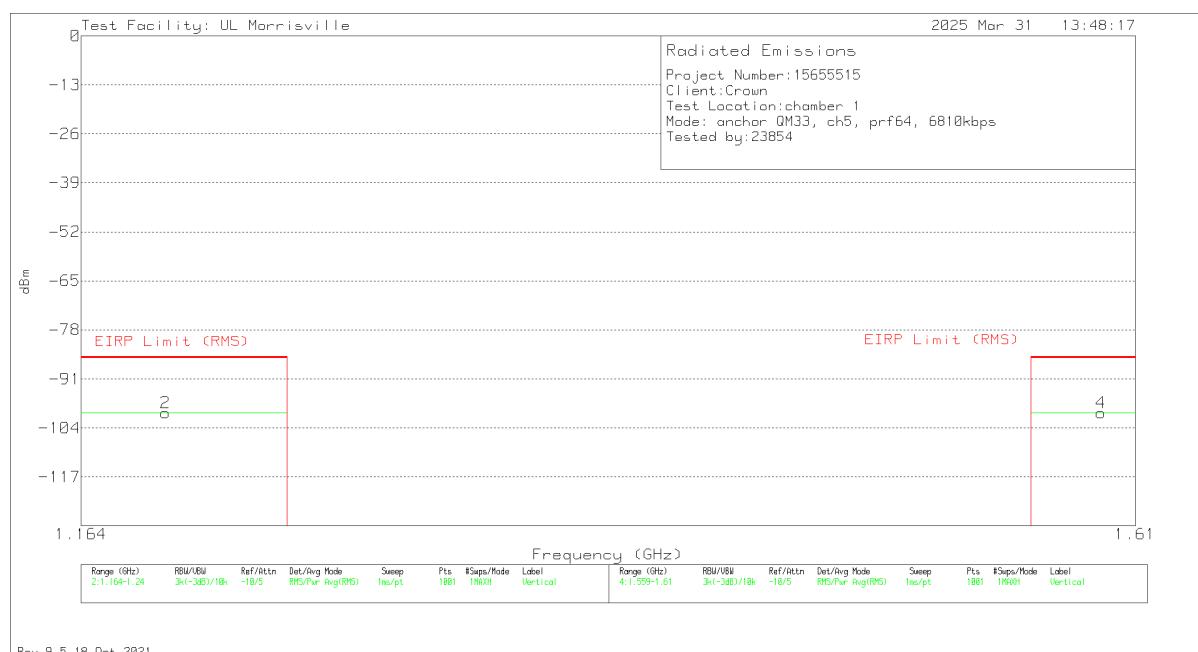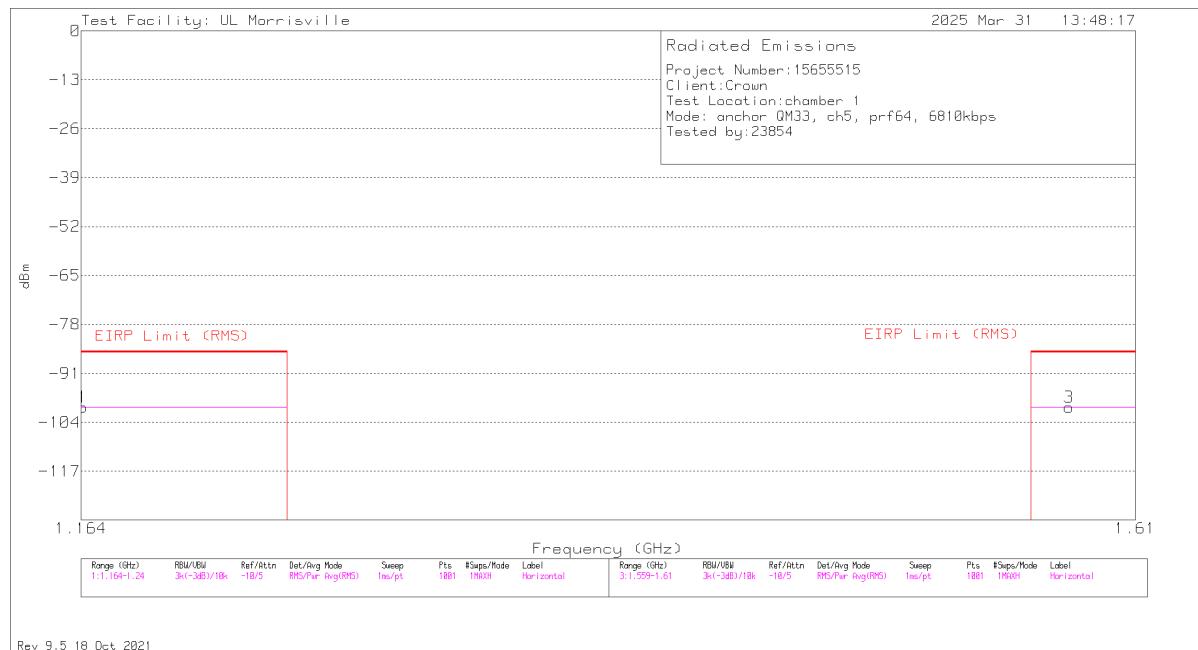

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Corrected Reading dBm	EIRP Limit (RMS)	Margin (dB)	EIRP Limit (RMS)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.16472	-74.99	RMS	28.3	-53.3	-99.99	-85.3	-14.69	-	-	22	155	H
2	1.19451	-75.09	RMS	28.6	-53.5	-99.99	-85.3	-14.69	-	-	338	155	V
3	1.57739	-74.99	RMS	28	-53	-99.99	-	-	-85.3	-14.69	22	155	H
4	1.59294	-75.19	RMS	28.1	-52.9	-99.99	-	-	-85.3	-14.69	338	155	V

RMS - RMS detection

QM33 Transceiver, Channel 5


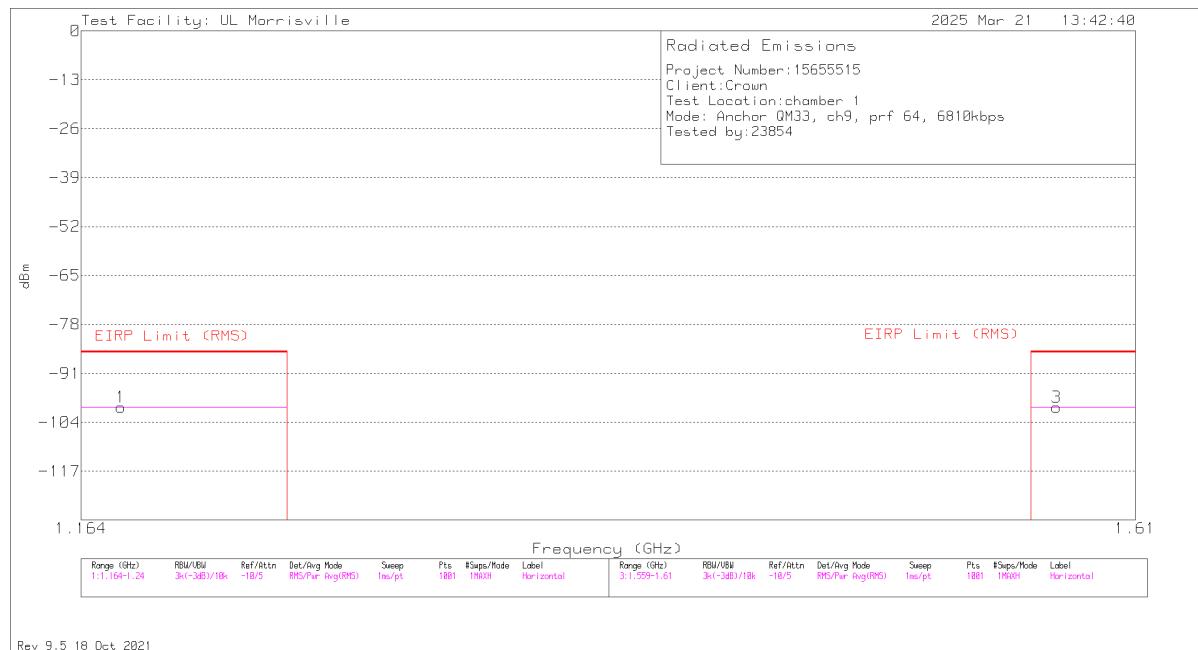


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Corrected Reading dBm	EIRP Limit (RMS)	Margin (dB)	EIRP Limit (RMS)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.17848	-75.09	RMS	28.5	-53.4	-99.99	-85.3	-14.69	-	-	22	155	H
2	1.22362	-75.29	RMS	28.9	-53.6	-99.99	-85.3	-14.69	-	-	339	155	V
3	1.57132	-74.79	RMS	28	-53.2	-99.99	-	-	-85.3	-14.69	22	155	H
4	1.6062	-75.19	RMS	28.1	-52.9	-99.99	-	-	-85.3	-14.69	338	155	V

RMS - RMS detection

QM33 Transceiver, Channel 9


## 8.5.2. RADIATED EMISSIONS 960 MHz – 18 GHz

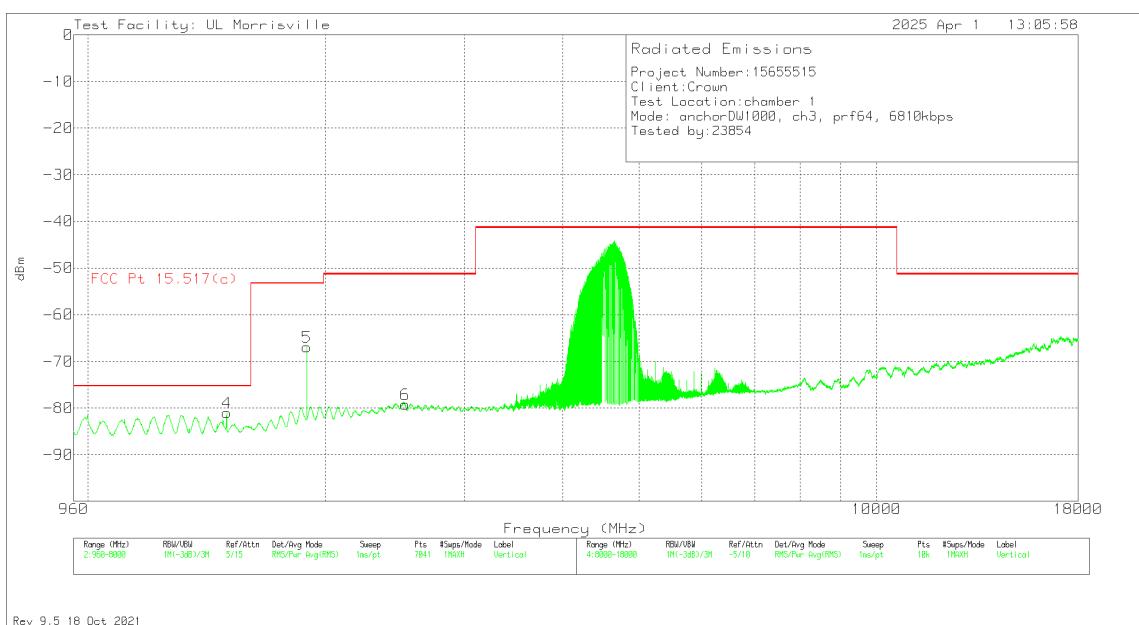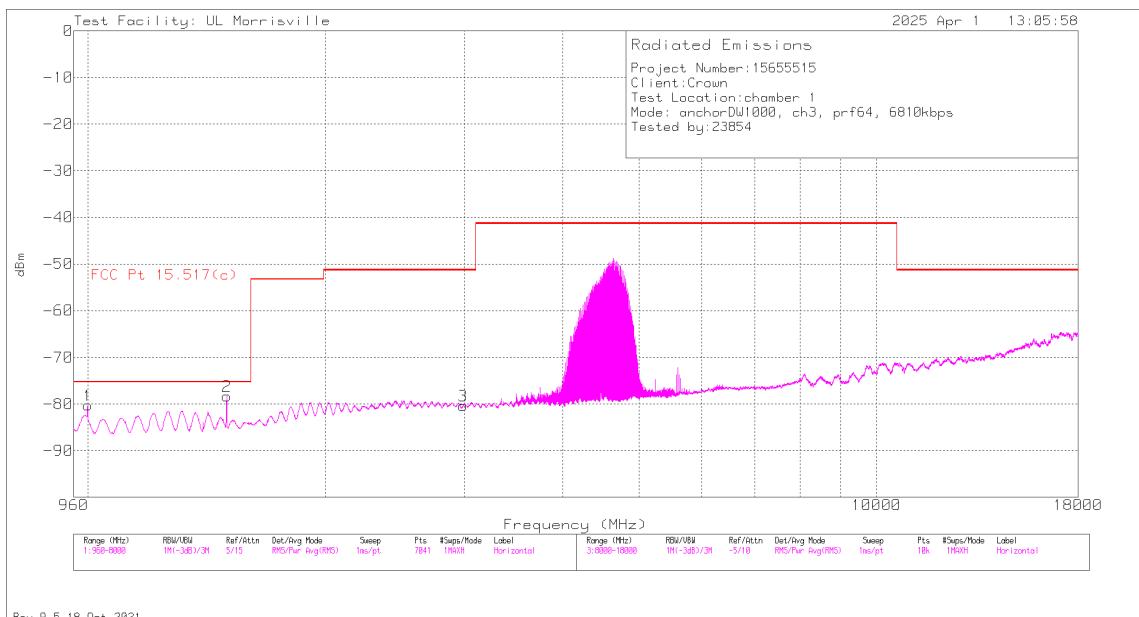


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Corrected Reading dBm	FCC Pt 15.517(c)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1000	-54.25	RMS	28	-53	-79.25	-75.3	-3.95	152	120	H
2	1500	-50.65	RMS	28.2	-53.1	-75.55	-75.3	-2.25	155	174	H
3	2990	-61.66	RMS	32.5	-51.2	-80.36	-51.3	-29.06	0	155	H
4	1500	-54.43	RMS	28.2	-53.1	-79.33	-75.3	-4.03	176	154	V
5	1895	-44.93	RMS	31.3	-53.3	-66.93	-53.3	-13.63	250	155	V
6	2525	-58.55	RMS	32.3	-53	-79.25	-51.3	-27.95	229	155	V

RMS - RMS detection

DW1000 Transceiver, Channel 3

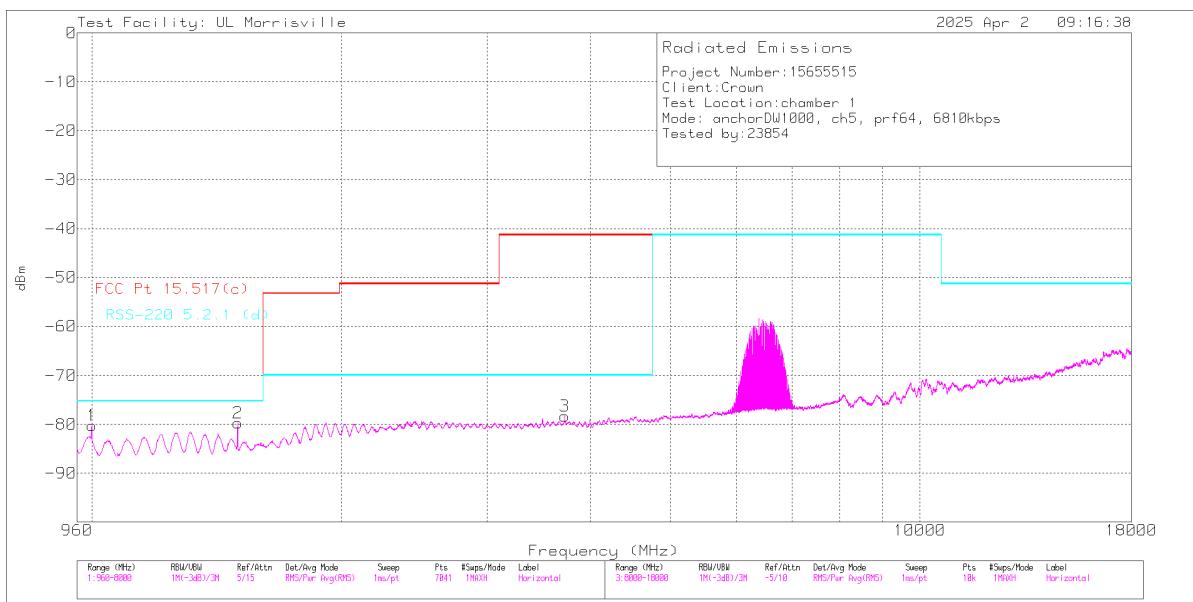

Rev 9.5 18 Oct 2021

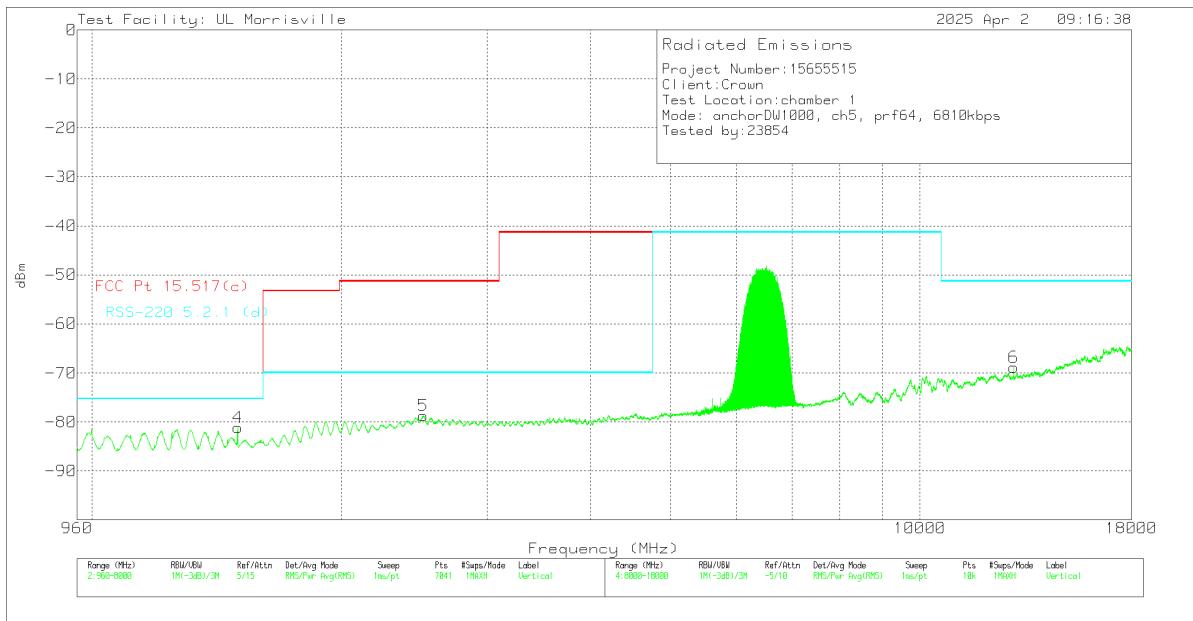


Rev 9.5 18 Oct 2021


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Corrected Reading dBm	FCC Pt 15.517(c)	Margin (dB)	RSS-220 5.2.1 (d)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1000	-54.11	RMS	28	-53	-79.11	-75.3	-3.81	-75.3	-3.81	155	147	H
2	1500	-50.62	RMS	28.2	-53.1	-75.52	-75.3	-.22	-75.3	-.22	155	173	H
3	3725	-61.11	RMS	33.2	-50.4	-78.31	-41.3	-37.01	-70	-8.31	110	155	H
4	1500	-55.01	RMS	28.2	-53.1	-79.91	-75.3	-4.61	-75.3	-4.61	177	152	V
5	2511	-58.1	RMS	32.3	-52.9	-78.7	-51.3	-27.4	-70	-8.7	229	155	V
6	12.979	-61.88	RMS	38.8	-45.8	-68.88	-51.3	-17.58	-51.3	-17.58	140	155	V

RMS - RMS detection

DW1000 Transceiver, Channel 5

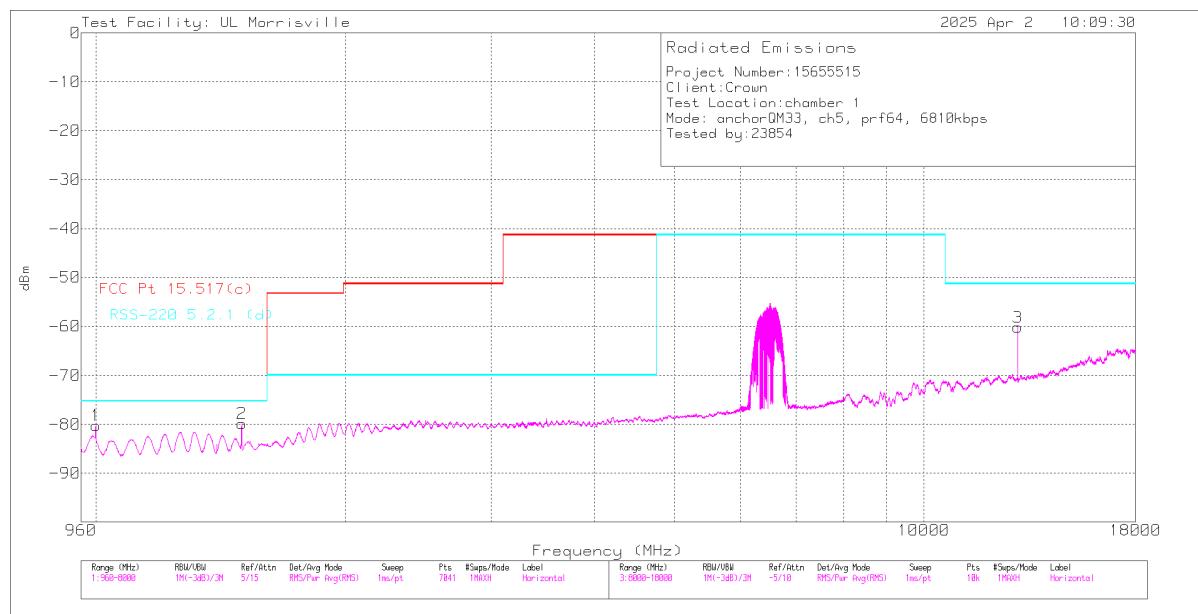

Rev 9.5 18 Oct 2021

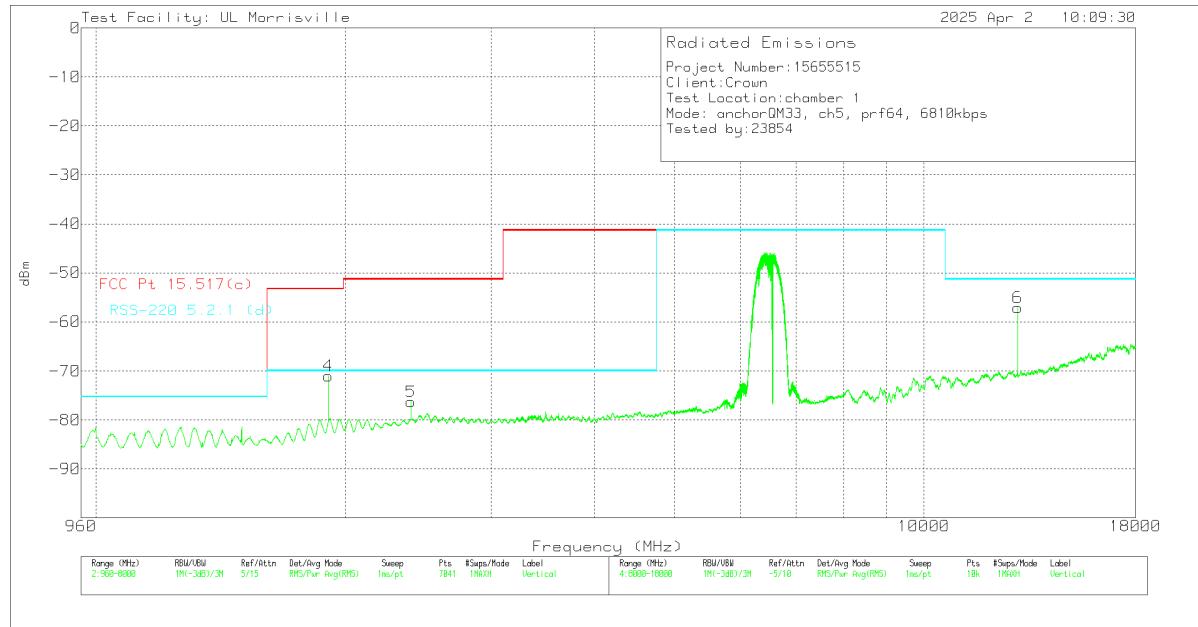


Rev 9.5 18 Oct 2021


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Corrected Reading dBm	FCC Pt 15.517(c)	Margin (dB)	RSS-220 5.2.1 (d)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	999.98	-54.84	RMS	28	-53	-79.84	-75.3	-4.54	-75.3	-4.54	151	146	H
2	1500.016	-52.86	RMS	28.2	-53.1	-77.76	-75.3	-2.46	-75.3	-2.46	134	164	H
4	1908	-60.94	RMS	31.3	-53.3	-82.94	-53.3	-29.64	-70	-12.94	358	155	V
5	2401	-55.02	RMS	32	-53.3	-76.32	-51.3	-25.02	-70	-6.32	272	155	V
3	12.97912	-51.65	RMS	38.8	-45.8	-58.65	-51.3	-7.35	-51.3	-7.35	86	154	H
6	12.97923	-48.8	RMS	38.8	-45.8	-55.8	-51.3	-4.5	-51.3	-4.5	138	156	V

RMS - RMS detection

### QM33 Transceiver, Channel 5

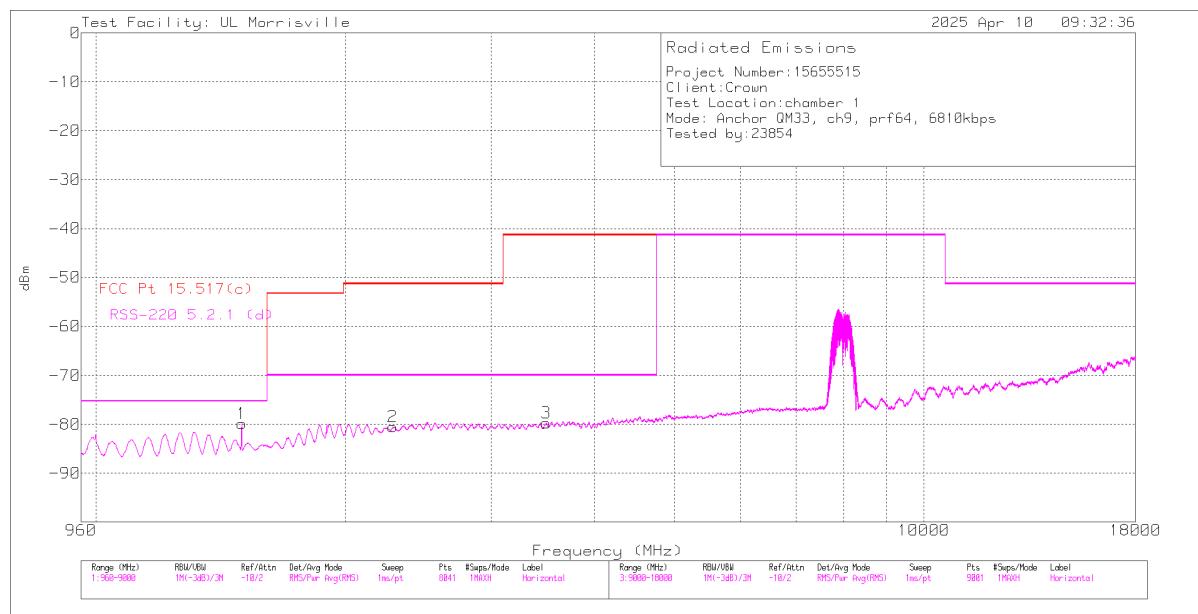

Rev 9.5 18 Oct 2021

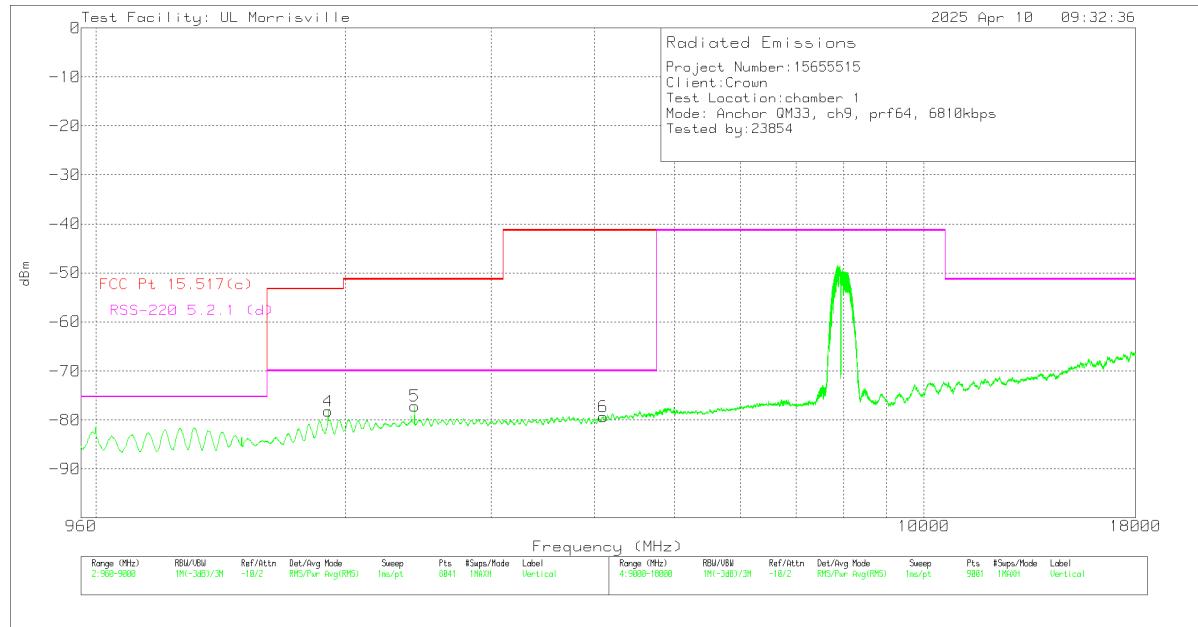


Rev 9.5 18 Oct 2021

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	135143 (dB/m)	Gain/Loss (dB)	Corrected Reading dBm	FCC Pt 15.517(c)	Margin (dB)	RSS-220 5.2.1 (d)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1500	-52.33	RMS	28.2	-53.1	-77.23	-75.3	-1.93	-75.3	-1.93	147	177	H
2	2282	-58.83	RMS	31.6	-53.3	-80.53	-51.3	-29.23	-70	-10.53	360	200	H
3	3500	-62.68	RMS	32.9	-49.9	-79.68	-41.3	-38.38	-70	-9.68	162	200	H
4	1907	-56.24	RMS	31.3	-53.3	-78.24	-53.3	-24.94	-70	-8.24	154	101	V
5	2425	-55.71	RMS	32	-53.4	-77.11	-51.3	-25.81	-70	-7.11	206	200	V
6	4099	-61.73	RMS	33.2	-50.8	-79.33	-41.3	-38.03	-70	-9.33	110	101	V


RMS - RMS detection

QM33 Transceiver, Channel 9

### 8.5.3. RADIATED EMISSIONS 18 – 26.5 GHz

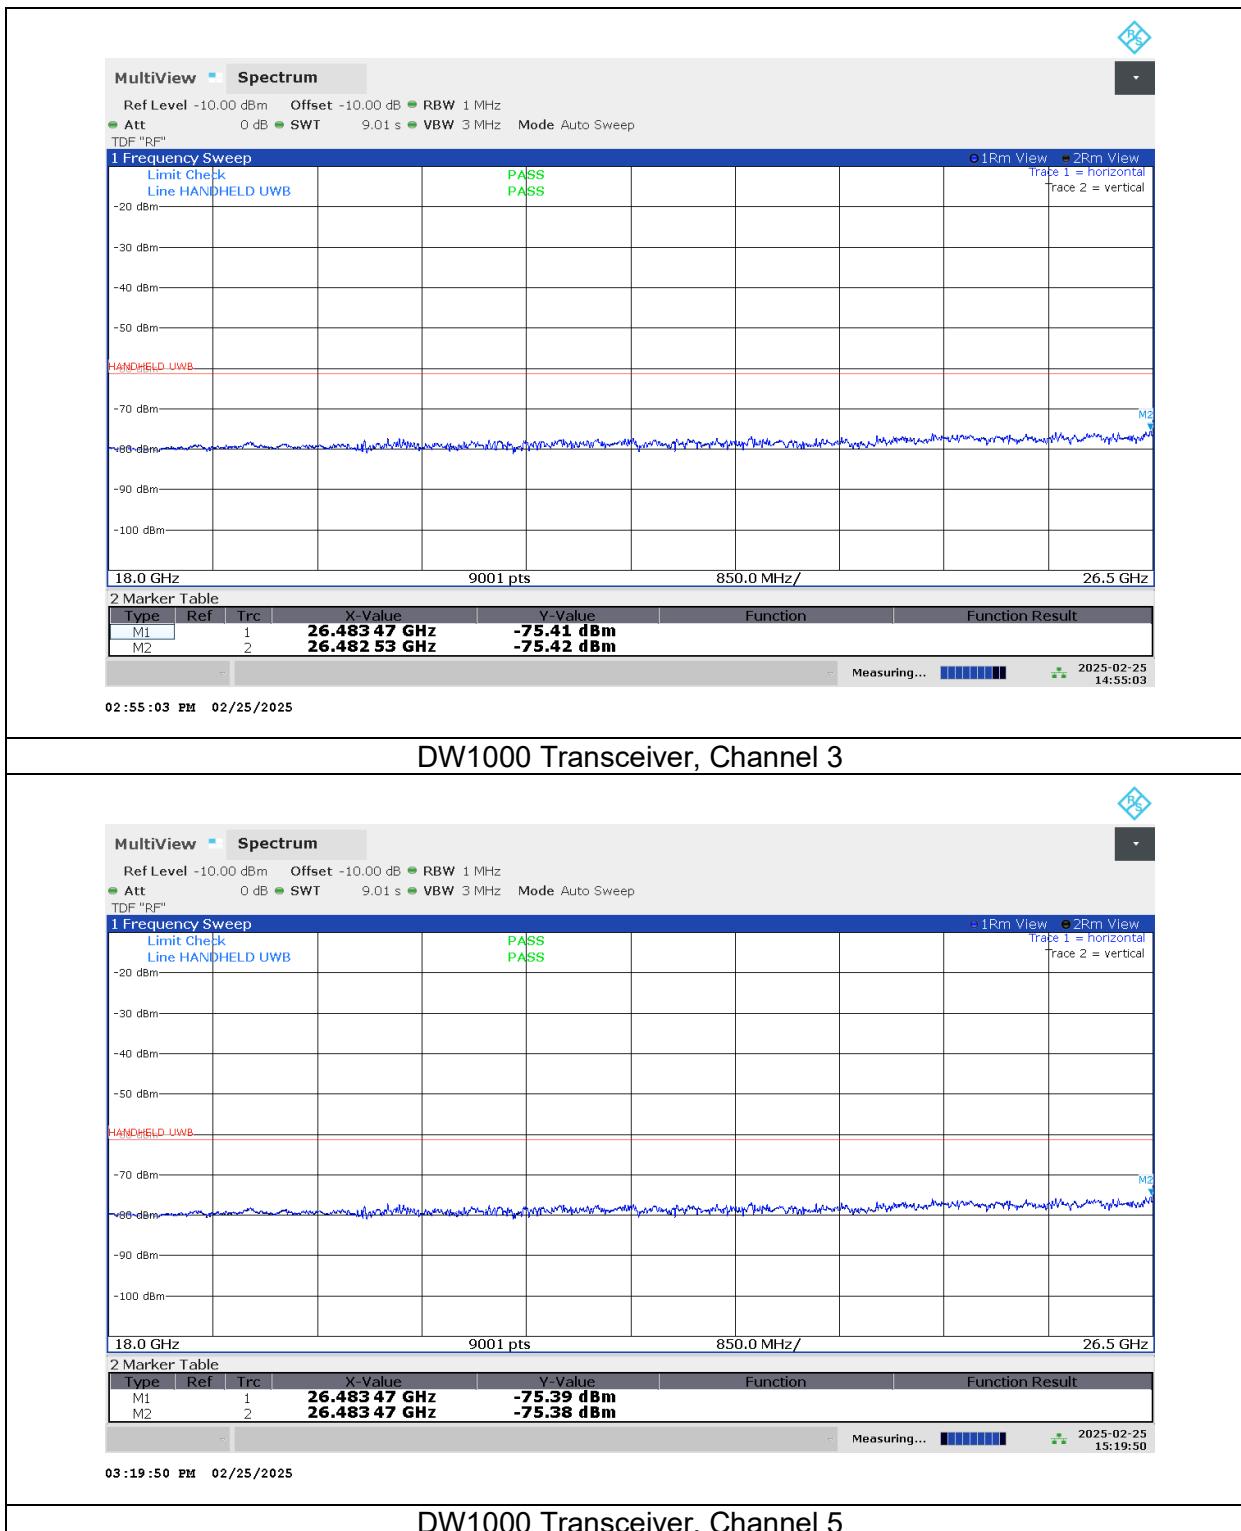


Note: A more stringent limit was displayed on the plot, which the EUT is also compliant with

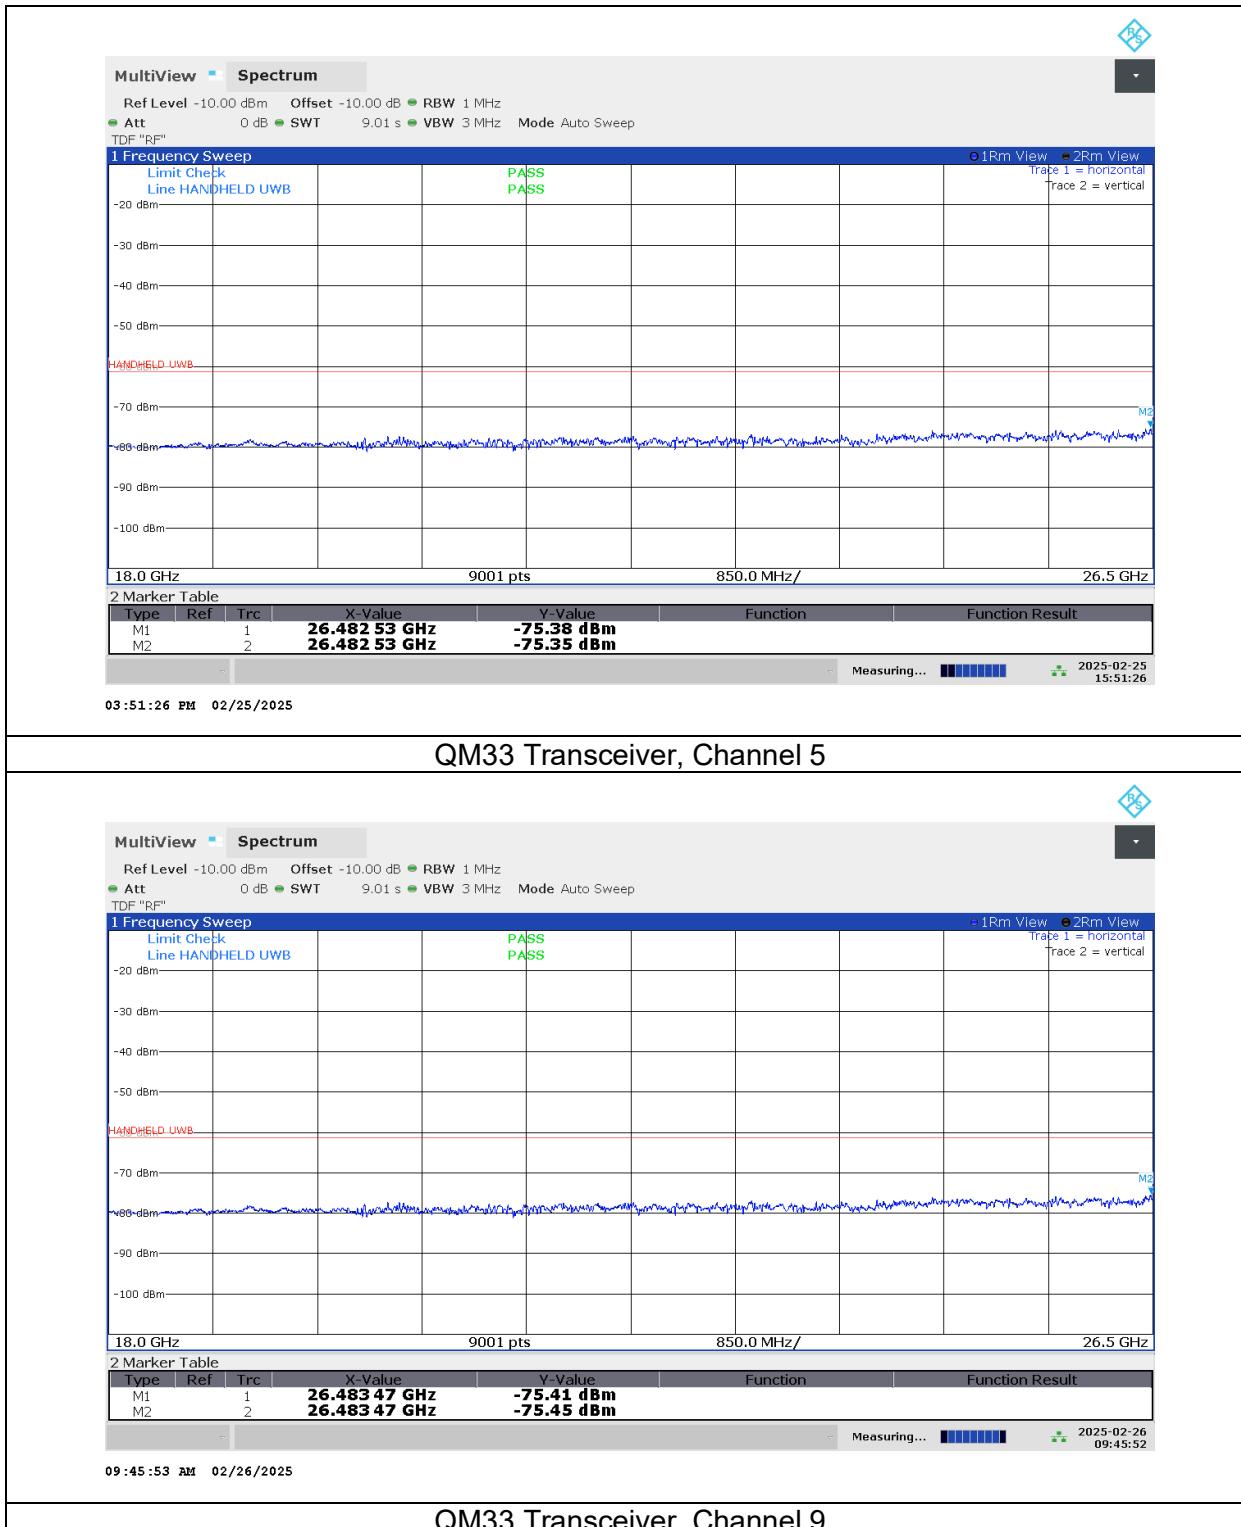


Note: A more stringent limit was displayed on the plot, which the EUT is also compliant with

### 8.5.4. RADIATED EMISSIONS 26.5 – 40 GHz

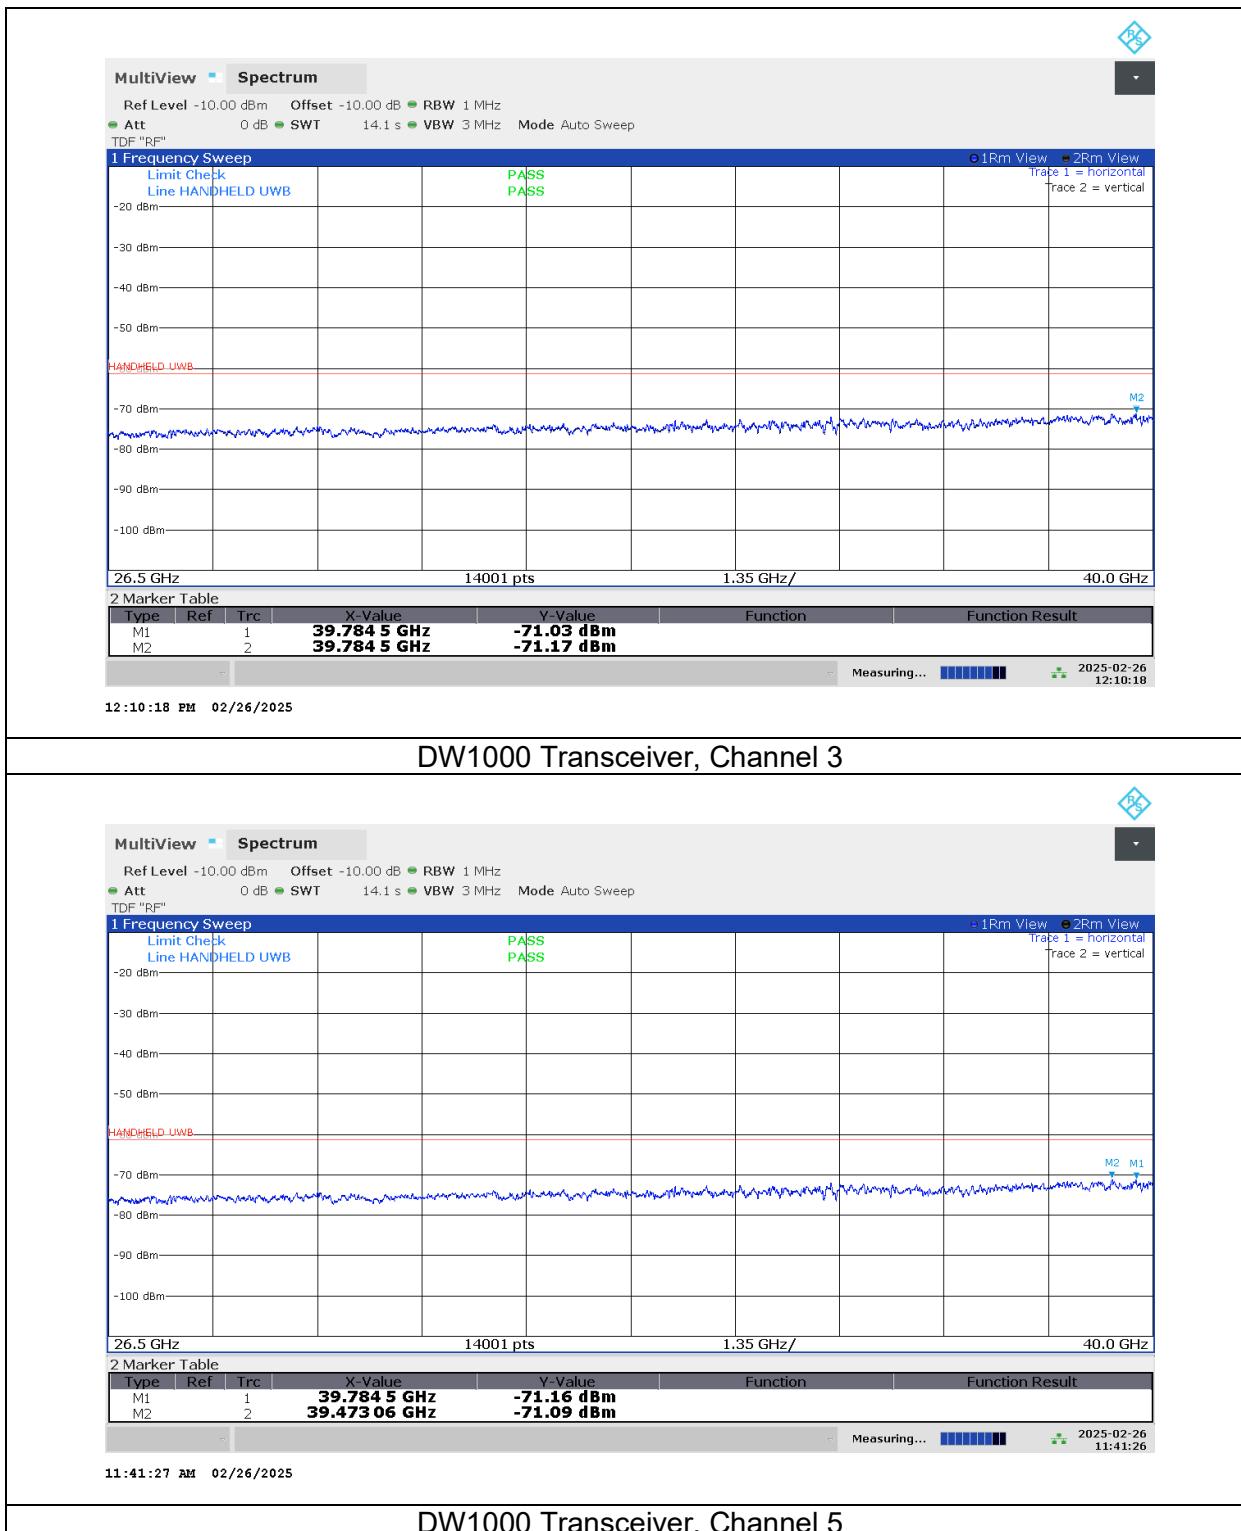

Note: A more stringent limit was displayed on the plot, which the EUT is also compliant with

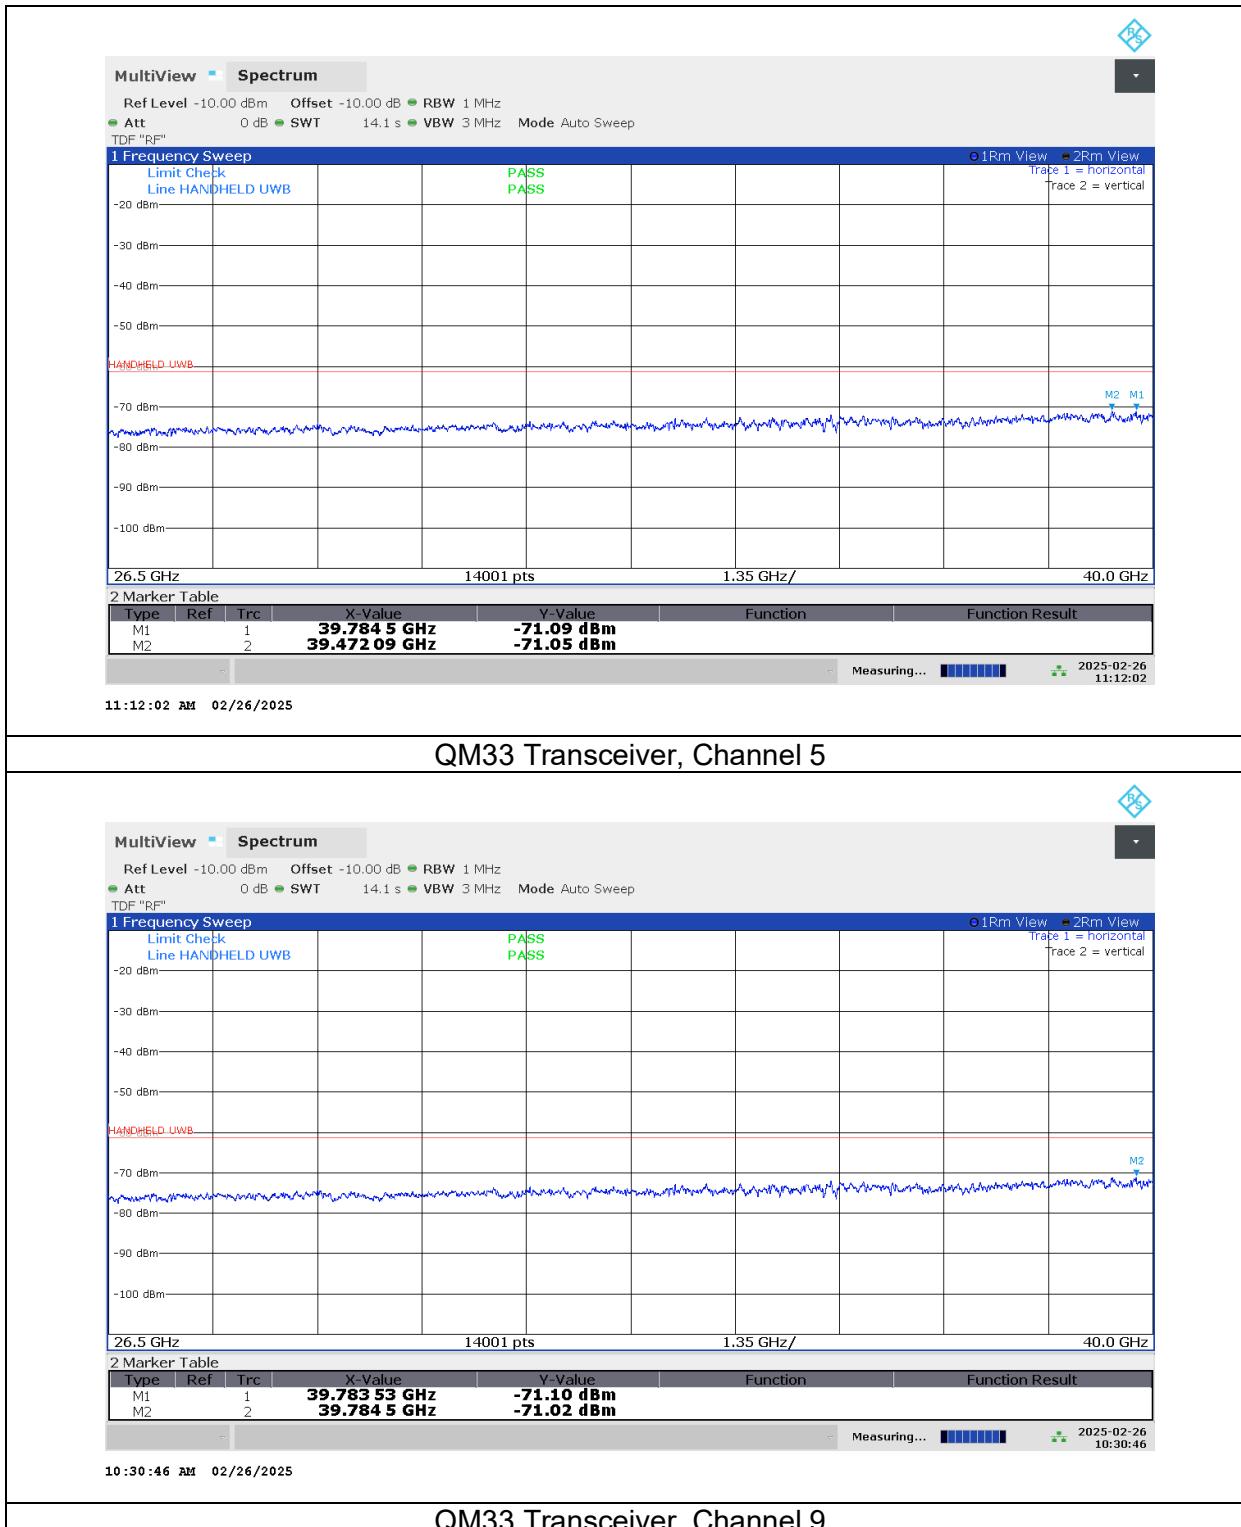

Note: A more stringent limit was displayed on the plot, which the EUT is also compliant with

## 8.6. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

## LINE 1 RESULTS

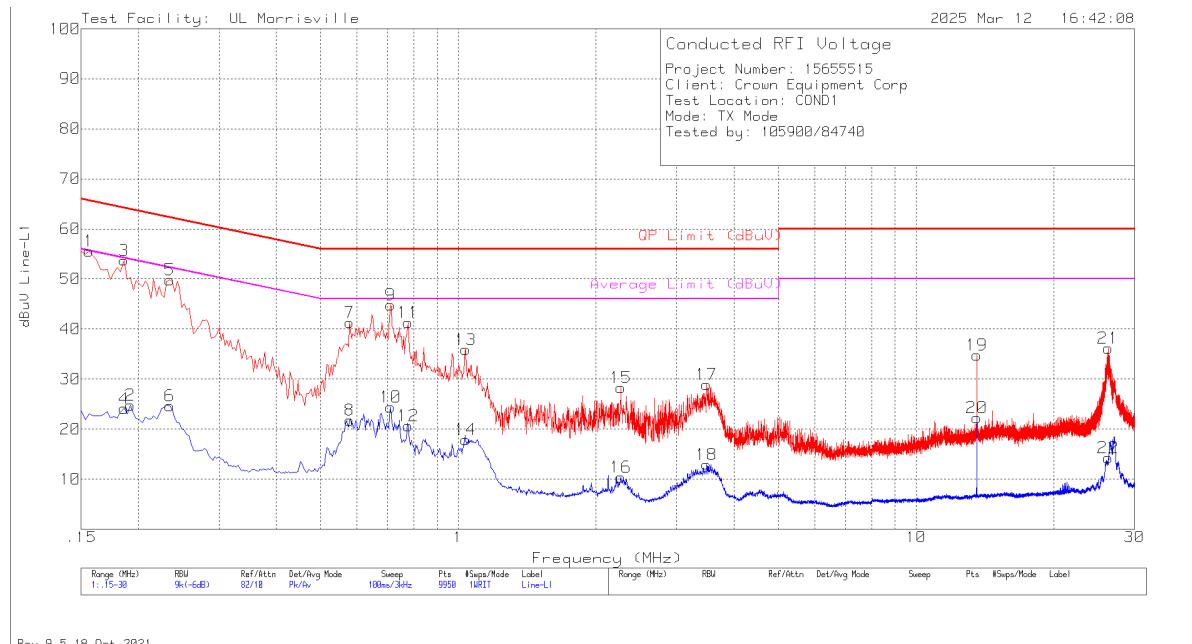


Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LiSN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.156	45.56	Pk	.2	9.8	55.56	65.67	-10.11	-	-
4	.186	14.09	Av	.2	9.8	24.09	-	-	54.21	-30.12
3	.186	43.75	Pk	.2	9.8	53.75	64.21	-10.46	-	-
2	.192	14.78	Av	.2	9.8	24.78	-	-	53.95	-29.17
5	.234	39.96	Pk	.1	9.8	49.86	62.31	-12.45	-	-
6	.234	14.74	Av	.1	9.8	24.64	-	-	52.31	-27.67
7	.579	31.48	Pk	0	9.8	41.28	56	-14.72	-	-
8	.579	12.02	Av	0	9.8	21.82	-	-	46	-24.18
9	.711	34.99	Pk	0	9.8	44.79	56	-11.21	-	-
10	.711	14.58	Av	0	9.8	24.38	-	-	46	-21.62
11	.777	31.52	Pk	0	9.8	41.32	56	-14.68	-	-
12	.777	10.84	Av	0	9.8	20.64	-	-	46	-25.36
13	1.038	26.06	Pk	0	9.8	35.86	56	-20.14	-	-
14	1.038	8.14	Av	0	9.8	17.94	-	-	46	-28.06
15	2.265	18.46	Pk	0	9.8	28.26	56	-27.74	-	-
16	2.265	.63	Av	0	9.8	10.43	-	-	46	-35.57
17	3.489	19.12	Pk	0	9.8	28.92	56	-27.08	-	-
18	3.489	3.14	Av	0	9.8	12.94	-	-	46	-33.06
19	13.563	24.69	Pk	.1	10	34.79	60	-25.21	-	-
20	13.56	12.15	Av	.1	10	22.25	-	-	50	-27.75
21	26.298	25.54	Pk	.4	10.2	36.14	60	-23.86	-	-
22	26.283	3.65	Av	.4	10.2	14.25	-	-	50	-35.75

Pk - Peak detector

Av - Average detection

**LINE 2 RESULTS**

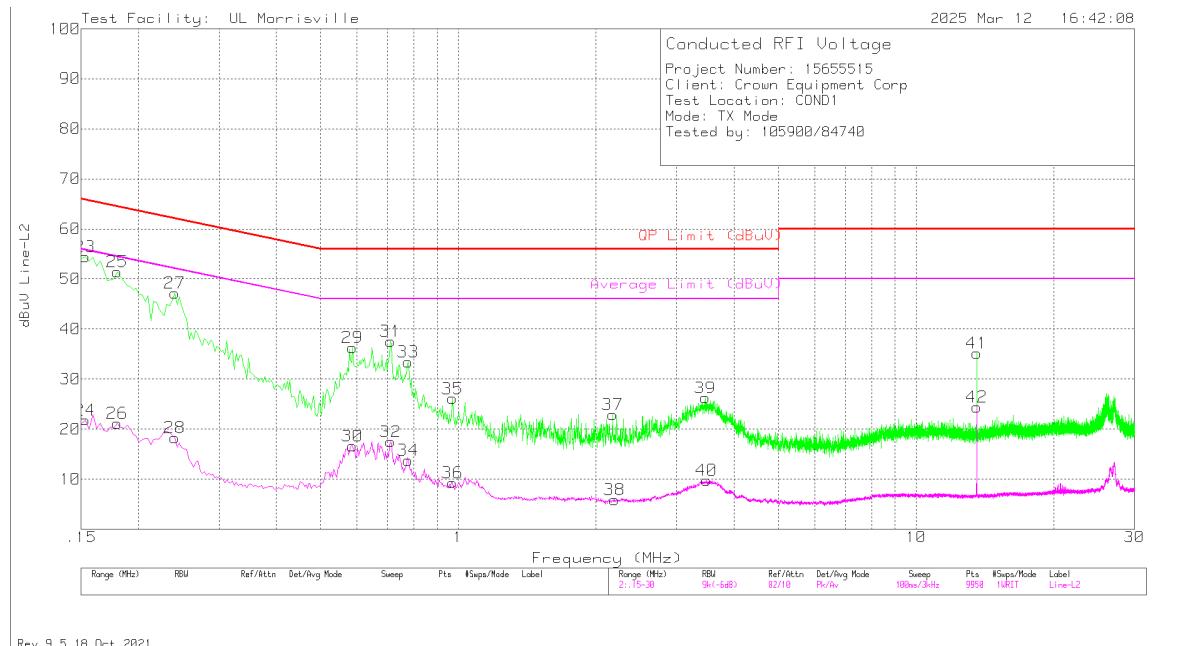

**Range 2: Line-L2 .15 - 30MHz**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LiSN VDF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
23	.153	44.4	Pk	.2	9.8	54.4	65.84	-11.44	-	-
24	.153	11.83	Av	.2	9.8	21.83	-	-	55.84	-34.01
25	.18	41.4	Pk	.2	9.8	51.4	64.49	-13.09	-	-
26	.18	11.11	Av	.2	9.8	21.11	-	-	54.49	-33.38
27	.24	37.32	Pk	.1	9.8	47.22	62.1	-14.88	-	-
28	.24	8.41	Av	.1	9.8	18.31	-	-	52.1	-33.79
29	.588	26.46	Pk	0	9.8	36.26	56	-19.74	-	-
30	.588	6.79	Av	0	9.8	16.59	-	-	46	-29.41
31	.711	27.72	Pk	0	9.8	37.52	56	-18.48	-	-
32	.711	7.66	Av	0	9.8	17.46	-	-	46	-28.54
33	.777	23.58	Pk	0	9.8	33.38	56	-22.62	-	-
34	.777	3.98	Av	0	9.8	13.78	-	-	46	-32.22
35	.972	16.29	Pk	0	9.8	26.09	56	-29.91	-	-
36	.972	-.49	Av	0	9.8	9.31	-	-	46	-36.69
37	2.172	13.15	Pk	0	9.8	22.95	56	-33.05	-	-
38	2.196	-3.88	Av	0	9.8	5.92	-	-	46	-40.08
39	3.462	16.42	Pk	0	9.8	26.22	56	-29.78	-	-
40	3.489	-.01	Av	0	9.8	9.79	-	-	46	-36.21
41	13.56	25.04	Pk	.1	10	35.14	60	-24.86	-	-
42	13.56	14.27	Av	.1	10	24.37	-	-	50	-25.63

Pk - Peak detector

Av - Average detection

## 9. SETUP PHOTOS

Refer to R15655515-EP1 for setup photos.

**END OF TEST REPORT**