

Appendix

BLE

TABLE OF CONTENTS

1	Equipment List	3
2	Measurement Uncertainty (95% confidence levels, k=2)	3
3	AC Power Line Conducted Emissions	4
4	Duty Cycle	6
4.1	Test Results	6
4.2	Test Plots	6
5	Conducted Output Power	7
5.1	Test Results	7
5.2	Test plots:	8
6	DTS (6 dB) Bandwidth & 99% Occupied Bandwidth.....	10
6.1	Test Results	10
6.2	Test plots	11
7	Power Spectral Density	14
7.1	Test Results	14
7.2	Test plots	15
8	Band-edge for RF Conducted Emissions	17
8.1	Test plots	17
9	Spurious RF Conducted Emissions	18
9.1	Test plots:	18

JianYan Testing Group Shenzhen Co., Ltd.

Report No: JYTSZB-R12-2102955

1 Equipment List

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate
				(yyyy-mm-dd)	(yyyy-mm-dd)
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017/5/10	2020/5/9
LISN	Rohde & Schwarz	ENV216	SEM007-01	2019/7/14	2020/7/14
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2019/4/1	2020/3/31
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2019/6/12	2020/6/11
2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2019/2/11	2020/2/10
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2019/3/2	2020/3/1


RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate
				(yyyy-mm-dd)	(yyyy-mm-dd)
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2019/7/15	2020/7/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2019/1/13	2020/1/12
Coaxial Cable	SGS	N/A	SEM031-01	2019/6/12	2020/6/11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2019/7/14	2020/7/14
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2018/11/27	2019/11/27
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2019/7/14	2020/7/14

2 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB
2	RF power density, conducted	±2.84dB
3	Spurious emissions, conducted	±0.75dB
4	Conduct emission test	±3.12 dB (9KHz- 30MHz)

3 AC Power Line Conducted Emissions

Live line:

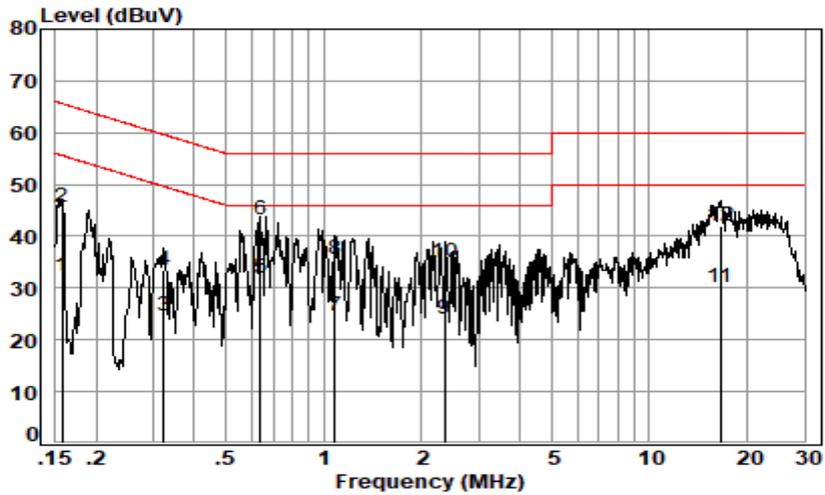


Site : Shielding Room
 Condition: Line
 Job No. : 19419CR
 Test mode: c

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16	0.01	9.48	22.70	32.19	55.60	-23.41	Average
2	0.16	0.01	9.48	36.13	45.62	65.60	-19.98	QP
3	0.32	0.04	9.55	15.11	24.70	49.66	-24.96	Average
4	0.32	0.04	9.55	23.94	33.53	59.66	-26.13	QP
5	0.64	0.07	9.62	22.20	31.89	46.00	-14.11	Average
6	0.64	0.07	9.62	33.42	43.11	56.00	-12.89	QP
7	1.08	0.10	9.63	14.88	24.61	46.00	-21.39	Average
8	1.08	0.10	9.63	25.94	35.67	56.00	-20.33	QP
9	2.36	0.16	9.65	14.27	24.08	46.00	-21.92	Average
10	2.36	0.16	9.65	25.08	34.89	56.00	-21.11	QP
11	16.57	0.22	10.02	19.85	30.09	50.00	-19.91	Average
12	16.57	0.22	10.02	31.76	42.00	60.00	-18.00	QP

JianYan Testing Group Shenzhen Co., Ltd.

Report No: JYTSZB-R12-2102955

Neutral line:

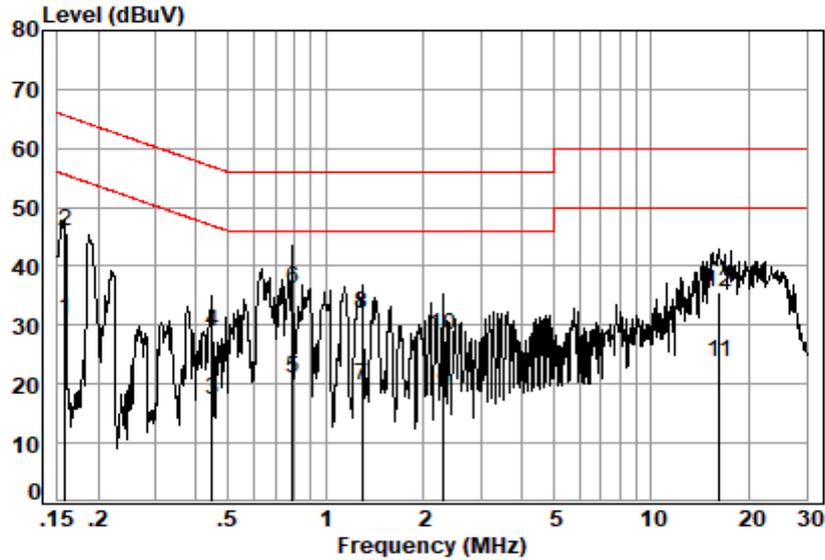

Site : Shielding Room
 Condition: Neutral
 Job No. : 19419CR
 Test mode: c

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16	0.01	9.42	21.75	31.18	55.56	-24.38	Average
2	0.16	0.01	9.42	36.65	46.08	65.56	-19.48	QP
3	0.45	0.06	9.56	7.62	17.24	46.89	-29.65	Average
4	0.45	0.06	9.56	19.29	28.91	56.89	-27.98	QP
5	0.79	0.08	9.64	11.14	20.86	46.00	-25.14	Average
6	0.79	0.08	9.64	26.40	36.12	56.00	-19.88	QP
7	1.30	0.12	9.68	9.85	19.65	46.00	-26.35	Average
8	1.30	0.12	9.68	22.00	31.80	56.00	-24.20	QP
9	2.31	0.16	9.70	8.67	18.53	46.00	-27.47	Average
10	2.31	0.16	9.70	18.53	28.39	56.00	-27.61	QP
11	16.14	0.22	10.10	13.45	23.77	50.00	-26.23	Average
12	16.14	0.22	10.10	25.38	35.70	60.00	-24.30	QP

Remarks:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

5 Conducted Output Power

5.1 Test Results

Measurement Data of Peak Power:

GFSK 1Mmode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-12.03	30.00	Pass
Middle	-6.62	30.00	Pass
Highest	0.58	30.00	Pass



6 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth

6.1 Test Results


Mode	Test Channel	99% Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
GFSK	Lowest	0.99	1.01	≥500	Pass
	Middle	0.95	0.96	≥500	Pass
	Highest	0.94	0.95	≥500	Pass

6.2 Test plots

GFSK_Lowest Channel

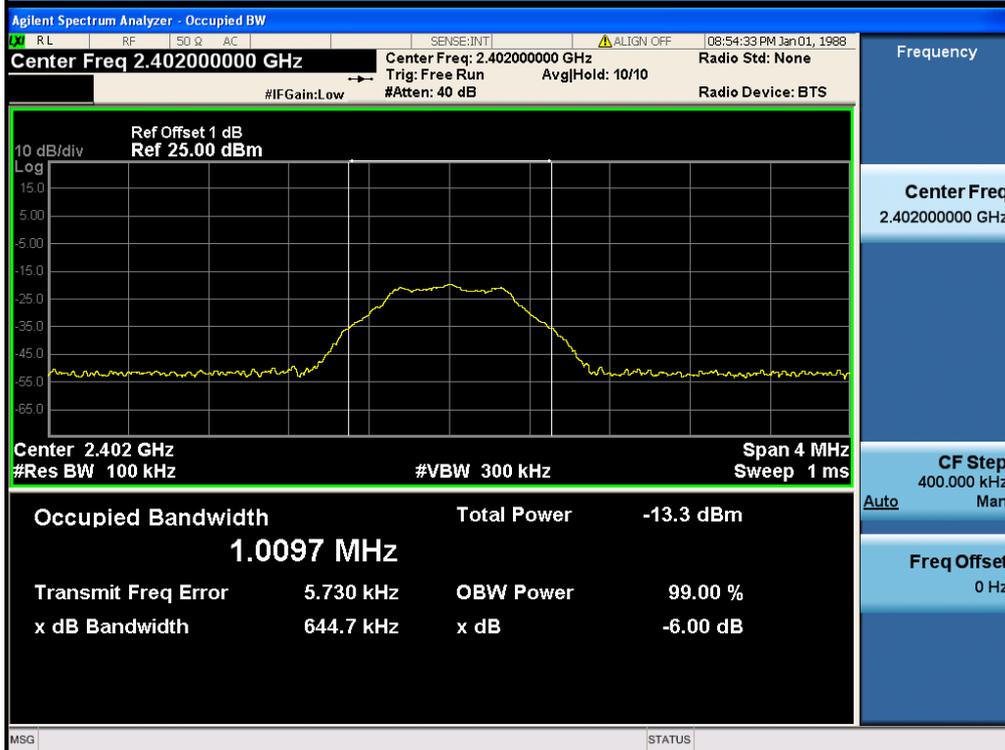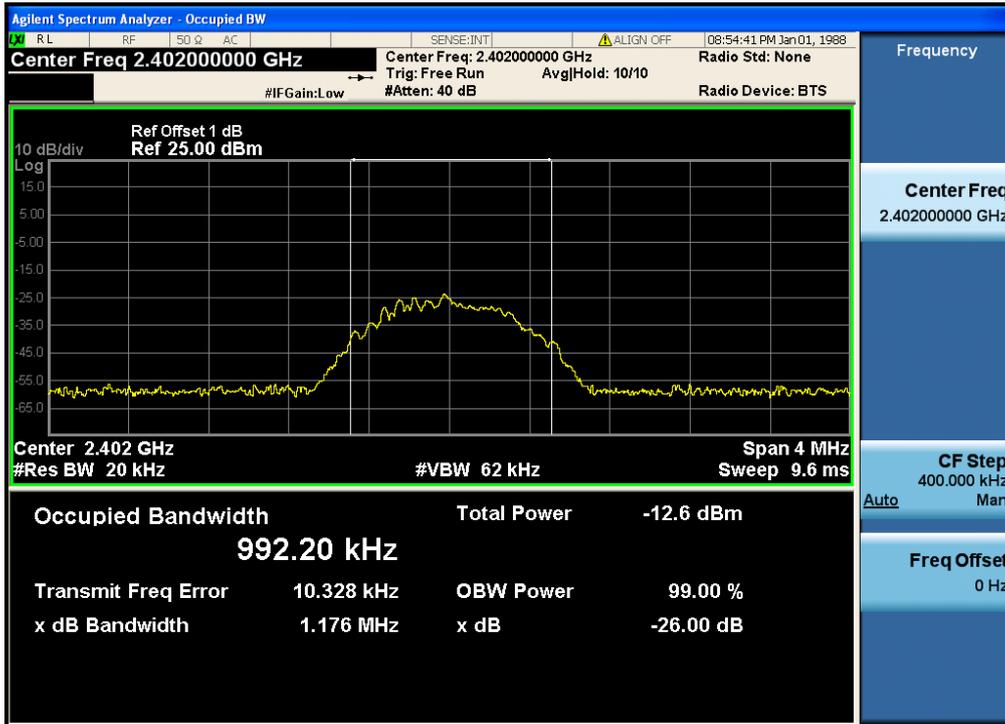

GFSK _Middle Channel

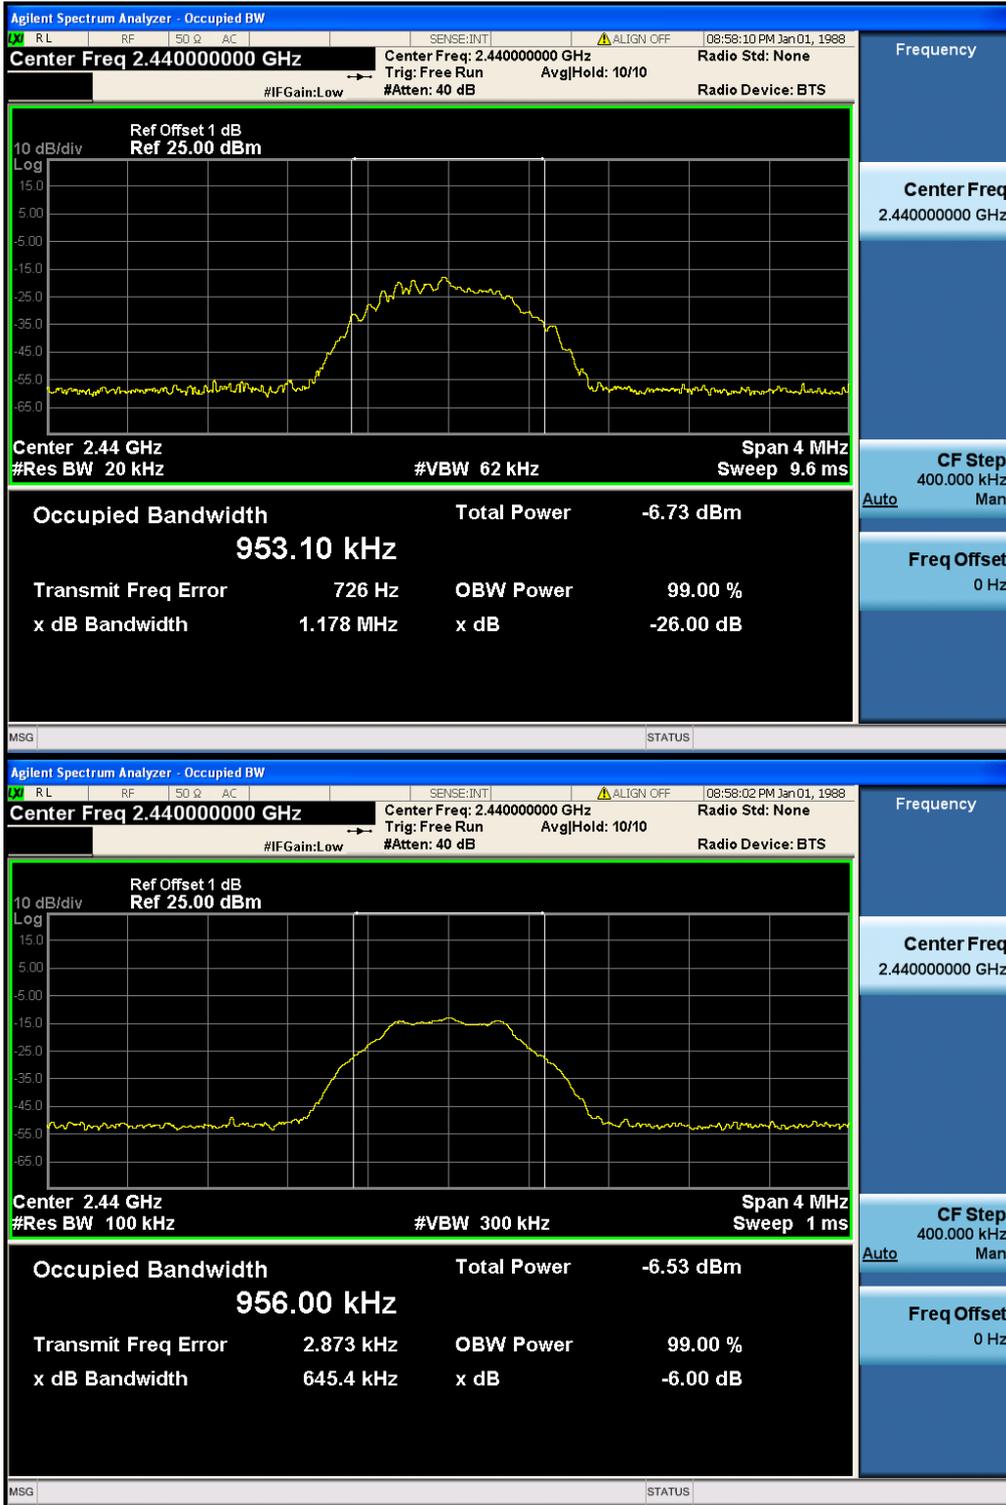

GFSK _Highest Channel




7 Power Spectral Density

7.1 Test Results


Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK	Lowest	-30.71	≤8.00	Pass
	Middle	-23.90	≤8.00	Pass
	Highest	-19.06	≤8.00	Pass

7.2 Test plots


GFSK Lowest Channel

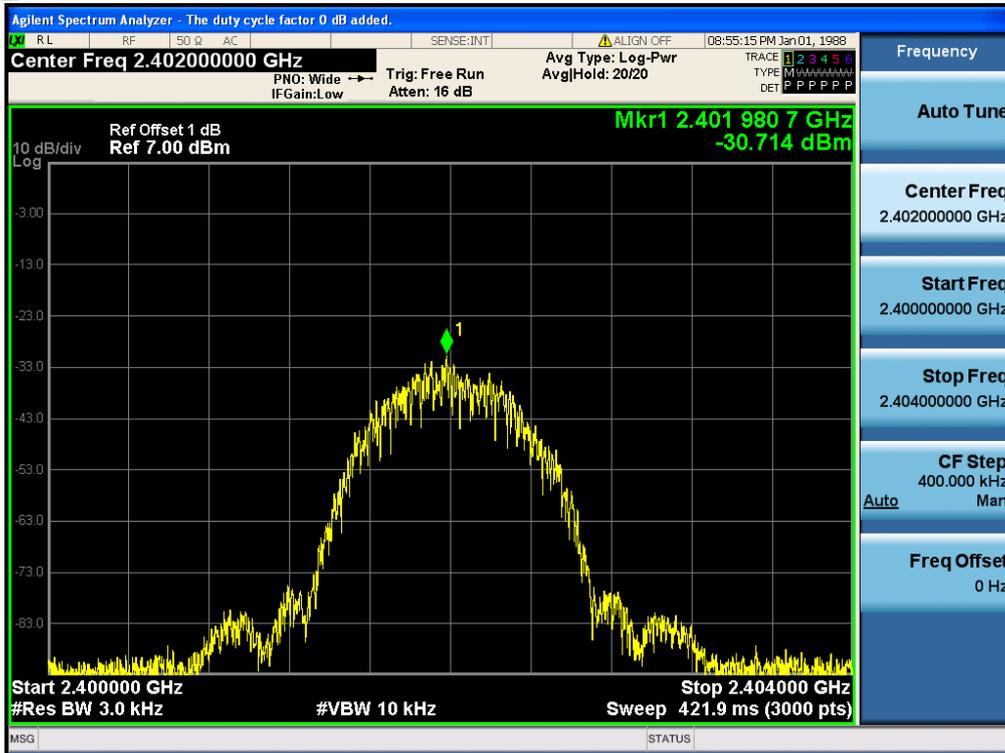

GFSK Middle Channel

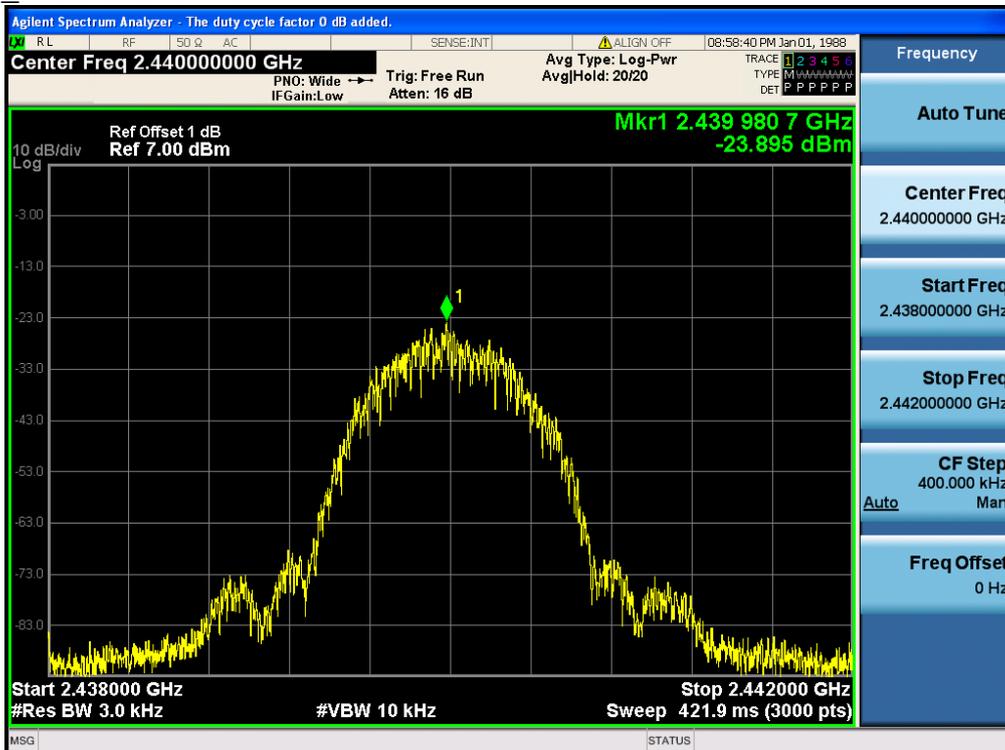


GFSK_Highest Channel

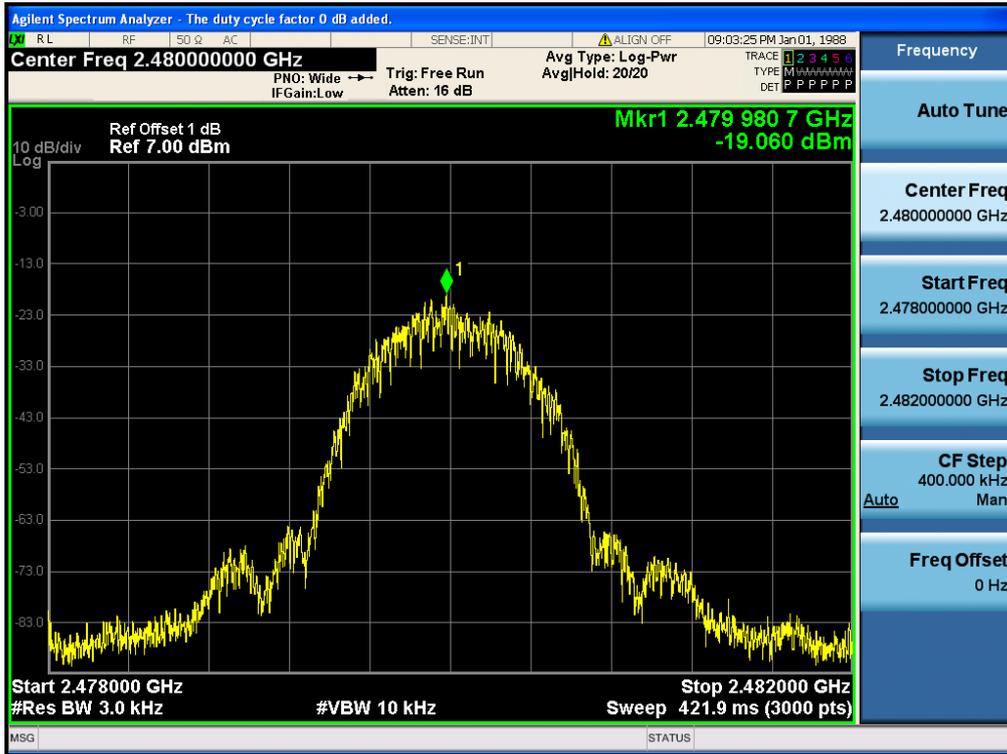


8 Band-edge for RF Conducted Emissions

8.1 Test plots

GFSK Lowest Channel

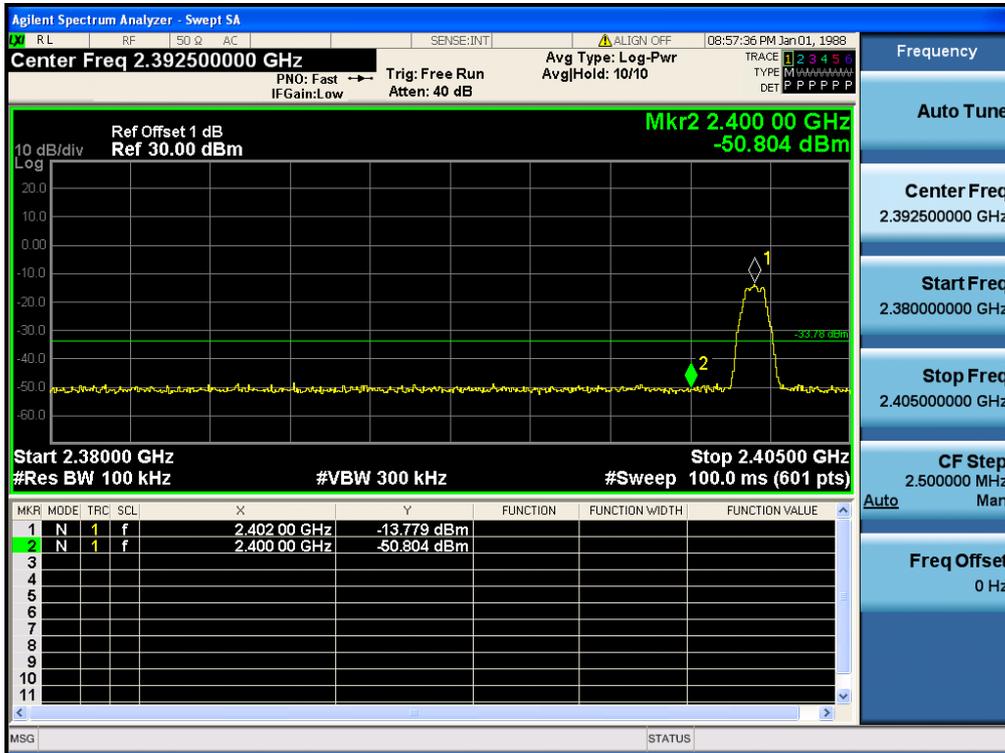


GFSK Highest Channel

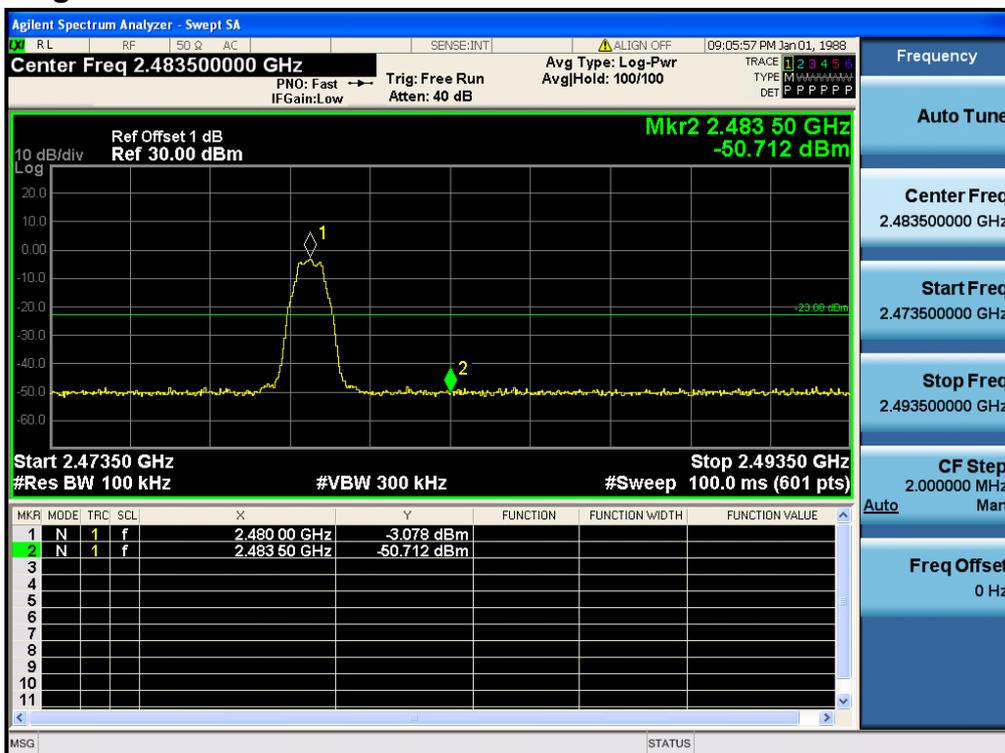



9 Spurious RF Conducted Emissions


9.1 Test plots:

GFSK_Lowest Channel

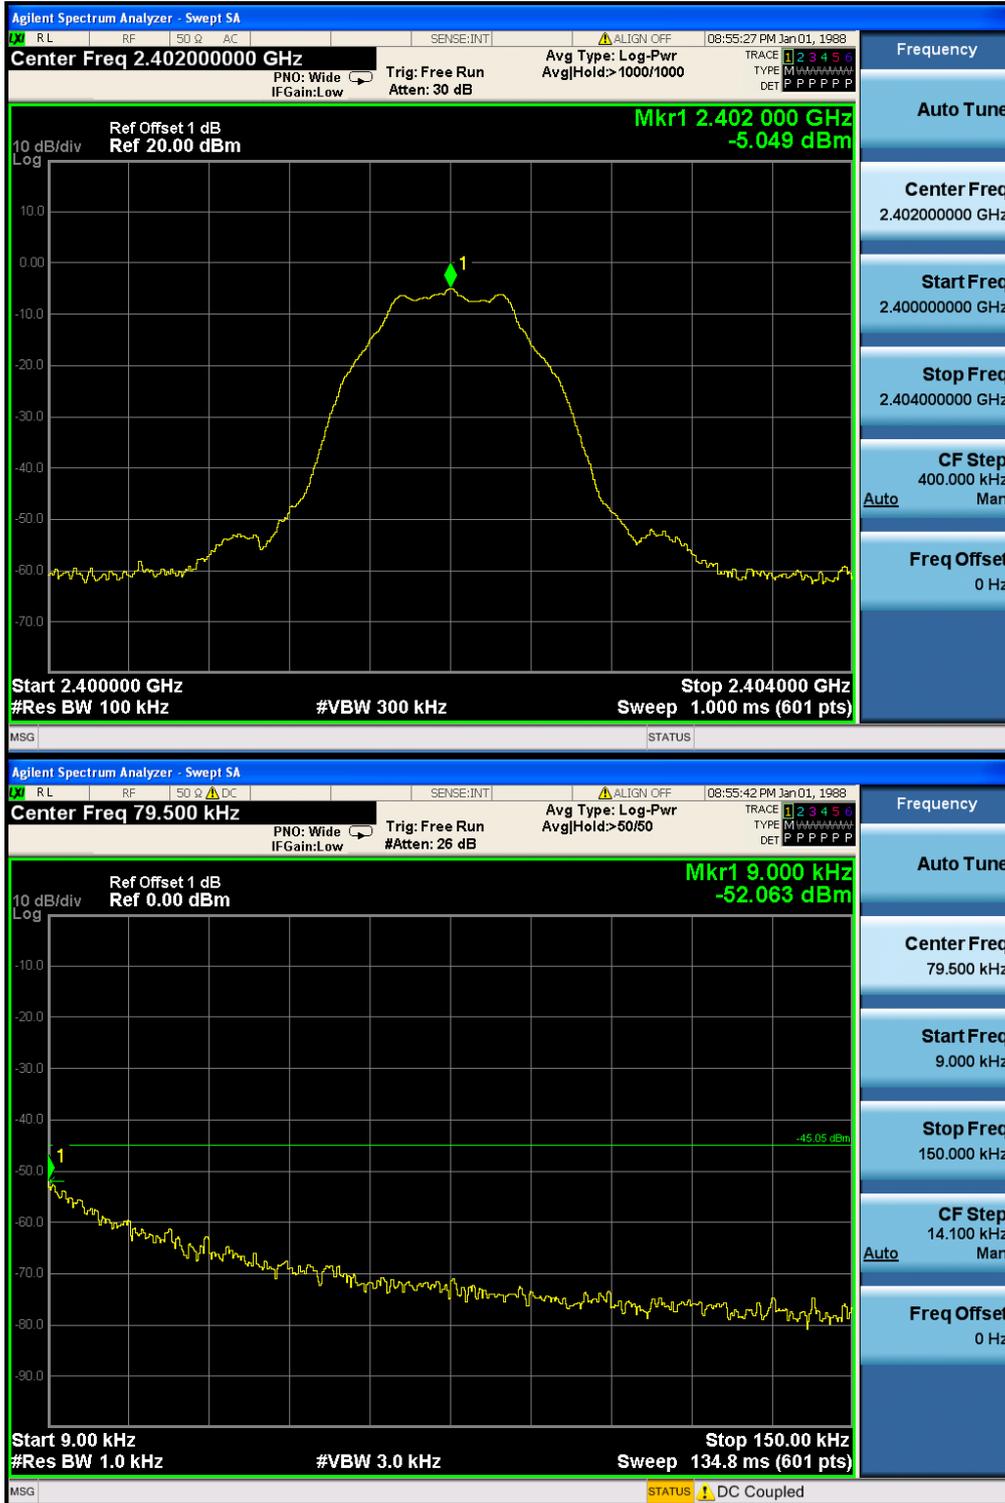

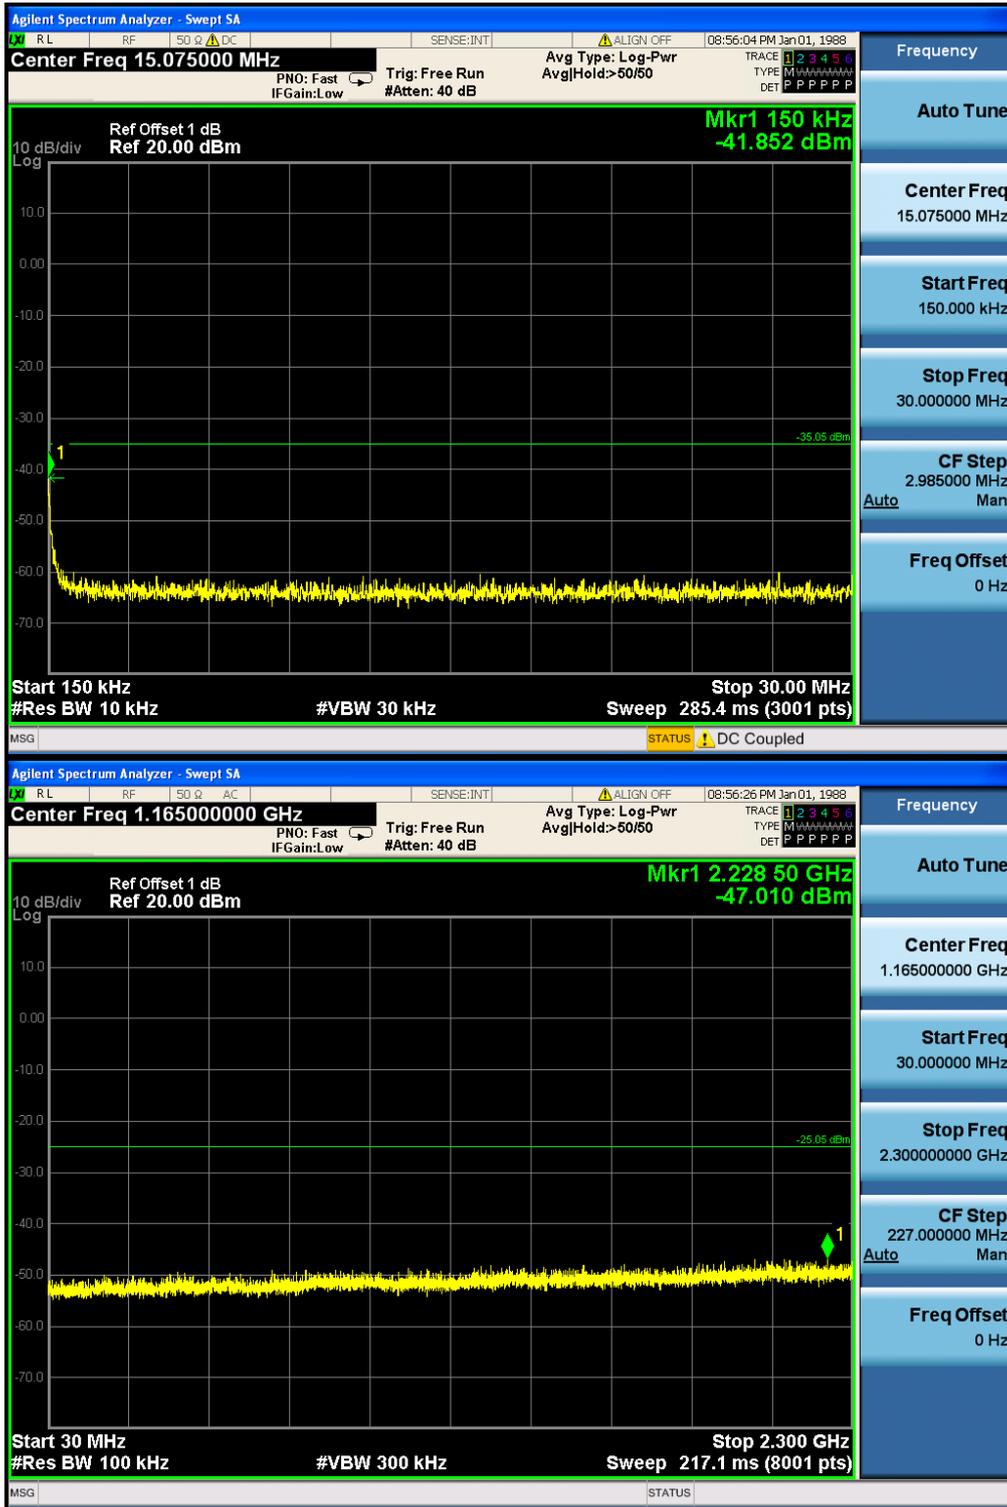


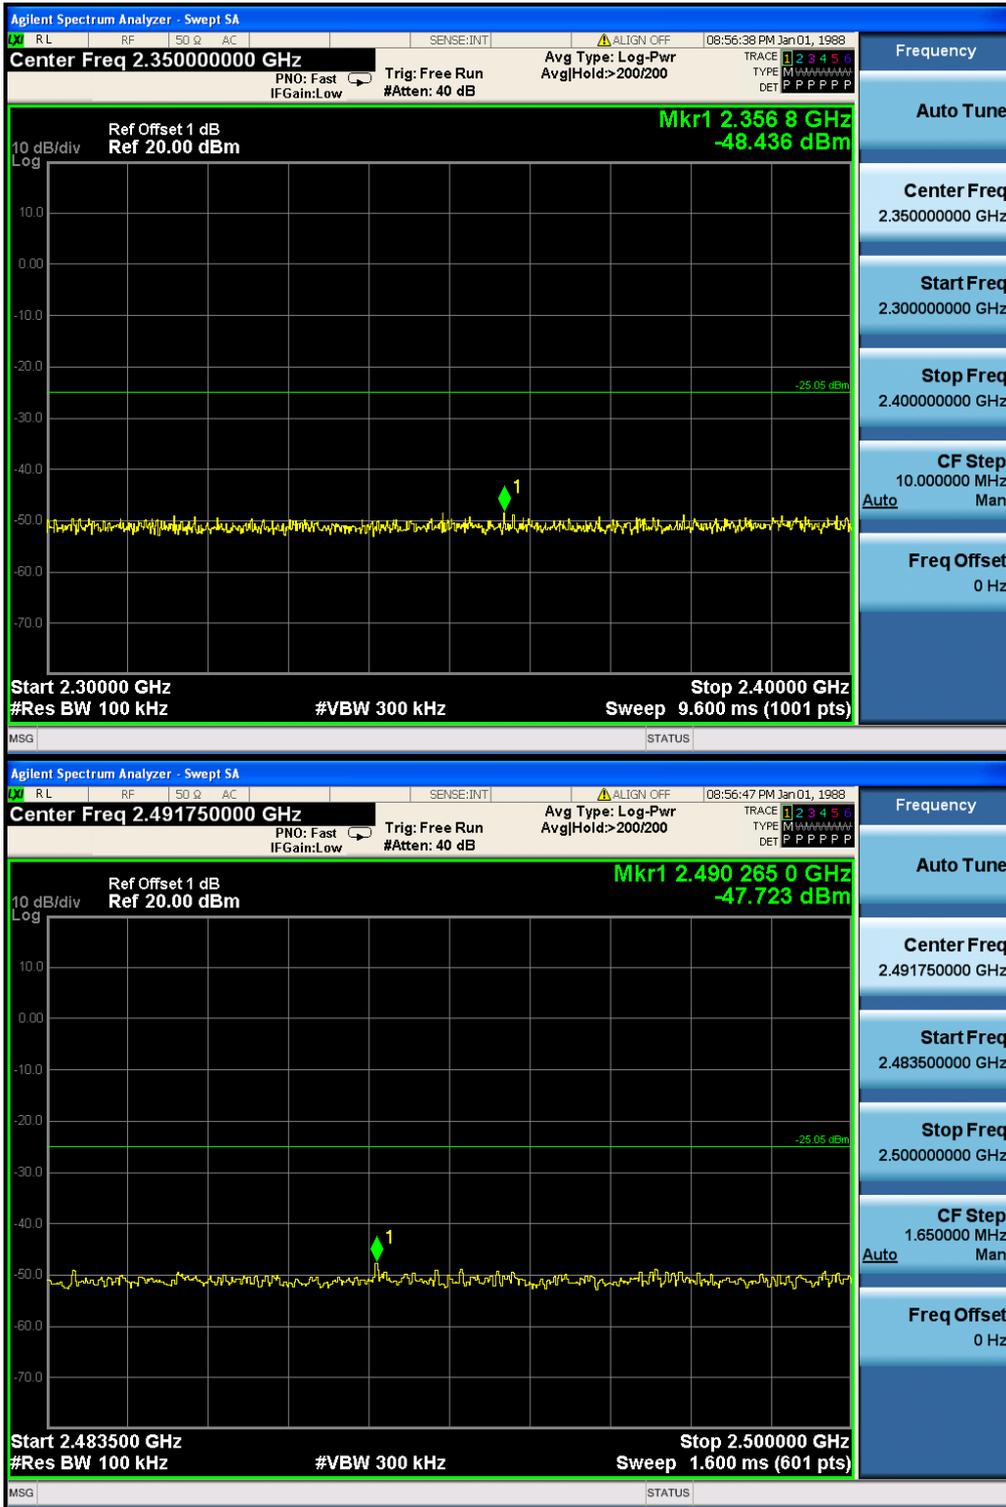

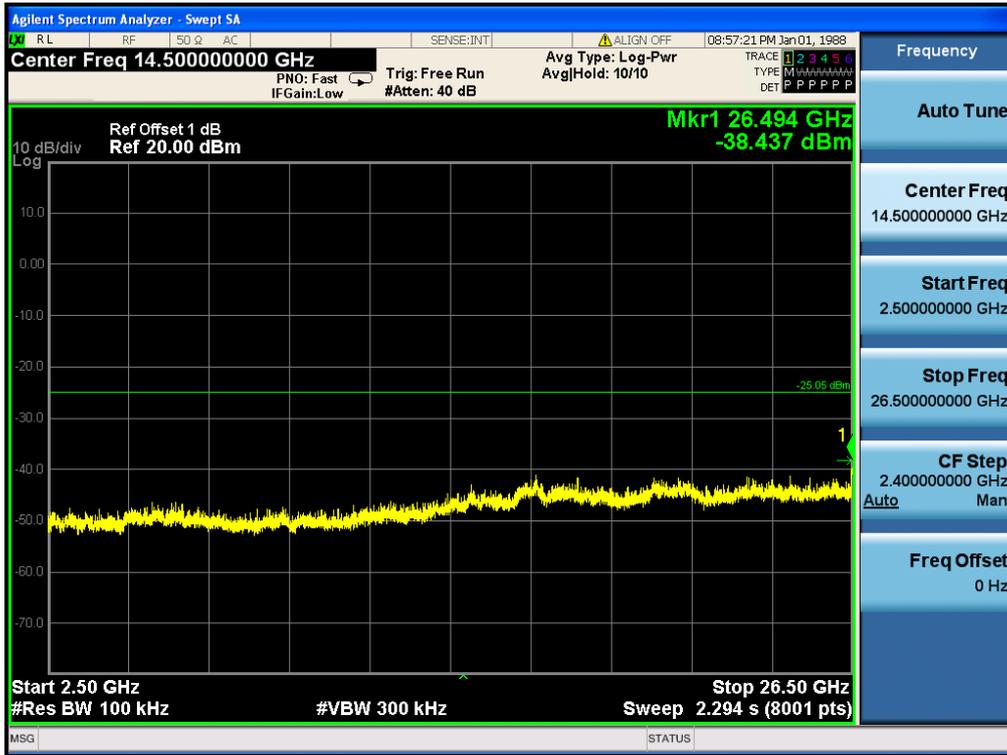

GFSK _Middle Channel




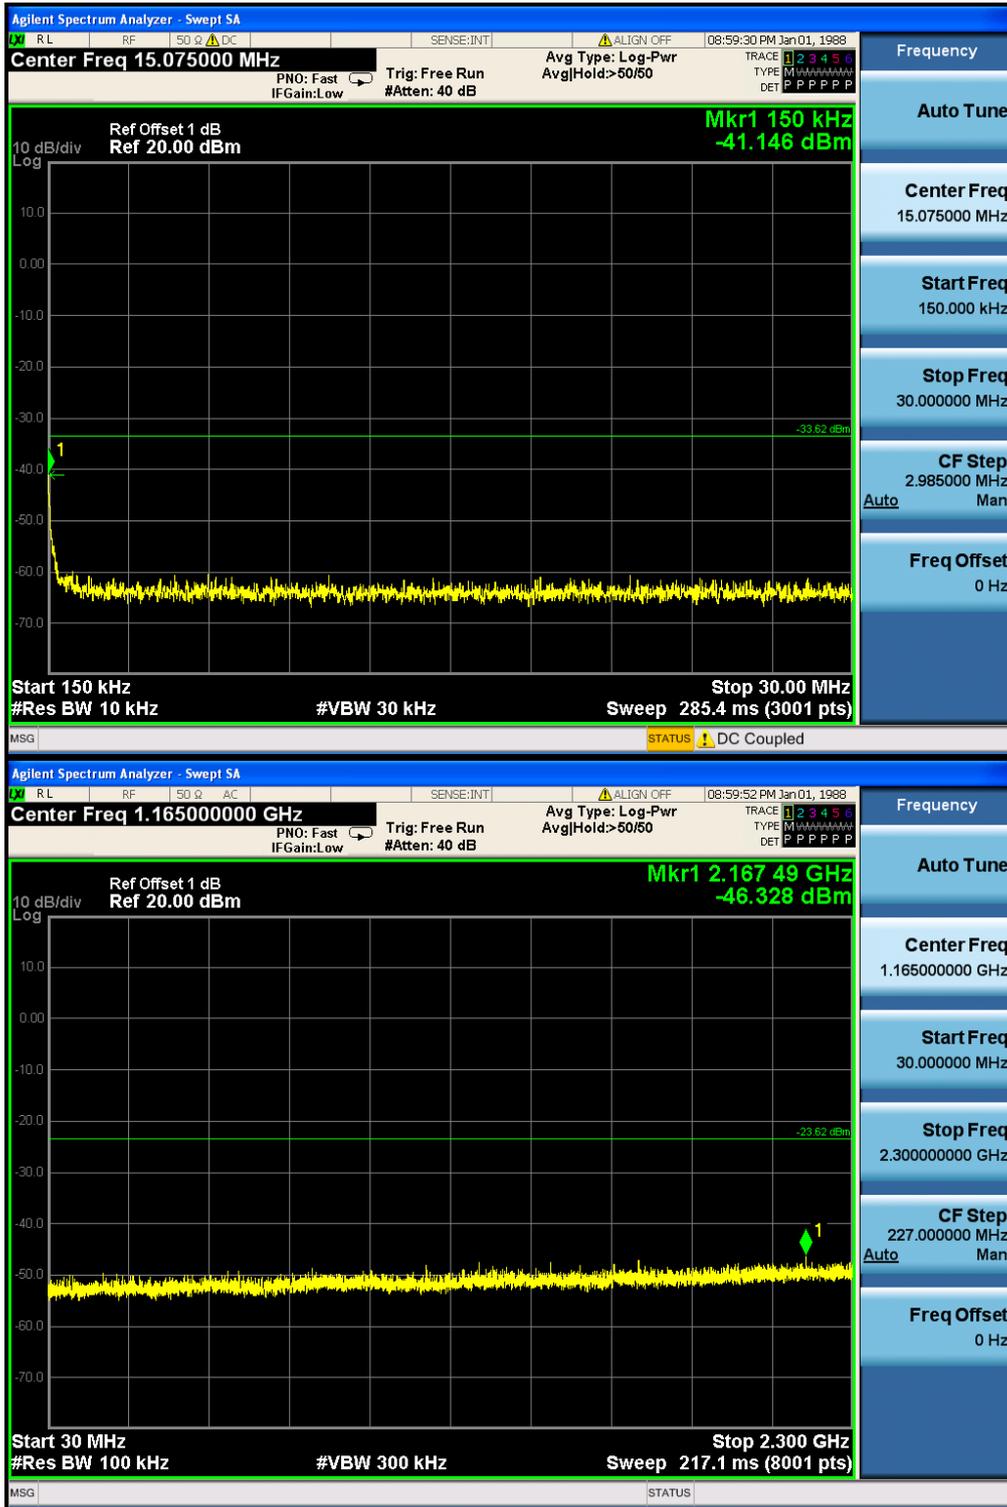



GFSK Highest Channel




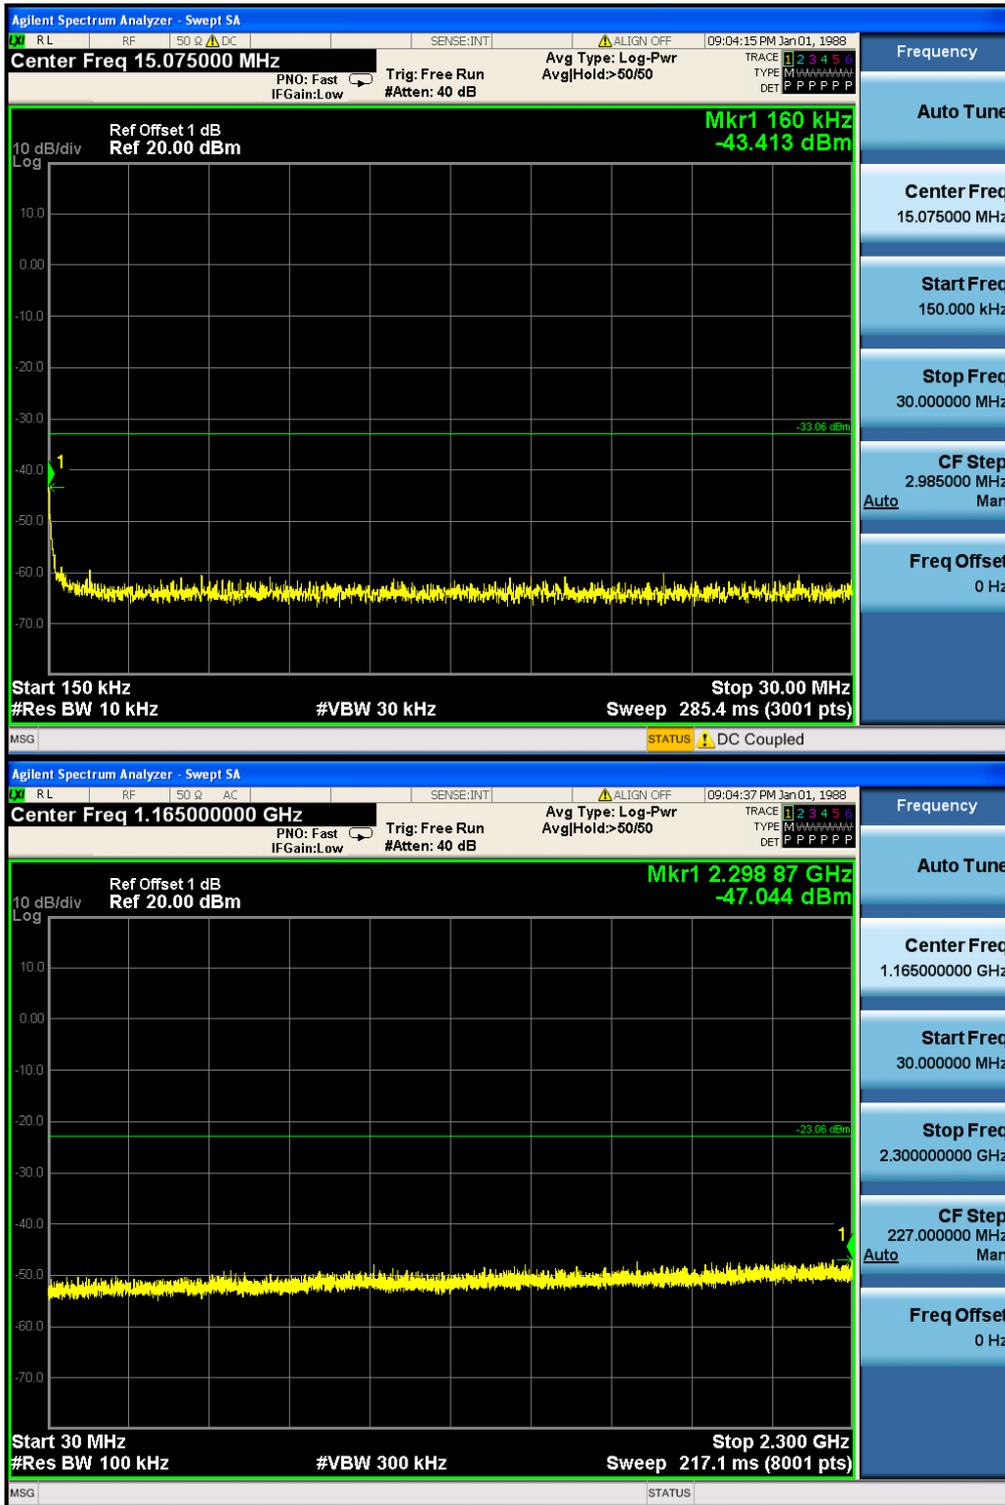

JianYan Testing Group Shenzhen Co., Ltd.

Report No: JYTSZB-R12-2102955



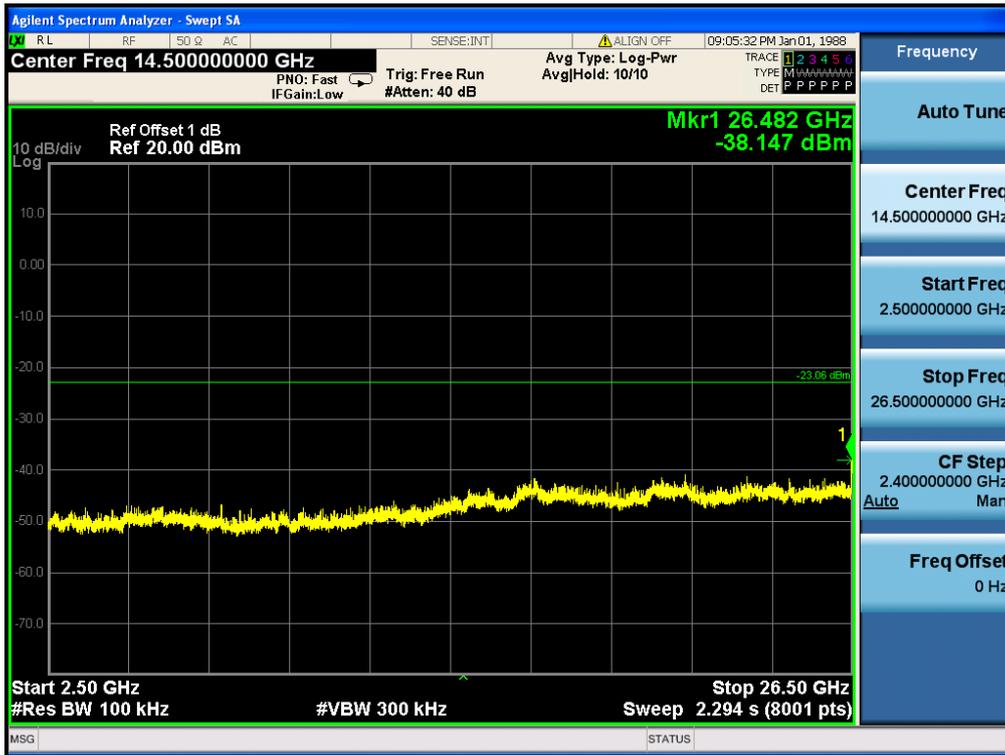

Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.