

EMC TEST REPORT



Report No.: 17070978-FCC-E

Supersede Report No: N/A

Applicant	BLU Products, Inc.	
Product Name	Mobile Phone	
Model No.	DASH L5 LTE	
Serial No.	DASH L5X	
Test Standard	FCC Part 15 Subpart B Class B:2016, ANSI C63.4: 2014	
Test Date	September 26 to October 15, 2017	
Issue Date	October 16, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
<i>Evans He</i>	<i>David Huang</i>	
Evans He Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070978-FCC-E
Page	3 of 39

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	10
6.2 RADIATED EMISSIONS.....	16
ANNEX A. TEST INSTRUMENT.....	21
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	22
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	35
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	38
ANNEX E. DECLARATION OF SIMILARITY.....	39

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070978-FCC-E	NONE	Original	October 16, 2017

2. Customer information

Applicant Name	BLU Products, Inc.
Applicant Add	10814 NW 33rd St # 100 Doral, FL 33172
Manufacturer	BLU Products, Inc.
Manufacturer Add	10814 NW 33rd St # 100 Doral, FL 33172

3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMG(ver.lcp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	DASH L5 LTE
Serial Model:	DASH L5X
Antenna Gain:	GSM850: -2dBi PCS1900: -1.3dBi UMTS-FDD Band V: -2dBi UMTS-FDD Band IV: -1.5dBi UMTS-FDD Band II: -2dBi LTE Band II: -1.5dBi LTE Band IV: -1.6dBi LTE Band VII:-1.8dBi LTE Band XII: -2.1dBi LTE Band XVII: -2dBi Bluetooth/BLE: -2dBi WIFI: -2dBi GPS: -1dBi
Antenna Type:	IFA Antenna
Input Power:	Adapter: Model: TPA-46B050070UU Input: AC100-240V~50/60Hz,0.2A Output: DC 5V~0.7A Battery: Model: C705145200L Spec: 3.8V, 2000mAh, 7.60Wh
Equipment Category :	JBP



Test Report	17070978-FCC-E
Page	8 of 39

Trade Name :



FCC ID:

YHLBLUDSL5LTE

Date EUT received:

September 25, 2017

Test Date(s):

September 26 to October 15, 2017

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty

Parameter	Uncertainty
AC Power Line Conducted Emissions (150kHz~30MHz)	±3.11dB
Radiated Emission(30MHz~1GHz)	±5.12dB
Radiated Emission(1GHz~6GHz)	±5.34dB


6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	54%
Atmospheric Pressure	1020mbar
Test date :	September 28, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dBµV)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

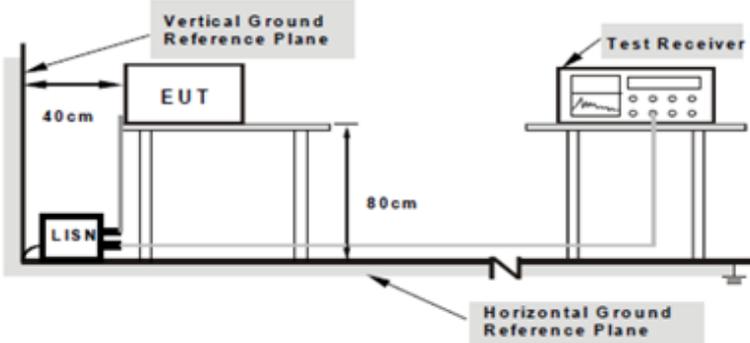Test Setup	 <p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	---

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains.
-----------	--


Test Report	17070978-FCC-E
Page	11 of 39

	<ol style="list-style-type: none"> 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode : USB Mode

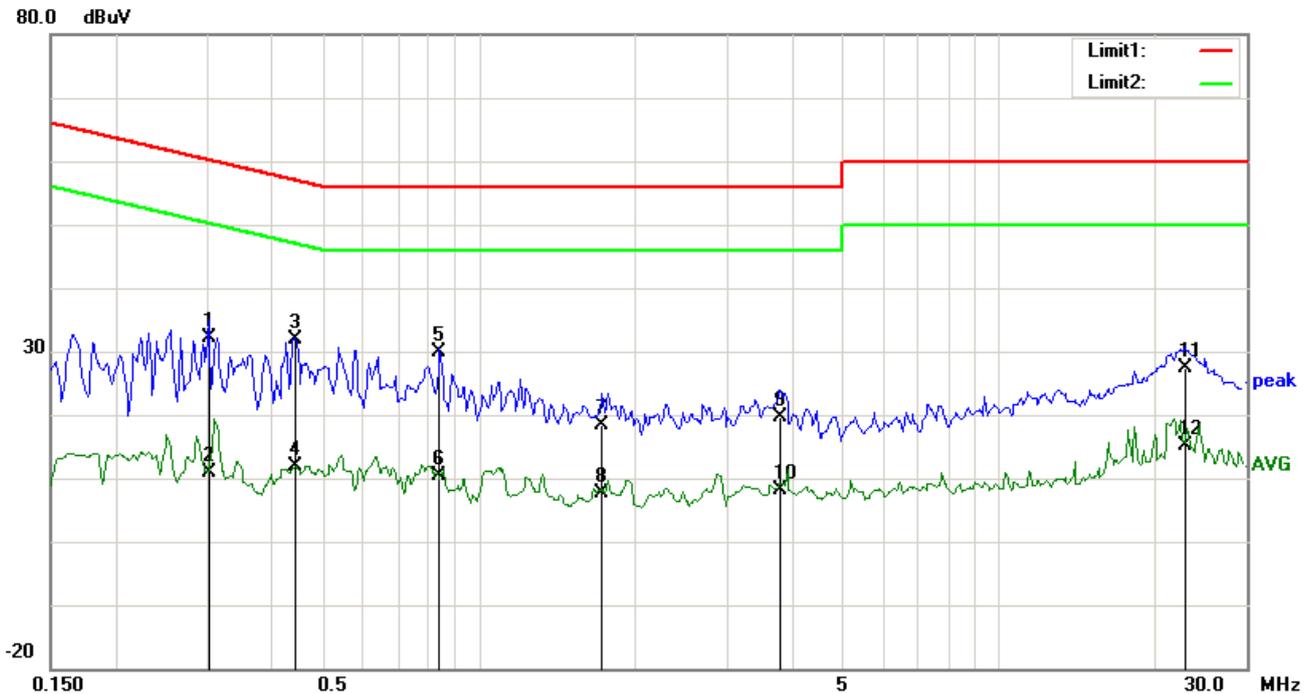


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.3021	22.04	QP	10.03	32.07	60.18	-28.11
2	L1	0.3021	0.87	AVG	10.03	10.90	50.18	-39.28
3	L1	0.4464	21.93	QP	10.03	31.96	56.94	-24.98
4	L1	0.4464	1.83	AVG	10.03	11.86	46.94	-35.08
5	L1	0.8403	19.76	QP	10.03	29.79	56.00	-26.21
6	L1	0.8403	0.32	AVG	10.03	10.35	46.00	-35.65
7	L1	1.7295	8.31	QP	10.04	18.35	56.00	-37.65
8	L1	1.7295	-2.31	AVG	10.04	7.73	46.00	-38.27
9	L1	3.7994	9.54	QP	10.06	19.60	56.00	-36.40
10	L1	3.7994	-1.86	AVG	10.06	8.20	46.00	-37.80
11	L1	22.8861	16.97	QP	10.35	27.32	60.00	-32.68
12	L1	22.8861	4.76	AVG	10.35	15.11	50.00	-34.89

Test Mode:	USB Mode
-------------------	-----------------

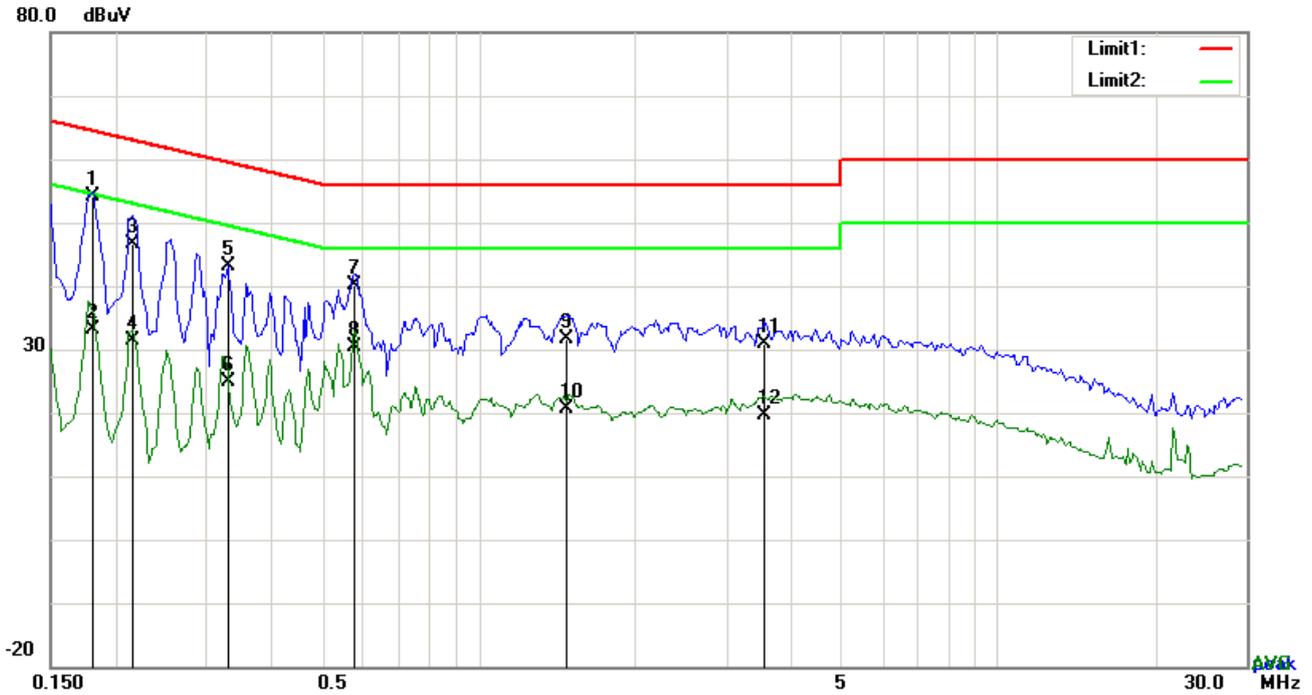


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1812	44.22	QP	10.02	54.24	64.43	-10.19
2	N	0.1812	23.08	AVG	10.02	33.10	54.43	-21.33
3	N	0.2163	36.59	QP	10.02	46.61	62.96	-16.35
4	N	0.2163	21.24	AVG	10.02	31.26	52.96	-21.70
5	N	0.3294	33.14	QP	10.02	43.16	59.47	-16.31
6	N	0.3294	14.95	AVG	10.02	24.97	49.47	-24.50
7	N	0.5790	30.22	QP	10.02	40.24	56.00	-15.76
8	N	0.5790	20.34	AVG	10.02	30.36	46.00	-15.64
9	N	1.4760	21.50	QP	10.03	31.53	56.00	-24.47
10	N	1.4760	10.67	AVG	10.03	20.70	46.00	-25.30
11	N	3.5616	20.93	QP	10.06	30.99	56.00	-25.01
12	N	3.5616	9.65	AVG	10.06	19.71	46.00	-26.29

Test Mode :	USB Mode
--------------------	-----------------

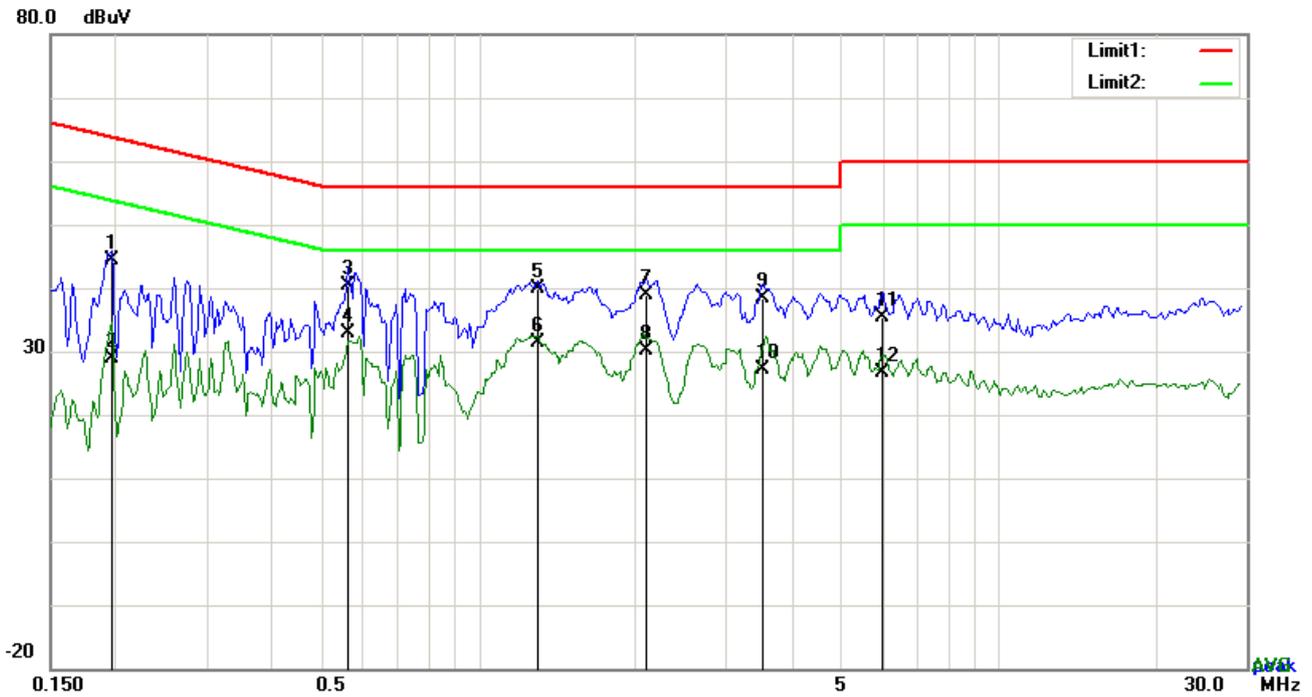


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1968	34.31	QP	10.03	44.34	63.74	-19.40
2	L1	0.1968	18.95	AVG	10.03	28.98	53.74	-24.76
3	L1	0.5595	30.30	QP	10.03	40.33	56.00	-15.67
4	L1	0.5595	22.97	AVG	10.03	33.00	46.00	-13.00
5	L1	1.2966	29.96	QP	10.03	39.99	56.00	-16.01
6	L1	1.2966	21.30	AVG	10.03	31.33	46.00	-14.67
7	L1	2.1000	28.89	QP	10.04	38.93	56.00	-17.07
8	L1	2.1000	20.02	AVG	10.04	30.06	46.00	-15.94
9	L1	3.5187	28.33	QP	10.06	38.39	56.00	-17.61
10	L1	3.5187	17.10	AVG	10.06	27.16	46.00	-18.84
11	L1	5.9913	25.31	QP	10.09	35.40	60.00	-24.60
12	L1	5.9913	16.64	AVG	10.09	26.73	50.00	-23.27

Test Mode : USB Mode

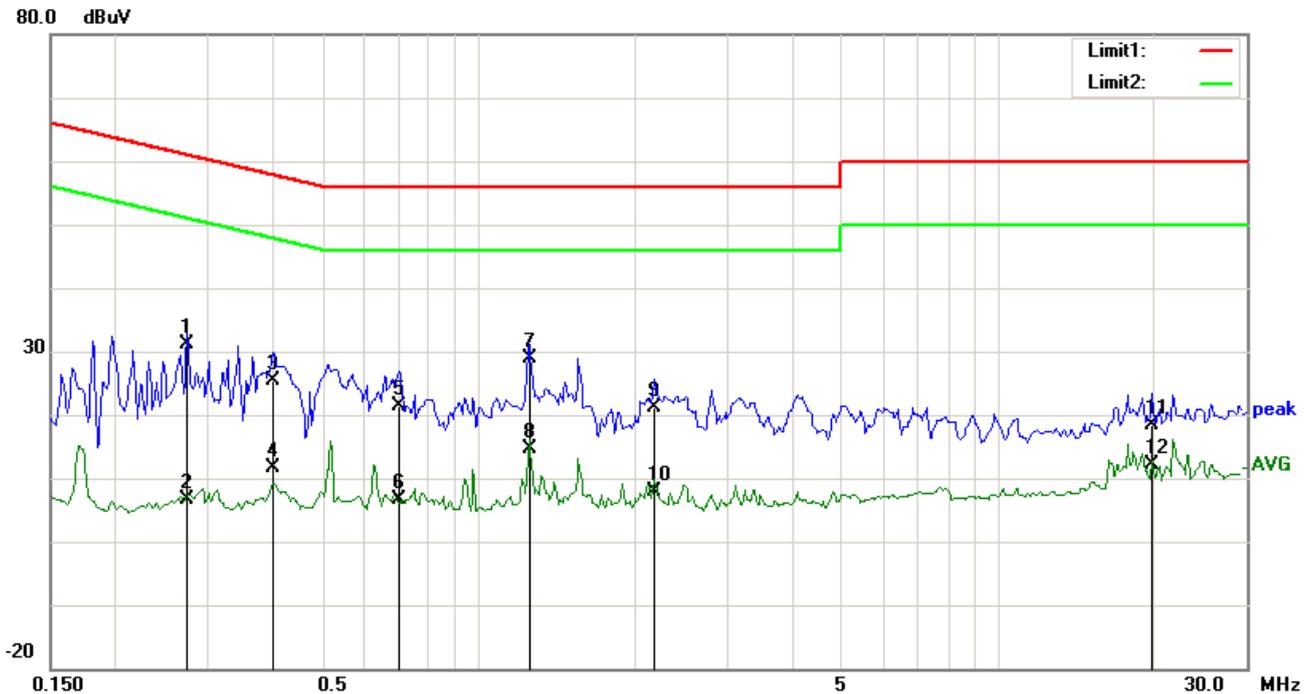

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.2748	21.02	QP	10.02	31.04	60.97	-29.93
2	N	0.2748	-3.34	AVG	10.02	6.68	50.97	-44.29
3	N	0.4035	15.48	QP	10.02	25.50	57.78	-32.28
4	N	0.4035	1.53	AVG	10.02	11.55	47.78	-36.23
5	N	0.7038	11.44	QP	10.02	21.46	56.00	-34.54
6	N	0.7038	-3.49	AVG	10.02	6.53	46.00	-39.47
7	N	1.2498	18.87	QP	10.03	28.90	56.00	-27.10
8	N	1.2498	4.69	AVG	10.03	14.72	46.00	-31.28
9	N	2.1741	10.97	QP	10.04	21.01	56.00	-34.99
10	N	2.1741	-2.14	AVG	10.04	7.90	46.00	-38.10
11	N	19.7115	8.04	QP	10.26	18.30	60.00	-41.70
12	N	19.7115	1.83	AVG	10.26	12.09	50.00	-37.91

6.2 Radiated Emissions

Temperature	23°C
Relative Humidity	54%
Atmospheric Pressure	1020mbar
Test date :	September 28, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.109(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>										
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength ($\mu\text{V}/\text{m}$)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 - 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	30 – 88	100	88 – 216	150	216 - 960	200	Above 960	500
		Frequency range (MHz)		Field Strength ($\mu\text{V}/\text{m}$)									
		30 – 88		100									
		88 – 216		150									
216 - 960	200												
Above 960	500												

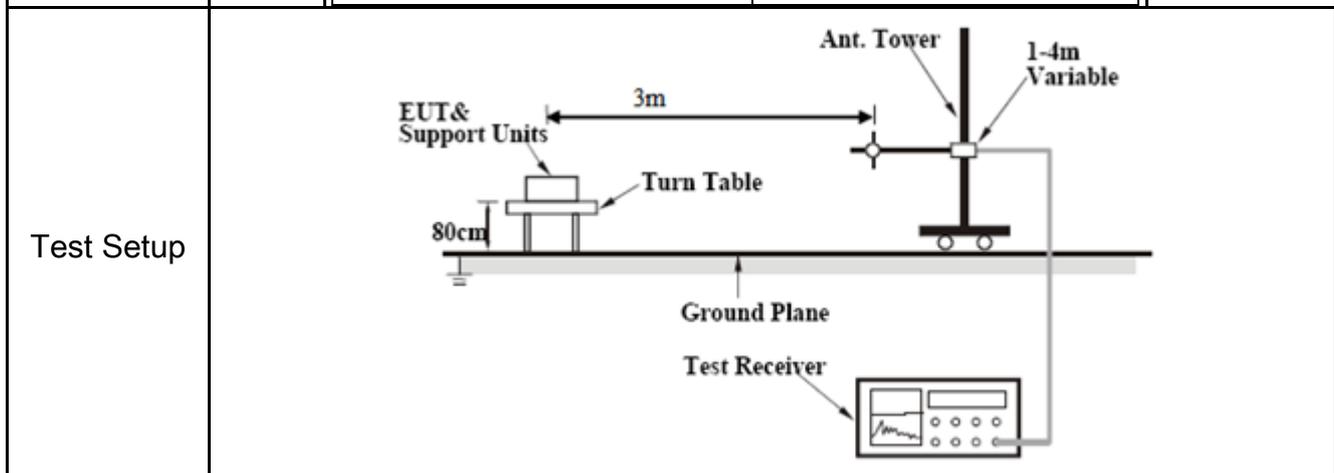

Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level
-----------	---


	<p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <ul style="list-style-type: none"> ■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%) <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode :	USB Mode
--------------------	-----------------

Below 1GHz

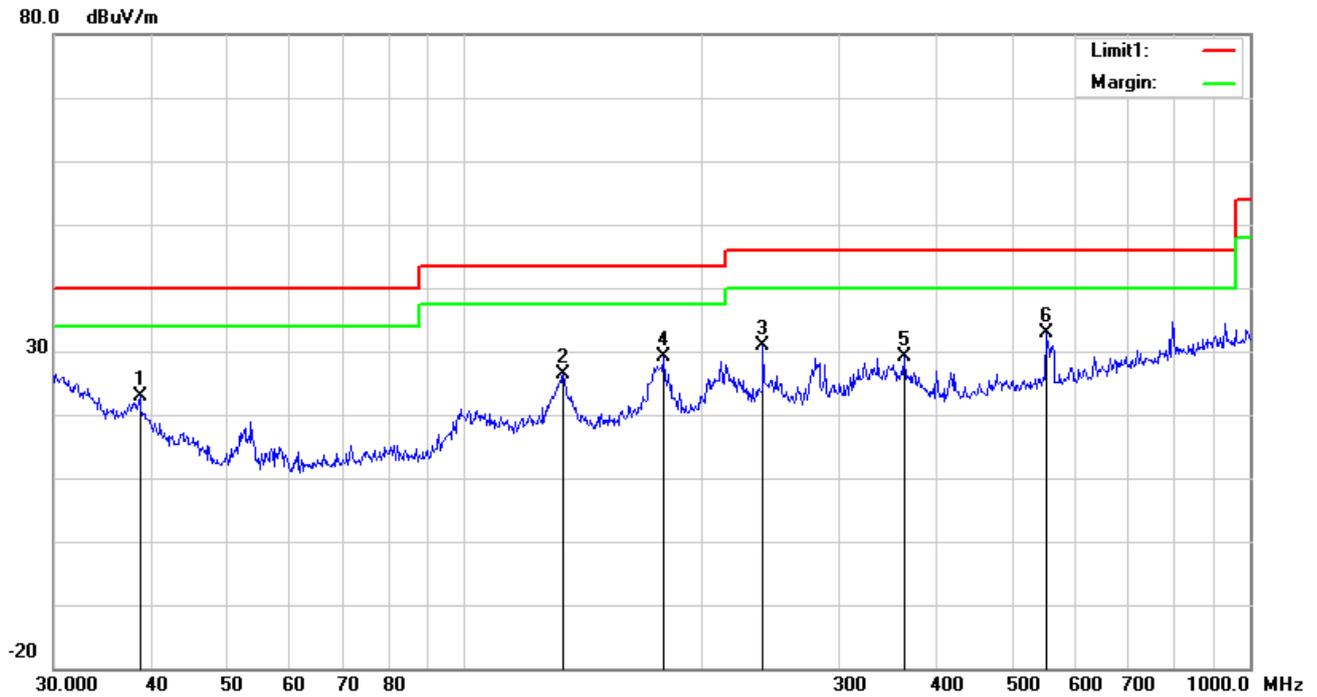


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	38.6161	29.54	peak	14.91	22.27	0.78	22.96	40.00	-17.04	100	119
2	H	133.6188	34.46	peak	13.01	22.39	1.23	26.31	43.50	-17.19	100	12
3	H	239.9873	40.00	peak	11.54	22.31	1.67	30.90	46.00	-15.10	100	300
4	H	179.3864	38.98	peak	11.05	22.25	1.36	29.14	43.50	-14.36	100	22
5	H	362.9845	34.35	peak	14.92	22.11	2.03	29.19	46.00	-16.81	100	13
6	H	550.9480	33.59	peak	18.41	21.69	2.48	32.79	46.00	-13.21	100	114

Below 1GHz

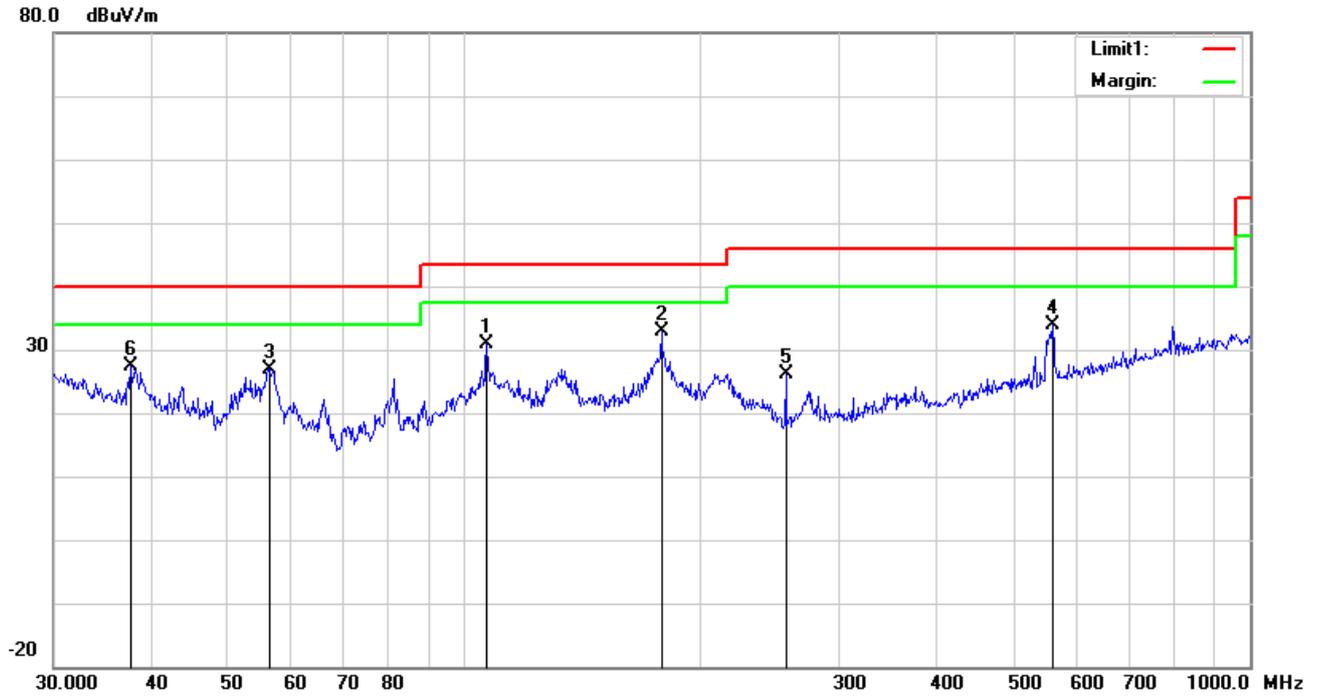

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	V	106.7587	40.47	peak	11.58	22.33	1.15	30.87	43.50	-12.63	100	100
2	V	178.1327	42.54	peak	11.15	22.25	1.36	32.80	43.50	-10.70	100	152
3	V	56.5929	40.80	peak	7.67	22.40	0.77	26.84	40.00	-13.16	100	254
4	V	560.6928	34.62	peak	18.55	21.67	2.48	33.98	46.00	-12.02	100	340
5	V	256.5211	34.96	peak	11.69	22.29	1.71	26.07	46.00	-19.93	100	187
6	V	37.5479	33.18	peak	15.69	22.27	0.78	27.38	40.00	-12.62	100	88

Above 1GHz

Frequency (MHz)	Read_level (dB μ V/m)	Azimuth	Height (cm)	Polarity (H/V)	Level (dB μ V/m)	Factors (dB)	Limit (dB μ V/m)	Margin (dB)	Detector (PK/AV)
1346.8	64.58	117	100	V	-19.42	45.16	74	-28.84	PK
1524.7	62.94	130	100	V	-18.21	44.73	74	-29.27	PK
1930.2	59.17	105	100	V	-15.56	43.61	74	-30.39	PK
1466.8	59.54	78	100	H	-18.95	40.59	74	-33.41	PK
1750.8	60.33	316	100	H	-16.76	43.57	74	-30.43	PK
2431.5	58.3	149	100	H	-13.65	44.65	74	-29.35	PK

*Note1: The highest frequency of the EUT is 2567.5 MHz, so the testing has been conformed to 5*2567.5MHz=12,838MHz.*

Note2: The frequency that above 3GHz is mainly from the environment noise.

Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.

Note4: The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191106	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191107	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
ISN	ISN T800	34373	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna	AH-118	71259	09/22/2017	09/21/2018	<input checked="" type="checkbox"/>
Horn Antenna	BBHA9170	3145226D1	09/27/2017	09/26/2018	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View



EUT - Front View



EUT - Rear View




EUT - Top View



EUT - Bottom View



EUT - Left View

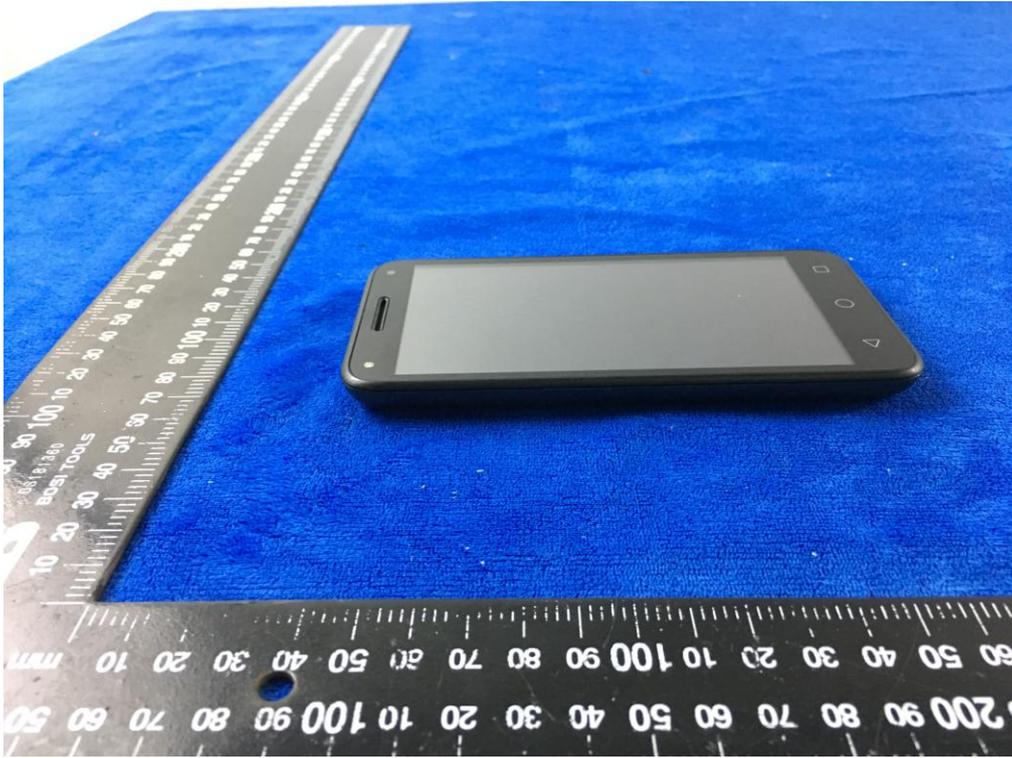

EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo

Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View




Battery - Rear View




Mainboard with Shielding - Front View

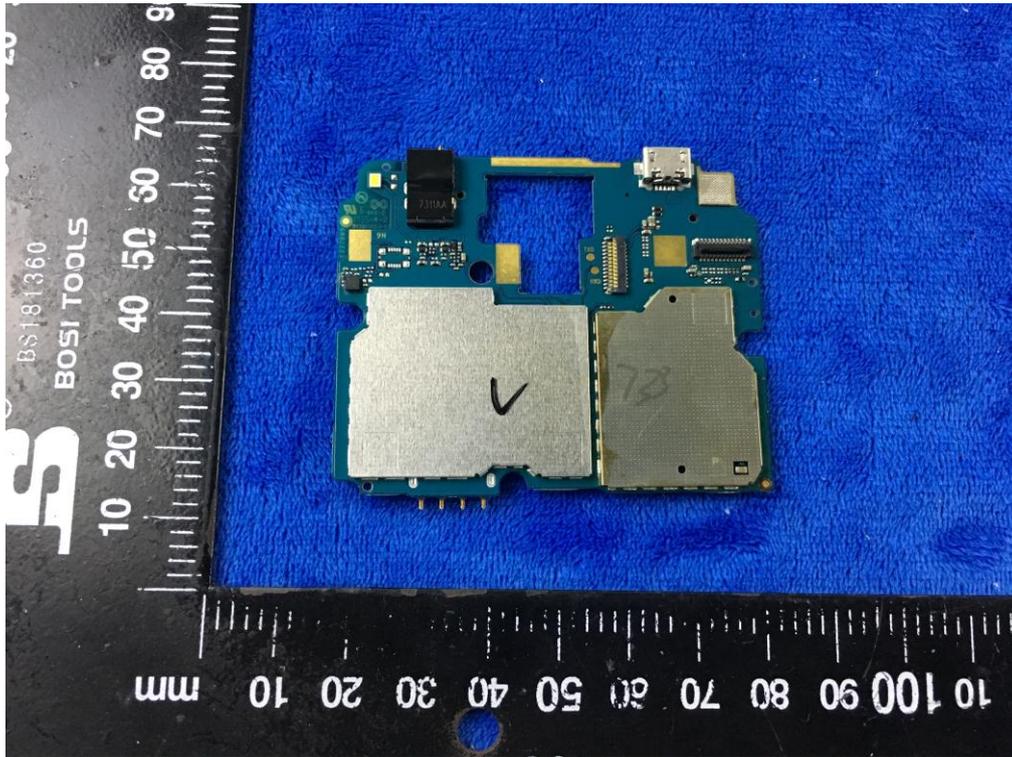


Mainboard without Shielding - Front View

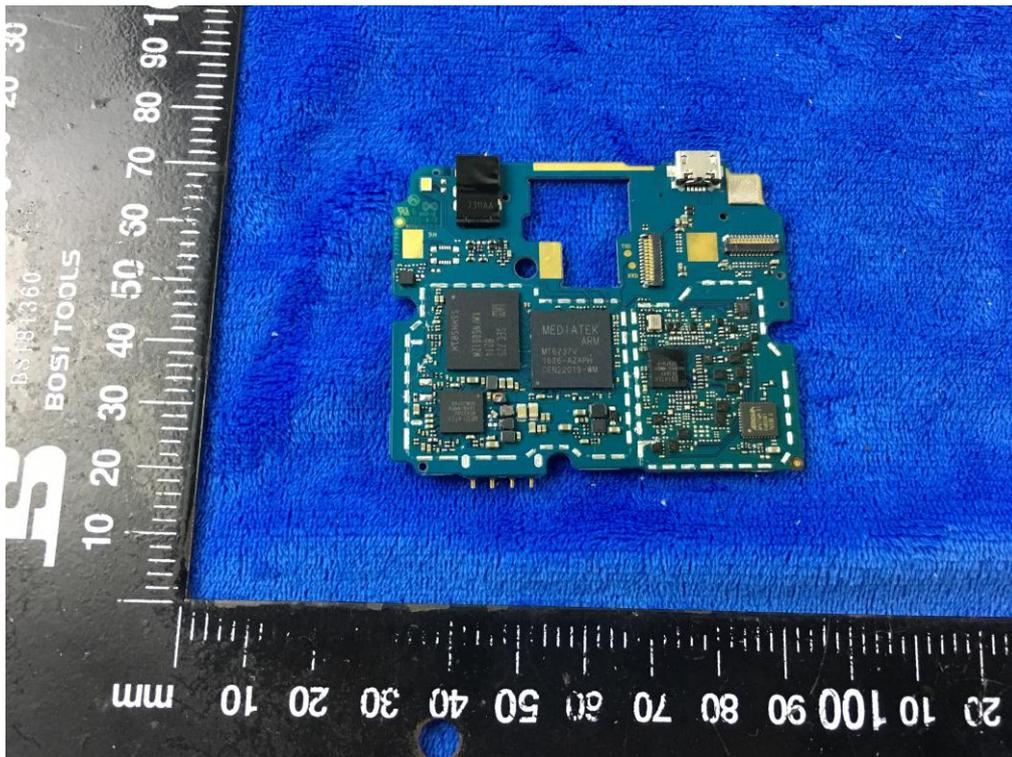


Mainboard with Shielding – Rear View

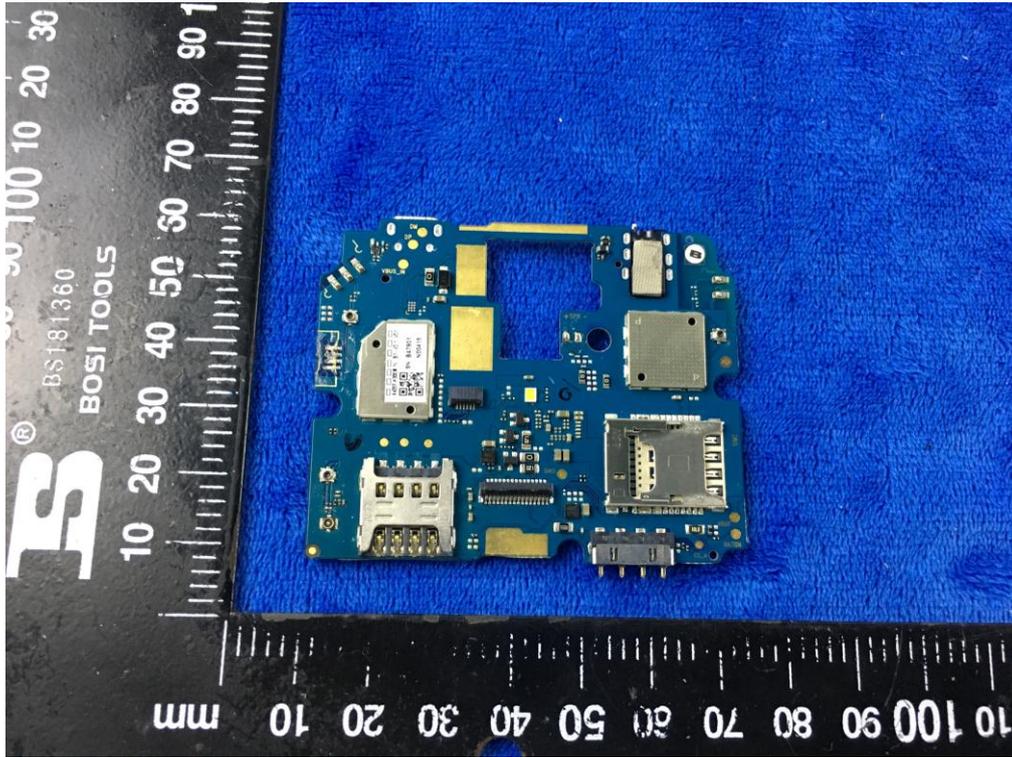


Mainboard without Shielding – Rear View

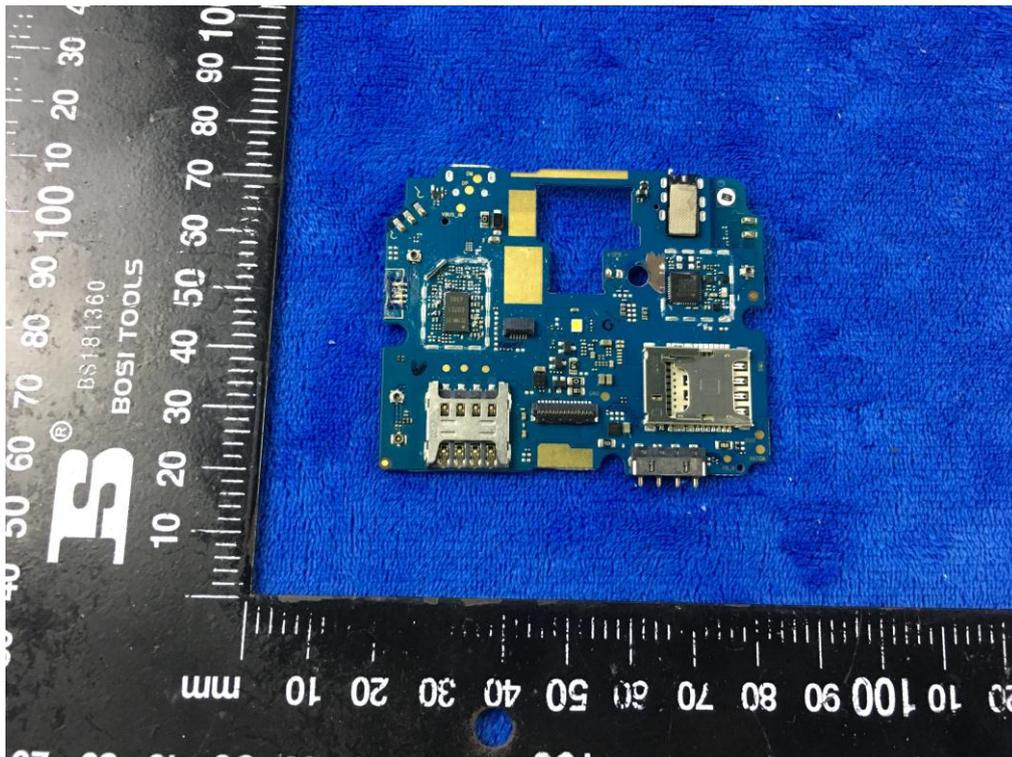

Smallboard – Front View

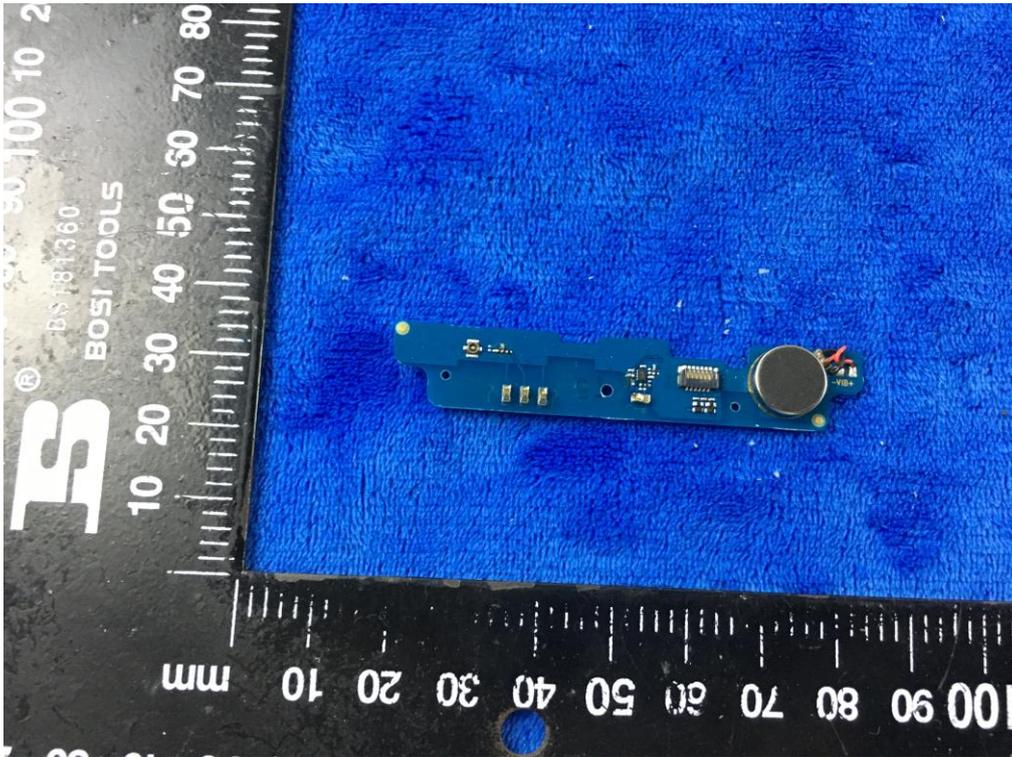

Smallboard – Rear View

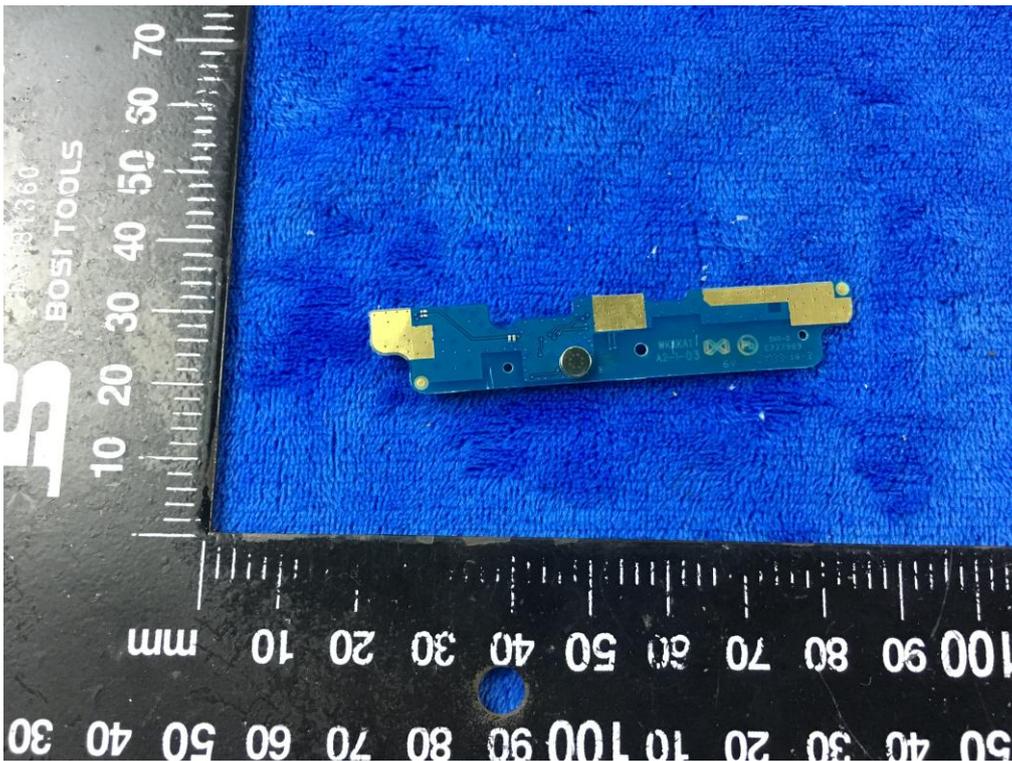

LCD – Front View



LCD – Rear View



GSM/PCS/UMTS-FDD/LTE Antenna View



WIFI/BT/BLE/GPS - Antenna View



RXD- Antenna View




Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View

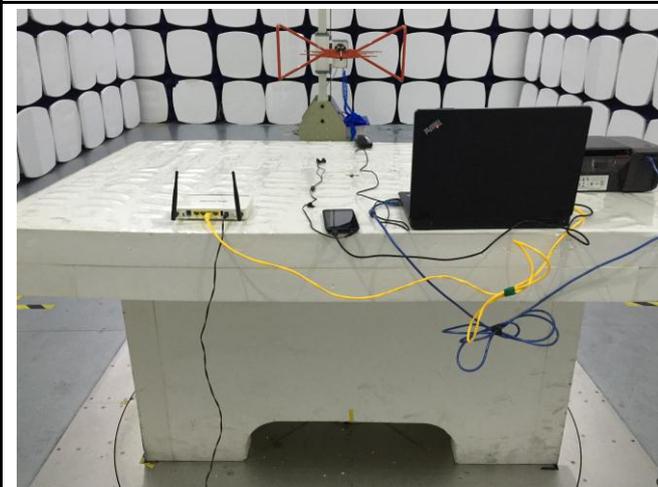

Radiated Emissions Test Setup Below 1GHz

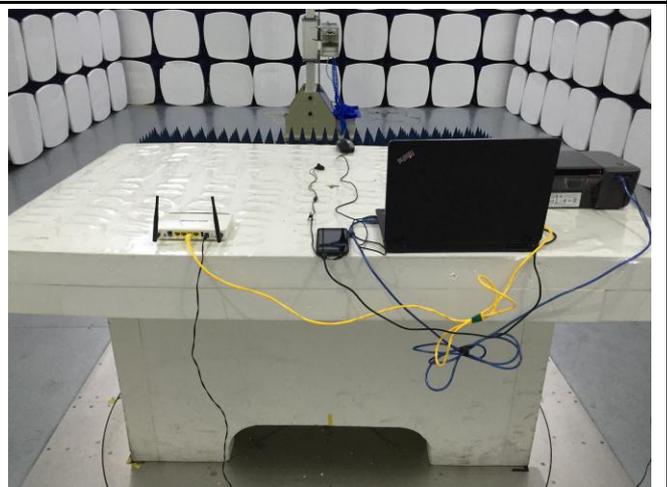


Radiated Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

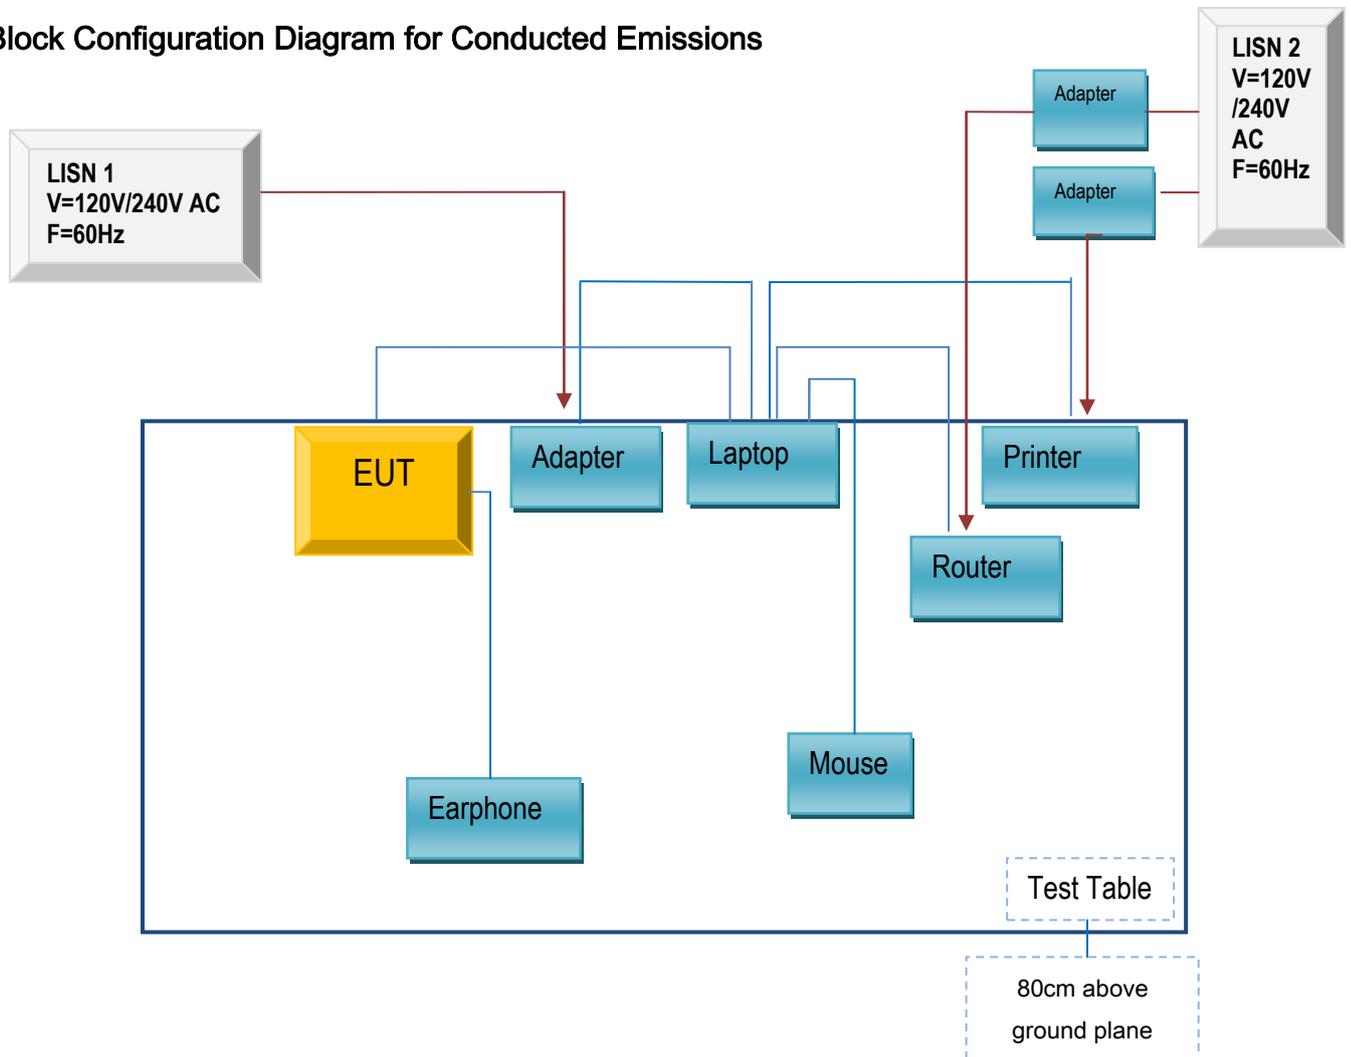

Block Configuration Diagram for Radiated Emissions

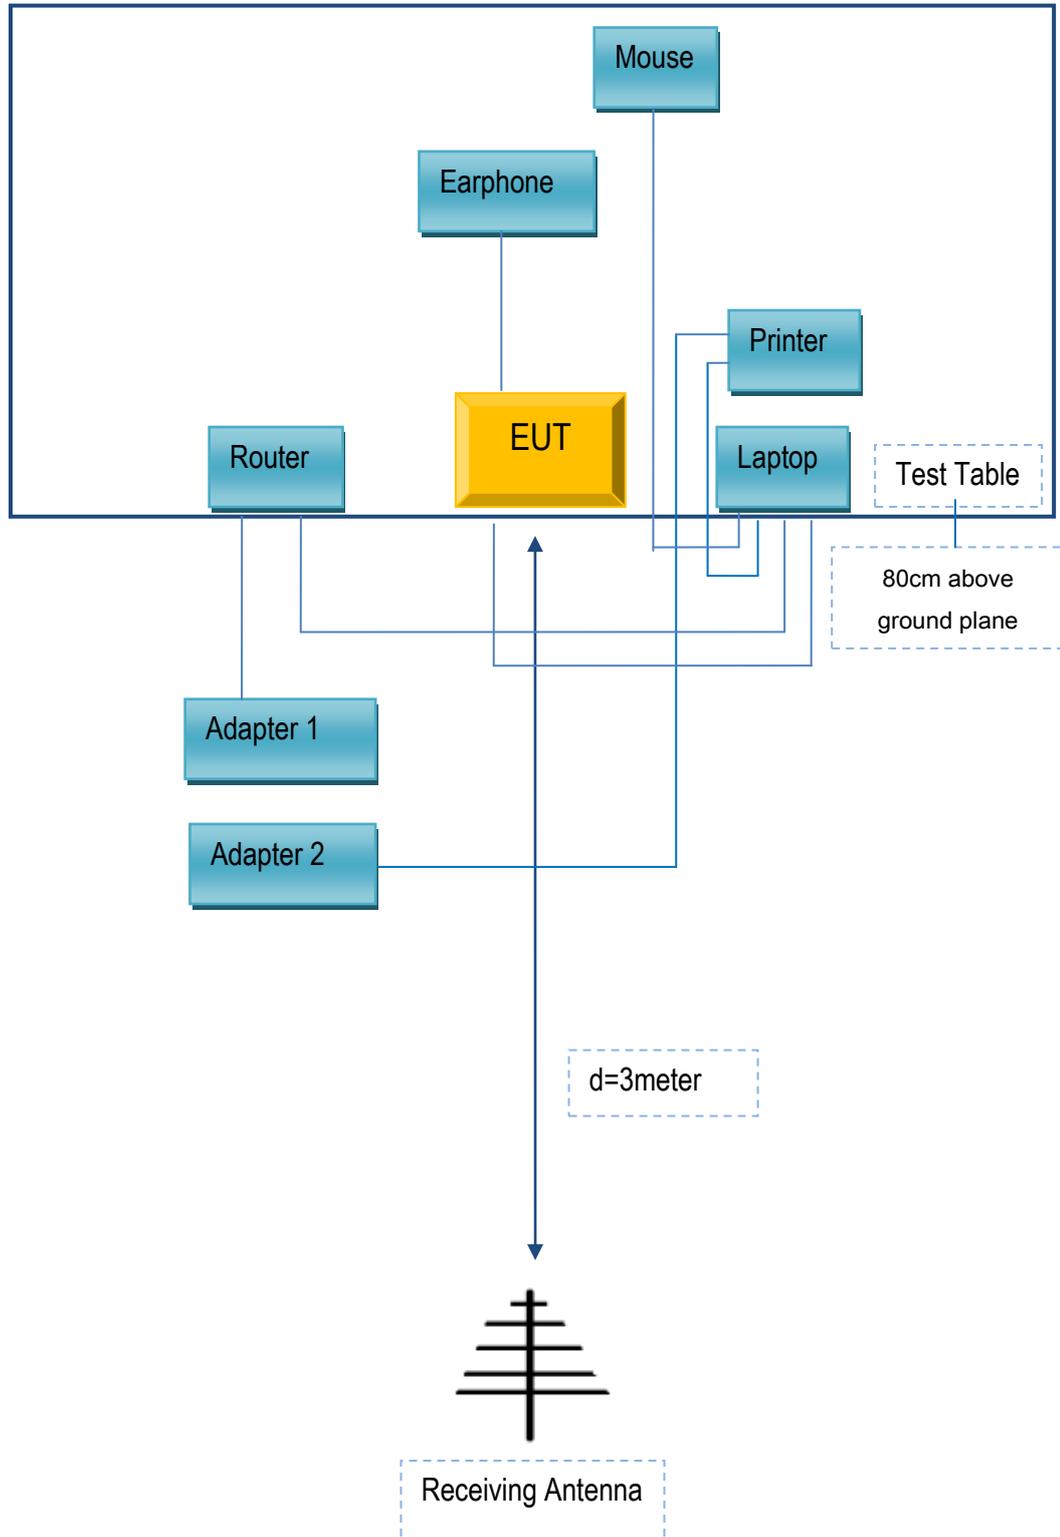

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
Lenovo	AC Adapter	42T4416	21D9JU
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
BULL	Socket	GN-403	GN201203
BLU Products, Inc.	Earphone	DASH L5 LTE	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
USB Cable	Un-shielding	No	2m	CBA3000AH0C1
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
Power Cable	Un-shielding	No	0.8m	GT211032

Test Report	17070978-FCC-E
Page	38 of 39

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

BLU Products, Inc.

To: SIEMIC,775MontagueExpressway,Milpitas,CA95035,USA

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list 2 model numbers on the FCC certificates and reports, as following:

Model No.:DASH L5 LTE,DASH L5X

We declare that, all the model PCB, Antenna and Appearance shape, accessories are the same. The difference of these is listed as below:

Main Model No.	Serial Model No.	Difference
DASH L5 LTE	DASH L5X	Different model name

Thank you!

Signature: 

Printed name/title: Zeng wei

Address: Adress :10814 NW 33rd St # 100 Doral, FL 33172