



## FCC PART 15.247

### MEASUREMENT AND TEST REPORT

For

#### Burg Realisation HongKong Limited

Flat/RM 10/F Malaysia Building 50 Gloucester Road WanChai, HongKong

**FCC ID: YIABURG12**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Watch Phone
<b>Test Engineer:</b> <u>Leon Chen</u> <i>Leon Chen</i>	
<b>Report Number:</b> <u>RSZ111117002-00A2</u>	
<b>Report Date:</b> <u>2012-09-05</u>	
<b>Reviewed By:</b> <u>Alvin Huang</u> <i>Alvin Huang</i> <u>RF Leader</u>	
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	6
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>FCC §15.247 (I) AND §2.1093 – RF EXPOSURE SAR .....</b>	<b>8</b>
APPLICABLE STANDARD .....	8
RESULT: .....	9
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT UNCERTAINTY .....	11
EUT SETUP .....	11
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	12
TEST PROCEDURE .....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	12
TEST RESULTS SUMMARY .....	13
TEST DATA .....	13
<b>FCC §15.247(a) (1) - CHANNEL SEPARATION TEST .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE .....	16
TEST DATA .....	16
<b>FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING .....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA .....	23
<b>FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST DATA .....	30

<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>34</b>
APPLICABLE STANDARD .....	34
TEST PROCEDURE .....	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA .....	34
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....</b>	<b>50</b>
APPLICABLE STANDARD .....	50
TEST PROCEDURE .....	50
TEST EQUIPMENT LIST AND DETAILS.....	50
TEST DATA .....	50
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>57</b>
APPLICABLE STANDARD .....	57
TEST PROCEDURE .....	57
TEST EQUIPMENT LIST AND DETAILS.....	57
TEST DATA .....	58

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Burg Realisation HongKong Limited*'s product, model number: *Burg 12* (FCC ID: *YIABURG12*) (the "EUT") in this report was a *Watch Phone*, which was measured approximately: 5.5 cm (W) x 4.1 cm (D) x 1.5 cm (H), rated input voltage: DC 3.7V Lithium battery.

Frequency Range:

Cellular Band: 824-849 MHz (Tx), 869-894 MHz (Rx)  
PCS Band: 1850-1910 MHz (Tx), 1930-1990 MHz (Rx)  
Bluetooth: 2400-2483.5 MHz (Tx/ Rx)

Modulation Mode: GMSK (Cellular/PCS); Bluetooth: BDR Mode (*GFSK*); EDR Mode ( $\pi/4$ -*DQPSK*)  
EDR Mode (*8DPSK*)

Transmitter Output Power:

Cellular Band:  $33 \pm 2$  dBm (maximum conducted output power = 32.64 dBm)  
PCS Band:  $30 \pm 2$  dBm (maximum conducted output power = 30.66 (dBm)  
Bluetooth:  $< -6 \sim +4$  dBm (maximum conducted output power = 1.85 (dBm)

\* All measurement and test data in this report was gathered from production sample serial number: 1111054 (Assigned by BACL, Shenzhen). The EUT was received on 2011-11-17.

### Objective

This report is prepared on behalf of *Burg Realisation HongKong Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the compliance of EUT with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 22H&24E PCE submission with FCC ID: *YIABURG12*

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is  $\pm 0.96$  dB, the uncertainty of any radiation on emissions measurement is  $\pm 4.0$  dB

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured in a testing mode which was controlled by the equipment CMU200.

### EUT Exercise Software

No exercise software.

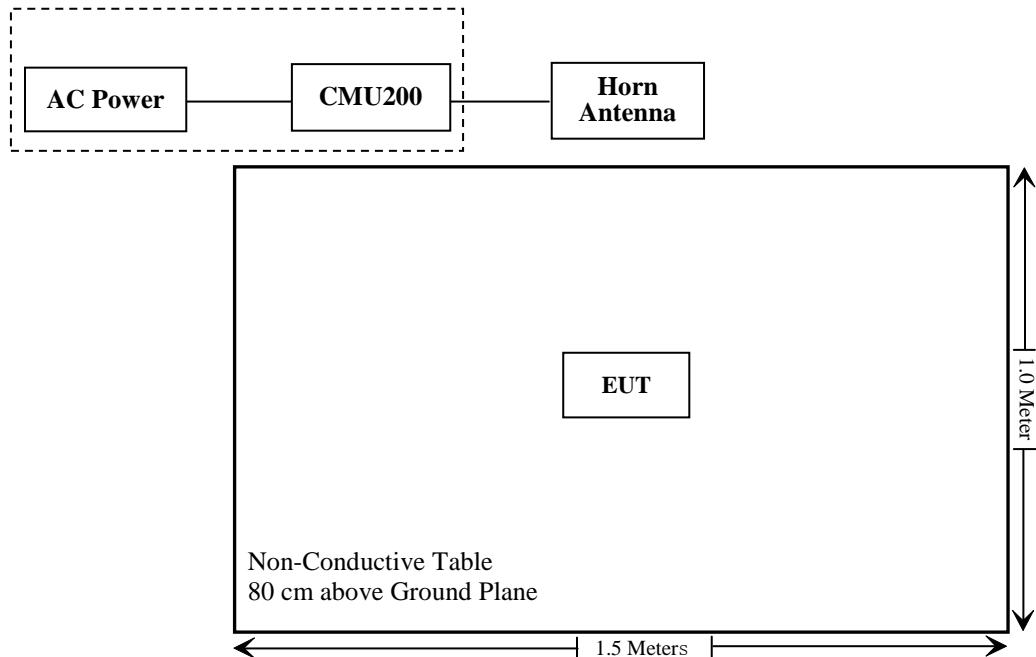
### Equipment Modifications

No modification was made to the EUT tested.

### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R & S	Universal Radio Communication Tester	CMU200	109038

### Block Diagram of Test Setup



## SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

## FCC §15.247 (I) AND §2.1093 – RF EXPOSURE SAR

### Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

**Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters**

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	<u>SAR not required:</u> <u>Unlicensed only</u> <ul style="list-style-type: none"> <li>○ when stand-alone 1-g SAR is not required and antenna is <math>\geq 5</math> cm from other antennas</li> </ul> <u>Licensed &amp; Unlicensed</u> <ul style="list-style-type: none"> <li>○ when the sum of the 1-g SAR is <math>&lt; 1.6</math> W/kg for all simultaneous transmitting antennas</li> <li>○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is <math>&lt; 0.3</math></li> </ul> <u>SAR required:</u> <u>Licensed &amp; Unlicensed</u> antenna pairs with SAR to peak location separation ratio $\geq 0.3$ ; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition <u>Note:</u> simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply
Jaw, Mouth and Nose	<u>Flat phantom SAR required</u> <ul style="list-style-type: none"> <li>○ when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues</li> <li>○ position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations</li> </ul>	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

- 1) GSM can transmit simultaneously with Bluetooth.
- 2) The distance between BT and GSM antenna is 4.1cm>2.5cm. The max output power of Bluetooth antenna is  $1.531 \text{ mW} < P_{\text{Ref}} (12 \text{ mW})$ . According to KDB648474, stand-alone SAR is not required for BT antenna and simultaneous SAR evaluation is not required for Bluetooth and GSM antennas.

**Result:**

Compliance

## FCC §15.203 - ANTENNA REQUIREMENT

---

### Applicable Standard

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### Antenna Connector Construction

The EUT has an integral antenna of bluetooth which is soldered on PCB, the gain is 0 dBi, which is in accordance to section 15.203, please refer to the internal photos.

**Result:** Compliance.

## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard

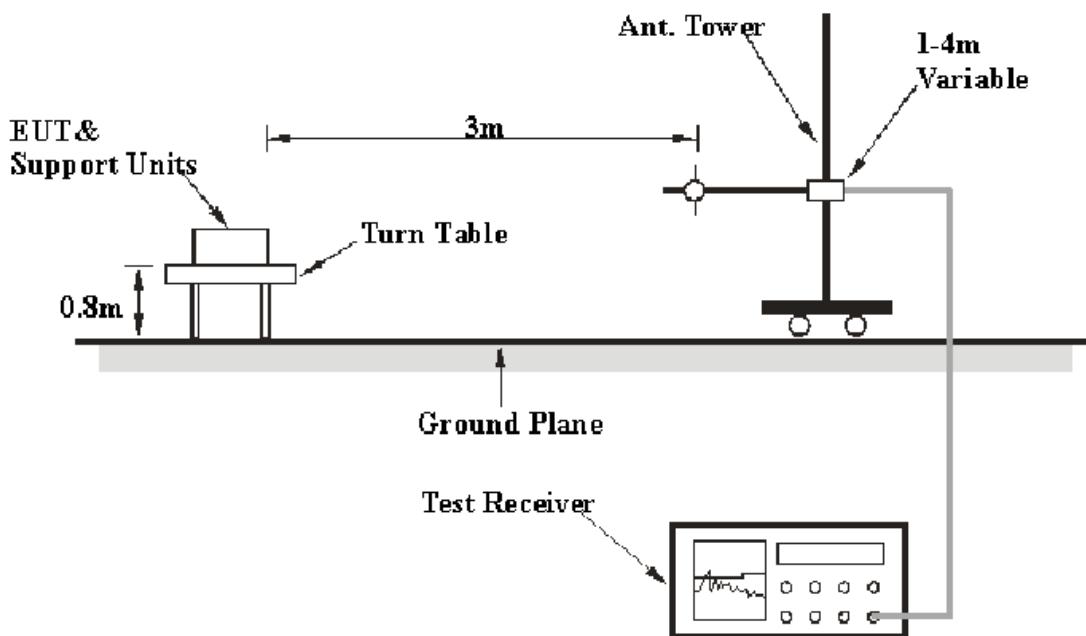
FCC §15.247 (d); §15.209; §15.205;

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB( $k=2$ , 95% level of confidence).

### EUT Setup



The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<b>Frequency Range</b>	<b>RBW</b>	<b>Video B/W</b>	<b>Detector</b>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequency above 1 GHz.

## Test Equipment List and Details

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
HP	Amplifier	8447E	1937A01057	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
Mini-Circuits	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2012-05-17	2013-05-16
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2011-10-14	2012-10-13
R&S	Auto test Software	EMC32	V6.30	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

**6.9 dB at 4804 MHz** in the **Vertical** polarization for model Burg 12

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.0kPa

*The testing was performed by Leon Chen on 2012-08-31.*

*Test Mode: Transmitting (depending the free scan, the BDR (GFSK) mode was the worst case)*

*30 MHz-25 GHz*

30 MHz-25 GHz

Frequency (MHz)	Reading (dBmV)	Detector (PK/QP/Ave.)	Polar (H/V)	Corrected Amplitude (dB/m)	Correction Data (dBmV/m)	Limit (dBmV/m)	Margin (dB)	Comment
Low Channel (2402MHz)								
2402	64.18	PK	H	34.91	99.09	N/A	N/A	Fundamental
2402	32.43	Ave.	H	34.91	67.34	N/A	N/A	Fundamental
2402	62.05	PK	V	34.91	96.96	N/A	N/A	Fundamental
2402	31.28	Ave.	V	34.91	66.19	N/A	N/A	Fundamental
4804	34.15	Ave.	V	12.95	47.10	54	6.90	harmonic
2389.91	38.67	Ave.	V	6.75	45.42	54	8.58	spurious
4804	28.42	Ave.	H	14.15	42.57	54	11.43	harmonic
9608	22.65	Ave.	V	19.53	42.18	54	11.82	Harmonic
2389.91	50.87	PK	V	6.75	57.62	74	16.38	spurious
321.56	32.47	QP	V	-5.45	27.02	46	18.98	spurious
7206	35.86	PK	V	18.63	54.49	74	19.51	Harmonic
321.56	31.59	QP	H	-5.45	26.14	46	19.86	spurious
2388.24	27.00	Ave.	H	6.75	33.75	54	20.25	spurious
4804	40.31	PK	V	12.95	53.26	74	20.74	harmonic
9608	32.72	PK	V	19.53	52.25	74	21.75	Harmonic
4804	37.05	PK	H	14.15	51.20	74	22.80	harmonic
7206	32.15	Ave.	V	18.63	50.78	74	23.22	Harmonic
2388.24	41.27	PK	H	6.75	48.02	74	25.98	spurious
Middle Channel (2441MHz)								
2441	63.25	PK	H	35.24	98.49	N/A	N/A	Fundamental
2441	31.37	Ave.	H	35.24	66.61	N/A	N/A	Fundamental
2441	61.72	PK	V	35.24	96.96	N/A	N/A	Fundamental
2441	31.11	Ave.	V	35.24	66.35	N/A	N/A	Fundamental
7323	26.16	Ave.	V	18.93	45.09	54	8.91	Harmonic
4882	29.48	Ave.	V	14.21	43.69	54	10.31	harmonic
4882	29.61	Ave.	H	13.01	42.62	54	11.38	harmonic
322.17	32.51	QP	V	-5.62	26.89	46	19.11	spurious
308.73	31.43	QP	H	-5.62	25.81	46	20.19	spurious
7323	33.51	PK	V	18.93	52.44	74	21.56	Harmonic
4882	37.82	PK	H	13.01	50.83	74	23.17	harmonic
4882	35.06	PK	V	14.21	49.27	74	24.73	harmonic
2347.2	36.95	PK	V	9.21	46.16	74	27.84	spurious
2384.6	37.34	PK	V	8.76	46.1	74	27.9	spurious

Frequency (MHz)	Reading (dBmV)	Detector (PK/QP/Ave.)	Polar (H/V)	Corrected Amplitude (dB/m)	Correction Data (dBmV/m)	Limit (dBmV/m)	Margin (dB)	Comment
High Channel (2480MHz)								
2480	63.74	PK	H	35.3	97.62	N/A	N/A	Fundamental
2480	31.55	Ave.	H	35.3	65.39	N/A	N/A	Fundamental
2480	59.82	PK	V	35.3	93.27	N/A	N/A	Fundamental
2480	28.76	Ave.	V	35.3	65.78	N/A	N/A	Fundamental
4960	31.65	Ave.	V	13.05	44.7	54	9.3	harmonic
7440	23.17	Ave.	H	19.25	42.42	54	11.58	Harmonic
9920	22.14	Ave.	V	19.24	41.38	54	12.62	Harmonic
2483.71	33.96	Ave.	V	6.83	40.79	54	13.21	spurious
4960	26.07	Ave.	H	14.25	40.32	54	13.68	harmonic
7440	37.02	PK	H	19.25	56.27	74	17.73	Harmonic
9920	34.85	PK	V	19.24	54.09	74	19.91	Harmonic
443.58	29.67	QP	H	-3.41	25.94	46	20.06	spurious
443.58	29.15	QP	V	-3.41	25.2	46	20.8	spurious
2483.71	45.85	PK	V	6.83	52.68	74	21.32	spurious
4960	37.21	PK	V	13.05	50.26	74	23.74	harmonic
4960	34.26	PK	H	14.25	48.51	74	25.49	harmonic
2484.72	20.6	Ave.	H	6.83	27.43	54	26.57	spurious
2484.72	34.72	PK	H	6.83	41.55	74	32.45	spurious

## FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

### Test Procedure

1. Set the EUT in transmitting mode, RBW was set at 30 kHz; VBW was set at 100 kHz maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

\* The testing was performed by Leon Chen on 2012-08-31.

**Test Result:** Compliance.

Please refer to following tables and plots

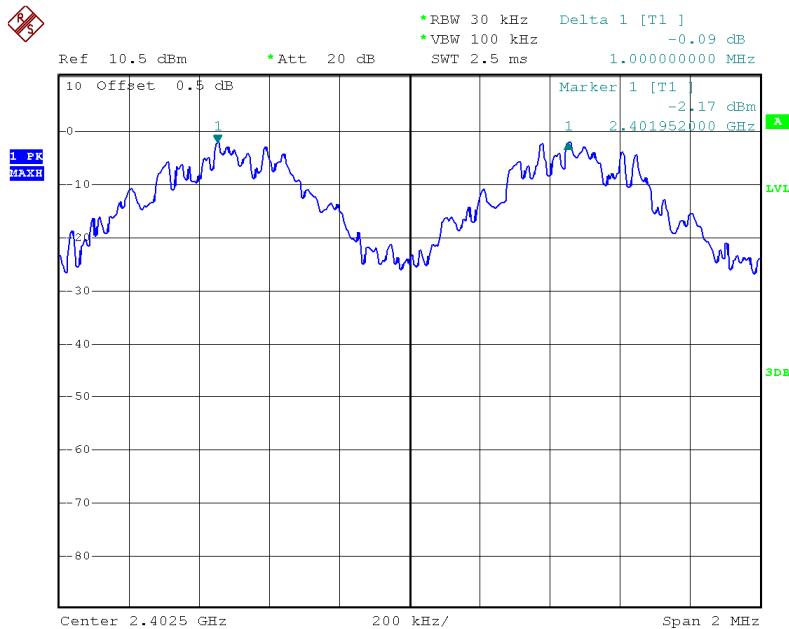
*Test Mode: Transmitting*

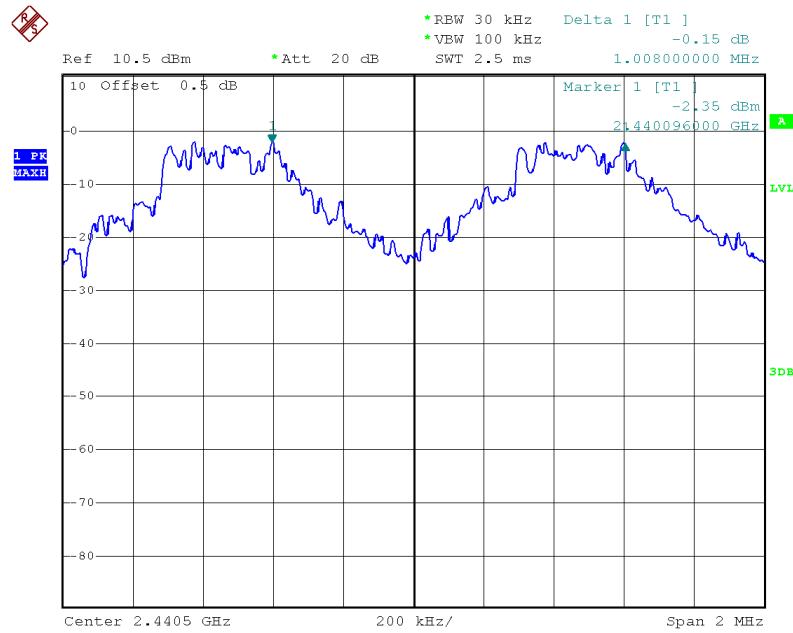
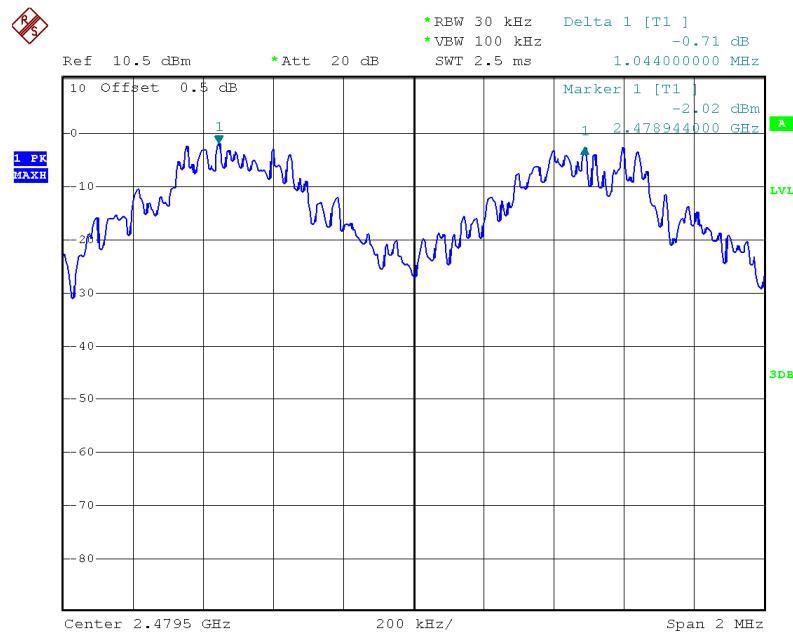
BDR Mode (GFSK):

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2402	1.000	0.58	Pass
Adjacent	2403			
Middle	2441	1.008	0.62	Pass
Adjacent	2442			
High	2480	1.044	0.62	Pass
Adjacent	2479			

Please refer to the following plots.

### Low Channel




**Middle Channel****High Channel**



EDR Mode (  $\pi/4$ -DQPSK):

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2402	1.000	0.85	Pass
Adjacent	2403			
Middle	2441	1.012	0.89	Pass
Adjacent	2442			
High	2480	1.000	0.89	Pass
Adjacent	2479			

Please refer to the following plots.

### Low Channel

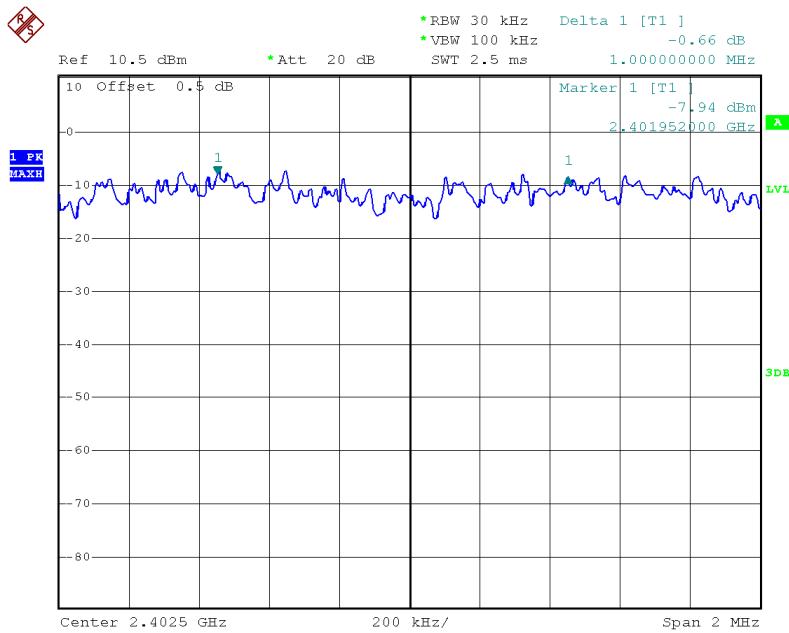

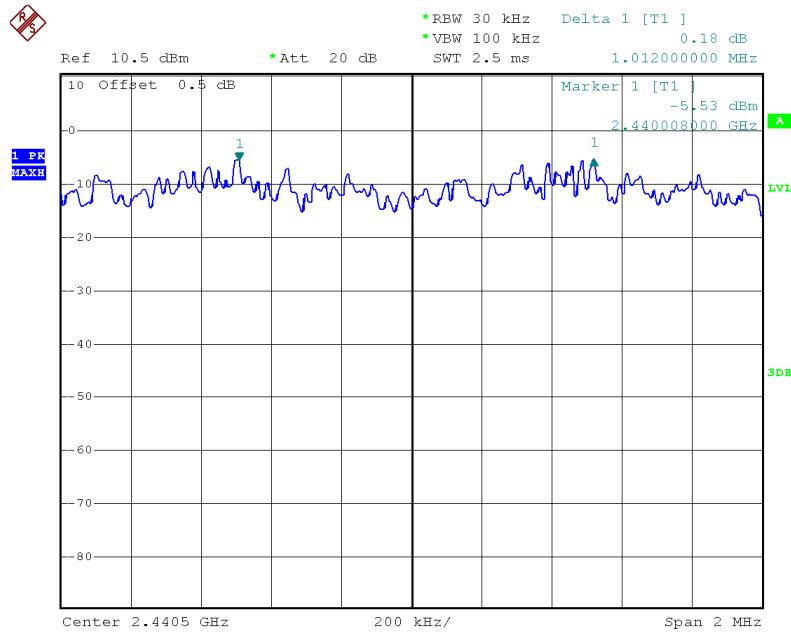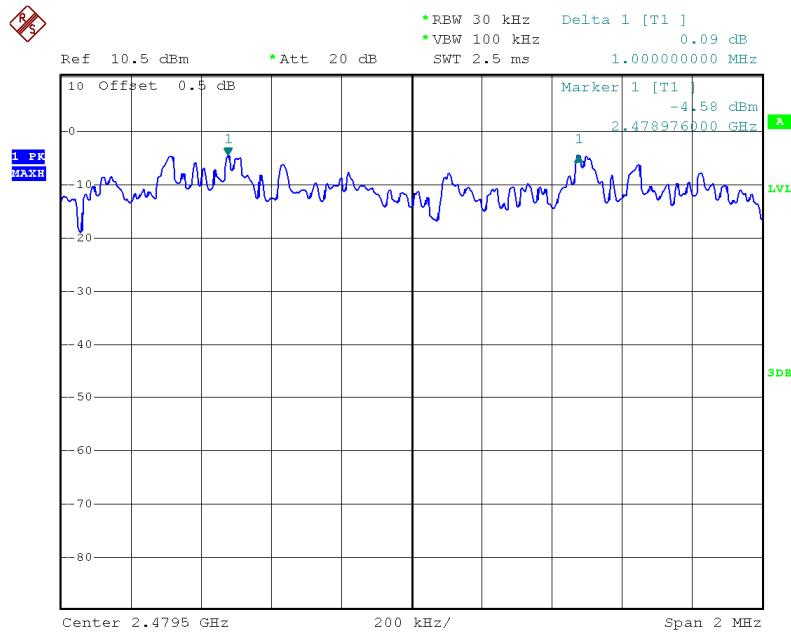
**Middle Channel****High Channel**



## EDR Mode (8DPSK):

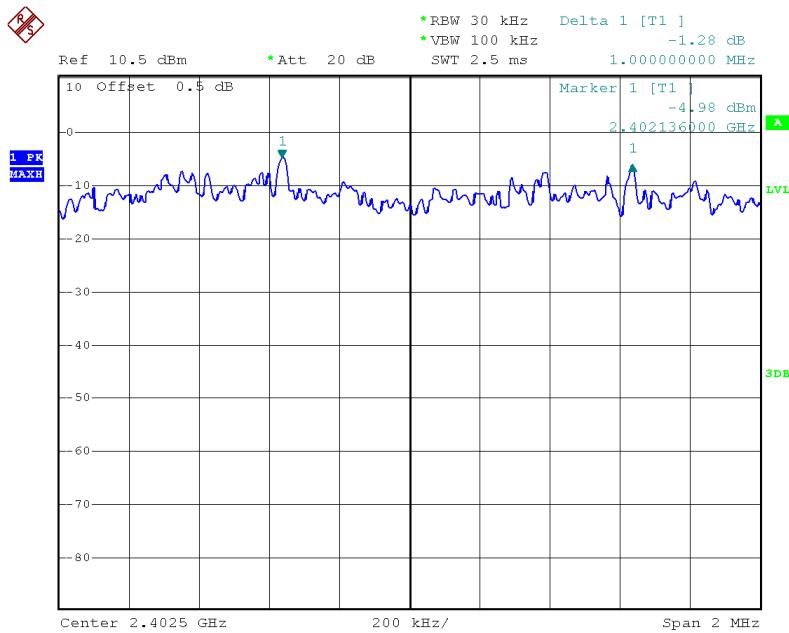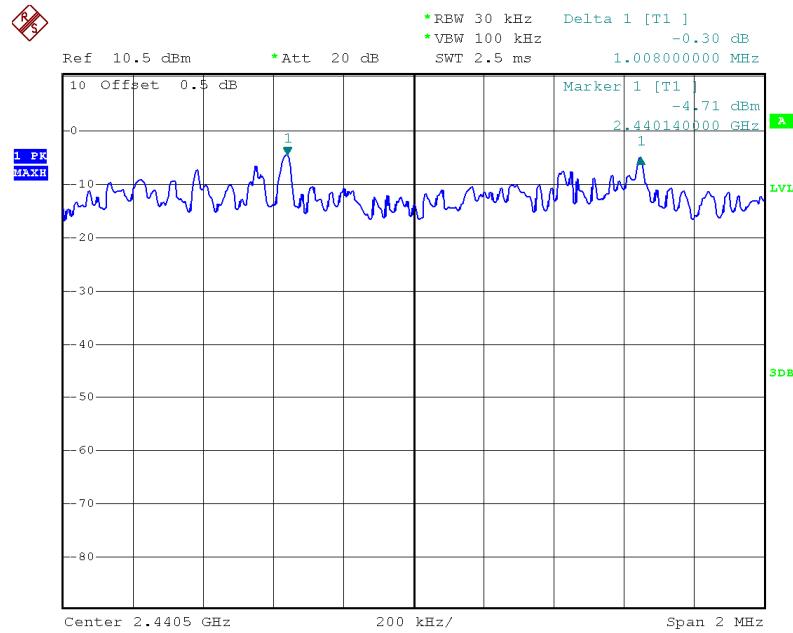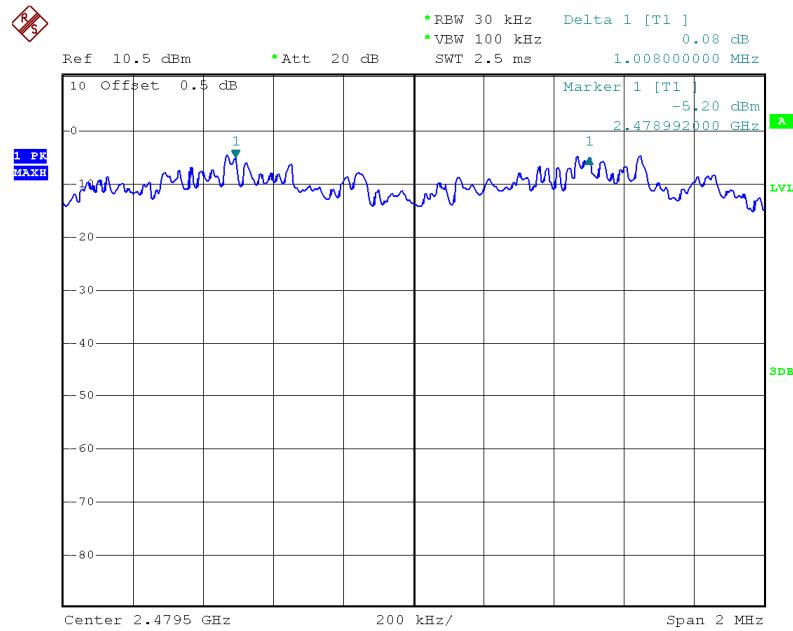Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low	2402	1.000	0.86	Pass
Adjacent	2403			
Middle	2441	1.008	0.85	Pass
Adjacent	2442			
High	2480	1.008	0.86	Pass
Adjacent	2479			

Please refer to the following plots.

## Low Channel



**Middle Channel****High Channel**

## FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

\* The testing was performed by Leon Chen on 2012-08-31.

**Test Result:** Compliance.

Please refer to following tables and plots

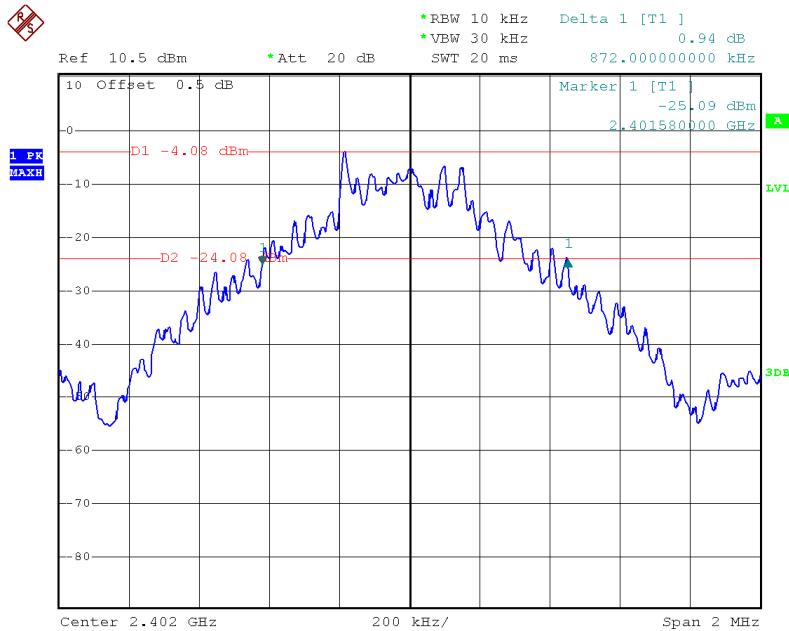
*Test Mode: Transmitting*

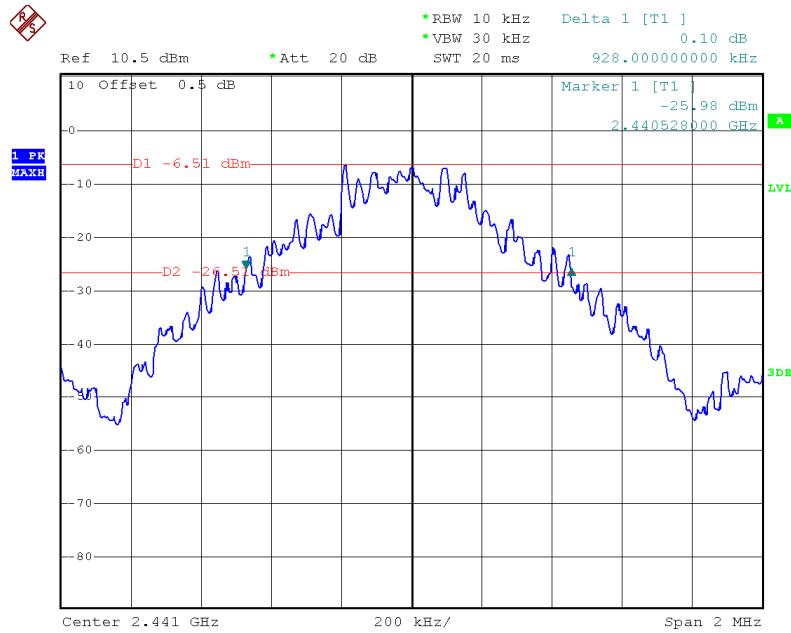
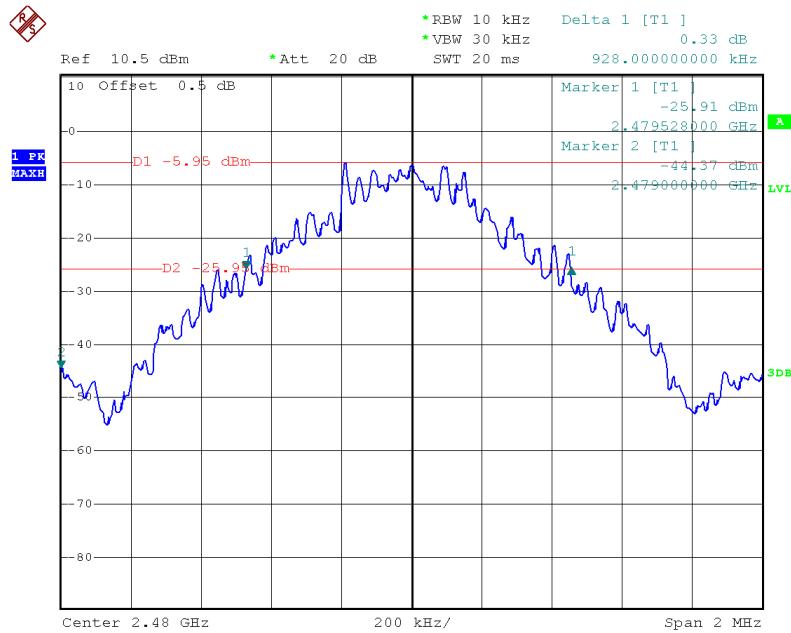
*BDR Mode (GFSK):*

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	0.872
Middle	2441	0.928
High	2480	0.928

Please refer to the following plots.

### Low Channel




**Middle Channel****High Channel**



EDR Mode(  $\pi/4$ -DQPSK):

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.276
Middle	2441	1.328
High	2480	1.328

Please refer to the following plots.

### Low Channel

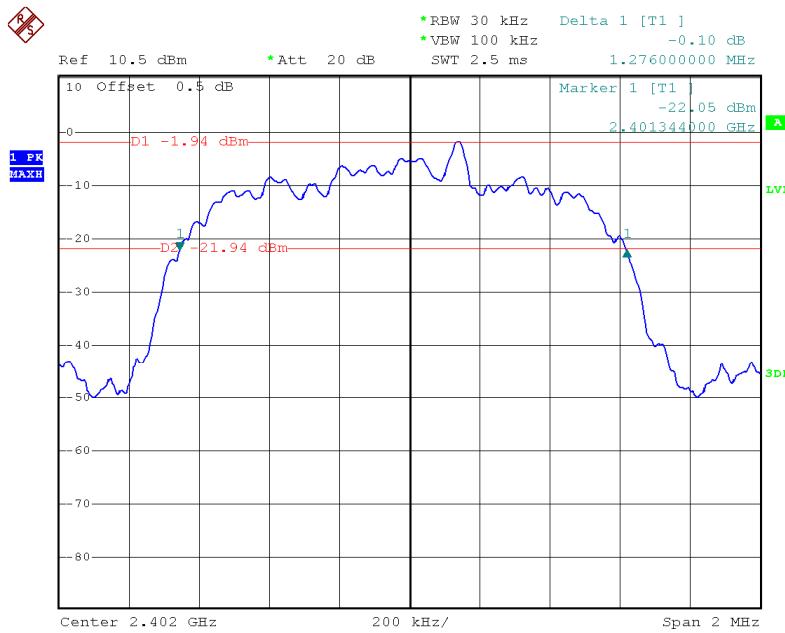

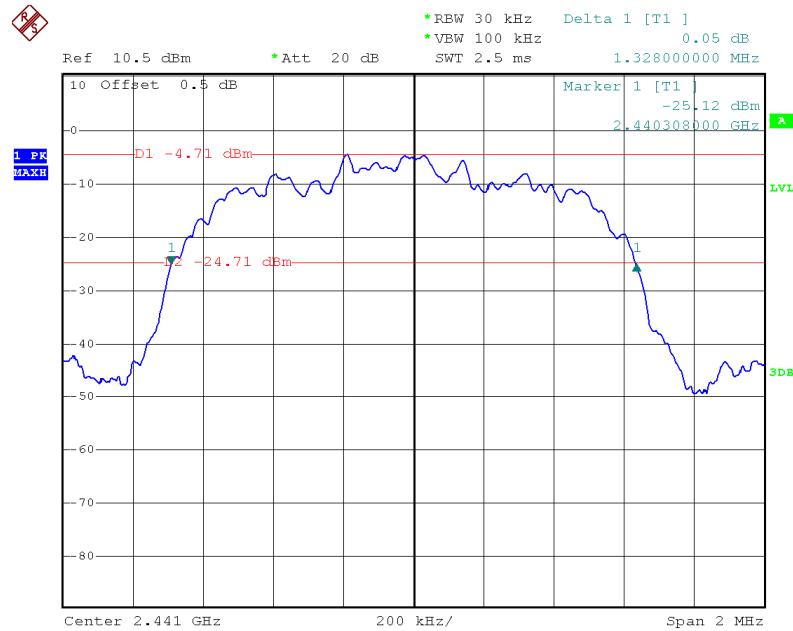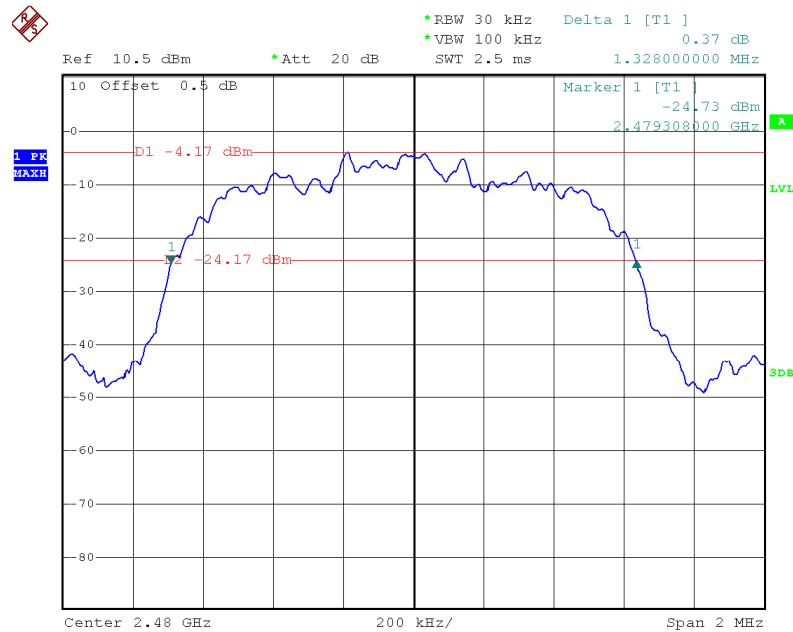
**Middle Channel****High Channel**



EDR Mode(8DPSK):

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.284
Middle	2441	1.280
High	2480	1.288

Please refer to the following plots.

### Low Channel

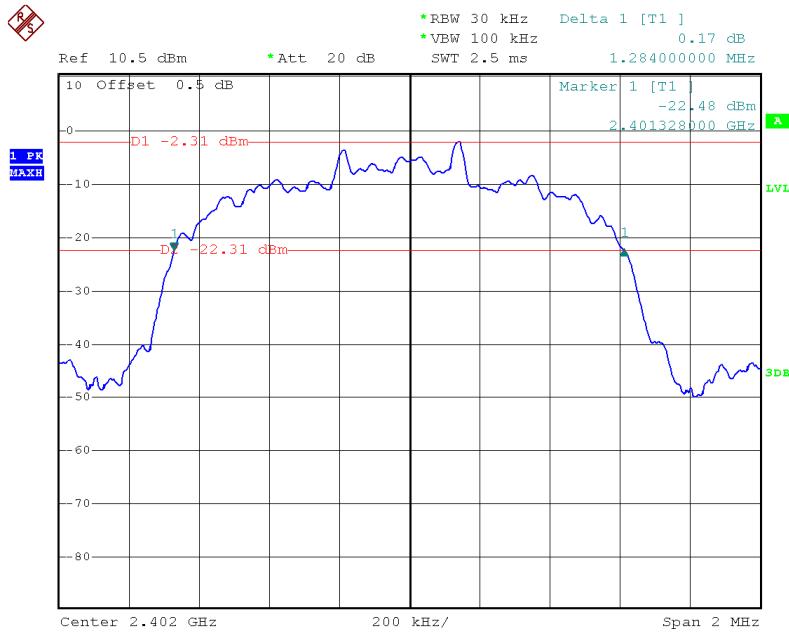

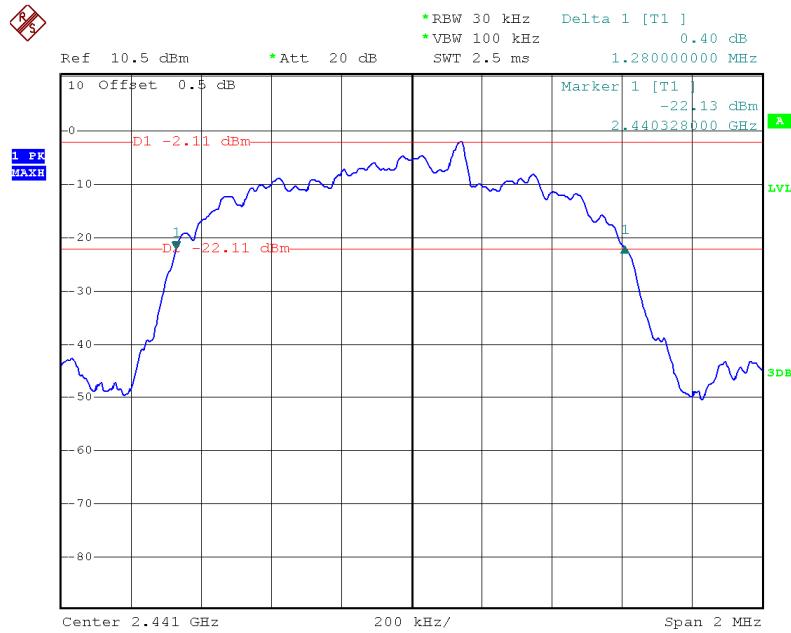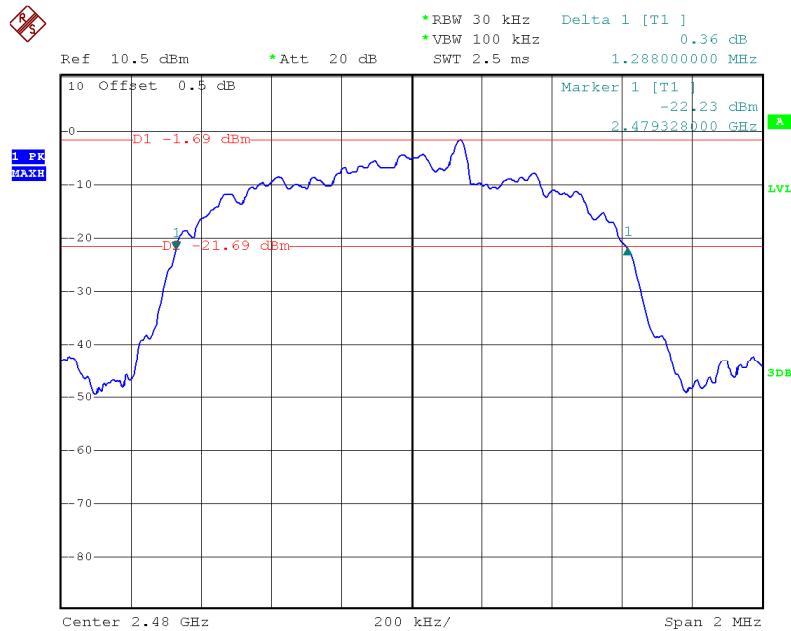**Middle Channel****High Channel**

## FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

*The testing was performed by Leon Chen on 2012-08-31.*

**Test Result:** Compliance.

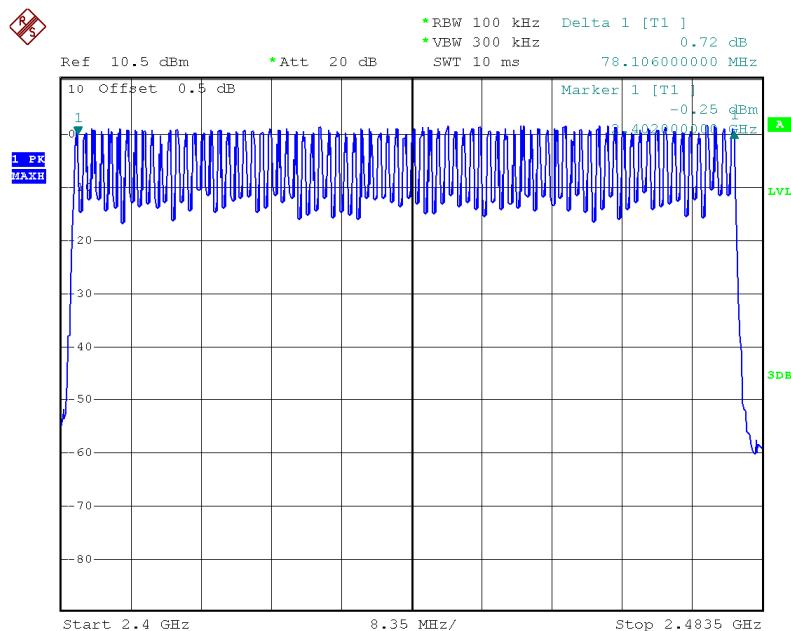
Please refer to following tables and plots

*Test Mode: Transmitting*

*BDR Mode (GFSK):*

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.50	79	$\geq 15$


### Number of Hopping Channels



EDR Mode ( $\pi/4$ -DQPSK)


Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.50	79	$\geq 15$

## Number of Hopping Channels

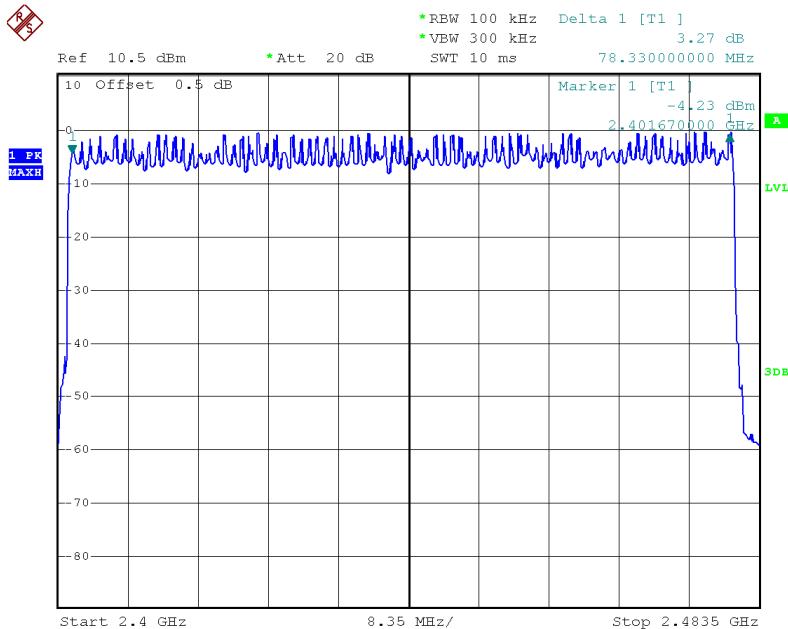

*EDR Mode (8DPSK)*

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.50	79	≥15

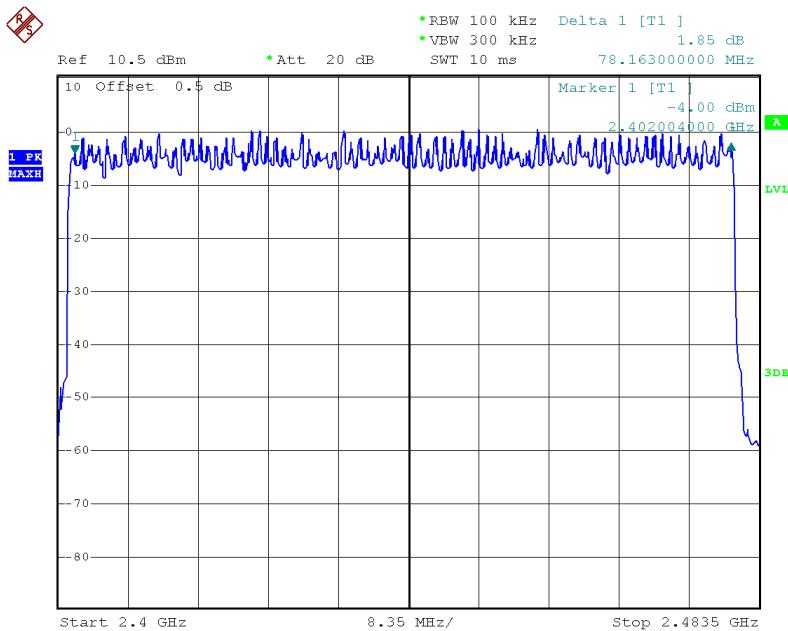**Number of Hopping Channels**

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 \* channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length \* hope rate/ number of hopping channels \* 31.6s

Hop rate=1600/s

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

\* The testing was performed by Leon Chen on 2012-08-31.

**Test Result:** Compliance.

Please refer to following tables and plots

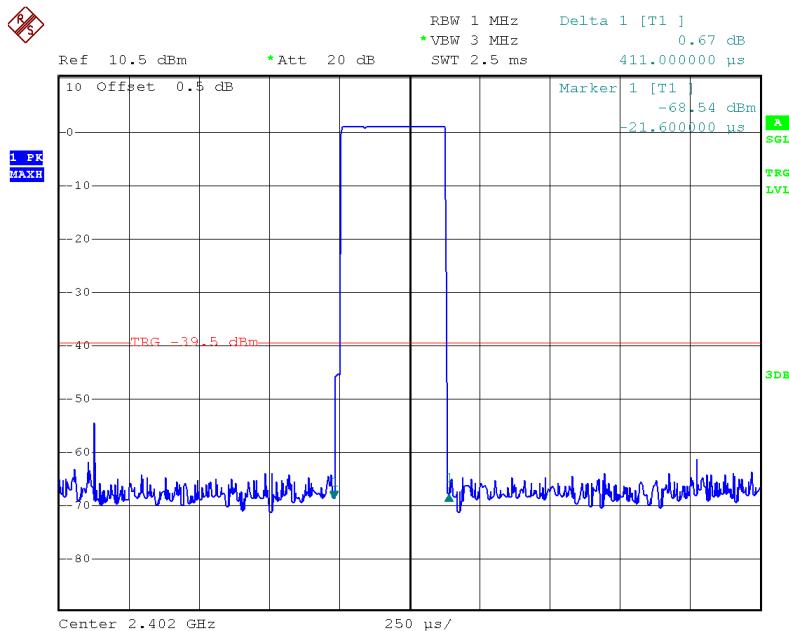
*Test Mode: Transmitting*

*BDR Mode (GFSK):*


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.411	0.132	0.4	Pass
	Middle	0.411	0.132	0.4	Pass
	High	0.426	0.136	0.4	Pass
Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s					
DH 3	Low	1.686	0.270	0.4	Pass
	Middle	1.686	0.270	0.4	Pass
	High	1.696	0.271	0.4	Pass
Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s					
DH 5	Low	2.950	0.315	0.4	Pass
	Middle	2.966	0.316	0.4	Pass
	High	2.982	0.318	0.4	Pass
Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s					

Please refer to the following plots.


**Low Channel for DH1**







## Middle Channel for DH1

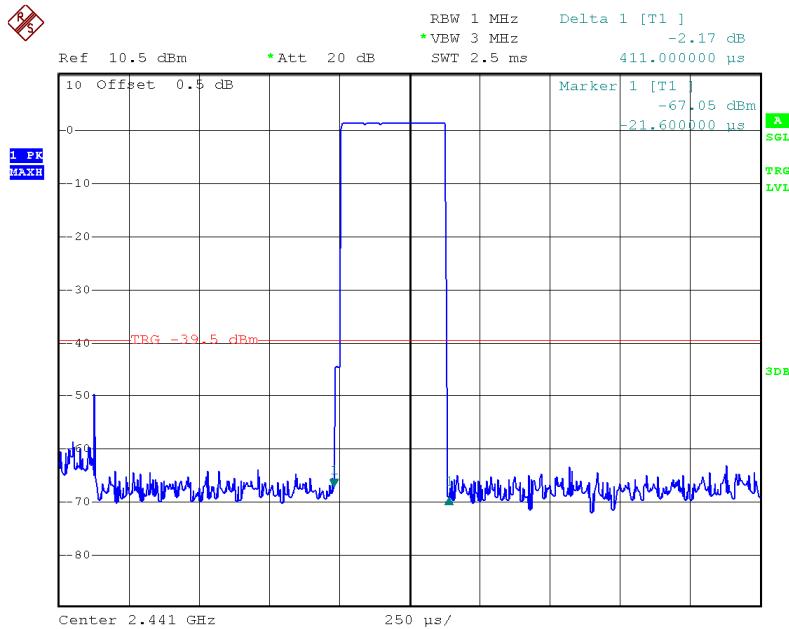


## High Channel for DH1

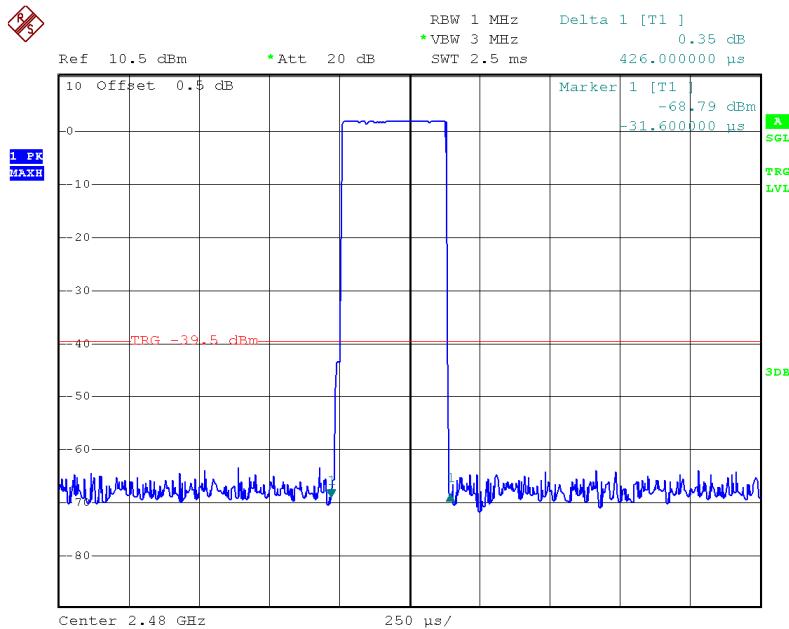

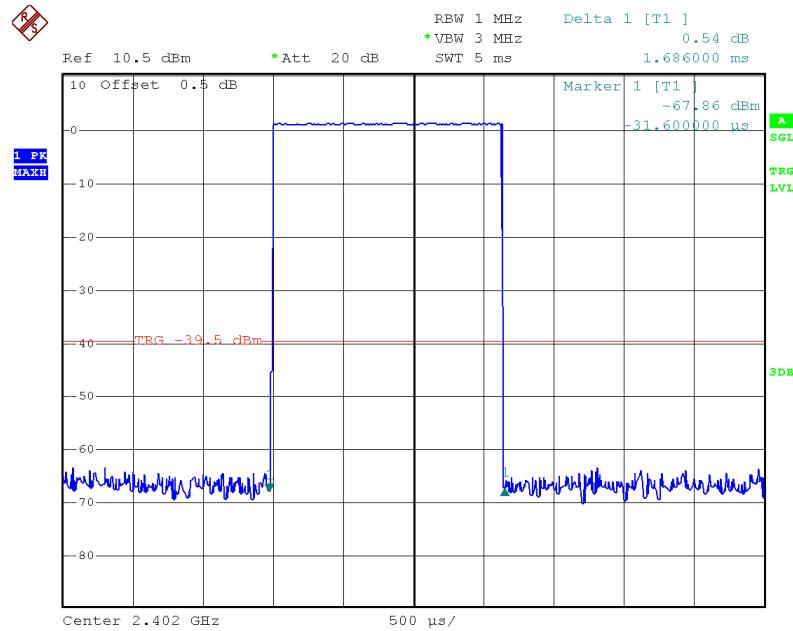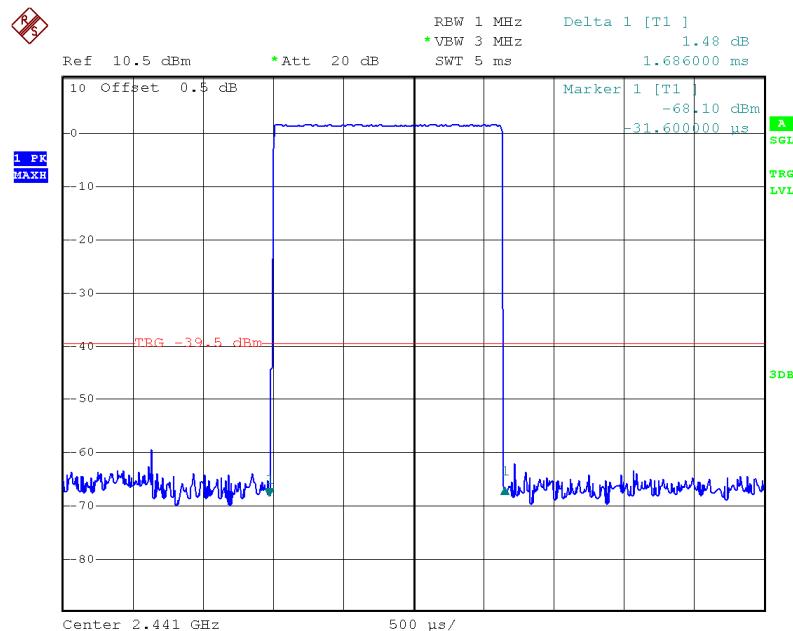
**Low Channel for DH3****Middle Channel for DH3**

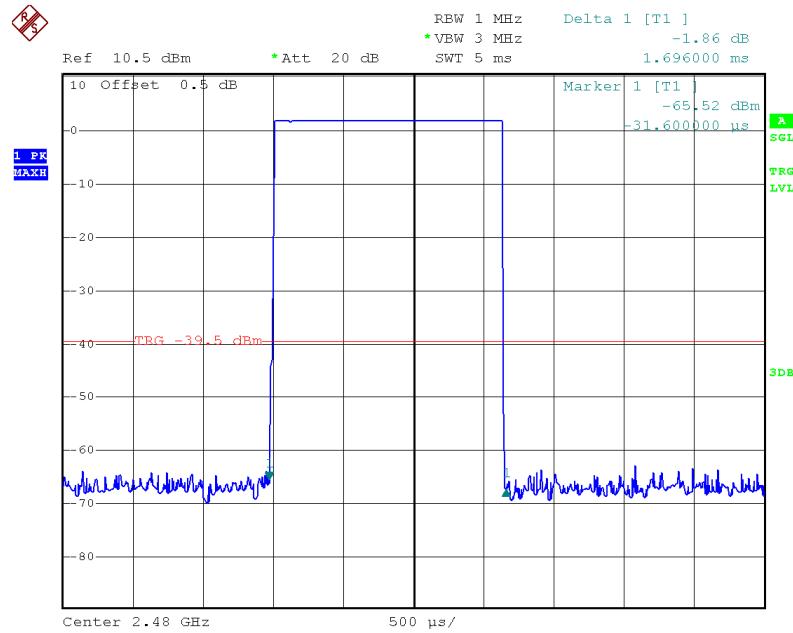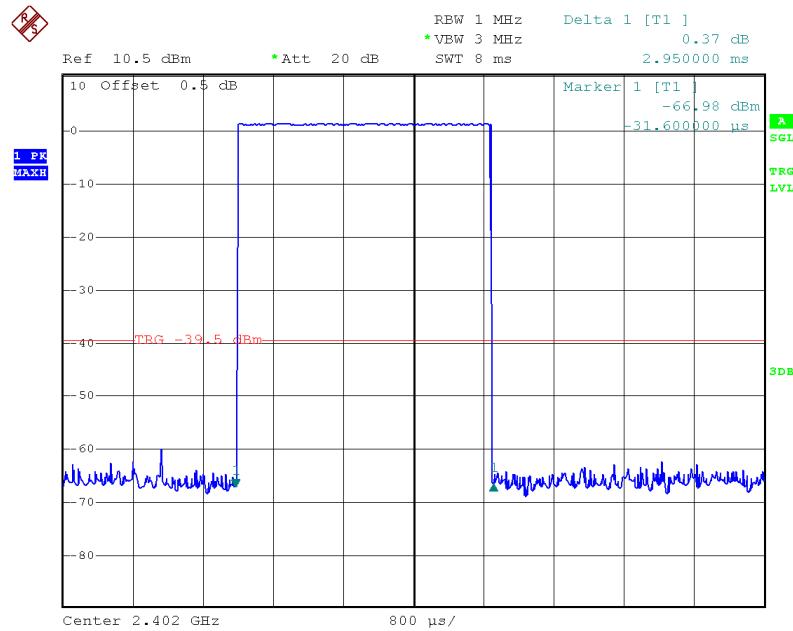**High Channel for DH3****Low Channel for DH5**

## Middle Channel for DH5

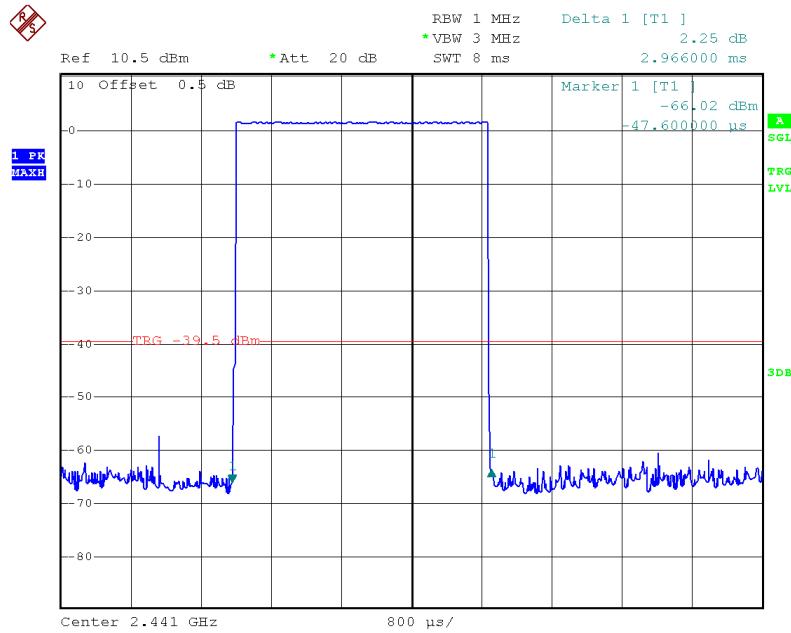

## High Channel for DH5

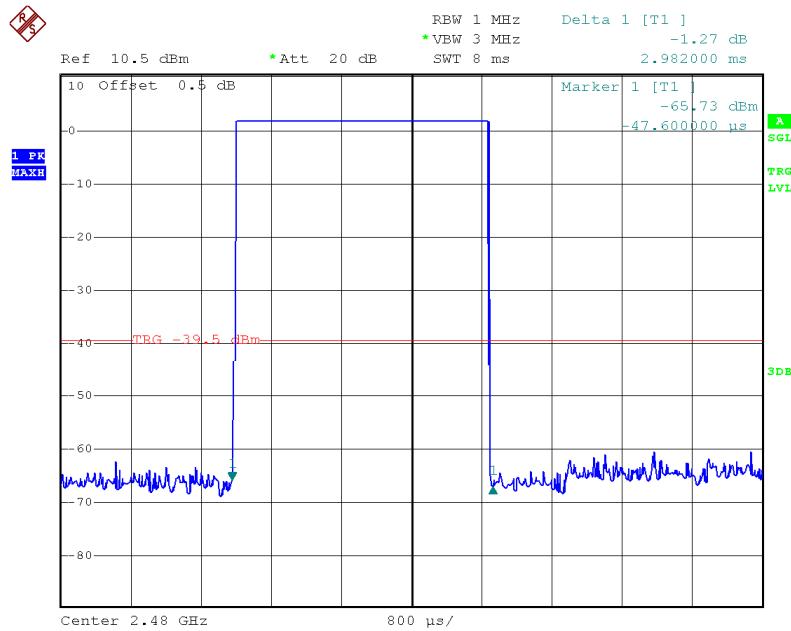


EDR Mode ( $\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.423	0.135	0.4	Pass
	Middle	0.423	0.135	0.4	Pass
	High	0.413	0.132	0.4	Pass
Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s					
DH 3	Low	1.686	0.270	0.4	Pass
	Middle	1.696	0.271	0.4	Pass
	High	1.676	0.268	0.4	Pass
Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s					
DH 5	Low	2.966	0.316	0.4	Pass
	Middle	2.950	0.315	0.4	Pass
	High	2.950	0.315	0.4	Pass
Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s					

Please refer to the following plots.


## Low Channel for DH1


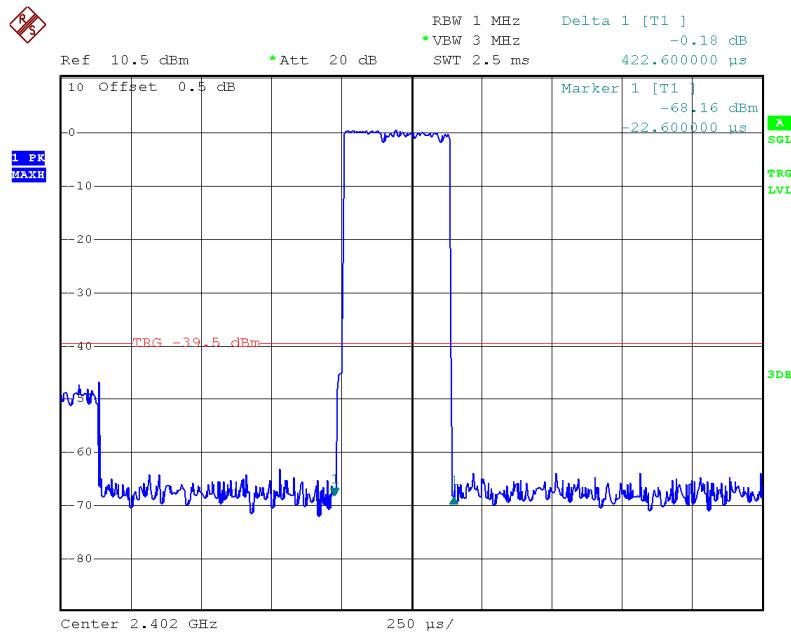




## Middle Channel for DH1

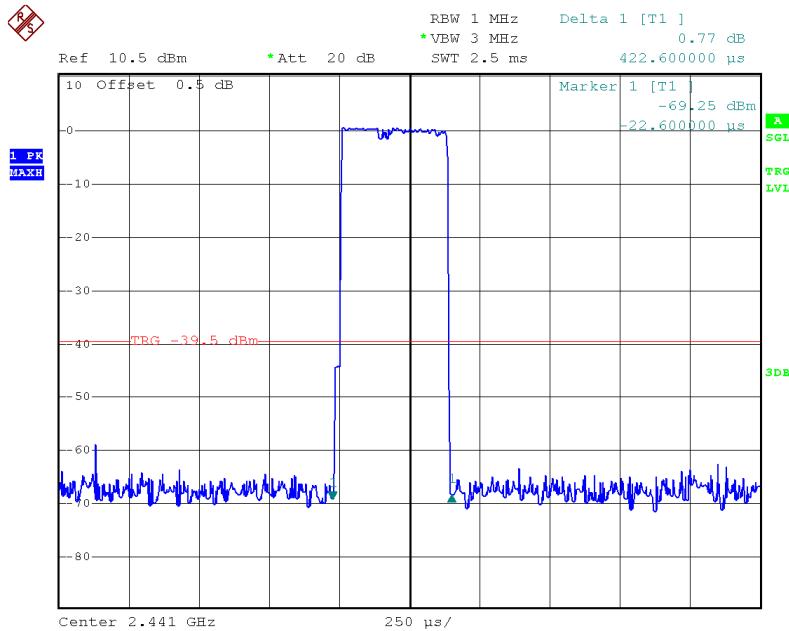


## High Channel for DH1

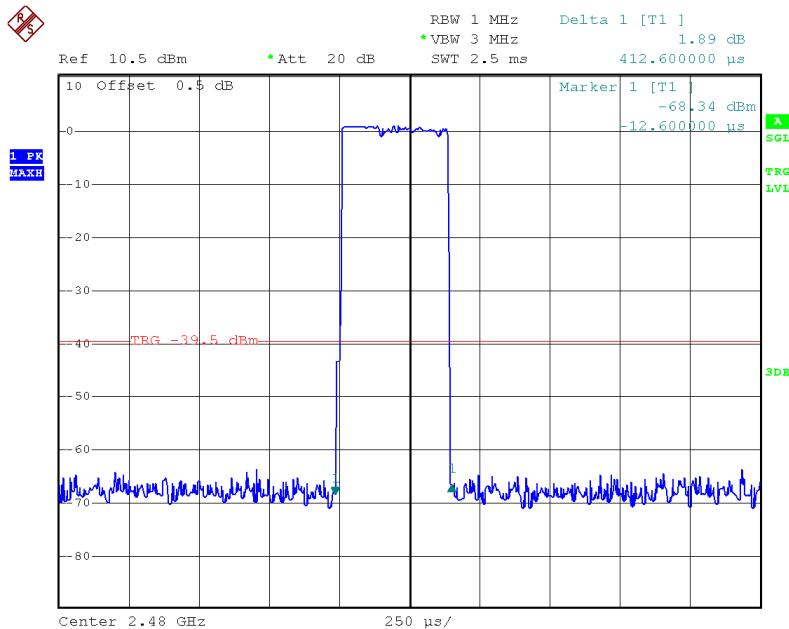

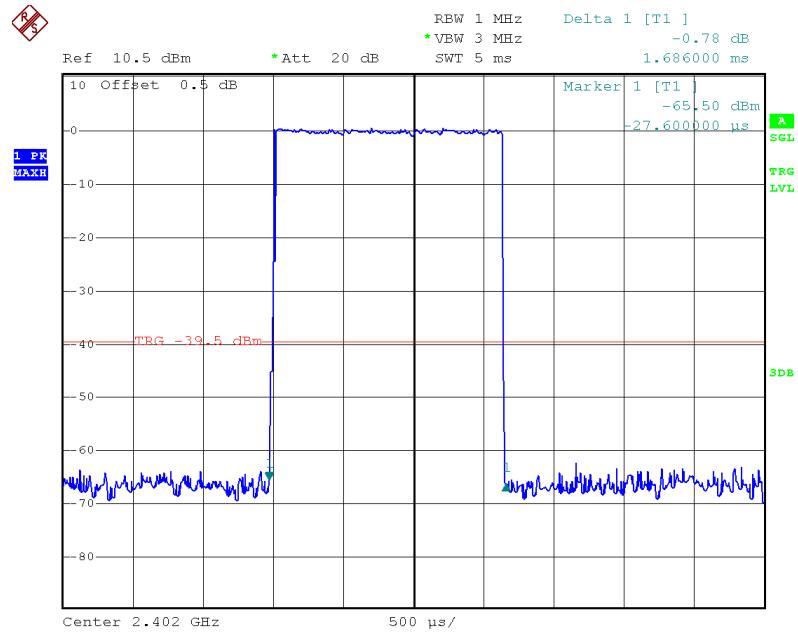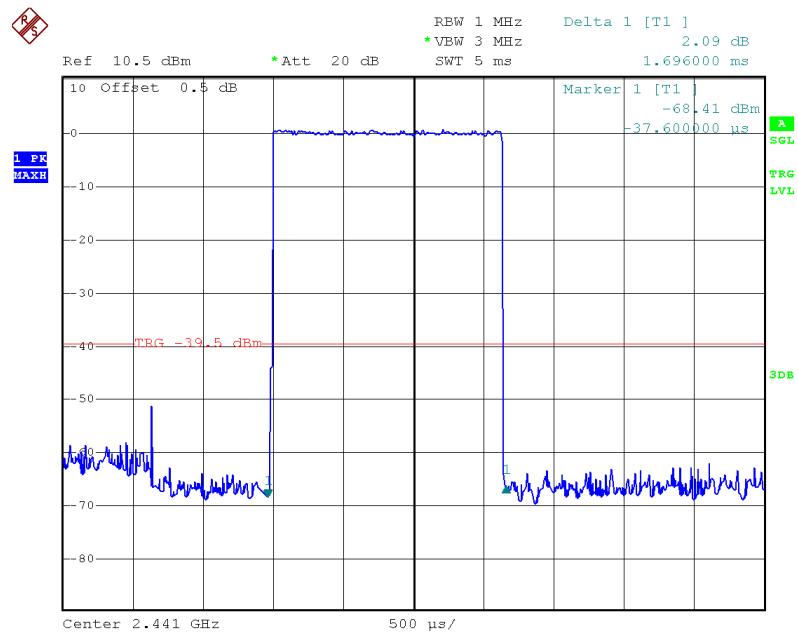
**Low Channel for DH3****Middle Channel for DH3**

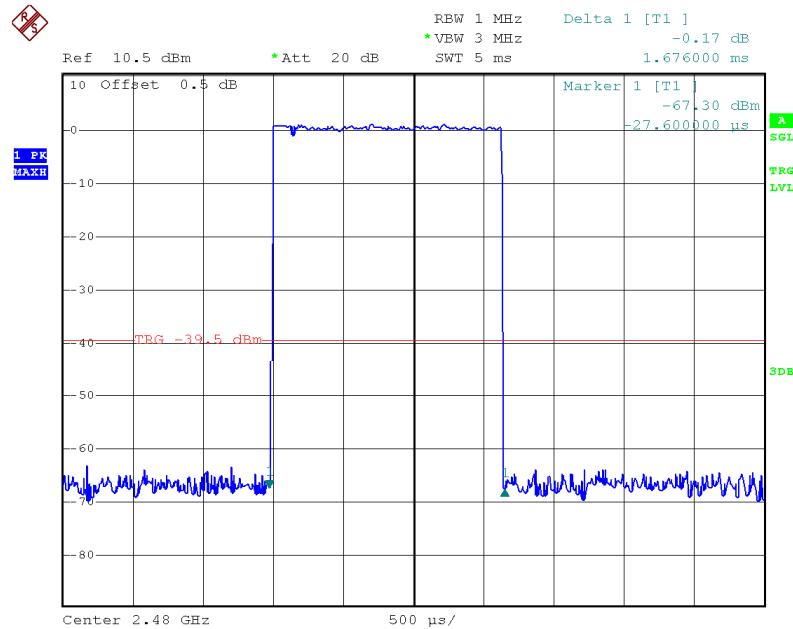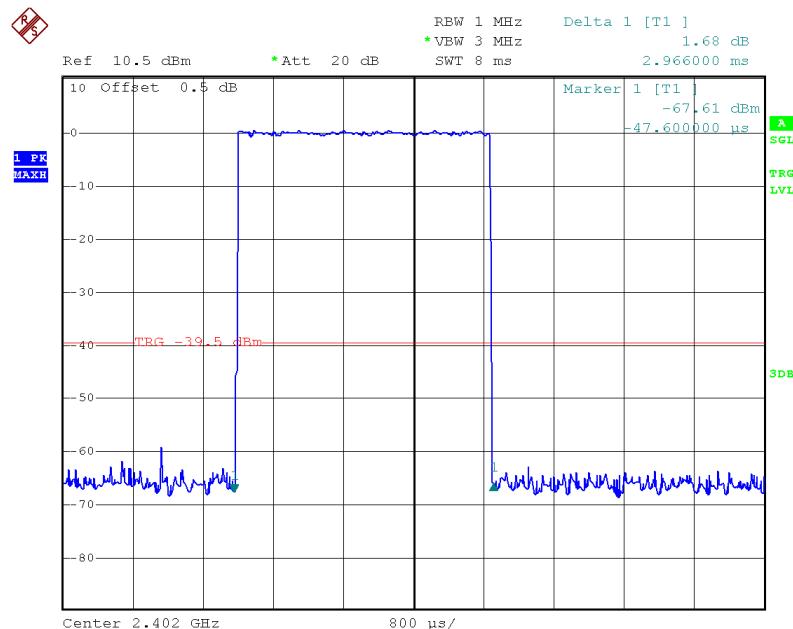**High Channel for DH3****Low Channel for DH5**

## Middle Channel for DH5

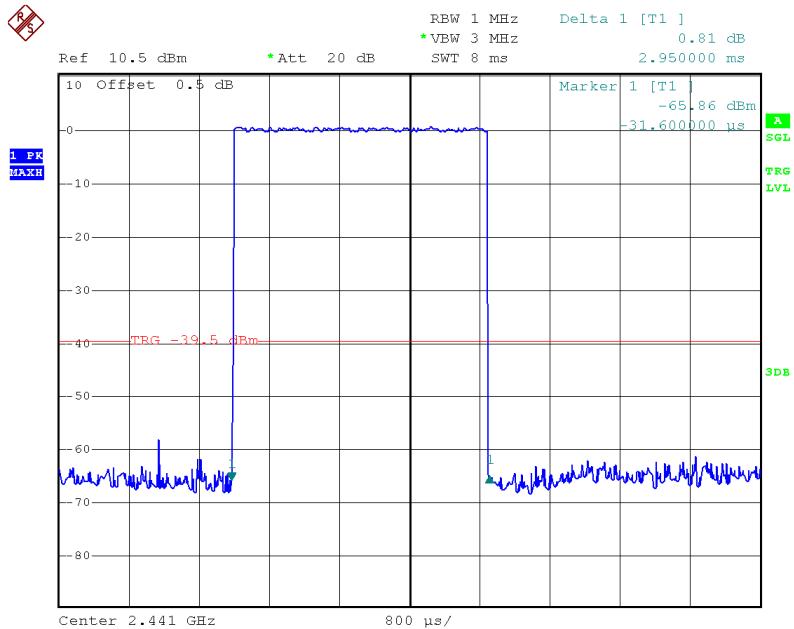


## High Channel for DH5

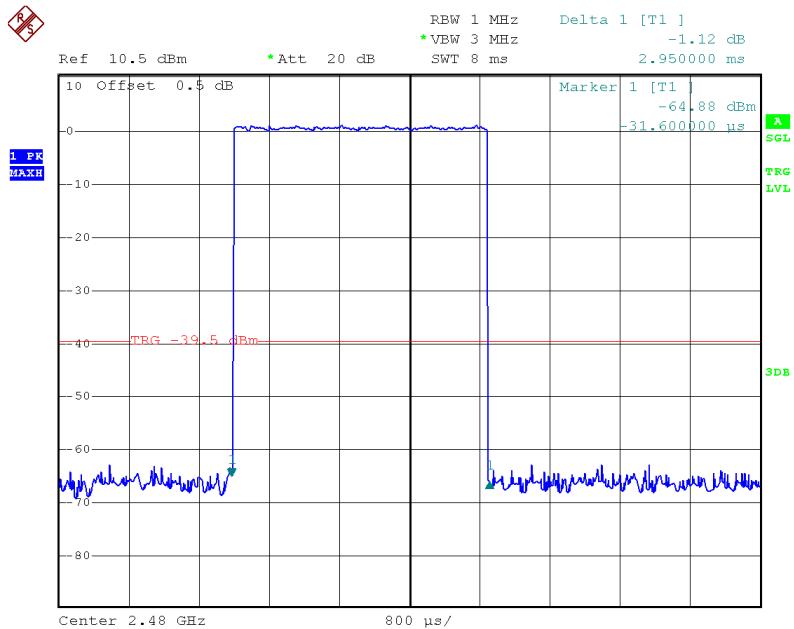


**EDR Mode (8DPSK):**

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.418	0.134	0.4	Pass
	Middle	0.418	0.134	0.4	Pass
	High	0.418	0.134	0.4	Pass
Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s					
DH 3	Low	1.678	0.268	0.4	Pass
	Middle	1.688	0.270	0.4	Pass
	High	1.698	0.272	0.4	Pass
Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s					
DH 5	Low	2.942	0.314	0.4	Pass
	Middle	2.958	0.316	0.4	Pass
	High	2.942	0.314	0.4	Pass
Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s					

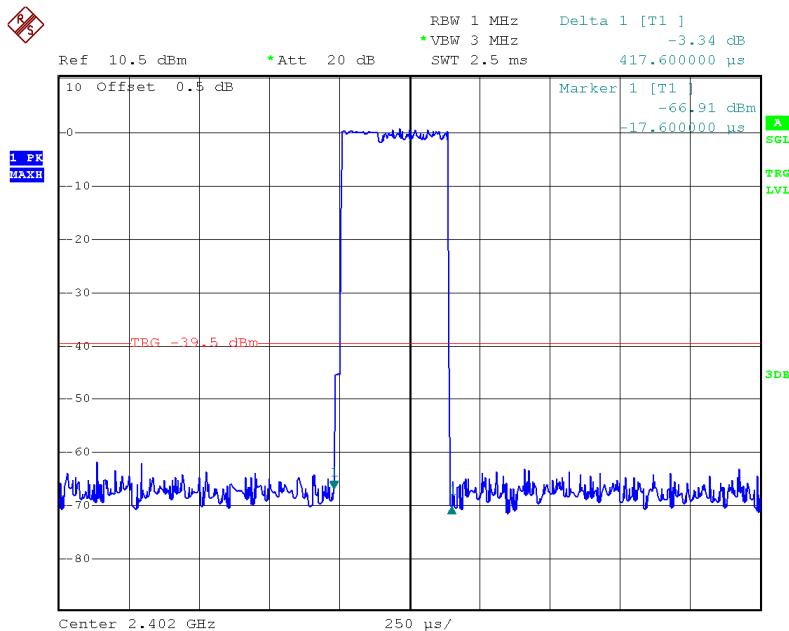
Please refer to the following plots.



**Low Channel for DH1**



## Middle Channel for DH1

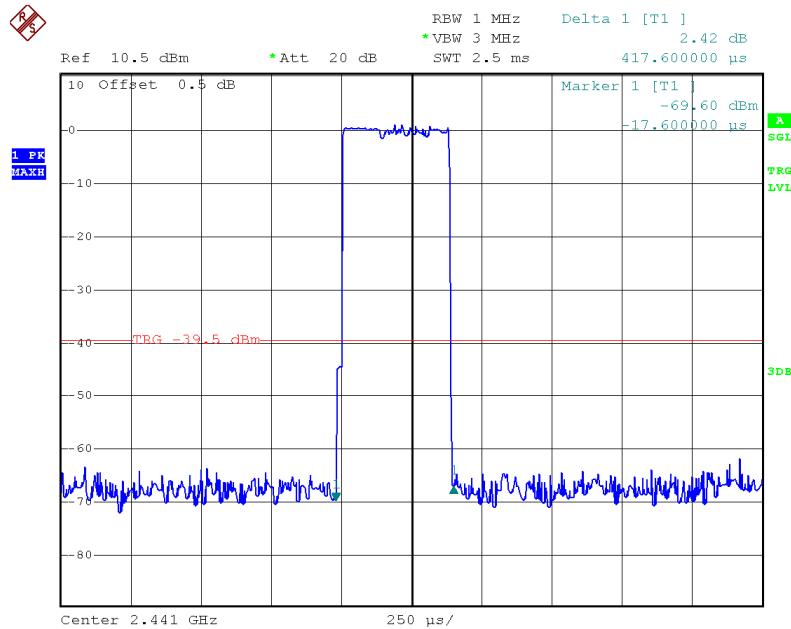


## High Channel for DH1

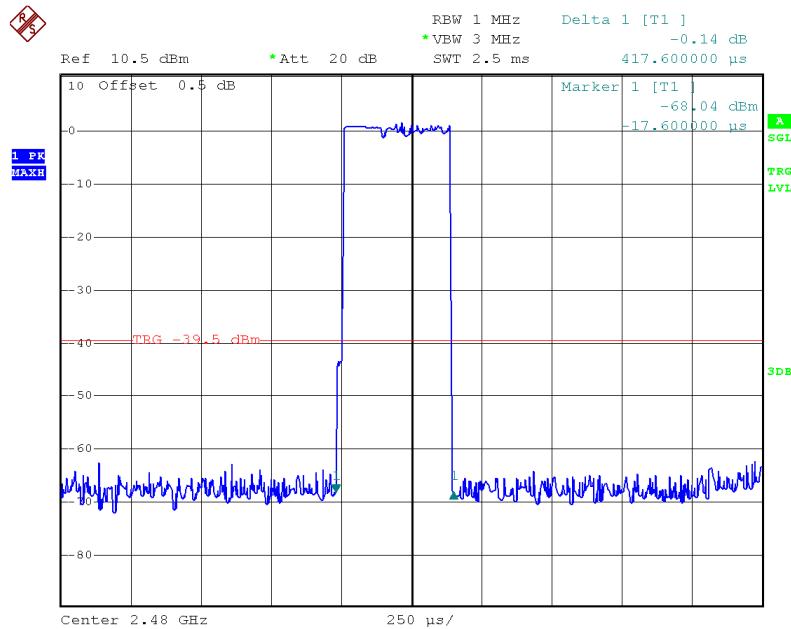

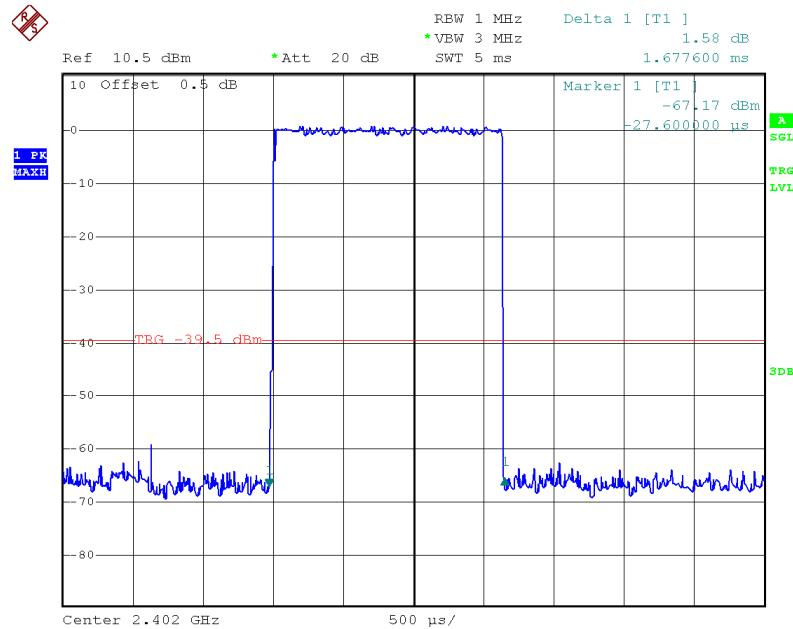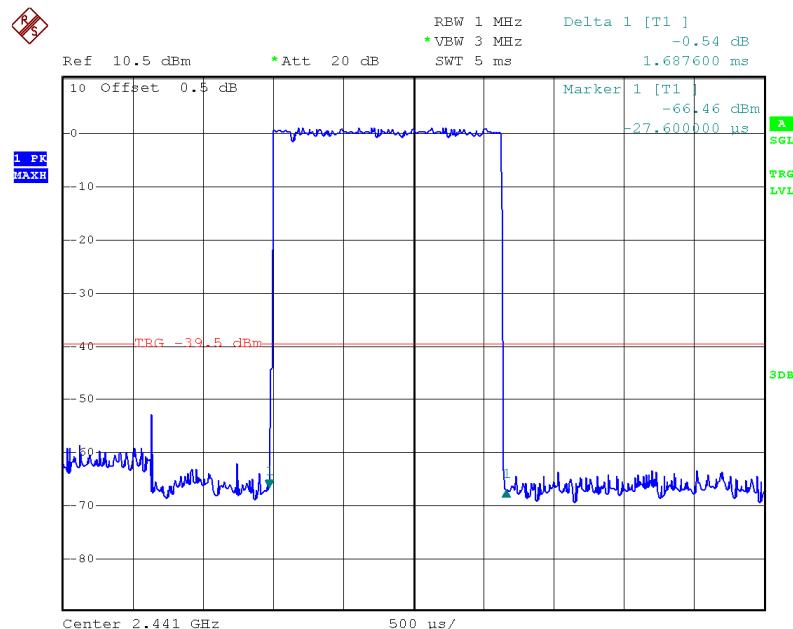
**Low Channel for DH3****Middle Channel for DH3**

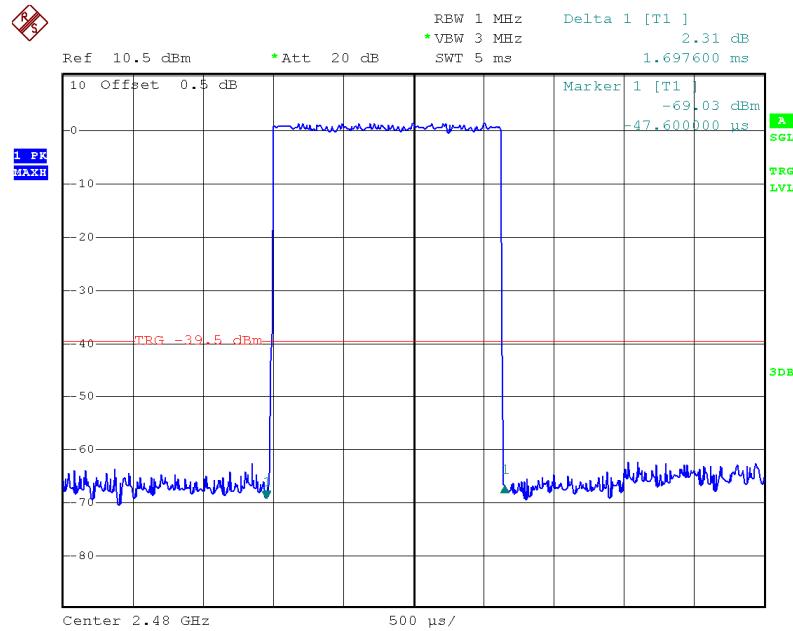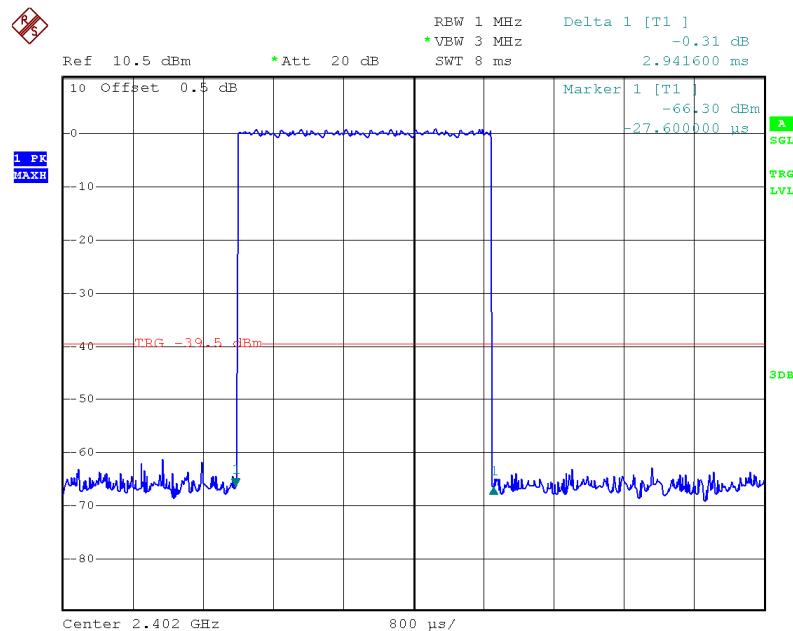**High Channel for DH3****Low Channel for DH5**

## Middle Channel for DH5

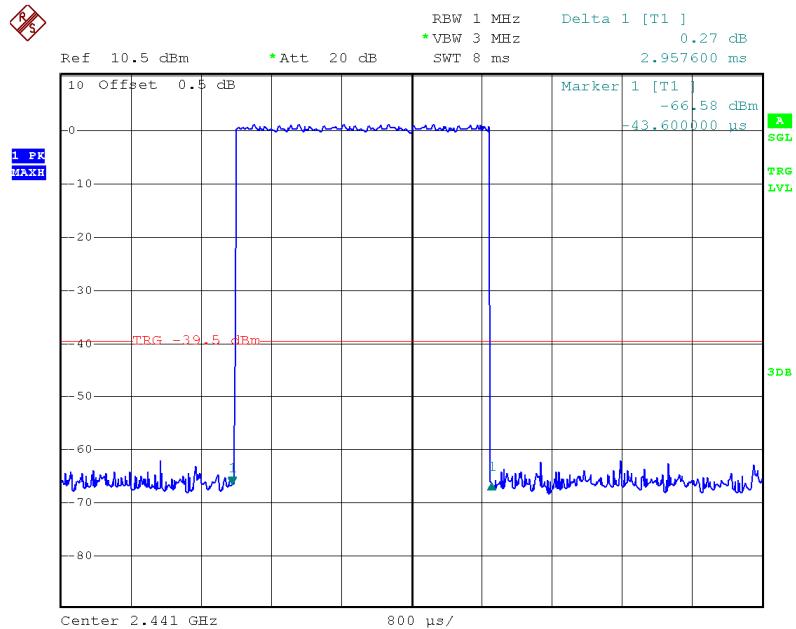

## High Channel for DH5

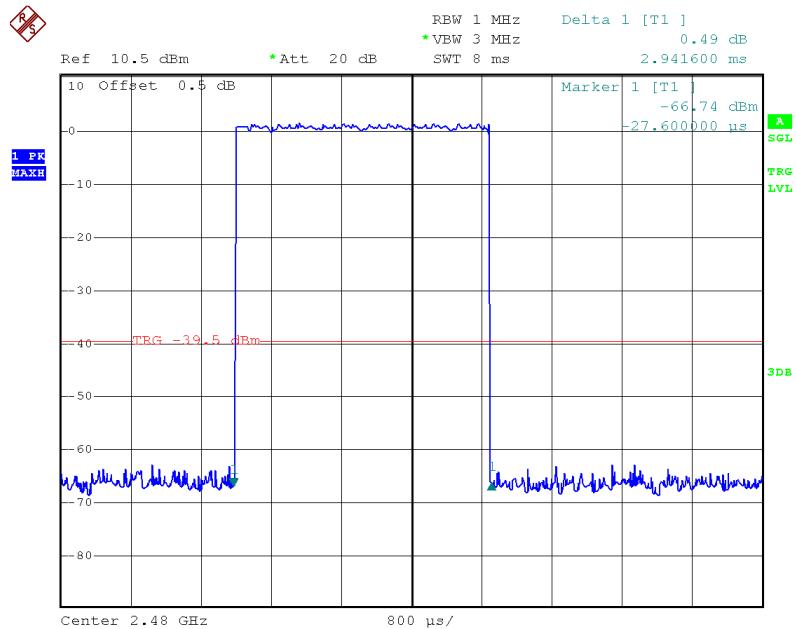


## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

\* The testing was performed by Leon Chen on 2012-08-31.

**Test Result:** Compliance.

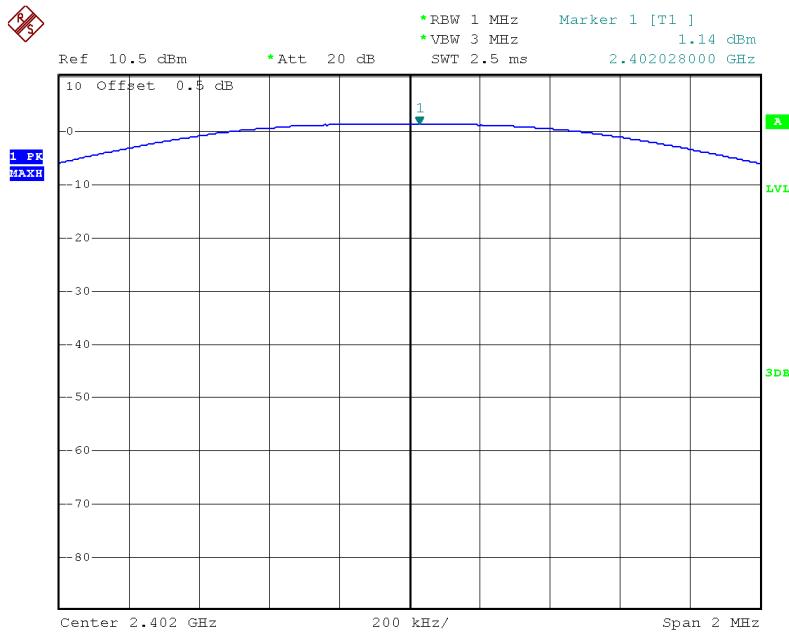
*Test Mode: Transmitting*

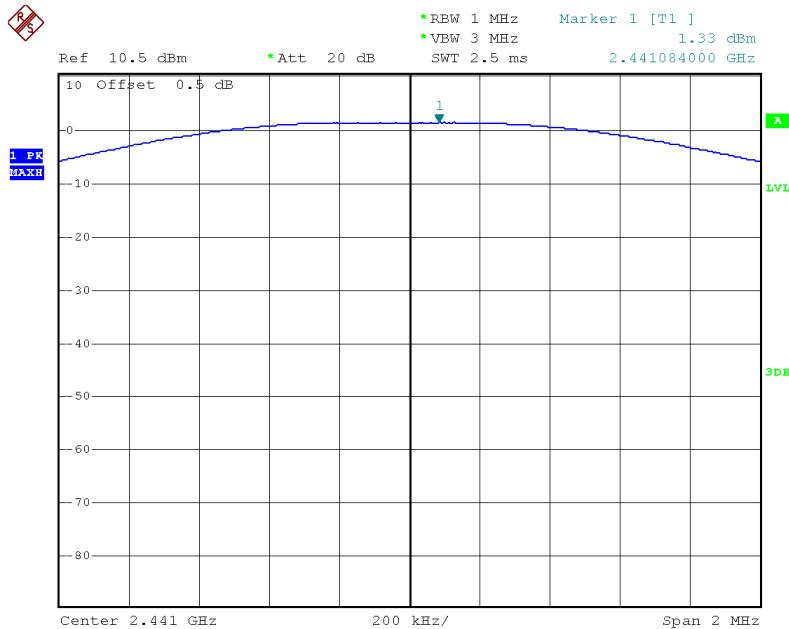
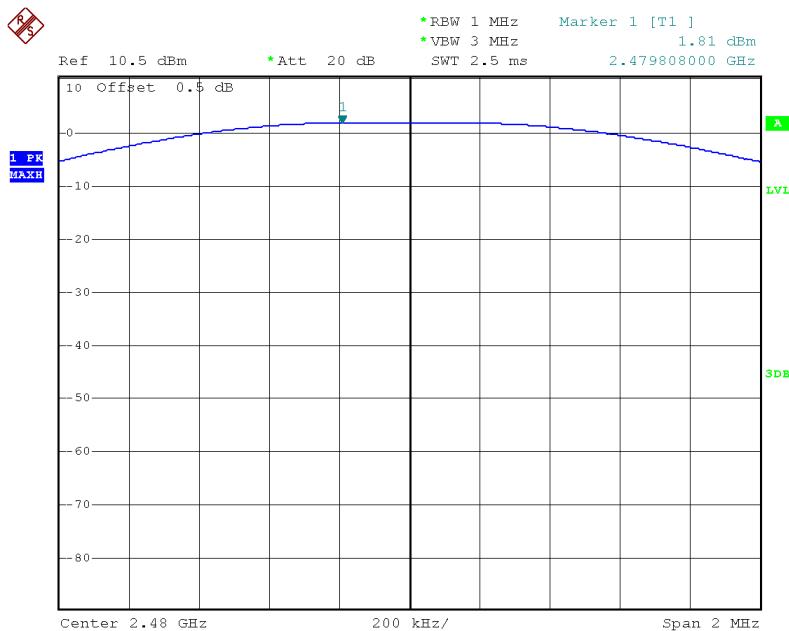
*BDR Mode (GFSK):*

channel	Channel frequency (MHz)	Reading output power (dBm)	Output Power (mW)	Limit (mW)
Low channel	2402	1.14	1.300	1000
Middle channel	2441	1.33	1.358	1000
High channel	2480	1.81	1.517	1000

Note: The data above was tested in conducted mode.

### Low Channel




**Middle Channel****High Channel**



*EDR Mode ( $\pi/4$ -DQPSK):*

channel	Channel frequency (MHz)	Reading output power (dBm)	Output Power (mW)	Limit (mW)
Low channel	2402	0.98	1.253	1000
Middle channel	2441	1.06	1.276	1000
High channel	2480	1.48	1.406	1000

Note: The data above was tested in conducted mode.

### Low Channel

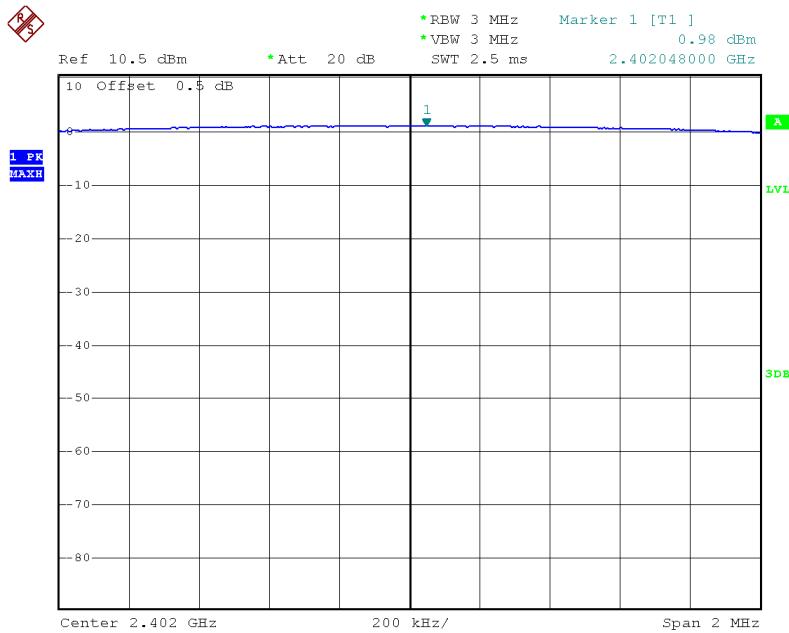

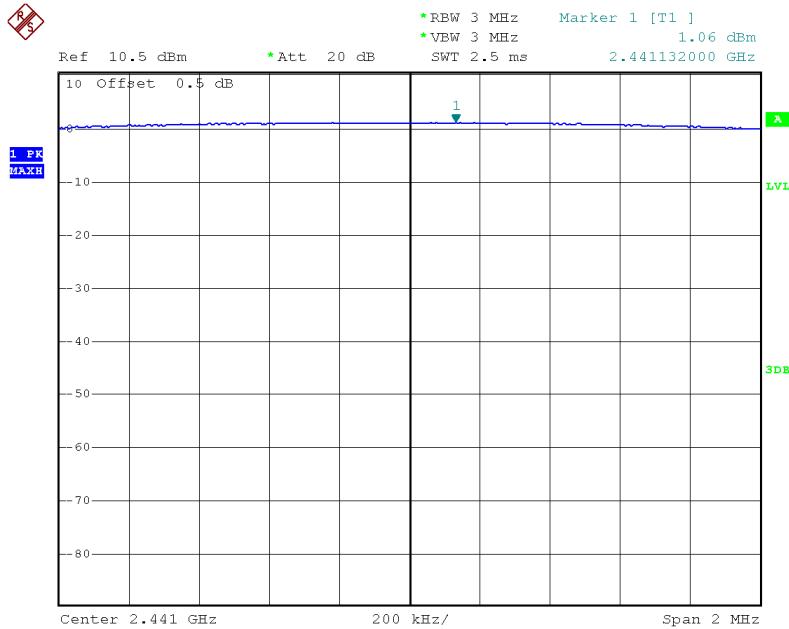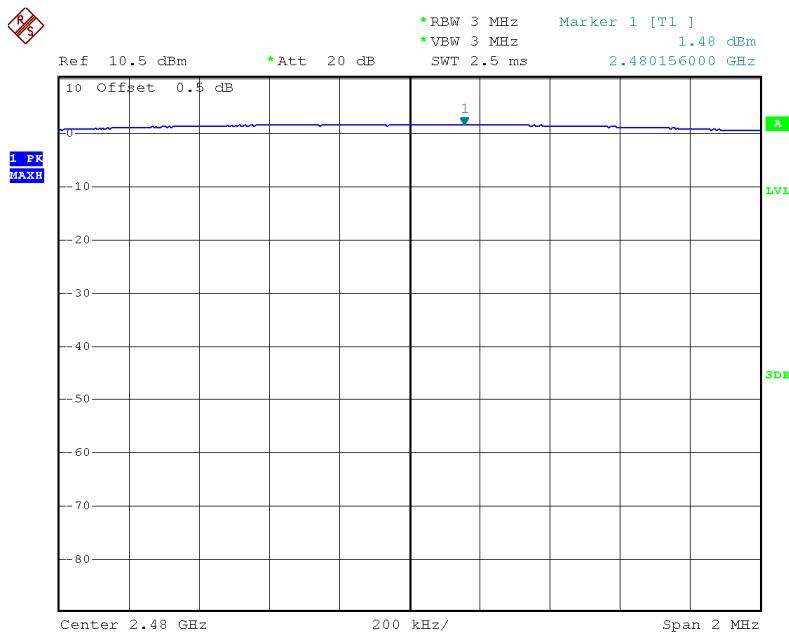
**Middle Channel****High Channel**



*EDR Mode (8DPSK):*

channel	Channel frequency (MHz)	Reading output power (dBm)	Output Power (mW)	Limit (mW)
Low channel	2402	1.16	1.306	1000
Middle channel	2441	1.40	1.380	1000
High channel	2480	1.85	1.531	1000

Note: The data above was tested in conducted mode.

### Low Channel

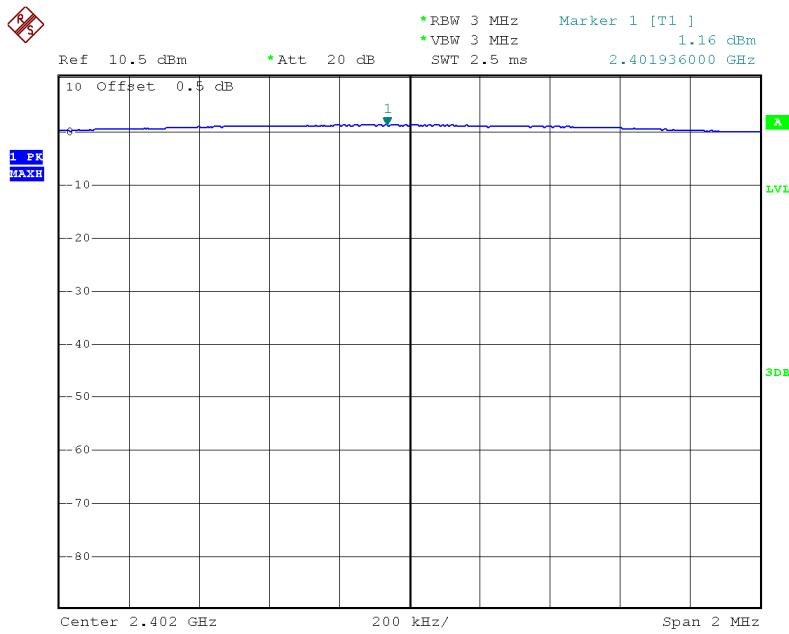

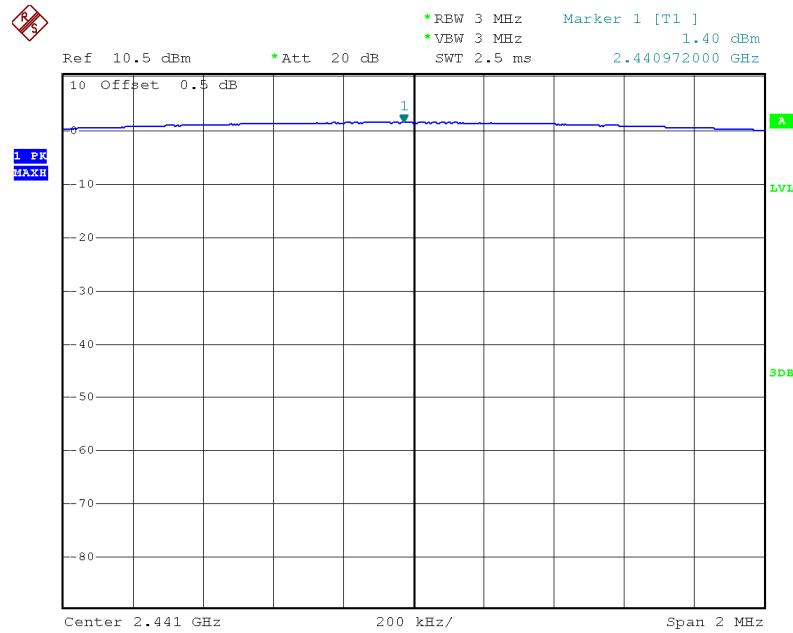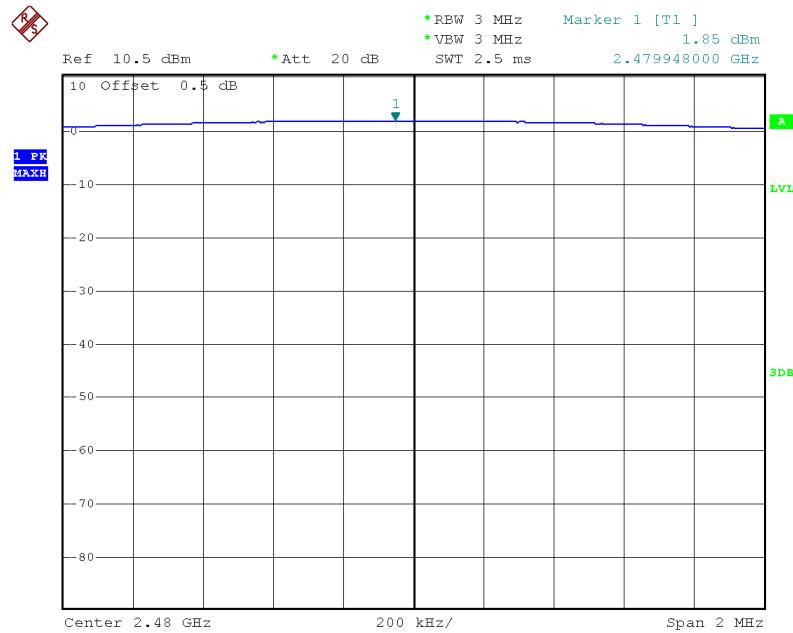**Middle Channel****High Channel**

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

## Test Data

### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

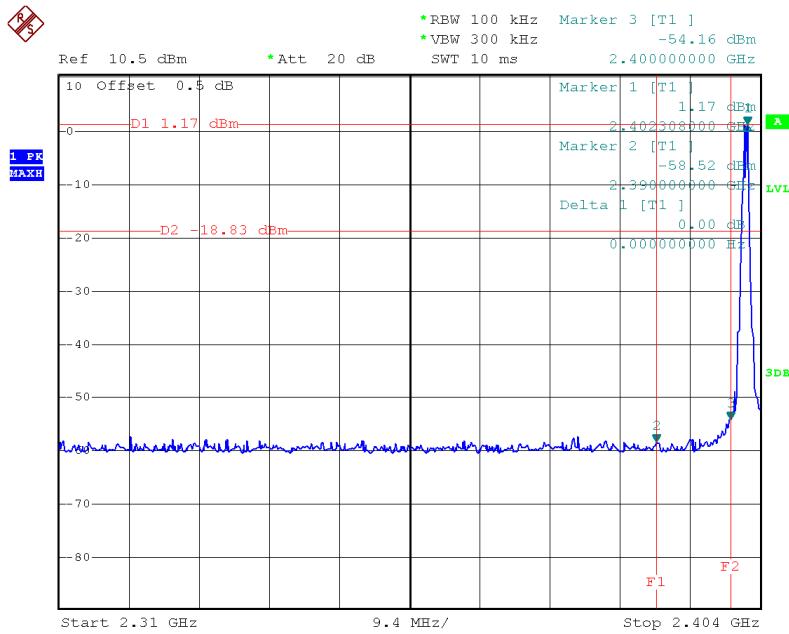
\*The testing was performed by Leon Chen on 2012-08-31.

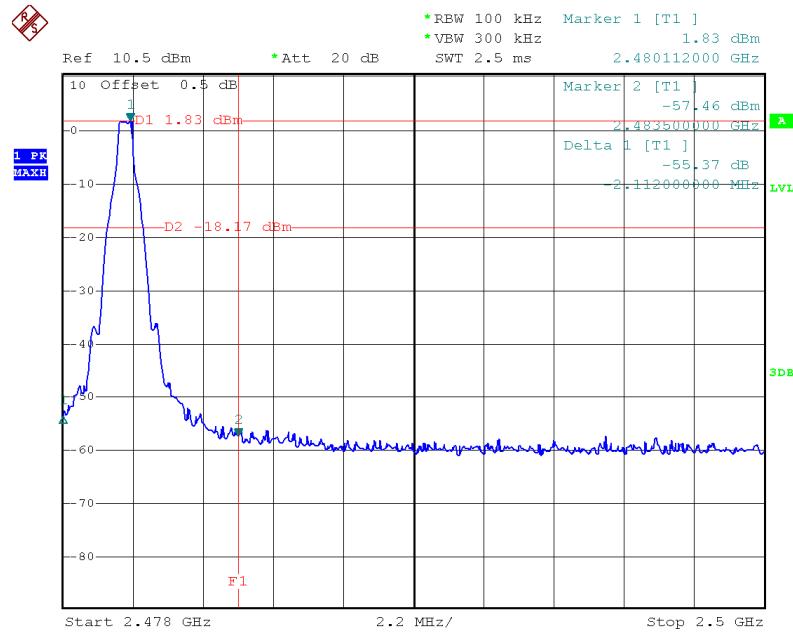
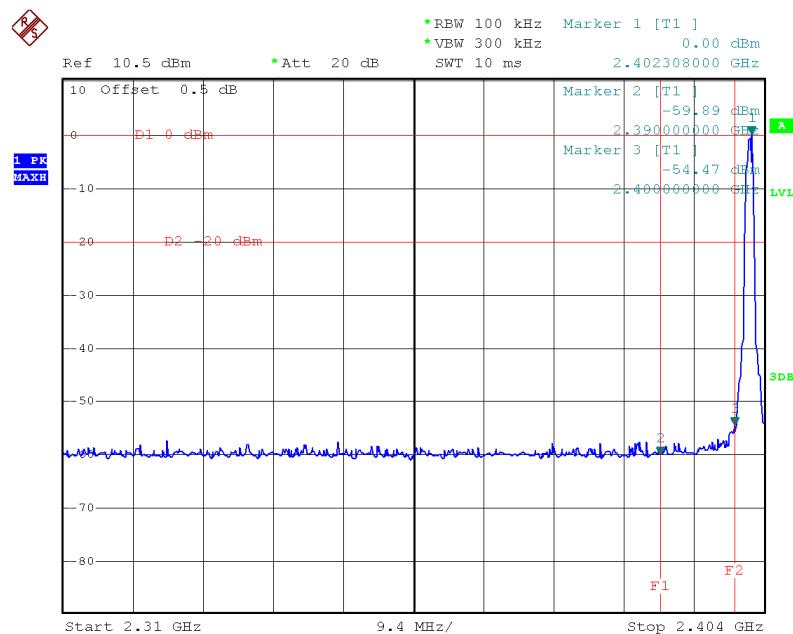
### Test Result: Compliant



Please refer to the following table and plots.


Test Mode: Transmitting

### GFSK - Band Edge: Left Side



**GFSK - Band Edge: Right Side** **$\pi/4$ -DQPSK - Band Edge: Left Side**

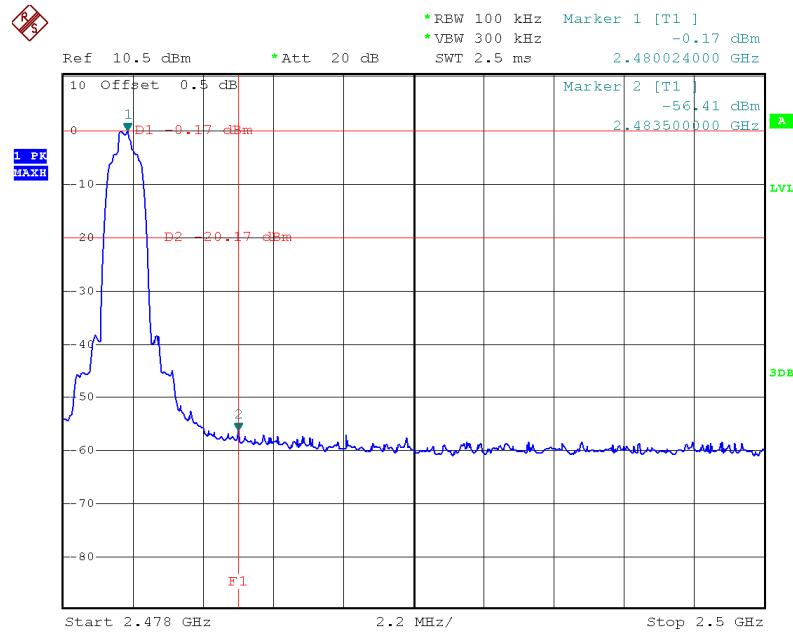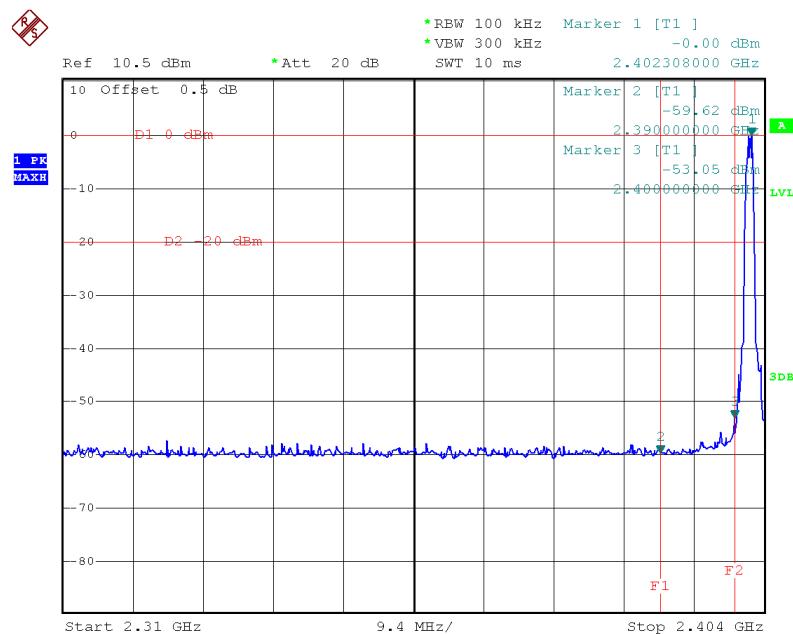**$\pi/4$ -DQPSK - Band Edge: Right Side****8DPSK - Band Edge: Left Side**

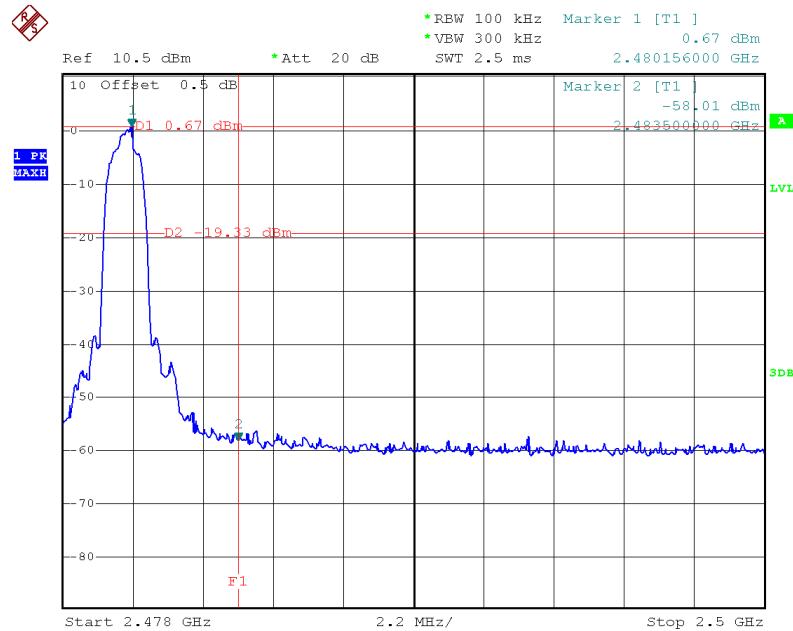**8DPSK - Band Edge: Right Side****\*\*\*\*\*END OF REPORT\*\*\*\*\***