



849 NW State Road 45
Newberry, FL 32669 USA
Ph: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15.249 AND IC RSS-210
TEST REPORT
UNLICENSED INTENTIONAL RADIATOR

| | | |
|-----------------------------|--|-------------------------------|
| Applicant | BIT CAULDRON CORPORATION | |
| Address | 1411 NW 7th Rd | |
| | GAINESVILLE FL 32603 USA | |
| FCC ID | YN3-01007001 | |
| IC | 9186A-01007001 | |
| Model Number | MV-BC0100, BC100 | |
| Product Description | WIRELESS TRANSMITTER | |
| Date Sample Received | 8/23/2010 | |
| Date Tested | 9/9/2010 | |
| Tested By | Joe Scoglio | |
| Approved By | Mario R. de Aranzeta | |
| Report Number | 1990AT10TestReport.doc | |
| Test Results | <input checked="" type="checkbox"/> PASS | <input type="checkbox"/> FAIL |

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Certificate # 0955-01



TABLE OF CONTENTS

| | |
|--|----|
| GENERAL REMARKS..... | 3 |
| GENERAL INFORMATION..... | 4 |
| EMC EQUIPMENT LIST | 5 |
| TEST PROCEDURES | 6 |
| RADIATION INTERFERENCE..... | 7 |
| OCCUPIED BANDWIDTH..... | 8 |
| BAND EDGE COMPLIANCE..... | 9 |
| POWER LINE CONDUCTED INTERFERENCE..... | 11 |

APPLICANT: BIT CAULDRON CORPORATION
FCC ID: YN3-01007001
IC: 9186A-01007001
REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc



GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 9/9/2010

APPLICANT: BIT CAULDRON CORPORATION
FCC ID: YN3-01007001
IC: 9186A-01007001
REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc



GENERAL INFORMATION

DUT Specification

| The test results relate only to the items tested. | | | | | |
|---|---|--|--|--|--|
| Applicable Standard | Part 15.249 | | | | |
| DUT Description | WIRELESS TRANSMITTER | | | | |
| FCC ID | YN3-01007001 | | | | |
| IC | 9186A-01007001 | | | | |
| Model Number | MV-BC0100, BC100 | | | | |
| Operating Frequency | TX: 2475.1 | RX: Same | | | |
| No. of Channels | 1 | | | | |
| DUT Power Source | <input type="checkbox"/> 110-120Vac/50- 60Hz <input type="checkbox"/> DC Power <input checked="" type="checkbox"/> Battery Operated Exclusively | | | | |
| Test Item | <input type="checkbox"/> Prototype | <input checked="" type="checkbox"/> Pre-Production | <input type="checkbox"/> Production | | |
| Type of Equipment | <input type="checkbox"/> Fixed | <input type="checkbox"/> Mobile | <input checked="" type="checkbox"/> Portable | | |
| Antenna Connector | Fixed antenna | | | | |
| Test Facility | Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA. | | | | |
| Test Conditions | Temperature: 26°C Relative humidity: 50% | | | | |
| Test Exercise | The DUT was placed in continuous transmit mode of operation. | | | | |
| Modifications | None | | | | |

Test Supporting Equipment

| Supporting Device | Manufacturer | Model / FCC ID | Serial Number |
|-------------------|--------------|----------------|---------------|
| Laptop computer | Samsung | NP-R480L | |

APPLICANT: BIT CAULDRON CORPORATION

FCC ID: YN3-01007001

IC: 9186A-01007001

REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc



EMC EQUIPMENT LIST

| Device | Manufacturer | Model | Serial Number | Cal/Char Date | Due Date |
|---------------------------------------|--------------------|---------------|--------------------------|----------------|----------|
| 3-Meter Semi-Anechoic Chamber | Panashield | N/A | N/A | Listed 3/10/10 | 3/10/12 |
| AC Voltmeter | HP | 400FL | 2213A14499 | CAL 3/23/09 | 3/23/11 |
| Antenna: Dipole Kit | Electro-Metrics | TDA-30/1-4 | 153 | CHAR 6/10/09 | 6/10/11 |
| Frequency Counter | HP | 5385A | 3242A07460 | CAL 5/26/09 | 5/26/11 |
| Hygro-Thermometer | Extech | 445703 | 0602 | CAL 1/30/09 | 1/30/11 |
| Modulation Analyzer | HP | 8901A | 3435A06868 | CAL 5/26/09 | 5/26/11 |
| Digital Multimeter | Fluke | FLUKE-77-3 | 79510405 | CAL 5/18/09 | 5/18/11 |
| Analyzer Tan Tower Preamplifier | HP | 8449B-H02 | 3008A00372 | CAL 11/21/09 | 11/21/11 |
| Analyzer Tan Tower Quasi-Peak Adapter | HP | 85650A | 3303A01690 | CAL 11/22/09 | 11/22/11 |
| Analyzer Tan Tower RF Preselector | HP | 85685A | 3221A01400 | CAL 11/21/09 | 11/21/11 |
| Analyzer Tan Tower Spectrum Analyzer | HP | 8566B Opt 462 | 3138A07786 3144A20661 | CAL 11/24/09 | 11/24/11 |
| Temperature Chamber | Tenney Engineering | TTRC | 11717-7 | CHAR 4/25/10 | 4/25/12 |

APPLICANT: BIT CAULDRON CORPORATION

FCC ID: YN3-01007001

IC: 9186A-01007001

REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc



TEST PROCEDURES

Radiation Interference: ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

| | | | | |
|------------|---------------|------------|-------|---------------------------|
| Freq (MHz) | Meter Reading | + ACF | + CL | = FS |
| 33 | 20 dB μ V | + 10.36 dB | + 0.5 | = 30.86 dB μ V/m @ 3m |

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

ANSI C63.4-2003 10.1 Measurement Procedures: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: BIT CAULDRON CORPORATION

FCC ID: YN3-01007001

IC: 9186A-01007001

REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc



RADIATION INTERFERENCE

Rules Part No.: 15.249, 15.209, RSS-210, RSS-GEN

Requirements:

| Frequency | Limits |
|------------------------------|-------------------------------------|
| Part 15.209 | |
| 9 to 490 kHz | 2400/F (kHz) μ V/m @ 300 meters |
| 490 to 1705 kHz | 24000/F (kHz) μ V/m @ 30 meters |
| 1705 kHz to 30 MHz | 29.54 dB μ V/m @ 30 meters |
| 30 – 88 | 40.0 dB μ V/m @ 3 meters |
| 80 – 216 | 43.5 dB μ V/m @ 3 meters |
| 216 – 960 | 46.0 dB μ V/m @ 3 meters |
| Above 960 | 54.0 dB μ V/m @ 3 meters |
| Part 15.249 | |
| Fundamental 902 – 928 MHz | 94.0 dB μ V/m @ 3 meters |
| Fundamental 2.4 – 2.4835 MHz | 94.0 dB μ V/m @ 3 meters |
| Harmonics | 54.0 dB μ V/m @ 3 meters |

Test Data:

| Tuned Frequency MHz | Emission Frequency MHz | Meter Reading dB μ V | Ant. Pol | Coax Loss dB | Correction Factor dB | Field Strength dB μ V/m | Margin dB |
|---------------------|------------------------|--------------------------|----------|--------------|----------------------|-----------------------------|-----------|
| 2,475.1 | 2,475.10 | 55.4 | V | 3.23 | 32.44 | 91.07 | 36.31 |
| 2,475.1 | 2,475.10 | 56.2 | H | 3.23 | 32.44 | 91.87 | 35.51 |
| 2,475.1 | 4,950.20 | 5.2 | H | 4.98 | 34.10 | 44.28 | 9.72 |
| 2,475.1 | 4,950.20 | 5.8 | V | 4.98 | 34.10 | 44.88 | 9.12 |

APPLICANT: BIT CAULDRON CORPORATION

FCC ID: YN3-01007001

IC: 9186A-01007001


REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc

OCCUPIED BANDWIDTH

Rules Part No.: 15.249 (d), RSS-210, RSS-GEN

Requirements: The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

Test Data: The 20 dB bandwidth is 2.5 MHz

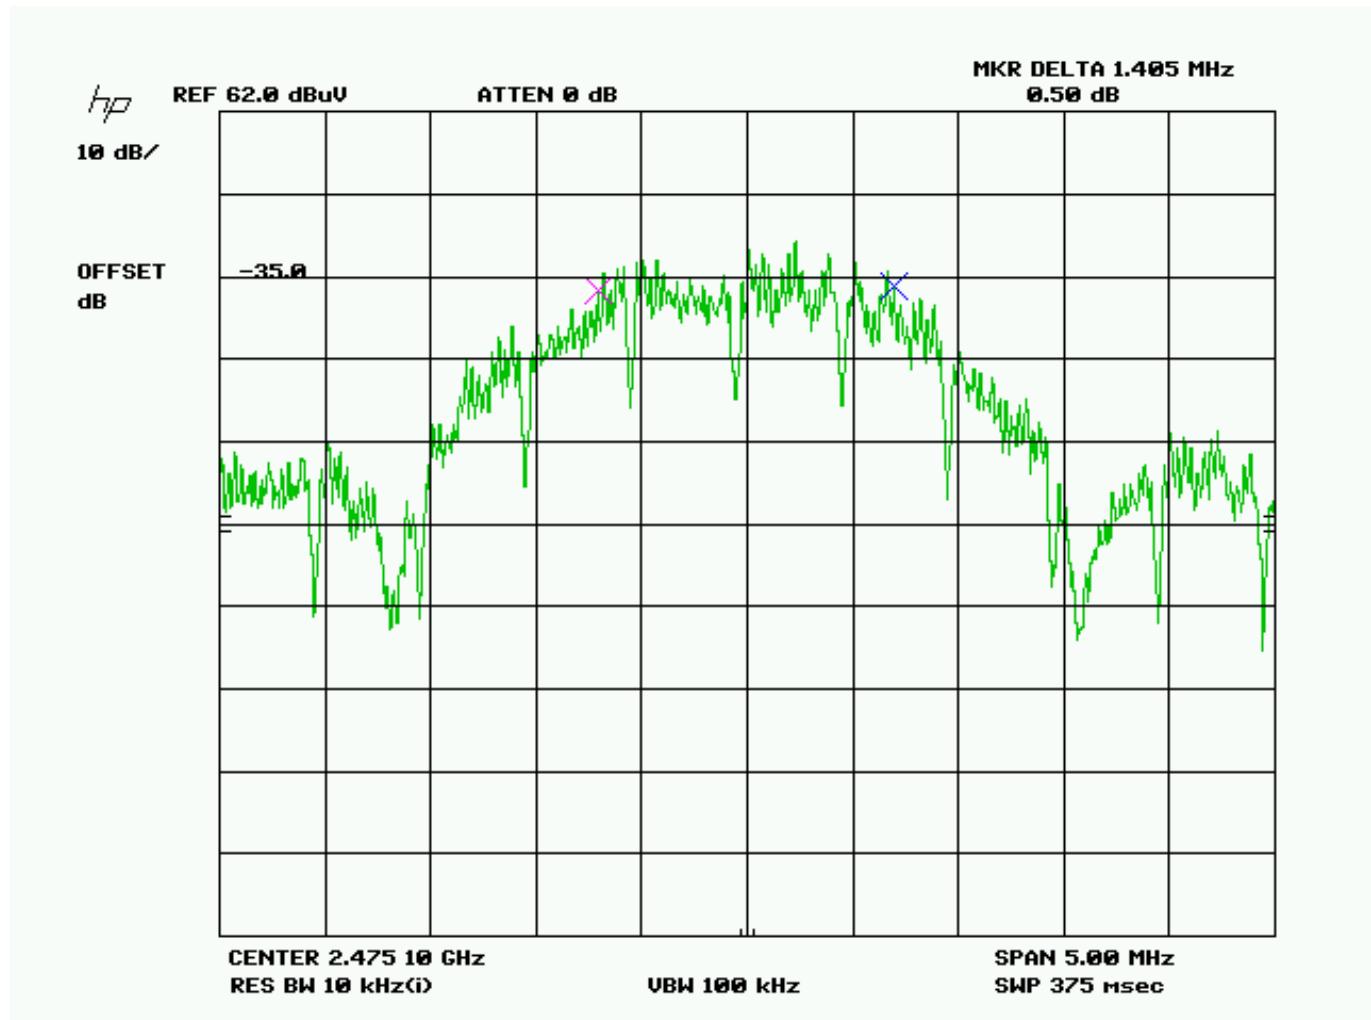

APPLICANT: BIT CAULDRON CORPORATION

FCC ID: YN3-01007001

IC: 9186A-01007001

REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc


BAND EDGE COMPLIANCE

Rules Part No.: 15.249 (d), RSS-210, RSS-GEN

Requirements: 40 dBc or in the case of restricted bands 54 dB μ V/m.

Test Data:

Lower bandedge

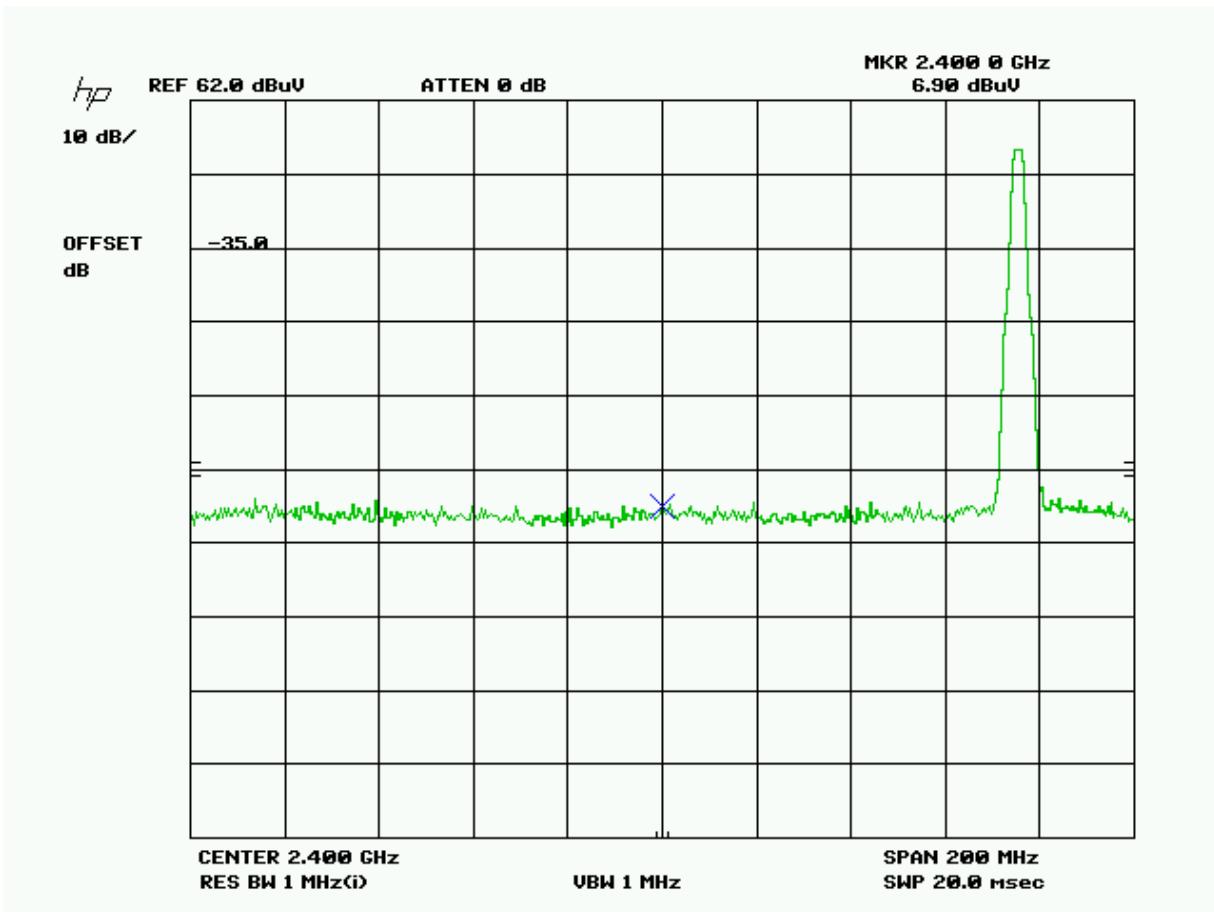

| Tuned Frequency MHz | Emission Frequency MHz | Meter Reading dB μ V | Ant. Pol | Coax Loss dB | Correction Factor dB/m | Field Strength dB μ V/m | Margin dB |
|---------------------|------------------------|--------------------------|----------|--------------|------------------------|-----------------------------|-----------|
| 2,475.1 | 2,400.00 | 6.9 | V | 3.18 | 32.24 | 42.32 | 11.68 |


APPLICANT: BIT CAULDRON CORPORATION

FCC ID: YN3-01007001

IC: 9186A-01007001

REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc

Upper bandedge Peak

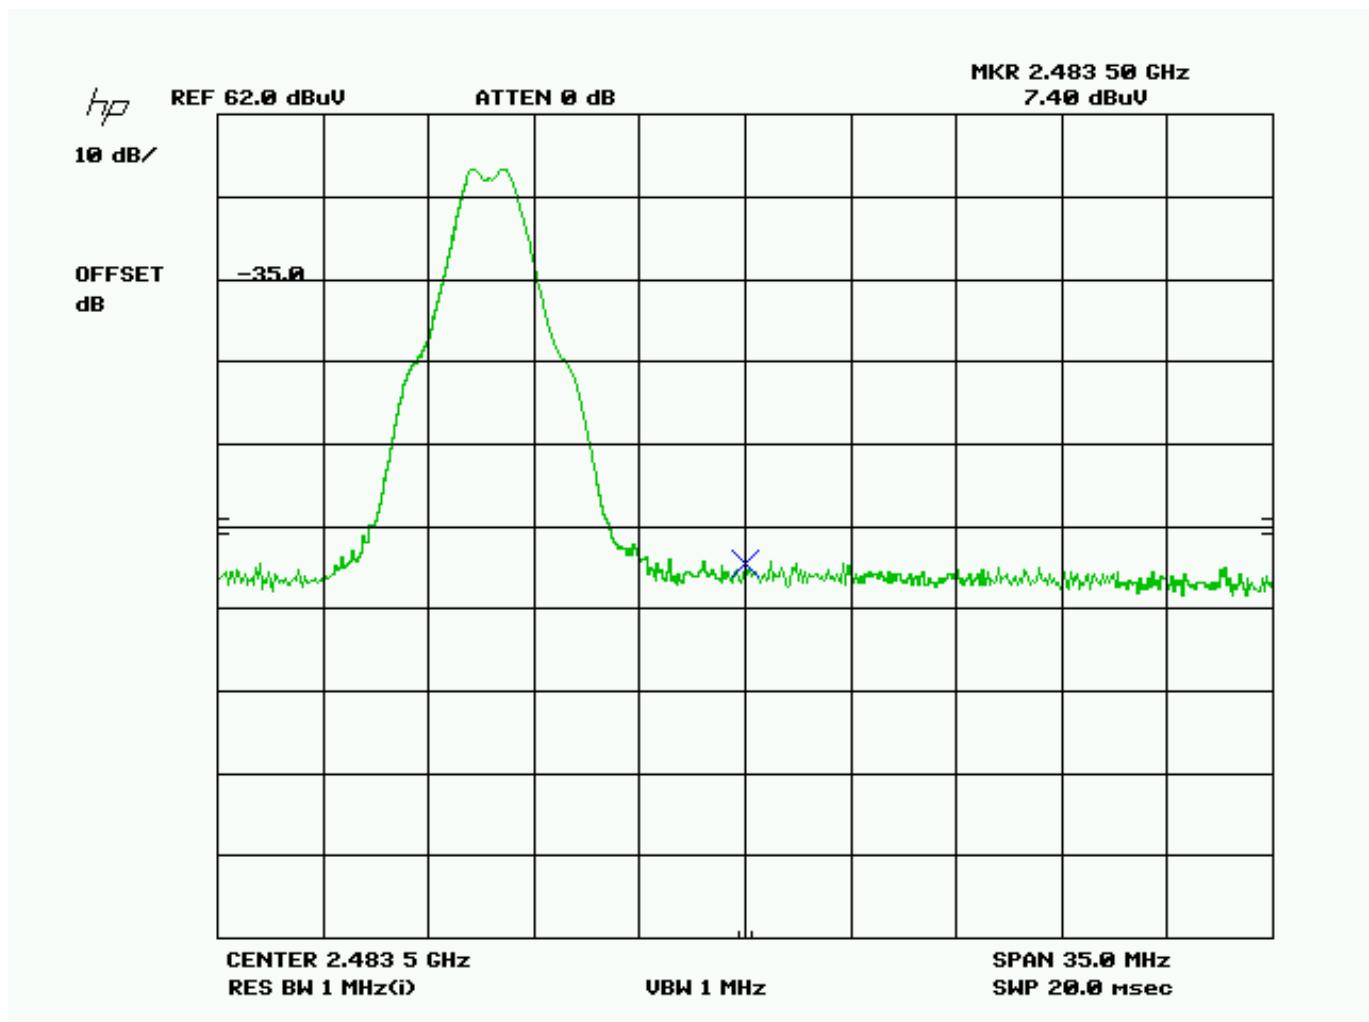

| Tuned Frequency MHz | Emission Frequency MHz | Meter Reading dB μ V | Ant. Pol | Coax Loss dB | Correction Factor dB/m | Field Strength dB μ V/m | Margin dB |
|---------------------|------------------------|--------------------------|----------|--------------|------------------------|-----------------------------|-----------|
| 2,475.1 | 2,483.50 | 7.4 | V | 3.24 | 32.46 | 43.10 | 10.9 |

APPLICANT: BIT CAULDRON CORPORATION

FCC ID: YN3-01007001

IC: 9186A-01007001

REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc



POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: 15.207, RSS-GEN

Requirements:

| Frequency (MHz) | Quasi Peak Limits (dB μ V) | Average Limits (dB μ V) |
|--------------------|-----------------------------------|--------------------------------|
| 0.15 – 0.5 | 66 – 56 | 56 – 46 |
| 0.5 – 5.0 | 56 | 46 |
| 5.0 – 30 | 60 | 50 |


Test Data: The following plots represent the emissions read for power line conducted. Both lines were observed.

APPLICANT: BIT CAULDRON CORPORATION
FCC ID: YN3-01007001
IC: 9186A-01007001
REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc

POWERLINE CONDUCTED – LINE 1

NOTES:

ac line conducted line 1

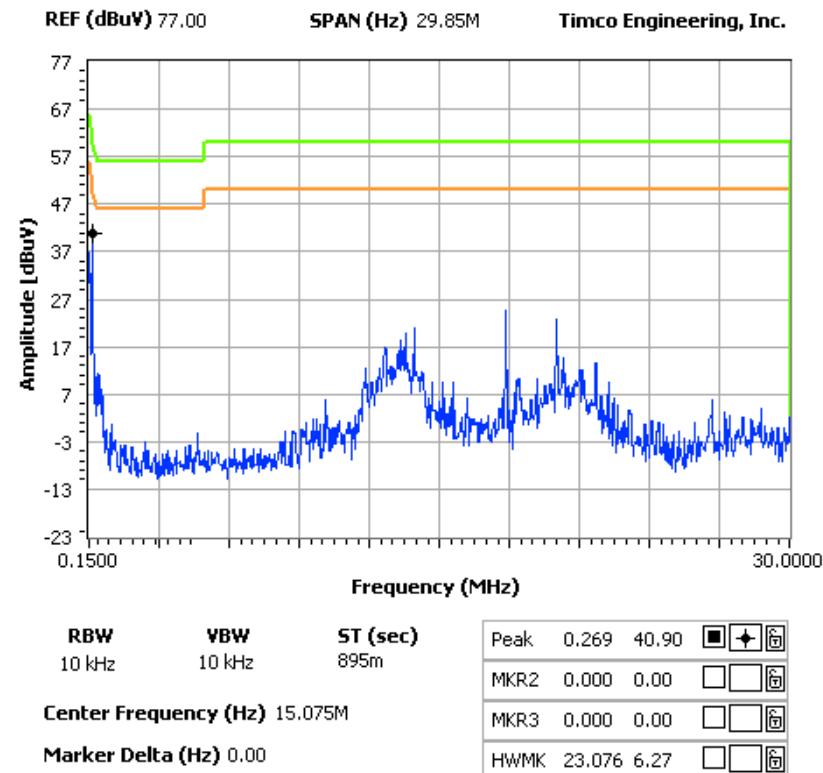FCC 15.107 Mask Class B


APPLICANT: BIT CAULDRON CORPORATION

FCC ID: YN3-01007001


IC: 9186A-01007001

REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc

POWERLINE CONDUCTED – LINE 2

NOTES:

ac line conducted line 2

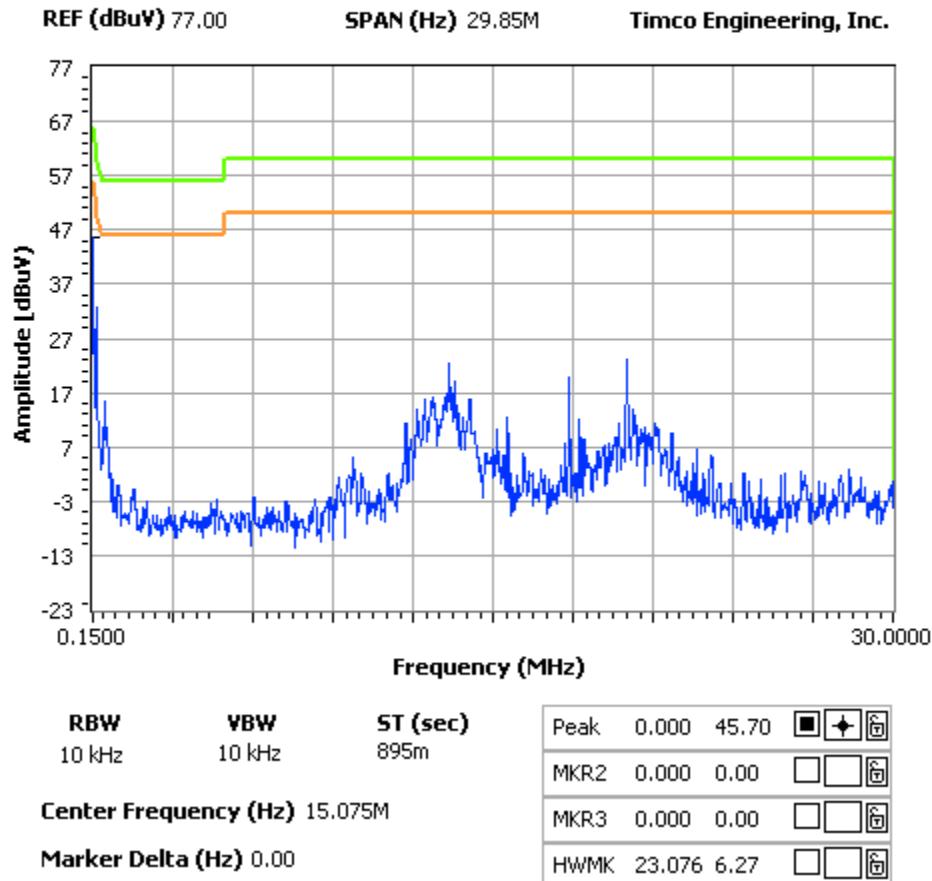FCC 15.107 Mask Class B


APPLICANT: BIT CAULDRON CORPORATION

FCC ID: YN3-01007001

IC: 9186A-01007001

REPORT: Z:\B\BIT CAULDRON\1990AT10\1990AT10TestReport.doc