



TESTREPORT

Applicant Name : Grandstream Networks, Inc.
Address : 126 Brookline Ave, 3rd Floor Boston, MA 02215, USA
Manufacturer Name : Grandstream Networks, Inc.
Address : 126 Brookline Ave, 3rd Floor Boston, MA 02215, USA
Report Number : SZNS220407-12824E-RFB
FCC ID: YZZGXV3480
IC: 11964A-GXV3480

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2, FEBRUARY 2017

Sample Description

Product Type: High-End Smart Video Phone for Android™
Model No.: GXV3480
Trade Mark: GRANDSTREAM
Date Received: 2022/04/07
Report Date: 2022/07/31

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:

Andy Yu
EMC Engineer

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	12
TEST EQUIPMENT LIST	13
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	15
APPLICABLE STANDARD	15
RESULT	16
RSS-102 § 4 –EXPOSURE LIMITS.....	17
APPLICABLE STANDARD	17
§15.203 & RSS-GEN §6.8 ANTENNA REQUIREMENT.....	19
APPLICABLE STANDARD	19
ANTENNA CONNECTOR CONSTRUCTION	20
§15.207 (A) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS	21
APPLICABLE STANDARD	21
EUT SETUP	22
EMI TEST RECEIVER SETUP.....	22
TEST PROCEDURE	22
CORRECTED FACTOR & MARGIN CALCULATION	23
TEST DATA	23
§15.205, §15.209, §15.247(D) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS.....	32
APPLICABLE STANDARD	32
EUT SETUP	32
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	33
TEST PROCEDURE	34
FACTOR & MARGIN CALCULATION	34
TEST DATA	34
§15.247 (A)(2) & RSS-GEN§6.7 RSS-247 § 5.2 (A) 99% OCCUPIED BANDWIDTH & 6 DB EMISSION BANDWIDTH.....	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST DATA	54

§15.247(B)(3) & RSS-247 § 5.4(D) MAXIMUM CONDUCTED OUTPUT POWER	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST DATA	56
§15.247(D) & RSS-247 § 5.5 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST DATA	57
§15.247(E) & RSS-247 § 5.2 (B) POWER SPECTRAL DENSITY	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST DATA	58
APPENDIX WI-FI.....	59
APPENDIX A: DTS BANDWIDTH	59
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	64
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	69
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	71
APPENDIX E: BAND EDGE MEASUREMENTS.....	91
APPENDIX F1: DUTY CYCLE	103
APPENDIX BLE.....	107
APPENDIX A: DTS BANDWIDTH	107
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	110
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER	113
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	116
APPENDIX E: BAND EDGE MEASUREMENTS.....	119
APPENDIX F: DUTY CYCLE	121

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	GXV3480
FVIN	5.22.4.11
Frequency Range	BLE_1M & BLE_2M: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	BLE: 5.11dBm Wi-Fi: 15.53dBm(802.11b), 18.59dBm(802.11g) 20.19dBm(802.11n-HT20), 25.46dBm(802.11ax20),
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM, OFDMA
Antenna Specification*	Antenna 0: 4dBi Antenna 1: 2.5dBi (It is provided by the applicant)
Voltage Range	DC 12V from adapter or DC 44-57V from POE
Sample serial number	SZNS220407-12824E-RF-S1 for Conducted and Radiated Emissions SZNS220407-12824E-RF-S2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter 1 information	Model: F18W8-120150SPAUY Input: AC 100-240V, 50/60Hz, 0.6A Output: DC12.0V,1.5A
Adapter 2 information	Model: DSA-18PFR-09 FUS 120150 Input: AC 100-240V, 50/60Hz, 0.6A Output: DC12.V,1.5A,18.0W
Adapter 3 information	Model: H18US1200150A Input: AC 100-240V, 50/60Hz, 0.8A max L.P.S Output: DC12.V,1.5A

Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247, Issue 2, February 2017 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247, Issue 2, February 2017.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20, 802.11ax20, EUT was tested with Channel 1, 6 and 11.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“SecureCRT”* exercise software was used. The software and power level was provided by the manufacturer.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level*		
		Low Channel	Middle Channel	High Channel
BLE	1Mbps	default	default	default
	2Mbps	default	default	default
802.11b	1Mbps	11	11	11
802.11g	6Mbps	13	13	13
802.11n-HT20	MCS0	13	13	13

Mode	Data rate	RU Size	RU index	Power Level*		
				Low Channel	Middle Channel	High Channel
802.11ax-VHT20	MCS0	26Tones	0	13	13	13
	MCS0	52Tones	37	13	13	13
	MCS0	106Tones	53	13	13	13
	MCS0	242Tones	61	13	13	13

For Wi-Fi mode, EUT have two antennas, the 802.11b/g mode only support SISO transmit, the 802.11n/ax mode support SISO/MIMO transmit.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PSD across all data rates, bandwidths and modulations.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Note Book1	Latitude E4710	PC201911252059
DELL	Note Book	XXJL-2	XXJL-2
HUAWEI	Router	WS5100	A4933FEF1D01
Unknown	Earphone	Unknown	E1
YEALINK	Headphone	Unknown	H1
Unknown	U disk	Unknown	U1
DELL	Monitor	RVE A00	506250042400R
GOSPELL	POE	G0720-480	G0720-480
Huawei	Phone	Nova 7	Nova 7


External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded detachable AC cable	1.5	POE/Receptacle	LISN
Un-shielded detachable RJ45 cable	1.5	POE	EUT
Un-shielded detachable RJ45 cable	8.0	EUT	Router
Un-shielded detachable RJ45 cable	8.0	EUT	NoteBook1
Un-shielded detachable HDMI cable	1.5	EUT	NoteBook
Un-shielded detachable HDMI cable	1.5	EUT	Monitor
Unshielded detachable USB cable	1.0	Phone	EUT
Unshielded Un-detachable DC cable	2.5	Adapter	EUT


Block Diagram of Test Setup

For conducted emission

Powered by POE:

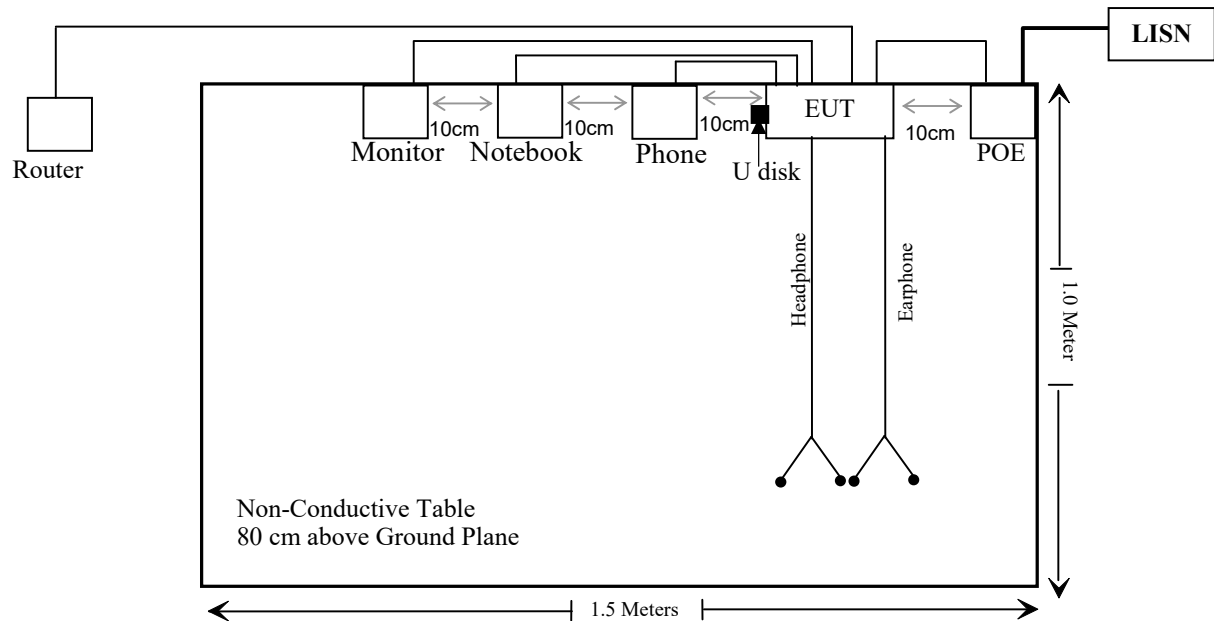


Powered by adapter:

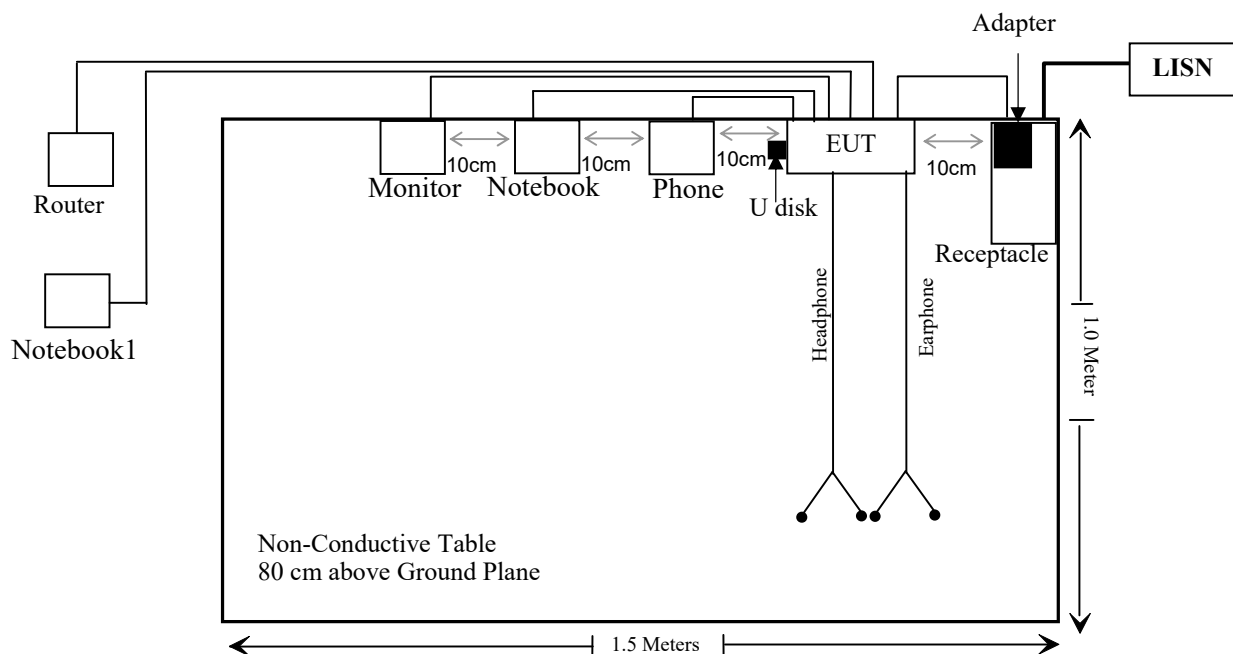


For radiated emission (below 1GHz):


Powered by POE:

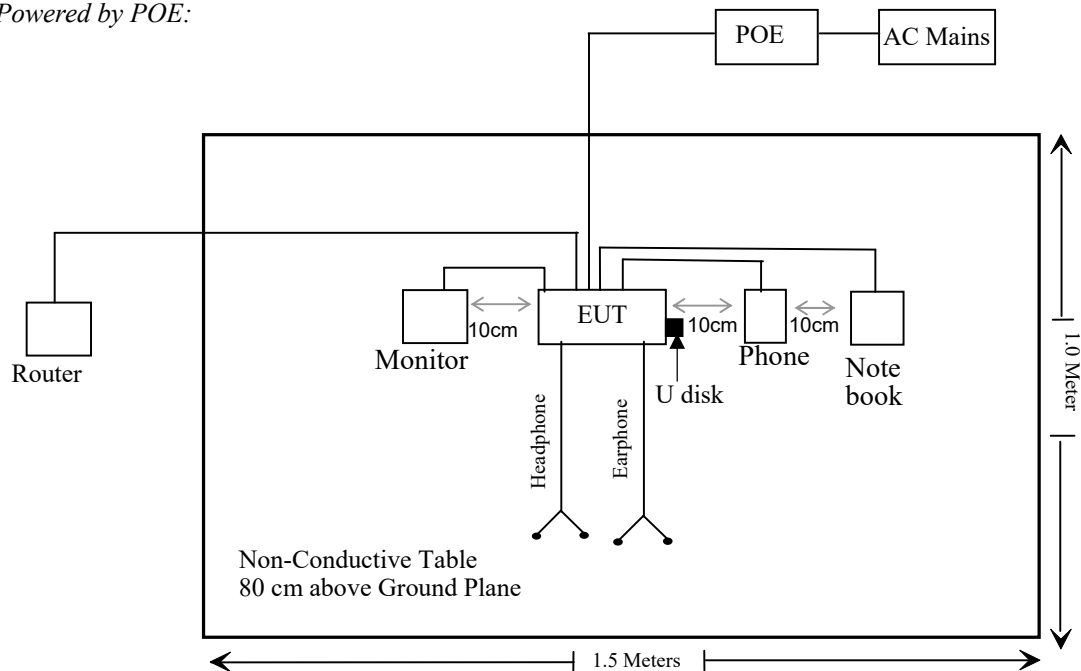

Powered by Adapter:

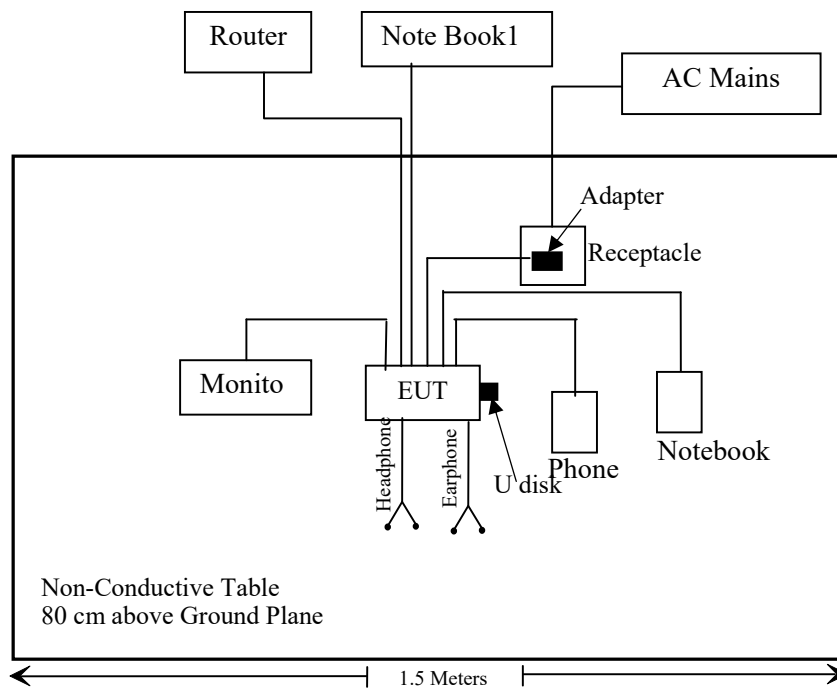

For radiated emission (above 1GHz):

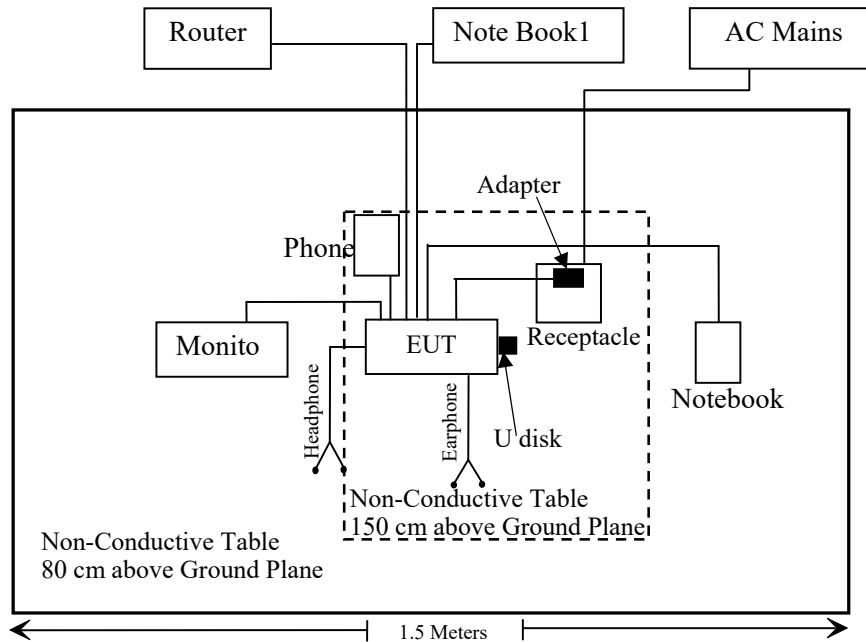

SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
§15.247 (i), §2.1091	RSS-102§4	Maximum Permissible Exposure(MPE) EXPOSURE LIMITS	Compliant
§15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§15.207 (a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 & RSS-247 § 5.5	Spurious Emissions	Compliant
§15.247 (a)(2)	RSS- Gen§6.7 RSS-247 § 5.2 (a)	99% Occupied Bandwidth & 6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	RSS-247 § 5.4(d)	Maximum Conducted Output Power	Compliant
§15.247(d)	RSS-247 § 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	RSS-247 § 5.2 (b)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
NARDA	Magnetic field tester	2300/90.10	B-0137	2021/12/22	2022/12/21
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/01/19	2023/01/18
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/10/26	2022/10/25
SPECTRUM ANALYZER	Rohde & Schwarz	FSU26	200982	2021/07/06	2022/07/05
SPECTRUM ANALYZER	Rohde & Schwarz	FSU26	200982	2022/07/06	2023/07/05
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	/
Unknown	RF Cable	Unknown	1	Each time	/

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Frequency (MHz)	Tune up conducted power	Antenna Gain		ERP		Evaluation Distance (m)	ERP Limit (W)
	(dBm)	(dBi)	(dBd)	(dBm)	(W)		
2402-2480	9.0	4.0	1.85	10.85	0.012	0.2	0.768
2412-2462	26.0	4.0	1.85	27.85	0.610	0.2	0.768
5150-5250	18.0	5.0	2.85	20.85	0.122	0.2	0.768
5250-5350	17.0	5.0	2.85	19.85	0.097	0.2	0.768
5470-5725	18.0	5.0	2.85	20.85	0.122	0.2	0.768
5725-5850	18.0	5.0	2.85	20.85	0.122	0.2	0.768

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.

2. The Bluetooth can transmit at same time with Wi-Fi, the 2.4G Wi-Fi cannot transmit at the same time with the 5G Wi-Fi.

Simultaneous transmitting consideration (worst case):

The ratio= $ERP_{BT}/limit + ERP_{Wi-Fi}/limit = 0.012/0.768 + 0.610/0.768 = 0.810 < 1.0$, so simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

RSS-102 § 4 –EXPOSURE LIMITS

Applicable Standard

According to RSS-102 §4:

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)				
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ f ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ f ^{0.25}	0.1540/ f ^{0.25}	8.944/ f ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	0.02619 f ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ f ^{1.2}
150000-300000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000/f ^{1.2}

Note: f is frequency in MHz.
 * Based on nerve stimulation (NS).
 ** Based on specific absorption rate (SAR).

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Frequency (MHz)	Antenna Gain		Turn up Power		Evaluation Distance (m)	Power Density (W/m ²)	MPE Limit (W/m ²)
	(dBi)	(numeric)	(dBm)	(W)			
2402-2480	4.0	2.51	9.0	0.008	0.20	0.040	5.35
2412-2462	4.0	2.51	26.0	0.398	0.20	1.988	5.37
5150-5250	5.0	3.16	17.0	0.050	0.20	0.314	9.01
5250-5350	5.0	3.16	17.0	0.050	0.20	0.314	9.13
5470-5725	5.0	3.16	18.0	0.063	0.20	0.396	9.39
5725-5850	5.0	3.16	18.0	0.063	0.20	0.396	9.69

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.

2. The Bluetooth can transmit at same time with Wi-Fi, the 2.4G Wi-Fi cannot transmit at the same time with the 5G Wi-Fi.

Simultaneous transmitting consideration (worst case):

The ratio= $MPE_{Wi-Fi}/limit + MPE_{BT}/limit = 1.988/5.37 + 0.040/5.35 = 0.378 < 1.0$, so simultaneous exposure is compliant.

To maintain compliance with the ISED's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

§ 15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two internal antenna arrangement which was permanently attached, one for BLE&Wi-Fi, another only for Wi-Fi, fulfill the requirement of this section. Please refer to the EUT photos.

ANT	Type	Antenna Gain	Impedance
BLE& Wi-Fi ANT 0	Dipole	4.0dBi	50 Ω
Wi-Fi ANT 1	Dipole	2.5dBi	50 Ω

Result: Compliant

§ 15.207 (a) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC § 15.207 (a) & RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

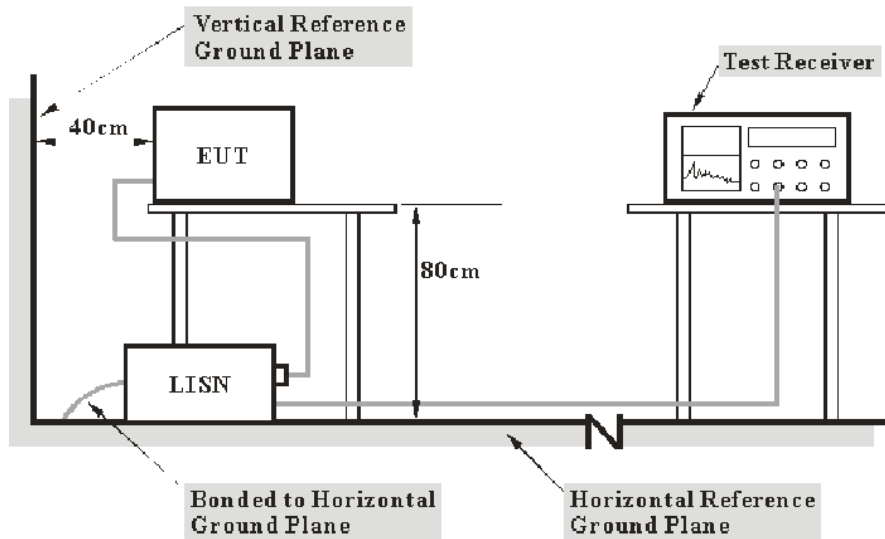

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	23°C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Jason on 2022-05-13.


EUT operation mode: Transmitting (the worst case is 802.11g mode, middle channel)

For Adapter 1 (F18W8-120150SPAUY)

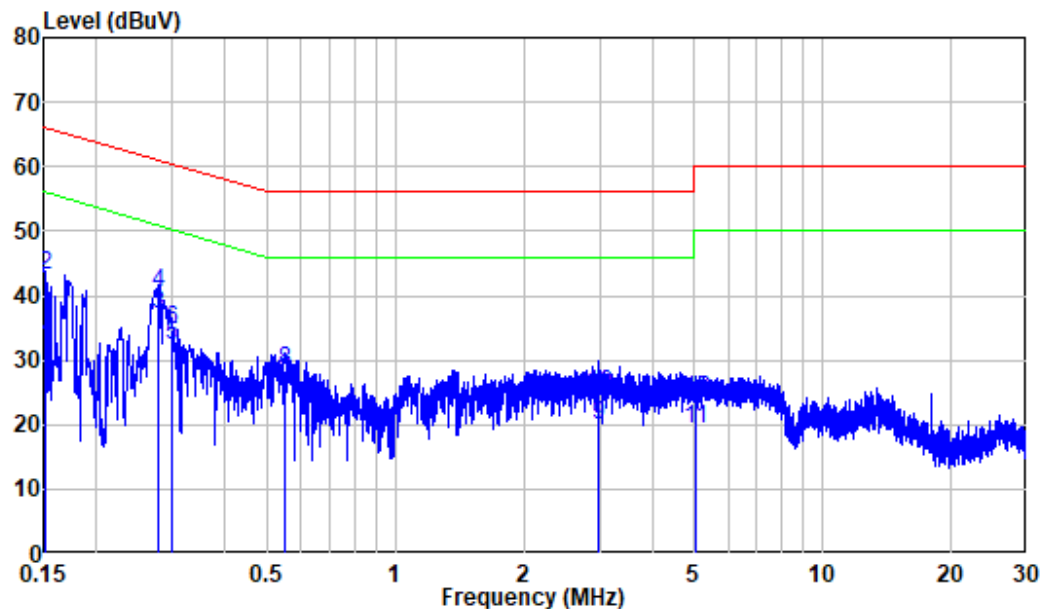AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Job No. : SZNS220407-12824E-RF
 Mode : 2.4G WIFI
 Power : AC 120V 60Hz
 Adapter : F18W8-120150SPAUY


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.151	9.80	22.07	31.87	55.93	-24.06	Average
2	0.151	9.80	33.37	43.17	65.93	-22.76	QP
3	0.279	9.80	27.22	37.02	50.84	-13.82	Average
4	0.279	9.80	30.51	40.31	60.84	-20.53	QP
5	0.301	9.80	22.52	32.32	50.22	-17.90	Average
6	0.301	9.80	25.03	34.83	60.22	-25.39	QP
7	0.550	9.81	14.58	24.39	46.00	-21.61	Average
8	0.550	9.81	18.62	28.43	56.00	-27.57	QP
9	2.974	9.83	9.95	19.78	46.00	-26.22	Average
10	2.974	9.83	14.83	24.66	56.00	-31.34	QP
11	5.045	9.85	9.54	19.39	50.00	-30.61	Average
12	5.045	9.85	14.09	23.94	60.00	-36.06	QP

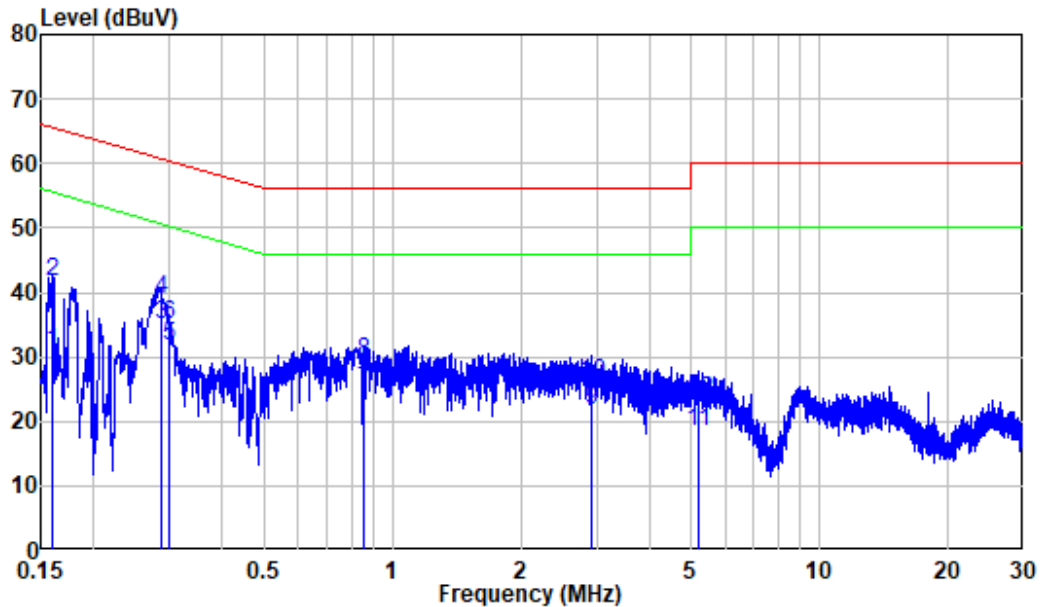AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220407-12824E-RF
 Mode : 2.4G WIFI
 Power : AC 120V 60Hz
 Adapter : F18W8-1201505PAUY


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.160	9.80	21.14	30.94	55.44	-24.50	Average
2	0.160	9.80	31.75	41.55	65.44	-23.89	QP
3	0.287	9.80	25.35	35.15	50.60	-15.45	Average
4	0.287	9.80	29.06	38.86	60.60	-21.74	QP
5	0.301	9.80	21.91	31.71	50.21	-18.50	Average
6	0.301	9.80	25.36	35.16	60.21	-25.05	QP
7	0.856	9.81	14.98	24.79	46.00	-21.21	Average
8	0.856	9.81	19.53	29.34	56.00	-26.66	QP
9	2.917	9.83	11.79	21.62	46.00	-24.38	Average
10	2.917	9.83	16.05	25.88	56.00	-30.12	QP
11	5.204	9.90	8.50	18.40	50.00	-31.60	Average
12	5.204	9.90	13.31	23.21	60.00	-36.79	QP

For Adapter 2 (DSA-18PFR-09 FUS 120150)

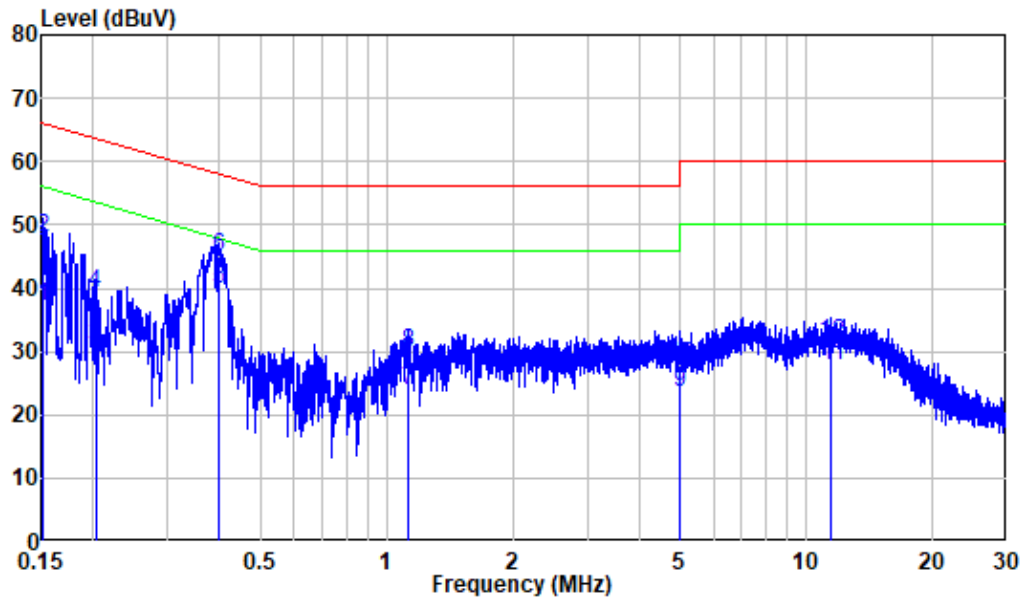AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Job No. : SZNS220407-12824E-RF
 Mode : 2.4G WIFI
 Power : AC 120V 60Hz
 Adapter : DSA-18PFR-09 FUS 120150


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.151	9.80	27.31	37.11	55.93	-18.82	Average
2	0.151	9.80	38.06	47.86	65.93	-18.07	QP
3	0.202	9.80	20.91	30.71	53.51	-22.80	Average
4	0.202	9.80	29.33	39.13	63.51	-24.38	QP
5	0.398	9.80	30.19	39.99	47.89	-7.90	Average
6	0.398	9.80	35.29	45.09	57.89	-12.80	QP
7	1.123	9.81	14.11	23.92	46.00	-22.08	Average
8	1.123	9.81	20.17	29.98	56.00	-26.02	QP
9	4.985	9.85	13.83	23.68	46.00	-22.32	Average
10	4.985	9.85	17.89	27.74	56.00	-28.26	QP
11	11.468	9.91	17.95	27.86	50.00	-22.14	Average
12	11.468	9.91	21.35	31.26	60.00	-28.74	QP

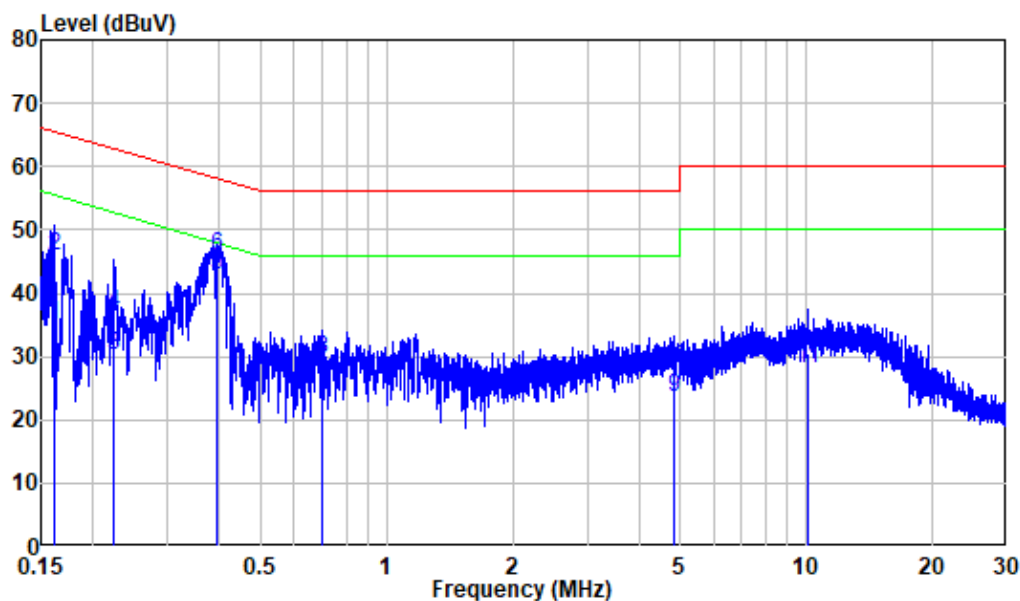AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220407-12824E-RF
 Mode : 2.4G WIFI
 Power : AC 120V 60Hz
 Adapter : DSA-18PFR-09 FUS 120150


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.162	9.80	25.25	35.05	55.38	-20.33	Average
2	0.162	9.80	36.13	45.93	65.38	-19.45	QP
3	0.224	9.80	20.40	30.20	52.66	-22.46	Average
4	0.224	9.80	27.01	36.81	62.66	-25.85	QP
5	0.394	9.80	33.09	42.89	47.97	-5.08	Average
6	0.394	9.80	36.14	45.94	57.97	-12.03	QP
7	0.702	9.81	15.36	25.17	46.00	-20.83	Average
8	0.702	9.81	19.74	29.55	56.00	-26.45	QP
9	4.813	9.88	13.74	23.62	46.00	-22.38	Average
10	4.813	9.88	18.28	28.16	56.00	-27.84	QP
11	10.079	10.00	17.94	27.94	50.00	-22.06	Average
12	10.079	10.00	20.37	30.37	60.00	-29.63	QP

For Adapter 3 (H18US1200150A)

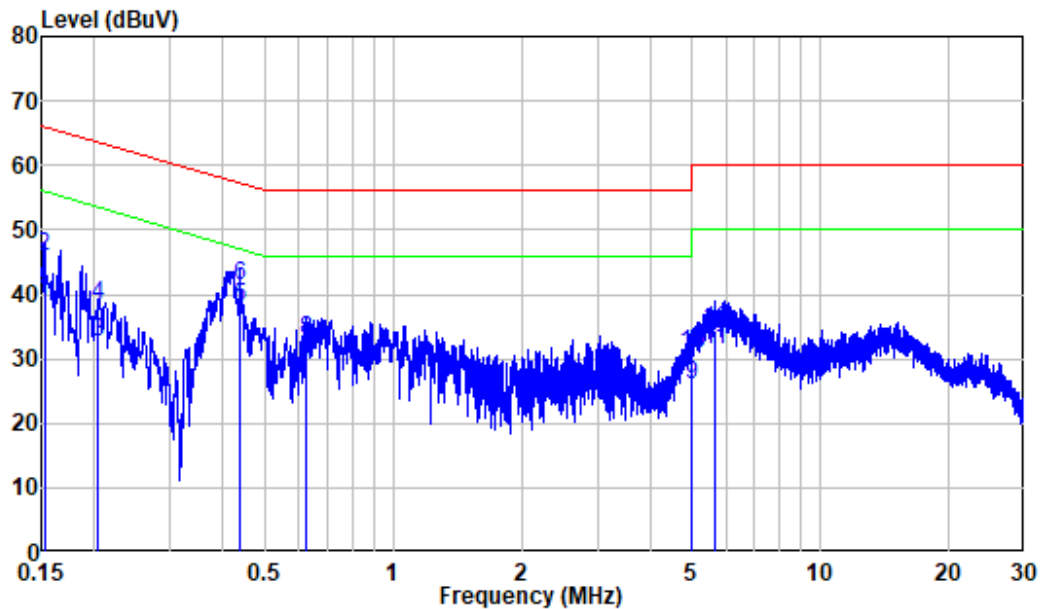AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Job No. : SZNS220407-12824E-RF
 Mode : 2.4G WIFI
 Power : AC 120V 60Hz
 Adapter : H18US1200150A

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.152	9.80	29.08	38.88	55.87	-16.99	Average
2	0.152	9.80	36.21	46.01	65.87	-19.86	QP
3	0.204	9.80	22.93	32.73	53.43	-20.70	Average
4	0.204	9.80	28.55	38.35	63.43	-25.08	QP
5	0.437	9.80	28.24	38.04	47.12	-9.08	Average
6	0.437	9.80	31.67	41.47	57.12	-15.65	QP
7	0.622	9.81	18.49	28.30	46.00	-17.70	Average
8	0.622	9.81	23.05	32.86	56.00	-23.14	QP
9	4.972	9.85	16.21	26.06	46.00	-19.94	Average
10	4.972	9.85	20.81	30.66	56.00	-25.34	QP
11	5.653	9.86	21.56	31.42	50.00	-18.58	Average
12	5.653	9.86	24.64	34.50	60.00	-25.50	QP

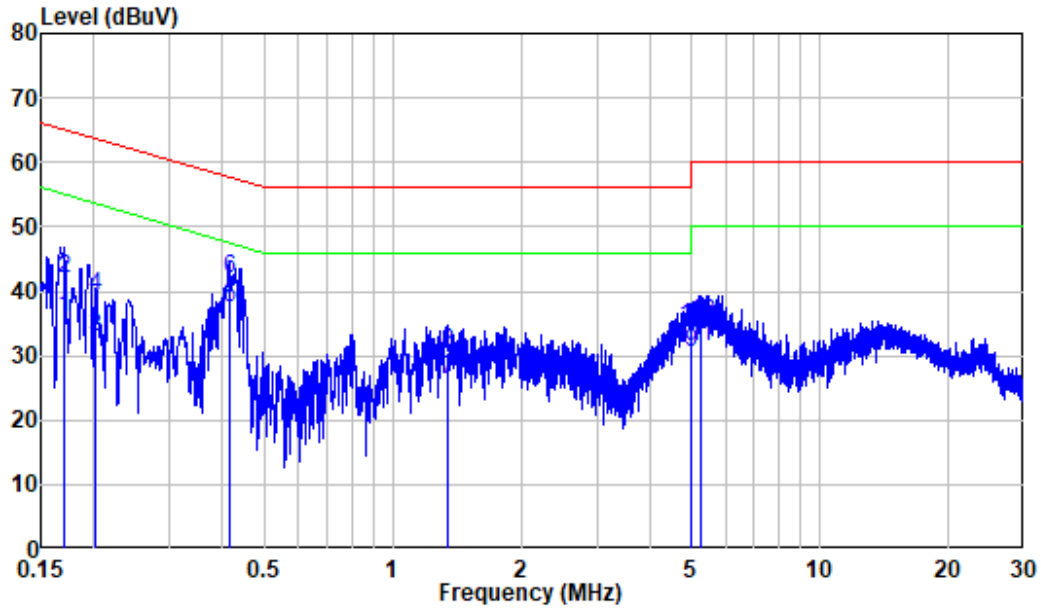AC 120V/60 Hz, Neutral

Site : Shielding Room

Condition: Neutral

Job No. : SZNS220407-12824E-RF


Mode : 2.4G WIFI

Power : AC 120V 60Hz

Adapter : H18US1200150A

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.170	9.80	26.20	36.00	54.97	-18.97	Average
2	0.170	9.80	32.22	42.02	64.97	-22.95	QP
3	0.202	9.80	23.23	33.03	53.54	-20.51	Average
4	0.202	9.80	29.40	39.20	63.54	-24.34	QP
5	0.416	9.80	27.53	37.33	47.53	-10.20	Average
6	0.416	9.80	32.26	42.06	57.53	-15.47	QP
7	1.340	9.81	16.44	26.25	46.00	-19.75	Average
8	1.340	9.81	20.71	30.52	56.00	-25.48	QP
9	4.985	9.89	20.65	30.54	46.00	-15.46	Average
10	4.985	9.89	24.50	34.39	56.00	-21.61	QP
11	5.239	9.90	21.47	31.37	50.00	-18.63	Average
12	5.239	9.90	25.10	35.00	60.00	-25.00	QP

For POE:

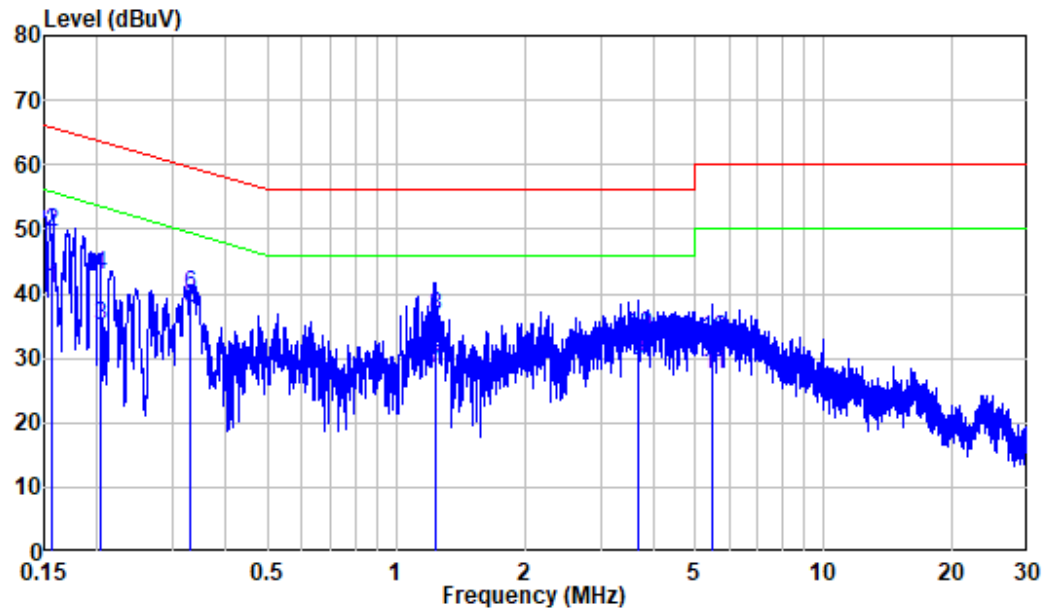AC 120V/60 Hz, Line

Site : Shielding Room


Condition: Line

Job No. : SZNS220407-12824E-RF

Mode : 2.4G WIFI

Power : AC 120V 60Hz POE

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.157	9.80	30.94	40.74	55.64	-14.90	Average
2	0.157	9.80	39.74	49.54	65.64	-16.10	QP
3	0.204	9.80	25.28	35.08	53.46	-18.38	Average
4	0.204	9.80	33.01	42.81	63.46	-20.65	QP
5	0.329	9.80	27.79	37.59	49.48	-11.89	Average
6	0.329	9.80	30.12	39.92	59.48	-19.56	QP
7	1.230	9.81	18.72	28.53	46.00	-17.47	Average
8	1.230	9.81	26.67	36.48	56.00	-19.52	QP
9	3.695	9.84	19.81	29.65	46.00	-16.35	Average
10	3.695	9.84	23.74	33.58	56.00	-22.42	QP
11	5.502	9.85	17.60	27.45	50.00	-22.55	Average
12	5.502	9.85	23.02	32.87	60.00	-27.13	QP

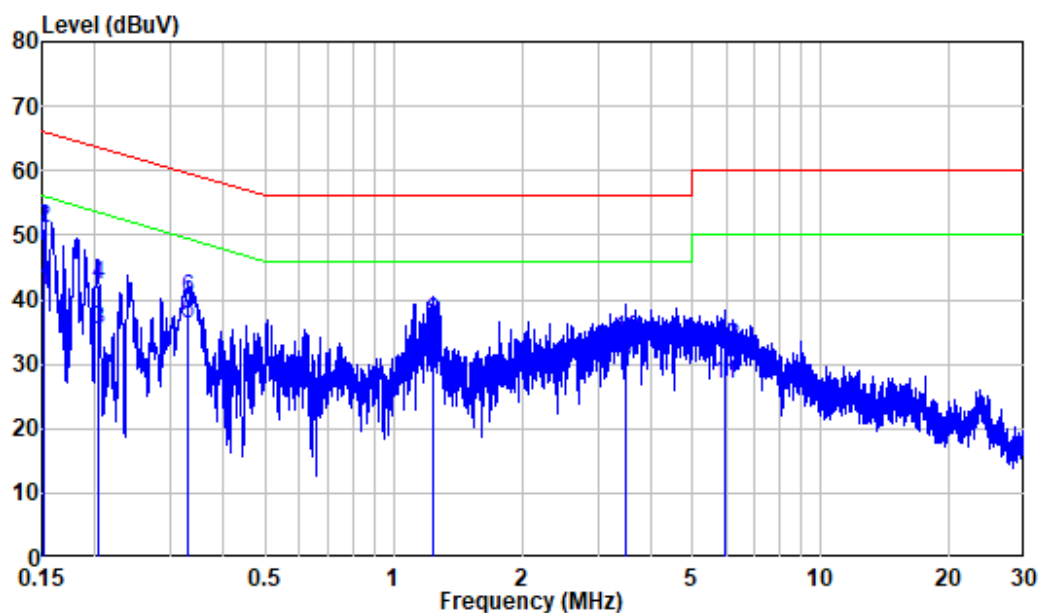AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220407-12824E-RF
 Mode : 2.4G WIFI
 Power : AC 120V 60Hz POE

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.152	9.80	31.63	41.43	55.88	-14.45	Average
2	0.152	9.80	41.28	51.08	65.88	-14.80	QP
3	0.203	9.80	25.42	35.22	53.50	-18.28	Average
4	0.203	9.80	32.58	42.38	63.50	-21.12	QP
5	0.330	9.80	26.40	36.20	49.45	-13.25	Average
6	0.330	9.80	30.43	40.23	59.45	-19.22	QP
7	1.241	9.81	19.76	29.57	46.00	-16.43	Average
8	1.241	9.81	26.74	36.55	56.00	-19.45	QP
9	3.493	9.83	20.24	30.07	46.00	-15.93	Average
10	3.493	9.83	23.97	33.80	56.00	-22.20	QP
11	5.957	9.93	16.99	26.92	50.00	-23.08	Average
12	5.957	9.93	22.60	32.53	60.00	-27.47	QP

§15.205, §15.209, §15.247(d) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


According to RSS-GEN § 8.10 & RSS-247 § 5.5


Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply: (a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD). (b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6. (c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

EUT Setup

Below 1 GHz:

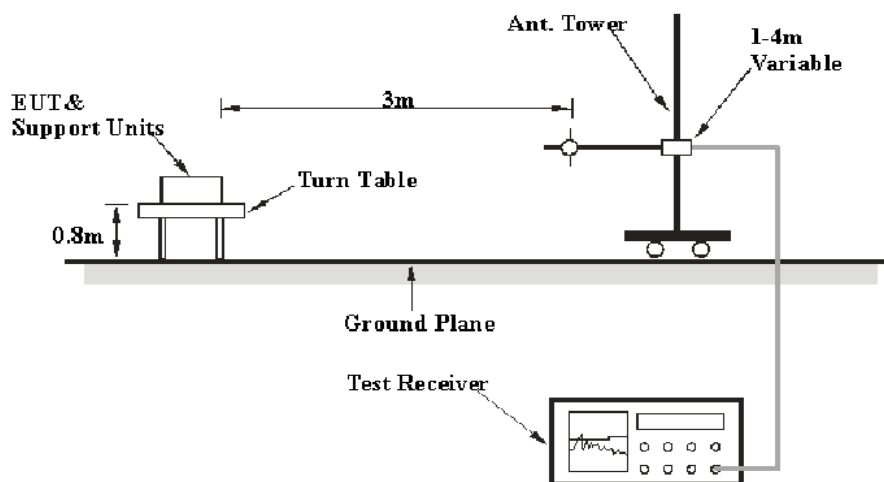

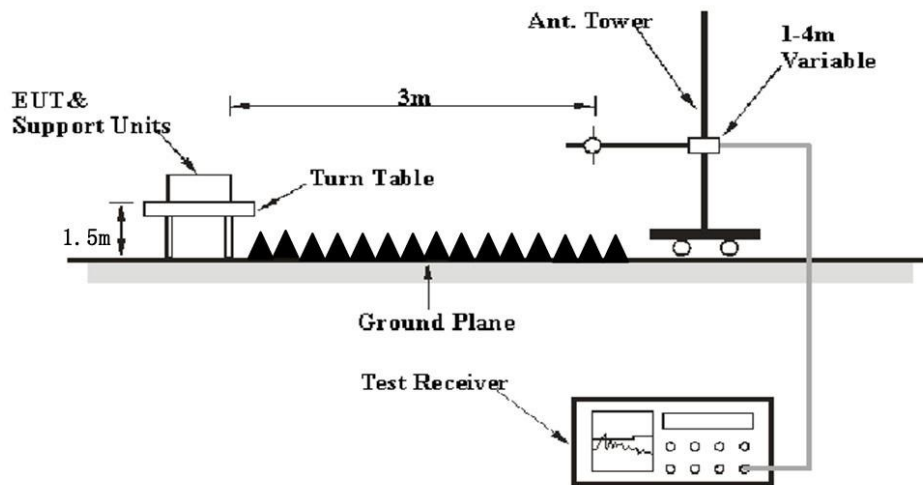Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013 & RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247 & RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	26~26.5℃
Relative Humidity:	56~65 %
ATM Pressure:	101.0 kPa

The testing was performed by Leo on 2022-05-17 for below 1GHz, Jeff Jiang on 2022-05-20 for above 1GHz.


EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

30 MHz~1 GHz: (worst case is 802.11g mode, low channel)

Note: When the result of Peak less than the limit of QP by more than 6dB, just the peak value was recorded.

For Adapter 1 (F18W8-120150SPAUY)


Horizontal

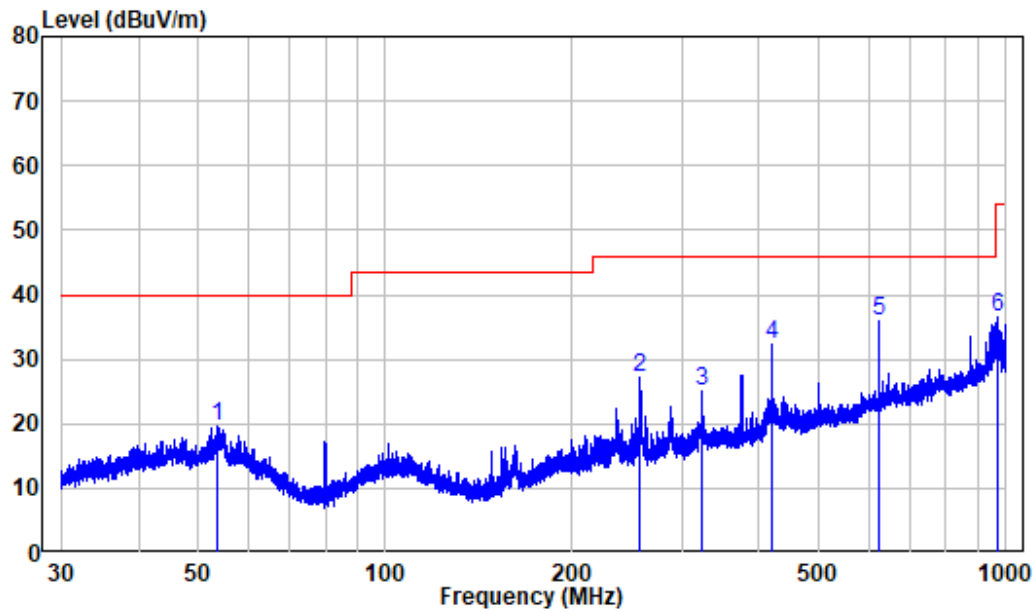

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS220407-12824E-RF
Test Mode: 2.4G WIFI

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	53.764	-10.30	29.79	19.49	40.00	-20.51	Peak
2	256.184	-10.60	37.64	27.04	46.00	-18.96	Peak
3	323.746	-8.31	33.49	25.18	46.00	-20.82	Peak
4	420.028	-6.13	38.41	32.28	46.00	-13.72	Peak
5	625.078	-2.35	38.14	35.79	46.00	-10.21	Peak
6	969.784	2.48	33.94	36.42	54.00	-17.58	Peak

Vertical

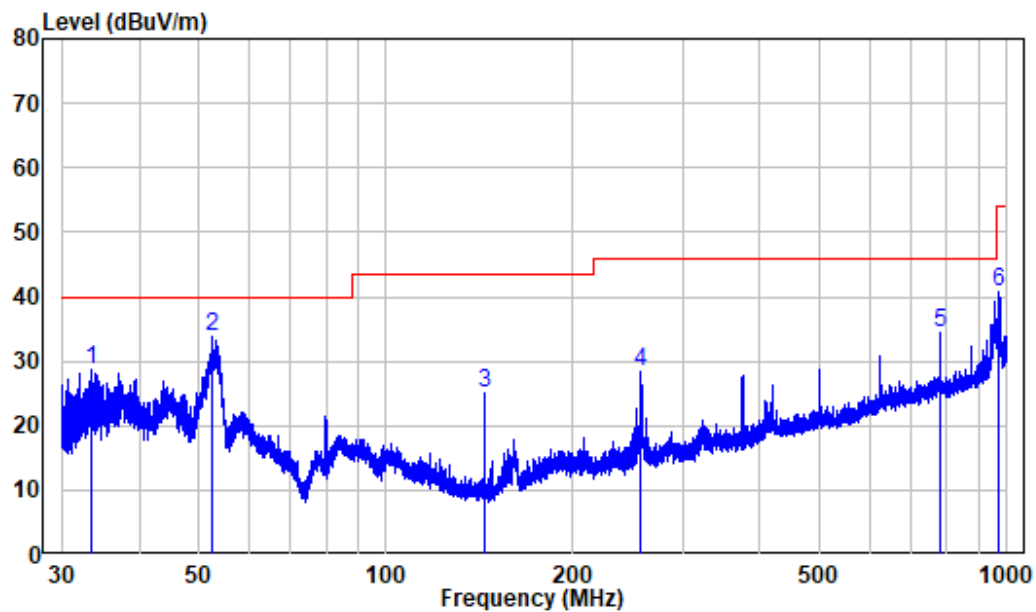


Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZNS220407-12824E-RF
 Test Mode: 2.4G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	33.621	-11.91	40.72	28.81	40.00	-11.19	Peak
2	52.414	-10.05	43.72	33.67	40.00	-6.33	Peak
3	144.208	-15.51	40.43	24.92	43.50	-18.58	Peak
4	256.296	-10.60	38.90	28.30	46.00	-17.70	Peak
5	780.291	0.07	34.38	34.45	46.00	-11.55	Peak
6	972.337	2.42	38.43	40.85	54.00	-13.15	Peak

For Adapter 2 (DSA-18PFR-09 FUS 120150)

Horizontal

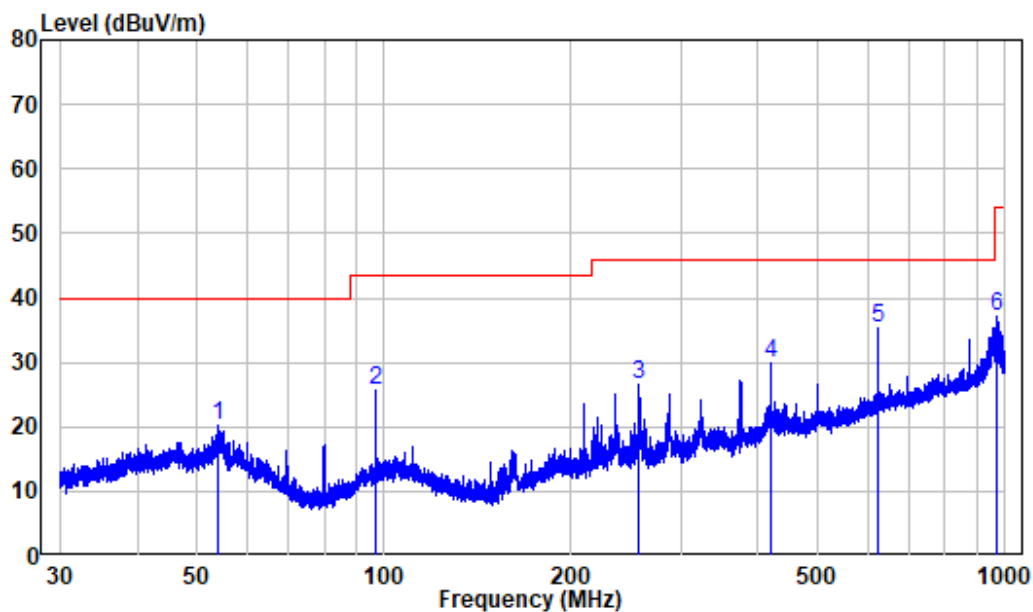

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS220407-12824E-RF

Test Mode: 2.4G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.024	-10.35	30.57	20.22	40.00	-19.78	Peak
2	96.563	-12.29	37.99	25.70	43.50	-17.80	Peak
3	256.296	-10.60	37.08	26.48	46.00	-19.52	Peak
4	420.028	-6.13	35.92	29.79	46.00	-16.21	Peak
5	625.078	-2.35	37.65	35.30	46.00	-10.70	Peak
6	968.934	2.48	34.75	37.23	54.00	-16.77	Peak

Vertical

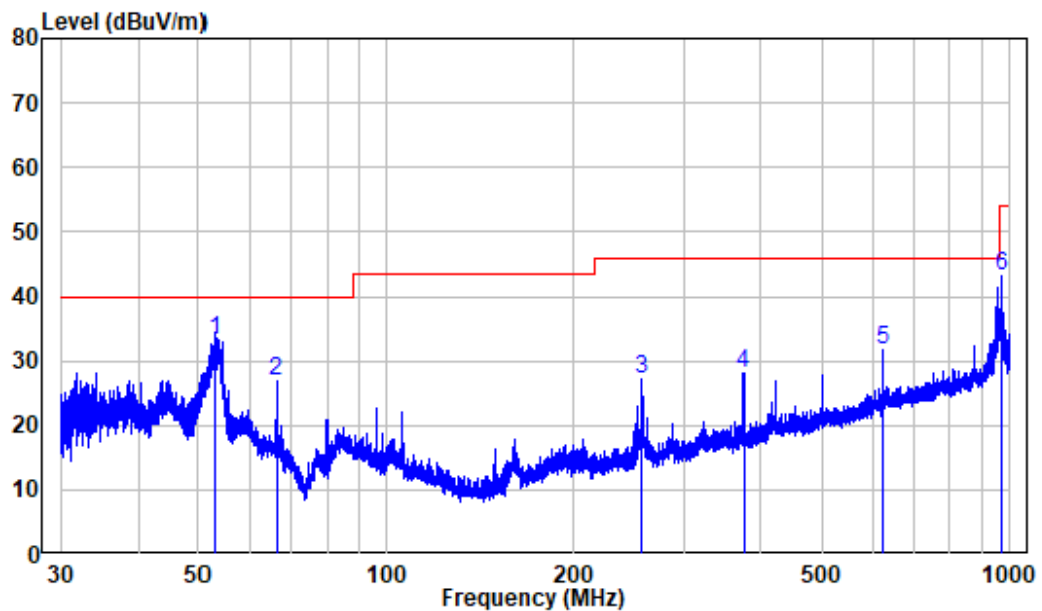


Site : chamber
Condition: 3m VERTICAL
Job No. : SZNS220407-12824E-RF
Test Mode: 2.4G WIFI

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	52.668	-10.10	43.41	33.31	40.00	-6.69	Peak
2	66.295	-13.02	40.04	27.02	40.00	-12.98	Peak
3	256.296	-10.60	37.86	27.26	46.00	-18.74	Peak
4	375.116	-7.28	35.37	28.09	46.00	-17.91	Peak
5	625.078	-2.35	34.19	31.84	46.00	-14.16	Peak
6	972.337	2.42	40.76	43.18	54.00	-10.82	Peak

For Adapter 3 (H18US1200150A)

Horizontal

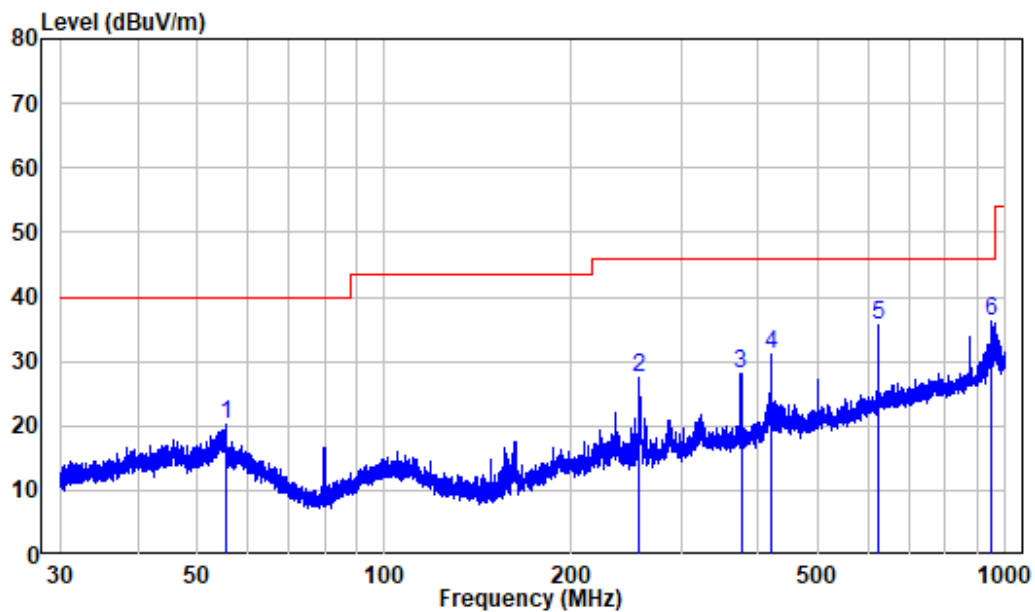

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS220407-12824E-RF

Test Mode: 2.4G WIFI

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	55.463	-10.24	30.45	20.21	40.00	-19.79	Peak
2	256.296	-10.60	38.13	27.53	46.00	-18.47	Peak
3	375.116	-7.28	35.45	28.17	46.00	-17.83	Peak
4	420.028	-6.13	37.25	31.12	46.00	-14.88	Peak
5	625.078	-2.35	38.10	35.75	46.00	-10.25	Peak
6	948.345	1.99	34.38	36.37	46.00	-9.63	Peak

Vertical

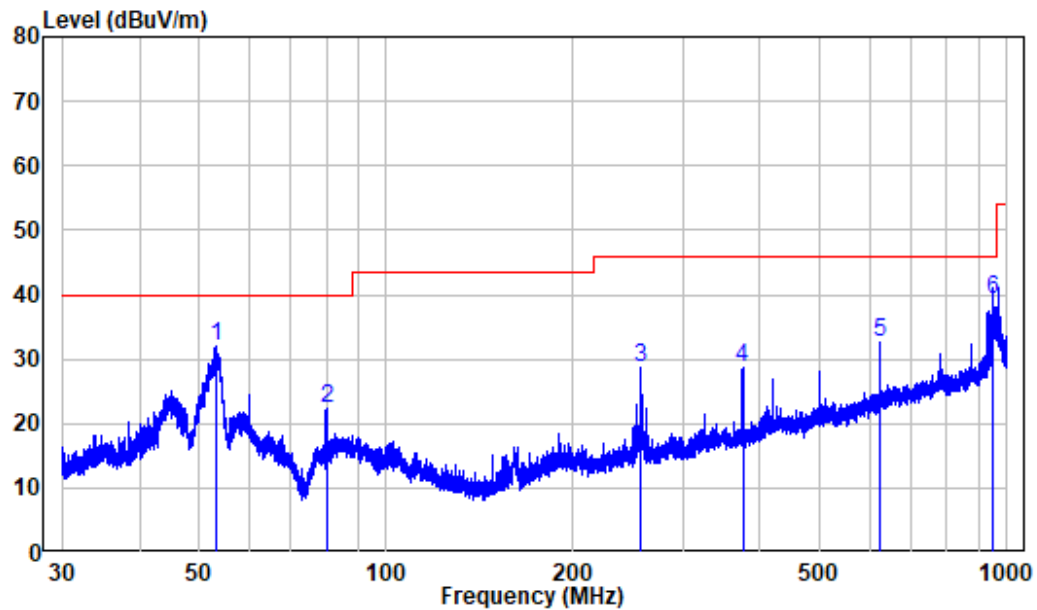

Site : chamber

Condition: 3m VERTICAL


Job No. : SZNS220407-12824E-RF

Test Mode: 2.4G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	53.038	-10.18	42.08	31.90	40.00	-8.10	Peak
2	80.010	-16.79	39.16	22.37	40.00	-17.63	Peak
3	256.184	-10.60	39.28	28.68	46.00	-17.32	Peak
4	375.116	-7.28	35.85	28.57	46.00	-17.43	Peak
5	625.078	-2.35	34.98	32.63	46.00	-13.37	Peak
6	949.177	2.02	37.09	39.11	46.00	-6.89	QP

For POE


Horizontal

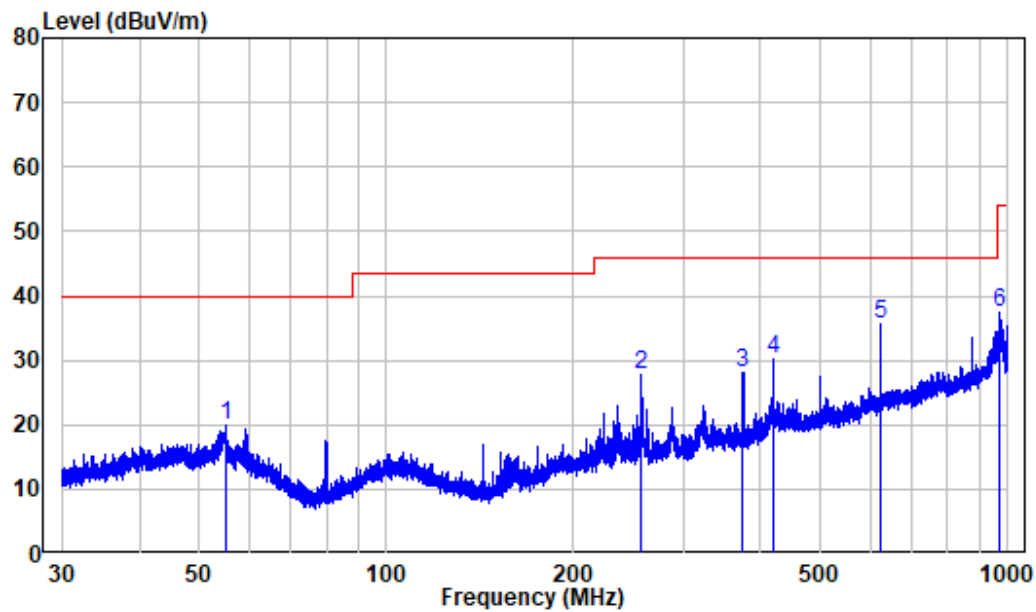

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS220407-12824E-RF
Test Mode: 2.4G WIFI
Note : POE

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	55.076	-10.28	30.34	20.06	40.00	-19.94	Peak
2	256.184	-10.60	38.23	27.63	46.00	-18.37	Peak
3	374.951	-7.27	35.26	27.99	46.00	-18.01	Peak
4	420.028	-6.13	36.27	30.14	46.00	-15.86	Peak
5	625.078	-2.35	37.92	35.57	46.00	-10.43	Peak
6	970.209	2.48	35.03	37.51	54.00	-16.49	Peak

Vertical

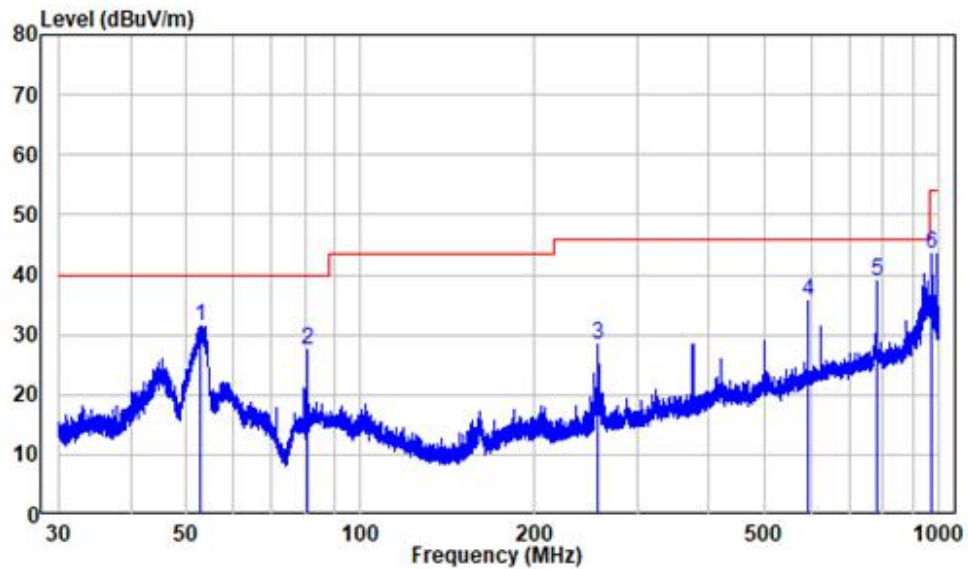

Site : chamber
Condition: 3m VERTICAL
Job No. : SZNS220407-12824E-RF
Test Mode: 2.4G WIFI
Note : POE

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	52.783	-10.13	41.49	31.36	40.00	-8.64	Peak
2	80.644	-16.75	44.37	27.62	40.00	-12.38	Peak
3	256.184	-10.60	38.91	28.31	46.00	-17.69	Peak
4	594.090	-2.70	38.25	35.55	46.00	-10.45	Peak
5	780.291	0.07	38.74	38.81	46.00	-7.19	Peak
6	972.337	2.42	40.96	43.38	54.00	-10.62	Peak

1 GHz-25 GHz: (worst case is adapter 1)**Wi-Fi:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11b Mode (worst case antenna 1)									
Low Channel(2412MHz)									
2310	69.01	PK	86	2.3	H	-7.24	61.77	74	-12.23
2310	54.35	AV	86	2.3	H	-7.24	47.11	54	-6.89
2310	69.14	PK	92	2	V	-7.24	61.90	74	-12.10
2310	54.38	AV	92	2	V	-7.24	47.14	54	-6.86
2390	70.37	PK	246	1.2	H	-7.22	63.15	74	-10.85
2390	54.82	AV	246	1.2	H	-7.22	47.60	54	-6.40
2390	70.08	PK	255	2.5	V	-7.22	62.86	74	-11.14
2390	54.62	AV	255	2.5	V	-7.22	47.40	54	-6.60
4824	54.99	PK	173	2.4	H	-3.53	51.46	74	-22.54
4824	55.00	PK	160	2.2	V	-3.53	51.47	74	-22.53
Middle Channel(2437MHz)									
4874	55.37	PK	247	1.2	H	-3.41	51.96	74	-22.04
4874	55.29	PK	12	2.1	V	-3.41	51.88	74	-22.12
High Channel(2462 MHz)									
2483.5	79.94	PK	168	1.4	H	-7.2	72.74	74	-1.26
2483.5	54.99	AV	168	1.4	H	-7.2	47.79	54	-6.21
2483.5	75.33	PK	44	2.3	V	-7.2	68.13	74	-5.87
2483.5	54.90	AV	44	2.3	V	-7.2	47.7	54	-6.3
2500	69.20	PK	114	1.3	H	-7.18	62.02	74	-11.98
2500	54.98	AV	114	1.3	H	-7.18	47.8	54	-6.2
2500	68.83	PK	103	1.2	V	-7.18	61.65	74	-12.35
2500	54.87	AV	103	1.2	V	-7.18	47.69	54	-6.31
4924	54.98	PK	261	1.5	H	-3.16	51.82	74	-22.18
4924	54.94	PK	221	2.4	V	-3.16	51.78	74	-22.22

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11g Mode (worst case antenna 1)									
Low Channel(2412MHz)									
2310	68.51	PK	117	2.2	H	-7.24	61.27	74	-12.73
2310	54.67	AV	117	2.2	H	-7.24	47.43	54	-6.57
2310	68.16	PK	24	2.1	V	-7.24	60.92	74	-13.08
2310	54.40	AV	24	2.1	V	-7.24	47.16	54	-6.84
2390	71.96	PK	216	2.2	H	-7.22	64.74	74	-9.26
2390	56.28	AV	216	2.2	H	-7.22	49.06	54	-4.94
2390	70.82	PK	165	1.5	V	-7.22	63.60	74	-10.40
2390	56.09	AV	165	1.5	V	-7.22	48.87	54	-5.13
4824	54.52	PK	1	2	H	-3.53	50.99	74	-23.01
4824	54.48	PK	310	2.1	V	-3.53	50.95	74	-23.05
Middle Channel(2437MHz)									
4874	55.02	PK	147	1.2	H	-3.41	51.61	74	-22.39
4874	54.94	PK	76	2.2	V	-3.41	51.53	74	-22.47
High Channel(2462 MHz)									
2483.5	77.04	PK	157	1.3	H	-7.2	69.84	74	-4.16
2483.5	57.93	AV	157	1.3	H	-7.2	50.73	54	-3.27
2483.5	75.57	PK	121	1.4	V	-7.2	68.37	74	-5.63
2483.5	56.98	AV	121	1.4	V	-7.2	49.78	54	-4.22
2500	69.29	PK	333	2.1	H	-7.18	62.11	74	-11.89
2500	56.38	AV	333	2.1	H	-7.18	49.2	54	-4.8
2500	68.36	PK	239	1.7	V	-7.18	61.18	74	-12.82
2500	56.53	AV	239	1.7	V	-7.18	49.35	54	-4.65
4924	54.79	PK	350	1.6	H	-3.16	51.63	74	-22.37
4924	54.70	PK	184	1.8	V	-3.16	51.54	74	-22.46

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11n20 Mode (worst case MIMO)									
Low Channel(2412MHz)									
2310	67.95	PK	277	2.1	H	-7.24	60.71	74	-13.29
2310	54.62	AV	277	2.1	H	-7.24	47.38	54	-6.62
2310	68.22	PK	54	2.4	V	-7.24	60.98	74	-13.02
2310	54.51	AV	54	2.4	V	-7.24	47.27	54	-6.73
2390	71.45	PK	162	1.9	H	-7.22	64.23	74	-9.77
2390	56.26	AV	162	1.9	H	-7.22	49.04	54	-4.96
2390	70.11	PK	72	2	V	-7.22	62.89	74	-11.11
2390	56.31	AV	72	2	V	-7.22	49.09	54	-4.91
4824	54.35	PK	121	1.1	H	-3.53	50.82	74	-23.18
4824	54.55	PK	167	1.1	V	-3.53	51.02	74	-22.98
Middle Channel(2437MHz)									
4874	55.15	PK	133	1.2	H	-3.41	51.74	74	-22.26
4874	54.86	PK	209	2.3	V	-3.41	51.45	74	-22.55
High Channel(2462 MHz)									
2483.5	77.89	PK	170	2.3	H	-7.2	70.69	74	-3.31
2483.5	56.84	AV	170	2.3	H	-7.2	49.64	54	-4.36
2483.5	75.63	PK	56	1.3	V	-7.2	68.43	74	-5.57
2483.5	56.97	AV	56	1.3	V	-7.2	49.77	54	-4.23
2500	68.84	PK	255	1.4	H	-7.18	61.66	74	-12.34
2500	56.52	AV	255	1.4	H	-7.18	49.34	54	-4.66
2500	68.83	PK	267	1.8	V	-7.18	61.65	74	-12.35
2500	56.35	AV	267	1.8	V	-7.18	49.17	54	-4.83
4924	54.68	PK	8	2.2	H	-3.16	51.52	74	-22.48
4924	54.77	PK	221	2.5	V	-3.16	51.61	74	-22.39

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ax20 (worst case MIMO)									
Low Channel(2412MHz)									
Worst case RU26#0									
2310	68.69	PK	213	1.4	H	-7.24	61.45	74	-12.55
2310	54.28	AV	213	1.4	H	-7.24	47.04	54	-6.96
2310	68.51	PK	147	1.6	V	-7.24	61.27	74	-12.73
2310	54.38	AV	147	1.6	V	-7.24	47.14	54	-6.86
2390	79.94	PK	354	1.9	H	-7.22	72.72	74	-1.28
2390	57.35	AV	354	1.9	H	-7.22	50.13	54	-3.87
2390	75.10	PK	53	1	V	-7.22	67.88	74	-6.12
2390	56.26	AV	53	1	V	-7.22	49.04	54	-4.96
Worst case RU52#37									
2310	79.74	PK	79	2.4	H	-7.24	72.50	74	-1.50
2310	57.14	AV	79	2.4	H	-7.24	49.90	54	-4.10
2310	75.98	PK	113	2.1	V	-7.24	68.74	74	-5.26
2310	56.40	AV	113	2.1	V	-7.24	49.16	54	-4.84
2390	79.72	PK	206	2.2	H	-7.22	72.50	74	-1.50
2390	57.12	AV	206	2.2	H	-7.22	49.90	54	-4.10
2390	75.96	PK	73	1	V	-7.22	68.74	74	-5.26
2390	56.38	AV	73	1	V	-7.22	49.16	54	-4.84
Worst case RU106#53									
2310	68.51	PK	280	1.6	H	-7.24	61.27	74	-12.73
2310	54.20	AV	280	1.6	H	-7.24	46.96	54	-7.04
2310	68.27	PK	272	2.2	V	-7.24	61.03	74	-12.97
2310	54.34	AV	272	2.2	V	-7.24	47.10	54	-6.90
2390	76.48	PK	275	2.4	H	-7.22	69.26	74	-4.74
2390	56.38	AV	275	2.4	H	-7.22	49.16	54	-4.84
2390	73.83	PK	135	2.2	V	-7.22	66.61	74	-7.39
2390	55.94	AV	135	2.2	V	-7.22	48.72	54	-5.28
Worst case RU242#61									
2310	68.30	PK	165	2.1	H	-7.24	61.06	74	-12.94
2310	54.40	AV	165	2.1	H	-7.24	47.16	54	-6.84
2310	67.94	PK	175	1.7	V	-7.24	60.70	74	-13.30
2310	54.33	AV	175	1.7	V	-7.24	47.09	54	-6.91
2390	79.39	PK	309	1.2	H	-7.22	72.17	74	-1.83
2390	58.10	AV	309	1.2	H	-7.22	50.88	54	-3.12
2390	75.69	PK	11	1	V	-7.22	68.47	74	-5.53
2390	57.65	AV	11	1	V	-7.22	50.43	54	-3.57

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ax20									
Low Channel(2412MHz)									
Worst case RU26#0									
4824	63.16	PK	127	2.5	H	-3.53	59.63	74	-14.37
4824	52.92	AV	127	2.5	H	-3.53	49.39	54	-4.61
4824	61.51	PK	196	1.4	V	-3.53	57.98	74	-16.02
4824	50.57	AV	196	1.4	V	-3.53	47.04	54	-6.96
Middle Channel(2437MHz)									
Worst case RU26#0									
4874	62.35	PK	54	1.6	H	-3.41	58.94	74	-15.06
4874	52.27	AV	54	1.6	H	-3.41	48.86	54	-5.14
4874	60.91	PK	198	1.5	V	-3.41	57.5	74	-16.5
4874	50.82	AV	244	1.5	V	-3.41	47.41	54	-6.59
High Channel(2462 MHz)									
Worst case RU26#8									
2483.5	80.04	PK	208	1.6	H	-7.2	72.84	74	-1.16
2483.5	57.85	AV	208	1.6	H	-7.2	50.65	54	-3.35
2483.5	75.82	PK	167	1.6	V	-7.2	68.62	74	-5.38
2483.5	56.56	AV	167	1.6	V	-7.2	49.36	54	-4.64
2500	68.66	PK	302	2	H	-7.18	61.48	74	-12.52
2500	56.08	AV	302	2	H	-7.18	48.9	54	-5.1
2500	68.38	PK	23	1.3	V	-7.18	61.2	74	-12.8
2500	56.11	AV	23	1.3	V	-7.18	48.93	54	-5.07
Worst case RU52#40									
2483.5	79.44	PK	208	1.4	H	-7.2	72.24	74	-1.76
2483.5	57.46	AV	208	1.4	H	-7.2	50.26	54	-3.74
2483.5	75.93	PK	335	2.5	V	-7.2	68.73	74	-5.27
2483.5	56.52	AV	335	2.5	V	-7.2	49.32	54	-4.68
2500	69.24	PK	78	1.2	H	-7.18	62.06	74	-11.94
2500	55.99	AV	78	1.2	H	-7.18	48.81	54	-5.19
2500	68.59	PK	302	1.3	V	-7.18	61.41	74	-12.59
2500	56.09	AV	302	1.3	V	-7.18	48.91	54	-5.09

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ax20									
High Channel(2462 MHz)									
Worst case RU106#54									
2483.5	73.88	PK	319	1.5	H	-7.2	66.68	74	-7.32
2483.5	56.84	AV	319	1.5	H	-7.2	49.64	54	-4.36
2483.5	71.60	PK	234	1	V	-7.2	64.4	74	-9.6
2483.5	56.34	AV	234	1	V	-7.2	49.14	54	-4.86
2500	68.63	PK	173	1.1	H	-7.18	61.45	74	-12.55
2500	56.00	AV	173	1.1	H	-7.18	48.82	54	-5.18
2500	68.43	PK	132	1.9	V	-7.18	61.25	74	-12.75
2500	55.91	AV	132	1.9	V	-7.18	48.73	54	-5.27
Worst case RU242#61									
2483.5	79.48	PK	44	2	H	-7.2	72.28	74	-1.72
2483.5	58.13	AV	44	2	H	-7.2	50.93	54	-3.07
2483.5	74.51	PK	41	1.9	V	-7.2	67.31	74	-6.69
2483.5	57.34	AV	41	1.9	V	-7.2	50.14	54	-3.86
2500	69.29	PK	338	1.6	H	-7.18	62.11	74	-11.89
2500	55.92	AV	338	1.6	H	-7.18	48.74	54	-5.26
2500	68.67	PK	220	2.5	V	-7.18	61.49	74	-12.51
2500	55.91	AV	220	2.5	V	-7.18	48.73	54	-5.27
Worst case RU26#0									
4924	61.93	PK	101	2.3	H	-3.16	58.77	74	-15.23
4924	52.08	AV	101	2.3	H	-3.16	48.92	54	-5.08
4924	60.65	PK	237	2.3	V	-3.16	57.49	74	-16.51
4924	50.63	AV	237	2.3	V	-3.16	47.47	54	-6.53

BLE_1M

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
	Reading (dBm)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel									
2310	68.50	PK	61	2.4	H	-7.24	61.26	74	-12.74
2310	54.64	AV	61	2.4	H	-7.24	47.40	54	-6.60
2310	68.61	PK	69	1	V	-7.24	61.37	74	-12.63
2310	54.63	AV	69	1	V	-7.24	47.39	54	-6.61
2390	69.29	PK	106	1.9	H	-7.22	62.07	74	-11.93
2390	55.36	AV	106	1.9	H	-7.22	48.14	54	-5.86
2390	69.38	PK	328	1.8	V	-7.22	62.16	74	-11.84
2390	55.44	AV	328	1.8	V	-7.22	48.22	54	-5.78
4804	54.60	PK	13	2.4	H	-3.51	51.09	74	-22.91
4804	54.78	PK	187	1.5	V	-3.51	51.27	74	-22.73
Middle Channel									
4880	54.86	PK	43	1.7	H	-3.37	51.49	74	-22.51
4880	54.68	PK	267	1.7	V	-3.37	51.31	74	-22.69
High Channel									
2483.5	69.41	PK	116	1.4	H	-7.2	62.21	74	-11.79
2483.5	55.96	AV	116	1.4	H	-7.2	48.76	54	-5.24
2483.5	69.68	PK	91	1.1	V	-7.2	62.48	74	-11.52
2483.5	55.87	AV	91	1.1	V	-7.2	48.67	54	-5.33
2500	68.81	PK	47	1	H	-7.18	61.63	74	-12.37
2500	55.89	AV	47	1	H	-7.18	48.71	54	-5.29
2500	69.31	PK	204	2	V	-7.18	62.13	74	-11.87
2500	56.08	AV	204	2	V	-7.18	48.9	54	-5.1
4960	54.47	PK	247	2.3	H	-3.01	51.46	74	-22.54
4960	54.58	PK	302	1.8	V	-3.01	51.57	74	-22.43

BLE_2M

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
	Reading (dBm)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel									
2310	68.08	PK	75	2.3	H	-7.24	60.84	74	-13.16
2310	54.62	AV	75	2.3	H	-7.24	47.38	54	-6.62
2310	68.54	PK	266	2.4	V	-7.24	61.30	74	-12.70
2310	54.75	AV	266	2.4	V	-7.24	47.51	54	-6.49
2390	69.34	PK	336	1.8	H	-7.22	62.12	74	-11.88
2390	55.43	AV	336	1.8	H	-7.22	48.21	54	-5.79
2390	69.93	PK	183	1.6	V	-7.22	62.71	74	-11.29
2390	55.40	AV	183	1.6	V	-7.22	48.18	54	-5.82
4804	54.78	PK	77	1.9	H	-3.51	51.27	74	-22.73
4804	54.76	PK	52	1.5	V	-3.51	51.25	74	-22.75
Middle Channel									
4880	55.03	PK	102	1.3	H	-3.37	51.66	74	-22.34
4880	54.99	PK	351	2.1	V	-3.37	51.62	74	-22.38
High Channel									
2483.5	69.52	PK	193	1.2	H	-7.2	62.32	74	-11.68
2483.5	55.97	AV	193	1.2	H	-7.2	48.77	54	-5.23
2483.5	70.29	PK	344	1	V	-7.2	63.09	74	-10.91
2483.5	56.11	AV	344	1	V	-7.2	48.91	54	-5.09
2500	68.67	PK	40	2.2	H	-7.18	61.49	74	-12.51
2500	56.09	AV	40	2.2	H	-7.18	48.91	54	-5.09
2500	68.52	PK	69	1.8	V	-7.18	61.34	74	-12.66
2500	56.07	AV	69	1.8	V	-7.18	48.89	54	-5.11
4960	54.70	PK	357	1.4	H	-3.01	51.69	74	-22.31
4960	54.72	PK	173	2.2	V	-3.01	51.71	74	-22.29

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is 20dB to the limit or in noise floor level was not recorded.

The result of Peak less than the limit of average, so just the peak value was recorded.


1-18 GHz:

Pre-scan for 802.11ax20 Low Channel

Horizontal

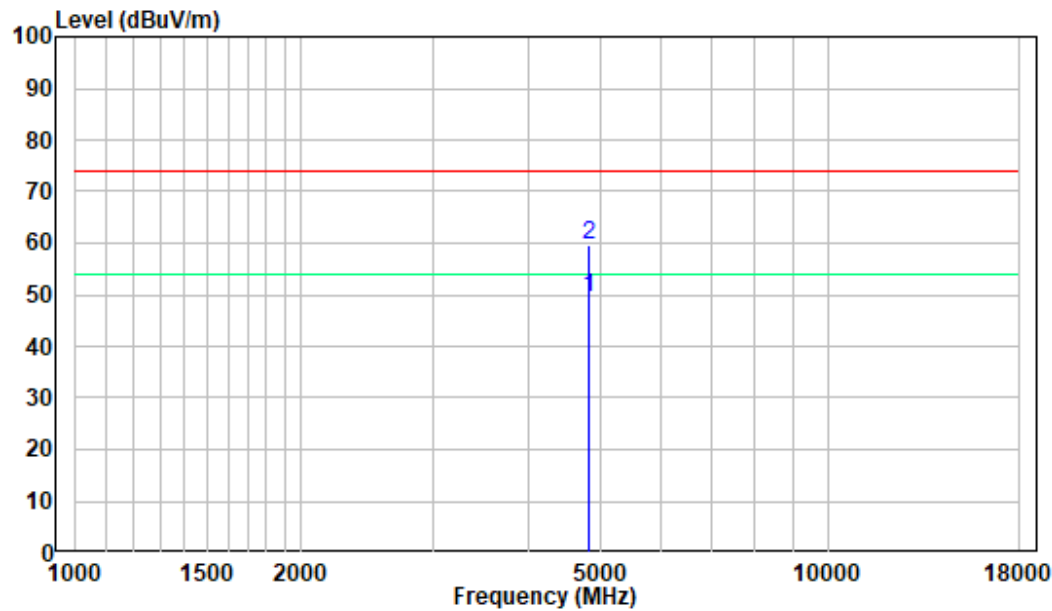


Vertical

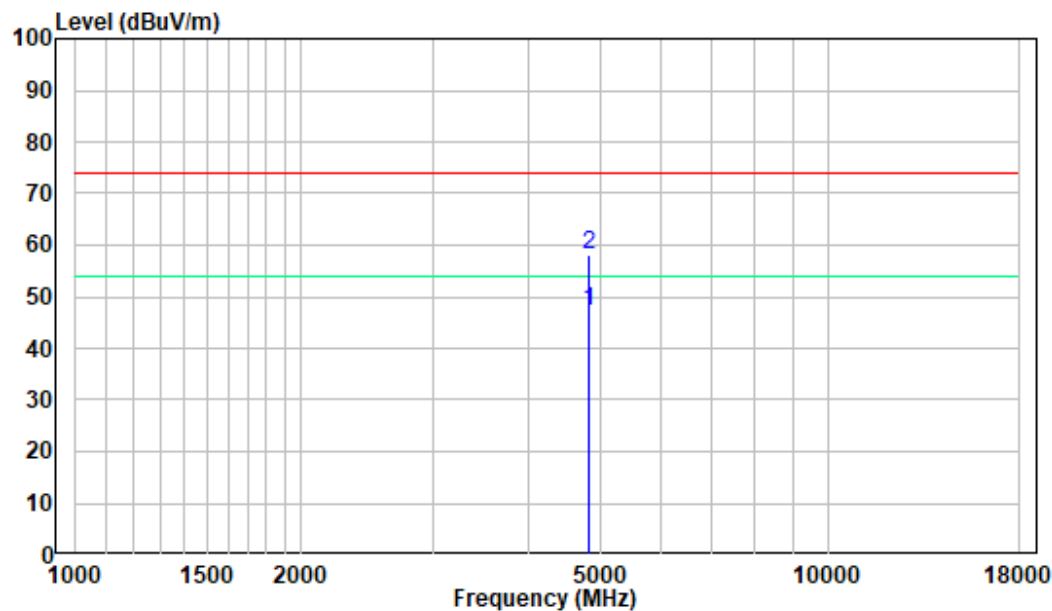


18 -25GHz:

Pre-scan for 802.11ax20 Low Channel

Horizontal

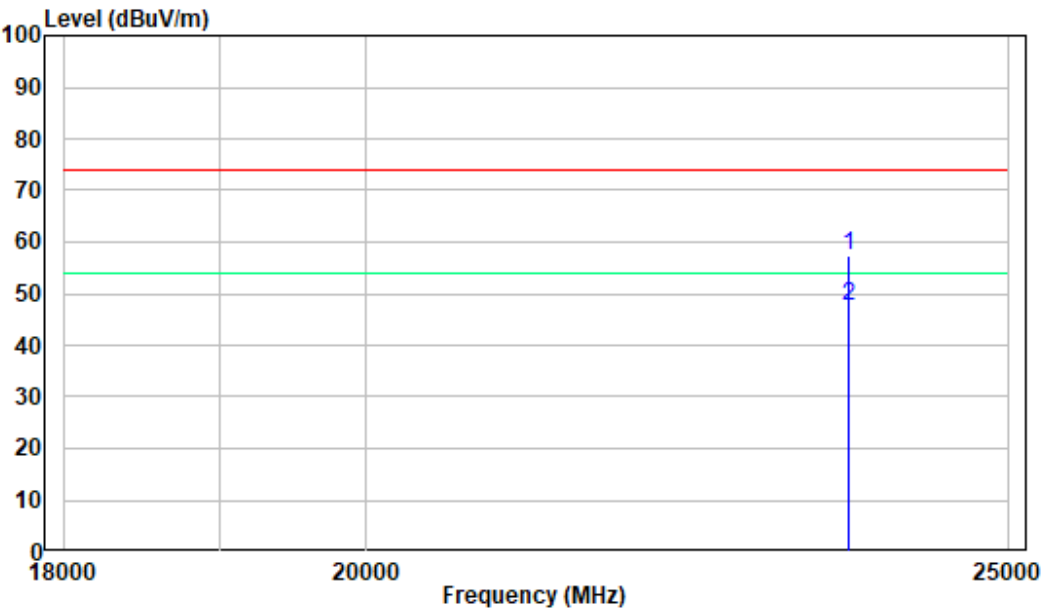

Vertical

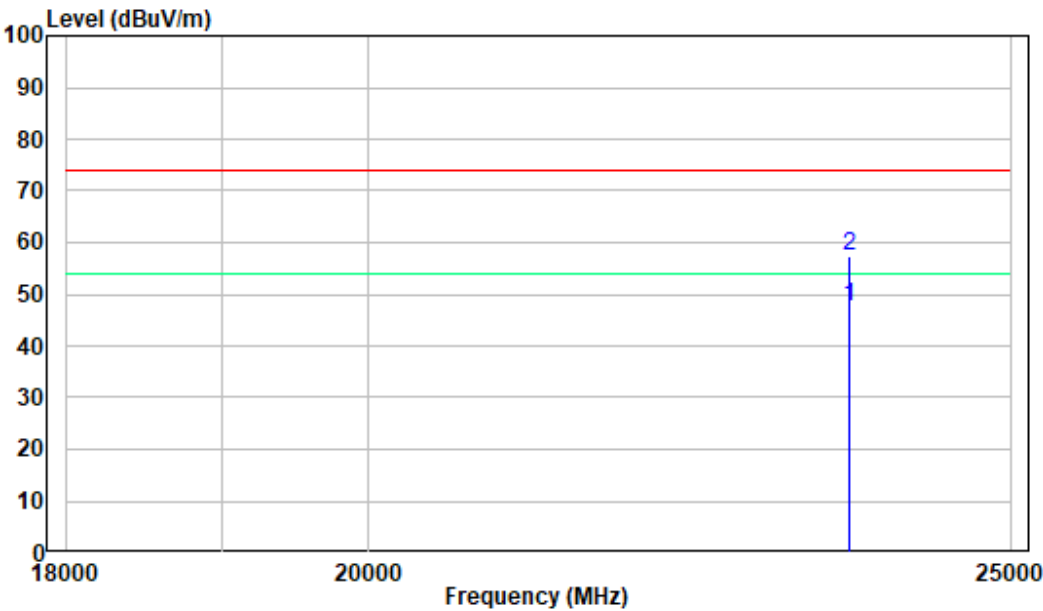

§15.247 (a)(2) & RSS-Gen §6.7 RSS-247 § 5.2 (a) 99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “6 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 6 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

The following conditions shall be observed for measuring the occupied bandwidth and 6 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 6 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 6 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data

Environmental Conditions

Temperature:	26.8~27.6℃
Relative Humidity:	51~62 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling from 2022-05-09 to 2022-05-10.

EUT operation mode: Transmitting

Test Result Compliant. Please refer to the Appendix BLE & Appendix Wi-Fi.

§15.247(b)(3) & RSS-247 § 5.4(d) MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

- c. Place the EUT on a bench and set it in transmitting mode.
- d. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- e. Add a correction factor to the display.



Note: the RF control unit has a built-in power sensor.

Test Data**Environmental Conditions**

Temperature:	26.8~27.6℃
Relative Humidity:	51~62 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling from 2022-05-07 to 2022-07-31.

EUT operation mode: Transmitting

Test Result Compliant. Please refer to the Appendix BLE & Appendix Wi-Fi.

§ 15.247(d) & RSS-247 § 5.5 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

- f. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- g. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- h. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- i. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- j. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

Temperature:	26.8~27.6℃
Relative Humidity:	51~62 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling from 2022-05-09 to 2022-07-31.

EUT operation mode: Transmitting

Test Result Compliant. Please refer to the Appendix BLE & Appendix Wi-Fi.

§15.247(e) & RSS-247 § 5.2 (b) POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

- k. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- l. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
- m. Set the VBW $\geq 3 \times \text{RBW}$.
- n. Set the span to 1.5 times the DTS bandwidth.
- o. Detector = peak.
- p. Sweep time = auto couple.
- q. Trace mode = max hold.
- r. Allow trace to fully stabilize.
- s. Use the peak marker function to determine the maximum amplitude level within the RBW.
- t. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	26.8~27.6℃
Relative Humidity:	51~62 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling from 2022-05-09 to 2022-07-27.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

APPENDIX Wi-Fi


Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant0	2412	7.04	0.5	PASS
	Ant0	2437	7.04	0.5	PASS
	Ant0	2462	7.04	0.5	PASS
11G	Ant0	2412	16.32	0.5	PASS
	Ant0	2437	16.32	0.5	PASS
	Ant0	2462	16.32	0.5	PASS
11N20MIMO	Ant0	2412	15.48	0.5	PASS
	Ant0	2437	17.72	0.5	PASS
	Ant0	2462	17.76	0.5	PASS
11AX20MIMO_242Tone_RU6I	Ant0	2412	19.08	0.5	PASS
	Ant0	2437	19.12	0.5	PASS
	Ant0	2462	19.08	0.5	PASS

Test Graphs

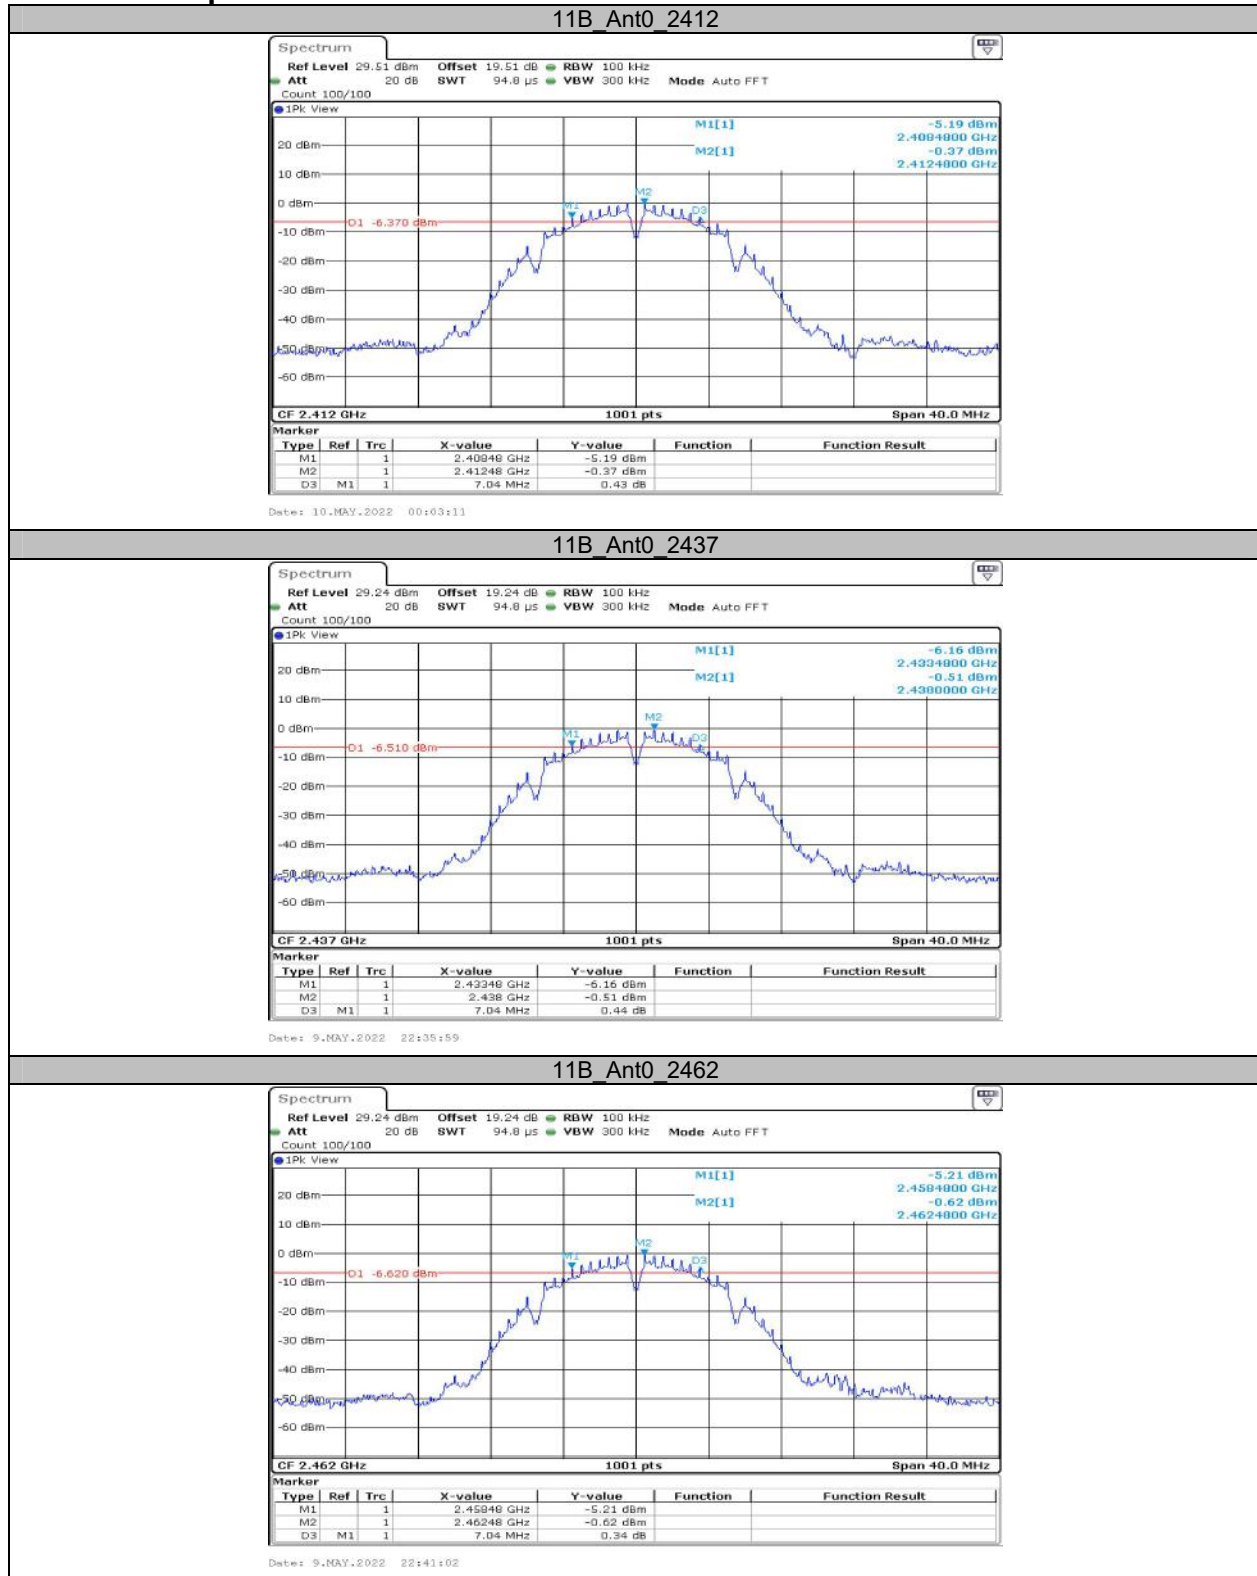


11G_Ant0_2412

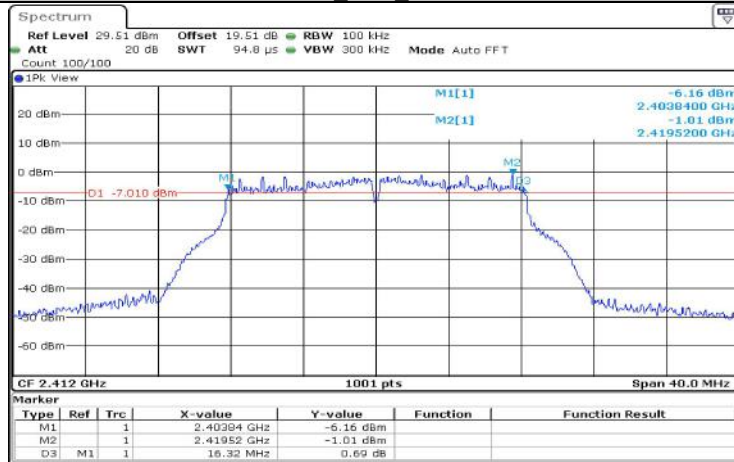


Date: 9.MAY.2022 22:43:54

11G_Ant0_2437

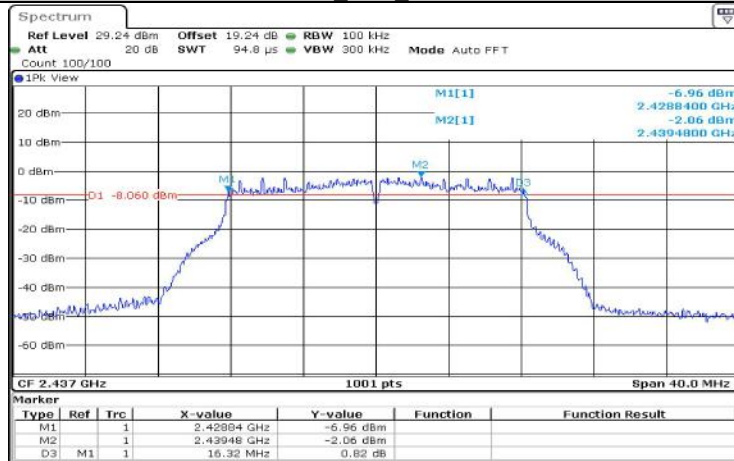


Date: 9.MAY.2022 22:45:30


11G_Ant0_2462

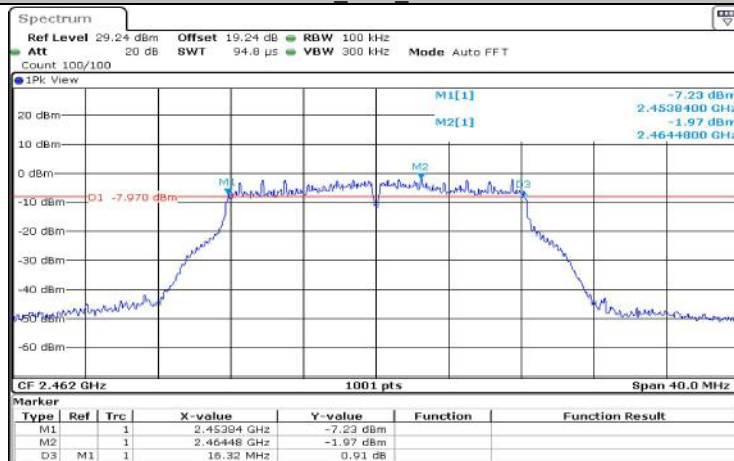

Date: 9.MAY.2022 22:47:16

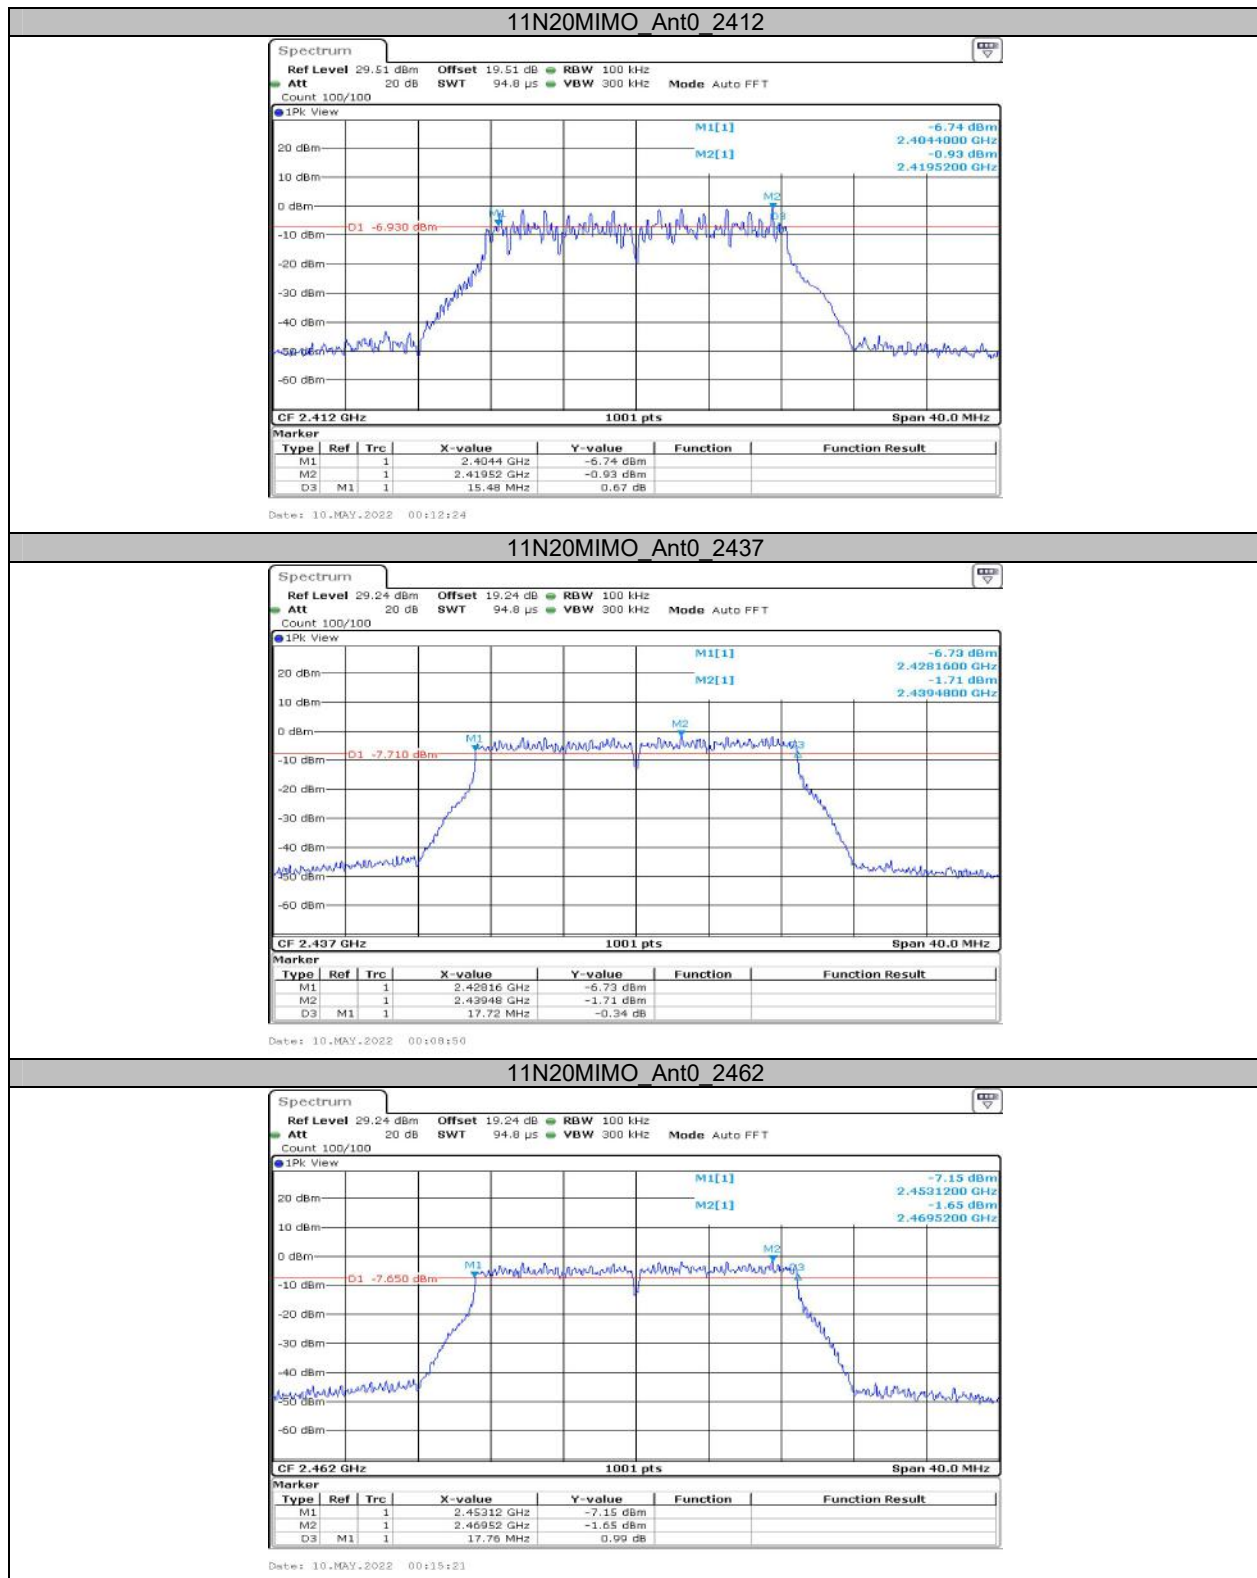


11AX20MIMO_Ant0 2412_242Tone_RU61

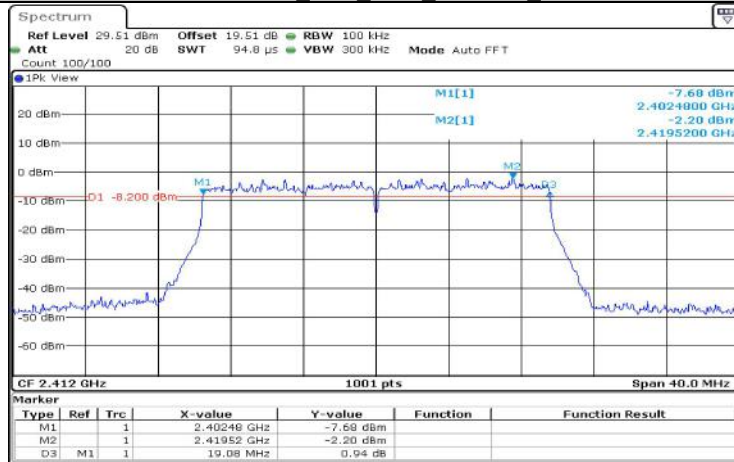


Date: 10.MAY.2022 02:26:52

11AX20MIMO_Ant0 2437_242Tone_RU61

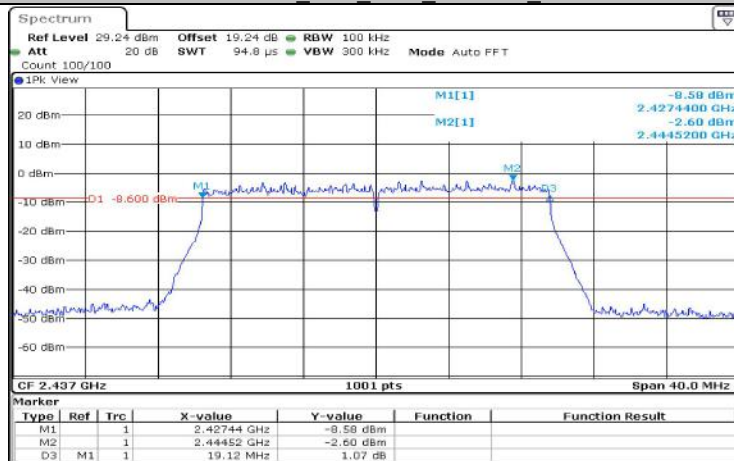

Date: 10.MAY.2022 00:32:14

11AX20MIMO_Ant0 2462_242Tone_RU61

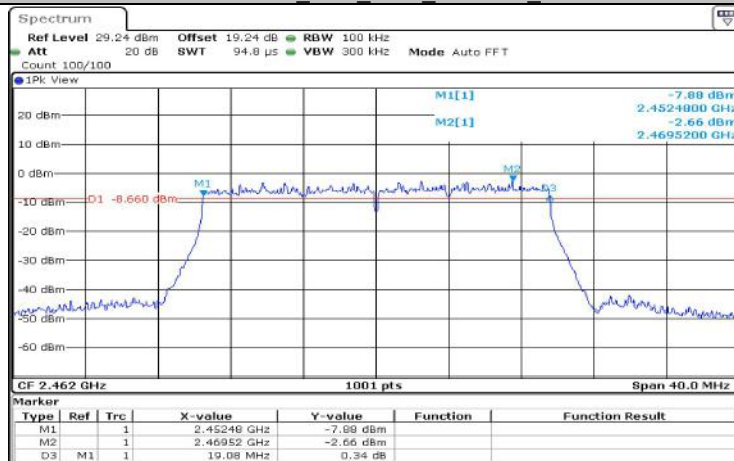


Date: 10.MAY.2022 00:37:29

**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant0	2412	11.788	---	---
	Ant0	2437	11.748	---	---
	Ant0	2462	11.828	---	---
11G	Ant0	2412	17.782	---	---
	Ant0	2437	17.702	---	---
	Ant0	2462	17.742	---	---
11N20MIMO	Ant0	2412	17.582	---	---
	Ant0	2437	18.462	---	---
	Ant0	2462	18.462	---	---
11AX20MIMO_242Tone_RU61	Ant0	2412	19.261	---	---
	Ant0	2437	19.261	---	---
	Ant0	2462	19.261	---	---


Test Graphs

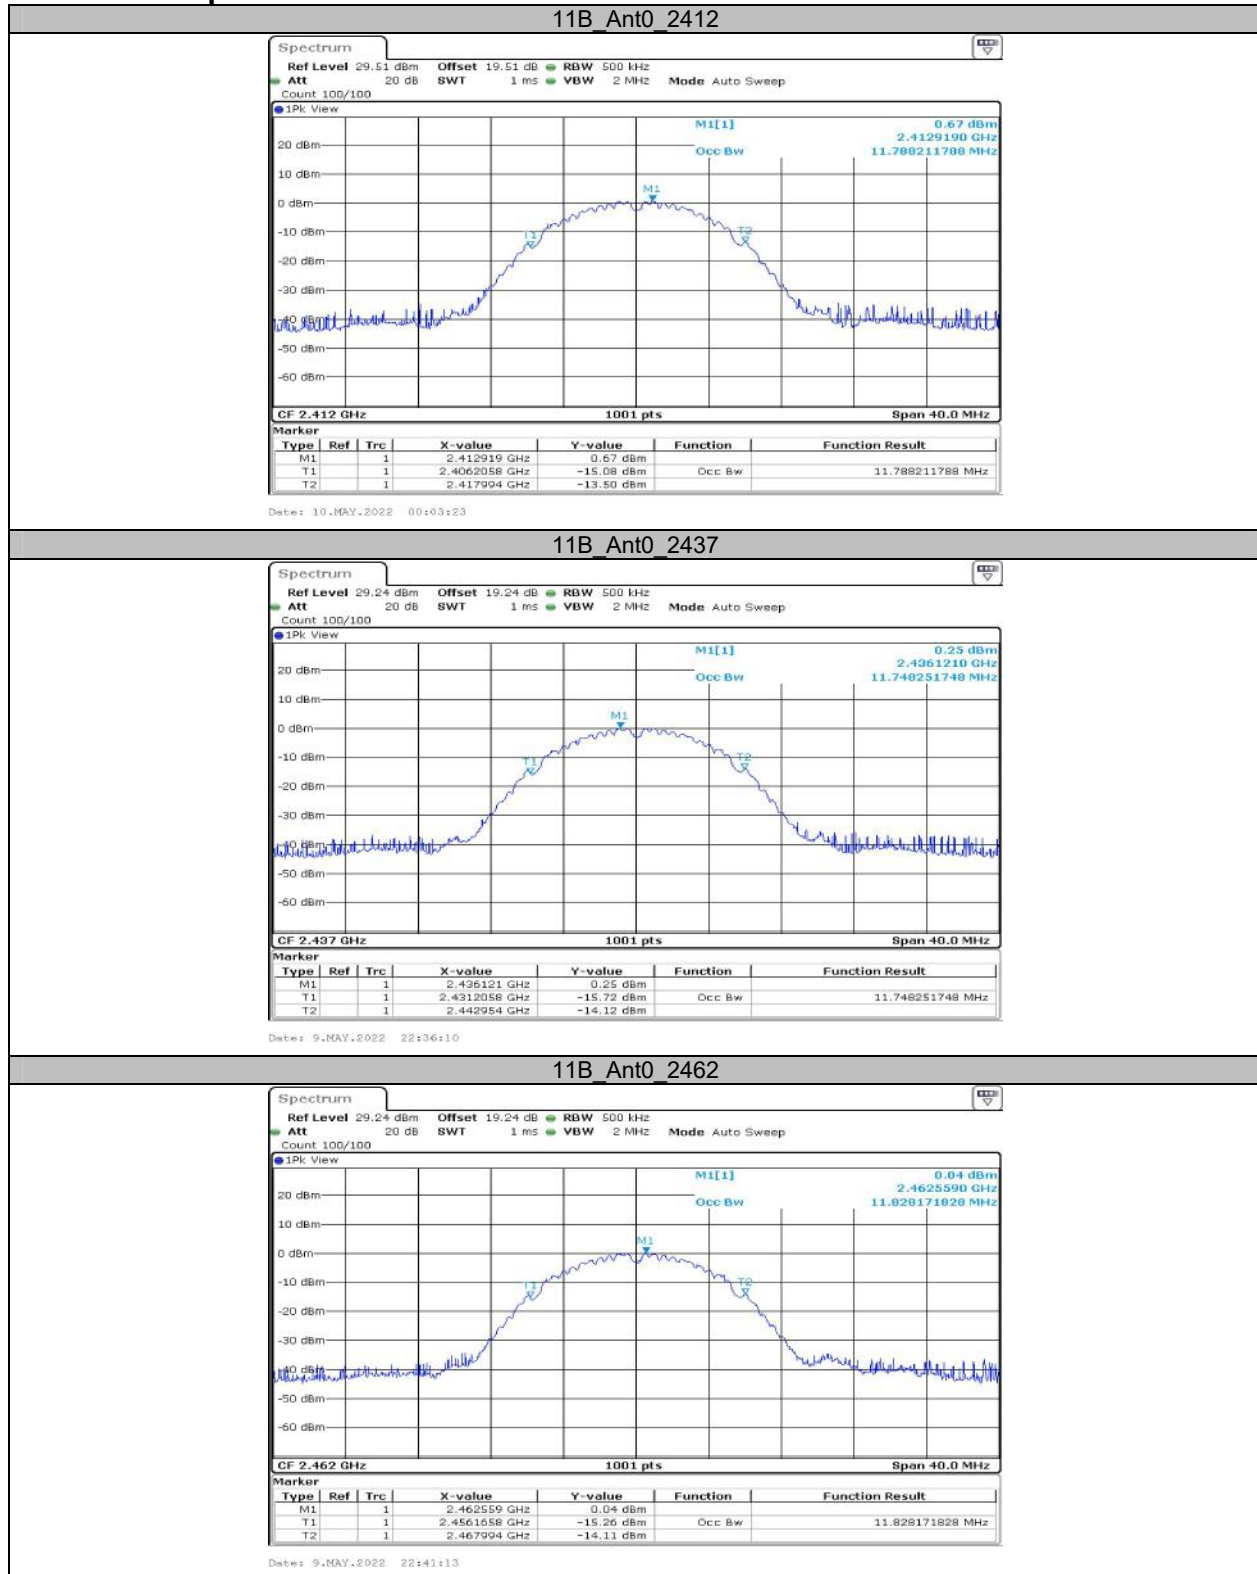

11G_Ant0_2412




11G_Ant0_2437

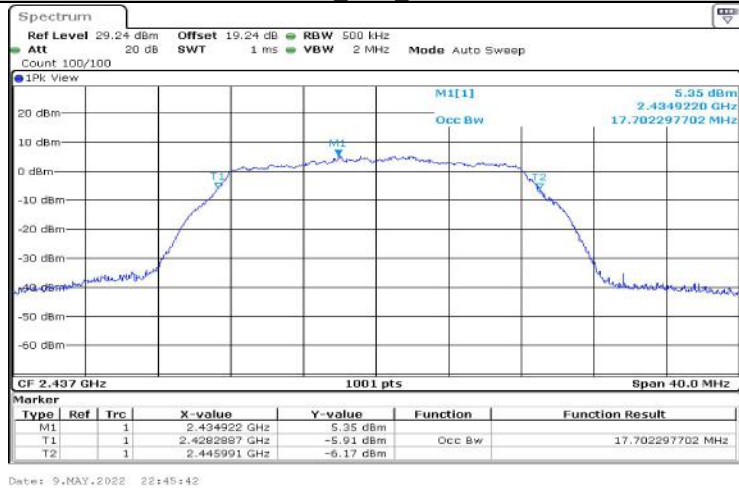

11G_Ant0_2462



11N20MIMO_Ant0_2412

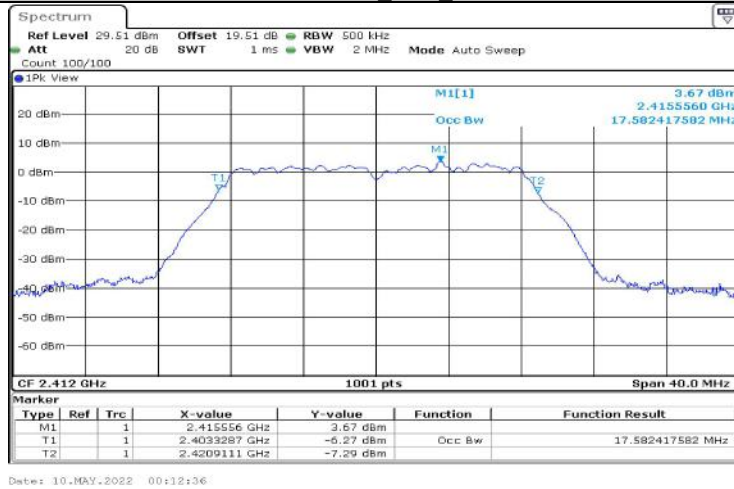


11N20MIMO_Ant0_2437



11N20MIMO_Ant0_2462




11AX20MIMO_Ant0_2412_242Tone_RU61

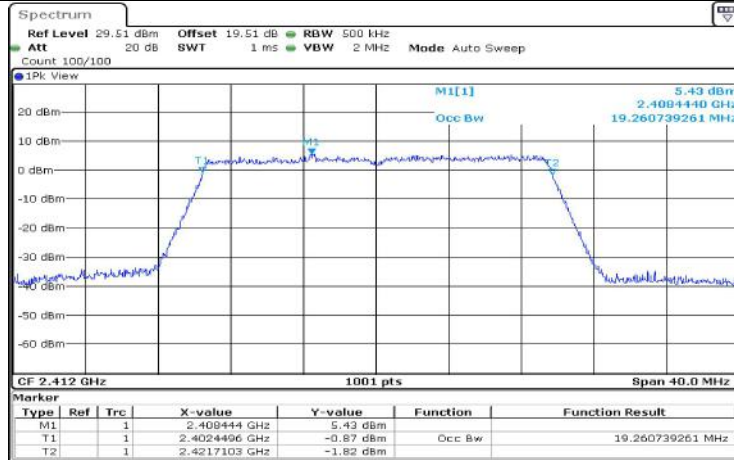


Date: 10.MAY.2022 02:27:03

11AX20MIMO_Ant0_2437_242Tone_RU61

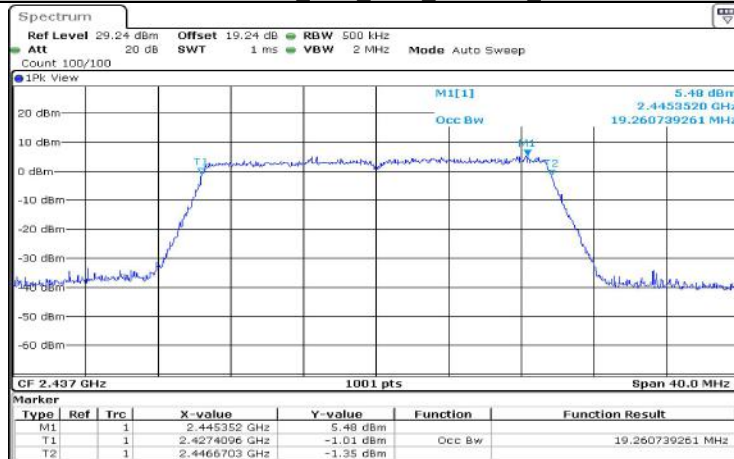

Date: 10.MAY.2022 00:32:25

11AX20MIMO_Ant0_2462_242Tone_RU61

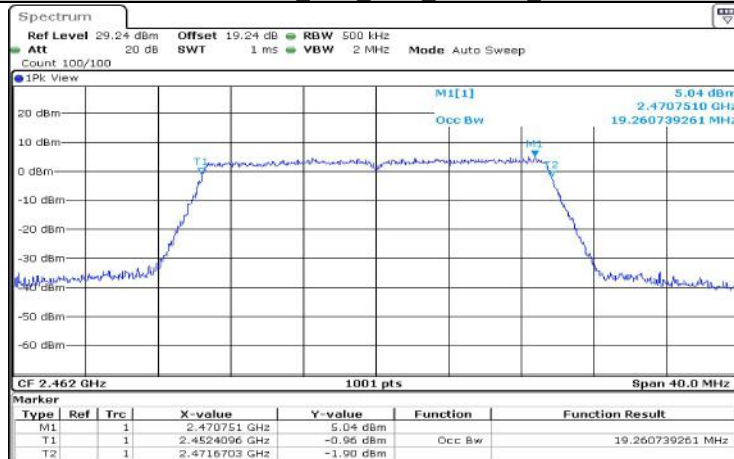

Date: 10.MAY.2022 00:37:41

Appendix C: Maximum conducted output power**Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant0	2412	15.16	≤30.00	PASS
	Ant1	2412	15.08	≤30.00	PASS
	Ant0	2437	15.31	≤30.00	PASS
	Ant1	2437	14.85	≤30.00	PASS
	Ant0	2462	15.14	≤30.00	PASS
	Ant1	2462	15.53	≤30.00	PASS
11G	Ant0	2412	18.33	≤30.00	PASS
	Ant1	2412	18.34	≤30.00	PASS
	Ant0	2437	17.64	≤30.00	PASS
	Ant1	2437	18.55	≤30.00	PASS
	Ant0	2462	17.46	≤30.00	PASS
	Ant1	2462	18.59	≤30.00	PASS
11N20MIMO	Ant0	2412	16.80	≤30.00	PASS
	Ant1	2412	17.39	≤30.00	PASS
	total	2412	20.12	≤30.00	PASS
	Ant0	2437	16.48	≤30.00	PASS
	Ant1	2437	17.55	≤30.00	PASS
	total	2437	20.06	≤30.00	PASS
	Ant0	2462	16.65	≤30.00	PASS
	Ant1	2462	17.65	≤30.00	PASS
	total	2462	20.19	≤30.00	PASS

Channel	Frequency (MHz)	Antenna	Max Conducted Peak Output Power (dBm)	Limit (dBm)
AX20 RU26				
Low	2412	Ant0	21.06	30
		Ant1	22.86	30
		total	25.06	30
Middle	2437	Ant0	21.79	30
		Ant1	22.58	30
		total	25.21	30
High	2462	Ant0	21.55	30
		Ant1	22.39	30
		total	25.00	30
AX20 RU52				
Low	2412	Ant0	21.48	30
		Ant1	22.90	30
		total	25.26	30
Middle	2437	Ant0	21.94	30
		Ant1	22.82	30
		total	25.41	30
High	2462	Ant0	21.67	30
		Ant1	22.45	30
		total	25.09	30

Channel	Frequency (MHz)	Antenna	Max Conducted Peak Output Power (dBm)	Limit (dBm)
AX20 RU106				
Low	2412	Ant0	20.95	30
		Ant1	22.33	30
		total	24.70	30
Middle	2437	Ant0	21.49	30
		Ant1	21.99	30
		total	24.76	30
High	2462	Ant0	22.10	30
		Ant1	22.78	30
		total	25.46	30
AX20 RU242				
Low	2412	Ant0	20.64	30
		Ant1	22.09	30
		total	24.44	30
Middle	2437	Ant0	21.00	30
		Ant1	21.80	30
		total	24.43	30
High	2462	Ant0	21.15	30
		Ant1	22.03	30
		total	24.62	30

Note:

For 802.11 n20/ax20 mode, EUT support CDD

Directional gain = GANT + Array Gain

Array Gain=0dB for NANT≤4

GANT0=4.0dBi, GANT1=2.5dBi, use the higher one to calculate the worst case

Directional gain=4dBi+0dB=4dBi≤6dBi

The maximum EIRP=25.46dBm+4dBi=29.46dBm<36dBm, so EUT compliance with EIRP limit of ISSED

Appendix D: Maximum power spectral density**Test Result**

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant0	2412	-8.66	≤8.00	PASS
	Ant1	2412	-8.82	≤8.00	PASS
	Ant0	2437	-8.24	≤8.00	PASS
	Ant1	2437	-9.69	≤8.00	PASS
	Ant0	2462	-8.80	≤8.00	PASS
	Ant1	2462	-7.73	≤8.00	PASS
11G	Ant0	2412	-12.72	≤8.00	PASS
	Ant1	2412	-12.52	≤8.00	PASS
	Ant0	2437	-13.37	≤8.00	PASS
	Ant1	2437	-12.43	≤8.00	PASS
	Ant0	2462	-13.58	≤8.00	PASS
	Ant1	2462	-12.39	≤8.00	PASS
11N20MIMO	Ant0	2412	-14.01	≤7.00	PASS
	Ant1	2412	-13.74	≤7.00	PASS
	total	2412	-10.86	≤7.00	PASS
	Ant0	2437	-14.63	≤7.00	PASS
	Ant1	2437	-13.9	≤7.00	PASS
	total	2437	-11.24	≤7.00	PASS
	Ant0	2462	-14.67	≤7.00	PASS
	Ant1	2462	-13.64	≤7.00	PASS
	total	2462	-11.11	≤7.00	PASS

Test Mode	Frequency (MHz)	Antenna	RU Size	RU Index	PSD (dBm/3kHz)	Limit (dBm/3kHz)
11AX20MIMO	2412	ant0	26	0	-6.93	≤ 7
		ant1	26	0	-5.82	≤ 7
		total	26	0	-3.33	≤ 7
		ant0	52	37	-10.68	≤ 7
		ant1	52	37	-10.09	≤ 7
		total	52	37	-7.36	≤ 7
		ant0	106	53	-13.46	≤ 7
		ant1	106	53	-12.29	≤ 7
		total	106	53	-9.83	≤ 7
		ant0	242	61	-16.22	≤ 7
		ant1	242	61	-14.07	≤ 7
		total	242	61	-12.00	≤ 7
	2437	ant0	26	0	-7.65	≤ 7
		ant1	26	0	-6.91	≤ 7
		total	26	0	-4.25	≤ 7
		ant0	52	37	-10.37	≤ 7
		ant1	52	37	-9.30	≤ 7
		total	52	37	-6.79	≤ 7
		ant0	106	53	-13.92	≤ 7
		ant1	106	53	-12.91	≤ 7
		total	106	53	-10.38	≤ 7
		ant0	242	61	-15.44	≤ 7
		ant1	242	61	-14.82	≤ 7
		total	242	61	-12.11	≤ 7
	2462	ant0	26	8	-8.11	≤ 7
		ant1	26	8	-6.78	≤ 7
		total	26	8	-4.38	≤ 7
		ant0	52	40	-9.46	≤ 7
		ant1	52	40	-9.18	≤ 7
		total	52	40	-6.31	≤ 7
		ant0	106	54	-11.59	≤ 7
		ant1	106	54	-11.53	≤ 7
		total	106	54	-8.55	≤ 7
		ant0	242	61	-14.63	≤ 7
		ant1	242	61	-15.39	≤ 7
		total	242	61	-11.98	≤ 7

Note:

For 802.11 n20/ax20 mode, EUT support CDD

Directional gain = G_{ANT} + Array Gain


Array Gain = $10 \cdot \log N_{ANT}$

$G_{ANT0} = 4.0\text{dBi}$, $G_{ANT1} = 2.5\text{dBi}$, use the higher one to calculate the worst case


Directional gain = $4\text{dBi} + 10 \cdot \log 2\text{dB} = 7\text{dBi} > 6\text{dBi}$

So the limit should reduce 1dB.


Test Graphs

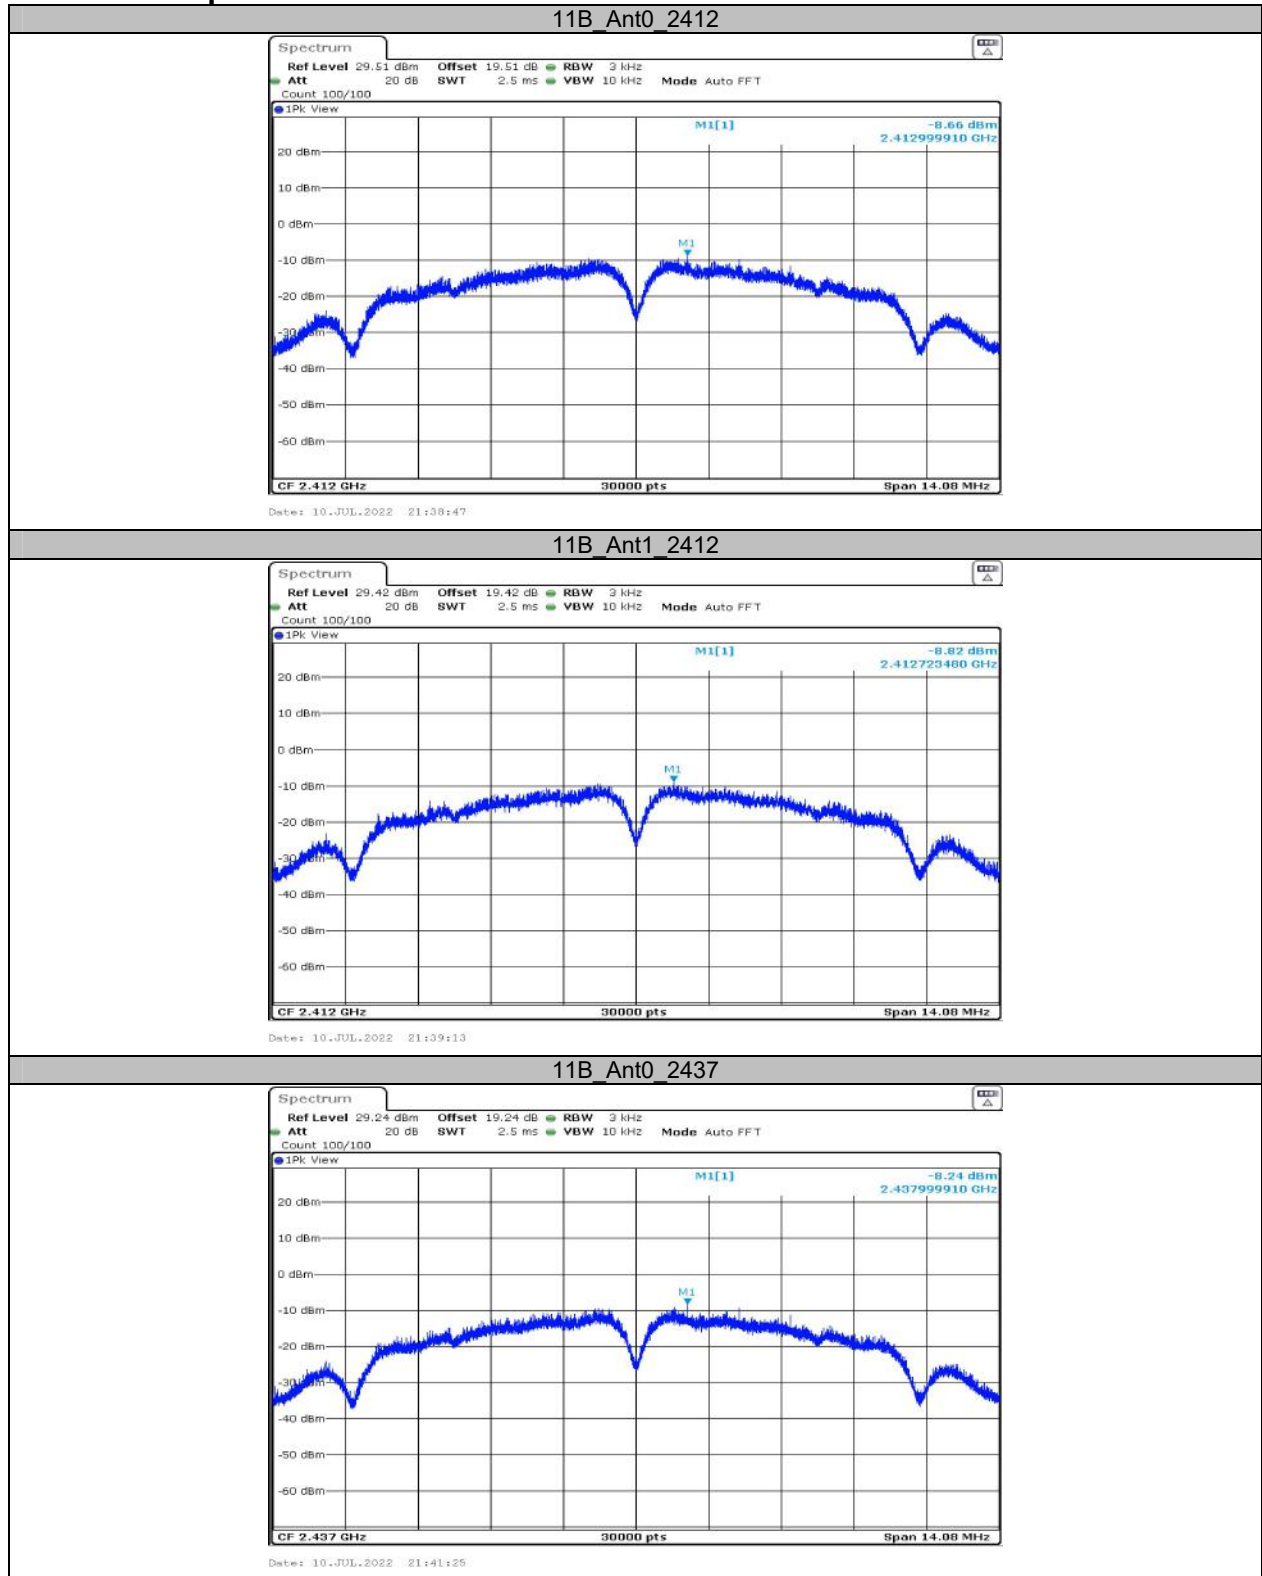


11B_Ant1_2437

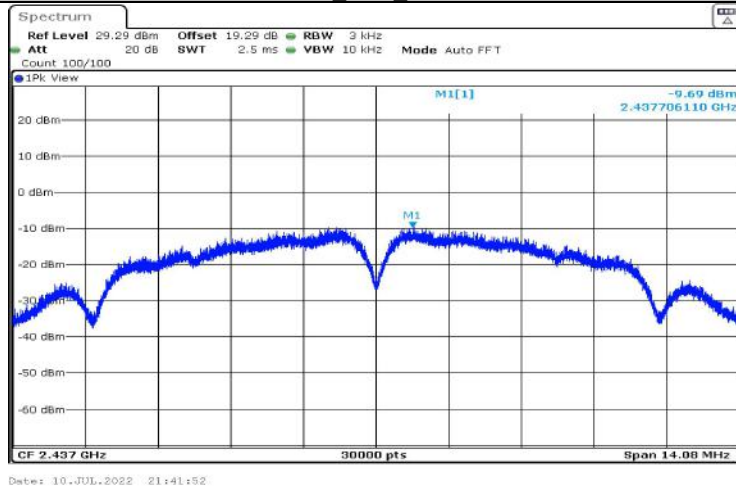



11B_Ant0_2462

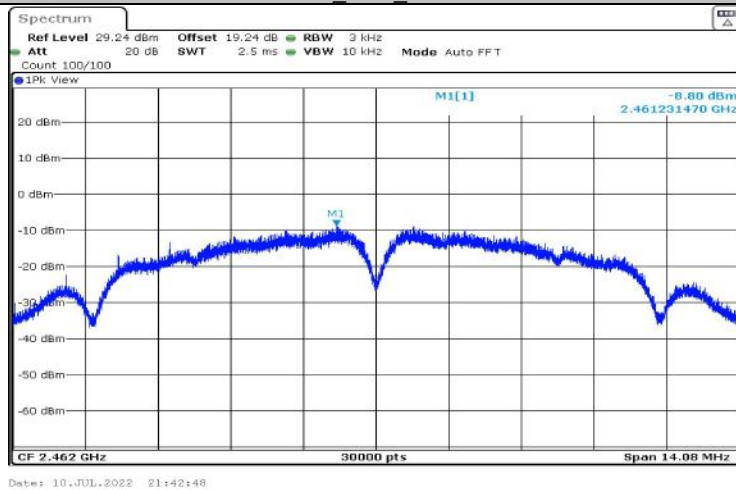



11B_Ant1_2462

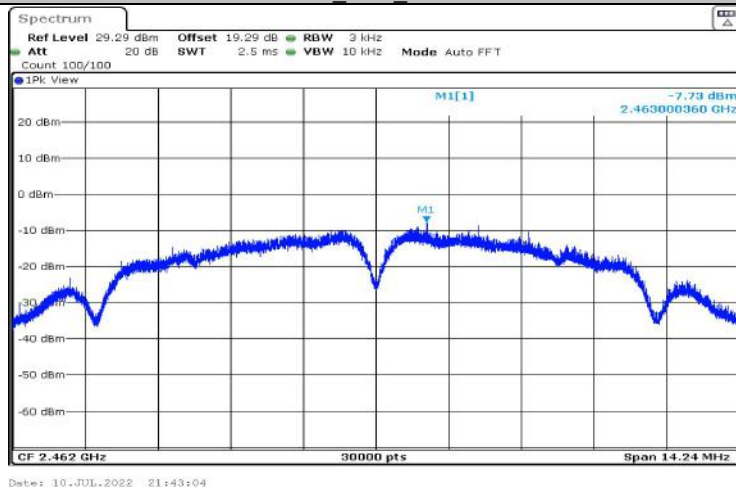

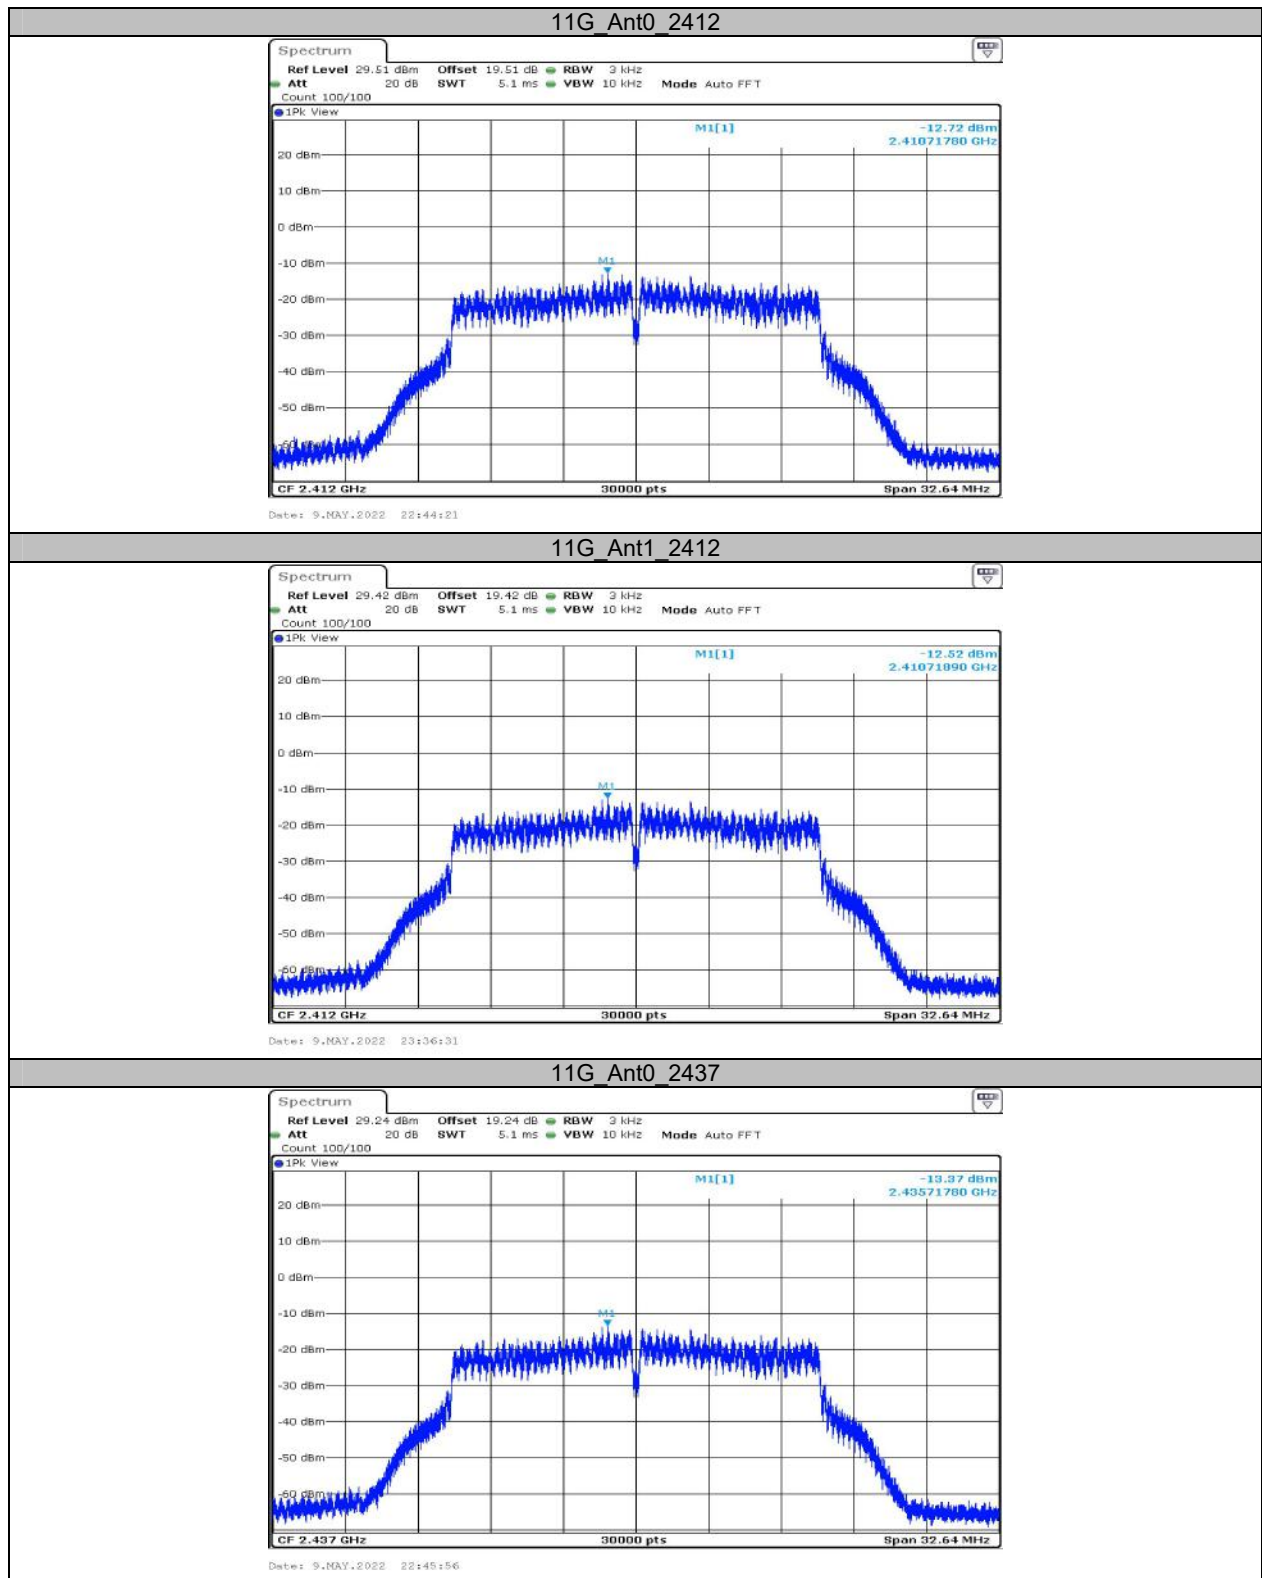

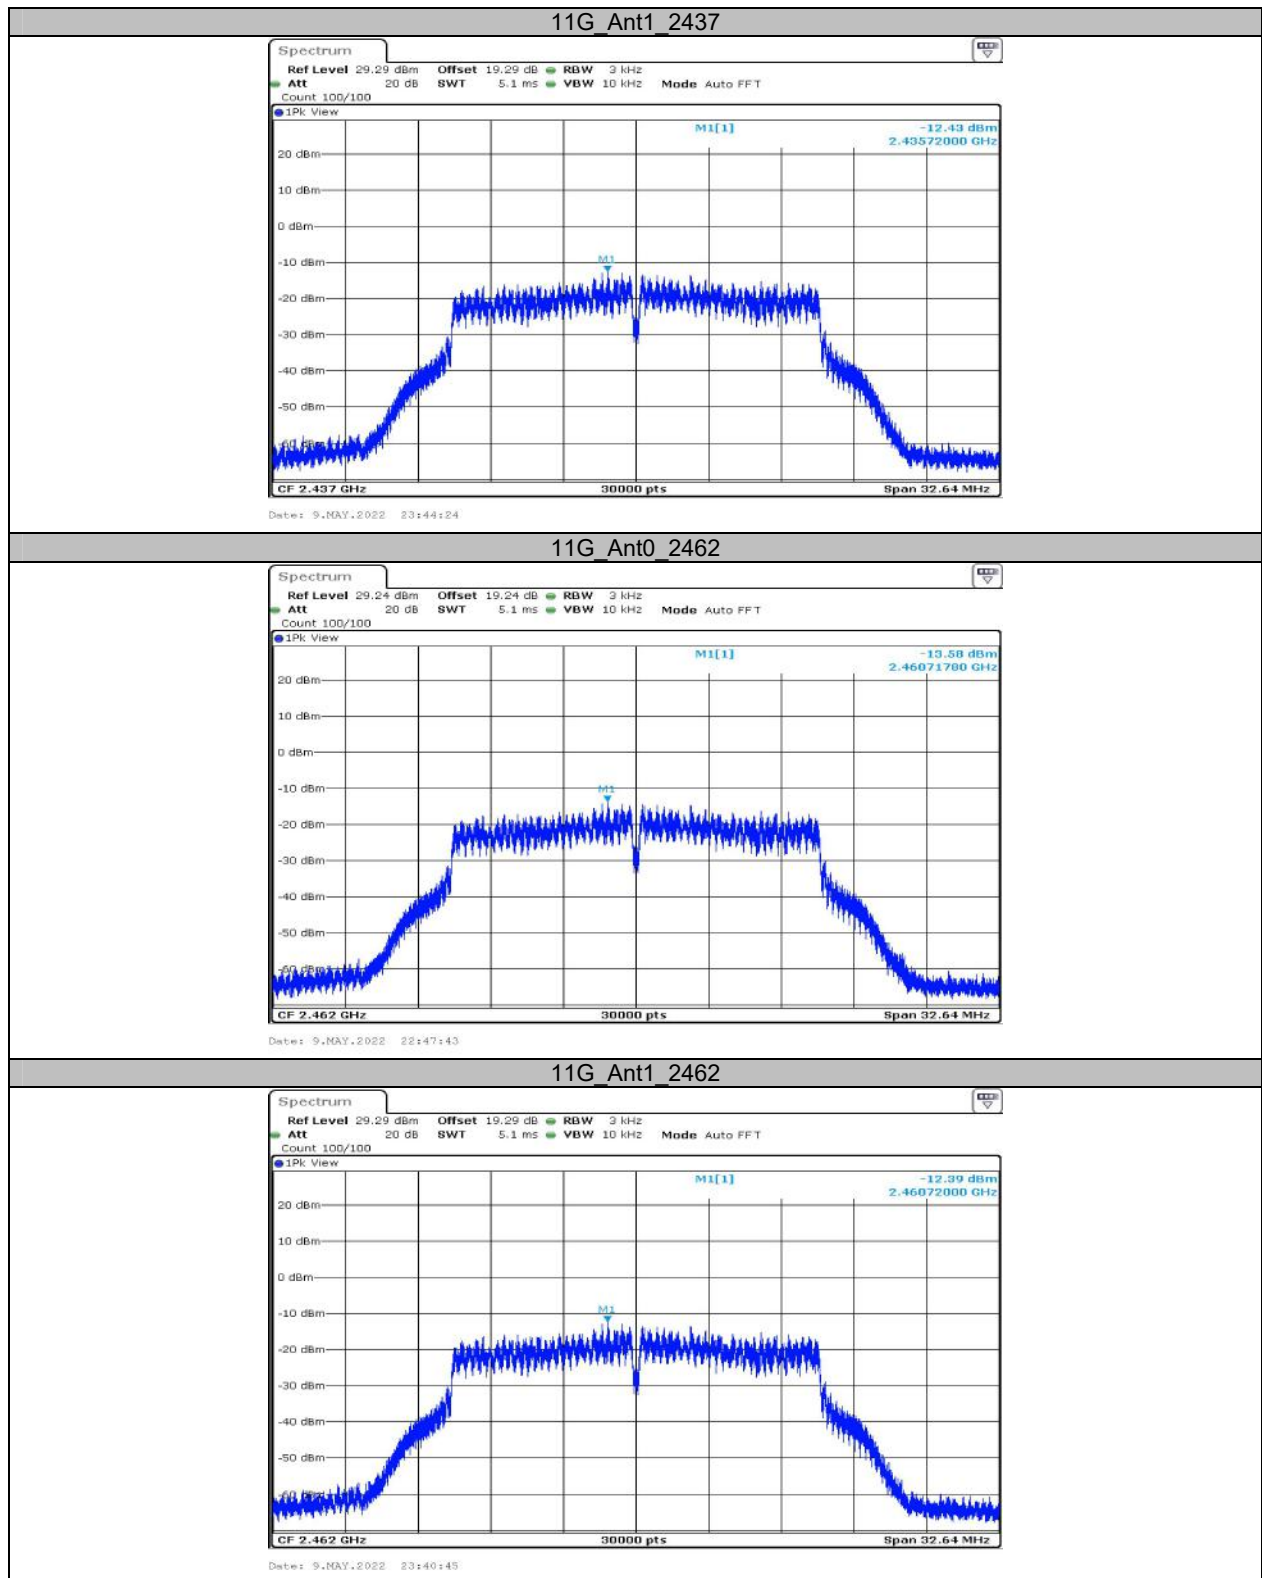


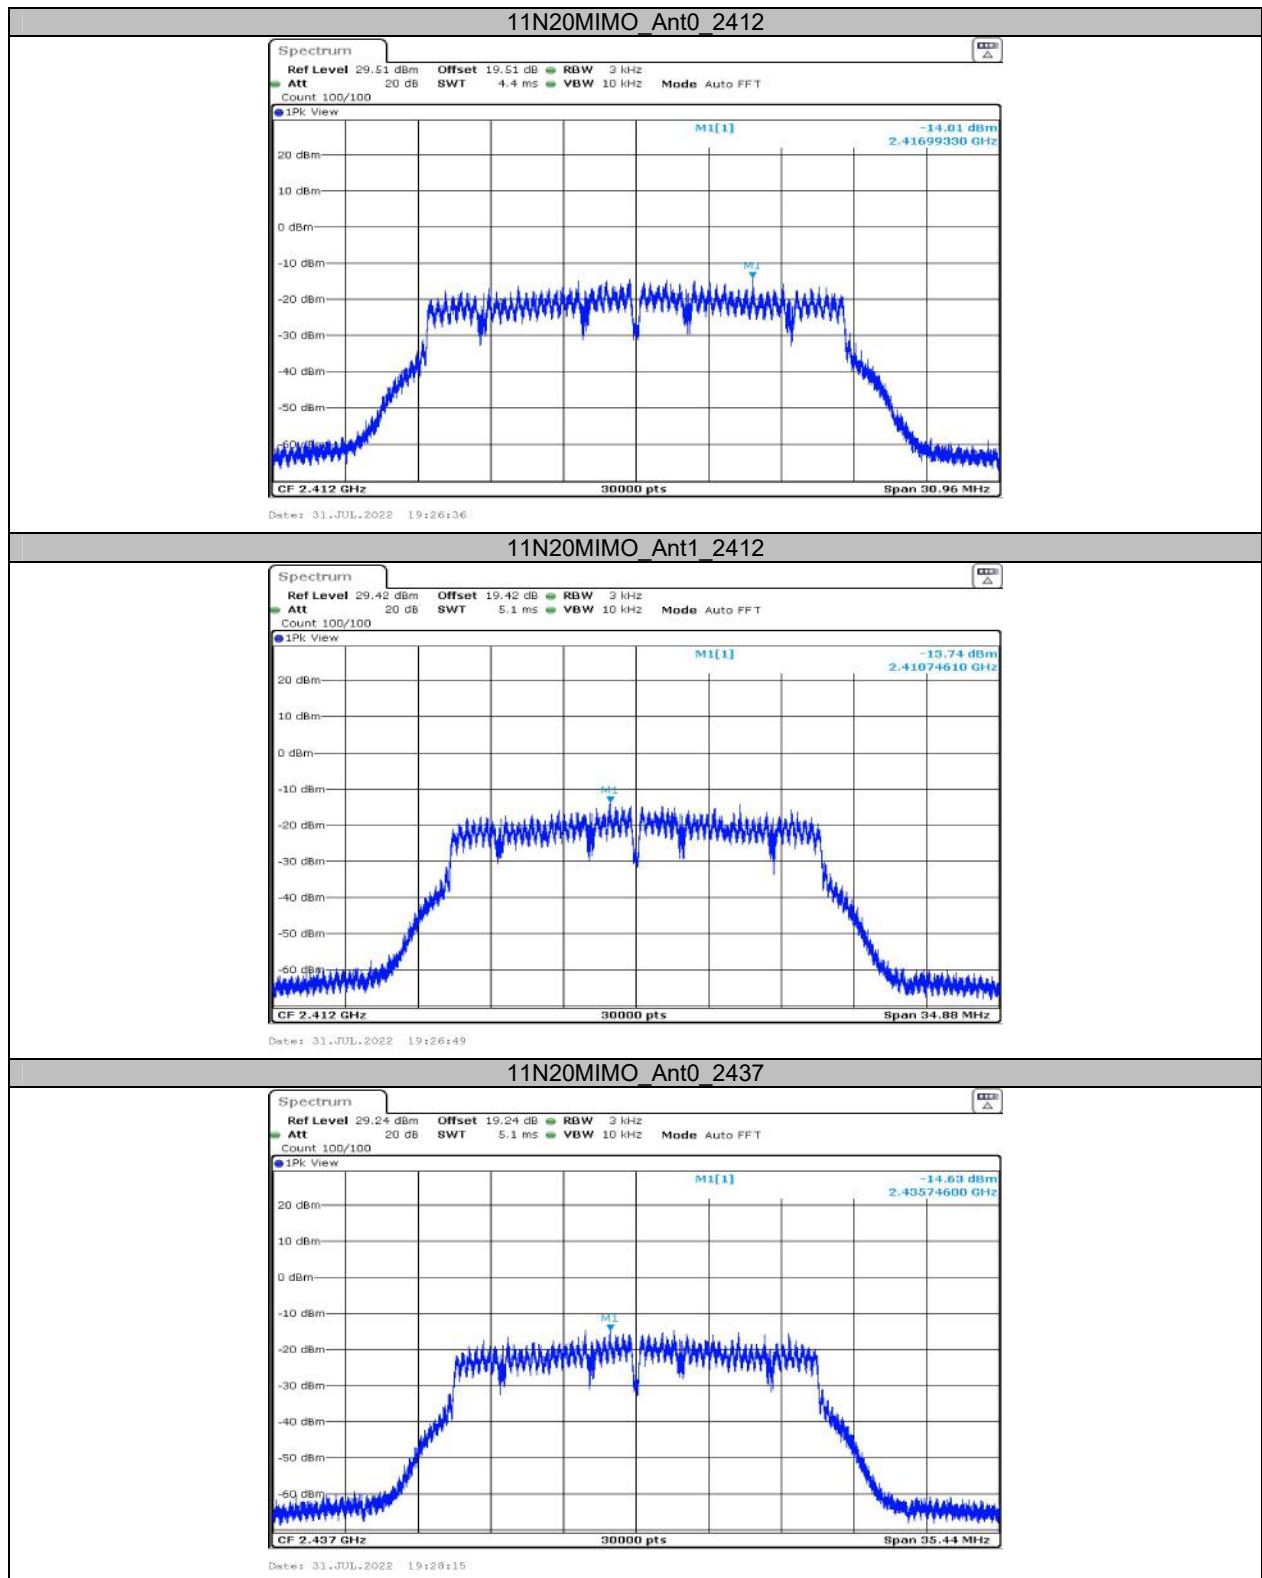

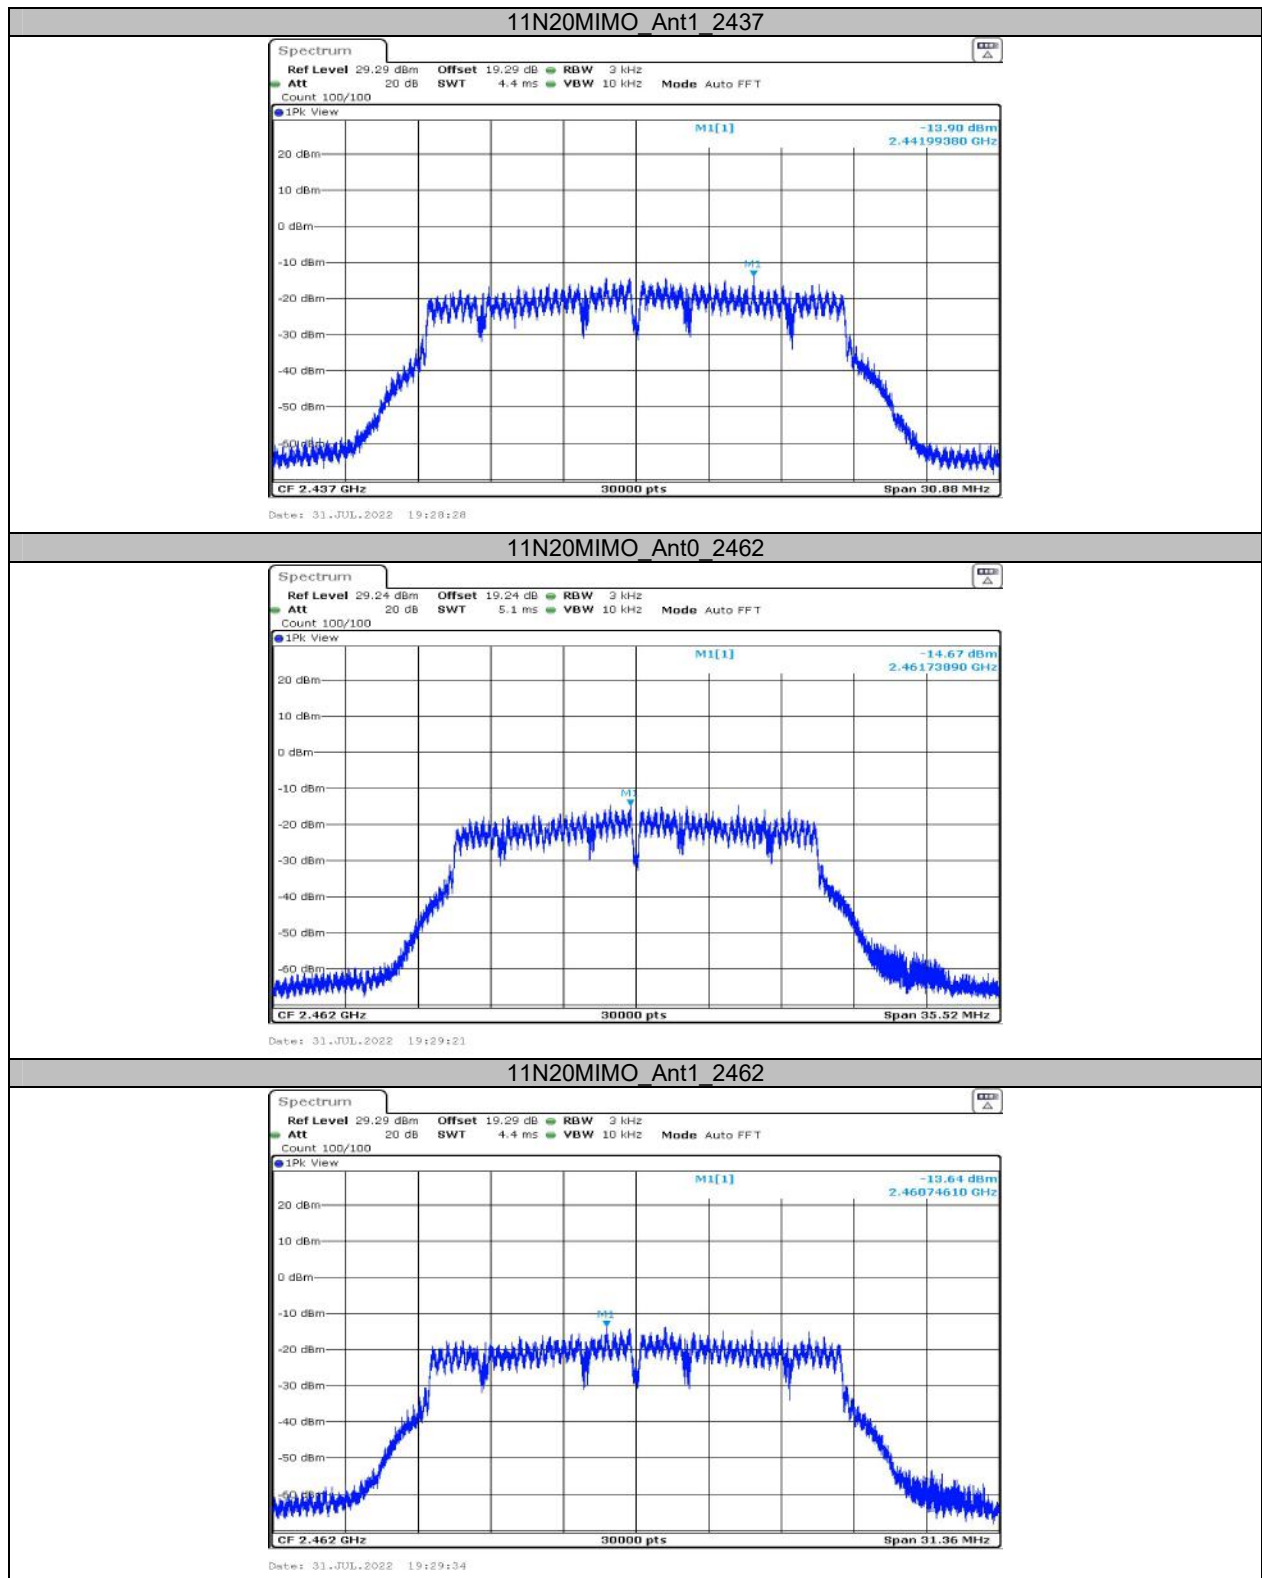


Antenna 0:

RU26_0, Low Channel

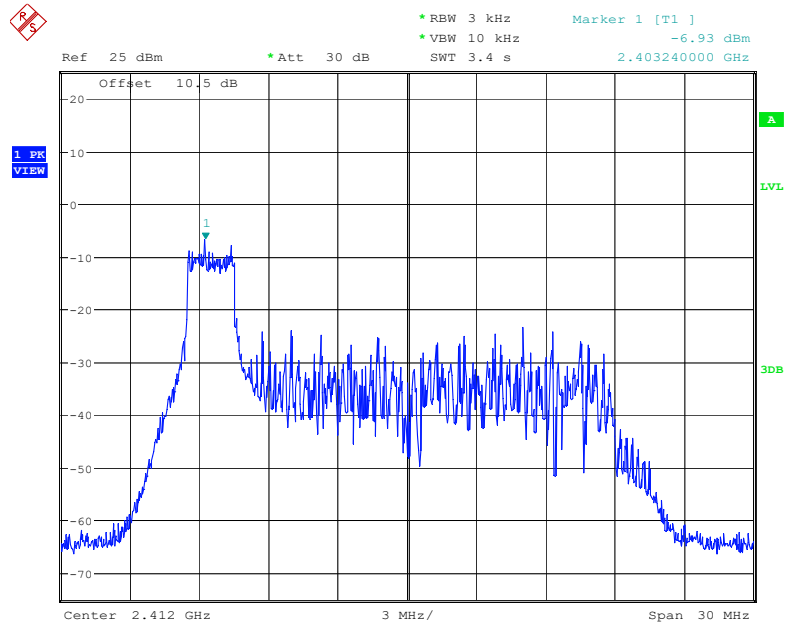


Date: 20.JUN.2022 20:39:24

RU26_0, Middle Channel

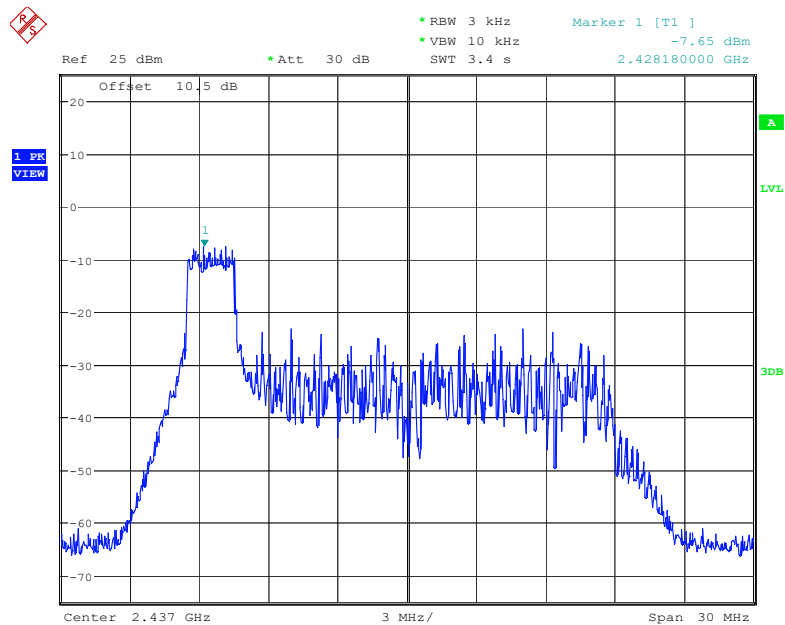


Date: 20.JUN.2022 20:42:08

RU26_8, High Channel

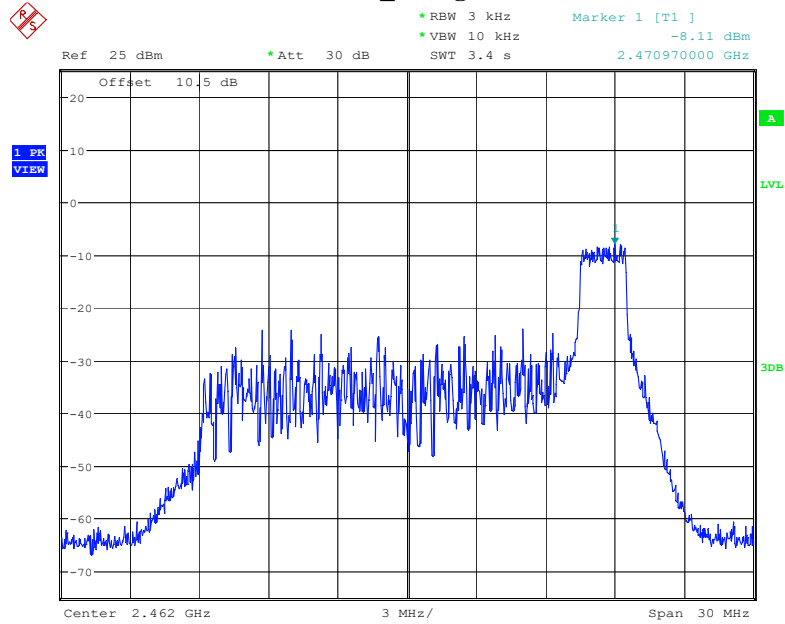


Date: 20.JUN.2022 23:32:24

RU52_37, Low Channel

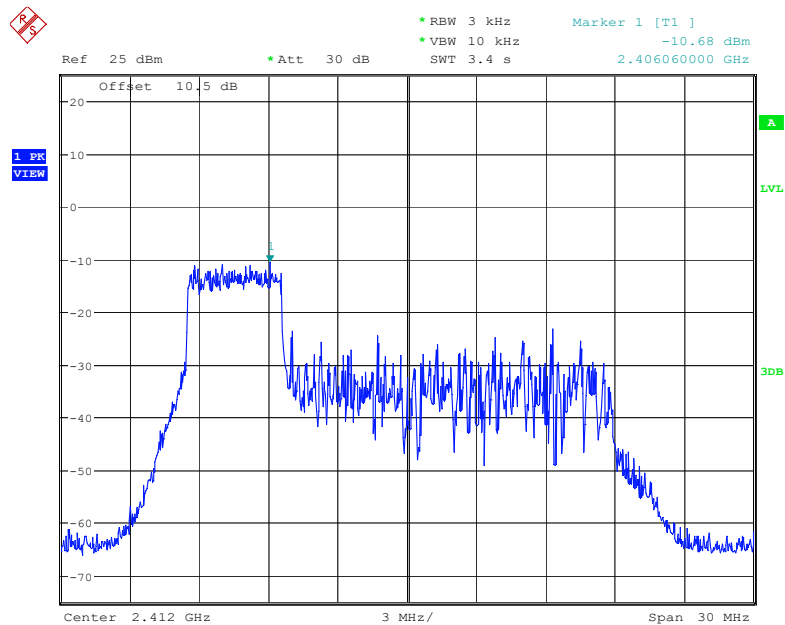


Date: 20.JUN.2022 21:12:05

RU52_37, Middle Channel

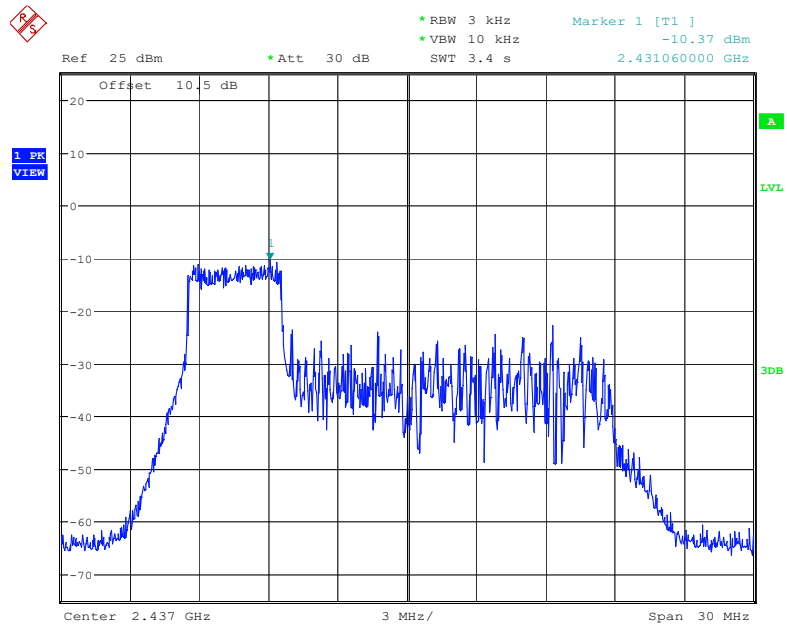


Date: 20.JUN.2022 21:10:15

RU52_40, High Channel

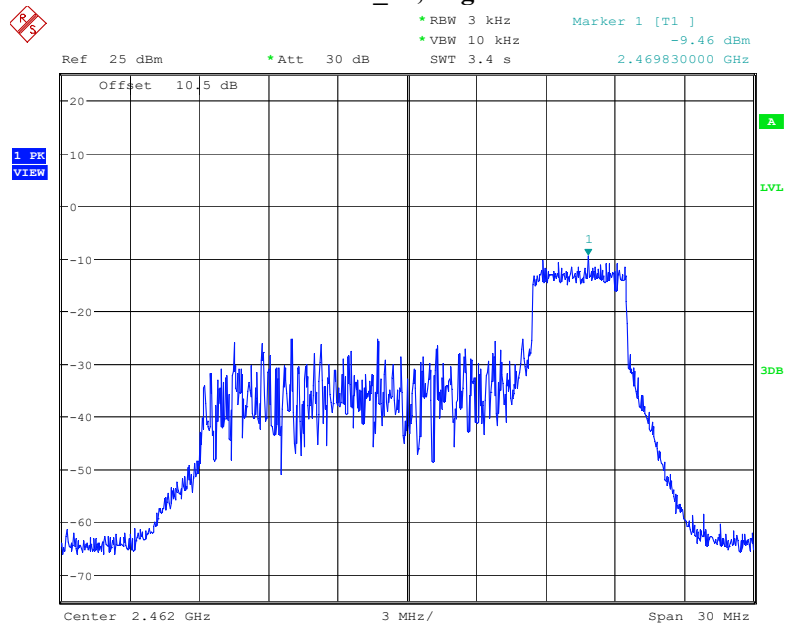


Date: 20.JUN.2022 23:34:58

RU106_53, Low Channel

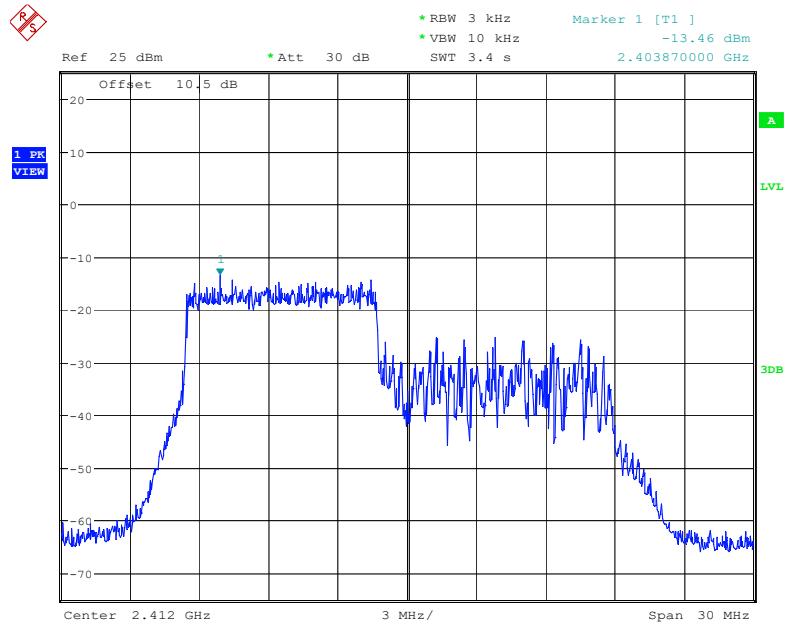


Date: 20.JUN.2022 21:23:06

RU106_53, Middle Channel

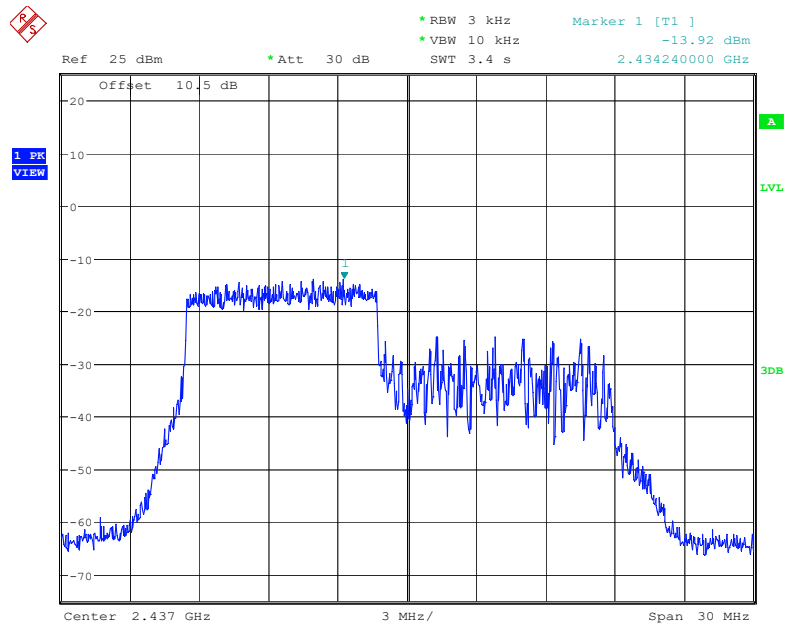


Date: 20.JUN.2022 21:25:32

RU106_54, High Channel

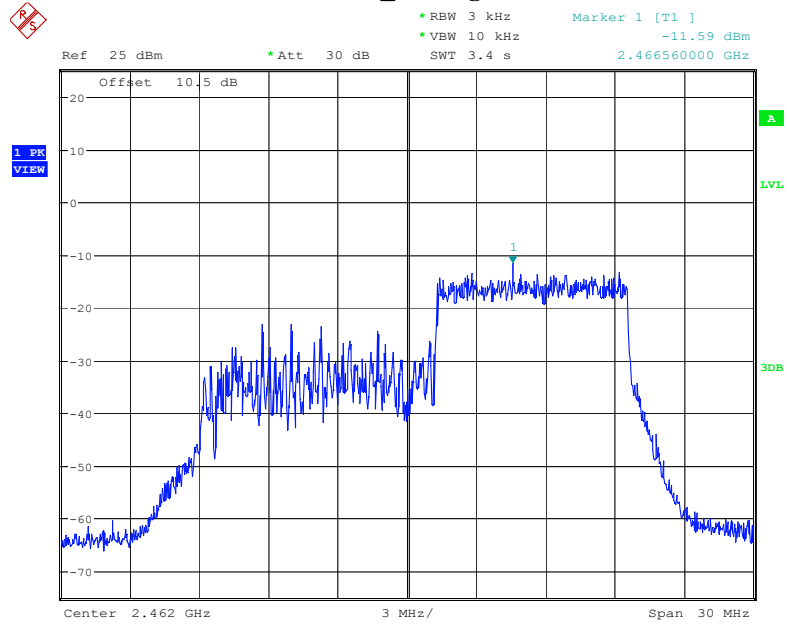


Date: 20.JUN.2022 21:27:37

RU242_61, Low Channel

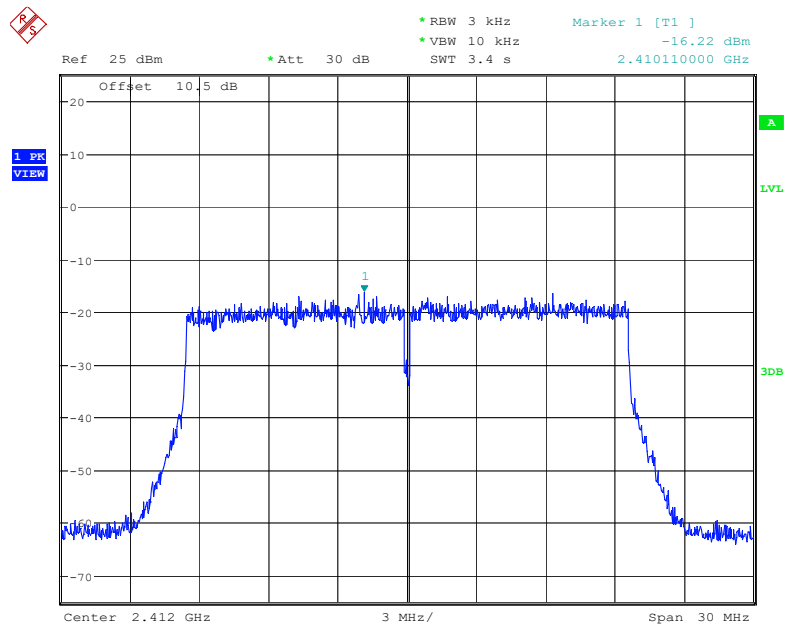


Date: 20.JUN.2022 22:19:11

RU242_61, Middle Channel

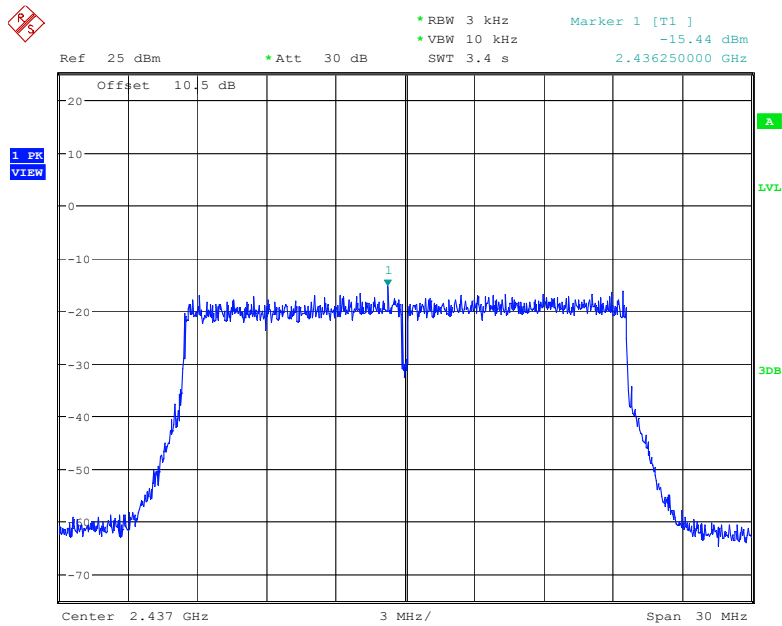

Date: 20.JUN.2022 22:16:54


RU242_61, High Channel

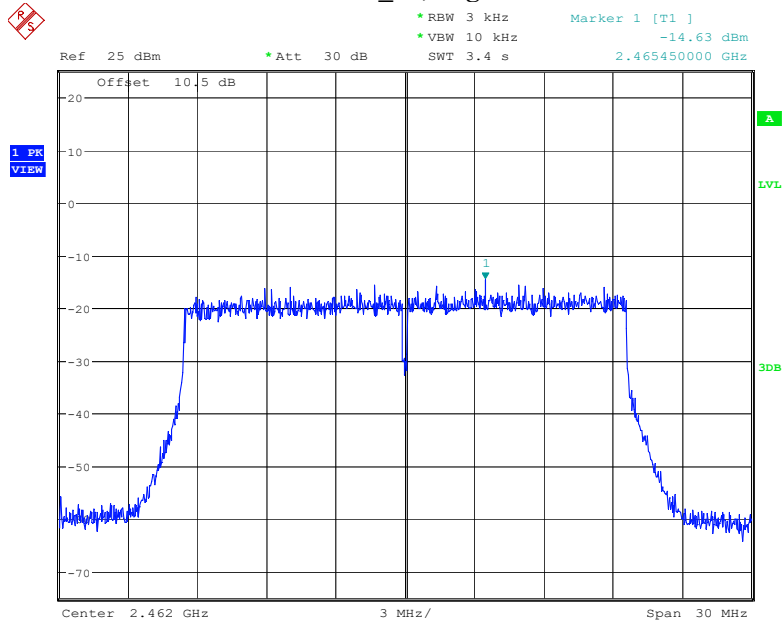

Date: 20.JUN.2022 22:12:40


Antenna 1:

RU26_0, Low Channel

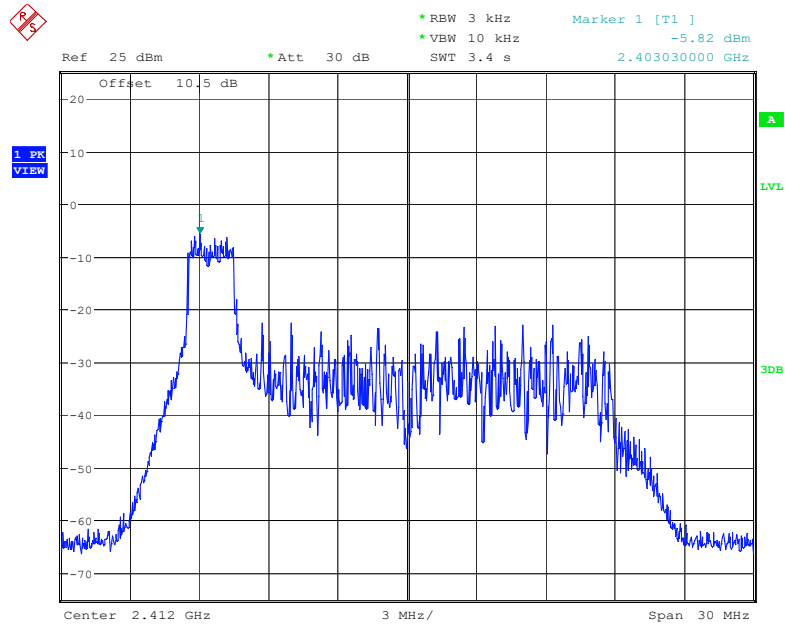


Date: 20.JUN.2022 20:10:02

RU26_0, Middle Channel

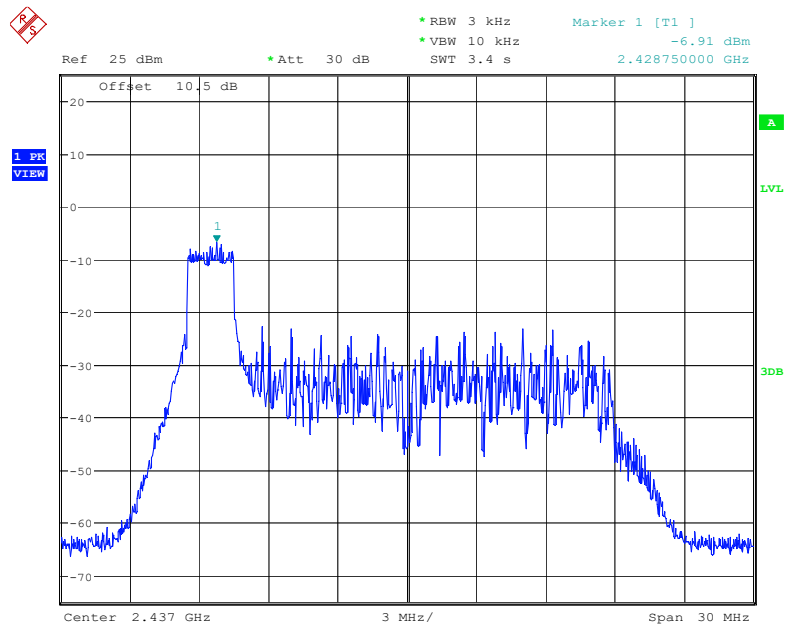


Date: 20.JUN.2022 20:14:03

RU26_8, High Channel

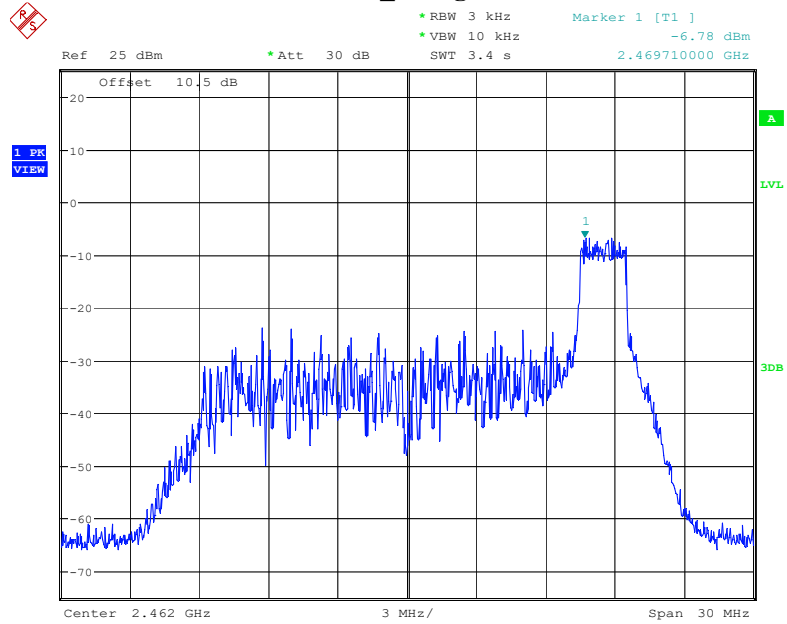


Date: 20.JUN.2022 23:29:42

RU52_37, Low Channel

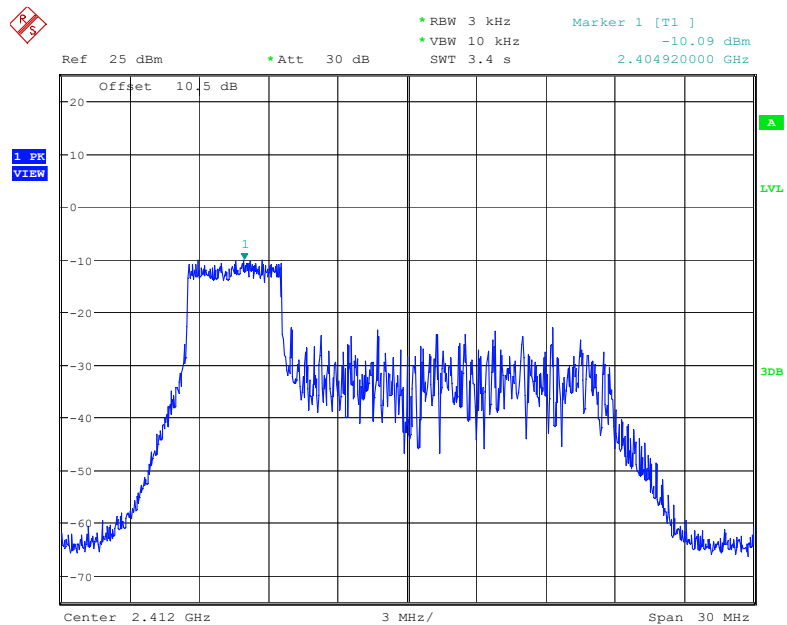


Date: 20.JUN.2022 20:52:50

RU52_37, Middle Channel

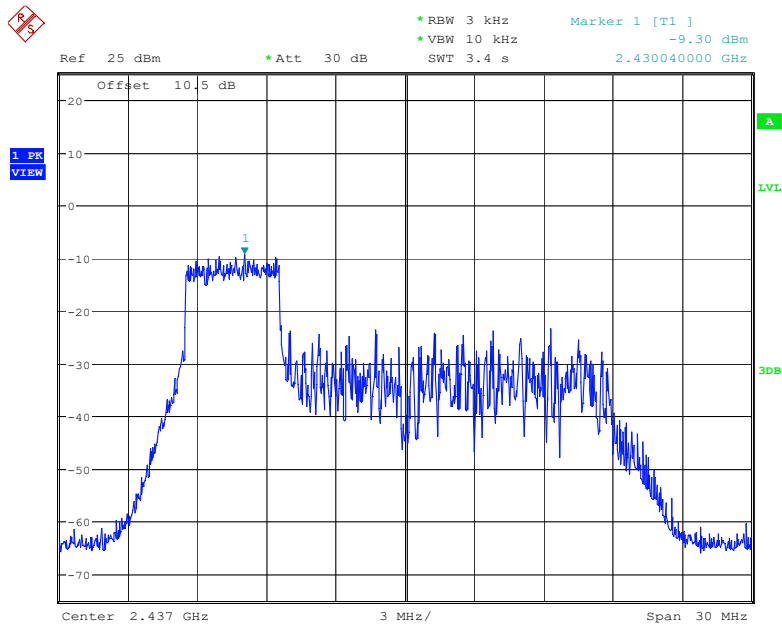


Date: 20.JUN.2022 20:58:04

RU52_40, High Channel

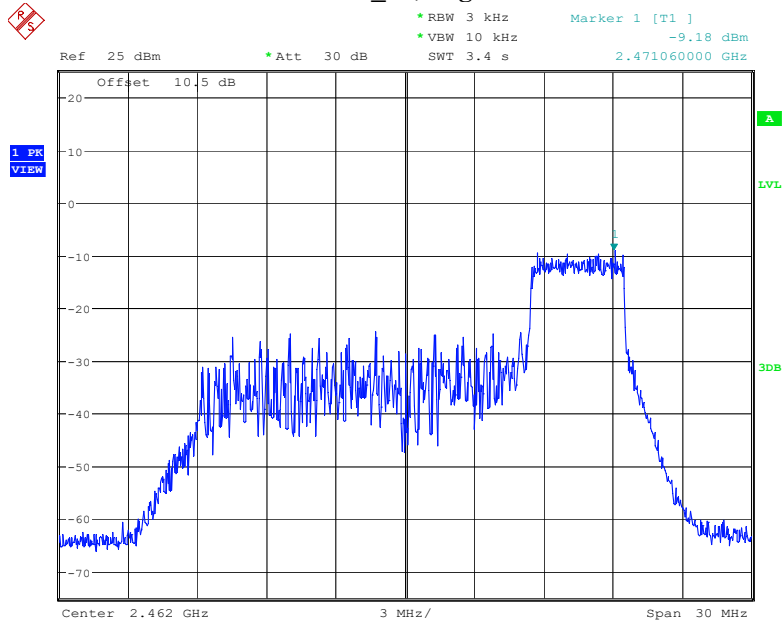


Date: 20.JUN.2022 23:36:54

RU106_53, Low Channel

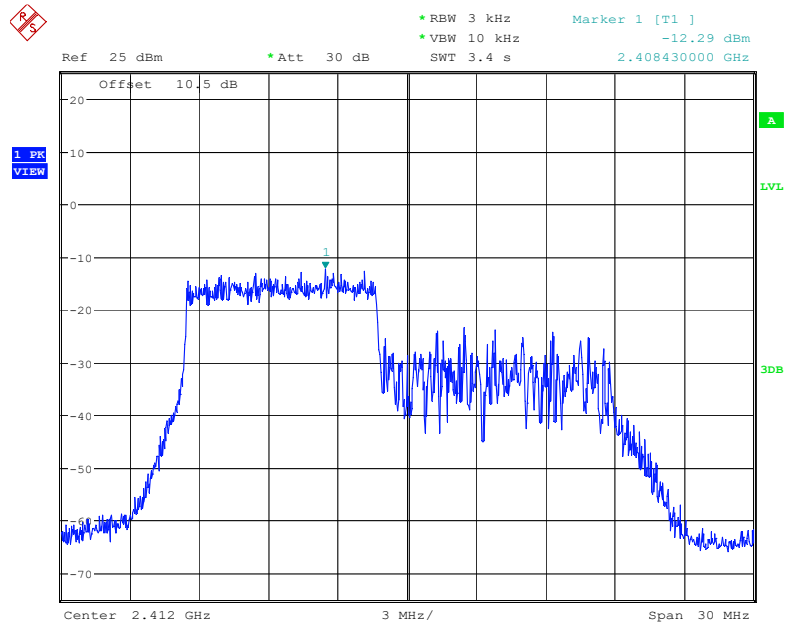


Date: 20.JUN.2022 21:36:03

RU106_53, Middle Channel

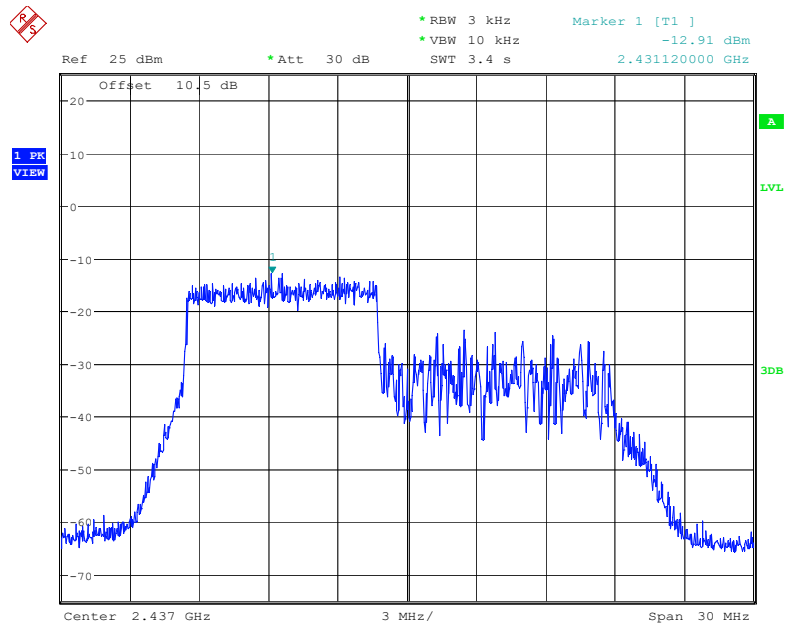


Date: 20.JUN.2022 21:34:32

RU106_54, High Channel

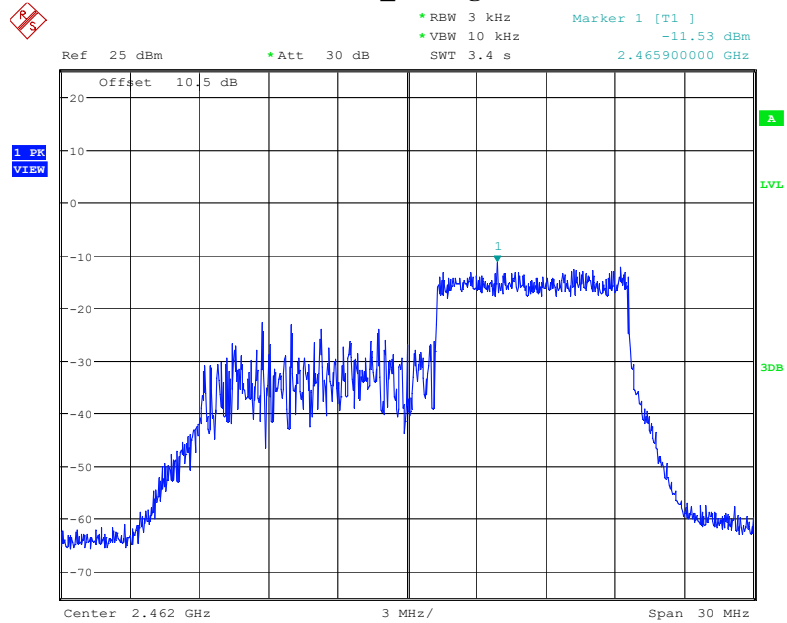


Date: 20.JUN.2022 21:31:44

RU242_61, Low Channel

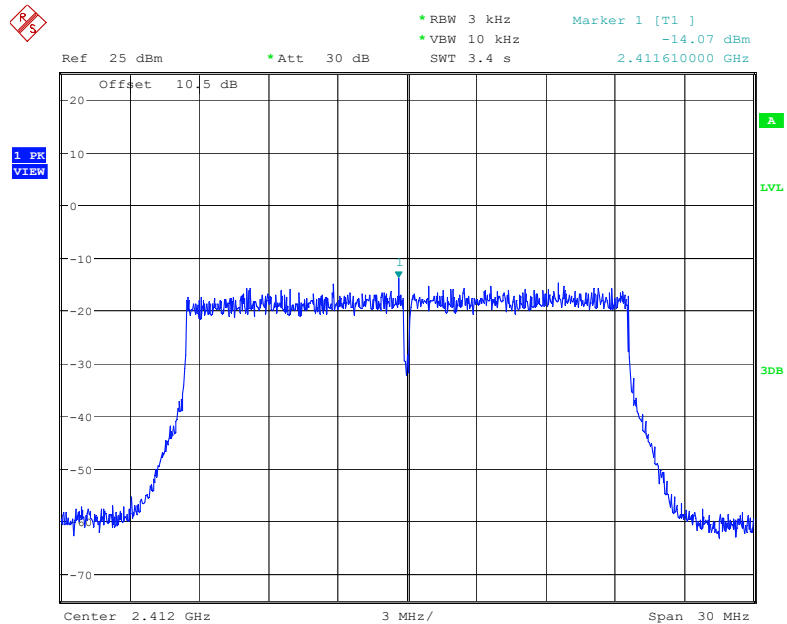


Date: 20.JUN.2022 22:05:39

RU242_61, Middle Channel

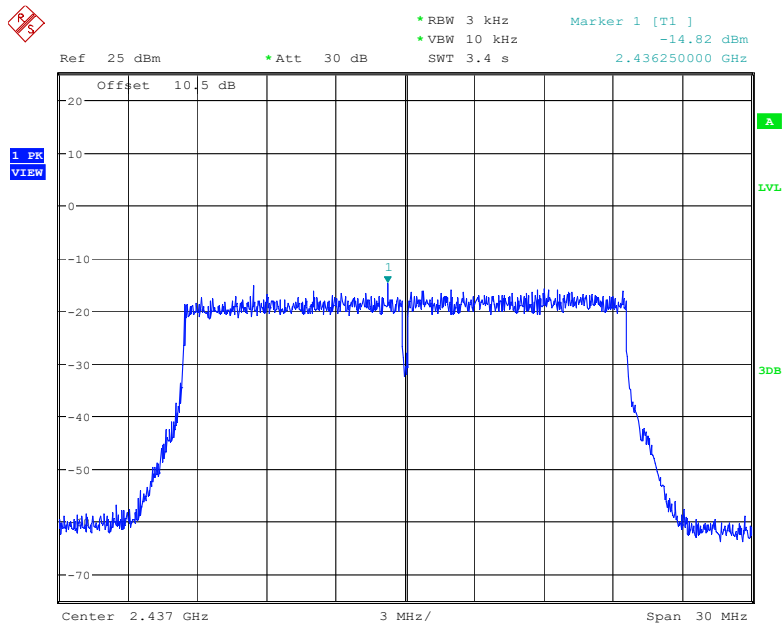

Date: 20.JUN.2022 22:08:07


RU242_61, High Channel

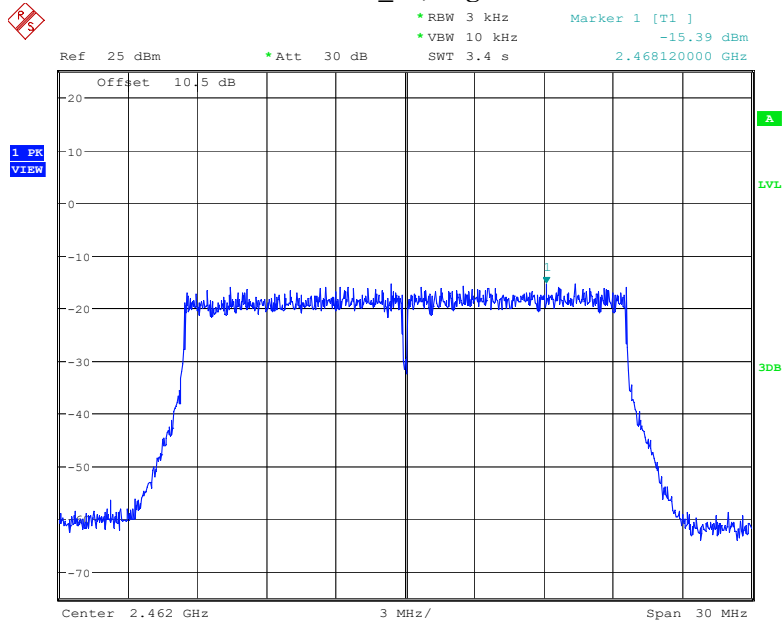

Date: 20.JUN.2022 22:10:02

Appendix E: Band edge measurements

Test Graphs

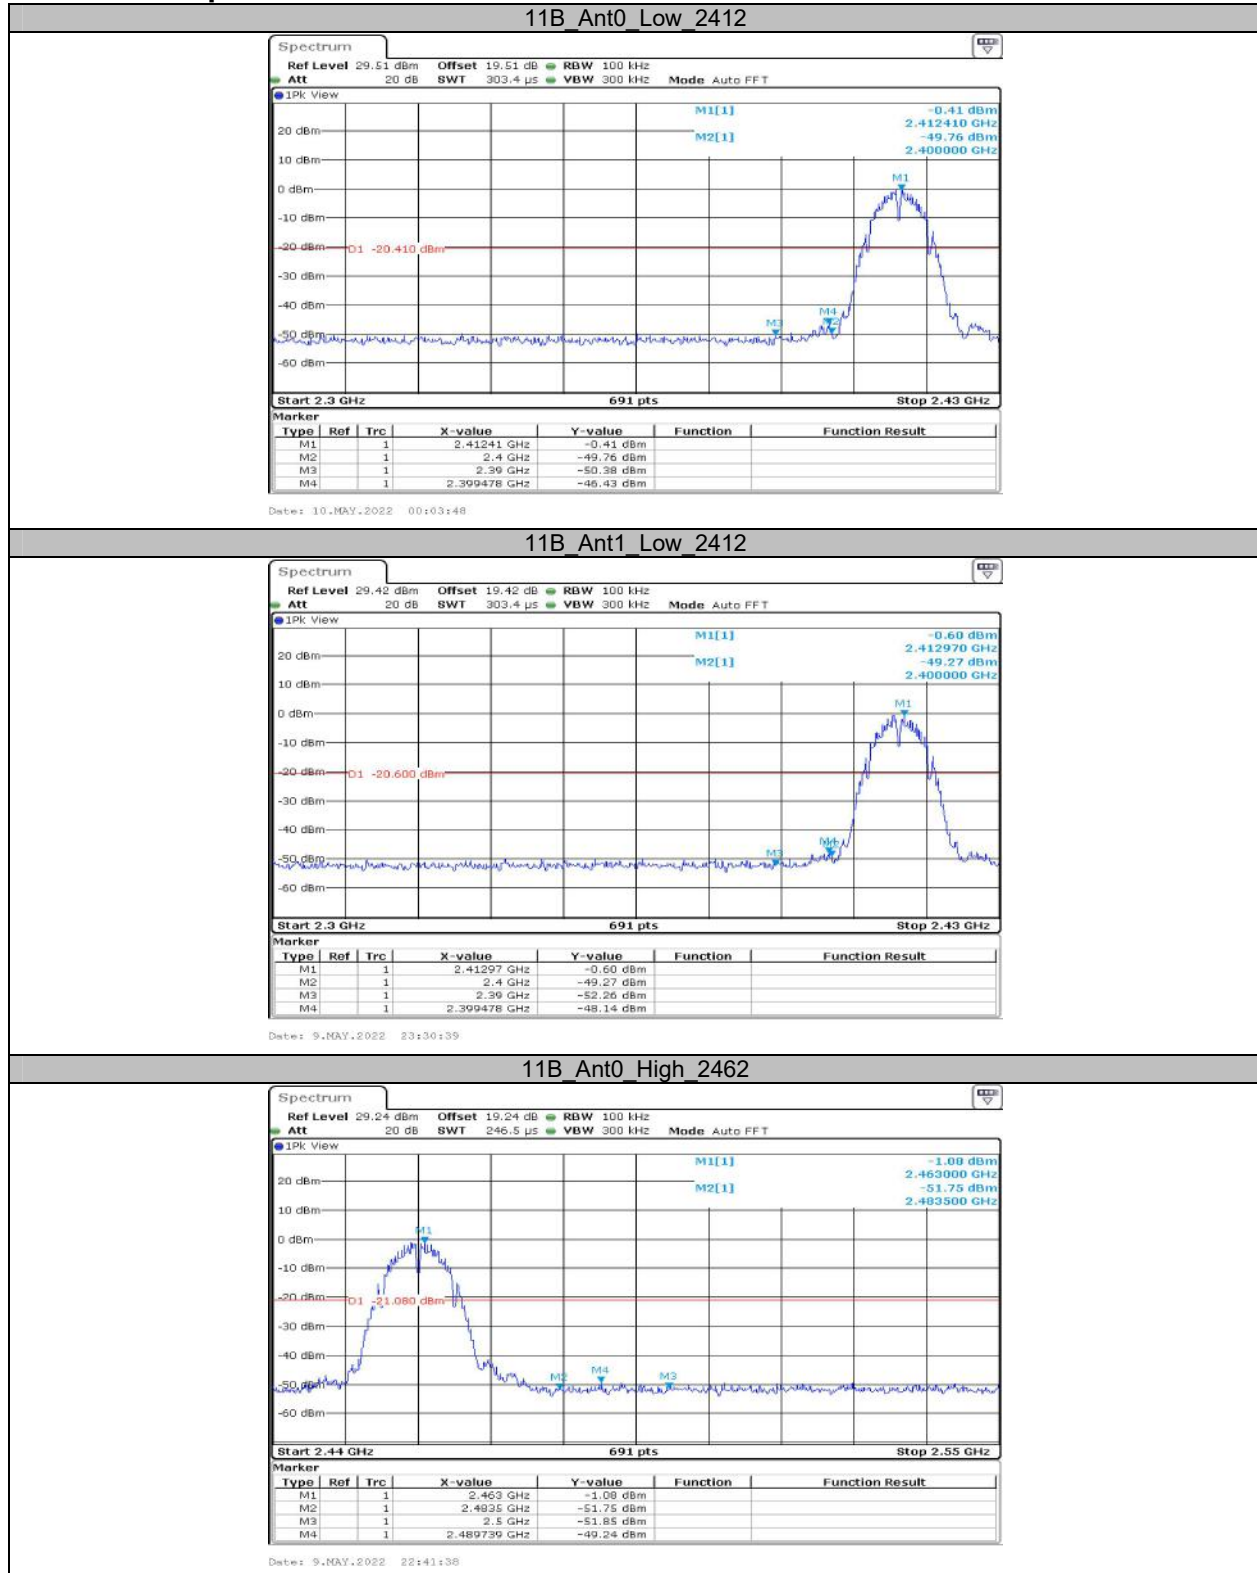


11B Ant1_High_2462




Date: 9.MAY.2022 23:34:14

11G Ant0_Low_2412

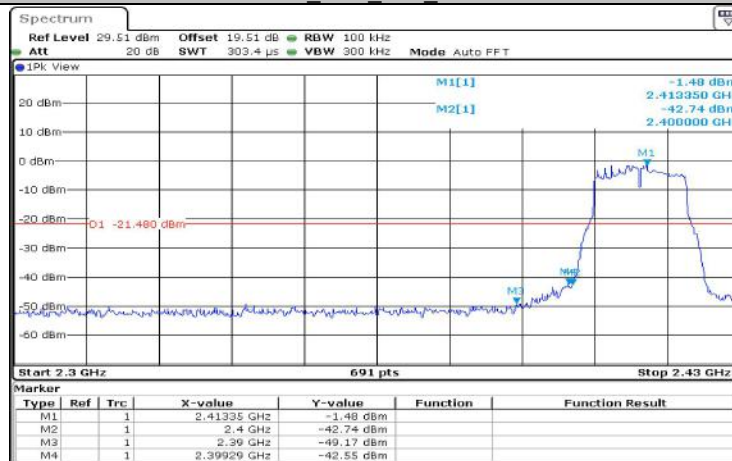

Date: 9.MAY.2022 22:44:31

11G Ant1_Low_2412

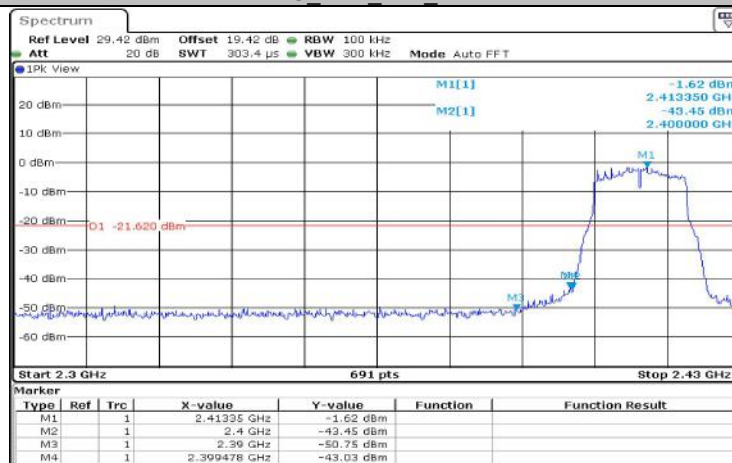


Date: 9.MAY.2022 23:36:41

11G Ant0_High_2462




Date: 9.MAY.2022 22:47:53

11G Ant1_High_2462

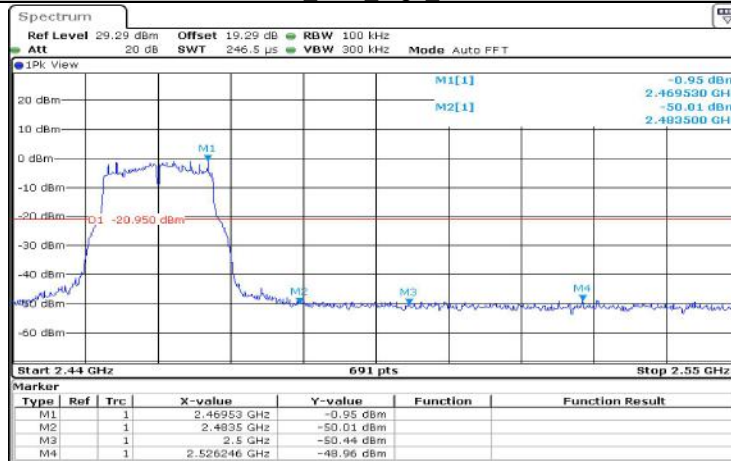


Date: 9.MAY.2022 23:40:59

11N20MIMO_Ant0_Low_2412

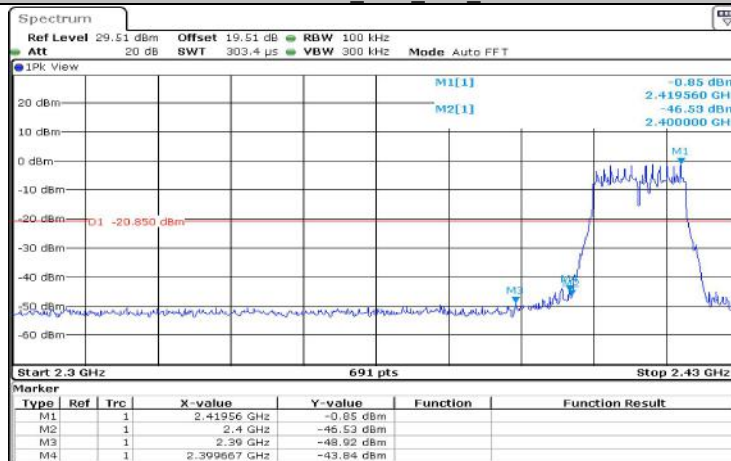


Date: 10.MAY.2022 00:13:00

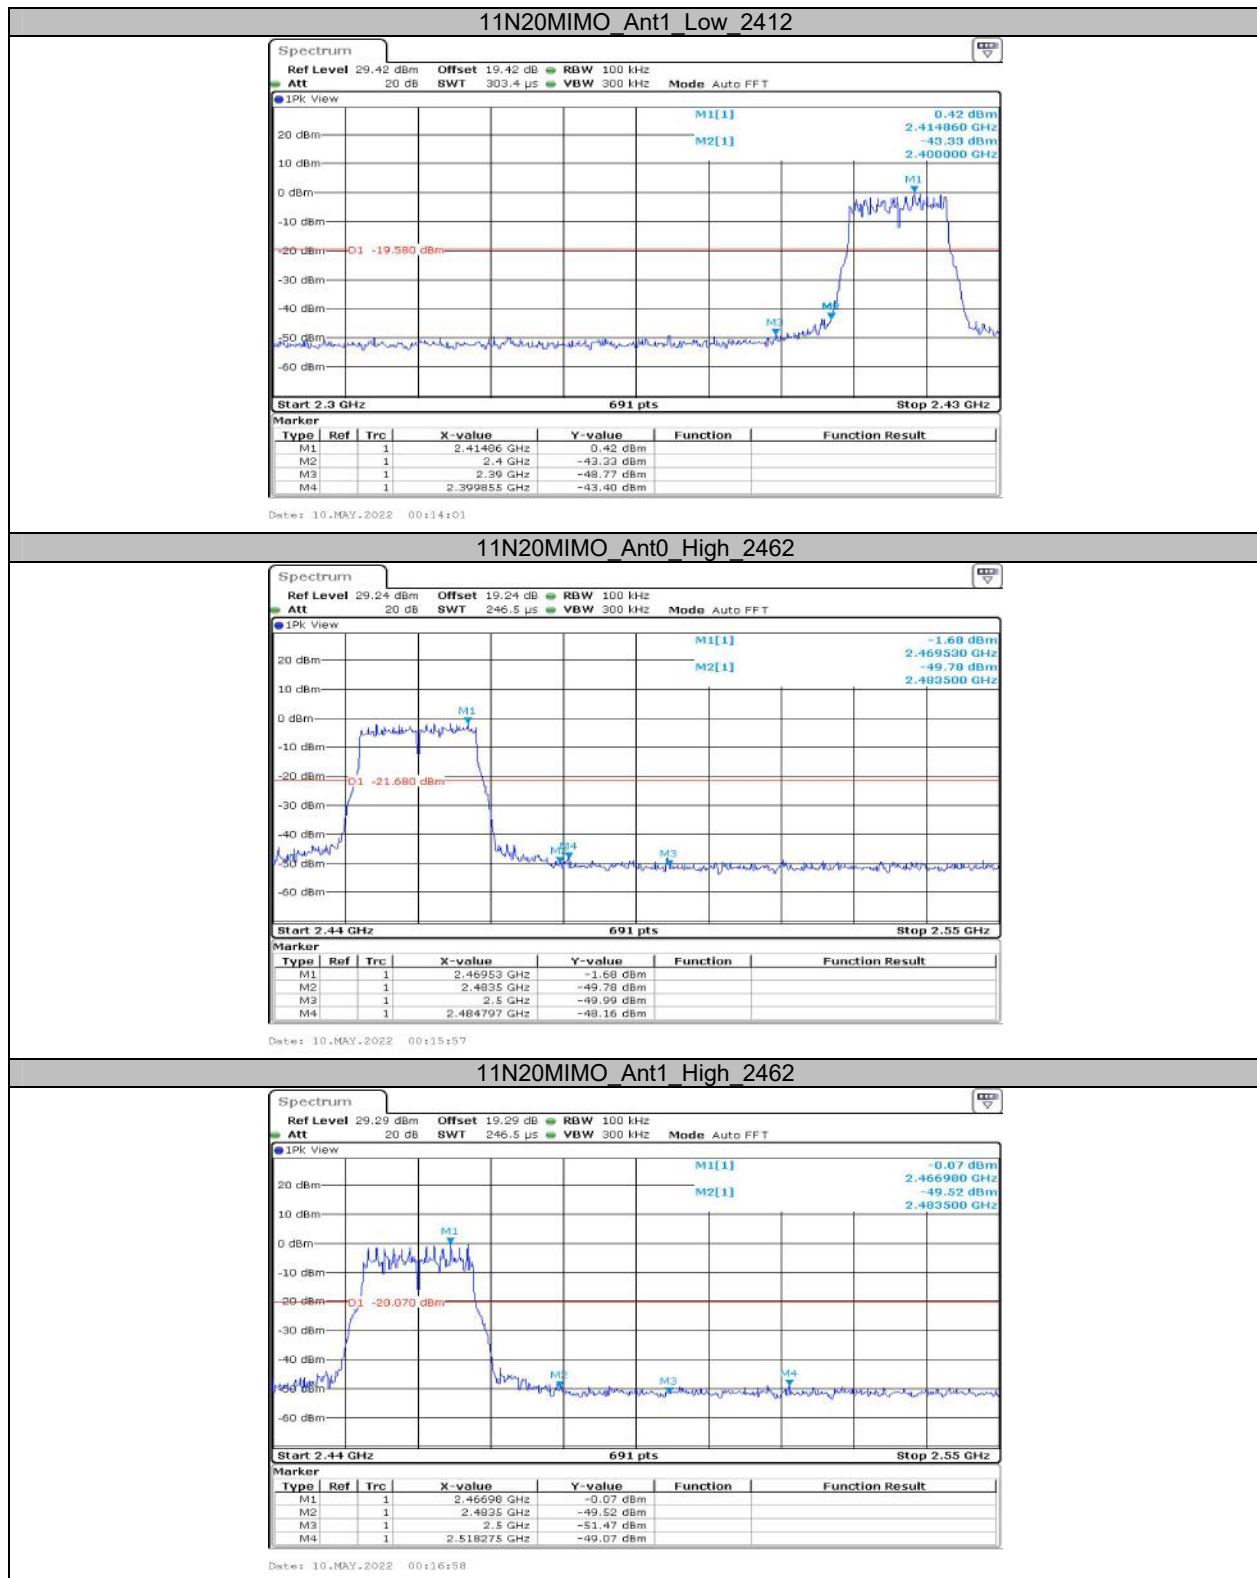


802.11AX mode

Antenna 0:

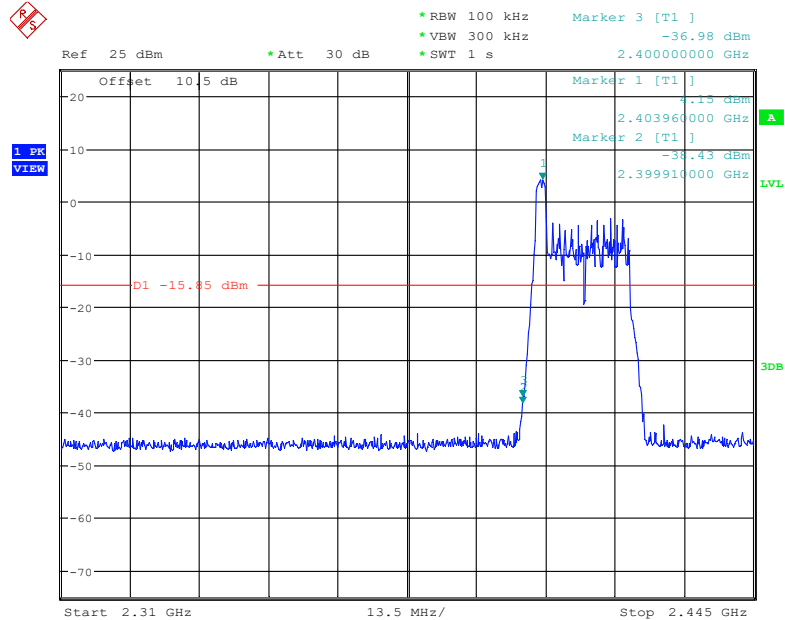
RU26_0, 2412MHz

Date: 27.JUL.2022 09:35:11

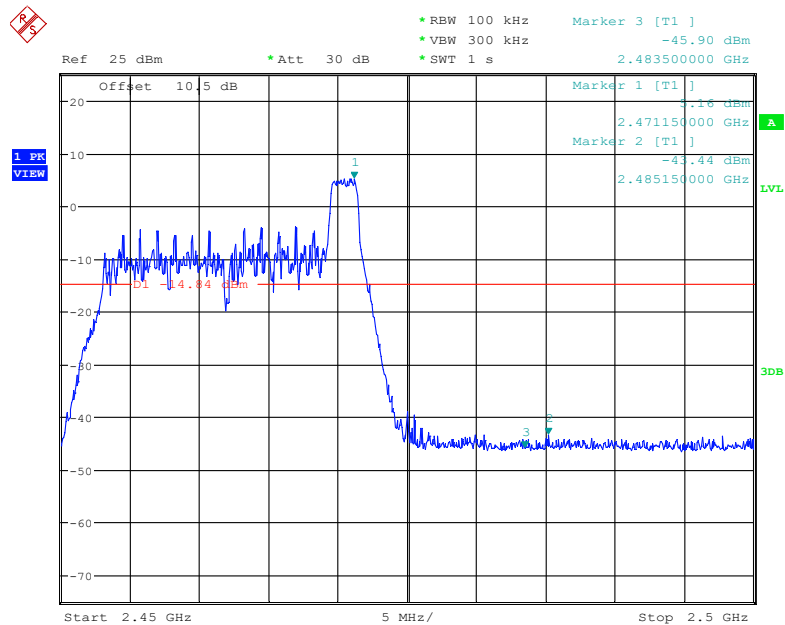RU26_8, 2462MHz


Date: 27.JUL.2022 09:39:22

RU52_37, 2412MHz

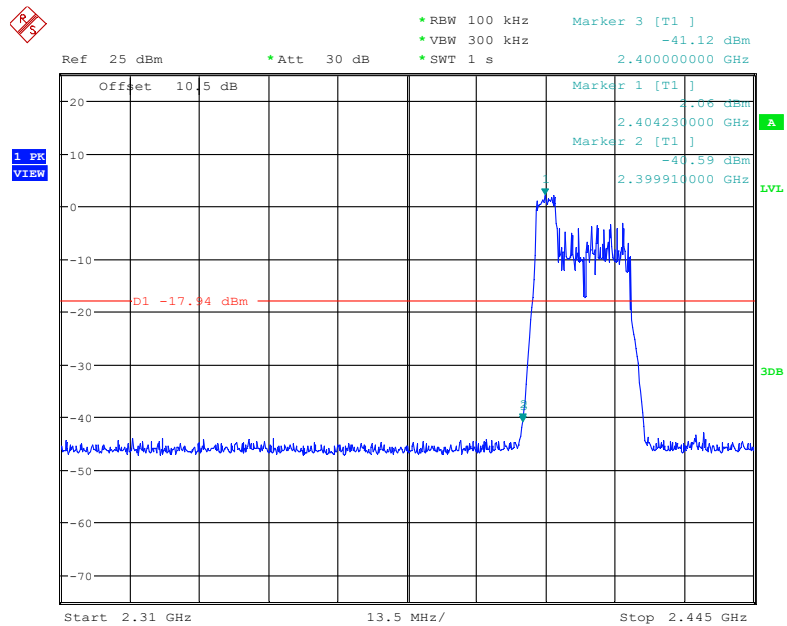


Date: 27.JUL.2022 09:42:44

RU52_40, 2462MHz

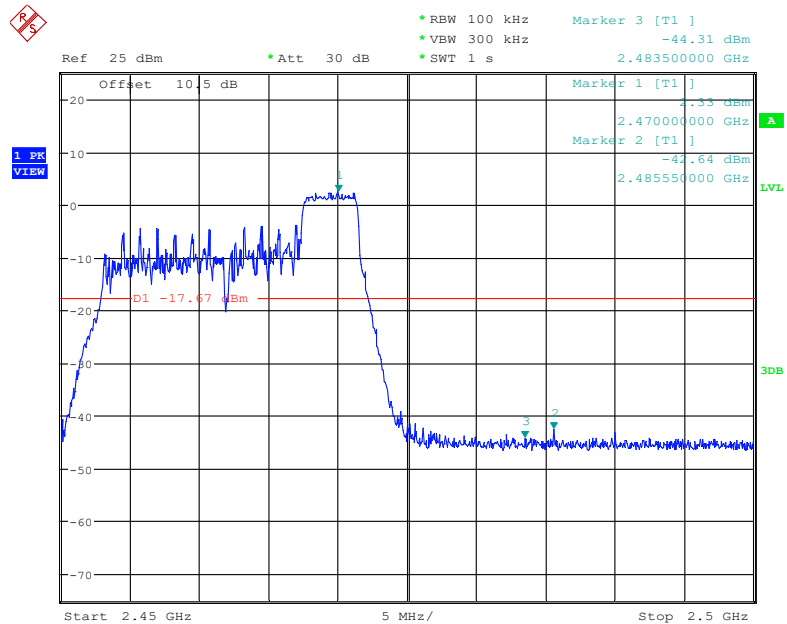


Date: 27.JUL.2022 09:45:42

RU106_53, 2412MHz

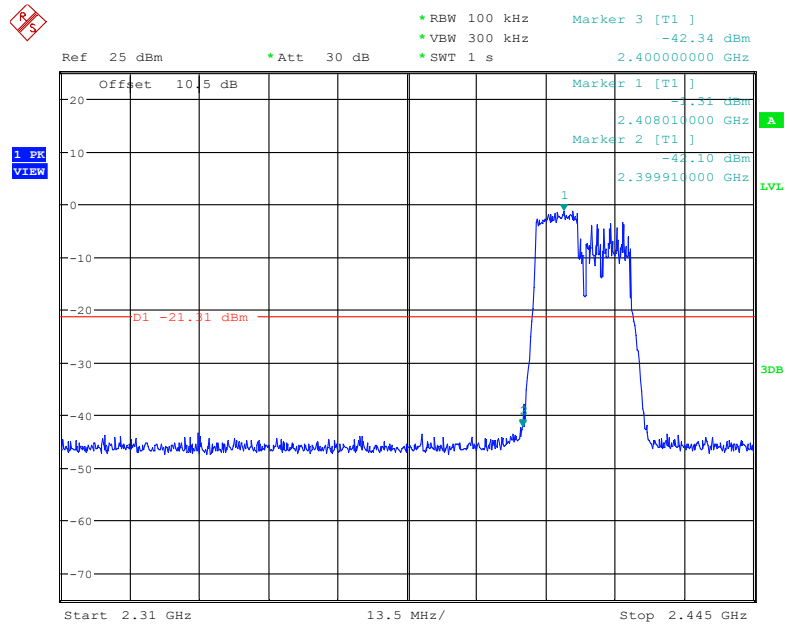


Date: 27.JUL.2022 09:48:21

RU106_54, 2462MHz

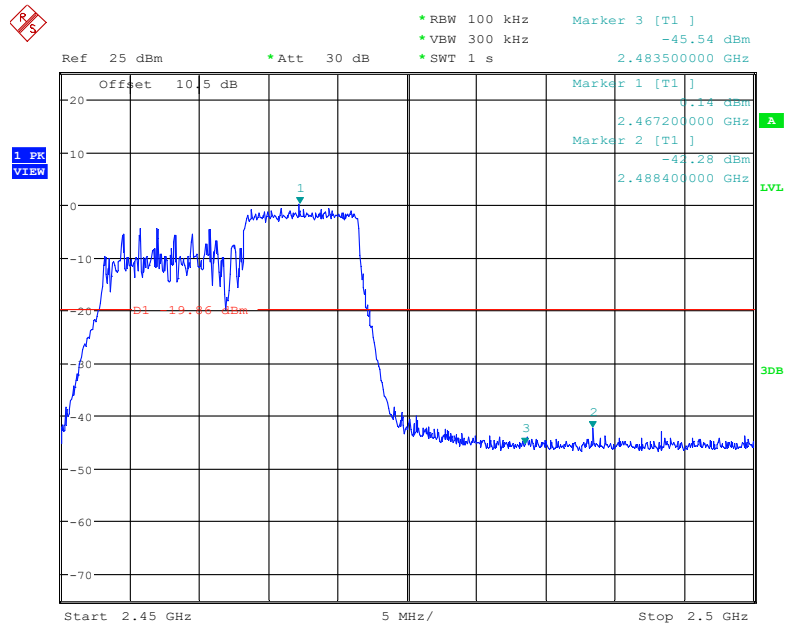


Date: 27.JUL.2022 09:49:54

RU242_61, 2412MHz

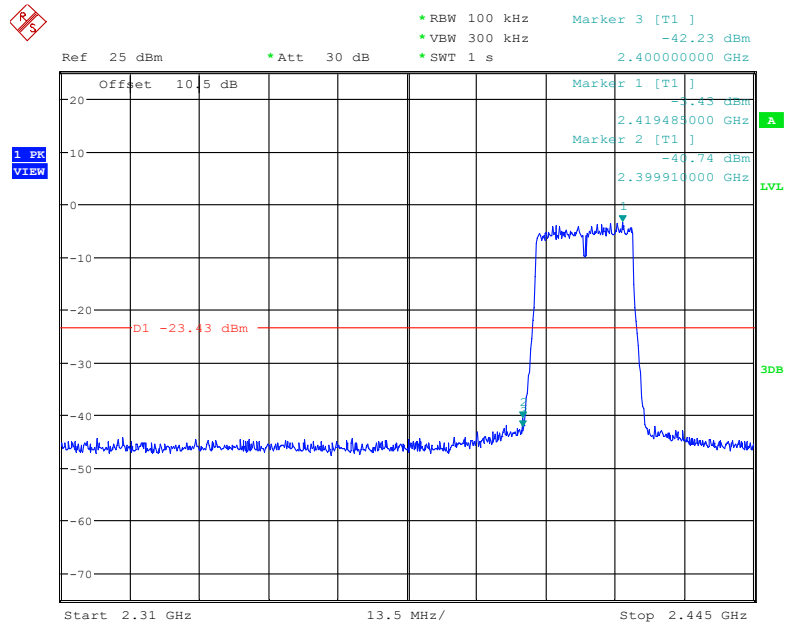

Date: 27.JUL.2022 09:51:40


RU242_61, 2462MHz

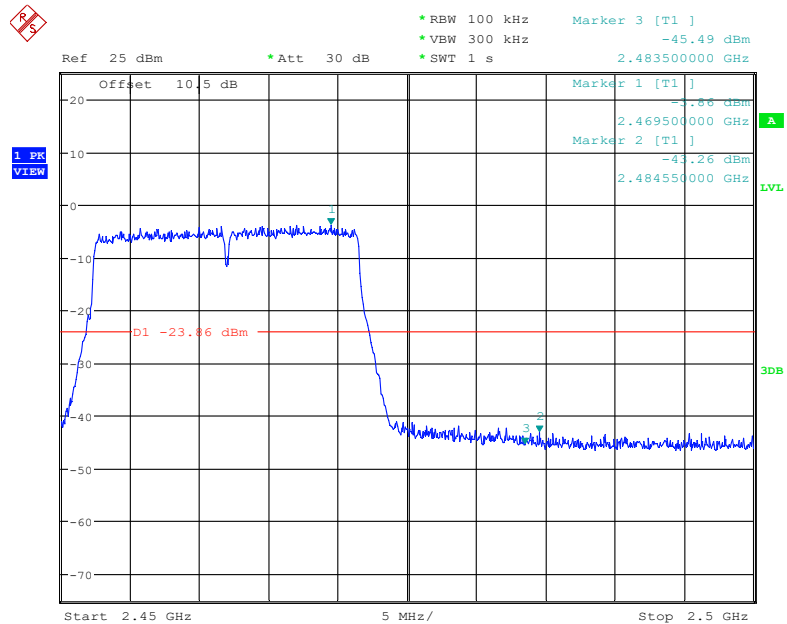

Date: 27.JUL.2022 09:53:26


Antenna 1:

RU26_0, 2412MHz

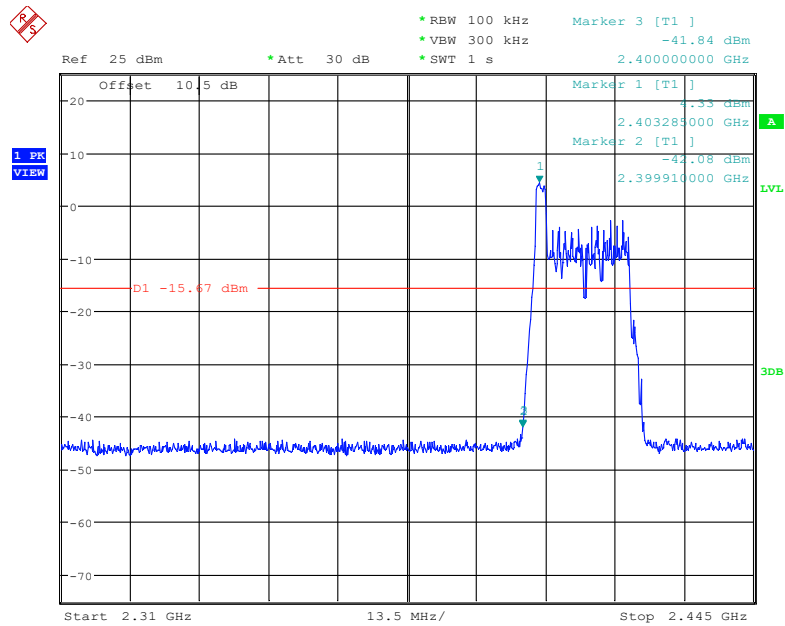


Date: 27.JUL.2022 10:12:26

RU26_8, 2462MHz

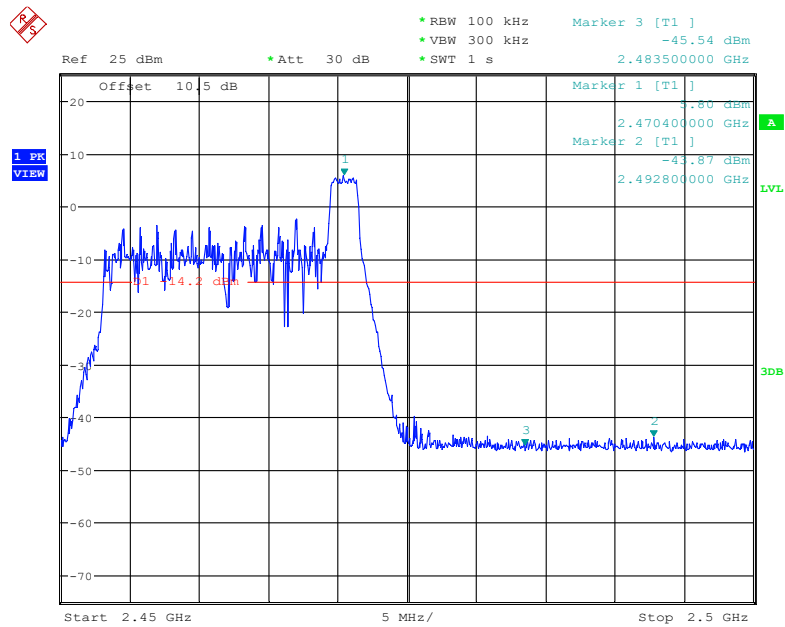


Date: 27.JUL.2022 10:11:01

RU52_37, 2412MHz

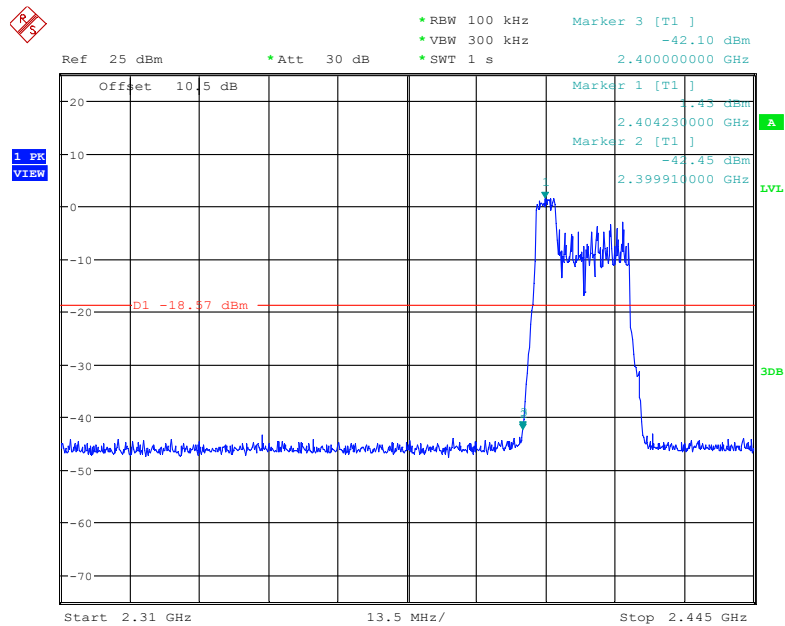


Date: 27.JUL.2022 10:09:16

RU52_40, 2462MHz

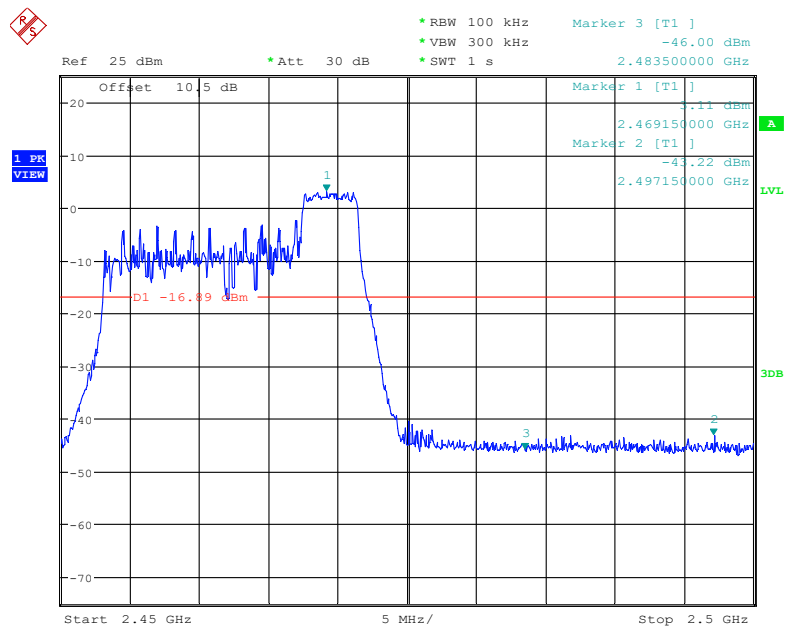


Date: 27.JUL.2022 10:07:48

RU106_53, 2412MHz

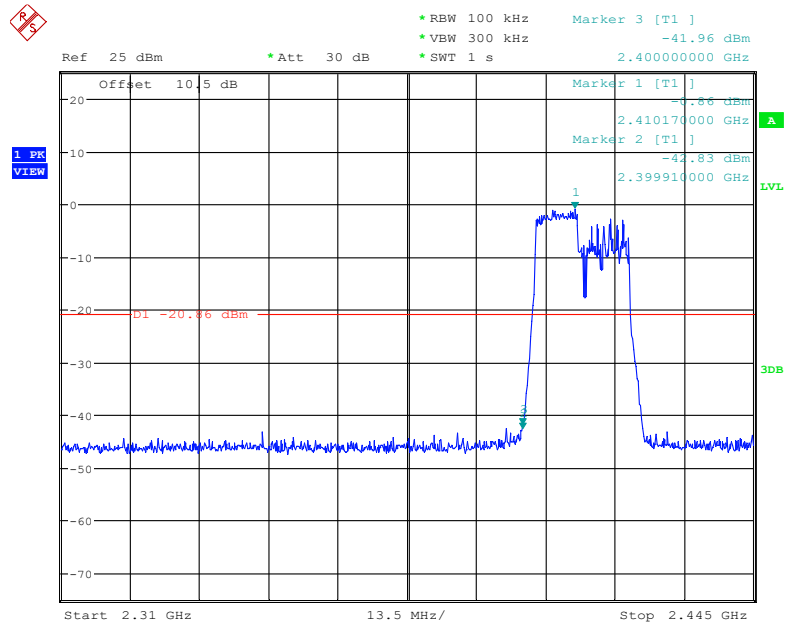


Date: 27.JUL.2022 10:04:29

RU106_54, 2462MHz

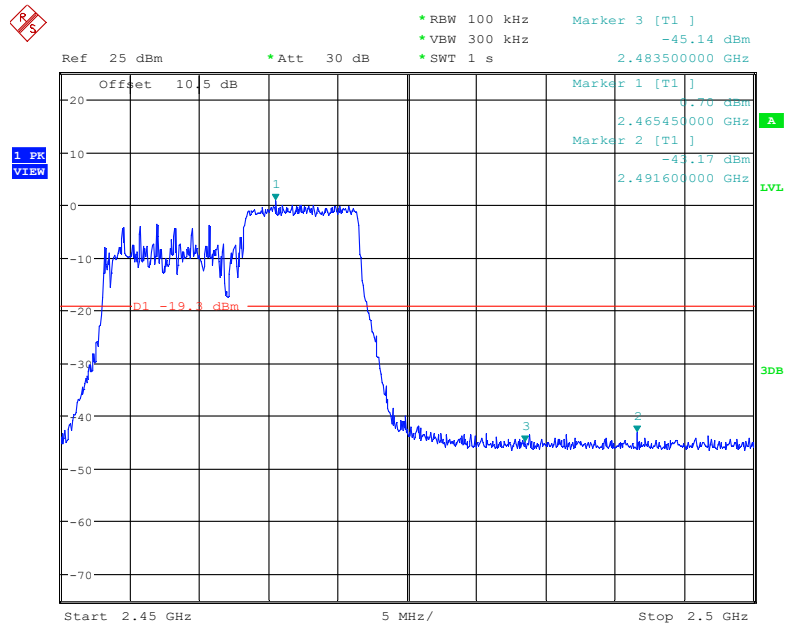


Date: 27.JUL.2022 10:02:46

RU242_61, 2412MHz

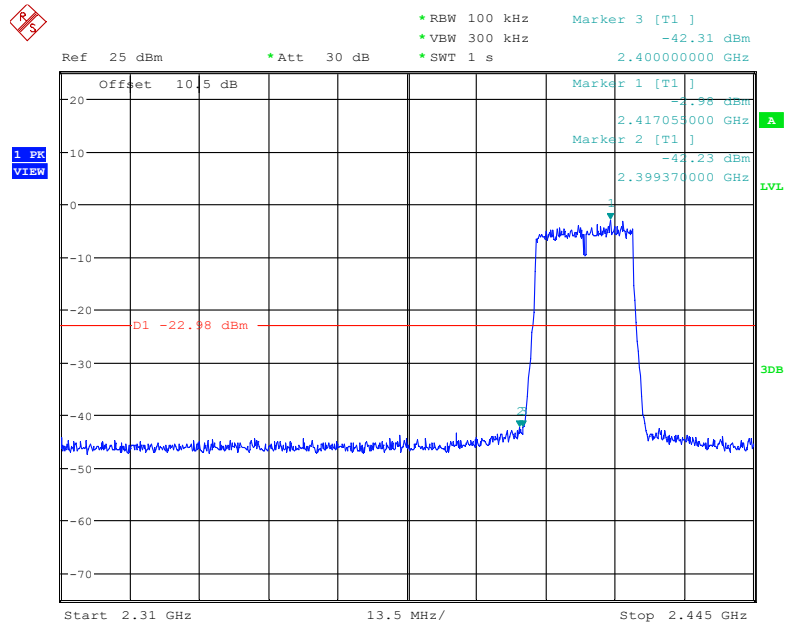

Date: 27.JUL.2022 10:00:52

RU242_61, 2462MHz

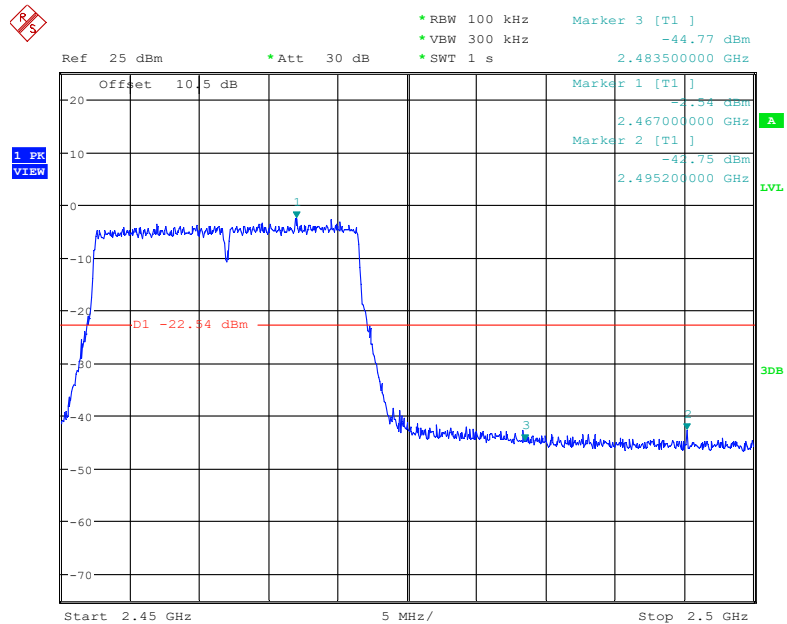


Date: 27.JUL.2022 09:59:28

Appendix F1: Duty Cycle

Test Mode	Antenna	Channel	TransmissionDuration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant0	2437	8.41	8.50	98.94
11G	Ant0	2437	1.39	1.49	93.29
11N20MIMO	Ant0	2437	0.16	0.26	61.54


Mode	channel	Ton (ms)	Ton+off (ms)	Duty Cycle (%)
AX20 RU26_0	2437	5.173077	5.245192	98.63
AX20 RU52_37	2437	2.612500	2.675000	97.66
AX20 RU106_53	2437	0.320000	0.480000	66.67
AX20 RU242_61	2437	3.962500	4.975000	79.65

11B_Ant0_2437

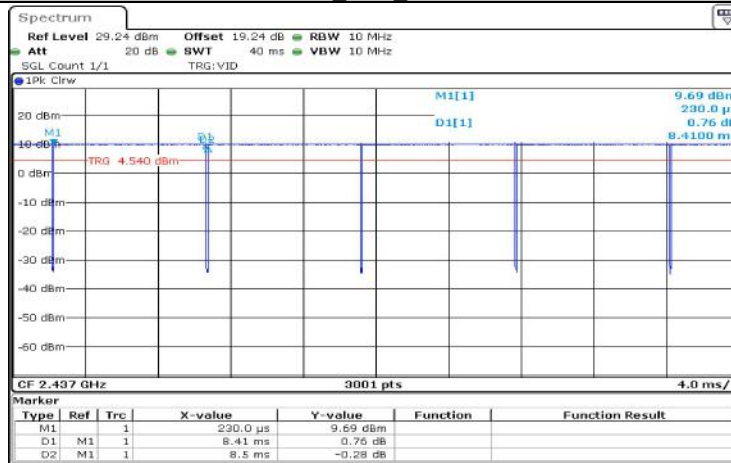


Date: 9.MAY.2022 22:53:12

11G_Ant0_2437

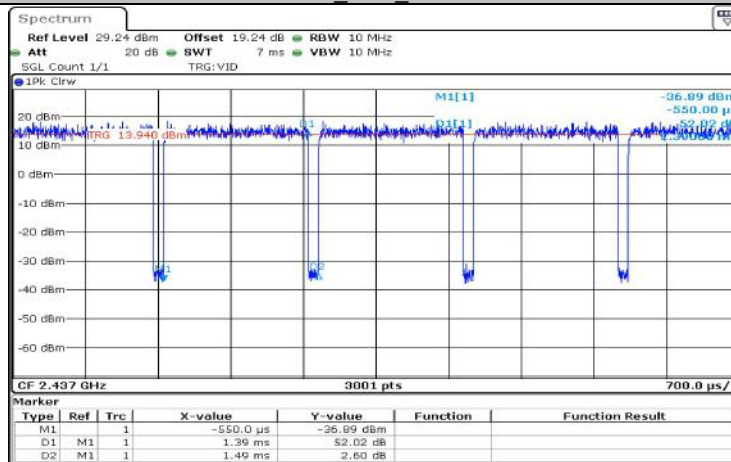


Date: 9.MAY.2022 22:45:19

11N20MIMO_Ant0_2437

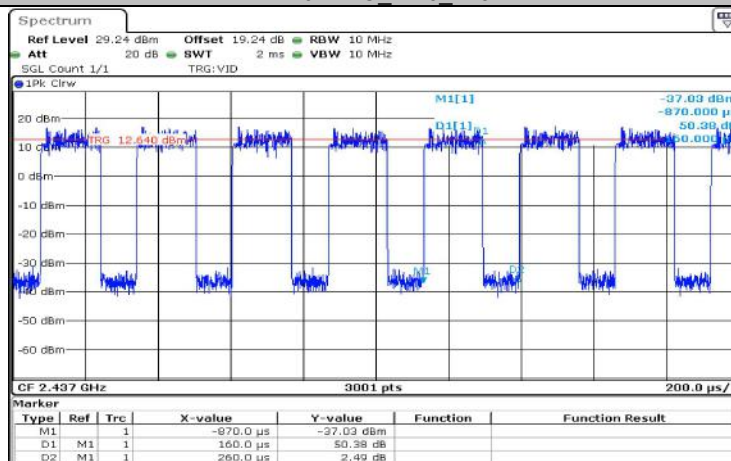


Date: 10.MAY.2022 00:08:40

RU26_0, 2437MHz

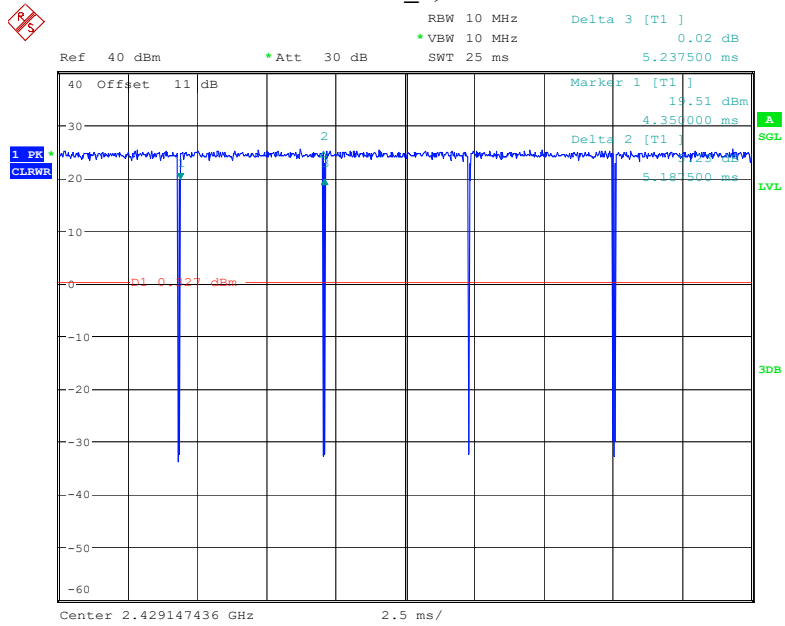


Date: 21.JUN.2022 19:16:46

RU52_37, 2437MHz

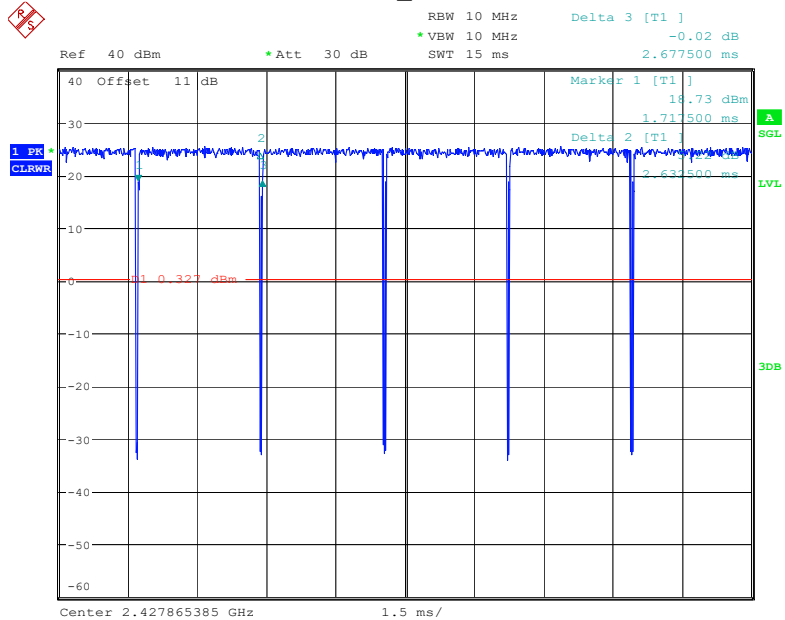


Date: 21.JUN.2022 19:19:19

RU106_53, 2437MHz

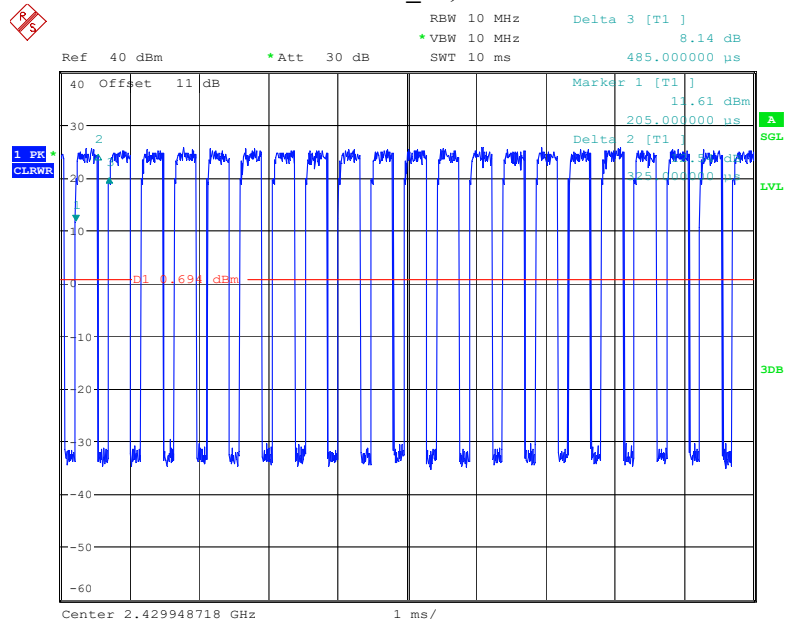

Date: 21.JUN.2022 19:20:38

RU242_61, 2437MHz

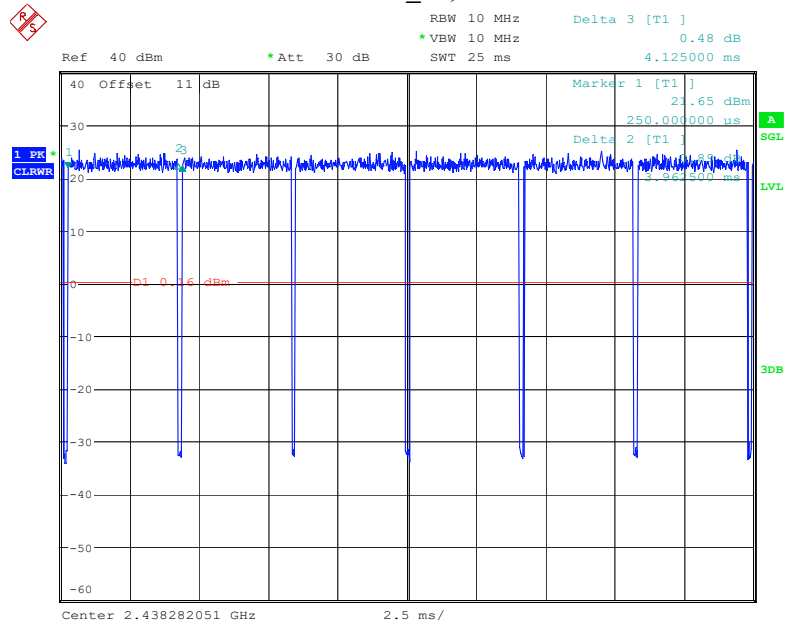

Date: 21.JUN.2022 19:21:35

APPENDIX BLE

Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.68	0.5	PASS
		2440	0.68	0.5	PASS
		2480	0.69	0.5	PASS
BLE_2M	Ant1	2402	1.24	0.5	PASS
		2440	1.24	0.5	PASS
		2480	1.24	0.5	PASS

Test Graphs







**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.047	2401.489	2402.535	---	---
		2440	1.051	2439.481	2440.531	---	---
		2480	1.047	2479.477	2480.523	---	---
BLE_2M	Ant1	2402	2.062	2400.989	2403.051	---	---
		2440	2.062	2438.985	2441.047	---	---
		2480	2.062	2478.977	2481.039	---	---

Test Graphs

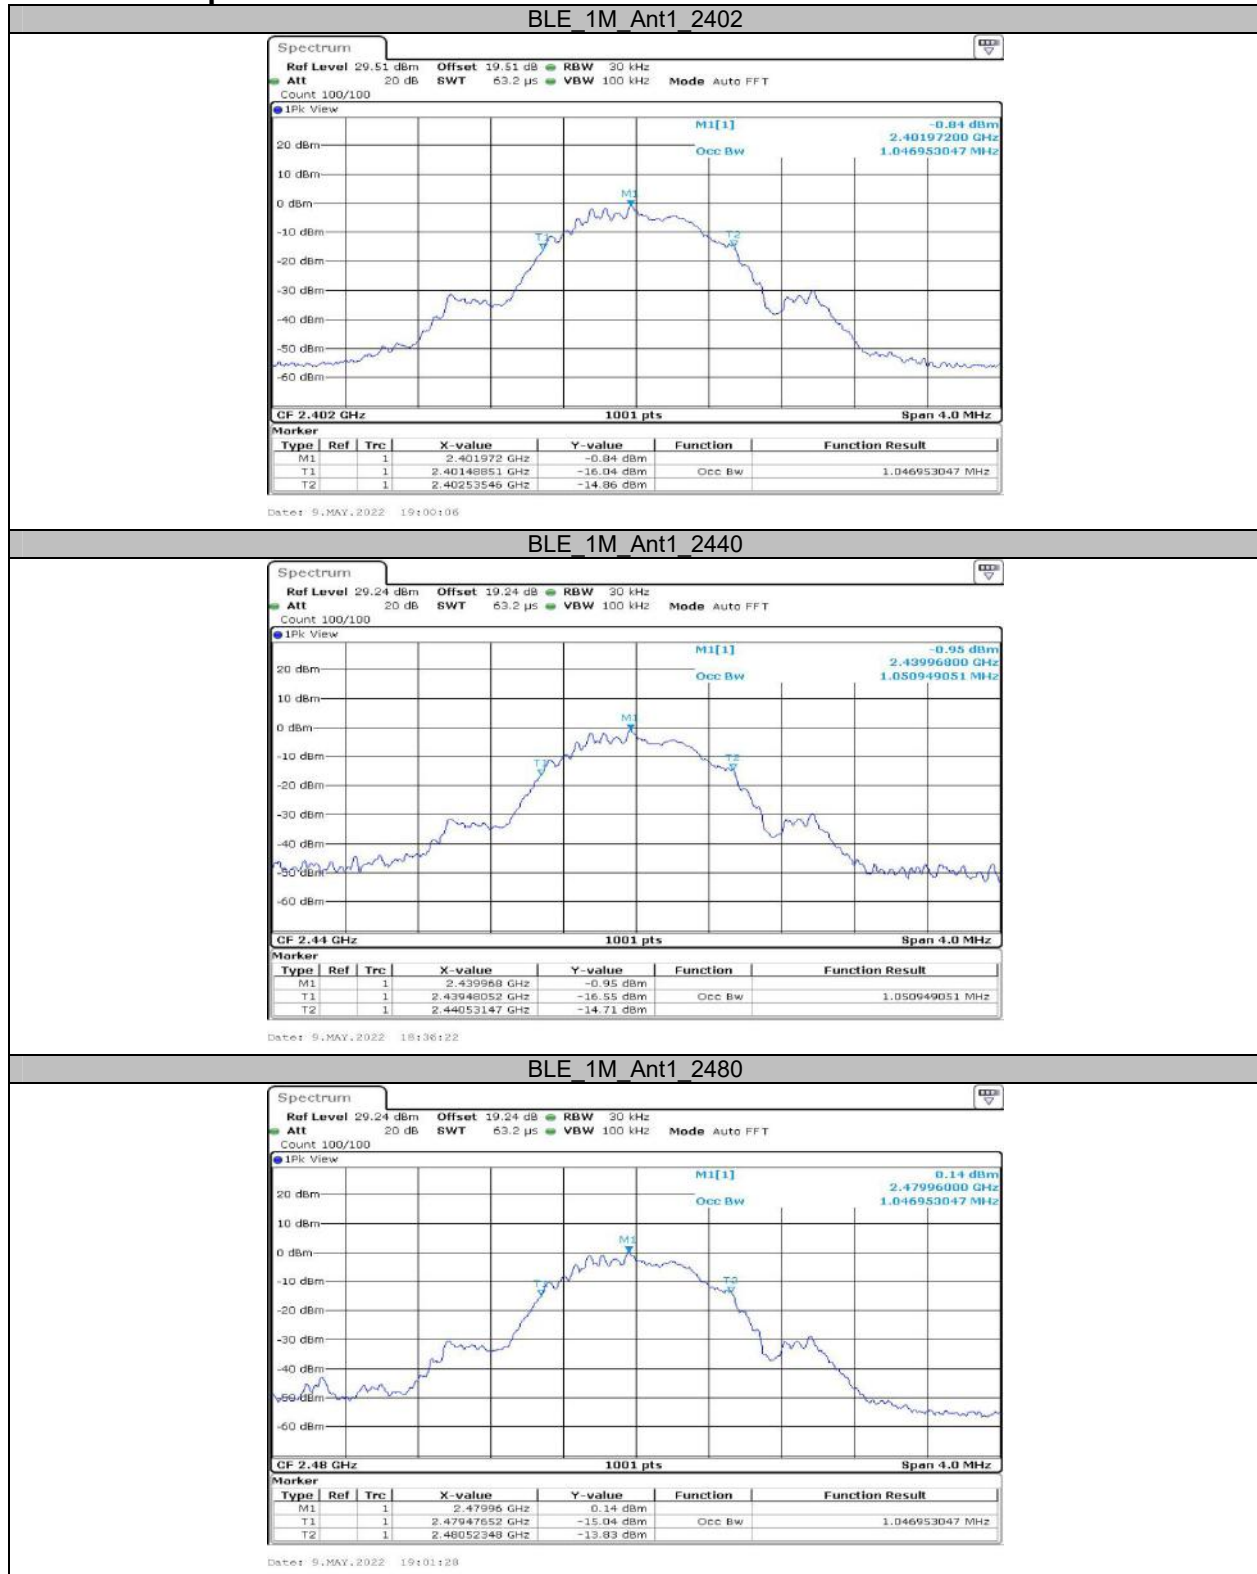

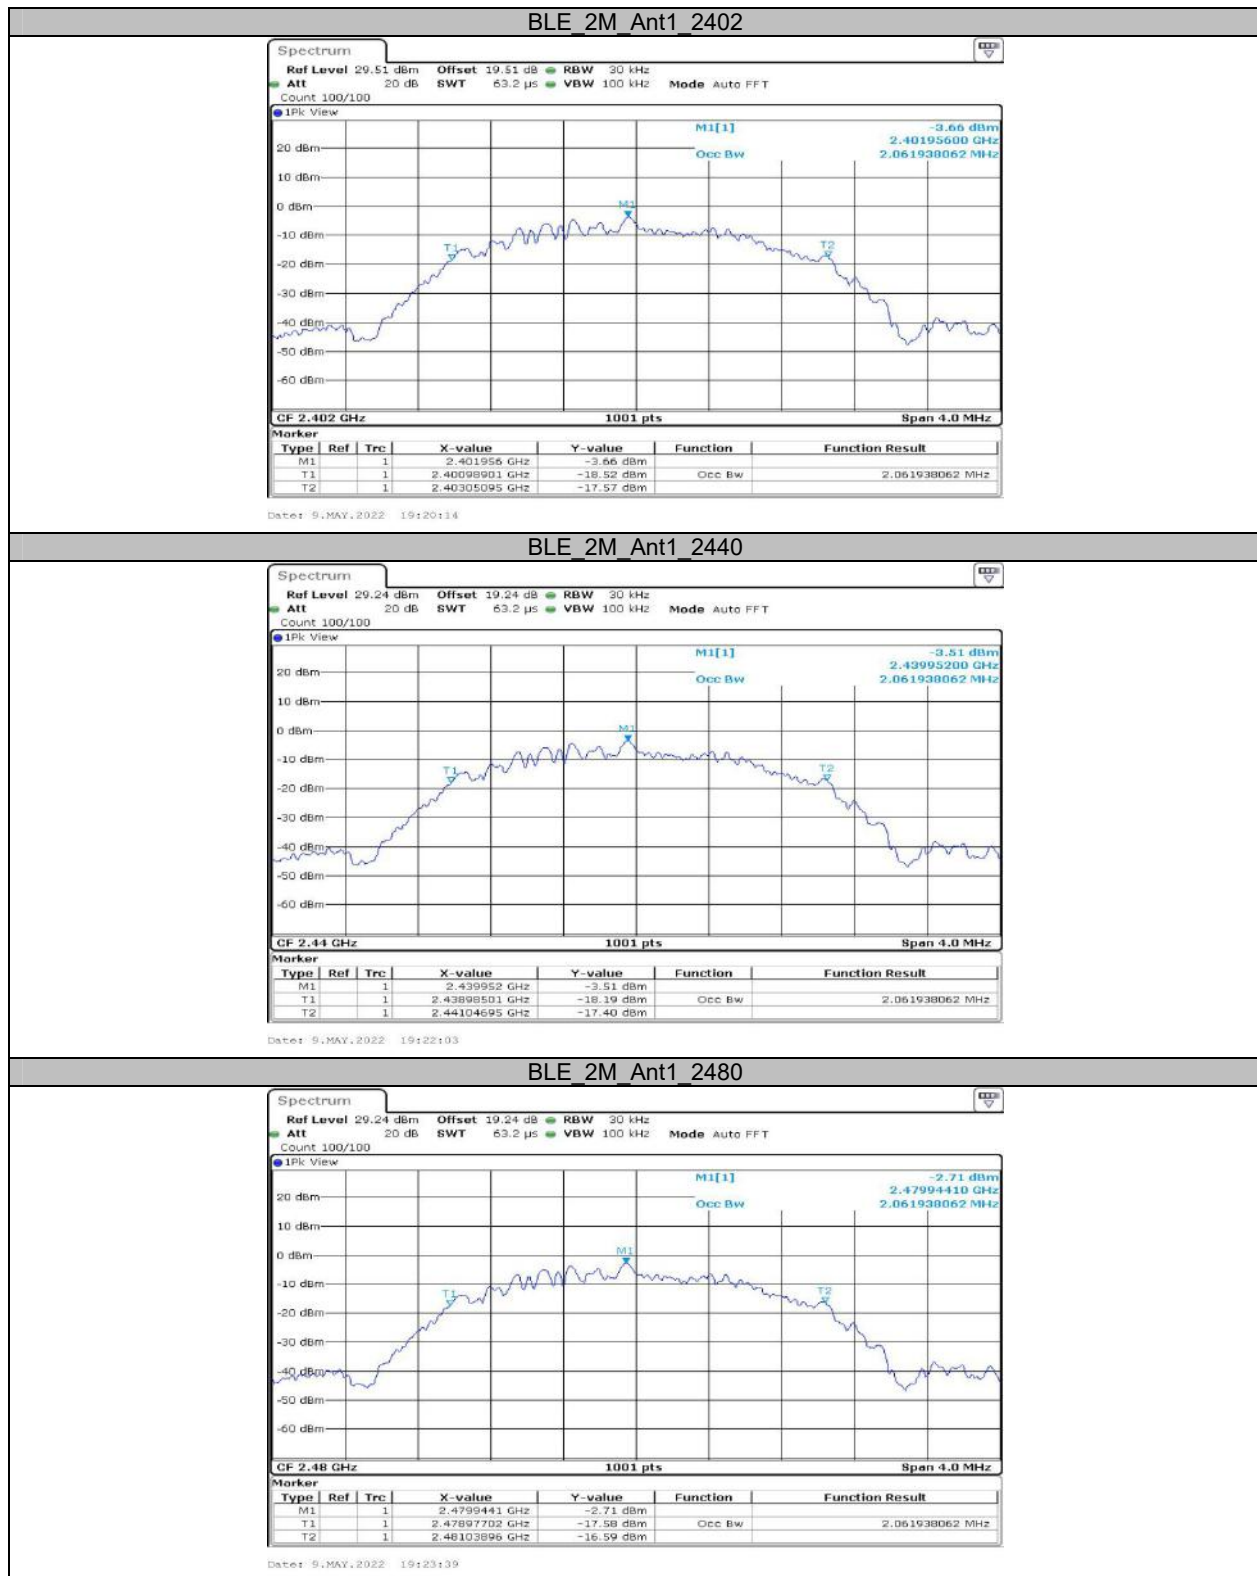


**Appendix C: Maximum conducted peak output power
Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	4.09	≤30	PASS
		2440	4.08	≤30	PASS
		2480	5.11	≤30	PASS
BLE_2M	Ant1	2402	4.13	≤30	PASS
		2440	4.35	≤30	PASS
		2480	5.09	≤30	PASS

Note: the maximum antenna gain is 4dBi, the maximum EIRP=9.11dBm<36dBm

Test Graphs

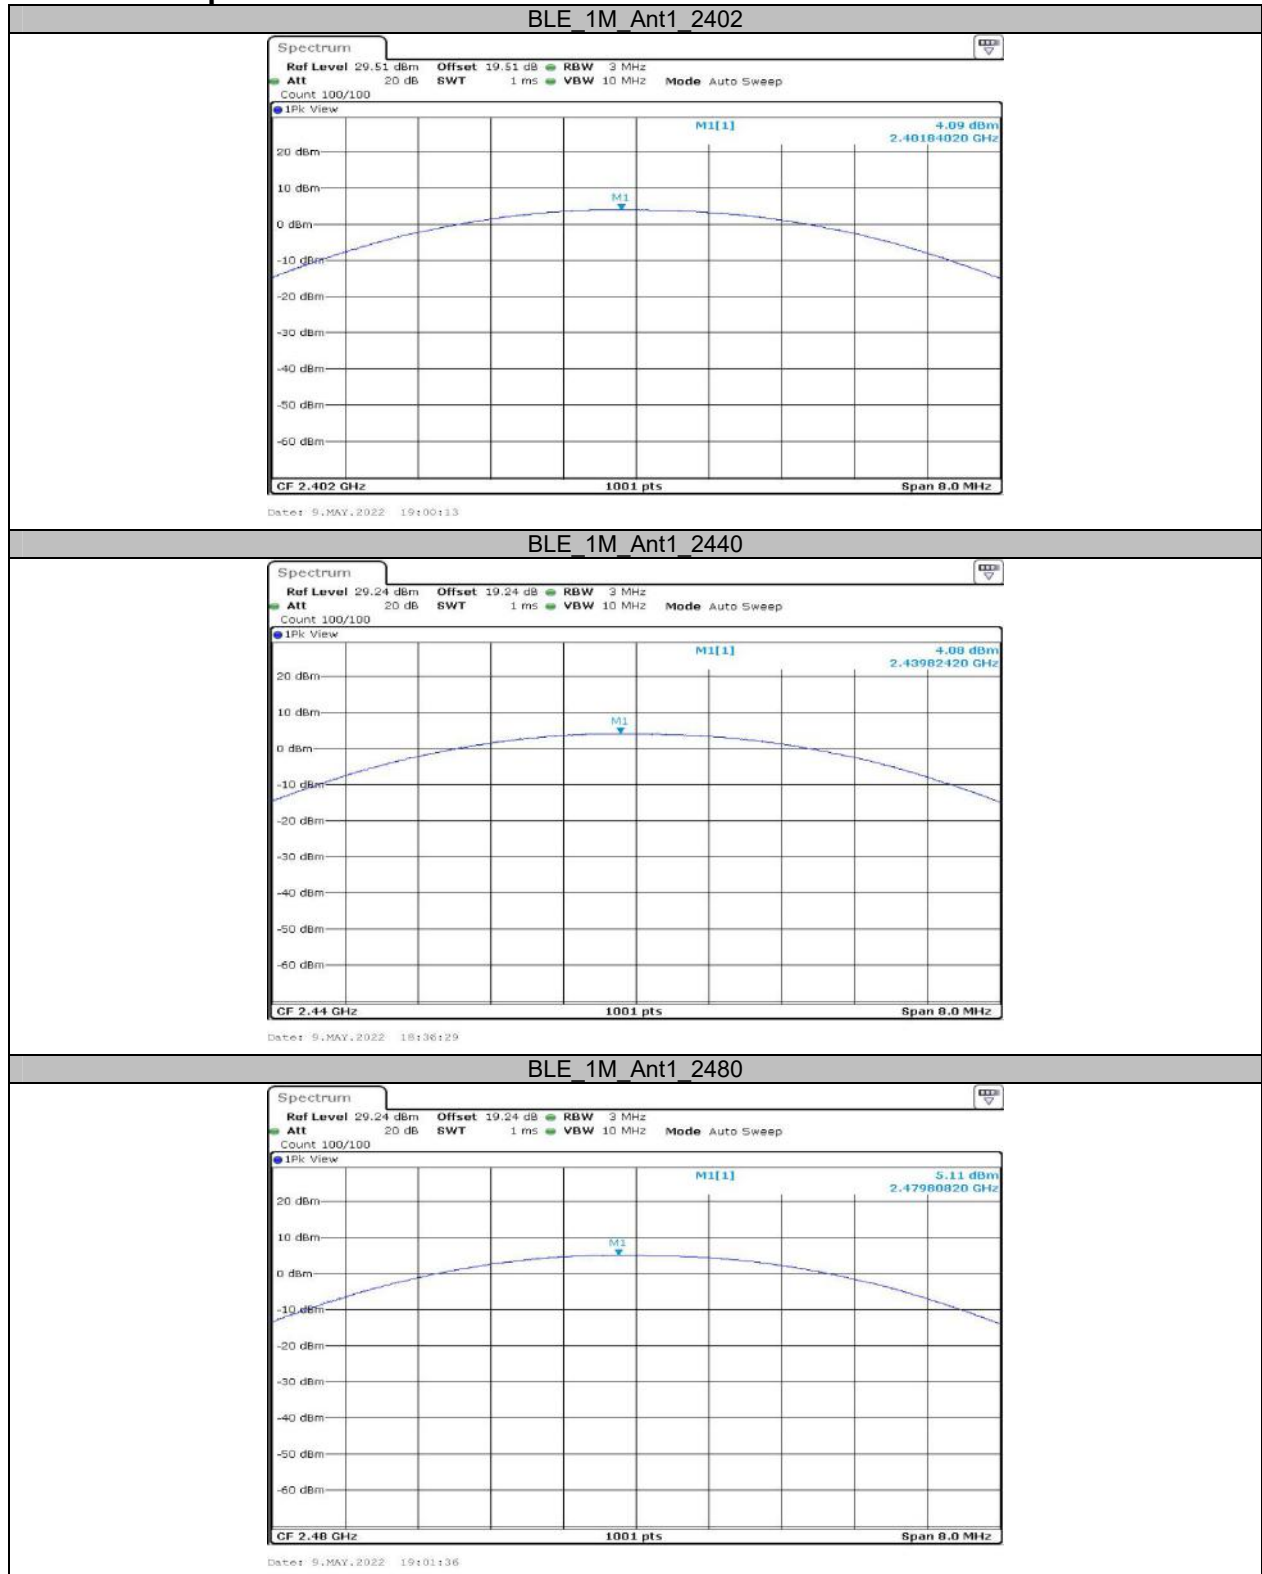

BLE_2M_Ant1_2402



Date: 9.MAY.2022 19:20:21

BLE_2M_Ant1_2440



Date: 9.MAY.2022 19:22:11

BLE_2M_Ant1_2480





Date: 9.MAY.2022 19:23:47

**Appendix D: Maximum power spectral density
Test Result**

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-12.58	≤8.00	PASS
		2440	-12.45	≤8.00	PASS
		2480	-11.44	≤8.00	PASS
BLE_2M	Ant1	2402	-14.83	≤8.00	PASS
		2440	-14.53	≤8.00	PASS
		2480	-13.77	≤8.00	PASS


Test Graphs

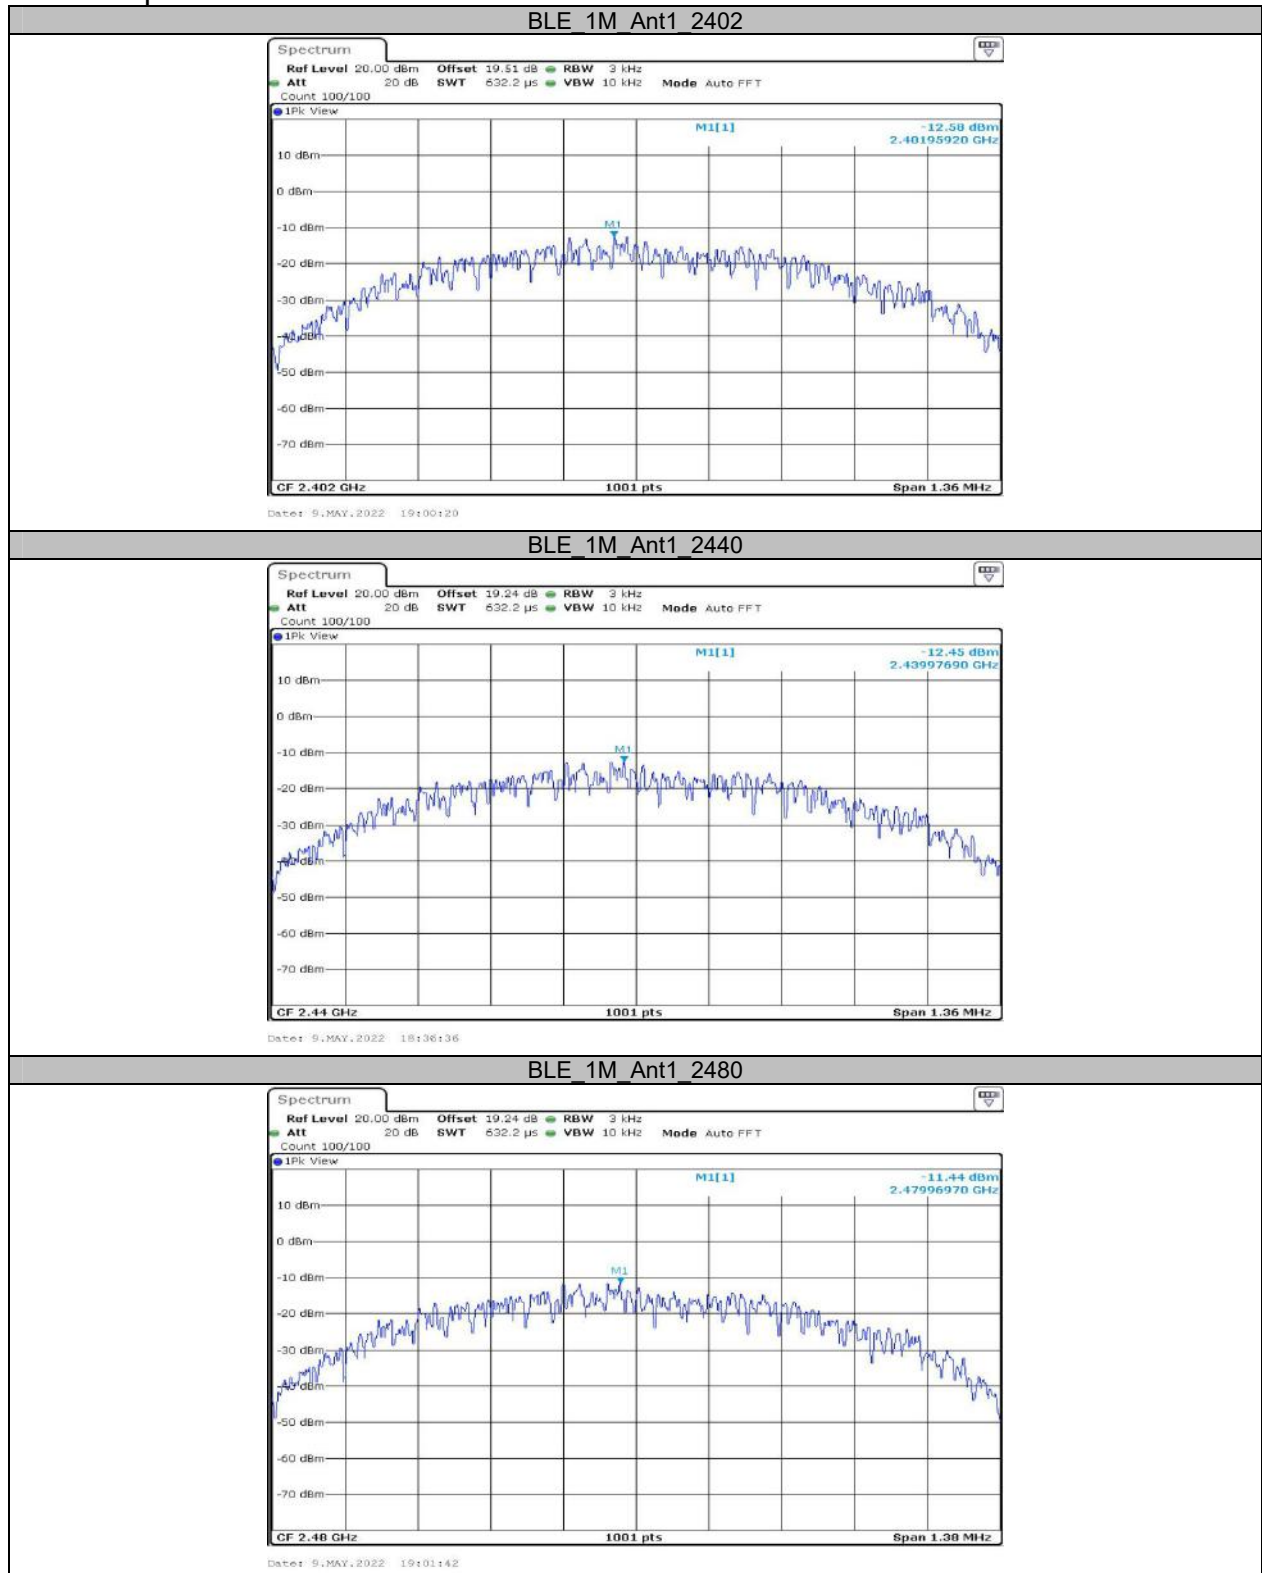


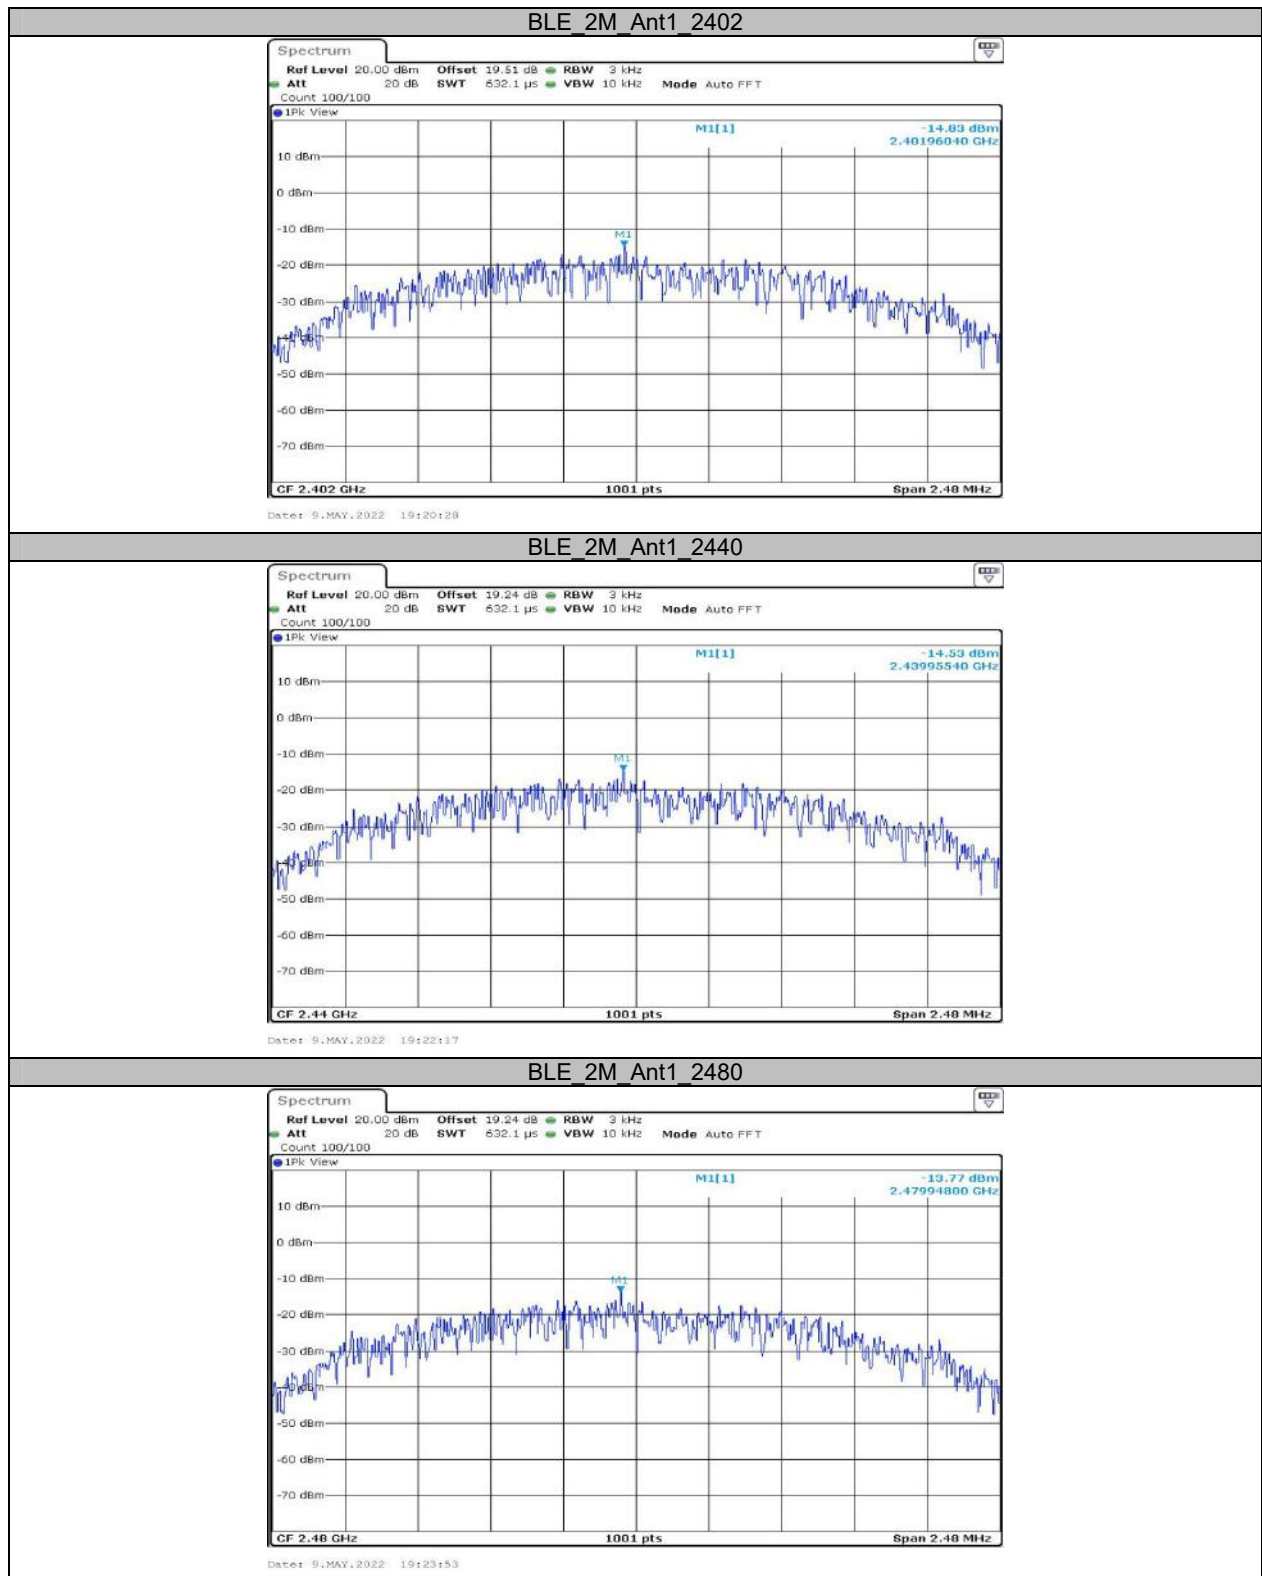

Appendix E: Band edge measurements

Test Graphs

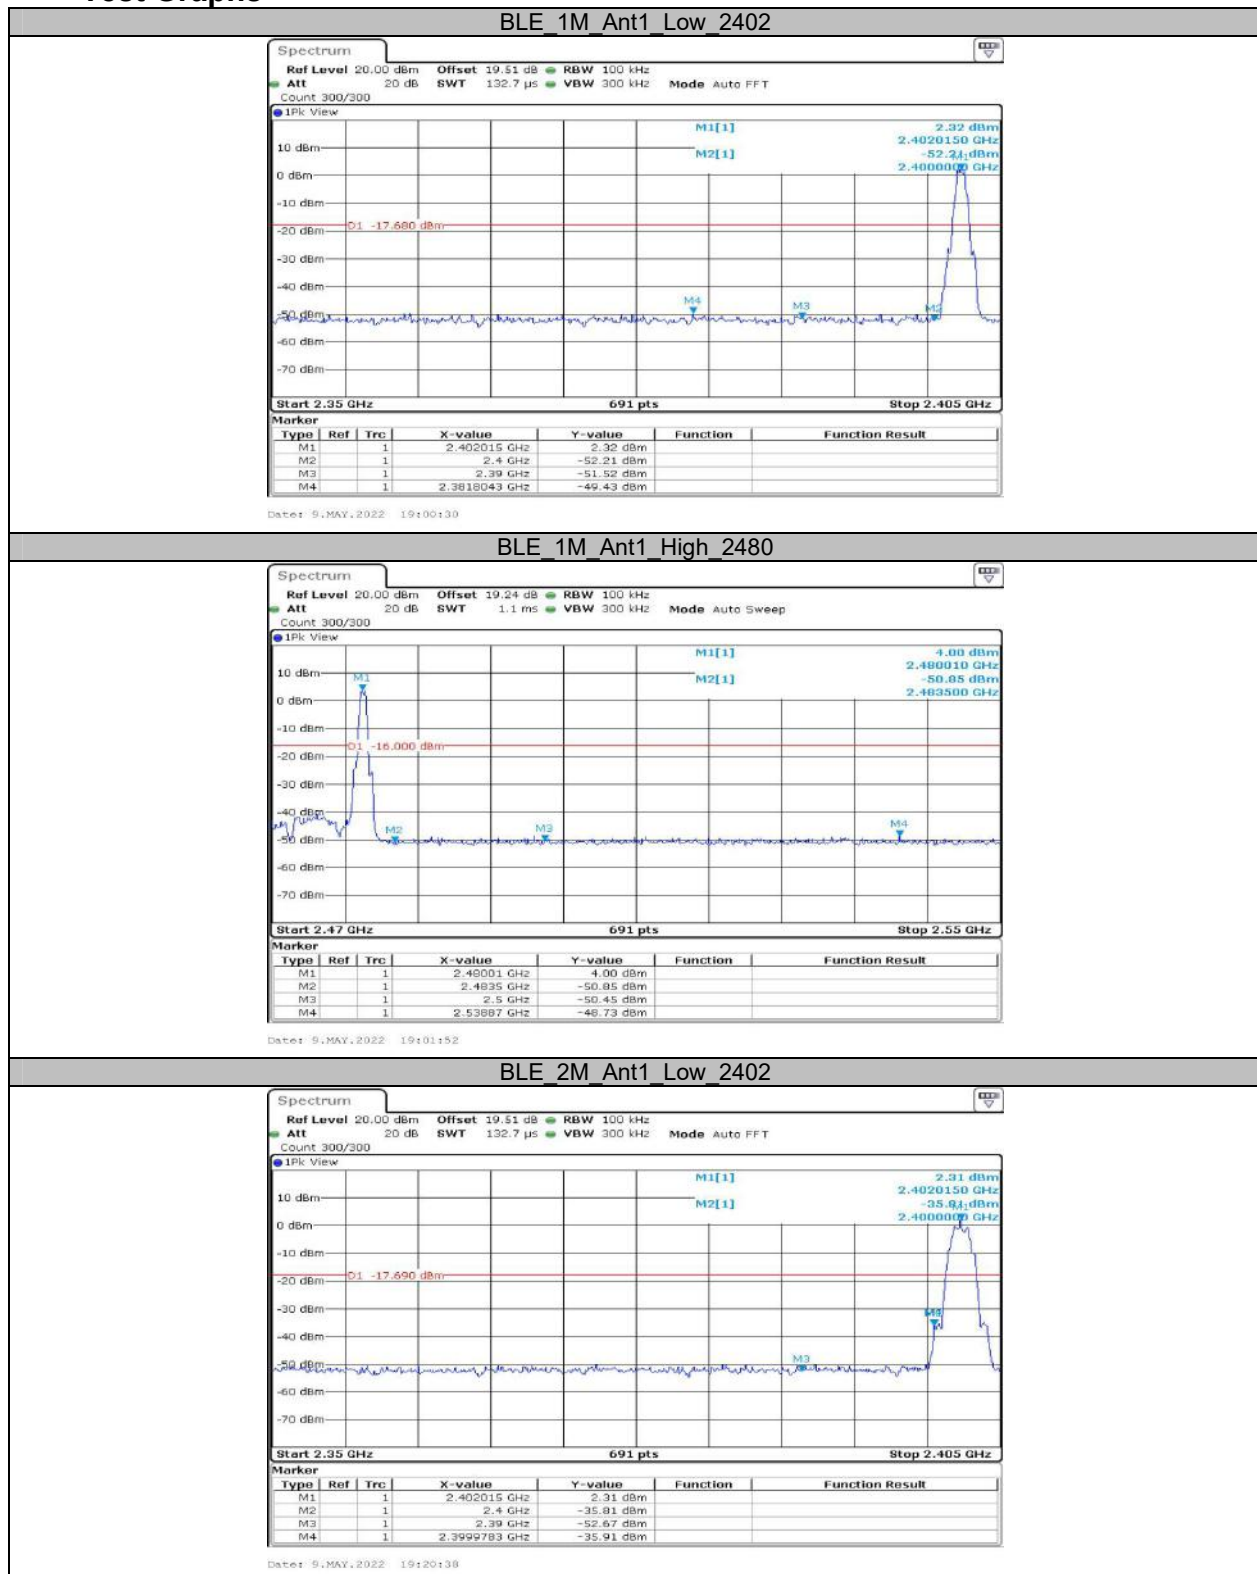

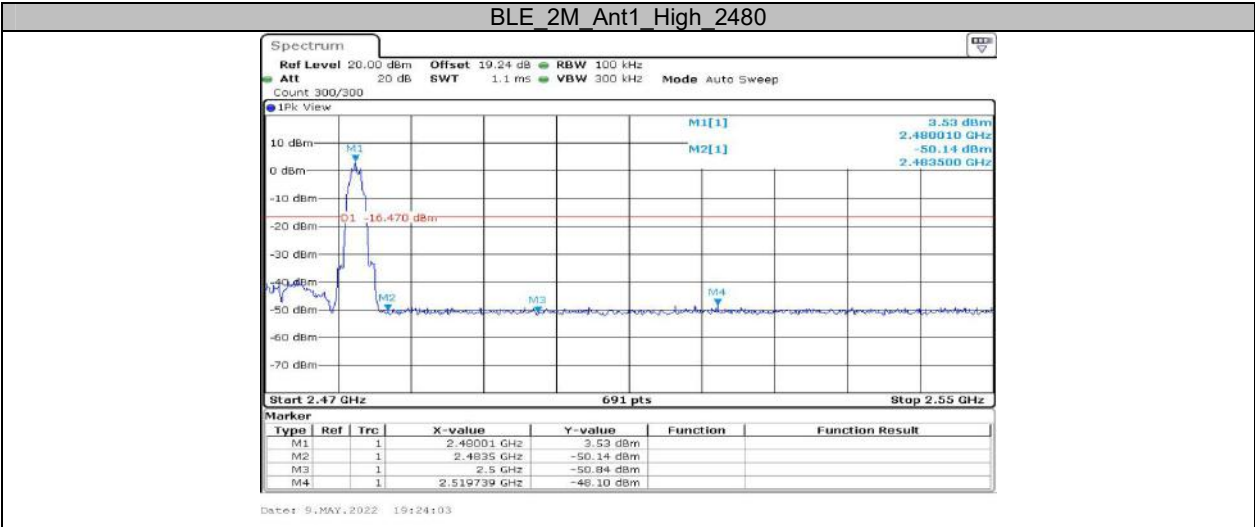

Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2440	0.37	0.62	59.68
BLE_2M	Ant1	2440	0.19	0.62	30.65

Test Graphs

