

Shenzhen CTL Electromagnetic Technology Co., Ltd. Tel: +86-755-89486194 Fax: +86-755-89486187

Andy Zhang Kendy Wang Lung Chi

FCC PART 15 SUBPART B TEST REPORT

FCC Part 15B

Report Reference No...... CTL11088535-S-WF

Compiled by

(position+printed name+signature)..: File administrators Andy Zhang

Name of the organization performing

the tests

Test Engineer Kendy Wang

(position+printed name+signature)..:

Approved by

(position+printed name+signature)..: Manager Tracy Qi

Date of issue...... September 14, 2011

Representative Laboratory Name .: Shenzhen CTL Electromagnetic Technology Co., Ltd.

Address...... Suite 2123, Building 4, Hongfa Centre, Central Area Baoan, Baoan

District, Shenzhen, Guangdong, 518101, P.R. China

Test Firm...... Bontek Compliance Testing Laboratory Ltd

Road, Nanshan, Shenzhen, China

Applicant's name...... Shenzhen Xind Communication Equipment Co., Ltd

Address...... Floor 4&5, Block D, Baosheng Huangfeng Industrial Park, Xixiang

Town, Bao'an District, Shenzhen, China

Test specification:

Standard FCC Part 15B: Unintentional Radiators

TRF Originator...... Shenzhen CTL Electromagnetic Technology Co., Ltd.

Master TRF...... Dated 2011-01

Shenzhen CTL Electromagnetic Technology Co., Ltd.. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Electromagnetic Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Electromagnetic Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Tablet PC

Trade Mark /

Model/Type reference...... XD-M9700

I/O Type of EUT...... USB Port/ Earphone Port/ DC Input Port

I/O Q'TY.....: 1/ 1/ 1

Antenna Type...... /

FCC ID...... Z3EXD-M9700

Result..... Positive

TEST REPORT

Test Report No. :	CTL11088535-S-WF	September 14, 2011
rest Report No	01E11000333-0-W1	Date of issue

Equipment under Test : Tablet PC

Model /Type : XD-M9700

Listed Models : XD-M9701, XD-M9702, XD-M9703, XD-M9704,

XD-M9705, XD-M9706, XD-M9707, XD-M9708,

Report No.: CTL11088535-S-WF

XD-M9709, XD-M82F02, XD-M8SF01

Applicant : Shenzhen Xind Communication Equipment Co., Ltd

Address : Floor 4&5, Block D, Baosheng Huangfeng Industrial Park,

Xixiang Town, Bao'an District, Shenzhen, China

Manufacturer Shenzhen Xind Communication Equipment Co., Ltd

Address Floor 4&5, Block D, Baosheng Huangfeng Industrial Park,

Xixiang Town, Bao'an District, Shenzhen, China

Test Result according to the standards on page 4:	Positive

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Report No.: CTL11088535-S-WF

Contents

TEST STANDARDS	
SUMMARY	
General Remarks	
Equipment Under Test	
Short description of the Equipment under Test (EUT)	
EUT operation mode	
EUT configuration	
Related Submittal(s) / Grant (s)	
Modifications	
TEST ENVIRONMENT	
Address of the test lebertons	
Address of the test laboratory	
Test Facility Environmental conditions	
Configuration of Tested System	
Statement of the measurement uncertainty	
Equipments Used during the Test	
Summary of Test Result	
TEST CONDITIONS AND RESULTS	
N N C C C C C C C C C C C C C C C C C C	
Conducted Emissions Test	
Radiated Emissions Test	
TEST SETUP PHOTOS OF THE EUT	
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
EXTERNAL AND INTERNAL PHOTOS OF THE EUT	
"Omagnetic"	

1. TEST STANDARDS

The tests were performed according to following standards:

FCC PartB: Unintentional Radiators

ANCI C63.4: 2003



V1.0 Page 5 of 21 Report No.: CTL11088535-S-WF

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : August 25, 2011

Testing commenced on : August 28, 2011

Testing concluded on : September 5, 2011

2.2. Equipment Under Test

Power supply system utilised

o Other (specified in blank below)

2.3. Short description of the Equipment under Test (EUT)

The device is a Tablet PC.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

Test Mode:

- 1. The EUT has been tested under normal operating condition.
- 2. No test program used to control the EUT within testing.
- 3. EUT Function and Test Mode

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of Y axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- o supplied by the manufacturer
- supplied by the lab

U-diskManufacturer : Kingston

Model No.: 4047412

● Ear-phone Manufacturer : Philip

Model No.: KY21-05

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **Z3EXD-M9700** filing to comply with of the FCC Part 15B Rules.

2.7. Modifications

No modifications were implemented to meet testing criteria.



3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Bontek Compliance Testing Laboratory Ltd 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

FCC-Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:


Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Configuration of Tested System

بادر Fig. 2-1 Configuration of Tested System

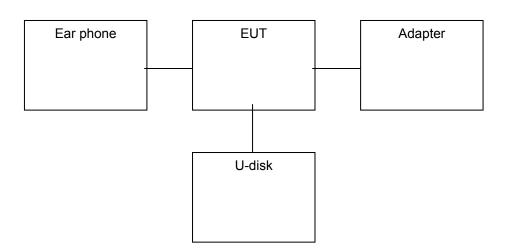

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Last Cal.	Due. Date
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	2011/04/14	2012/04/13
2	Radio Communication Tester	ROHDE & SCHWARZ	CMU200	2011/04/14	2012/04/13
3	Dual Directional Coupler	Agilent	778D	2011/04/14	2012/04/13
4	10dB attenuator	SCHWARZBECK	MTAIMP-136	2011/04/14	2012/04/13
5	Tunable Bandreject filter	K&L	3TNF-800	2011/04/14	2012/04/13
6	Tunable Bandreject filter	K&L	5TNF-1700	2011/04/14	2012/04/13
7	High-Pass Filter	K&L Ctromagne	9SH10- 2700/X12750- O/O	2011/04/14	2012/04/13
8	High-Pass Filter	K&L	41H10- 1375/U12750- O/O	2011/04/14	2012/04/13
9	Coaxial Cable	Huber+Suhner	AC4-RF-H	2011/04/14	2012/04/13
10	AC Power Supply	IDRC	CF-500TP	2011/04/14	2012/04/13
11	DC Power Supply	IDRC	CD-035-020PR	2011/04/14	2012/04/13
12	RF Current Probe	FCC	F-33-4	2011/04/14	2012/04/13
13	Temperature /Humidity Meter	zhicheng	ZC1-2	2011/04/14	2012/04/13
14	MICROWAVE AMPLIFIER	HP	8349B	2011/04/14	2012/04/13
15	Amplifier	HP	8447D	2011/04/14	2012/04/13
16	SIGNAL GENERATOR	НР	8647A	2011/04/14	2012/04/13
17	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	2011/04/14	2012/04/13
18	Horn Antenna	Schwarzbeck	BBHA9120A	2011/04/14	2012/04/13
19	EMI Test Receiver	R&S	ESPI	2011/04/14	2012/04/13

3.7. Summary of Test Result

No deviations from the test standards

Test Item	Test Requirement	Standard Paragrph	Result
Radiated Emission	FCC PART 15	Section 15.109	PASS
Conducted Emission	FCC PART 15	Section 15.107	PASS




V1.0 Page 10 of 21 Report No.: CTL11088535-S-WF

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

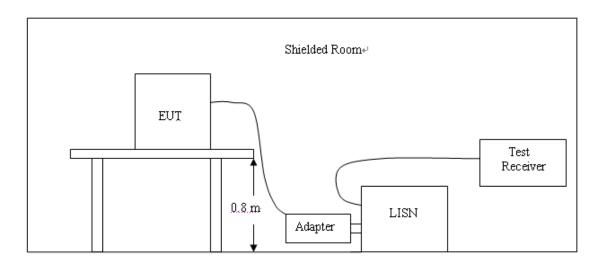

TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Fraguenov	Maximum RF Line Voltage (dΒμν)				
Frequency (MHz)	CLA	SS A	(CLASS B	
()	Q.P. Ave.		Q.P.	Ave.	
0.15 - 0.50	79	66	66-56*	56-46*	
0.50 - 5.00	73	60	56	46	
5.00 - 30.0	73	60	60	50	

^{*} Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.


- 1. Please follow the guidelines in ANSI C63.4-2003.
- 2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 4. All the support units are connecting to the other LISN.
- 5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 7. Both sides of AC line were checked for maximum conducted interference.
- 8. The frequency range from 150 kHz to 30 MHz was searched.
- 9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

The RBW/VBW for 150KHz to 30MHz: 9KHz

V1.0 Page 11 of 21 Report No.: CTL11088535-S-WF

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN" Short Description: 150K-30M Voltage

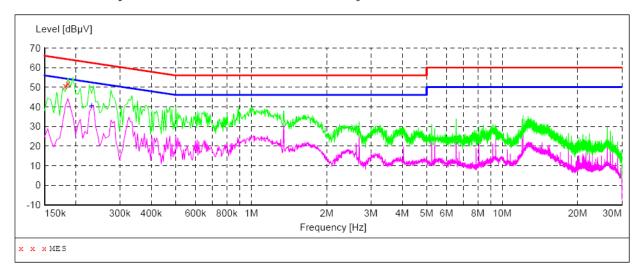


MEASUREMENT RESULT:

Frequency MHz	Transd dB		Detector	Line	PE
0.181500 0.186000				L1 L1	

MEASUREMENT RESULT:

Frequency MHz	_	Transd dB			Detector	Line	PE
0.231000	40.70	10.7	52	11.7	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

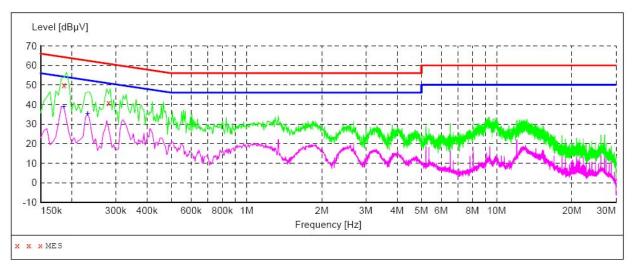

MEASUREMENT RESULT:

Frequency MHz	Level dBµV		Margin dB	Detector	Line	PE
0.186000 0.280500		11.0 10.6	(F) (F) (F)	~	N N	GND GND

MEASUREMENT RESULT:

Frequency MHz		Transd dB			Detector	Line	PE
0.186000	38.90	11.0	54	15.3	AV	N	GND
0.231000	35.40	10.7	52	17.0	AV	N	GND




V1.0 Page 13 of 21 Report No.: CTL11088535-S-WF


4.2. Radiated Emissions Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

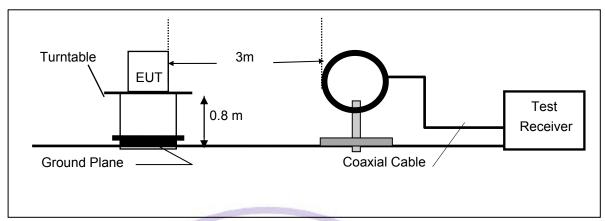

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

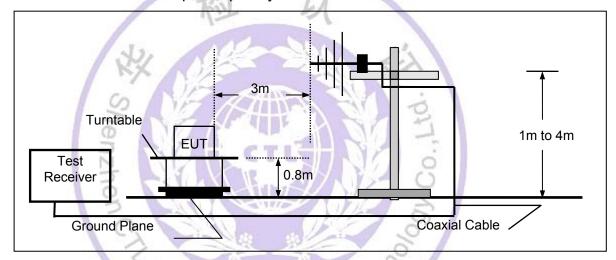

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

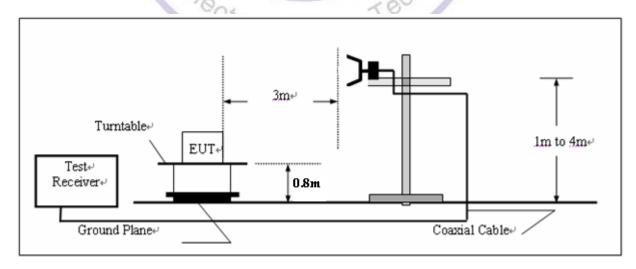

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

TEST PROCEDURE

- 1. The testing follows the guidelines in ANSI C63.4-200
- 2. The EUT was placed on a turn table which is 0.8m above ground plane.
- 3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° C to 360°C to acquire the highest emissions from EUT
- 4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5. Repeat above procedures until all frequency measurements have been completed.


TEST RESULTS



Transducer

SWEEP TABLE: "test (30M-1G)"
Short Description: Fi Field Strength Detector Meas. IF Start Stop Time Bandw.

Frequency Frequency 30.0 MHz 1.0 GHz Coupled 100 kHz VULB9163 NEW MaxPeak

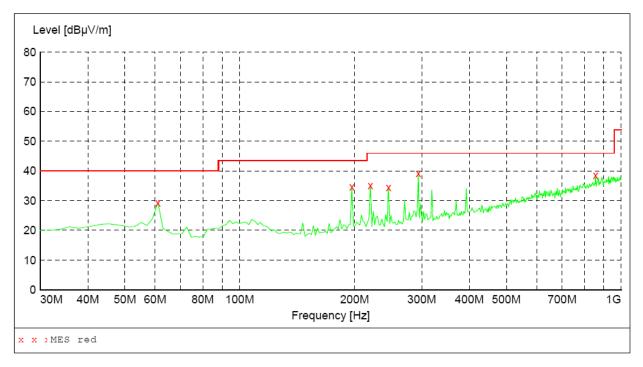

MEASUREMENT RESULT:


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
61.040000	29.40	14.2	40.0	10.6		100.0	0.00	HORIZONTAL
196.840000	34.70	16.1	43.5	8.8		100.0	0.00	HORIZONTAL
220.120000	35.10	16.1	46.0	10.9		100.0	0.00	HORIZONTAL
245.340000	34.50	17.2	46.0	11.5		100.0	0.00	HORIZONTAL
293.840000	39.20	18.6	46.0	6.8		100.0	0.00	HORIZONTAL
856.440000	38.60	30.4	46.0	7.4		100.0	0.00	HORIZONTAL

Transducer

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
Start Stop Detector Meas. IF
Frequency Frequency Time Bandw.

30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz VULB9163 NEW

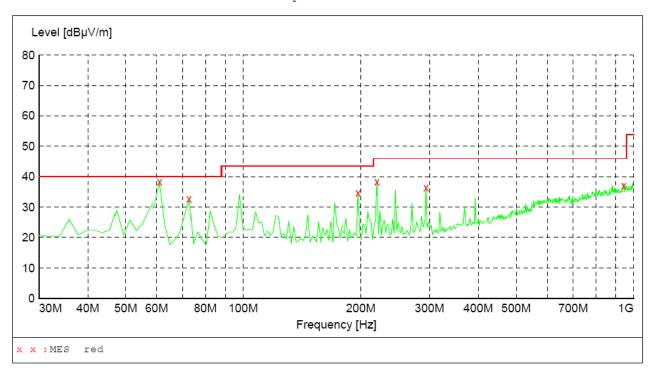

MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
61.040000	38.60	14.2	40.0	1.4		100.0	0.00	VERTICAL
72.680000	32.00	12.1	40.0	8.0		100.0	0.00	VERTICAL
196.840000	33.90	16.1	43.5	9.6		100.0	0.00	VERTICAL
220.120000	38.50	16.1	46.0	7.5		100.0	0.00	VERTICAL
293.840000	35.50	18.6	46.0	10.5		100.0	0.00	VERTICAL
941.800000	36.10	31.7	46.0	9.9		100.0	0.00	VERTICAL

Remark:

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Datas of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 25MHz to 1GHz was 120KHz.

5. Test Setup Photos of the EUT





6. External and Internal Photos of the EUT

External Photos



Internal Photos



















.....End of Report.....