



TESTING LABORATORY
CERTIFICATE NUMBER: 3297.02



FCC PART 24E

TEST AND MEASUREMENT REPORT



For

Intelibs Inc.

1500 Stony Brook Road Suite 320,

Stony Brook, NY 11794, USA

FCC ID: Z69D01T4JX6

| | |
|--|--|
| Report Type: Original Report | Product Type: Medium power Remote Unit (MRU) |
| Prepared By: <u>Test Engineer</u>  | |
| Report Number: <u>R1608092-24</u> | |
| Report Date: <u>2016-12-19</u> | |
| Reviewed By: <u>RF Lead</u>  | |
| Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164 | |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk

“*”

(Rev. 2)

TABLE OF CONTENTS

| | |
|---|-----------|
| 1 GENERAL INFORMATION | 5 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 5 |
| 1.2 MECHANICAL DESCRIPTION | 5 |
| 1.3 OBJECTIVE | 5 |
| 1.4 RELATED SUBMITTAL(S)/GRANT(S)..... | 5 |
| 1.5 TEST METHODOLOGY | 5 |
| 1.6 MEASUREMENT UNCERTAINTY..... | 6 |
| 1.7 TEST FACILITY REGISTRATIONS | 6 |
| 1.8 TEST FACILITY ACCREDITATIONS..... | 6 |
| 2 SYSTEM TEST CONFIGURATION | 9 |
| 2.1 JUSTIFICATION | 9 |
| 2.2 EUT EXERCISE SOFTWARE..... | 9 |
| 2.3 EQUIPMENT MODIFICATIONS | 9 |
| 2.4 EUT INTERNAL CONFIGURATION | 9 |
| 2.5 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS | 9 |
| 2.6 POWER SUPPLY AND LINE FILTERS..... | 9 |
| 2.7 INTERFACE PORTS AND CABLING | 10 |
| 3 SUMMARY OF TEST RESULTS..... | 11 |
| 4 FCC §2.1091 - RF EXPOSURE | 12 |
| 4.1 APPLICABLE STANDARDS | 12 |
| 4.2 MPE PREDICTION | 12 |
| 4.3 TEST RESULTS | 13 |
| 5 FCC §2.1046 & §24.232 - EQUIVALENT ISOTROPIC RADIATED POWER..... | 14 |
| 5.1 APPLICABLE STANDARDS | 14 |
| 5.2 TEST PROCEDURE | 14 |
| 5.3 TEST EQUIPMENT LIST AND DETAILS | 15 |
| 5.4 TEST ENVIRONMENTAL CONDITIONS..... | 15 |
| 5.5 TEST RESULTS | 15 |
| 6 FCC §2.1049 - OCCUPIED BANDWIDTH..... | 16 |
| 6.1 APPLICABLE STANDARDS | 16 |
| 6.2 TEST PROCEDURE | 16 |
| 6.3 TEST EQUIPMENT LIST AND DETAILS | 16 |
| 6.4 TEST ENVIRONMENTAL CONDITIONS..... | 17 |
| 6.5 TEST RESULTS | 17 |
| 7 FCC §2.1053 & §24.238 - SPURIOUS RADIATED EMISSIONS..... | 21 |
| 7.1 APPLICABLE STANDARDS | 21 |
| 7.2 TEST PROCEDURE | 21 |
| 7.3 TEST EQUIPMENT LIST AND DETAILS | 22 |
| 7.4 TEST SETUP BLOCK DIAGRAM..... | 23 |
| 7.5 TEST ENVIRONMENTAL CONDITIONS..... | 23 |
| 7.6 TEST RESULTS | 24 |
| 8 FCC §2.1051 & §24.238 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... | 25 |
| 8.1 APPLICABLE STANDARDS | 25 |
| 8.2 TEST PROCEDURE | 25 |
| 8.3 TEST EQUIPMENT LIST AND DETAILS | 25 |
| 8.4 TEST ENVIRONMENTAL CONDITIONS..... | 26 |

| | |
|--|-----------|
| 8.5 TEST RESULTS | 26 |
| 9 FCC §24.238 - BAND EDGE & INTERMODULATION..... | 39 |
| 9.1 APPLICABLE STANDARDS | 39 |
| 9.2 TEST PROCEDURE | 39 |
| 9.3 TEST EQUIPMENT LIST AND DETAILS | 39 |
| 9.4 TEST ENVIRONMENTAL CONDITIONS..... | 40 |
| 9.5 TEST RESULTS | 40 |
| 10 FCC §20.21 - OUT OF BAND REJECTION..... | 49 |
| 10.1 APPLICABLE STANDARD | 49 |
| 10.2 TEST PROCEDURE | 49 |
| 10.3 TEST EQUIPMENT LIST AND DETAILS | 49 |
| 10.4 TEST ENVIRONMENTAL CONDITIONS..... | 49 |
| 10.5 TEST RESULTS | 50 |
| 11 ANNEX A (NORMATIVE) - FCC ID LABELING REQUIREMENTS | 51 |
| 11.1 FCC ID LABEL REQUIREMENTS..... | 51 |
| 11.2 FCC ID LABEL CONTENTS AND LOCATION | 51 |
| 12 ANNEX B (NORMATIVE) - EUT SETUP PHOTOGRAPHS..... | 53 |
| 12.1 RADIATED EMISSION BELOW 1 GHz FRONT VIEW..... | 53 |
| 12.2 RADIATED EMISSION BELOW 1 GHz REAR VIEW..... | 53 |
| 12.3 RADIATED EMISSION ABOVE 1 GHz FRONT VIEW | 54 |
| 12.4 RADIATED EMISSION ABOVE 1 GHz REAR VIEW | 54 |
| 13 ANNEX C (NORMATIVE) - EUT PHOTOGRAPHS | 55 |
| 13.1 EUT – FRONT VIEW..... | 55 |
| 13.2 EUT – REAR VIEW | 55 |
| 13.3 EUT – LEFT VIEW | 56 |
| 13.4 EUT – RIGHT VIEW | 56 |
| 13.5 EUT – TOP VIEW | 57 |
| 13.6 EUT – BOTTOM VIEW | 57 |
| 13.7 EUT – MRU RF/OPTIC MODULE TOP VIEW..... | 58 |
| 13.9 EUT – MRU RF/OPTIC MODULE INTERNAL TOP VIEW..... | 59 |
| 13.10 EUT – MRU RF/OPTIC MODULE INTERNAL TOP VIEW..... | 59 |
| 13.11 EUT – MRU DC/DC CONVERTER ASSEMBLY TOP VIEW..... | 60 |
| 13.13 EUT – MRU-HPA FOR LOW BAND TOP VIEW | 61 |
| 13.14 EUT – MRU-HPA FOR LOW BAND SIDE VIEW | 61 |
| 13.15 EUT – MRU-HPA FOR LOW BAND INTERNAL TOP VIEW | 62 |
| 13.16 EUT – MRU-HPA FOR HIGH BAND TOP VIEW | 62 |
| 13.17 EUT – MRU-HPA FOR HIGH BAND SIDE VIEW | 63 |
| 13.18 EUT – MRU-HPA FOR HIGH BAND INTERNAL TOP VIEW | 63 |
| 13.19 EUT – MRU- MULTIPLEXER TOP VIEW | 64 |
| 13.20 EUT – MRU- MULTIPLEXER BOTTOM VIEW | 64 |
| 13.21 EUT – MRU- MULTIPLEXER INSIDE TOP VIEW | 65 |
| 13.22 EUT – MRU – MULTIPLEXER INSIDE BOTTOM VIEW | 65 |
| 13.23 EUT POWER ADAPTER | 66 |
| 13.24 SUPPORT EQUIPMENT – FRONT VIEW | 66 |
| 13.25 SUPPORT EQUIPMENT – FRONT VIEW | 67 |
| 13.26 SUPPORT EQUIPMENT – LEFT VIEW | 67 |
| 13.27 SUPPORT EQUIPMENT – RIGHT VIEW | 68 |
| 13.28 SUPPORT EQUIPMENT – TOP VIEW..... | 68 |
| 13.29 SUPPORT EQUIPMENT – BOTTOM VIEW | 69 |

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|---------------|-------------------------|------------------|
| 0 | R1608092-24 | Original | 2016-12-19 |

1 General Information

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *Intelibs Inc.* and their product model: MRU, FCC ID: Z69D01T4JX6, which will henceforth be referred to as the EUT (Equipment under Test). The EUT is a Medium power Remote Unit (MRU). The EUT operated in the downlink of the ESMR, cellular, broadband PCS, 700 MHz, and AWS-1 frequency bands.

1.2 Mechanical Description

The EUT measured approximately 36.5 cm (L) x 28 cm (W) x 12.3 cm (H) and weighs 14 kg.

The test data gathered were from typical production sample, serial number: R1608092-1, assigned by BACL.

1.3 Objective

This type approval report was prepared on behalf of *Intelibs Inc.* in accordance with Part 2, Subpart J, Part 20.21, Part 24 Subpart E, of the Federal Communication Commission's rules.

The objective is to determine compliance with FCC rules for RF output power, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation and band edge

1.4 Related Submittal(s)/Grant(s)

FCC Part 22, Subpart H, Equipment B2I with FCC ID: Z69D01T4JX6

FCC Part 27, Subpart C, Equipment B2I with FCC ID: Z69D01T4JX6

FCC Part 90, Subpart S, Equipment B2I with FCC ID: Z69D01T4JX6

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Subpart J as well as the following parts:

Part 20.21 – Signal Boosters

Part 24 Subpart E – Broadband PCS

Applicable Standards: TIA/EIA603-D, FCC KDB 935210.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

| Parameter | Measurement uncertainty |
|-------------------------------|-------------------------|
| Occupied Channel Bandwidth | ±5 % |
| RF output power, conducted | ±0.57 dB |
| Unwanted Emissions, conducted | ±1.57dB |
| All emissions, radiated | ±4.0 dB |
| Temperature | ±2 ° C |
| Humidity | ±5 % |
| DC and low frequency voltages | ±1.0 % |
| Time | ±2 % |
| Duty Cycle | ±3 % |

1.7 Test Facility Registrations

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices,

Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)

- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D. A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - IC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EC US-EU EMC & Telecom MRA CAB
 - o Radio & Teleterminal Equipment (R&TTE) Directive 1995/5/EC
US -EU EMC & Telecom MRA CAB
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA)
APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

2.2 EUT Exercise Software

There was no exercise software with the EUT; signals were sent through EUT using a signal generator.

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 EUT Internal Configuration

| Manufacturer | Description | Model | Serial Number |
|--------------|--------------------------------|-------|---------------|
| Intelibs | DC/DC Converter | - | - |
| Intelibs | Low Band High Power Amplifier | - | - |
| Intelibs | High Band High Power Amplifier | - | - |
| Intelibs | RF/Optic Module | - | - |
| Intelibs | Quad Band Multiplexer | - | - |

2.5 Local Support Equipment List and Details

NA

2.6 Power Supply and Line Filters

| Manufacturers | Descriptions | Models | Serial Numbers |
|---------------|----------------------------------|------------|----------------|
| XP Power | AC/DC Power Adapter w/ PoE Cable | AFE220PS48 | 102236 |

2.7 Interface Ports and Cabling

| Cable Description | Length (m) | From | To |
|-------------------|------------|-------------------|-------------------|
| RF cable | < 1 | Signal Generator | Support Equipment |
| RF cable | < 1 | EUT Output | Spectrum Analyzer |
| Fiber Optic Cable | 1 | Support Equipment | EUT Input |

3 Summary of Test Results

| FCC Rules | Description of Tests | Results |
|---------------------|---|------------------|
| §2.1091 | RF Exposure | Compliant |
| §2.1046, §24.232(a) | Output Power | Compliant |
| §2.1049 | 26 dB Occupied Bandwidth | Compliant |
| §2.1053, §24.238 | Spurious Radiated Emissions | Compliant |
| §2.1053, §24.238 | Spurious Emissions at Antenna Terminals | Compliant |
| §2.1053, §24.238 | Band Edge & Intermodulation | Compliant |
| §2.1055, §24.235 | Frequency Stability | N/A ¹ |
| §20.21 | Out of Band Rejection | Compliant |

¹ The EUT was a signal booster.

4 FCC §2.1091 - RF Exposure

4.1 Applicable Standards

FCC §2.1091, (a) Requirements of this section are a consequence of Commission responsibilities under the National Environmental Policy Act to evaluate the environmental significance of its actions. See subpart I of part 1 of this chapter, in particular §1.1307(b).

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (minute) |
|--|-------------------------------|-------------------------------|-------------------------------------|-------------------------|
| Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

Note: f = frequency in MHz

* = Plane-wave equivalent power density

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 Test Results

1930-1995 MHz

| | |
|---|---------|
| <u>Maximum peak output power at antenna input terminal (dBm):</u> | 32.83 |
| <u>Maximum peak output power at antenna input terminal (mW):</u> | 1918.67 |
| <u>Prediction distance (cm):</u> | 110 |
| <u>Prediction frequency (MHz):</u> | 1962.5 |
| <u>Antenna Gain, typical (dBi):</u> | 15.00 |
| <u>Maximum Antenna Gain (numeric):</u> | 31.62 |
| <u>Power density at predication frequency and distance (mW/cm²):</u> | 0.3990 |
| <u>it for uncontrolled exposure at predication frequency (mW/cm²):</u> | 1.0 |

Results

The highest power density levels at 110 cm are below the MPE uncontrolled exposure limit with a 15 dBi antenna gain.

5 FCC §2.1046 & §24.232 - Equivalent Isotropic Radiated Power

5.1 Applicable Standards


According to FCC §24.232 (a):

- (1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; *see* Tables 1 and 2 of this section.
- (4) The service area boundary limits and microwave protection criteria specified in §§24.236 and 24.237 apply.

5.2 Test Procedure

Conducted:

The signal generator was connected to the support equipment and the support equipment was connected to the EUT through a fiber cable. The output of the EUT was connected to a spectrum analyzer through appropriate attenuation.



5.3 Test Equipment List and Details

| Manufacturers | Descriptions | Models | Serial Numbers | Calibration Dates | Calibration Interval |
|-----------------------|-------------------------|--------|----------------|------------------------|------------------------|
| Agilent | Analyzer, Spectrum | E4440A | US 42221851 | 2016-06-10 | 1 year |
| Rohde & Schwarz | Generator, Signal | SMIQ03 | 849192/0085 | 2016-07-29 | 2 years |
| Keysight Technologies | Vector Signal Generator | N5182B | MY51350070 | 2015-11-18 | 1 year |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0003 | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0006 | Each Time ¹ | Each Time ¹ |

¹Note: This equipment was calibrated for each test.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

5.4 Test Environmental Conditions

| | |
|--------------------|---------------|
| Temperature: | 23° C |
| Relative Humidity: | 32 % |
| ATM Pressure: | 101.4-102 kPa |

The testing was performed by Jose Martinez 2016-09-28 in the RF Site.

5.5 Test Results

| Signal Type | AGC | Input Power (dBm) | Output Power (dBm) | Gain (dB) | EIRP (dBm) |
|-------------|-----|-------------------|--------------------|-----------|------------|
| Broadband | Off | -51.26 | 29.56 | 80.82 | 44.56 |
| | On | -47.71 | 32.83 | 80.54 | 47.83 |
| Narrowband | Off | -51.34 | 32.00 | 83.34 | 47.00 |
| | On | -48.19 | 32.19 | 80.38 | 47.19 |

Note: EIRP (dBm)=Conducted Output Power (dBm) + Antenna Gain (dBi), gain of the antenna that applies to this device is 15 dBi.

Note: Calculation results of the amplifier gain listed in the table above contains two parts: gain of MRU (the EUT) and gain of RHU. The typical gain of MRU is around 45 dB. Thus, the typical gain of RHU is around 40 dB, please refer to FCC ID: Z69D01T4JX5 for the RHU.

6 FCC §2.1049 - Occupied Bandwidth


6.1 Applicable Standards

Requirements: §2.1049

6.2 Test Procedure

The signal generator was connected to the support equipment and the support equipment was connected to the EUT through a fiber cable. The output of the EUT was connected to a spectrum analyzer through appropriate attenuation.

The resolution bandwidth of the spectrum analyzer was set to 1 to 5% of the OBW and the 26 dB & 99% bandwidth was recorded.



6.3 Test Equipment List and Details

| Manufacturers | Descriptions | Models | Serial Numbers | Calibration Dates | Calibration Interval |
|-----------------------|-------------------------|--------|----------------|------------------------|------------------------|
| Agilent | Analyzer, Spectrum | E4440A | US 42221851 | 2016-06-10 | 1 year |
| Rohde & Schwarz | Generator, Signal | SMIQ03 | 849192/0085 | 2016-07-29 | 2 years |
| Keysight Technologies | Vector Signal Generator | N5182B | MY51350070 | 2015-11-18 | 1 year |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0003 | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0006 | Each Time ¹ | Each Time ¹ |

¹Note: This equipment was calibrated for each test.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

6.4 Test Environmental Conditions

| | |
|--------------------|---------------|
| Temperature: | 23° C |
| Relative Humidity: | 32 % |
| ATM Pressure: | 101.4-102 kPa |

The testing was performed by Jose Martinez 2016-09-28 in the RF Site.


6.5 Test Results

Please refer to the following tables and plots.


| Signal Type | AGC | Input | Output |
|-------------|-----|----------------|-----------------|
| | | 99 % OBW (kHz) | 26 dB OBW (kHz) |
| Broadband | off | 4130.5 | 4134.3 |
| | on | | 4149.0 |
| Narrowband | off | 242.291 | 241.322 |
| | on | | 244.903 |

Broadband


Input

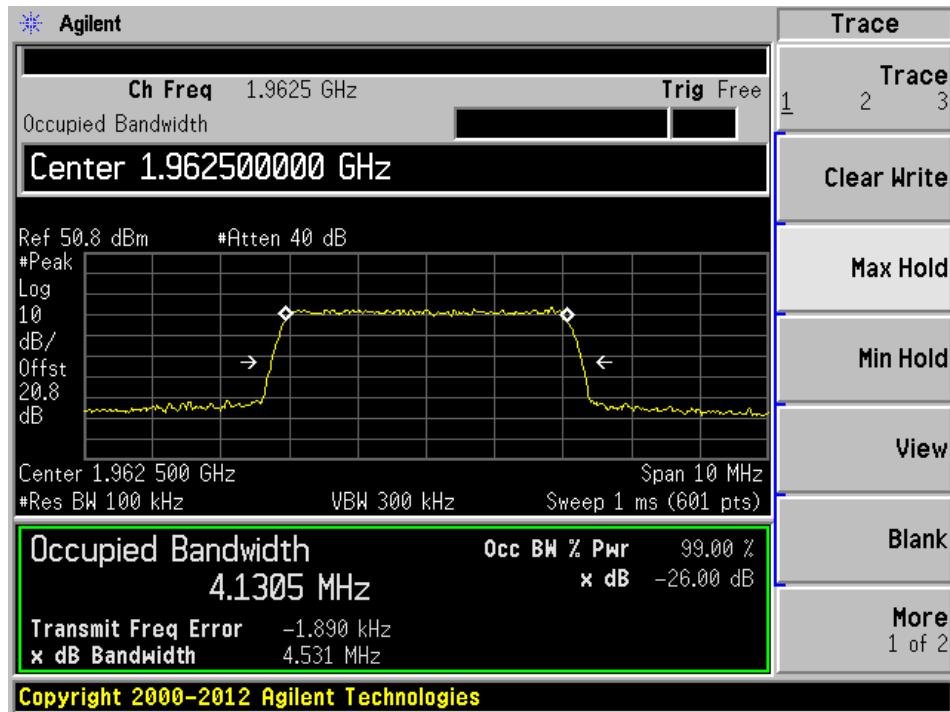

Output, AGC Off

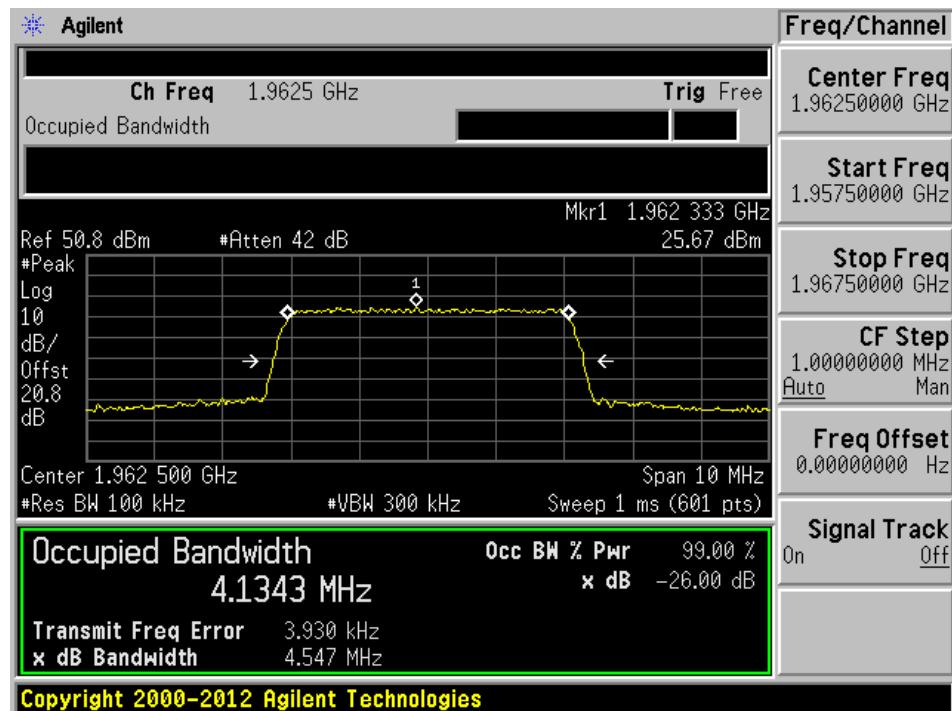


Output, AGC On

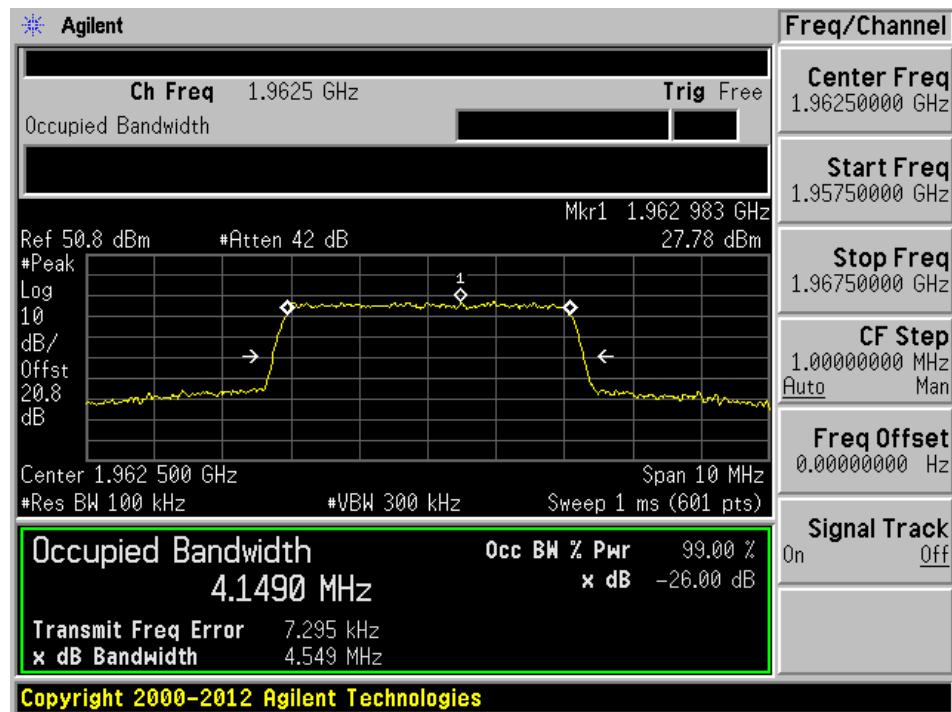


Narrowband


Input

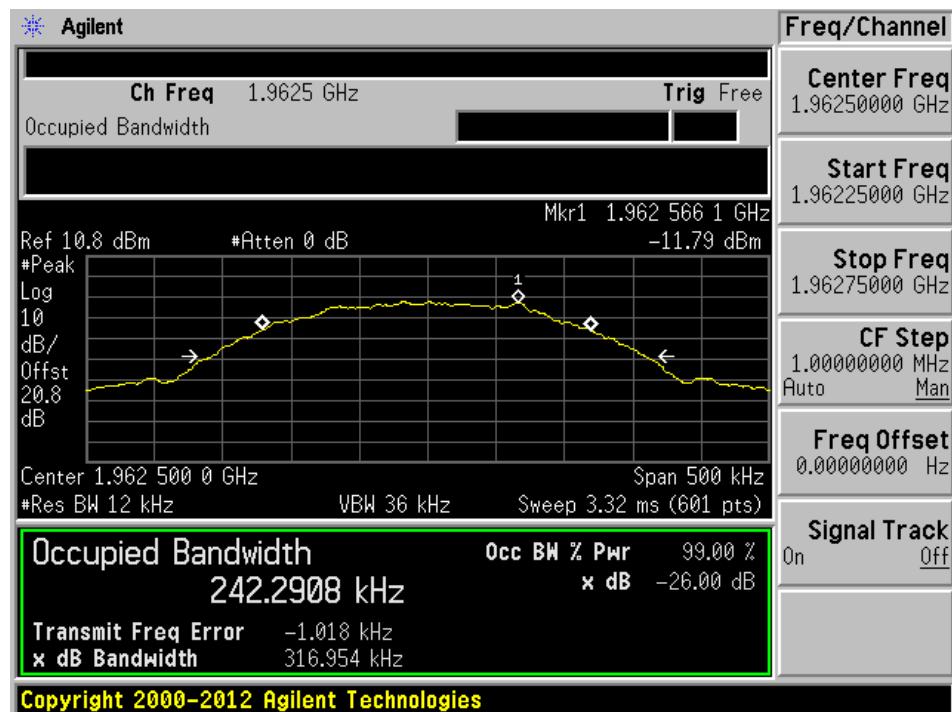

Output, AGC Off

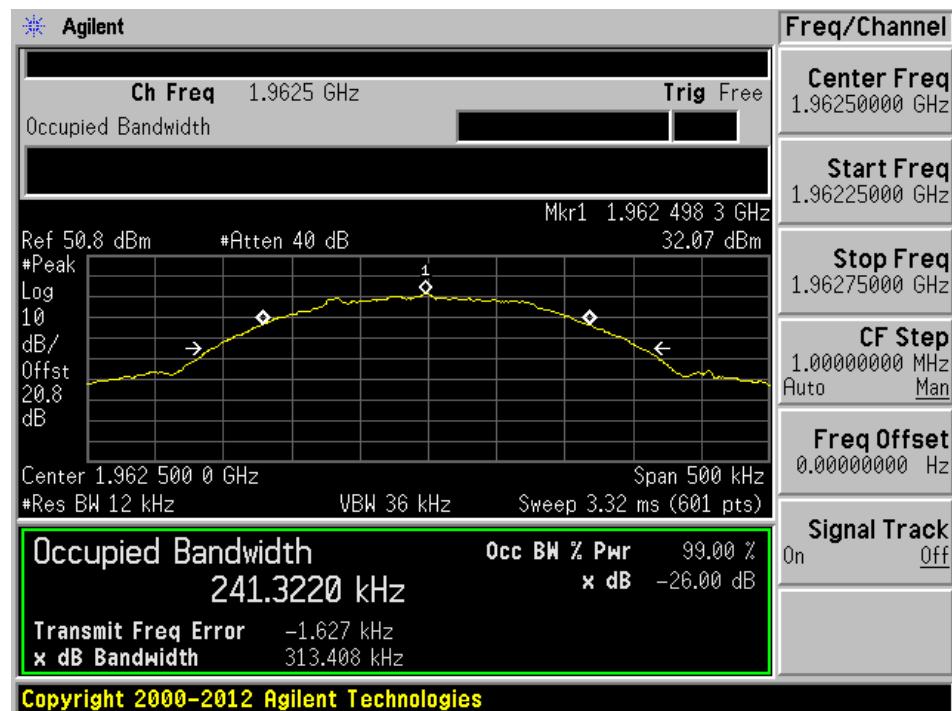

Output, AGC On

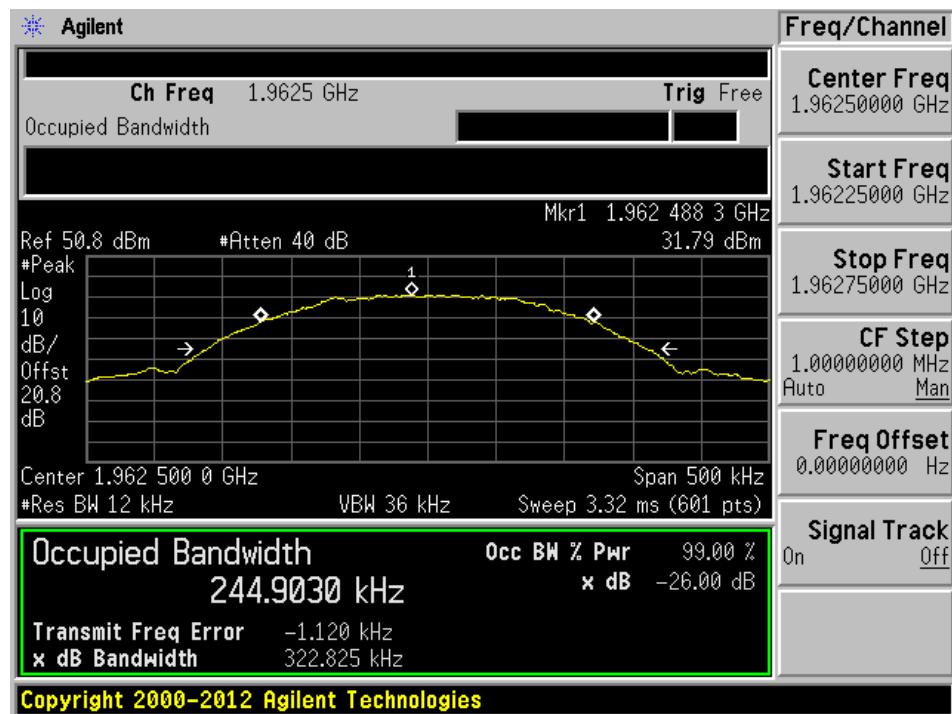

7 FCC §2.1053 & §24.238 - Spurious Radiated Emissions

7.1 Applicable Standards

According to FCC §24.238(a) the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.2 Test Procedure

The transmitter was placed onto a Styrofoam block. The unit was normally transmitting with a 50 ohm terminator connected to the antenna terminal.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

Emissions were investigated up to the tenth harmonic of the fundamental frequency.

After the emissions were found, the EUT was removed and replaced by a substituting antenna. A signal generator was connected to the substituting antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level
Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

7.3 Test Equipment List and Details


| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Interval |
|-----------------------|-------------------------|---------------|-----------------|------------------------|------------------------|
| Agilent | Analyzer, Spectrum | E4440A | US 42221851 | 2016-06-10 | 1 year |
| Sunol Science Corp | System Controller | SC99V | 122303-1 | N/R | N/R |
| Sunol Sciences | Antenna, Biconi-Log | JB3 | A020106-2 | 2015-07-11 | 2 years |
| Agilent | Amplifier, Pre | 8447D | 2944A10187 | 2016-03-23 | 1 year |
| HP/ Agilent | Pre Amplifier | 8449B OPT HO2 | 3008A0113 | 2016-05-23 | 1 year |
| EMCO | Antenna, Horn | 3115 | 9511-4627 | 2016-01-28 | 2 years |
| A.R.A. | Antenna, Horn | DRG-118/A | 1132 | 2015-09-21 | 2 years |
| Keysight Technologies | Vector Signal Generator | N5182B | MY51350070 | 2015-11-18 | 1 year |
| COM-POWER | Antenna, Dipole | AD-100 | 721033DB1/2/3/4 | 2014-11-03 | 2 years |
| - | SMA cable | - | C0003 | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0006 | Each Time ¹ | Each Time ¹ |

¹*Note: This equipment was calibrated for each test.*

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

7.4 Test Setup Block Diagram

Radiated Emissions Testing

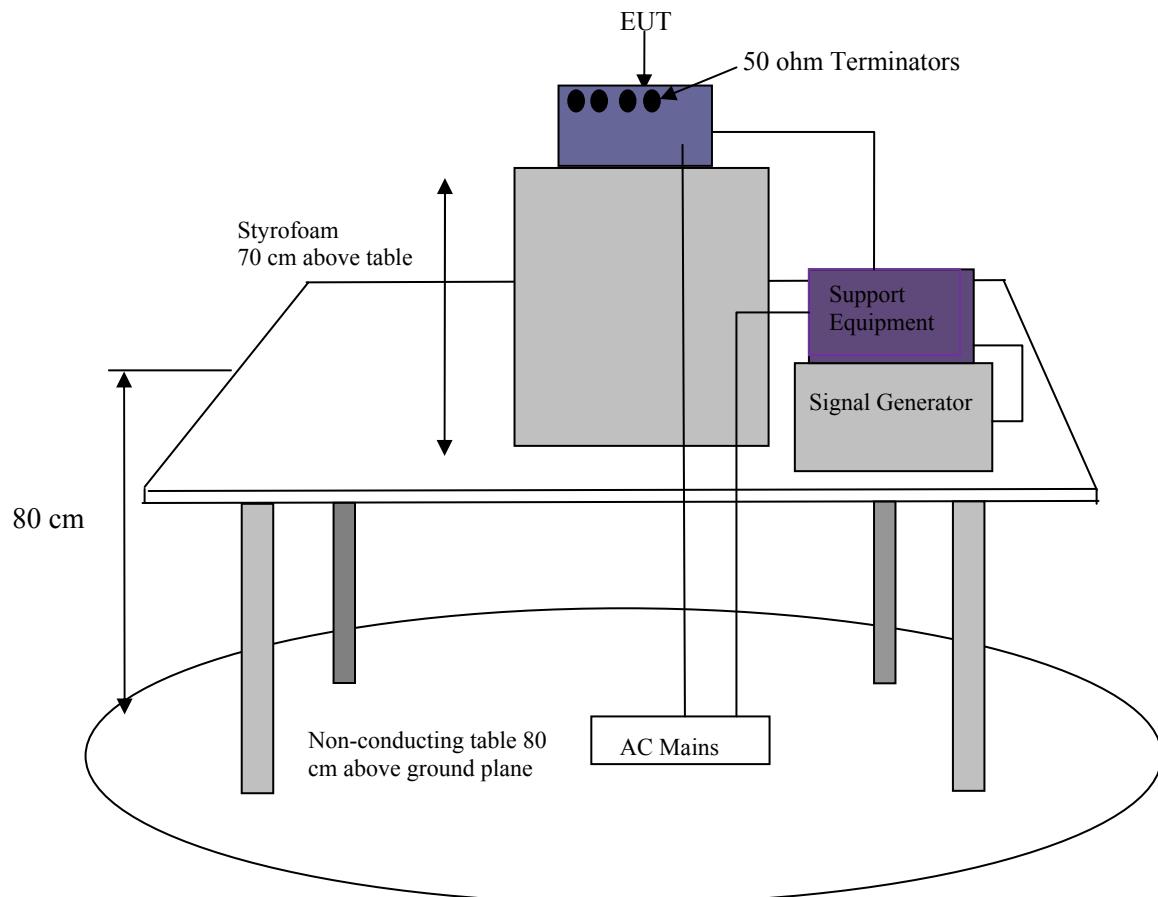

7.5 Test Environmental Conditions

| | |
|---------------------------|-----------------|
| Temperature: | 20-21°C |
| Relative Humidity: | 47-49 % |
| ATM Pressure: | 101.4-101.6 kPa |

The testing was performed by Jose Martinez on 2016-10-04 in 5 Meter Chamber 3.

7.6 Test Results

Carrier Wave Signal

Middle Channel

| Indicated | | Azimuth (degree) | Test Antenna | | Substituted | | | | | Limit (dBm) | Margin (dB) |
|--------------------|------------------------|---------------------|----------------|-------------------|--------------------|----------------|---------------------------------|-----------------------|----------------------------|----------------|----------------|
| Frequency (MHz) | S.A. Amp. (dBuV) | | Height (cm) | Polarity (H/V) | Frequency (MHz) | Level (dBm) | Ant. Gain Correction (dB) | Cable Loss (dB) | Absolute Level (dBm) | | |
| 45 | 50.13 | 0 | 300 | H | 45 | -39.71 | 0.000 | 0.38 | -40.09 | -13 | -27.09 |
| 45 | 61.99 | 270 | 100 | V | 45 | -23.68 | 0.000 | 0.38 | -24.06 | -13 | -11.06 |
| 80 | 64.96 | 0 | 220 | H | 80 | -24.88 | 0.000 | 0.33 | -25.21 | -13 | -12.21 |
| 80 | 64.81 | 270 | 100 | V | 80 | -20.86 | 0.000 | 0.33 | -21.19 | -13 | -8.19 |
| 3925 | 34.61 | 0 | 100 | H | 3925 | -31.78 | 10.41 | 0.87 | -22.24 | -13 | -9.24 |
| 3925 | 33.74 | 0 | 100 | V | 3925 | -32.47 | 10.496 | 0.87 | -22.844 | -13 | -9.84 |
| 5887.5 | 33.49 | 0 | 100 | H | 5887.5 | -30.24 | 10.444 | 0.62 | -20.416 | -13 | -7.42 |
| 5887.5 | 33.6 | 0 | 100 | V | 5887.5 | -30 | 10.406 | 0.62 | -20.214 | -13 | -7.21 |

8 FCC §2.1051 & §24.238 - Spurious Emissions at Antenna Terminals


8.1 Applicable Standards

According to FCC §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

8.2 Test Procedure

The signal generator was connected to the support equipment and the support equipment was connected to the EUT through a fiber cable. The output of the EUT was connected to a spectrum analyzer through appropriate attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 KHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.



8.3 Test Equipment List and Details

| Manufacturers | Descriptions | Models | Serial Numbers | Calibration Dates | Calibration Interval |
|-----------------------|-------------------------|--------|----------------|------------------------|------------------------|
| Agilent | Analyzer, Spectrum | E4440A | US 42221851 | 2016-06-10 | 1 year |
| Rohde & Schwarz | Generator, Signal | SMIQ03 | 849192/0085 | 2016-07-29 | 2 years |
| Keysight Technologies | Vector Signal Generator | N5182B | MY51350070 | 2015-11-18 | 1 year |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0003 | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0006 | Each Time ¹ | Each Time ¹ |

¹*Note: This equipment was calibrated for each test.*

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

8.4 Test Environmental Conditions

| | |
|--------------------|---------------|
| Temperature: | 23° C |
| Relative Humidity: | 32 % |
| ATM Pressure: | 101.4-102 kPa |

The testing was performed by Jose Martinez 2016-09-13 in the RF Site.


8.5 Test Results

Please refer to the following plots.


Note: 1 MHz RBW is supposed to be used; data and unit will still comply.

Broadband Signal**AGC Off****Low Channel**


Low Channel: 30 MHz-929 MHz

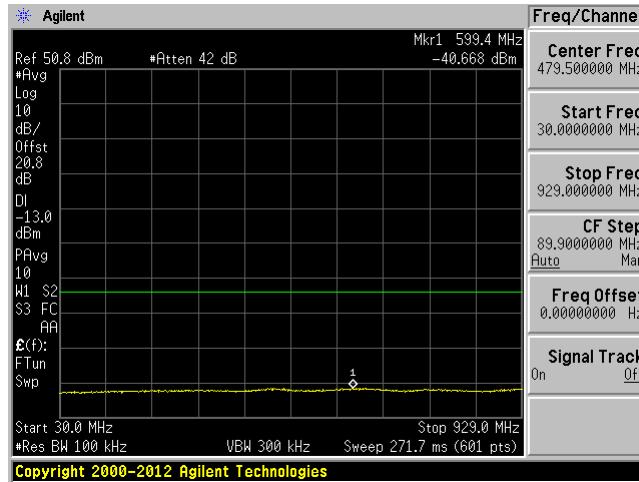

Low Channel : 929 MHz-1.929 GHz

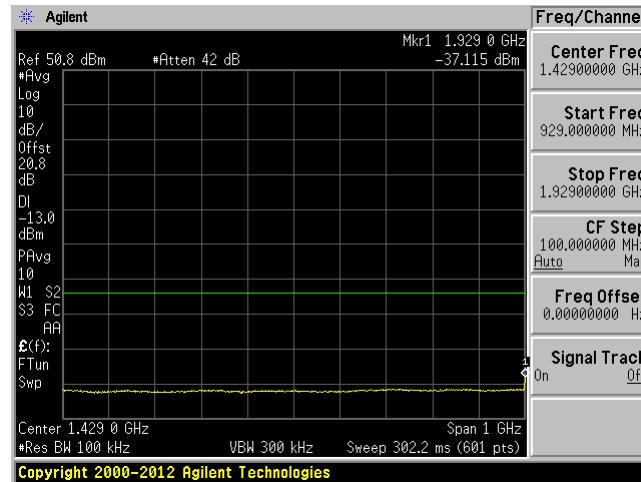


Low Channel: 1.996 GHz - 20 GHz

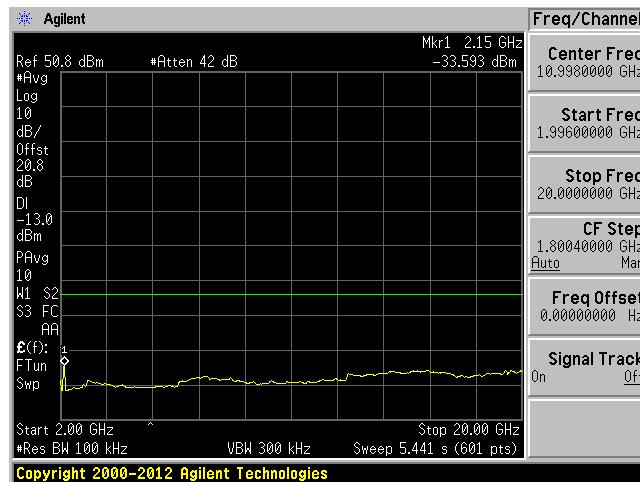


Middle Channel

Middle Channel: 30 MHz-1.929 GHz

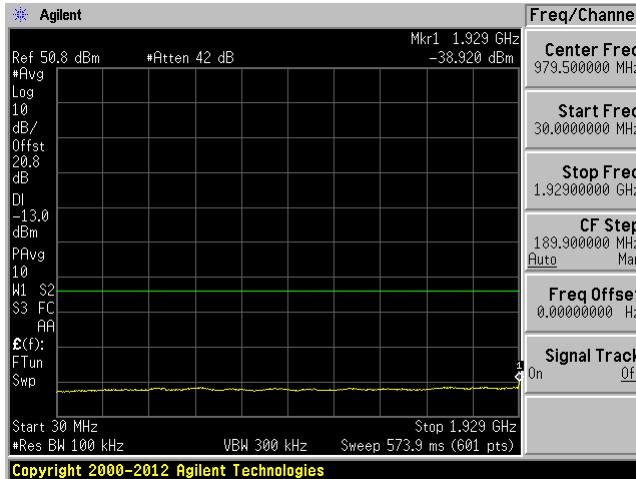


Middle Channel: 1.996 GHz-20 GHz

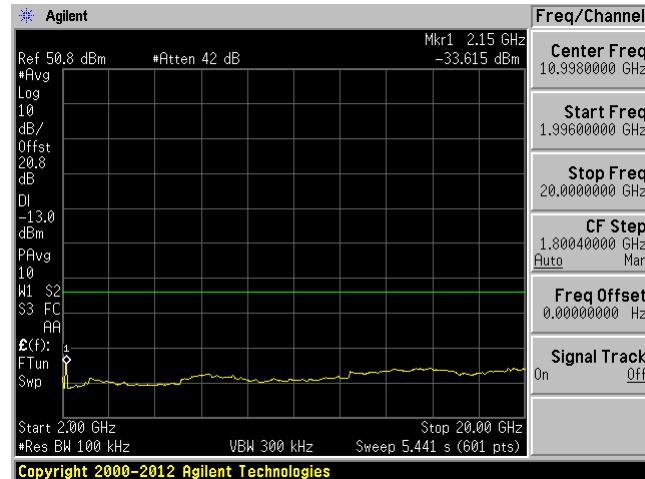


High Channel


High Channel: 30 MHz-1.929 GHz

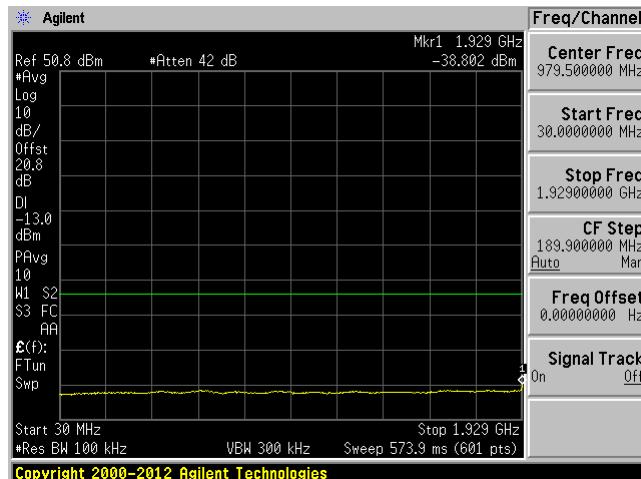

High Channel : 1.996 GHz-2.996 GHz

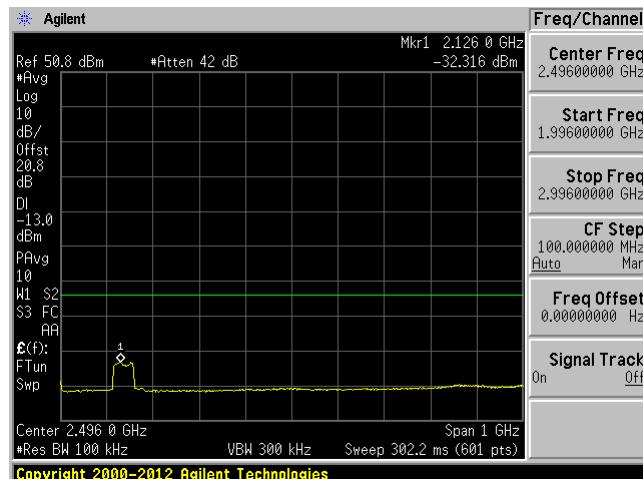


High Channel: 2.996 GHz-20 GHz

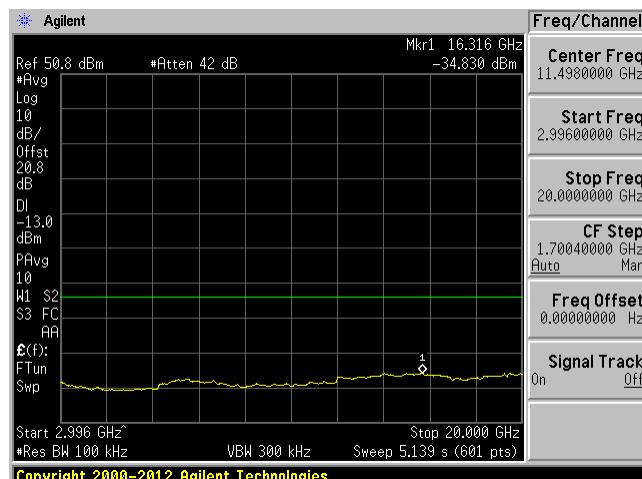


AGC On**Low Channel**


Low Channel: 30 MHz-929 MHz

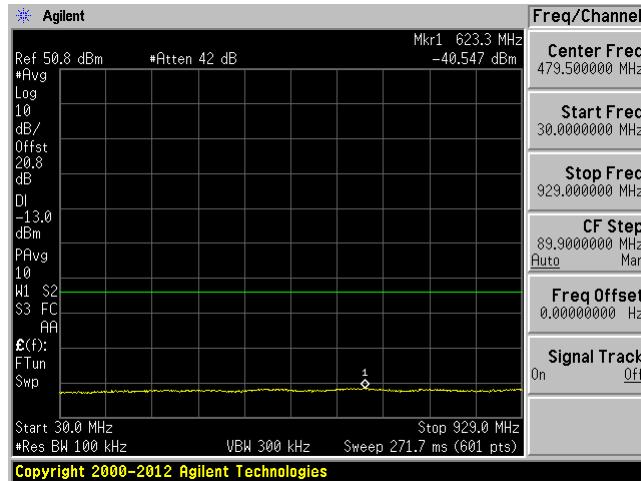

Low Channel: 929 MHz-1.929 GHz

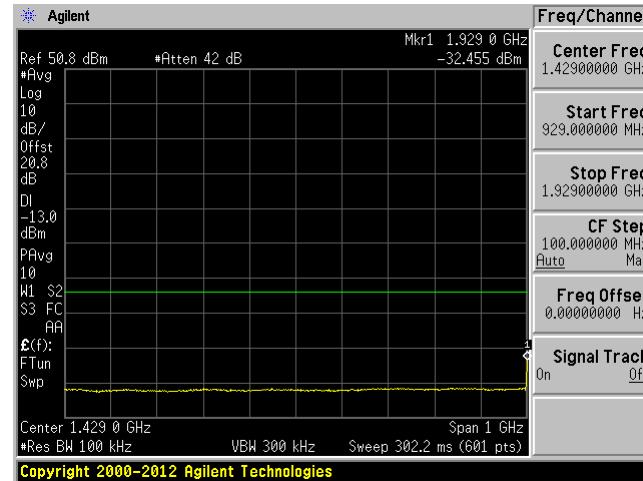


Low Channel: 1.996 GHz-20 GHz

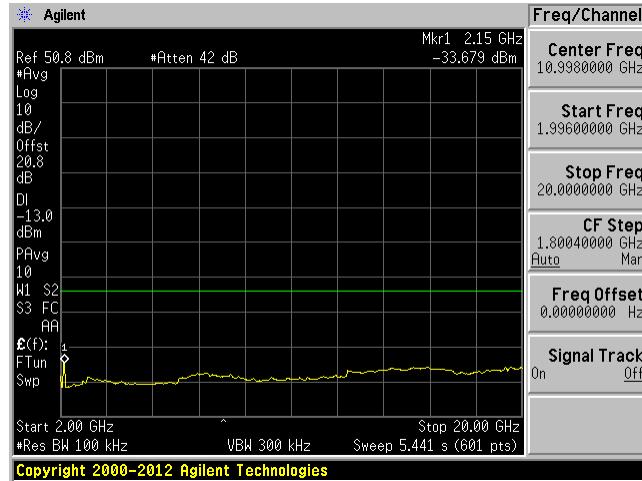


Middle Channel

Middle Channel: 30 MHz-1.929 GHz

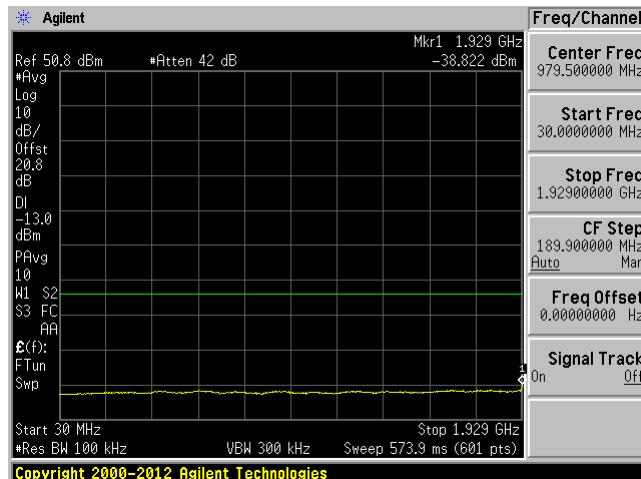


Middle Channel: 1.996 GHz-20 GHz

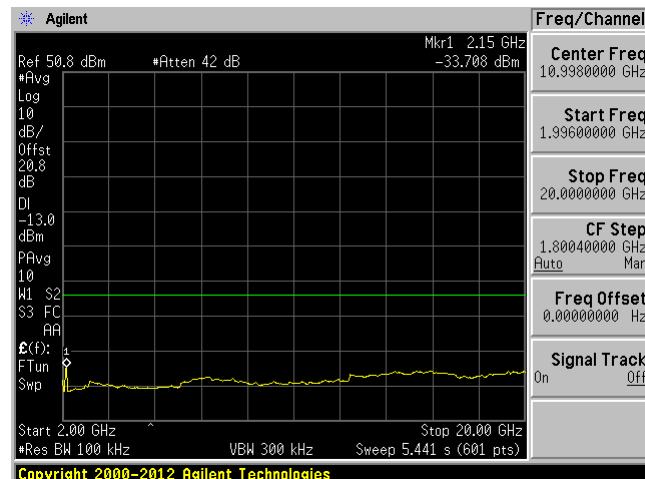


High Channel


High Channel: 30 MHz-1.929 GHz

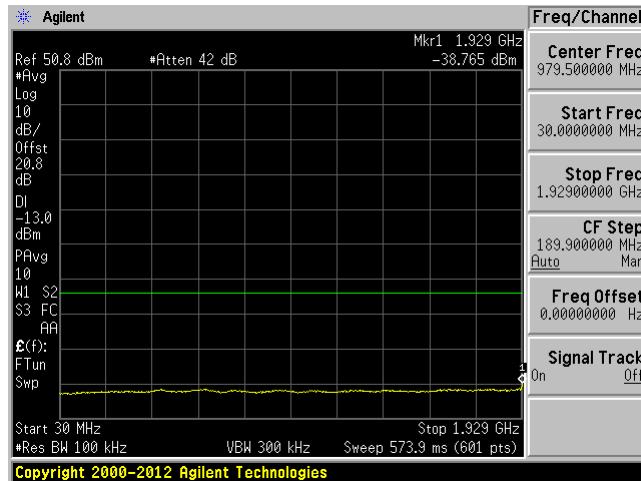

High Channel: 1.996 GHz-2.996 GHz

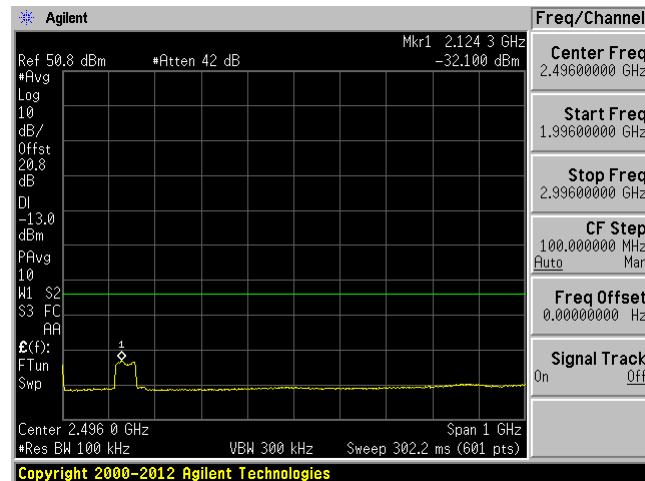


High Channel : 2.996 GHz-20 GHz

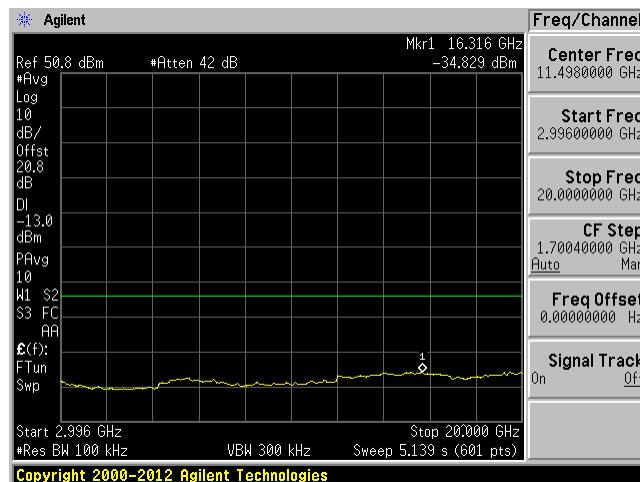


Narrowband Signal**AGC Off****Low Channel**


Low Channel: 30 MHz-929 MHz

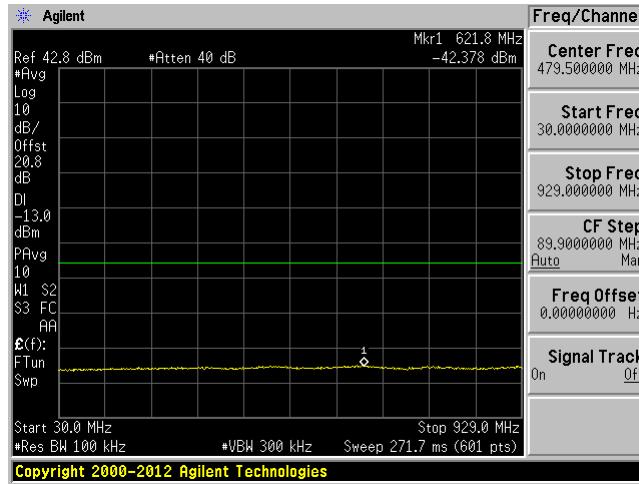

Low Channel: 929 MHz-1.929 GHz

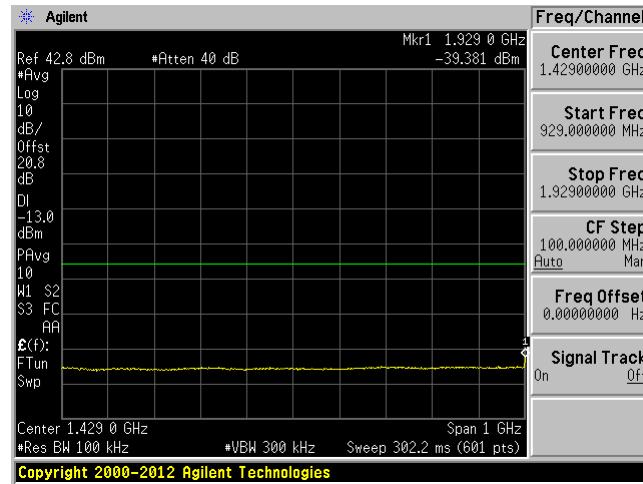


Low Channel: 1.996 GHz-20 GHz

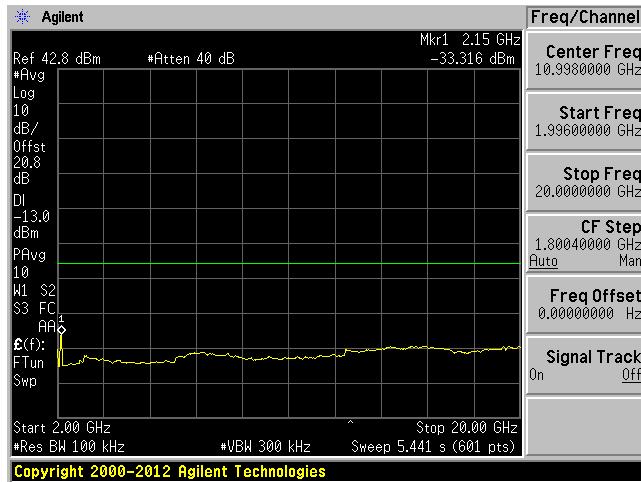


Middle Channel

Middle Channel: 30 MHz-1.929 GHz

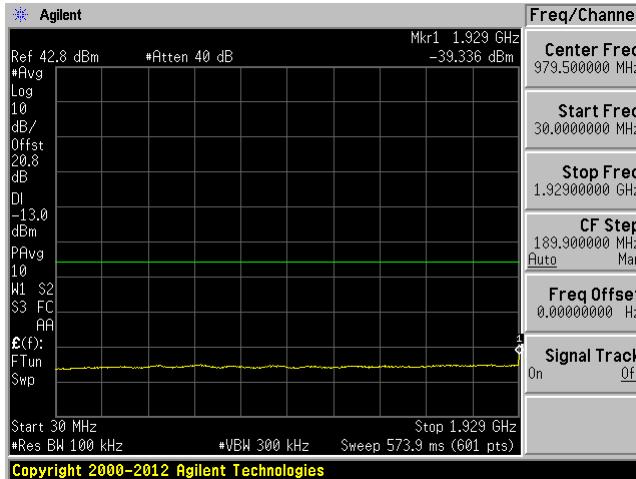


Middle Channel: 1.996 GHz-20 GHz

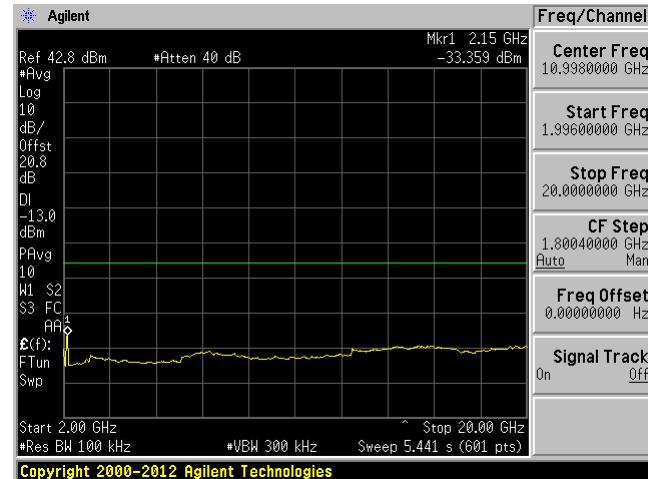


High Channel


High Channel: 30 MHz-1.929 GHz

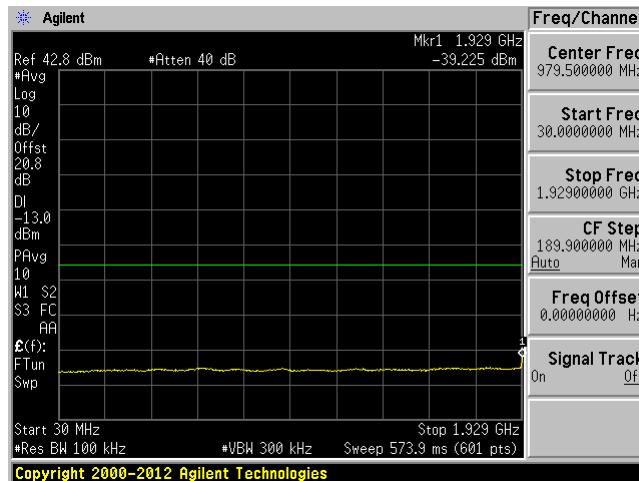

High Channel: 1.996 GHz-2.996 GHz

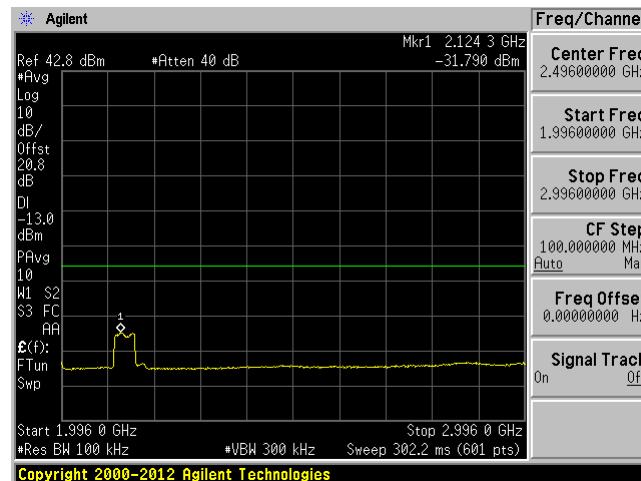


High Channel: 2.996 GHz-20 GHz

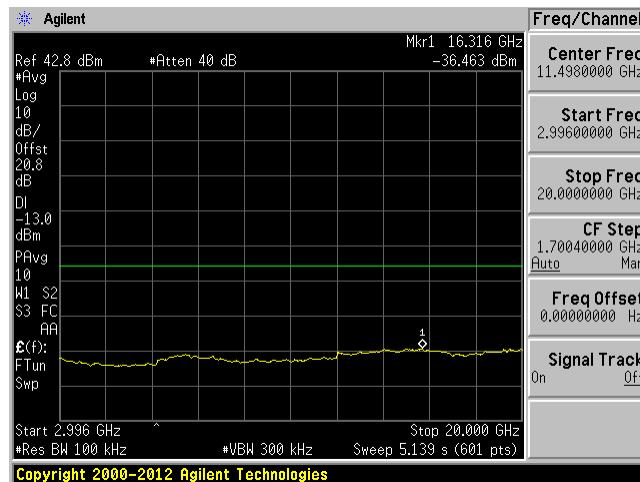


AGC On**Low Channel**


Low Channel: 30 MHz-929 MHz

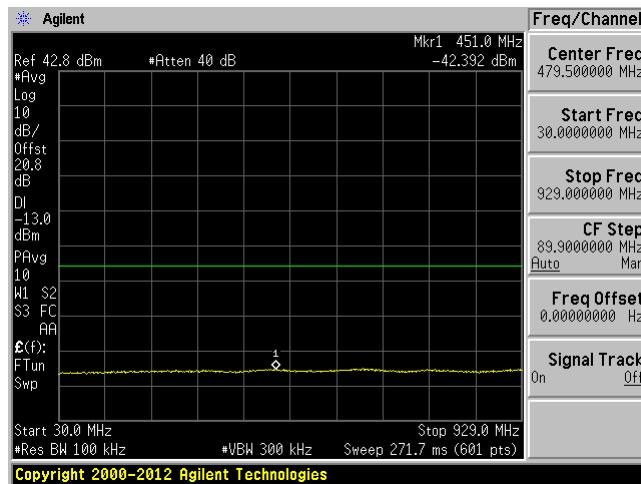

Low Channel: 929 MHz-1.929 GHz

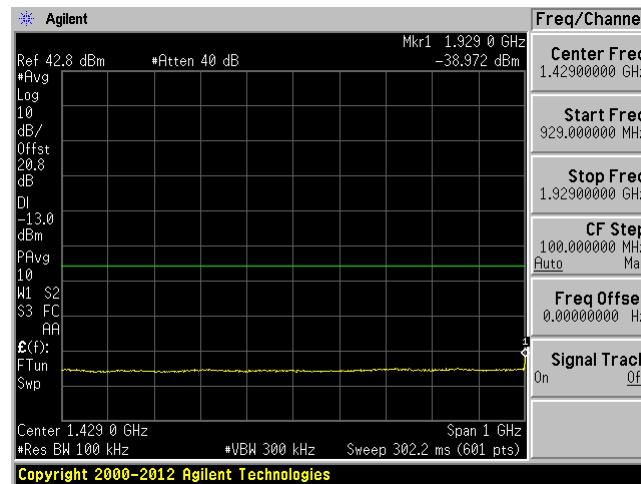


Low Channel: 1.996 GHz-20 GHz

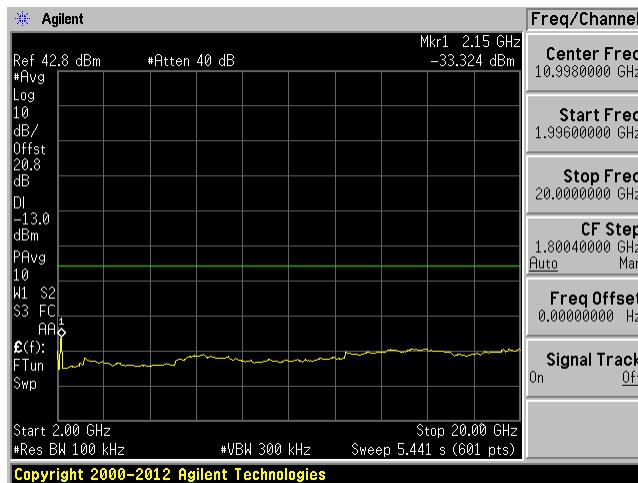


Middle Channel

Middle Channel: 30 MHz-1.929 GHz

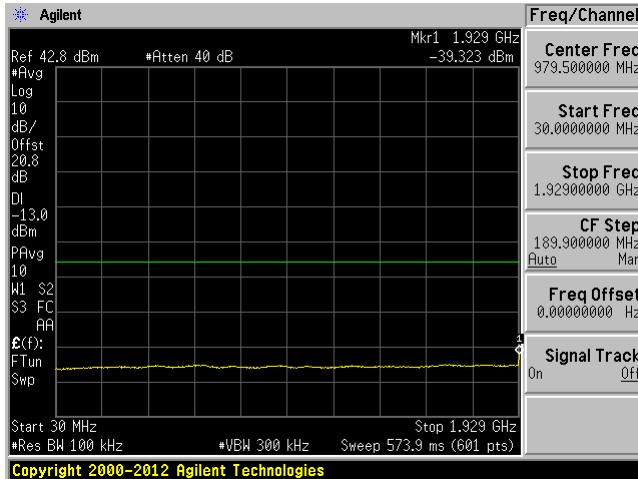


Middle Channel: 1.996 GHz-20 GHz

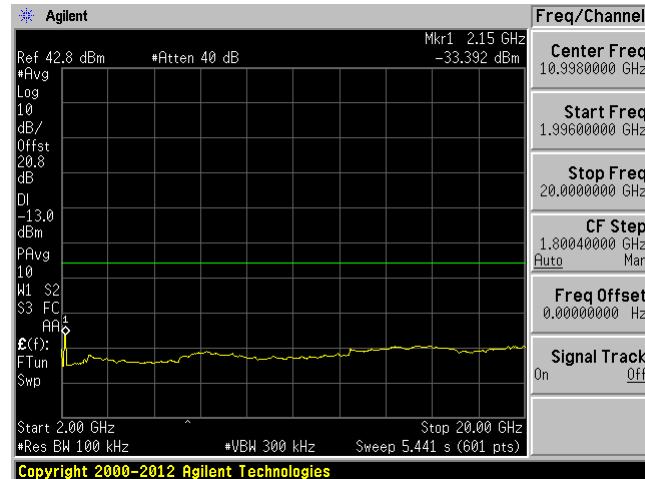


High Channel


High Channel: 30 MHz-1.929 GHz

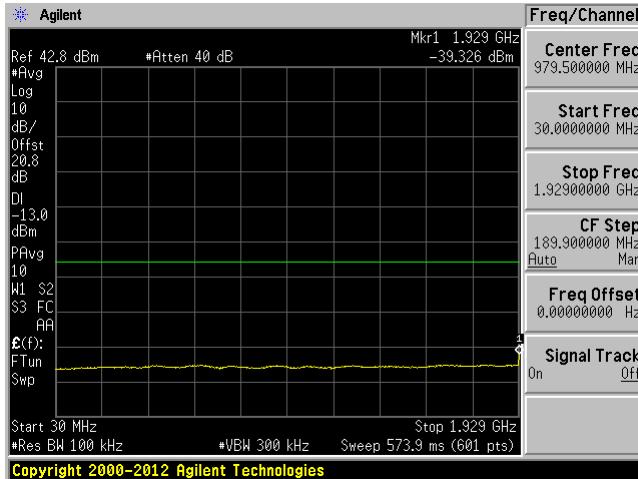

High Channel: 1.996 GHz-2.996 GHz

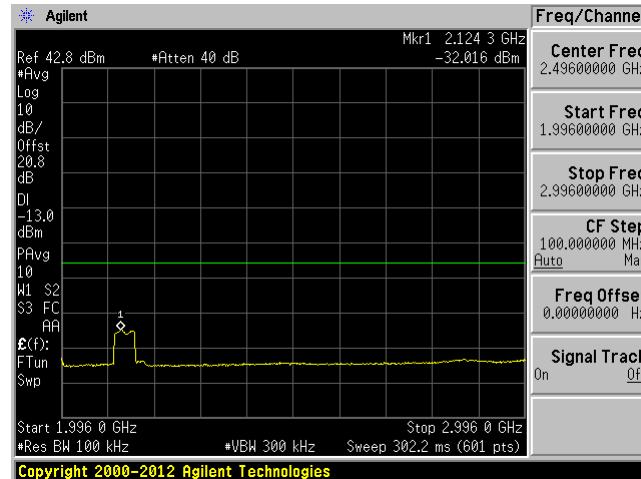

High Channel: 2.996 GHz-20 GHz

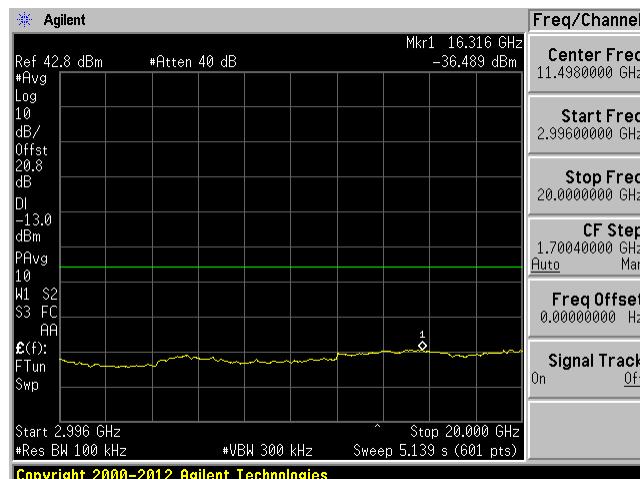

9 FCC §24.238 - Band Edge & Intermodulation


9.1 Applicable Standards

According to FCC §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

The signal generator was connected to the support equipment and the support equipment was connected to the EUT through a fiber cable. The output of the EUT was connected to a spectrum analyzer through appropriate attenuation.

The center of the spectrum analyzer was set according to center frequency of the EUT to be transmitted and resolution bandwidth was set to at least 1MHz or 1% of the emission bandwidth.



9.3 Test Equipment List and Details

| Manufacturers | Descriptions | Models | Serial Numbers | Calibration Dates | Calibration Interval |
|-----------------------|-------------------------|--------|----------------|------------------------|------------------------|
| Agilent | Analyzer, Spectrum | E4440A | US 42221851 | 2016-06-10 | 1 year |
| Rohde & Schwarz | Generator, Signal | SMIQ03 | 849192/0085 | 2016-07-29 | 2 year |
| Keysight Technologies | Vector Signal Generator | N5182B | MY51350070 | 2015-11-18 | 1 year |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0003 | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0006 | Each Time ¹ | Each Time ¹ |

¹Note: This equipment was calibrated for each test.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

9.4 Test Environmental Conditions

| | |
|--------------------|---------------|
| Temperature: | 23° C |
| Relative Humidity: | 32 % |
| ATM Pressure: | 101.4-102 kPa |


The testing was performed by Jose Martinez 2016-09-14 in the RF Site.

9.5 Test Results


Please refer to the following plots.

Band Edge


Broadband Signal

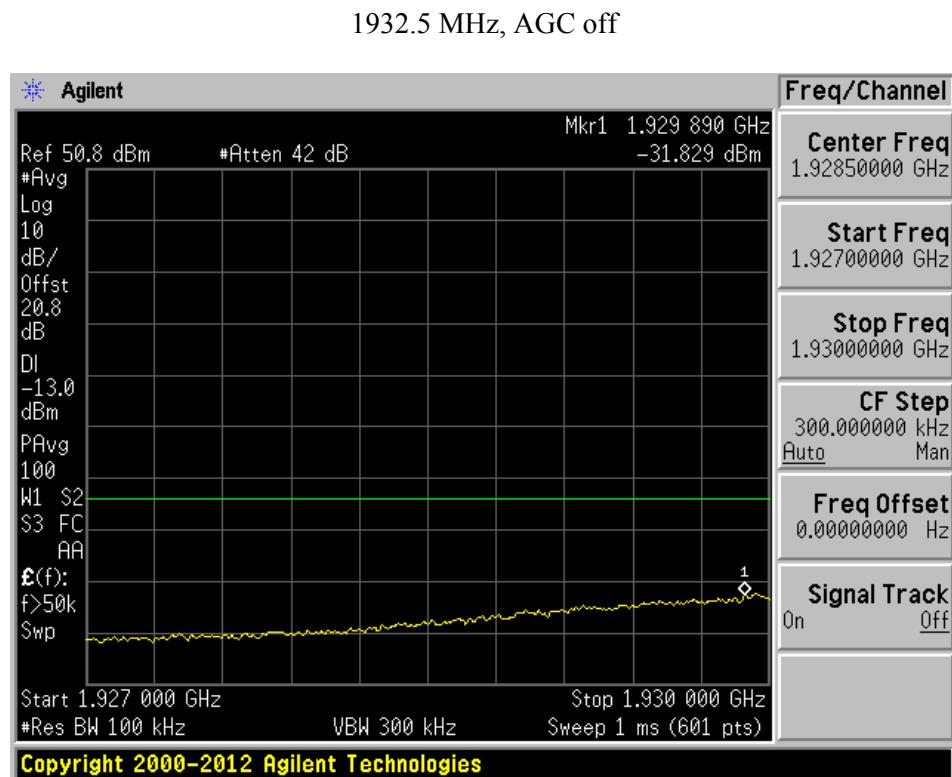


1932.5 MHz, AGC on

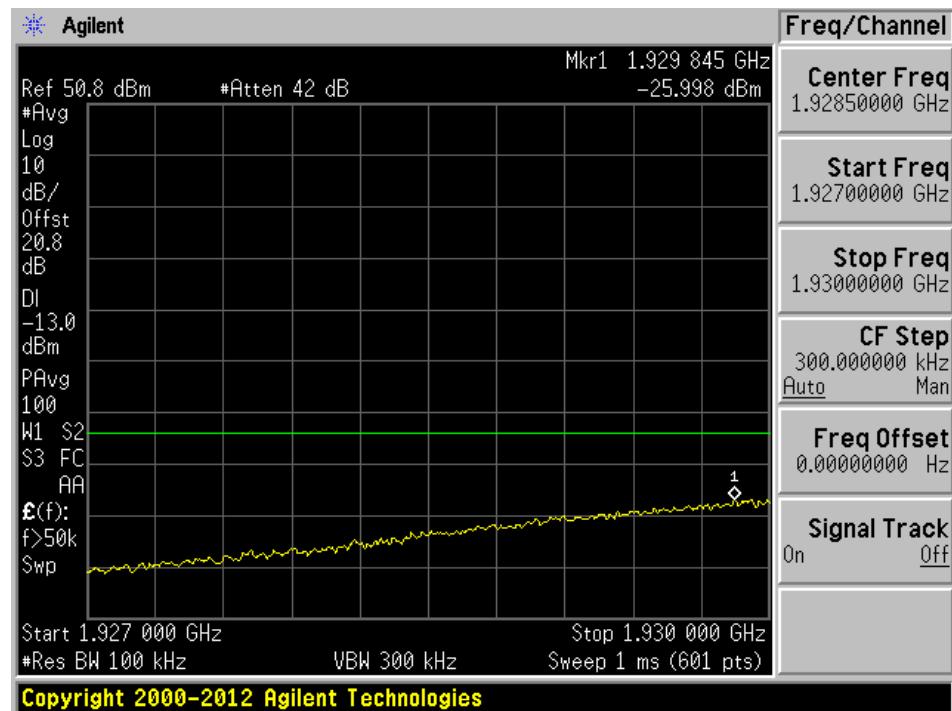

1992.5 MHz, AGC off

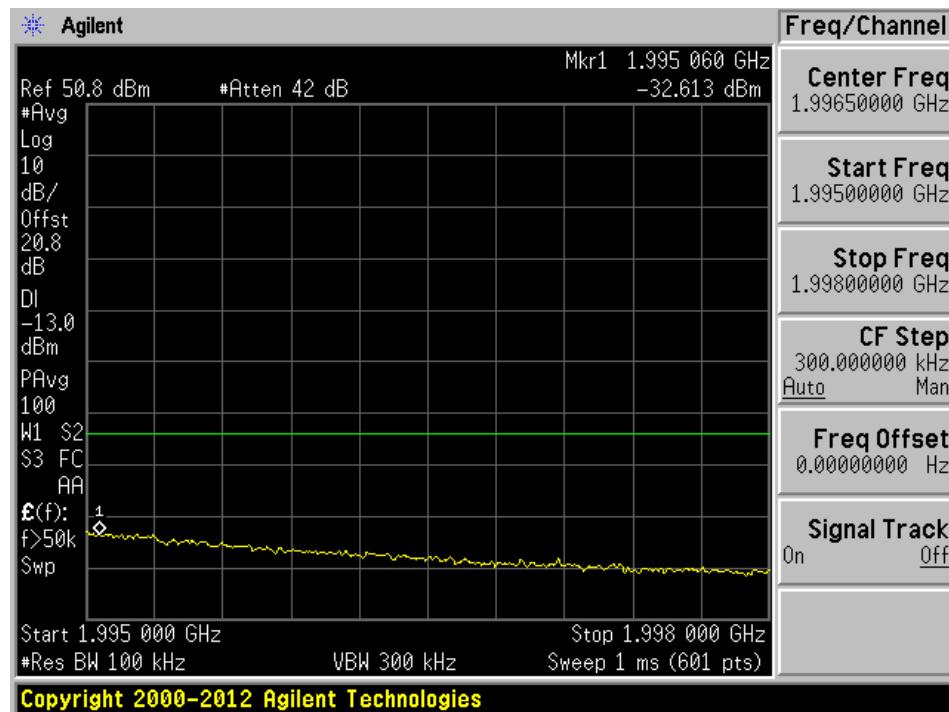


1992.5 MHz, AGC on

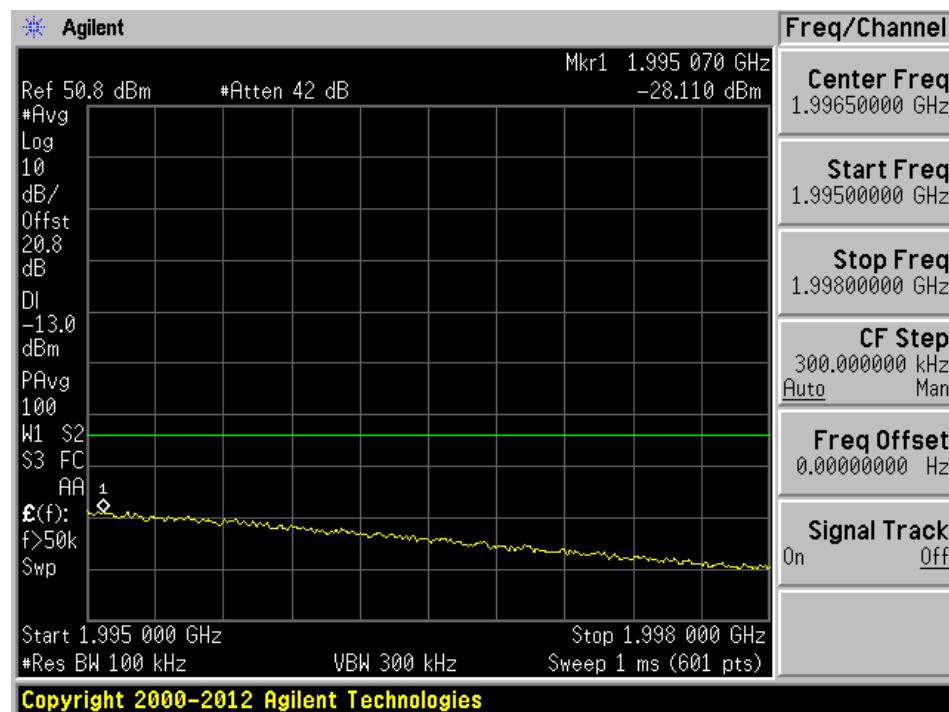


Narrowband Signal


Lower Band Edge, AGC off

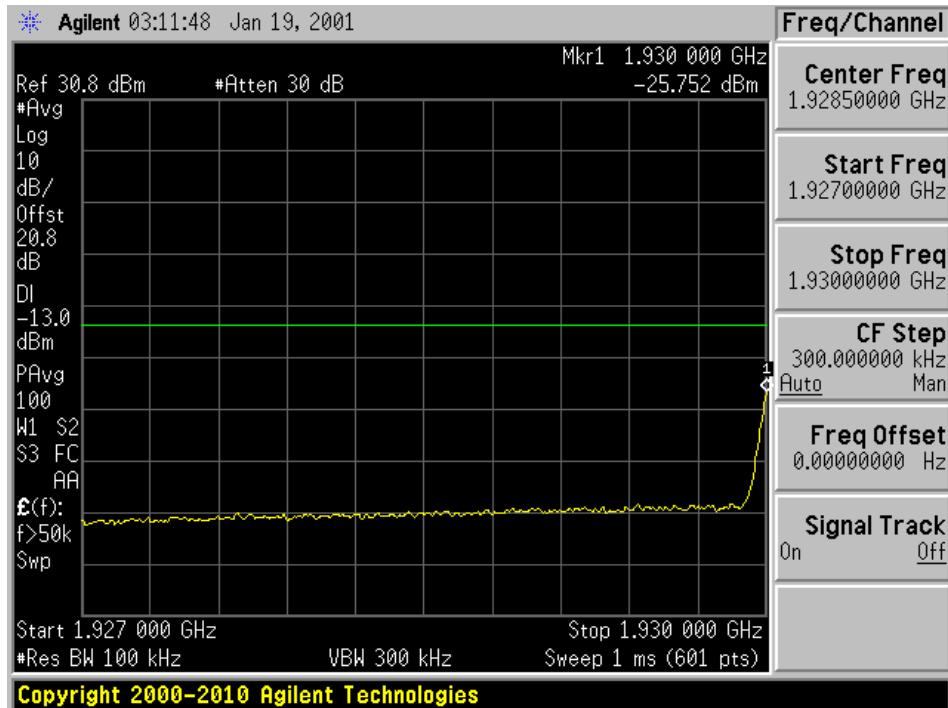


Lower Band Edge, AGC on

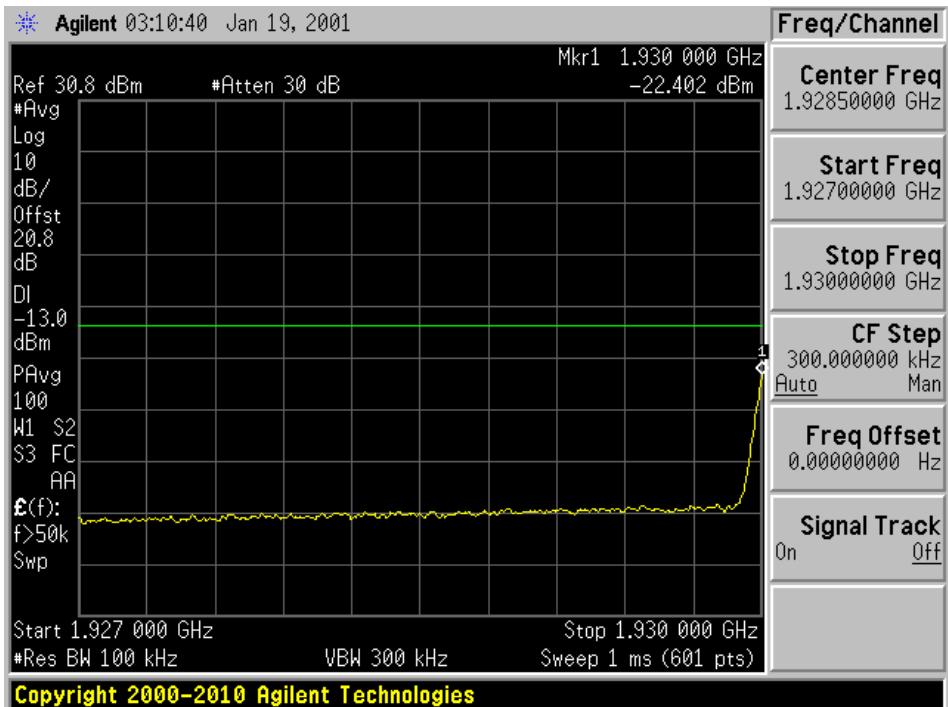

Upper Band Edge, AGC off


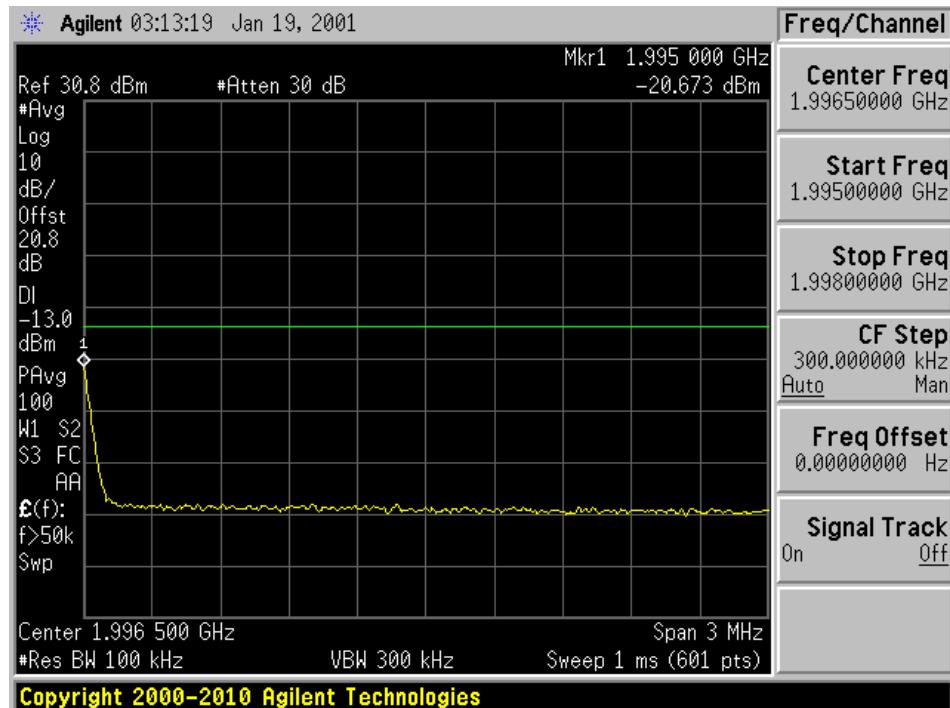


Upper Band Edge, AGC on

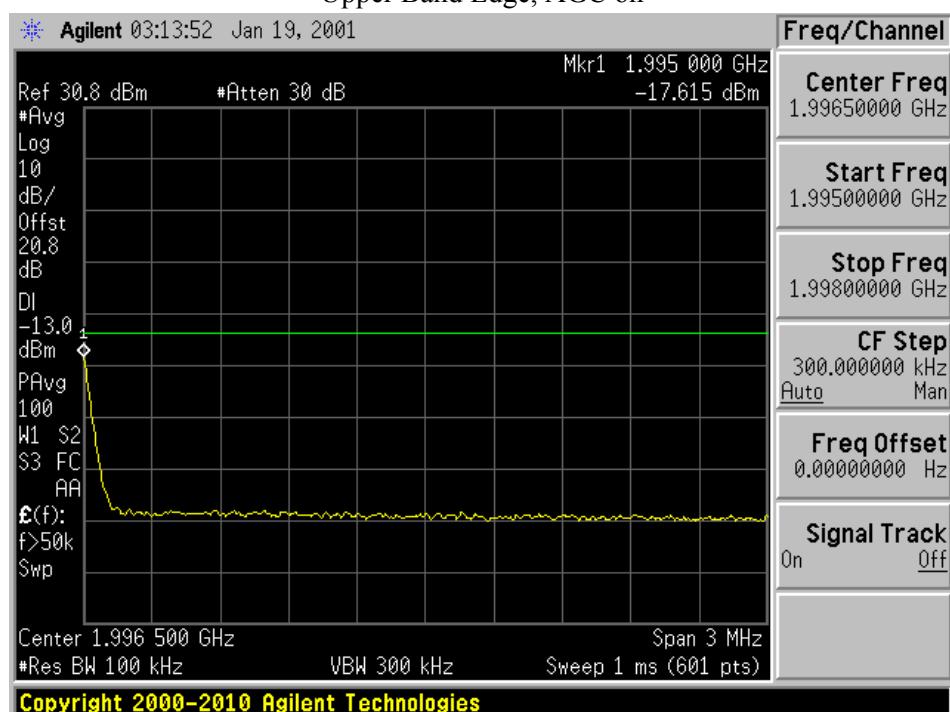


Intermodulation


Broadband Signal

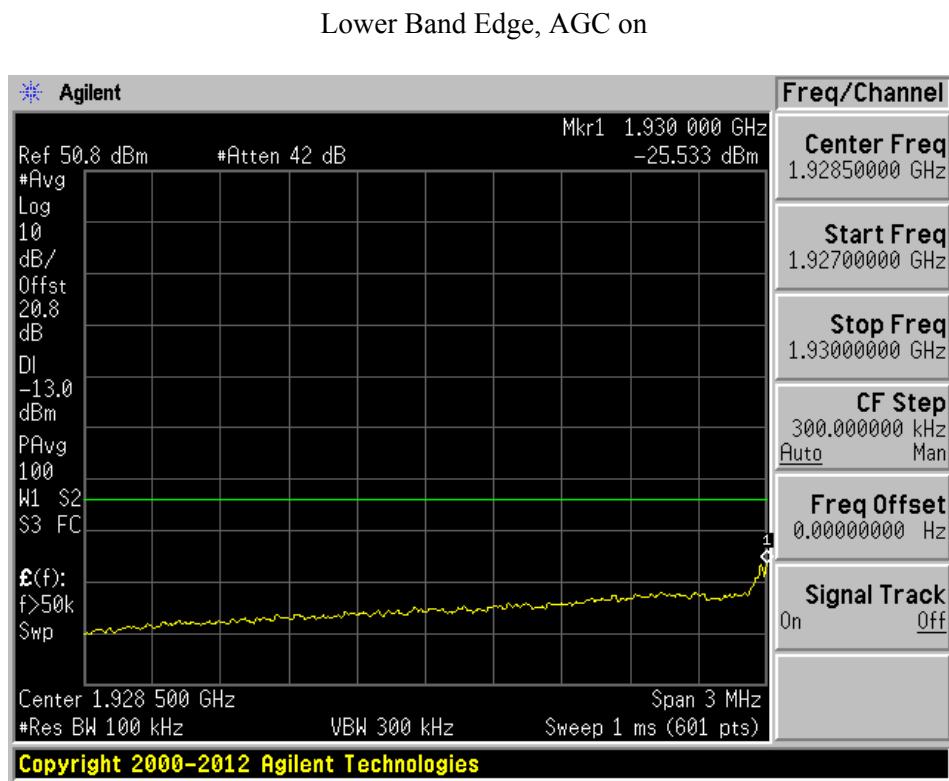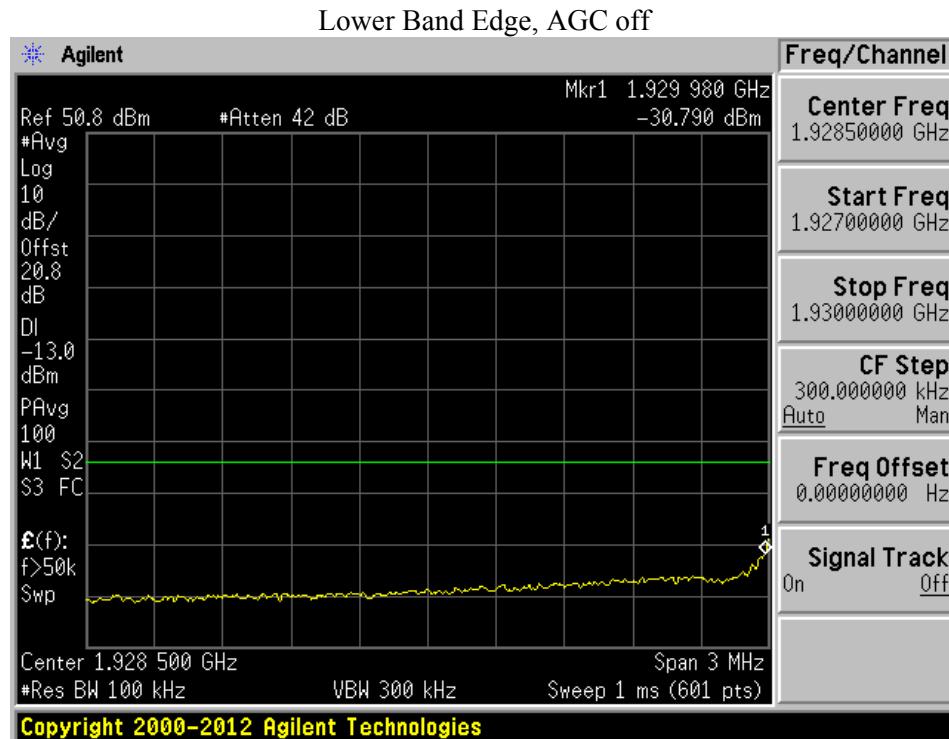

Upper Band Edge, AGC off

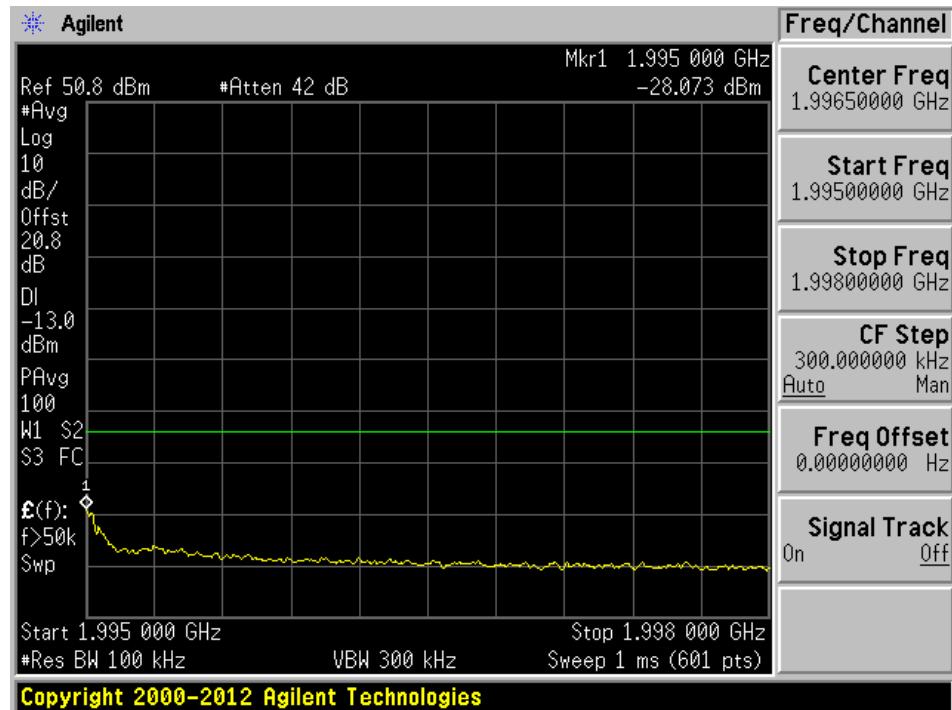


Upper Band Edge, AGC on

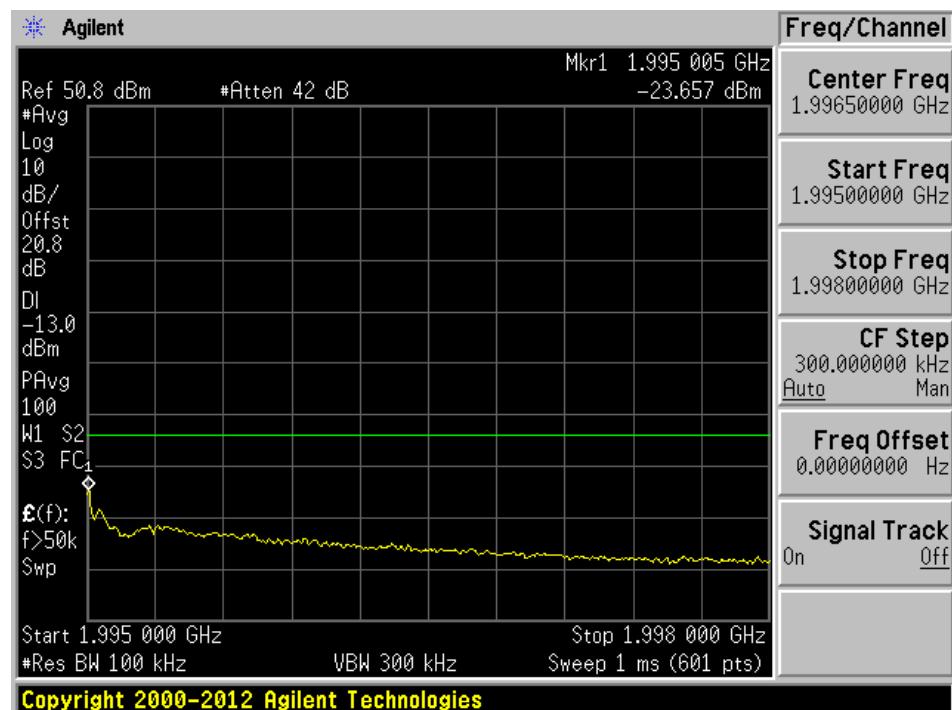


Narrowband Signal


Lower Band Edge, AGC off

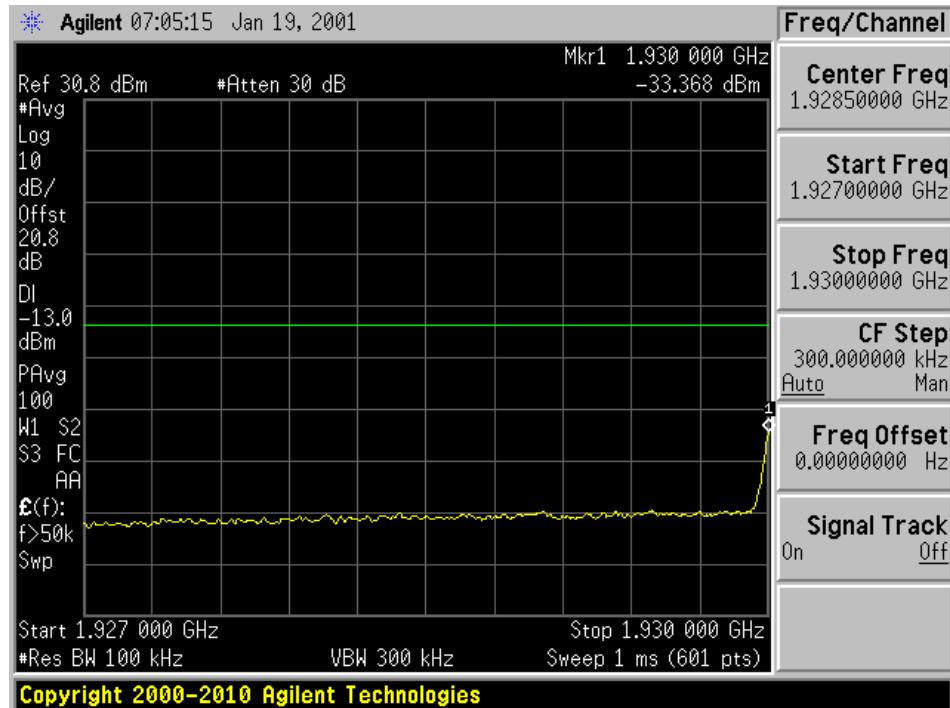


Lower Band Edge, AGC on

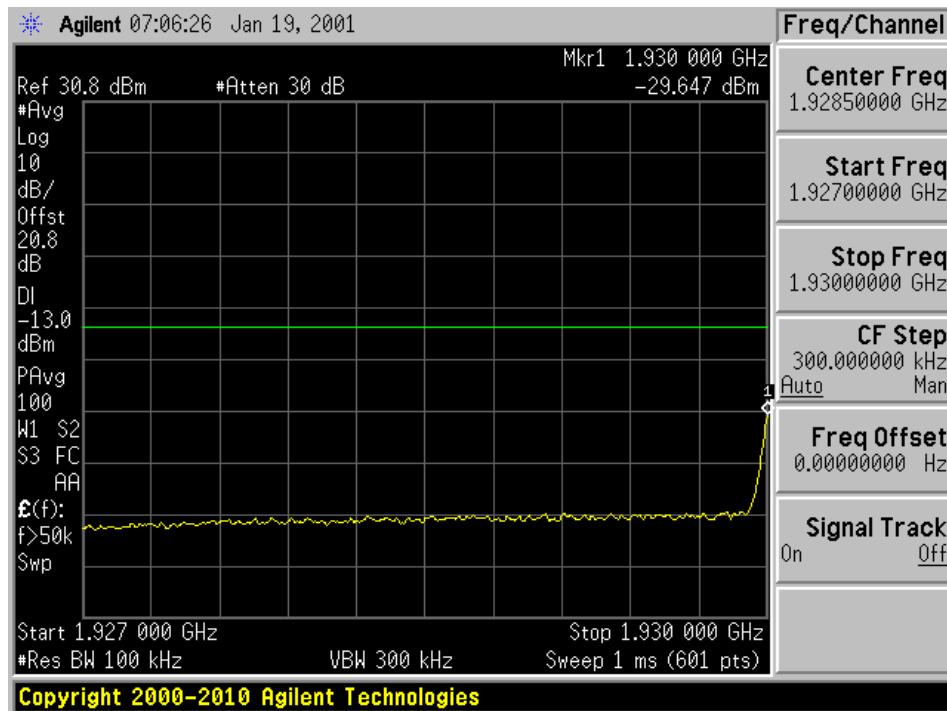

Upper Band Edge, AGC off

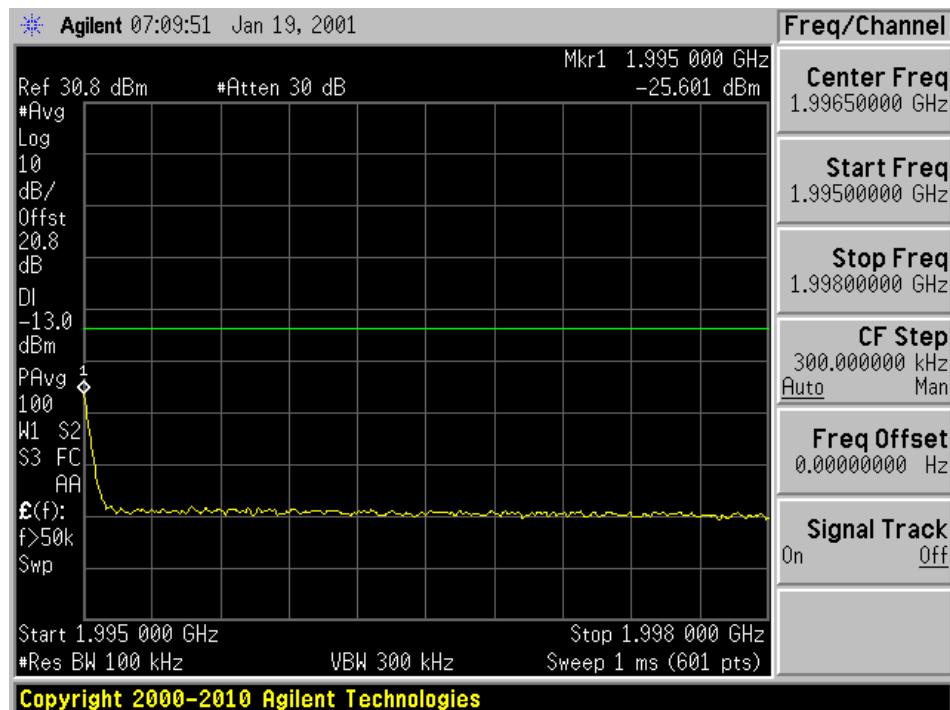

Upper Band Edge, AGC on

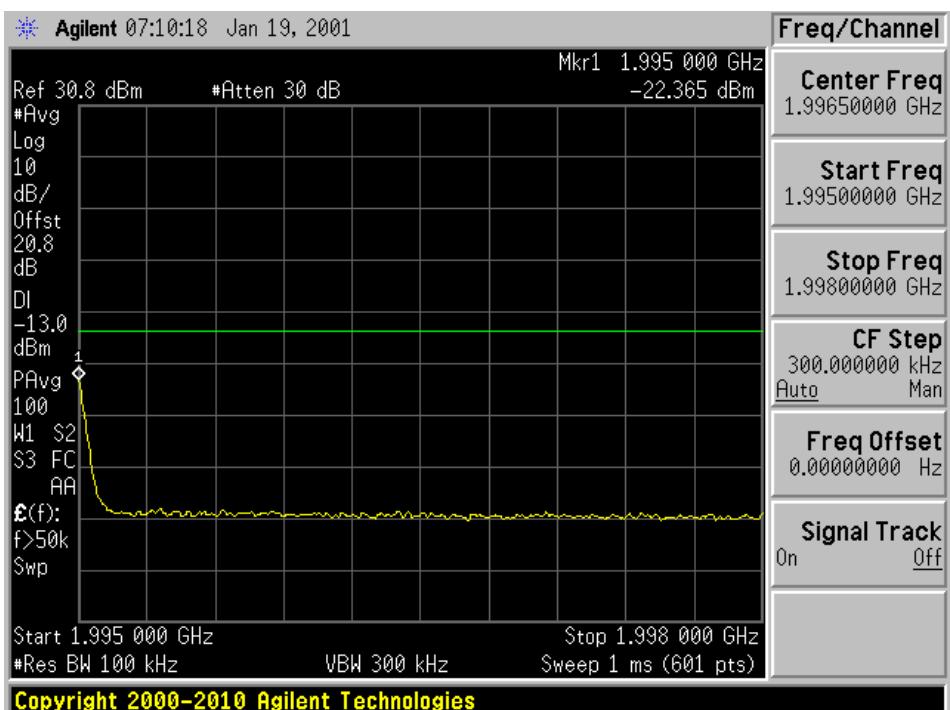

10 FCC §20.21 - Out of Band Rejection

10.1 Applicable Standard

According to FCC Part 20.21, a frequency selective booster shall have -20 dB at the band edge referenced to the gain in the center of the pass band of the booster, where band edge is the end of the licensee's allocated spectrum.

10.2 Test Procedure

KDB 935210 D05, Section 3.3.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The span of the spectrum analyzer was set to be wide enough in order to capture the spectrum of entire operating band.

10.3 Test Equipment List and Details

| Manufacturers | Descriptions | Models | Serial Numbers | Calibration Dates | Calibration Interval |
|-----------------------|-------------------------|--------|----------------|------------------------|------------------------|
| Agilent | Analyzer, Spectrum | E4440A | US 42221851 | 2016-06-10 | 1 year |
| Rohde & Schwarz | Generator, Signal | SMIQ03 | 849192/0085 | 2016-07-29 | 2 years |
| Keysight Technologies | Vector Signal Generator | N5182B | MY51350070 | 2015-11-18 | 1 year |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | 20 dB attenuator | - | - | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0003 | Each Time ¹ | Each Time ¹ |
| - | SMA cable | - | C0006 | Each Time ¹ | Each Time ¹ |

¹*Note: This equipment was calibrated for each test.*

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 9 June 2016) "A2LA Policy on Metrological Traceability".

10.4 Test Environmental Conditions

| | |
|--------------------|---------------|
| Temperature: | 23° C |
| Relative Humidity: | 32 % |
| ATM Pressure: | 101.4-102 kPa |

The testing was performed by Jose Martinez 2016-09-08 in the RF Site.

10.5 Test Results

Please refer to the following plot.

