



Excellence in Compliance Testing

## Certification Test Report

**FCC ID: Z9O-92053007  
IC: 10060A-92053007**

**FCC Rule Part: 15.231  
ISED Canada Radio Standards Specification: RSS-210**

**ACS Report Number: 16-2077.W06.2A**

Manufacturer: Ecolab Inc.  
Model(s): 92053007

Test Begin Date: **December 1, 2016**  
Test End Date: **December 6, 2016**

Report Issue Date: January 12, 2017



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

**Prepared by:**

Thierry Jean-Charles  
EMC Engineer  
Advanced Compliance Solutions, Inc.

**Reviewed by:**

Ryan McGann  
Wireless Program Manager  
Advanced Compliance Solutions, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 16 pages**

## **TABLE OF CONTENTS**

<b>1</b>	<b>GENERAL .....</b>	<b>3</b>
1.1	Purpose.....	3
1.2	Product description .....	3
1.3	Test Methodology and Considerations .....	3
<b>2</b>	<b>TEST FACILITIES .....</b>	<b>4</b>
2.1	Location .....	4
2.2	Laboratory Accreditations/Recognitions/Certifications .....	4
2.3	Radiated & Conducted Emissions Test Site Description.....	5
2.3.1	Semi-Anechoic Chamber Test Site .....	5
2.3.2	Conducted Emissions Test Site Description .....	6
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES.....</b>	<b>6</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT .....</b>	<b>7</b>
<b>5</b>	<b>SUPPORT EQUIPMENT .....</b>	<b>8</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM.....</b>	<b>8</b>
<b>7</b>	<b>SUMMARY OF TESTS.....</b>	<b>9</b>
7.1	Antenna Requirement – FCC: Section 15.203 .....	9
7.2	20dB / 99% Bandwidth: FCC: Section 15.231(c) / ISED Canada RSS-210 A.1.3 .....	9
7.2.1	Measurement Procedure.....	9
7.2.2	Measurement Results .....	9
7.3	Radiated Spurious Emissions – FCC: Section 15.231(b) / ISED Canada: RSS-210 A.1.2	11
7.3.1	Measurement Procedure.....	11
7.3.2	Duty Cycle Correction .....	11
7.3.3	Measurement Results .....	11
7.3.4	Sample Calculation: .....	13
7.4	Periodic Operation – FCC: CFR 47 15.231(a) / ISED Canada: RSS-210 A.1.1 .....	14
7.4.1	Test Methodology.....	14
7.4.2	Test Results .....	14
<b>8</b>	<b>CONCLUSION.....</b>	<b>15</b>

## 1 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-210.

### 1.2 Product description

The **Ecolab Inc.** model 92053007 is installed in NEXA soap/sanitizer dispenser to monitor and report dispenser activations by user. Users are identified by a badge that they wear. The device includes 3 distinct radios operating at 125 kHz, 433.9 MHz and 2405 MHz respectively. The 433.9 MHz and 2405 MHz radios are capable of transmitting simultaneously.

#### Technical Details

Frequency of Operation: 433.9 MHz

Number of Channels: 1

Modulation: FSK

Data Rate: 250 kbps

Antenna / Gain: 1/4 Wave Monopole Antenna / -2.3 dBi

Input Voltage: 3 VDC (Size AA battery)

Manufacturer Information:

Ecolab Inc.

370 Wabasha St N

St. Paul, MN 55102

Test Sample Serial Number(s): ACS#1

Test Sample Condition: The device was provided in good operating condition without any noticeable physical defects.

### 1.3 Test Methodology and Considerations

The EUT was evaluated for radiated emissions for the 433.9 MHz transmitter. The RF output power setting of the device for the evaluation was not configurable and was not provided. The evaluation of the 125 kHz and 2405 MHz transceivers as well as the assessment to the unintentional emissions requirements are documented in separate test reports.

The device is battery operated only without any provision for connection to the AC mains. The device is exempted from the power line conducted emissions requirements.

The device was evaluated for radiated emissions in the orientation of typical installation. The device was further evaluated for intermodulation products of the co-located 433.9 MHz and 2405 MHz radios transmitting simultaneously. All intermodulation products generated by co-transmission of these radios were found to be compliant to the limits of FCC Section 15.209.

The timing parameters were measured via RF coupling to a spectrum analyzer using a near field probe.

## 2 TEST FACILITIES

### 2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.  
3998 FAU Blvd, Suite 310  
Boca Raton, Florida 33431  
Phone: (561) 961-5585  
Fax: (561) 961-5587  
[www.acstestlab.com](http://www.acstestlab.com)

FCC Test Firm Registration #: 475089  
ISED Canada Lab Code: 4175C

### 2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

## 2.3 Radiated & Conducted Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1060 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

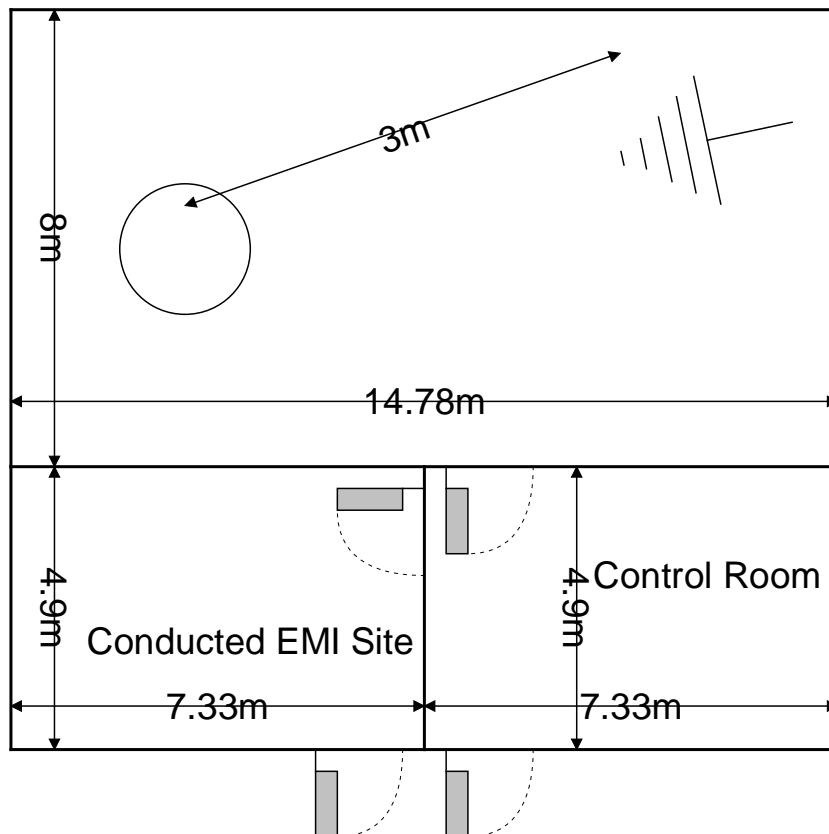


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

### 2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m<sup>3</sup>. The power line conducted emission site includes two LISNs: a Solar Model 8028-50 50 Ω/50 μH and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

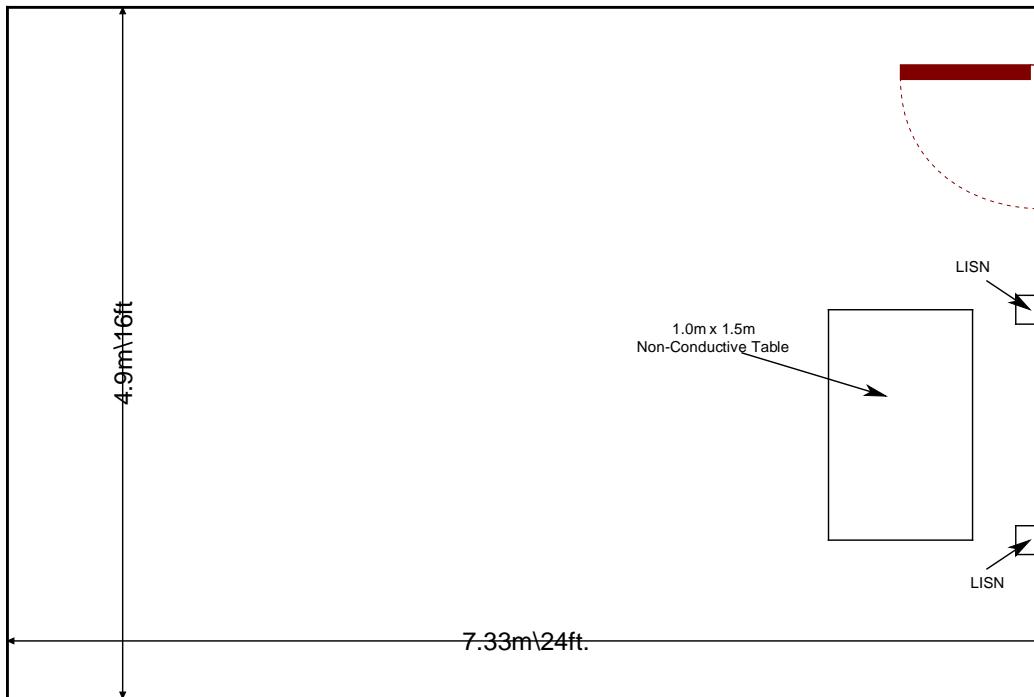


Figure 2.3.2-1: AC Mains Conducted EMI Site

## 3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2016
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-210 - Licence-Exempt Radio Apparatus: Category I Equipment, Issue 9 August 2016.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
22	Agilent	8449B	Amplifiers	3008A00526	7/14/2016	7/14/2018
78	EMCO	6502	Antennas	9104-2608	5/11/2016	5/11/2018
283	Rohde & Schwarz	FSP40	Spectrum Analyzers	1000033	7/21/2016	7/21/2018
486	Hewlett Packard	8591E	Analyzers	3543A04709	7/12/2016	7/12/2017
523	Agilent	E7405	Spectrum Analyzers	MY45103293	12/26/2014	12/26/2016
2002	EMCO	3108	Antennas	2147	11/19/2015	11/19/2017
2004	EMCO	3146	Antennas	1385	11/19/2015	11/19/2017
2006	EMCO	3115	Antennas	2573	4/14/2015	4/14/2017
2011	Hewlett-Packard	HP 8447D	Amplifiers	2443A03952	11/2/2016	11/2/2017
2073	Mini Circuits	NHP-800	Filter	10247	12/1/2016	12/1/2017
2086	Merimac	FAN-6-10K	Attenuators	23148-83-1	11/2/2016	11/2/2017
2094	Mini Circuits	SHP-1000+	Filter	R UU27401137	3/25/2016	3/25/2017
2095	ETS Lindgren	TILE4! - Version 4.2.A	Software	85242	NCR	NCR
2111	Aeroflex Inmet	40AH2W-20	Attenuator	2111	7/20/2016	7/20/2017
2112	Teledyne Storm Products	921-0101-036	Cables	12-06-698	11/2/2016	11/2/2017
2121	ACS Boca	Radiated Cable Set	Cable Set	2121	8/1/2016	8/1/2017

**NCR=No Calibration Required**

## 5 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment

Item #	Type Device	Manufacturer	Model/Part #	Serial #
1	EUT	Ecolab Inc.	92053007	ACS#1

Table 5-2: Cable Description

Cable #	Cable Type	Length	Shield	Termination
	The device is standalone with no provision for connection to accessory equipment			

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

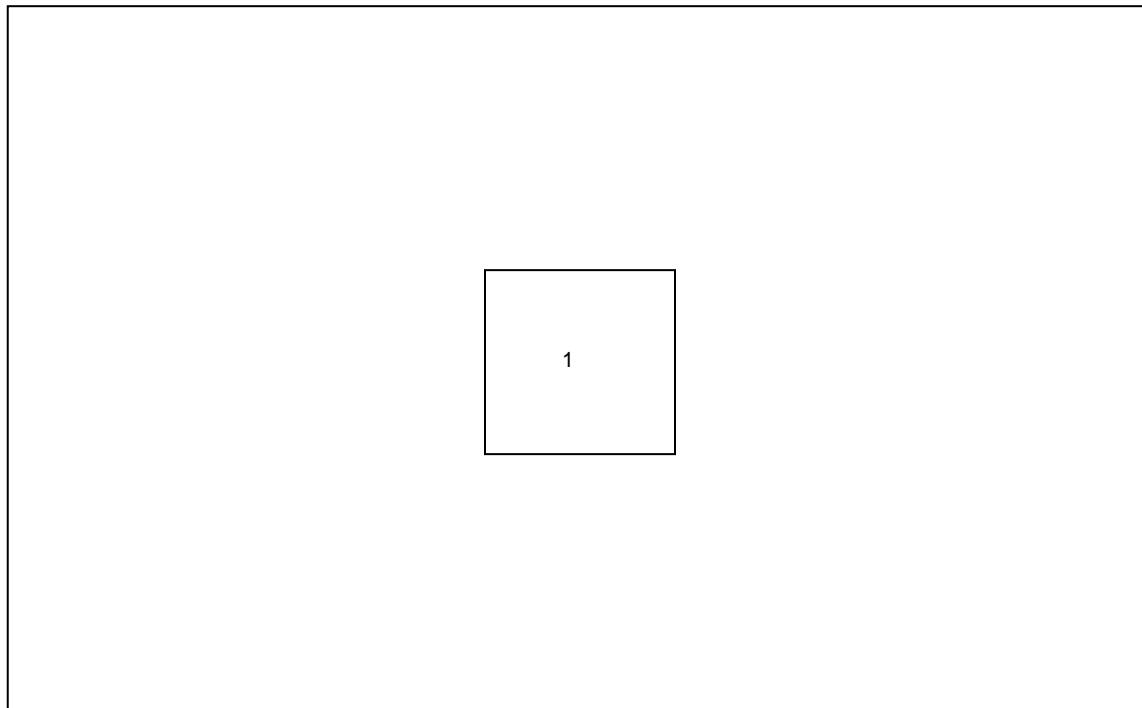


Table 6-1: EUT Test Setup

## 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement – FCC: Section 15.203

The device uses an internal -2.3 dBi monopole antenna that is directly soldered to the PCB. The antenna is not detachable thus meeting the requirements of FCC Section 15.203.

### 7.2 20dB / 99% Bandwidth: FCC: Section 15.231(c) / ISED Canada RSS-210 A.1.3

#### 7.2.1 Measurement Procedure

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected.

The RBW was set from 1% to 5% of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission, including the emissions skirts. The RBW was set between 1% and 5% of the estimated bandwidth. The occupied 99% bandwidth was measured by using a delta marker at the lower and upper frequencies leading to 0.5% of the total power while using a sample detector.

#### 7.2.2 Measurement Results

Results are shown below in Table 7.2.2-1 and Figures 7.2.2-1 through 7.2.2-2

Table 7.2.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]
433.9	525.604	515.732

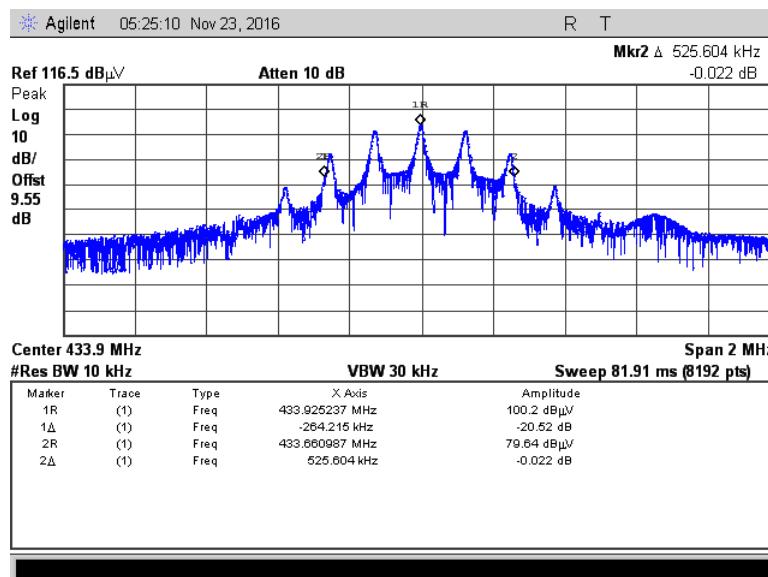


Figure 7.2.2-1: 20dB BW

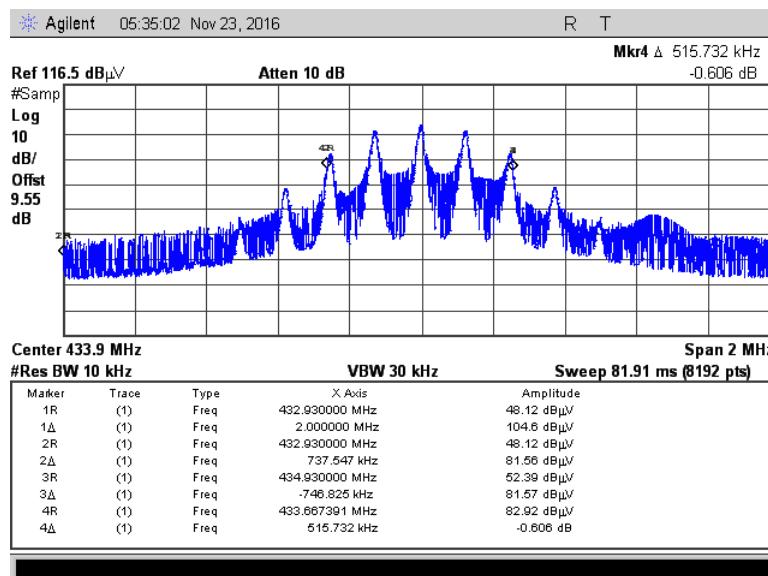


Figure 7.2.2-2: 99% OBW

### 7.3 Radiated Spurious Emissions – FCC: Section 15.231(b) / ISED Canada: RSS-210 A.1.2

#### 7.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 9 kHz to 4.5GHz, 10 times the highest fundamental frequency.

For measurements below 30 MHz, the receive antenna height was set to 1m and the EUT was rotated through 360 degrees. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements made with RBW and VBW of 1 MHz and 3MHz respectively.

#### 7.3.2 Duty Cycle Correction

A Duty Cycle Correction of 1.312% corresponding to -37.64 dB was applied to the average measurements for the corrected average results. The justification of the duty cycle is provided in the equipment's theory of operation document.

#### 7.3.3 Measurement Results

Radiated spurious emissions found in the band of 9 kHz to 4.5GHz are reported in the Table below.

**Table 7.3.3-1: Radiated Spurious Emissions Tabulated Data**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	avg			pk	avg	pk	avg	pk	avg
<b>Fundamental Frequency</b>										
433.94	103.80	103.30	H	-9.60	94.20	56.06	100.8	80.8	6.6	24.7
433.94	97.26	96.73	V	-9.60	87.66	49.49	100.8	80.8	13.1	31.3
<b>Spurious Emissions</b>										
867.88	41.55	38.14	H	-0.92	40.63	-0.42	80.8	60.8	40.2	61.2
867.88	38.34	34.77	V	-0.92	37.42	-3.79	80.8	60.8	43.4	64.6
1301.76	53.71	48.99	H	-5.64	48.07	5.71	74	54	25.9	48.3
1301.76	57.09	53.28	V	-5.64	51.45	10.00	74	54	22.5	44.0
1735.68	44.13	34.79	H	-2.97	41.16	-5.82	80.8	60.8	39.6	66.6
1735.68	48.89	42.03	V	-2.97	45.92	1.42	80.8	60.8	34.9	59.4
2169.6	57.27	50.75	H	-0.63	56.64	12.48	80.8	60.8	24.2	48.3
2169.6	65.79	59.94	V	-0.63	65.16	21.67	80.8	60.8	15.6	39.1
2603.52	41.81	29.46	H	1.15	42.96	-7.03	80.8	60.8	37.8	67.8
2603.52	43.67	32.30	V	1.15	44.82	-4.19	80.8	60.8	36.0	65.0
3037.44	51.26	42.53	H	3.01	54.27	7.90	80.8	60.8	26.5	52.9
3037.44	51.97	43.03	V	3.01	54.98	8.40	80.8	60.8	25.8	52.4
3471.36	42.01	30.10	H	4.83	46.84	-2.71	80.8	60.8	34.0	63.5
3471.36	40.85	27.77	V	4.83	45.68	-5.04	80.8	60.8	35.1	65.8
3905.28	45.59	34.60	H	6.23	51.82	3.18	74	54	22.2	50.8
3905.28	44.06	32.84	V	6.23	50.29	1.42	74	54	23.7	52.6
4339.2	40.79	27.72	H	7.08	47.87	-2.84	74	54	26.1	56.8
4339.2	39.54	27.09	V	7.08	46.62	-3.47	74	54	27.4	57.5

**Note:**

- The fundamental emissions were measured using RBW = 1 MHz which is greater than the measured occupied bandwidth.
- The average measurements were further corrected using a duty cycle correction factor of -37.64 dB.

**7.3.4 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

CF <sub>T</sub>	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R <sub>U</sub>	=	Uncorrected Reading
R <sub>C</sub>	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

**Example Calculation: Peak**

$$\text{Corrected Level: } 53.71 + (-5.64) = 48.07 \text{ dB}\mu\text{V/m}$$

$$\text{Margin: } 74 \text{ dB}\mu\text{V/m} - 48.07 \text{ dB}\mu\text{V/m} = 25.9 \text{ dB}$$

**Example Calculation: Average**

$$\text{Corrected Level: } 48.99 + (-5.64) - 37.64 = 5.71 \text{ dB}\mu\text{V}$$

$$\text{Margin: } 54 \text{ dB}\mu\text{V} - 5.71 \text{ dB}\mu\text{V} = 48.3 \text{ dB}$$


## 7.4 Periodic Operation – FCC: CFR 47 15.231(a) / ISED Canada: RSS-210 A.1.1

### 7.4.1 Test Methodology

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released. A transmitter activated automatically shall cease transmission within 5 seconds after activation. The transmitter was activated automatically and was evaluated using a spectrum analyzer at zero span.


### 7.4.2 Test Results

The results are shown below.

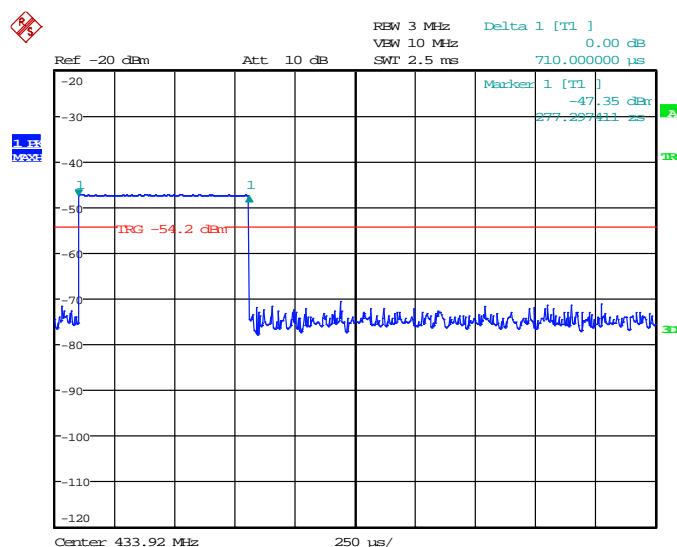

Date: 6.DEC.2016 16:56:18

Figure 7.4.2-1: Periodic Operation – 2.5 ms

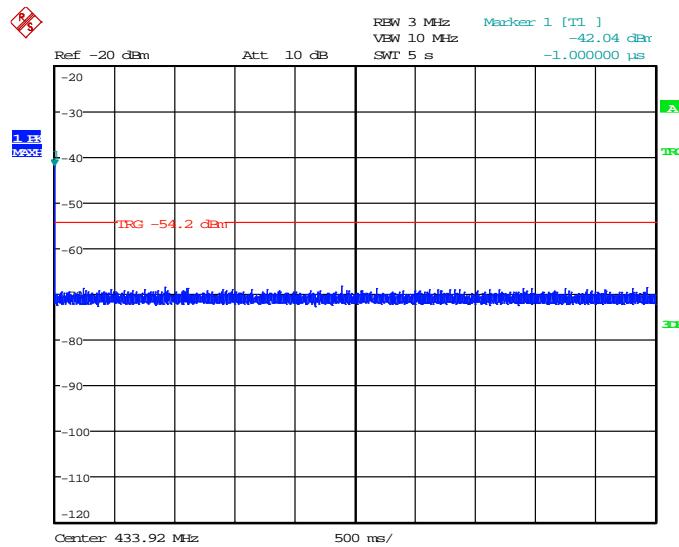

Date: 6.DEC.2016 17:02:06

**Figure 7.4.2-2: Periodic Operation – 5 Seconds**

## 8 CONCLUSION

In the opinion of ACS, Inc. the model 92053007, manufactured by Ecolab Inc. meets the requirements of FCC Part 15 subpart C and ISED Canada's Radio Standards Specification RSS-210.

**END REPORT**