

www.gakkiku.com



Gakkiku Technology

Gakkiku Technology Company
 Flat B, 5/F., Selwyn Factory Building,
 No. 404 Kwun Tong Road,
 Kwun Tong, Kowloon,
 Hong Kong
 Tel: (852) 8113 2281
 Fax: (852) 2797 0192
 E-mail: info@gakkiku.com

Test Report

Applicant	Cache Sales, LLC
Address	1189 W. 1700 N., Logan, UT, 84321, U.S.A.
FCC ID Number	FCC ID: ZEZ1613T27
Brand Name	None
Model Number(s)	1613, 1625
Product Description	26.96-27.28 MHz Wireless Remote Control Toy - TX
Operating Frequency	27.145 MHz
Rules/Standards	Part 15.227 of the FCC Rules, RSS-310 Issue 3 and RSS-Gen Issue 3 of the Industry Canada
Received Date	22nd December, 2011
Tested Date	27th December, 2011
Approved by	Dick Chan (Director of Gakkiku)
Tested by	Lahm Peng (Engineer of SEM.Test)
Signed by	 Jandy So (Manager of SEM.Test)
Report Number	GKK201112220C
Test Results	<input checked="" type="checkbox"/> PASSED <input type="checkbox"/> FAILED

GENERAL

The report is written by Gakkiku Technology Company. The tested device complies with the general approval requirements of the FCC Rules and the Industry Canada as identified in this test report.

TEST LOCATION

The tested device was tested at the test site of the SEM.Test Compliance Service Co., Ltd., 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, 518101, Guangdong, China. The FCC Recognized 2.948 Listed Test Firm Registration Number is 994117. The Industry Canada IC OATS Filing Number/Assigned Code is 7673A.

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	4
1.3 RELATED SUBMITTAL(S)/GRANT(S)	4
1.4 TEST METHODOLOGY	5
1.5 EUT EXERCISE SOFTWARE	5
1.6 ACCESSORIES EQUIPMENT LIST AND DETAILS	5
1.7 EUT CABLE LIST AND DETAILS	5
2. SUMMARY OF TEST RESULTS	6
3. PART 15.203 - ANTENNA REQUIREMENT	7
3.1 STANDARD APPLICABLE.....	7
3.2 TEST RESULT.....	7
4. PART 15.205, 15.209, 15.227 & RSS-310 ISSUE 3 §3.8 - RADIATED EMISSION.....	8
4.1 MEASUREMENT UNCERTAINTY	8
4.2 STANDARD APPLICABLE.....	8
4.3 TEST EQUIPMENT LIST AND DETAILS	8
4.4 TEST PROCEDURE.....	8
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	9
4.6 ENVIRONMENTAL CONDITIONS	9
4.7 SUMMARY OF TEST RESULTS/PLOTS	9
5. PART 15.227(B) - OUT OF BAND EMISSIONS	12
5.1 STANDARD APPLICABLE.....	12
5.2 TEST EQUIPMENT LIST AND DETAILS	12
5.3 TEST PROCEDURE.....	12
5.4 ENVIRONMENTAL CONDITIONS	12
5.5 SUMMARY OF TEST RESULTS/PLOTS	13

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Cache Sales, LLC
Address of applicant: 1189 W. 1700 N.,
Logan, UT, 84321, U.S.A.

Manufacturer: Cache Sales, LLC
Address of manufacturer: 1189 W. 1700 N.,
Logan, UT, 84321, U.S.A.

General Description of E.U.T

Items	Description
EUT Description:	26.96-27.28 MHz Wireless Remote Control Toy - TX
Trade Name:	None
Model No.:	1613, 1625
Rated Voltage:	DC 9V Battery
Frequency Range:	27.145 MHz
Antenna Type:	Fixed Antenna

For more information refer to the circuit diagram form and the user's manual.

The test data is gathered from a production sample, provided by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of the Cache Sales, LLC in accordance with Part 15, Subpart C, and Part 15.203, 15.205, 15.209 & 15.227 of the Federal Communication Commissions Rules and RSS-310 Issue 3: Spectrum Management Telecommunications Radio Standards Specification, Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment sets out standard requirements for low-power licence-exempt radiocommunication devices that are certification exempt.

The objective is to determine compliance with Part 15, Subpart C, and Part 15.203, 15.205, 15.209 & 15.227 and RSS-310 Issue 3 & RSS-Gen Issue 3 of the Industry Canada

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard Institute for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.5 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the whole system is on.

1.6 Accessories Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

1.7 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC RULES INDUSTRY CANADA	DESCRIPTION OF TEST	RESULT
Part 15.203 RSS-Gen Issue 3 §7.1.4	Antenna Requirement	Compliant
Part 15.205 §3.12 Table 1	Restricted Band of Operation	Compliant
Part 15.209 §3.12 Table 2 & Table 3	Radiated Emission Limit	Compliant
Part 15.227(a) §3.8	Field Strength	Compliant
Part 15.227(b) §3.12 Table 2 & Table 3	Out of Band Emission	Compliant

3. Part 15.203 - ANTENNA REQUIREMENT

3.1 Standard Applicable

According to Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a fixed antenna, fulfill the requirement of this section.

4. Part 15.205, 15.209, 15.227 & RSS-310 Issue 3 §3.8 - RADIATED EMISSION

4.1 Measurement Uncertainty

Based on NIS 81, the Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

4.2 Standard Applicable

According to Part 15.227(a), the field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Part 15.35 for limiting peak emissions apply.

According to RSS-310 Issue 3 §3.8, the field strength shall not exceed 10 millivolts/m measured at 3 metres (equivalent with an averaging or a CISPR quasi-peak detector (equivalent to 30 μ W e.i.r.p.)).

According to Part 15.227(b), the field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Part 15.209.

According to RSS-310 Issue 3 §3.8, the field strength of any emissions which appear outside of this band shall apply Tables 2 and 3 limits.

4.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2011-04-16	2012-04-15
EMI Test Receiver	R&S	ESVB	825471/005	2011-08-12	2012-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2011-08-12	2012-08-11
RF Switch	EM	EMSW18	SW060023	2011-08-12	2012-08-11
Pre-amplifier	Agilent	8447F	3113A06717	2011-08-12	2012-08-11
Pre-amplifier	Compliance Direction	PAP-0118	24002	2011-08-12	2012-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2011-07-21	2012-07-20
Horn Antenna	ETS	3117	00086197	2011-07-21	2012-07-20
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2011-07-21	2012-07-20


Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

4.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the limits of Part 15.205, 15.227(a) & 15.209 and RSS-310 Issue 3 §3.8 and 3.12.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

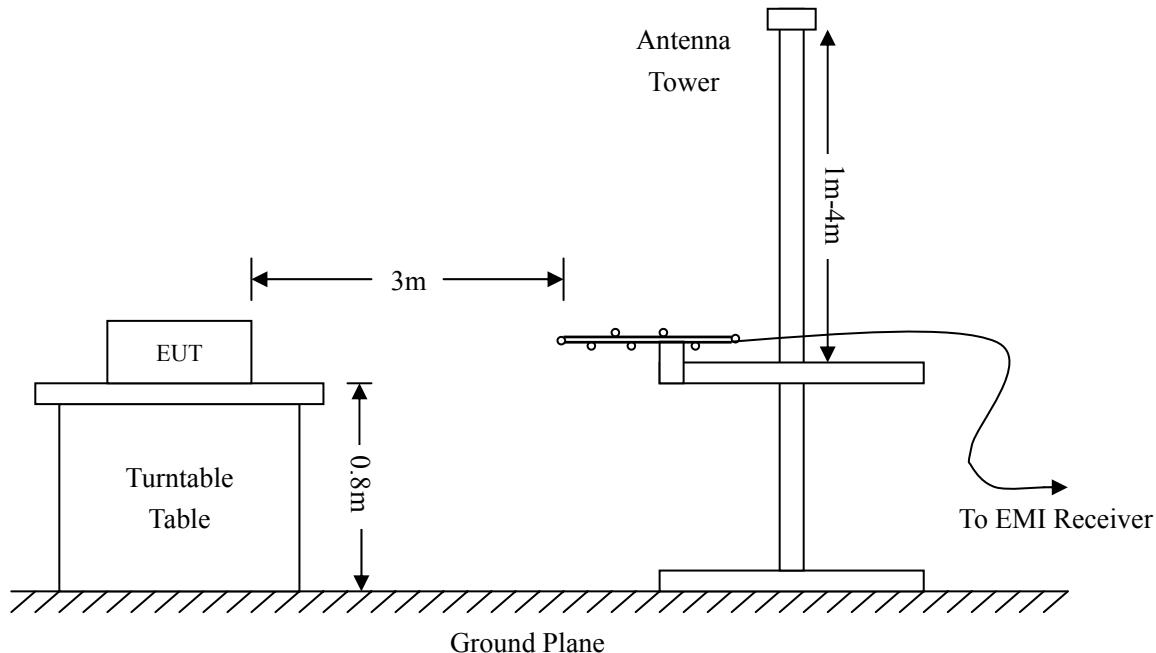

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit of Part 15 (RSS-310 Issue 3)}$$

4.6 Environmental Conditions

Temperature:	26°C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

4.7 Summary of Test Results/Plots

According to the data below, the standards of Part 15.205, 15.209 & 15.227 and RSS-310 Issue 3, and had the worst margin of:


-5.19 dB μ V at 958.7943 MHz in the Vertical polarization, 9 kHz to 1 GHz, 3 Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Test Mode: Transmitting


Plot of Radiated Emission Test

Horizontal:

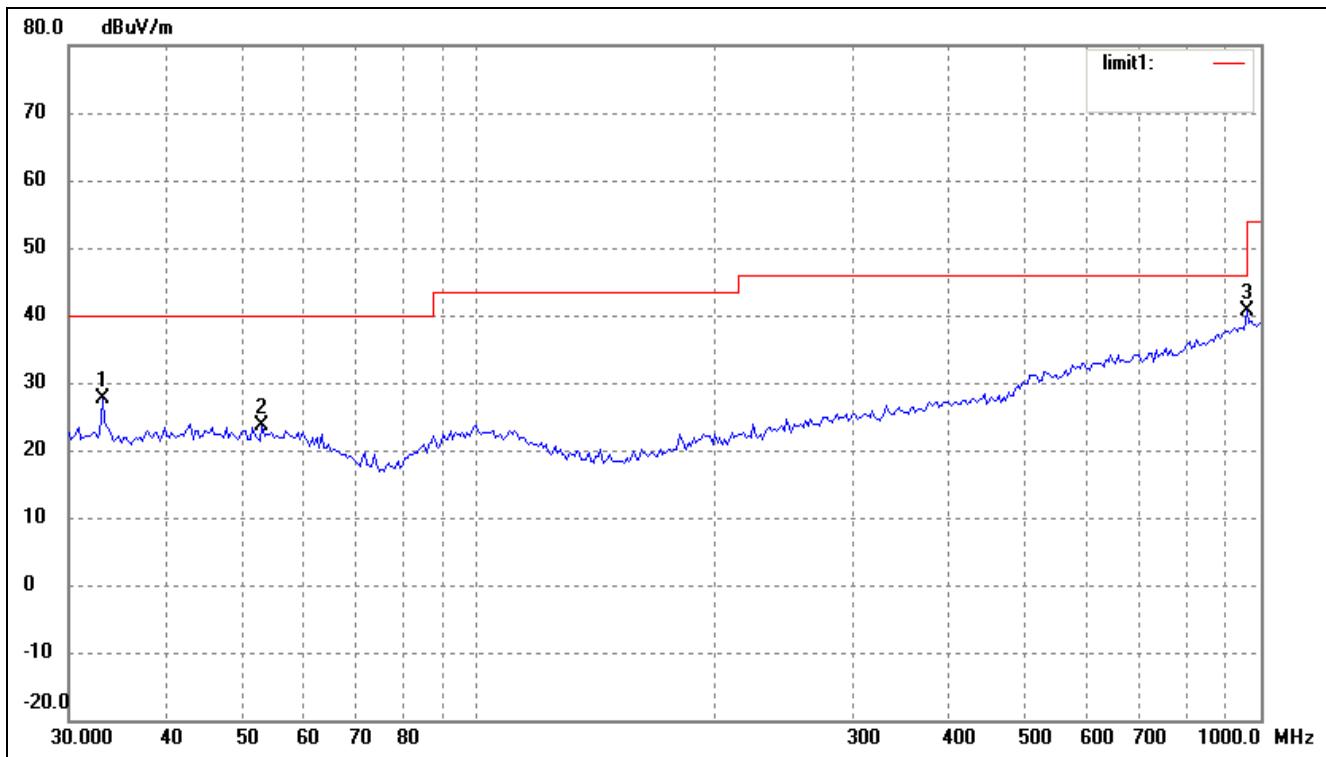

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
Fundamental	27.145	57.51	6.85	64.36	100.00	-35.64	305	100	Peak
Fundamental	27.145	54.25	6.85	61.10	80.00	-18.90	305	100	Ave
1	33.0950	20.94	6.77	27.71	40.00	-12.29	64	100	Peak
2	52.9453	15.67	7.85	23.52	40.00	-16.48	57	100	Peak
3	958.7943	18.74	21.98	40.72	46.00	-5.28	58	100	Peak

Vertical:

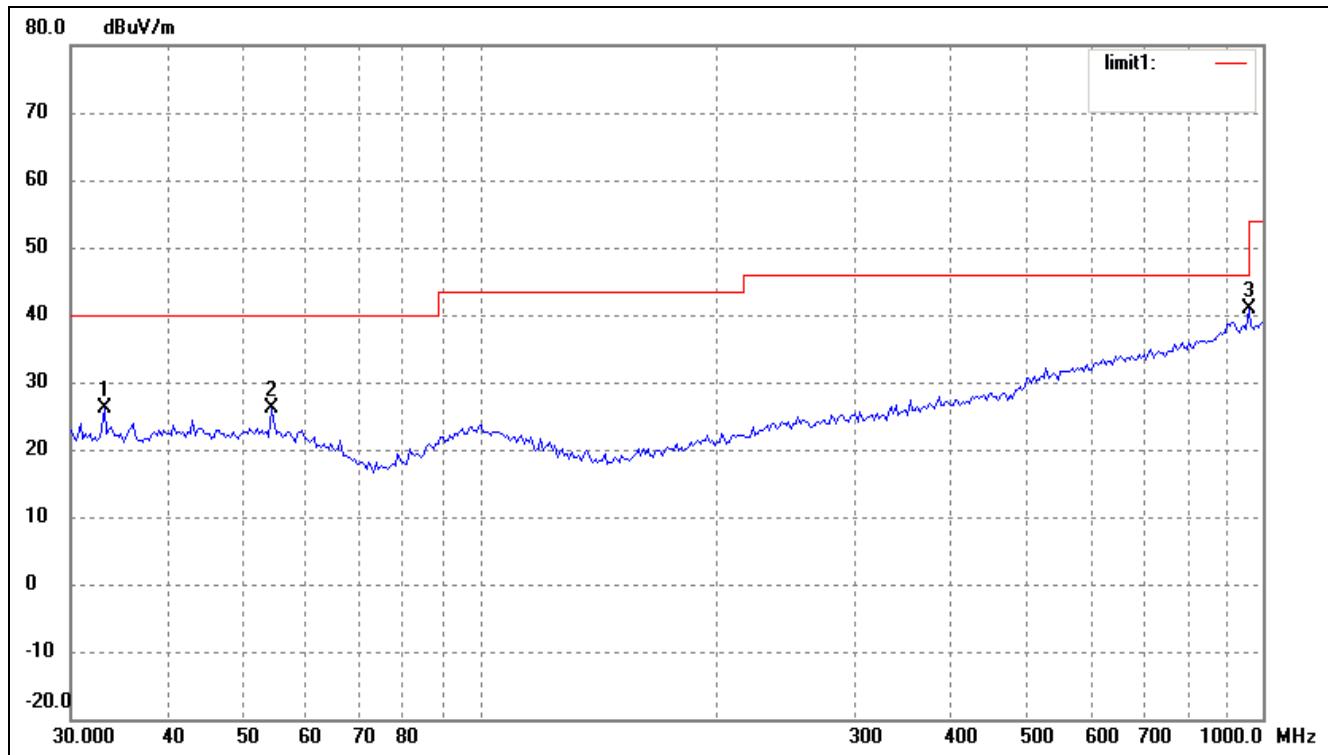

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
Fundamental	27.145	70..39	6.85	77.24	100	-22.76	203	100	Peak
Fundamental	27.145	64.20	6.85	71.05	80	-8.95	203	100	Ave
1	33.0950	19.42	6.77	26.19	40.00	-13.81	57	100	Peak
2	54.0711	18.35	7.80	26.15	40.00	-13.85	112	100	Peak
3	958.7943	18.83	21.98	40.81	46.00	-5.19	65	100	Peak

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

5. Part 15.227(b) - OUT OF BAND EMISSIONS

5.1 Standard Applicable

According to Part 15.227(b) & RSS-310 Issue 3, the field strength of any emissions which appear outside of 26.96MHz to 27.28MHz shall not exceed the general radiated emission limits in Part 15.209 and RSS-310 Issue 3 §3.8.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2011-04-16	2012-04-15
EMI Test Receiver	R&S	ESVB	825471/005	2011-08-12	2012-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2011-08-12	2012-08-11
RF Switch	EM	EMSW18	SW060023	2011-08-12	2012-08-11
Pre-amplifier	Agilent	8447F	3113A06717	2011-08-12	2012-08-11
Pre-amplifier	Compliance Direction	PAP-0118	24002	2011-08-12	2012-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2011-07-21	2012-07-20
Horn Antenna	ETS	3117	00086197	2011-07-21	2012-07-20
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2011-07-21	2012-07-20

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.3 Test Procedure

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 26.96MHz to 27.28MHz, than mark the higher-level emission for comparing with the FCC Rules.

5.4 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1022 mbar


5.5 Summary of Test Results/Plots

Frequency MHz	Emission dB μ V/m	Limit dB μ V/m
26.2800	23.11	50
26.9600	37.31	50
27.2800	42.66	50
28.2300	29.30	50
28.2400	25.95	50
28.6400	30.66	50
29.4200	23.34	50

Test Result: Pass


Refer to the attached plots.

Horizontal:

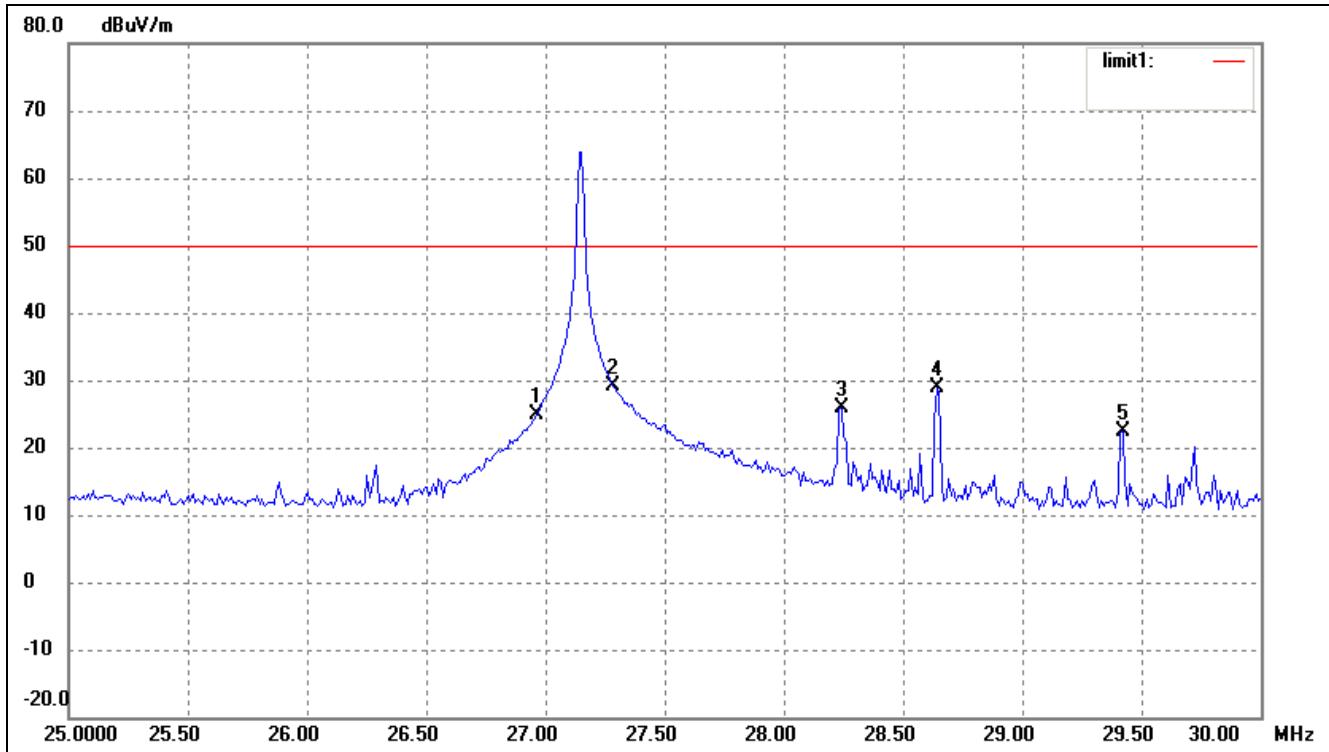

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	26.9600	18.01	6.94	24.95	50.00	-25.05	30	100	Peak
2	27.2800	22.27	6.90	29.17	50.00	-20.83	67	100	Peak
3	28.2400	19.10	6.85	25.95	50.00	-24.05	67	100	Peak
4	28.6400	22.14	6.83	28.97	50.00	-21.03	66	100	Peak
5	29.4200	15.61	6.80	22.41	50.00	-27.59	150	100	Peak

Vertical:

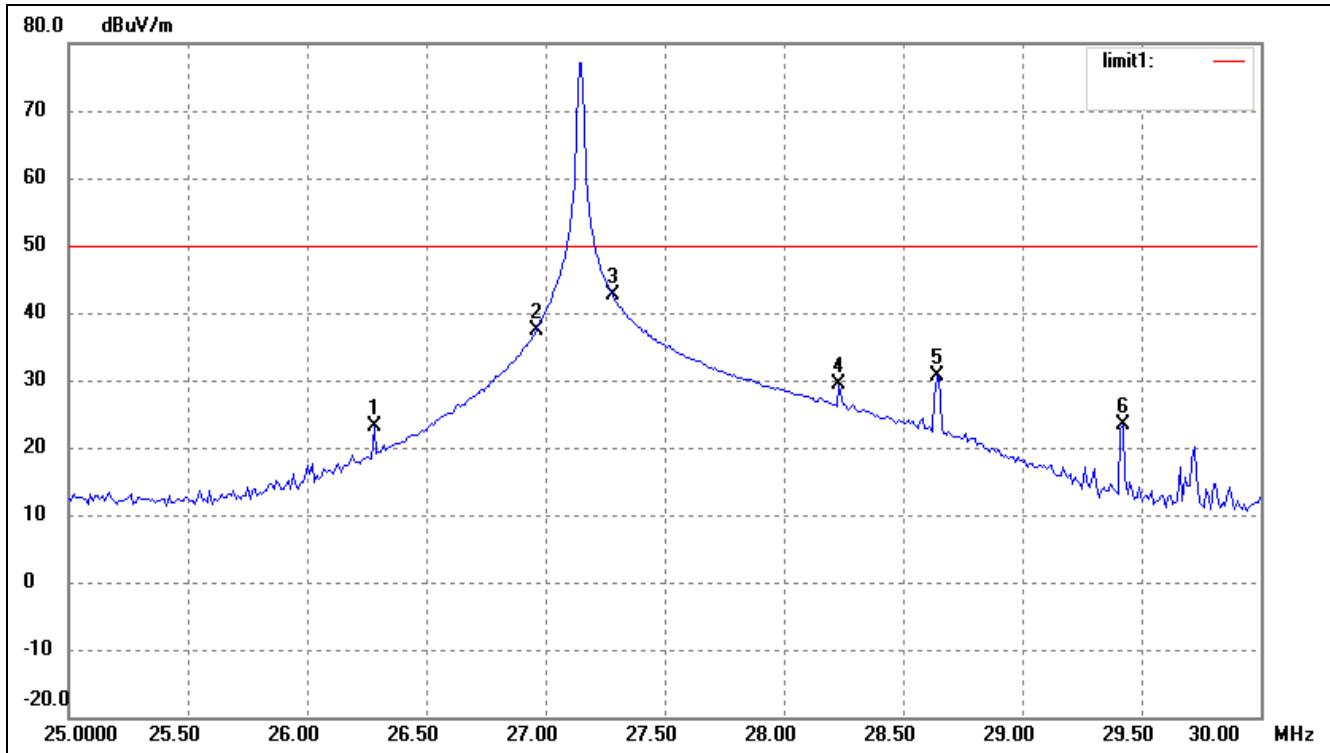

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	26.2800	15.65	7.46	23.11	50.00	-26.89	305	100	Peak
2	26.9600	30.37	6.94	37.31	50.00	-12.69	67	100	Peak
3	27.2800	35.76	6.90	42.66	50.00	-7.34	15	100	Peak
4	28.2300	22.45	6.85	29.30	50.00	-20.70	75	100	Peak
5	28.6400	23.83	6.83	30.66	50.00	-19.34	242	100	Peak
6	29.4200	16.54	6.80	23.34	50.00	-26.66	214	100	Peak

***** END OF REPORT *****