#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

CCS (Auden)

Accreditation No.: SCS 108

C

Certificate No: D835V2-4d114\_Jan11

### **CALIBRATION CERTIFICATE**

Object D835V2 - SN: 4d114

Calibration procedure(s) QA CAL-05.v8

Calibration procedure for dipole validation kits

Calibration date: January 10, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).

The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11
	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	Pell
Approved by:	Katja Pokovic	Technical Manager	20110
			De Cours

Issued: January 10, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst Service suisse d'étalonnage

C Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL tissue simulating liquid

ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

#### Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003

 b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

#### Additional Documentation:

d) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms oriented
  parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

Certificate No: D835V2-4d114\_Jan11: Page 2 of 9

#### **Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, $dy$ , $dz = 5 mm$	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.3 ± 6 %	0.89 mho/m ± 6 %
Head TSL temperature during test	(21.0 ± 0.2) °C	222	

### SAR result with Head TSL

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.38 mW / g
SAR normalized	normalized to 1W	9.52 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.57 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 mW / g
SAR normalized	normalized to 1W	6.20 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.23 mW /g ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature during test	(21.6 ± 0.2) °C		,

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.53 mW / g
SAR normalized	normalized to 1W	10.1 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.92 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.66 mW / g
SAR normalized	normalized to 1W	6.64 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.55 mW / g ± 16.5 % (k=2)

#### **Appendix**

#### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.3 Ω - 2.6 JΩ	
Return Loss	- 29.5 dB	

#### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.6 Ω - 4.6 jΩ
Return Loss	- 25.5 dB

#### General Antenna Parameters and Design

Electrical Delay (one direction)	1.400 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### **Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	June 29, 2010

Certificate No: D835V2-4d114\_Jan11 Page 5 of 9

#### DASY5 Validation Report for Head TSL

Date/Time: 03.01.2011 14:35:06

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d114

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: f = 835 MHz;  $\sigma = 0.89 \text{ mho/m}$ ;  $\epsilon r = 40.9$ ;  $\rho = 1000 \text{ kg/m}3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 10.06.2010

Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001

Measurement SW: DASY52, V52.6.1 Build (408)

Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

#### Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.3 V/m; Power Drift = 0.000428 dB

Peak SAR (extrapolated) = 3.59 W/kg


SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.56 mW/g

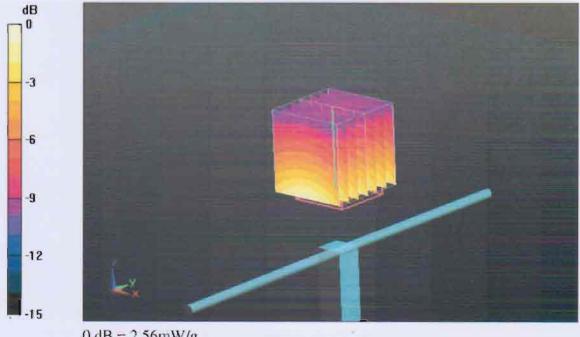

0 dB = 2.56 mW/g

### Impedance Measurement Plot for Head TSL

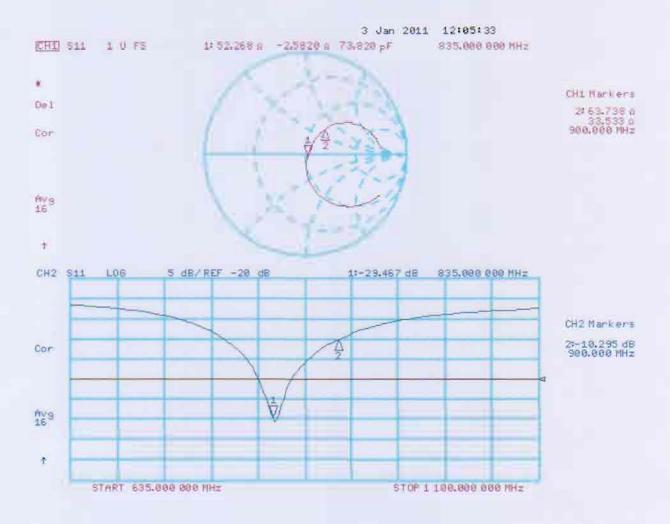

#### **DASY5 Validation Report for Body**

Date/Time: 10.01.2011 10:33:12

Test Laboratory: SPEAG. Zurich, Switzerland

#### DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d114

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: f = 835 MHz;  $\sigma = 0.99$  mho/m;  $\varepsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2010

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 10.06.2010

Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001

Measurement SW: DASY52, V52.6.1 Build (408)

Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


#### Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 3.727 W/kg


SAR(1 g) = 2.53 mW/g; SAR(10 g) = 1.66 mW/g

Maximum value of SAR (measured) = 2.944 mW/g

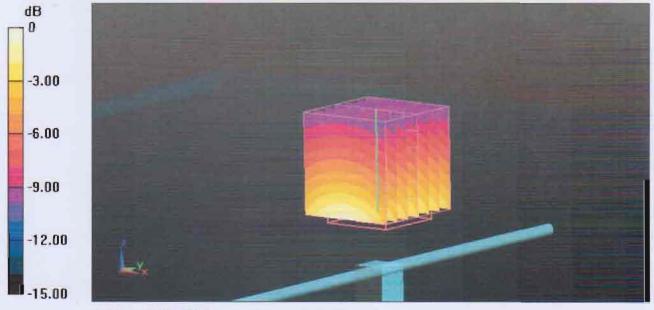

0 dB = 2.940 mW/g

### Impedance Measurement Plot for Body TSL

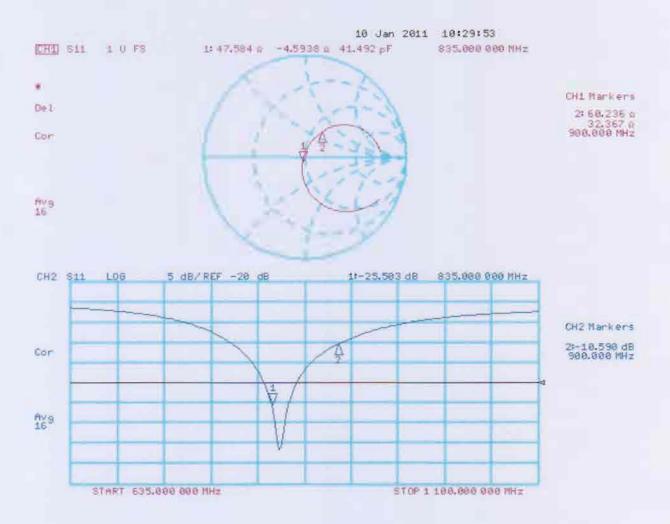

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
S wiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

CCS (Auden)

Accreditation No.: SCS 108

Certificate No: D1900V2-5d136\_Jan11

### **CALIBRATION CERTIFICATE**

Object D1900V2 - SN: 5d136

Calibration procedure(s) QA CAL-05.v8

Calibration procedure for dipole validation kits

Calibration date: January 05, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).

The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11
	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	f-fr
Approved by:	Katja Pokovic	Technical Manager	(20 W)

Issued: January 5, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1900V2-5d136\_Jan11

#### Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage

C Service suisse d etatorinage
Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL tissue simulating liquid

ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

#### Additional Documentation:

d) DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
  of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
  point exactly below the center marking of the flat phantom section, with the arms oriented
  parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
  positioned under the liquid filled phantom. The impedance stated is transformed from the
  measurement at the SMA connector to the feed point. The Return Loss ensures low
  reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
   No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

#### **Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, $dy$ , $dz = 5 mm$	
Frequency	1900 MHz ± 1 MHz	

### **Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.5 ± 6 %	1.43 mho/m ± 6 %
Head TSL temperature during test	(20.6 ± 0.2) °C	HHHTP.	

#### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.3 mW / g
SAR normalized	normalized to 1W	41.2 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	40.5 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.33 mW / g
SAR normalized	normalized to 1W	21.3 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	21.1 mW /g ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.9 ± 6 %	1.56 mho/m ± 6 %
Body TSL temperature during test	(21.2 ± 0.2) °C		

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.1 mW / g
SAR normalized	normalized to 1W	40.4 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	39.7 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.31 mW / g
SAR normalized	normalized to 1W	21.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.1 mW / g ± 16.5 % (k=2)

#### **Appendix**

#### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.7 $\Omega$ + 8.2 j $\Omega$
Return Loss	- 21.5 dB

#### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.2 Ω + 7.6 jΩ
Return Loss	- 21.6 dB

#### General Antenna Parameters and Design

Electrical Delay (one direction)	1.204 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 14, 2010

#### **DASY5 Validation Report for Head TSL.**

Date/Time: 04.01.2011 11:58:06

Test Laboratory: SPEAG, Zurich, Switzerland

#### DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d136

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used: f = 1900 MHz;  $\sigma = 1.42 \text{ mho/m}$ ;  $\varepsilon_r = 38.7$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 10.06.2010

Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001

Measurement SW: DASY52, V52.6 Build (401)

Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

#### Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.7 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 18.9 W/kg


#### SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.33 mW/g

Maximum value of SAR (measured) = 12.9 mW/g

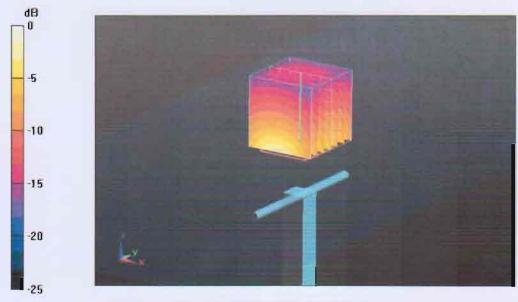

0 dB = 12.9 mW/g

### Impedance Measurement Plot for Head TSL

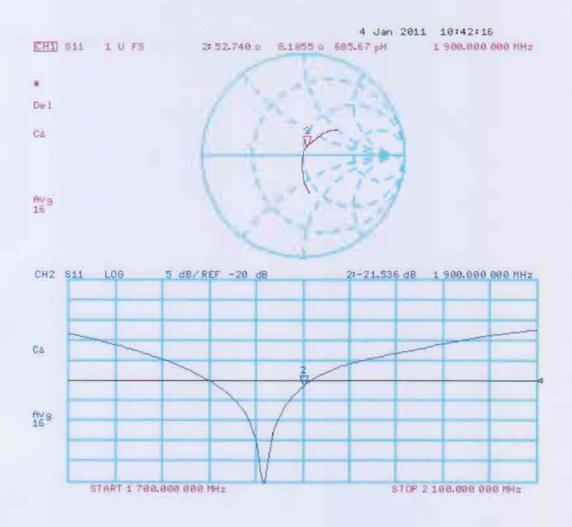

#### **DASY5 Validation Report for Body**

Date/Time: 05.01.2011 10:43:48

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d136

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: f = 1900 MHz;  $\sigma = 1.56 \text{ mho/m}$ ;  $\varepsilon_r = 53$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

#### DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010

· Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 10.06.2010

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

Measurement SW: DASY52, V52.6 Build (401)

Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

#### Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.3 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 17.3 W/kg


SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.31 mW/g

Maximum value of SAR (measured) = 12.8 mW/g



0 dB = 12.8 mW/g

### Impedance Measurement Plot for Body TSL

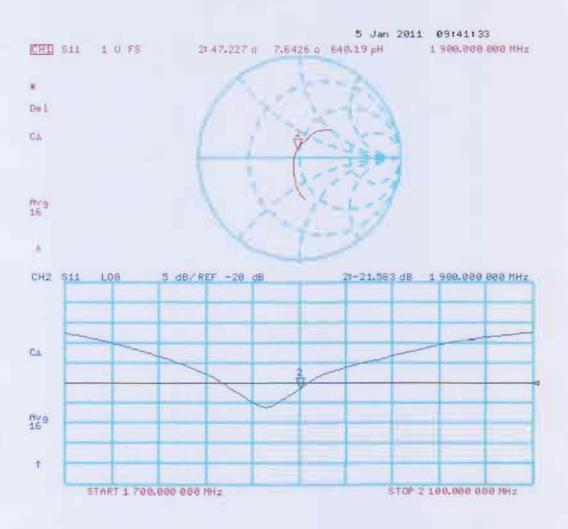

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

CCS (Auden)

Accreditation No.: SCS 108

Certificate No: EX3-3755\_Jan11

### **CALIBRATION CERTIFICATE**

Object EX3DV4 - SN:3755

Calibration procedure(s) QA CAL-01.v7, QA CAL-14.v3, QA CAL-23.v4 and QA CAL-25.v3

Calibration procedure for dosimetric E-field probes

Calibration date: January 20, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).

The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and furnidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
R.F generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11
	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	DE RS
			1 110
Approved by:	Niels Kuster	Quality Manager	1/65
*			Issued: January 20, 2011
			Control of the Land Control

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL tissue simulating liquid

NORMx,y,z sensitivity in free space

ConvF sensitivity in TSL / NORMx,y,z

DCP diode compression point

CF crest factor (1/duty\_cycle) of the RF signal A, B, C modulation dependent linearization parameters

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

#### Calibration is Performed According to the Following Standards:

 a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003

 EC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is
  implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included
  in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- Ax,y,z; Bx,y,z; Cx,y,z, VRx,y,z; A, B, C are numerical linearization parameters assessed based on the data of
  power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the
  maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe EX3DV4

SN:3755

Manufactured: Calibrated:

March 16, 2010 January 20, 2011

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

### DASY/EASY - Parameters of Probe: EX3DV4 SN:3755

#### **Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μV/(V/m) <sup>2</sup> ) <sup>A</sup>	0.49	0.47	0.50	± 10.1%
DCP (mV) <sup>8</sup>	99.9	99.1	101.3	

#### **Modulation Calibration Parameters**

סוט	Communication System Name	PAR		A dB	B dBuV	С	VR mV	Unc <sup>E</sup> (k=2)
10000	cw	0.00	X	0.00	0.00	1.00	157.1	± 2.4 %
			Υ	0.00	0.00	1.00	147.8	
			Z	0.00	0.00	1.00	157.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

A The uncertainties of NormX Y,Z do not affect the E-field uncertainty inside TSL (see Pages 5 and 6).

<sup>&</sup>lt;sup>8</sup> Numerical linearization parameter uncertainty not required

E Uncertainty is determined using the maximum deviation from linear response applying recatangular distribution and is expressed for the square of the field value

### DASY/EASY - Parameters of Probe: EX3DV4 SN:3755

#### Calibration Parameter Determined in Head Tissue Simulating Media

Validity [MHz] <sup>G</sup>	Permittivity	Conductivity	ConvF X Co	nvF Y	ConvF Z	Alpha	Depth Unc (k=2)
± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	8.99	8.99	8.99	0.64	0.68 ± 11.0%
±50/±100	40.1 ± 5%	1.37 ± 5%	8.17	8.17	8.17	0.74	0.63 ± 11.0%
± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	7.84	7.84	7.84	0.63	0.66 ± 11.0%
± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	7.78	7.78	7.78	0.45	0.79 ± 11.0%
± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	7.07	7.07	7.07	0.30	1.02 ± 11.0%
± 50 / ± 100	36.0 ± 5%	4.66 ± 5%	4.64	4.64	4.64	0.40	1.80 ± 13.1%
± 50 / ± 100	$35.9 \pm 5\%$	4.76 ± 5%	4.48	4.48	4.48	0.40	1.80 ± 13.1%
±50/±100	35.6 ± 5%	4.96 ± 5%	4.46	4.46	4.46	0.45	1.80 ± 13.1%
±50/±100	35.5 ± 5%	5.07 ± 5%	4.15	4.15	4.15	0.50	1.80 ± 13.1%
±50/±100	35.3 ± 5%	5.27 ± 5%	4.31	4.31	4.31	0.45	1.80 ± 13.1%
	±50/±100 ±50/±100 ±50/±100 ±50/±100 ±50/±100 ±50/±100 ±50/±100 ±50/±100	±50/±100 41.5±5% ±50/±100 40.1±5% ±50/±100 40.0±5% ±50/±100 40.0±5% ±50/±100 39.2±5% ±50/±100 36.0±5% ±50/±100 35.9±5% ±50/±100 35.6±5% ±50/±100 35.5±5%	$\pm 50 / \pm 100$ 41.5 $\pm 5\%$ 0.90 $\pm 5\%$ $\pm 50 / \pm 100$ 40.1 $\pm 5\%$ 1.37 $\pm 5\%$ $\pm 50 / \pm 100$ 40.0 $\pm 5\%$ 1.40 $\pm 5\%$ $\pm 50 / \pm 100$ 40.0 $\pm 5\%$ 1.40 $\pm 5\%$ $\pm 50 / \pm 100$ 39.2 $\pm 5\%$ 1.80 $\pm 5\%$ $\pm 50 / \pm 100$ 36.0 $\pm 5\%$ 4.66 $\pm 5\%$ $\pm 50 / \pm 100$ 35.9 $\pm 5\%$ 4.76 $\pm 5\%$ $\pm 50 / \pm 100$ 35.6 $\pm 5\%$ 4.96 $\pm 5\%$ $\pm 50 / \pm 100$ 35.5 $\pm 5\%$ 5.07 $\pm 5\%$	$\pm 50 / \pm 100$ $41.5 \pm 5\%$ $0.90 \pm 5\%$ $8.99$ $\pm 50 / \pm 100$ $40.1 \pm 5\%$ $1.37 \pm 5\%$ $8.17$ $\pm 50 / \pm 100$ $40.0 \pm 5\%$ $1.40 \pm 5\%$ $7.84$ $\pm 50 / \pm 100$ $40.0 \pm 5\%$ $1.40 \pm 5\%$ $7.78$ $\pm 50 / \pm 100$ $39.2 \pm 5\%$ $1.80 \pm 5\%$ $7.07$ $\pm 50 / \pm 100$ $36.0 \pm 5\%$ $4.66 \pm 5\%$ $4.64$ $\pm 50 / \pm 100$ $35.9 \pm 5\%$ $4.76 \pm 5\%$ $4.48$ $\pm 50 / \pm 100$ $35.6 \pm 5\%$ $4.96 \pm 5\%$ $4.46$ $\pm 50 / \pm 100$ $35.5 \pm 5\%$ $5.07 \pm 5\%$ $4.15$	$\pm 50 / \pm 100$ $41.5 \pm 5\%$ $0.90 \pm 5\%$ $8.99$ $8.99$ $\pm 50 / \pm 100$ $40.1 \pm 5\%$ $1.37 \pm 5\%$ $8.17$ $8.17$ $\pm 50 / \pm 100$ $40.0 \pm 5\%$ $1.40 \pm 5\%$ $7.84$ $7.84$ $\pm 50 / \pm 100$ $40.0 \pm 5\%$ $1.40 \pm 5\%$ $7.78$ $7.78$ $\pm 50 / \pm 100$ $39.2 \pm 5\%$ $1.80 \pm 5\%$ $7.07$ $7.07$ $\pm 50 / \pm 100$ $36.0 \pm 5\%$ $4.66 \pm 5\%$ $4.64$ $4.64$ $\pm 50 / \pm 100$ $35.9 \pm 5\%$ $4.76 \pm 5\%$ $4.48$ $4.48$ $\pm 50 / \pm 100$ $35.6 \pm 5\%$ $4.96 \pm 5\%$ $4.46$ $4.46$ $4.46$ $4.50 / \pm 100$ $35.5 \pm 5\%$ $4.96 \pm 5\%$ $4.46$ $4.46$	$\pm 50/\pm 100$ 41.5 $\pm 5\%$ 0.90 $\pm 5\%$ 8.99 8.99 8.99 $\pm 50/\pm 100$ 40.1 $\pm 5\%$ 1.37 $\pm 5\%$ 8.17 8.17 8.17 $\pm 50/\pm 100$ 40.0 $\pm 5\%$ 1.40 $\pm 5\%$ 7.84 7.84 7.84 7.84 $\pm 50/\pm 100$ 40.0 $\pm 5\%$ 1.40 $\pm 5\%$ 7.78 7.78 7.78 7.78 $\pm 50/\pm 100$ 39.2 $\pm 5\%$ 1.80 $\pm 5\%$ 7.07 7.07 7.07 $\pm 50/\pm 100$ 36.0 $\pm 5\%$ 4.66 $\pm 5\%$ 4.64 4.64 4.64 $\pm 50/\pm 100$ 35.9 $\pm 5\%$ 4.76 $\pm 5\%$ 4.48 4.48 4.48 $\pm 50/\pm 100$ 35.6 $\pm 5\%$ 4.96 $\pm 5\%$ 4.46 4.46 4.46 $\pm 50/\pm 100$ 35.5 $\pm 5\%$ 5.07 $\pm 5\%$ 4.15 4.15	$\begin{array}{cccccccccccccccccccccccccccccccccccc$

The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

### DASY/EASY - Parameters of Probe: EX3DV4 SN:3755


#### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>C</sup>	Permittivity	Conductivity	ConvF X Co	nvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	9.07	9.07	9.07	0.66	0.68 ± 11.0%
1750	±50/±100	53.4 ± 5%	1.49 ± 5%	7.48	7.48	7,48	0.91	0.59 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.23	7.23	7.23	0.60	0.72 ± 11.0%
2000	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.31	7.31	7.31	0.58	0.74 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	7.06	7.06	7.06	0.58	0.71 ± 11.0%
5200	±50/±100	49.0 ± 5%	$5.30 \pm 5\%$	4.02	4.02	4.02	0.50	1.90 ± 13.1%
5300	± 50 / ± 100	48.9 ± 5%	5.42 ± 5%	3.86	3.86	3.86	0.50	1.90 ± 13.1%
5500	± 50 / ± 100	48.6 ± 5%	5.65 ± 5%	3.60	3.60	3.60	0.55	1.90 ± 13.1%
5600	± 50 / ± 100	48.5 ± 5%	5.77 ± 5%	3.26	3.26	3.26	0.65	1.90 ± 13.1%
5800	± 50 / ± 100	48.2 ± 5%	6.00 ± 5%	3.78	3.78	3.78	0.60	1.90 ± 13.1%

The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

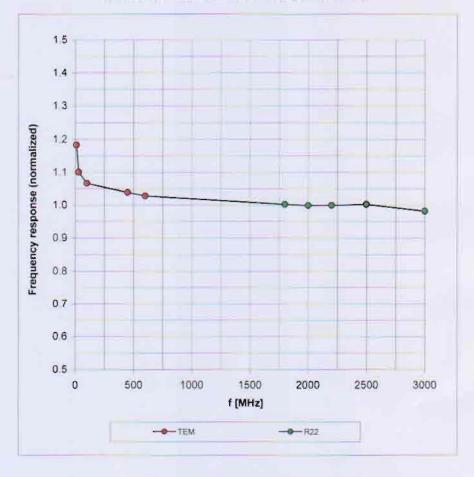


Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$






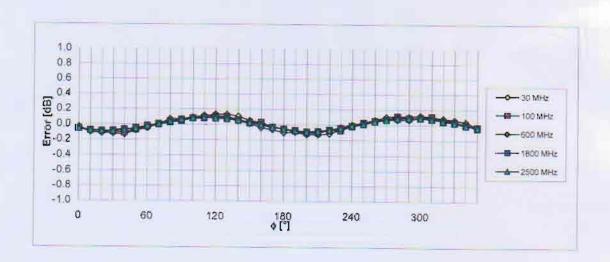


Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

## Dynamic Range f(SAR<sub>head</sub>)


(TEM cell, f = 900 MHz)

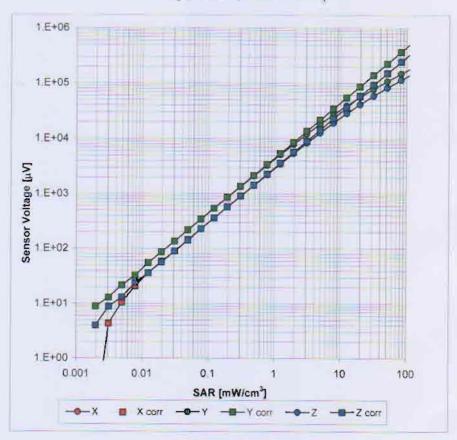


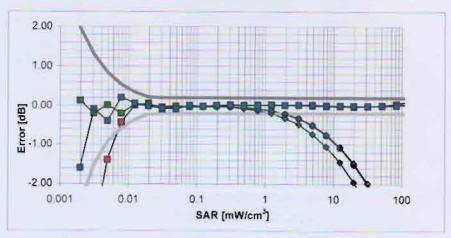

Uncertainty of Linearity Assessment: ± 0.6% (k=2)


### **Conversion Factor Assessment**





### Deviation from Isotropy in HSL

Error (φ, θ), f = 900 MHz

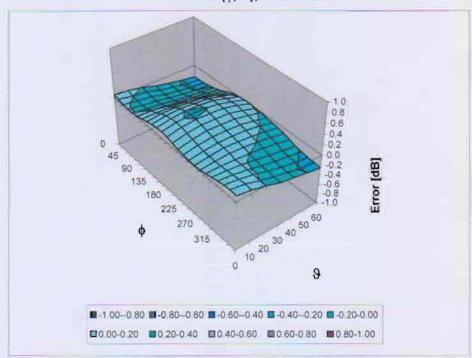

Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

January 20, 2011

### EX3DV4 SN:3755

## **Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm

Zeughausstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 9700, Fax +41 44 245 9779 info@speag.com, http://www.speag.com

#### IMPORTANT NOTICE

#### **USAGE OF THE DAE 4**

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

Battery Exchange: The battery cover of the DAE4 unit is closed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.

Shipping of the DAE: Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an antistatic bag. This antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.

E-Stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

DASY Configuration Files: Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.

#### Important Note:

Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.

#### Important Note:

Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the Estop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.

#### Important Note:

To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.

#### Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kallbrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

CCS (Auden)

Accreditation No.: SCS 108

S

C

Certificate No: DAE4-1245\_Jan11

### **CALIBRATION CERTIFICATE**

Object DAE4 - SD 000 D04 BJ - SN: 1245

Calibration procedure(s) QA CAL-06.v22

Calibration procedure for the data acquisition electronics (DAE)

Calibration date: January 11, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (Si).

The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-10 (No:10376)	Sep-11
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	07-Jun-10 (in house check)	In house check: Jun-11

Calibrated by:

Name Eric Hainfeld Function Technician

Signature

Approved by:

Fin Bomholt

**R&D** Director

N. Kellines

Issued: January 11, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-1245 Jan11

Page 1 of 5

#### Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary

DAE data acquisition electronics

Connector angle information used in DASY system to align probe sensor X to the robot

coordinate system.

#### Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure giver corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
  - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
  - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
  - Input Offset Measurement. Output voltage and statistical results over a large number of zero voltage measurements.
  - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
  - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-1245\_Jan11

#### **DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range:  $1LSB = 6.1 \mu V$ , full range = -100...+300 mVLow Range: 1LSB = 61 nV, full range = -1.....+3 mVDASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	405.949 ± 0.1% (k=2)	404.668 ± 0.1% (k=2)	405.811 ± 0.1% (k=2)
Low Range	3.99652 ± 0.7% (k=2)	3.99470 ± 0.7% (k≈2)	3.98099 ± 0.7% (k=2)

### **Connector Angle**

Connector Angle to be used in DASY system	32.0 ° ± 1 °
---	--------------

Certificate No: DAE4-1245\_Jan11 Page 3 of 5

### **Appendix**

1. DC Voltage Linearity

High Range		Reading (µV)	Difference (μV)	Error (%)
Channel X	+ Input	199999.6	-1.22	-0.00
Channel X	+ Input	20001.67	2.27	0.01
Channel X	- Input	-19997,79	1.81	-0.01
Channel Y	+ Input	200009.5	-0.71	-0.00
Channel Y	+ Input	20000.17	0.67	0,00
Channel Y	- Input	-19998.63	0.87	-0.00
Channel Z	+ Input	200008.1	-1.41	-0.00
Channel Z	+ Input	19999.37	-0.03	-0.00
Channel Z	- Input	-19999.79	-0.39	0.00

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Inpu	t 1999.1	-0.69	-0.03
Channel X + Inpu	t 199.90	-0.10	-0.05
Channel X - Inpu	-200.48	-0.38	0.19
Channel Y + Inpu	t 2000.3	0.29	0.01
Channel Y + Inpu	t 199.10	-1.00	-0.50
Channel Y - Inpu	-201.03	-1.23	0.62
Channel Z + Inpu	t 2000.0	0.05	0.00
Channel Z + Inpu	t 198.48	-1.52	-0.76
Channel Z - Inpu	-201.27	-1.27	0.64

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-7.88	-9.62
	- 200	10.45	8.89
Channel Y	200	-7.79	-7.99
	- 200	6.00	6.40
Channel Z	200	-6.22	-6.24
	- 200	5.35	5.19

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200		2.91	-0.13
Channel Y	200	2.57	· ×	4.74
Channel Z	200	1.27	-0.99	7

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15884	14899
Channel Y	16498	15256
Channel Z	15933	16202

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	-0.03	-1.14	1,28	0.46
Channel Y	-0.76	-2.25	0.38	0.45
Channel Z	-1_13	-3.14	0.64	0.59

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	+7.9	
Supply (- Vcc)	-7.6	

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Certificate No: DAE4-1245\_Jan11 Page 5 of 5