



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
<http://www.pctestlab.com>



## MEASUREMENT REPORT FCC Part 22 & 24 / IC RSS-132/RSS-133

**Applicant Name:**

LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**

May 14 - 15, 2012

**Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:**

0Y1205070639.ZNF

**FCC ID:**

**ZNFC195N**

**IC CERTIFICATION NO.:** 2703C-C195N**APPLICANT:**

**LG Electronics MobileComm U.S.A., Inc.**

**Application Type:**

Certification

**Model(s):**

LG-C195N, C195N, LGC195N, C195n, LGC195n, LG-C195n

**EUT Type:**

Portable Handset

**FCC Classification:**

PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):**

§2; §22(H), §24(E)

**IC Specification(s):**

RSS-132 Issue 2; RSS-133 Issue 5

**Test Procedure(s):**

ANSI/TIA-603-C-2004

**Test Device Serial No.:**

*identical prototype* [S/N: 7MAY-1 (COND.), 7MAY-5]

| Mode    | Tx Frequency<br>(MHz) | Emission<br>Designator | ERP/EIRP             |                        |
|---------|-----------------------|------------------------|----------------------|------------------------|
|         |                       |                        | Max.<br>Power<br>(W) | Max.<br>Power<br>(dBm) |
| GSM850  | 824.2 - 848.8         | 248KGXW                | 0.614                | 27.880                 |
| GSM1900 | 1850.2 - 1909.8       | 245KGXW                | 1.126                | 30.510                 |

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

  
Randy Orlanez  
President




|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           | Page 1 of 34                                                                          |                                 |

# TABLE OF CONTENTS

|                                                              |    |
|--------------------------------------------------------------|----|
| FCC PART 22 & 24 MEASUREMENT REPORT .....                    | 3  |
| 1.0 INTRODUCTION .....                                       | 4  |
| 1.1 SCOPE .....                                              | 4  |
| 1.2 TESTING FACILITY .....                                   | 4  |
| 2.0 PRODUCT INFORMATION.....                                 | 5  |
| 2.1 EQUIPMENT DESCRIPTION .....                              | 5  |
| 2.2 DEVICE CAPABILITIES.....                                 | 5  |
| 2.3 TEST CONFIGURATION.....                                  | 5  |
| 2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....            | 5  |
| 2.5 LABELING REQUIREMENTS.....                               | 5  |
| 3.0 DESCRIPTION OF TESTS .....                               | 6  |
| 3.1 EVALUATION PROCEDURE .....                               | 6  |
| 3.2 CELLULAR - BASE FREQUENCY BLOCKS.....                    | 6  |
| 3.3 CELLULAR - MOBILE FREQUENCY BLOCKS.....                  | 6  |
| 3.4 PCS - BASE FREQUENCY BLOCKS .....                        | 6  |
| 3.5 PCS - MOBILE FREQUENCY BLOCKS .....                      | 7  |
| 3.6 OCCUPIED BANDWIDTH .....                                 | 7  |
| 3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL..... | 7  |
| 3.8 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....     | 8  |
| 3.9 PEAK-AVERAGE RATIO .....                                 | 9  |
| 3.10 FREQUENCY STABILITY / TEMPERATURE VARIATION .....       | 9  |
| 4.0 TEST EQUIPMENT CALIBRATION DATA .....                    | 10 |
| 5.0 SAMPLE CALCULATIONS .....                                | 11 |
| 6.0 TEST RESULTS.....                                        | 12 |
| 6.1 SUMMARY.....                                             | 12 |
| 6.2 EFFECTIVE RADIATED POWER OUTPUT DATA .....               | 13 |
| 6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....     | 13 |
| 6.4 CELLULAR GSM RADIATED MEASUREMENTS.....                  | 14 |
| 6.5 PCS GSM RADIATED MEASUREMENTS .....                      | 17 |
| 6.6 CELLULAR GSM FREQUENCY STABILITY MEASUREMENTS.....       | 20 |
| 6.7 PCS GSM FREQUENCY STABILITY MEASUREMENTS.....            | 22 |
| 7.0 PLOTS OF EMISSIONS.....                                  | 24 |
| 8.0 CONCLUSION.....                                          | 34 |

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 2 of 34                    |



## MEASUREMENT REPORT

### FCC Part 22 & 24





#### §2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A., Inc.  
**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632, United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA  
 7185 Oakland Mills Road, Columbia, MD 21046 USA  
**FCC RULE PART(S):** §2; §22(H), §24(E)  
**IC SPECIFICATION(S):** RSS-132 Issue 2; RSS-133 Issue 5  
**BASE MODEL:** LG-C195N  
**FCC ID:** ZNFC195N  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**MODE:** GSM  
**FREQUENCY TOLERANCE:**  $\pm 0.00025\%$  (2.5 ppm)  
**Test Device Serial No.:** 7MAY-1 (COND.), ☐ Production ☒ Pre-Production ☐ Engineering  
 7MAY-5  
**DATE(S) OF TEST:** May 14 - 15, 2012  
**TEST REPORT S/N:** 0Y1205070639.ZNF

#### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 3 of 34                    |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 10, 2012.

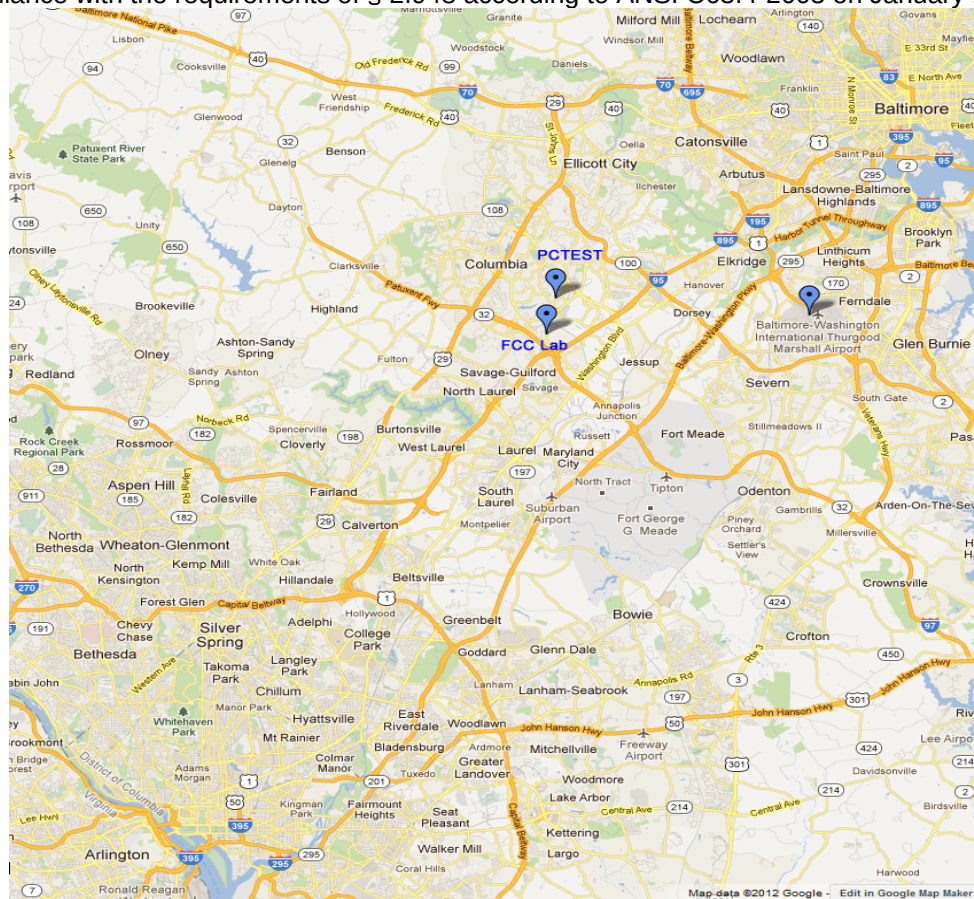


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 4 of 34                    |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the LG Portable Handset FCC ID: ZNFC195N. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS, EDGE Rx, 802.11b/g WLAN, Bluetooth (1x,EDR)

### 2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFC195N was tested per the guidance of ANSI/TIA-603-C-2004. See Section 3.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.5 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

*This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

|                                      |                                                                                                                                   |                                                         |                                                                                                 |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                                                                  | EUT Type:<br>Portable Handset                           |                                                                                                 | Page 5 of 34                    |




## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure


The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-C-2004) was used in the measurement of the measurement of the **LG Portable Handset FCC ID: ZNFC195N**.

Deviation from Measurement Procedure.....None


### 3.2 Cellular - Base Frequency Blocks

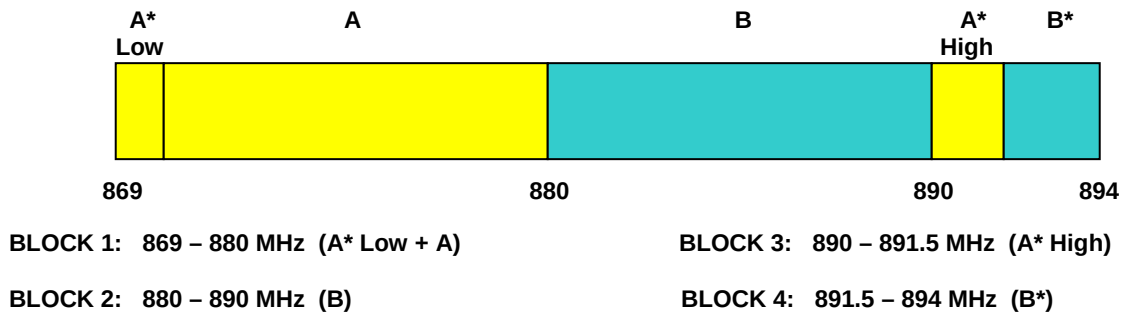

### 3.3 Cellular - Mobile Frequency Blocks

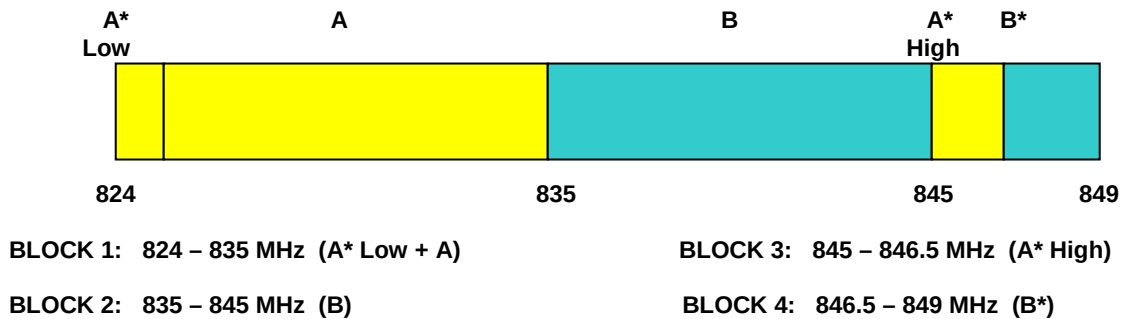


### 3.4 PCS - Base Frequency Blocks

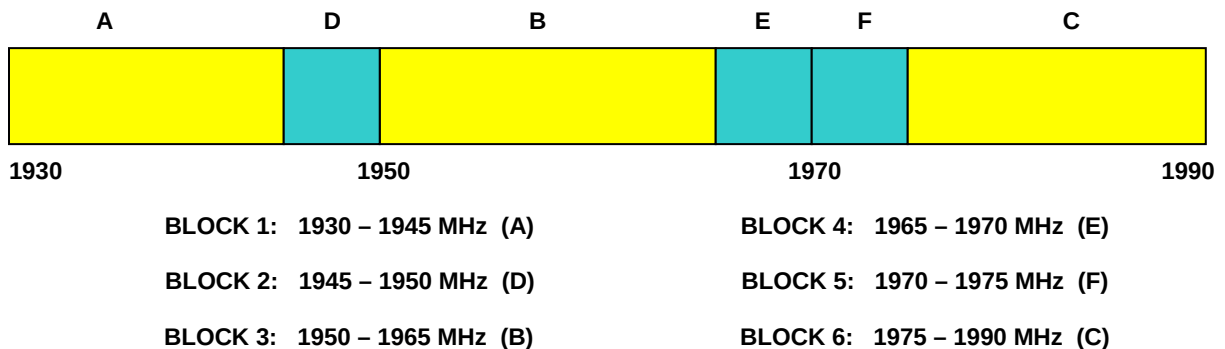

|                                      |                                               |                                                         |    |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|----|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | LG | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |    | Page 6 of 34                    |

### 3.5 PCS - Mobile Frequency Blocks

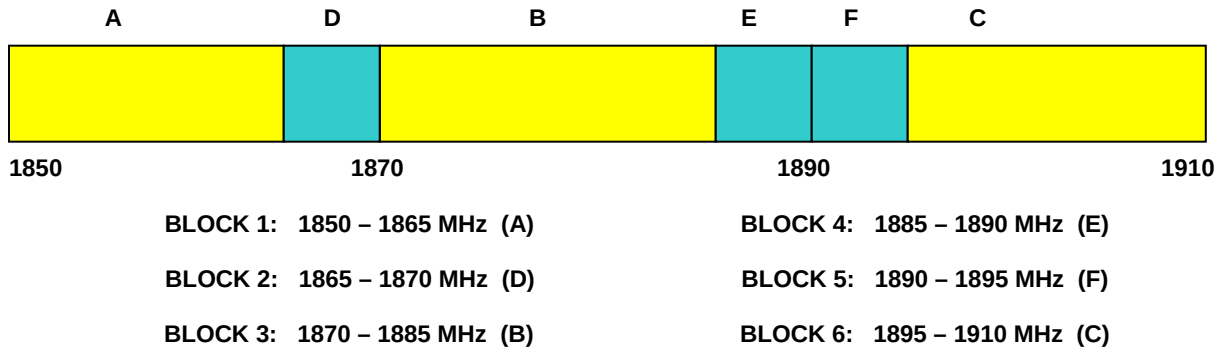

### 3.6 Occupied Bandwidth

#### §2.1049, RSS-Gen (4.6.1)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

### 3.7 Spurious and Harmonic Emissions at Antenna Terminal

#### 2.1051, 22.917(a), 24.238(a)(b); RSS-132 (4.5.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 7 of 34                    |

### 3.8 Radiated Power and Radiated Spurious Emissions

**§2.1053, 22.913(a)(2), 22.917(a), 24.232(c), 24.238(a); RSS-132 (4.5.1), RSS-133 (6.5.1)**


Radiated spurious emissions are investigated indoors in a semi-anechoic chamber to determine the frequencies producing the worst case emissions. Final measurements for radiated power and radiated spurious emissions are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized. The level of the maximized emission is recorded with the spectrum analyzer using a peak detector with RBW = 1MHz, VBW = 3MHz for emissions greater than 1GHz. For emissions below 1GHz, the spectrum analyzer is set to RBW = 100kHz and VBW = 300kHz.

A half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$  specified in 22.917(a) and 24.238(a).

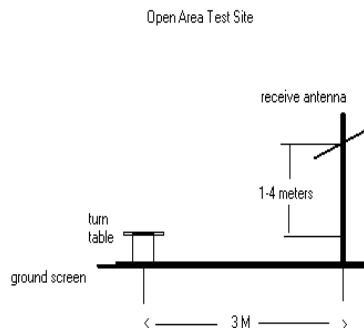

**Figure 3-1. Diagram of 3-meter outdoor test range**

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 8 of 34                    |



### 3.9 Peak-Average Ratio

#### §24.232(d); RSS-133 (6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

### 3.10 Frequency Stability / Temperature Variation

#### §2.1055, 22.355, 24.235; RSS-132 (4.3) / RSS-133 (6.3)

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.*

#### **Time Period and Procedure:**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 9 of 34                    |

## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| Manufacturer    | Model     | Description                            | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------|-----------|----------------------------------------|------------|--------------|------------|---------------|
| -               | LTX1      | Licensed Transmitter Cable Set         | 1/25/2012  | Annual       | 1/25/2013  | N/A           |
| -               | RE1       | Radiated Emissions Cable Set (UHF/EHF) | 5/7/2012   | Annual       | 5/7/2013   | N/A           |
| -               | RE2       | Radiated Emissions Cable Set (VHF/UHF) | 2/13/2012  | Annual       | 2/13/2013  | N/A           |
| Agilent         | E8267C    | Vector Signal Generator                | 10/10/2011 | Biennial     | 10/10/2013 | US42340152    |
| Agilent         | N9020A    | MXA Signal Analyzer                    | 10/10/2011 | Annual       | 10/10/2012 | US46470561    |
| Agilent         | 8447D     | Broadband Amplifier                    | 5/8/2012   | Annual       | 5/8/2013   | 1937A03348    |
| Espec           | ESX-2CA   | Environmental Chamber                  | 5/21/2012  | Annual       | 5/21/2013  | 17620         |
| ETS Lindgren    | 3117      | 1-18 GHz DRG Horn (Medium)             | 7/22/2011  | Annual       | 7/22/2012  | 125518        |
| ETS Lindgren    | 3164-08   | Quad Ridge Horn Antenna                | 10/1/2010  | Biennial     | 10/1/2012  | 128337        |
| Mini-Circuits   | VHF-1300+ | High Pass Filter                       | 2/7/2012   | Annual       | 2/7/2013   | 30716         |
| Mini-Circuits   | VHF-3100+ | High Pass Filter                       | 1/15/2012  | Annual       | 1/15/2013  | 30841         |
| Pasternack      | PE2208-6  | Bidirectional Coupler                  | 5/3/2012   | Annual       | 5/3/2013   | N/A           |
| Rohde & Schwarz | CMU200    | Base Station Simulator                 | 5/1/2012   | Annual       | 5/1/2013   | 833855/0010   |
| Rohde & Schwarz | RS-PR18   | 1-18 GHz Pre-Amplifier                 | 5/9/2012   | Annual       | 5/9/2013   | 100071        |
| Rohde & Schwarz | ESU26     | EMI Test Receiver                      | 12/15/2011 | Annual       | 12/15/2012 | 100342        |
| Schwarzbeck     | UHA 9105  | Dipole Antenna (400 - 1GHz) Rx         | 11/14/2011 | Biennial     | 11/14/2013 | 9105-2404     |
| Schwarzbeck     | UHA 9105  | Dipole Antenna (400 - 1GHz) Tx         | 11/14/2011 | Biennial     | 11/14/2013 | 9105-2403     |
| Seekonk         | NC-100    | Torque Wrench (8" lb)                  | 3/5/2012   | Triennial    | 3/5/2015   | N/A           |
| Sunol           | JB5       | Bi-Log Antenna (30M - 5GHz)            | 1/26/2012  | Biennial     | 1/26/2014  | A051107       |

Table 4-1. Test Equipment

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 10 of 34                   |

## 5.0 SAMPLE CALCULATIONS

### Emission Designator

**Emission Designator = 250KGXW**

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### Spurious Radiated Emission - PCS Band

**Example: Channel 512 PCS Mode 2<sup>nd</sup> Harmonic (3700.40 MHz)**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 11 of 34                   |

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: LG Electronics MobileComm U.S.A., Inc.  
 FCC ID: ZNFC195N  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM

| FCC Part Section(s)          | RSS Section(s)                      | Test Description                         | Test Limit                                                                         | Test Condition | Test Result | Reference          |
|------------------------------|-------------------------------------|------------------------------------------|------------------------------------------------------------------------------------|----------------|-------------|--------------------|
| <b>TRANSMITTER MODE (TX)</b> |                                     |                                          |                                                                                    |                |             |                    |
| 2.1049, 22.917(a), 24.238(a) | RSS-Gen (4.6.1)<br>RSS-133 (2.3)    | Occupied Bandwidth                       | N/A                                                                                | CONDUCTED      | PASS        | Section 7.0        |
| 2.1051, 22.917(a), 24.238(a) | RSS-132 (4.5.1)<br>RSS-133 (6.5.1)  | Band Edge / Conducted Spurious Emissions | $< 43 + \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions |                | PASS        | Section 7.0        |
| 24.232(d)                    | RSS-133 (6.4)                       | Peak-Average Ratio                       | $< 13 \text{ dB}$                                                                  |                | PASS        | Section 7.0        |
| 2.1046                       | RSS-132 (4.4)<br>RSS-133 (4.1)      | Transmitter Conducted Output Power       | N/A                                                                                |                | PASS        | RF Exposure Report |
| 22.913(a)(2)                 | RSS-132 (4.4)<br>[SRSP-503(5.1.3)]  | Effective Radiated Power                 | $< 7 \text{ Watts max. ERP}$                                                       | RADIATED       | PASS        | Section 6.2        |
| 24.232(c)                    | RSS-133 (6.4)<br>[SRSP-510 (5.1.2)] | Equivalent Isotropic Radiated Power      | $< 2 \text{ Watts max. EIRP}$                                                      |                | PASS        | Section 6.3        |
| 2.1053, 22.917(a), 24.238(a) | RSS-132 (4.5.1)<br>RSS-133 (6.5.1)  | Undesirable Emissions                    | $< 43 + \log_{10}(P[\text{Watts}])$ for all out-of-band emissions                  |                | PASS        | Sections 6.4, 6.5  |
| 2.1055, 22.355, 24.235       | RSS-132 (4.3)<br>RSS-133 (6.3)      | Frequency Stability                      | $< 2.5 \text{ ppm}$                                                                |                | PASS        | Sections 6.6, 6.7  |

**Table 6-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           | Page 12 of 34                                                                         |                                 |

## 6.2 Effective Radiated Power Output Data

§22.913(a)(2); RSS-132 (4.4) [SRSP-503(5.1.3)]

| Frequency [MHz] | Mode   | Battery Type | Substitute Level [dBm] | Antenna Gain [dBd] | Pol [H/V] | ERP [dBm] | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------------|--------|--------------|------------------------|--------------------|-----------|-----------|-------------|-----------------|-------------|
| 824.20          | GSM850 | Standard     | 26.720                 | 0.00               | H         | 26.72     | 0.470       | 38.45           | -11.73      |
| 836.60          | GSM850 | Standard     | 27.360                 | 0.00               | H         | 27.36     | 0.545       | 38.45           | -11.09      |
| 848.80          | GSM850 | Standard     | 27.880                 | 0.00               | H         | 27.88     | 0.614       | 38.45           | -10.57      |

**Table 6-2. Effective Radiated Power Output Data**

## 6.3 Equivalent Isotropic Radiated Power Output Data

§24.232(c); RSS-133 (6.4) [SRSP-510 (5.1.2)]

| Frequency [MHz] | Mode    | Battery Type | Substitute Level [dBm] | Antenna Gain [dBi] | Pol [H/V] | ERP [dBm] | ERP [Watts] | ERP Limit [dBm] | Margin [dB] |
|-----------------|---------|--------------|------------------------|--------------------|-----------|-----------|-------------|-----------------|-------------|
| 1850.20         | GSM1900 | Standard     | 25.79                  | 4.58               | H         | 30.37     | 1.088       | 33.01           | -2.64       |
| 1880.00         | GSM1900 | Standard     | 24.69                  | 4.83               | H         | 29.52     | 0.895       | 33.01           | -3.49       |
| 1909.80         | GSM1900 | Standard     | 25.44                  | 5.07               | H         | 30.51     | 1.126       | 33.01           | -2.50       |

**Table 6-3. Equivalent Isotropic Radiated Power Output Data**

### NOTES:

1. This device was tested in all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 13 of 34                   |

## 6.4 Cellular GSM Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz  
 CHANNEL: 128  
 MEASURED OUTPUT POWER: 26.72 dBm = 0.470 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  39.72 dBc

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBd) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | (dBc) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------|
| 1648.40         | -39.39                          | 2.60                          | -36.79                        | H         | 63.5  |
| 2472.60         | -45.02                          | 2.90                          | -42.12                        | H         | 68.8  |
| 3296.80         | -46.98                          | 5.44                          | -41.54                        | H         | 68.3  |
| 4121.00         | -42.01                          | 7.05                          | -34.97                        | H         | 61.7  |
| 4945.20         | -57.31                          | 7.86                          | -49.45                        | H         | 76.2  |

**Table 6-4. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)**

#### NOTES:

1. This device was tested in all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

|                                      |                                                                                     |                                                      |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                        |                                                                                       | Page 14 of 34                   |



## Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 190  
 MEASURED OUTPUT POWER: 27.36 dBm = 0.545 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  40.36 dBc

| FREQUENCY<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA GAIN<br>(dBd) | SPURIOUS<br>EMISSION<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|--------------------|------------------------------------------|-------------------------------------|----------------------------------------|--------------|-------|
| 1673.20            | -39.18                                   | 2.34                                | -36.84                                 | H            | 64.2  |
| 2509.80            | -42.88                                   | 2.84                                | -40.04                                 | H            | 67.4  |
| 3346.40            | -47.77                                   | 5.64                                | -42.13                                 | H            | 69.5  |
| 4183.00            | -48.73                                   | 7.15                                | -41.59                                 | H            | 68.9  |
| 5019.60            | -56.05                                   | 7.97                                | -48.09                                 | H            | 75.4  |

Table 6-5. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

### NOTES:

1. This device was tested in all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 15 of 34                   |

## Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251  
 MEASURED OUTPUT POWER: 27.88 dBm = 0.614 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  40.88 dBc

| FREQUENCY<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA GAIN<br>(dBd) | SPURIOUS<br>EMISSION<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|--------------------|------------------------------------------|-------------------------------------|----------------------------------------|--------------|-------|
| 1697.60            | -39.01                                   | 2.08                                | -36.92                                 | H            | 64.8  |
| 2546.40            | -42.14                                   | 3.17                                | -38.97                                 | H            | 66.8  |
| 3395.20            | -47.58                                   | 5.84                                | -41.74                                 | H            | 69.6  |
| 4244.00            | -51.74                                   | 7.24                                | -44.49                                 | H            | 72.4  |
| 5092.80            | -57.43                                   | 8.03                                | -49.41                                 | H            | 77.3  |

Table 6-6. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)

### NOTES:

1. This device was tested in all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 16 of 34                   |

## 6.5 PCS GSM Radiated Measurements

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512  
 MEASURED OUTPUT POWER: 30.37 dBm = 1.088 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  43.37 dBc

| FREQUENCY (MHz) | LEVEL @ ANTENNA TERMINALS (dBm) | SUBSTITUTE ANTENNA GAIN (dBi) | SPURIOUS EMISSION LEVEL (dBm) | POL (H/V) | (dBc) |
|-----------------|---------------------------------|-------------------------------|-------------------------------|-----------|-------|
| 3700.40         | -44.64                          | 8.40                          | -36.24                        | H         | 66.6  |
| 5550.60         | -53.41                          | 10.62                         | -42.79                        | H         | 73.2  |
| 7400.80         | -46.87                          | 11.82                         | -35.05                        | H         | 65.4  |
| 9251.00         | -44.79                          | 13.30                         | -31.49                        | H         | 61.9  |
| 11101.20        | -44.07                          | 13.50                         | -30.57                        | H         | 60.9  |

**Table 6-7. Radiated Spurious Data (PCS GSM Mode – Ch. 512)**

#### NOTES:

1. This device was tested in all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

|                                      |                                                                                     |                                                      |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT (CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                        |                                                                                       | Page 17 of 34                   |

## PCS GSM Radiated Measurements (Cont'd)

### §2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661  
 MEASURED OUTPUT POWER: 29.52 dBm = 0.895 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  42.52 dBc

| FREQUENCY<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA GAIN<br>(dBi) | SPURIOUS<br>EMISSION<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|--------------------|------------------------------------------|-------------------------------------|----------------------------------------|--------------|-------|
| 3760.00            | -45.83                                   | 8.42                                | -37.41                                 | H            | 66.9  |
| 5640.00            | -51.53                                   | 10.66                               | -40.88                                 | H            | 70.4  |
| 7520.00            | -47.82                                   | 11.92                               | -35.90                                 | H            | 65.4  |
| 9400.00            | -43.85                                   | 13.24                               | -30.61                                 | H            | 60.1  |
| 11280.00           | -45.54                                   | 13.49                               | -32.06                                 | H            | 61.6  |

**Table 6-8. Radiated Spurious Data (PCS GSM Mode – Ch. 661)**

### NOTES:

1. This device was tested in all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 18 of 34                   |

## PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810  
 MEASURED OUTPUT POWER: 30.51 dBm = 1.126 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  43.51 dBc

| FREQUENCY<br>(MHz) | LEVEL @<br>ANTENNA<br>TERMINALS<br>(dBm) | SUBSTITUTE<br>ANTENNA GAIN<br>(dBi) | SPURIOUS<br>EMISSION<br>LEVEL<br>(dBm) | POL<br>(H/V) | (dBc) |
|--------------------|------------------------------------------|-------------------------------------|----------------------------------------|--------------|-------|
| 3819.60            | -46.93                                   | 8.57                                | -38.36                                 | H            | 68.9  |
| 5729.40            | -50.08                                   | 10.69                               | -39.38                                 | H            | 69.9  |
| 7639.20            | -52.86                                   | 12.07                               | -40.79                                 | H            | 71.3  |
| 9549.00            | -39.42                                   | 13.20                               | -26.22                                 | H            | 56.7  |
| 11458.80           | -47.58                                   | 13.42                               | -34.16                                 | H            | 64.7  |

**Table 6-9. Radiated Spurious Data (PCS GSM Mode – Ch. 810)**

### NOTES:

1. This device was tested in all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the horizontal setup. The data reported in the table above was measured in this test setup.

|                                      |                                                                                     |                                                         |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFC195N                     |  | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012                                                    | EUT Type:<br>Portable Handset                           |                                                                                       | Page 19 of 34                   |

## 6.6 Cellular GSM Frequency Stability Measurements

§2.1055, 22.355; RSS-132 (4.3)

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 190

REFERENCE VOLTAGE: 3.7 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

| VOLTAGE (%)    | POWER (VDC) | TEMP (°C)  | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 %          | 3.70        | + 20 (Ref) | 836,599,993    | -7              | -0.000001     |
| 100 %          |             | - 30       | 836,599,989    | -11             | -0.000001     |
| 100 %          |             | - 20       | 836,599,982    | -18             | -0.000002     |
| 100 %          |             | - 10       | 836,599,994    | -7              | -0.000001     |
| 100 %          |             | 0          | 836,599,998    | -2              | 0.000000      |
| 100 %          |             | + 10       | 836,599,996    | -5              | -0.000001     |
| 100 %          |             | + 20       | 836,599,992    | -8              | -0.000001     |
| 100 %          |             | + 30       | 836,599,984    | -16             | -0.000002     |
| 100 %          |             | + 40       | 836,599,987    | -13             | -0.000002     |
| 100 %          |             | + 50       | 836,599,994    | -6              | -0.000001     |
| 115 %          | 4.26        | + 20       | 836,599,987    | -14             | -0.000002     |
| BATT. ENDPOINT | 3.39        | + 20       | 836,599,979    | -21             | -0.000002     |

**Table 6-10. Frequency Stability Data (Cellular GSM Mode – Ch. 190)**

## Cellular GSM Frequency Stability Measurements (Cont'd)

§2.1055, 22.355; RSS-132 (4.3)

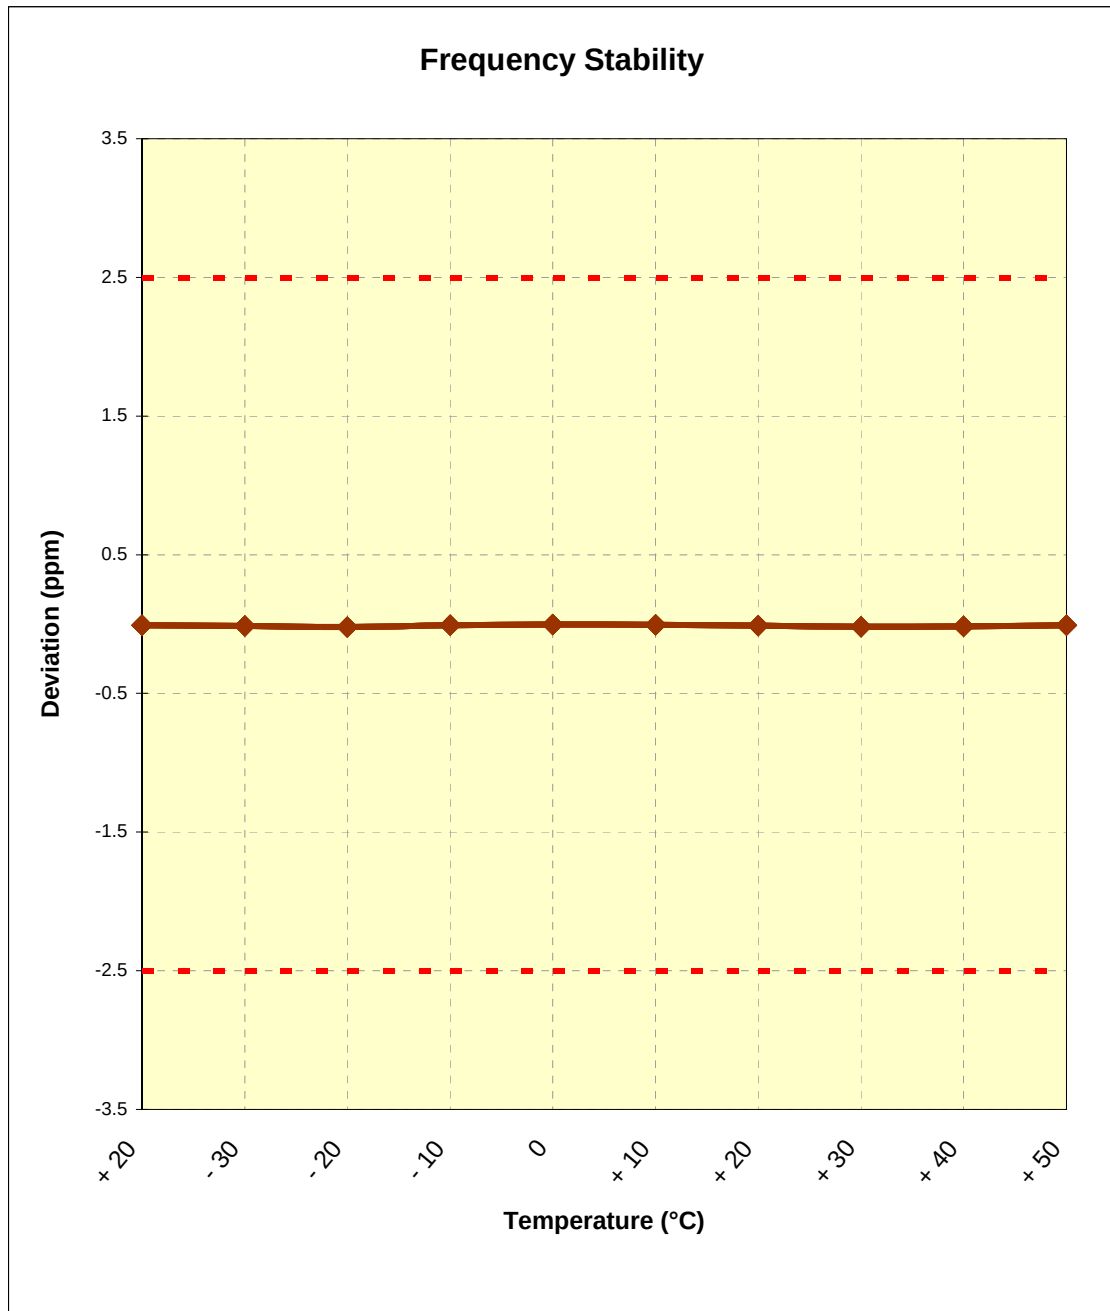

**Figure 6-1. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)**

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 21 of 34                   |



## 6.7 PCS GSM Frequency Stability Measurements

§2.1055, 24.235; RSS-133 (6.3)


OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 661  
 REFERENCE VOLTAGE: 3.7 VDC

| VOLTAGE (%)    | POWER (VDC) | TEMP (°C)  | FREQUENCY (Hz) | Freq. Dev. (Hz) | Deviation (%) |
|----------------|-------------|------------|----------------|-----------------|---------------|
| 100 %          | 3.70        | + 20 (Ref) | 1,879,999,986  | -14             | -0.000001     |
| 100 %          |             | - 30       | 1,879,999,979  | -21             | -0.000001     |
| 100 %          |             | - 20       | 1,879,999,983  | -17             | -0.000001     |
| 100 %          |             | - 10       | 1,879,999,986  | -14             | -0.000001     |
| 100 %          |             | 0          | 1,879,999,984  | -16             | -0.000001     |
| 100 %          |             | + 10       | 1,879,999,987  | -13             | -0.000001     |
| 100 %          |             | + 20       | 1,879,999,981  | -19             | -0.000001     |
| 100 %          |             | + 30       | 1,879,999,979  | -21             | -0.000001     |
| 100 %          |             | + 40       | 1,879,999,982  | -18             | -0.000001     |
| 100 %          |             | + 50       | 1,879,999,985  | -15             | -0.000001     |
| 115 %          | 4.26        | + 20       | 1,879,999,989  | -12             | -0.000001     |
| BATT. ENDPOINT | 3.39        | + 20       | 1,879,999,994  | -6              | 0.000000      |

**Table 6-11. Frequency Stability Data (PCS GSM Mode – Ch. 661)**

## PCS GSM Frequency Stability Measurements (Cont'd)


§2.1055, 24.235; RSS-133 (6.3)

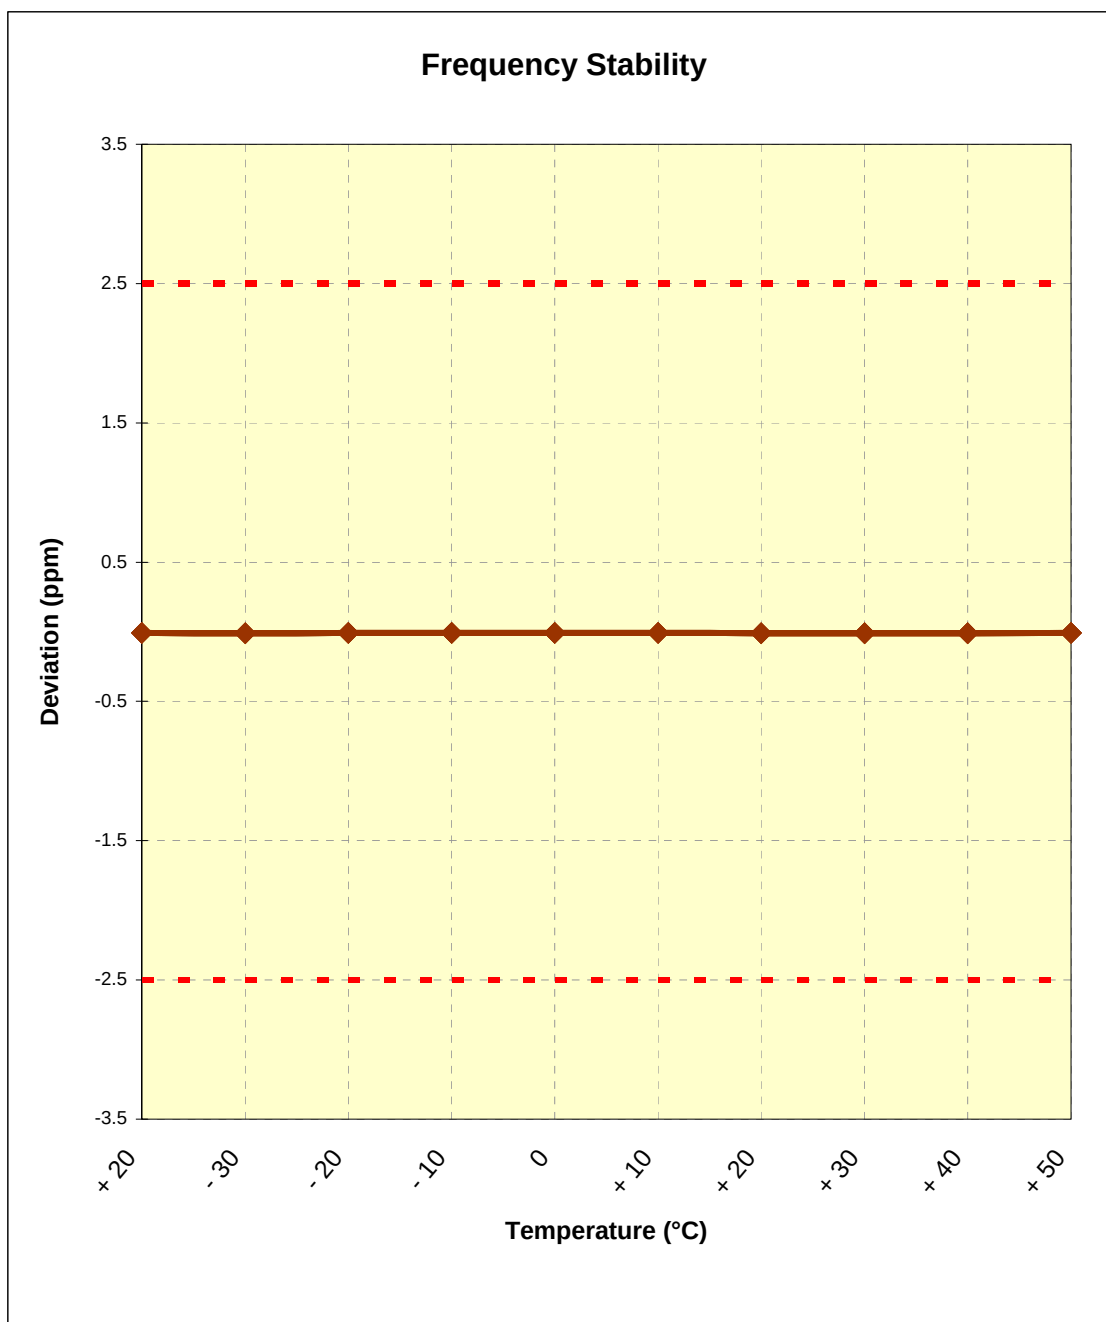


**Figure 6-2. Frequency Stability Graph (PCS GSM Mode – Ch. 661)**

|                                      |                                               |                                                         |    |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|----|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | LG | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |    | Page 23 of 34                   |

## 7.0 PLOTS OF EMISSIONS

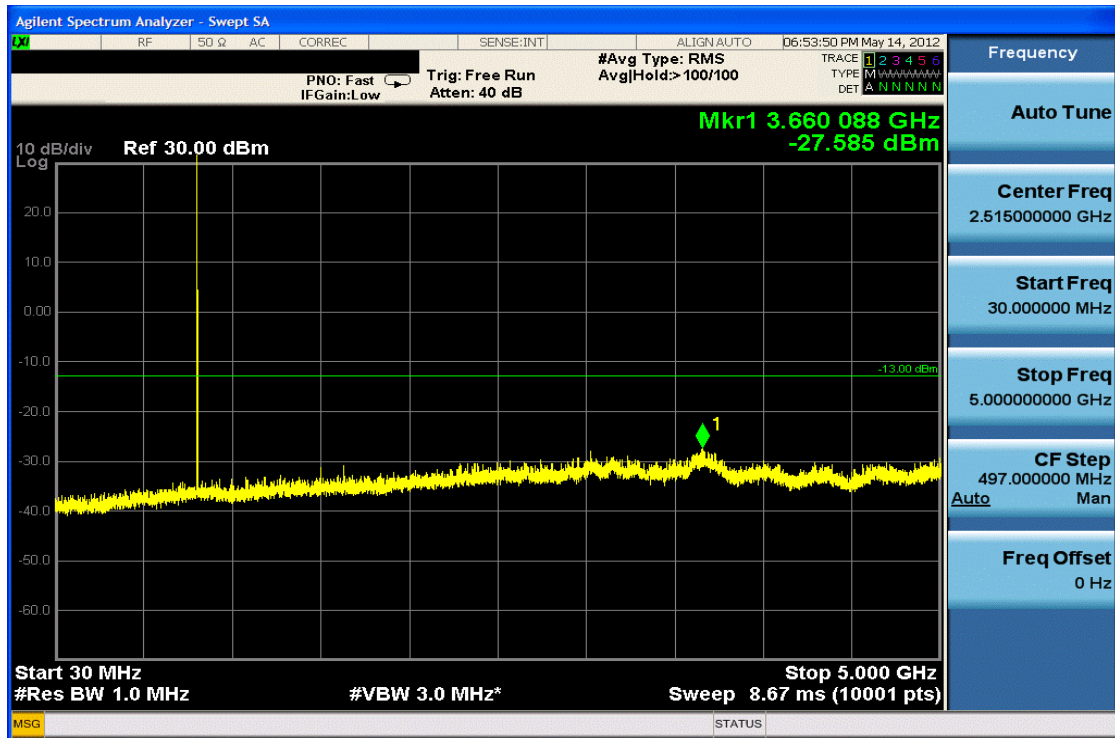


Plot 7-1. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

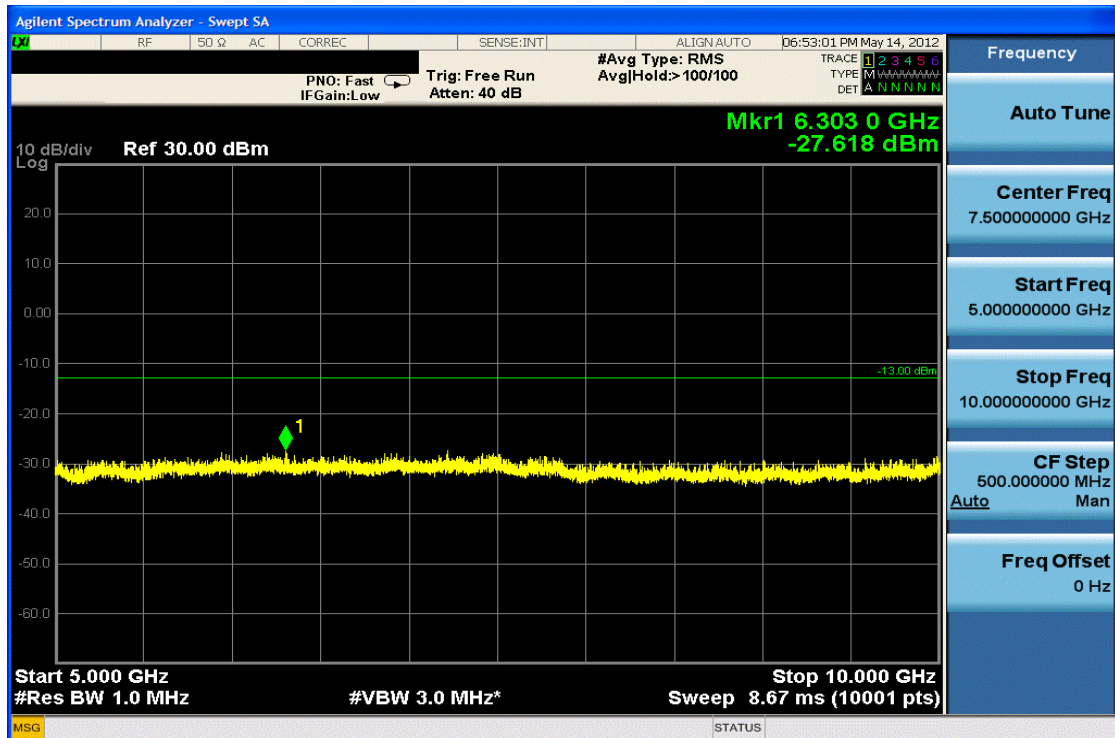


Plot 7-2. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 24 of 34                   |

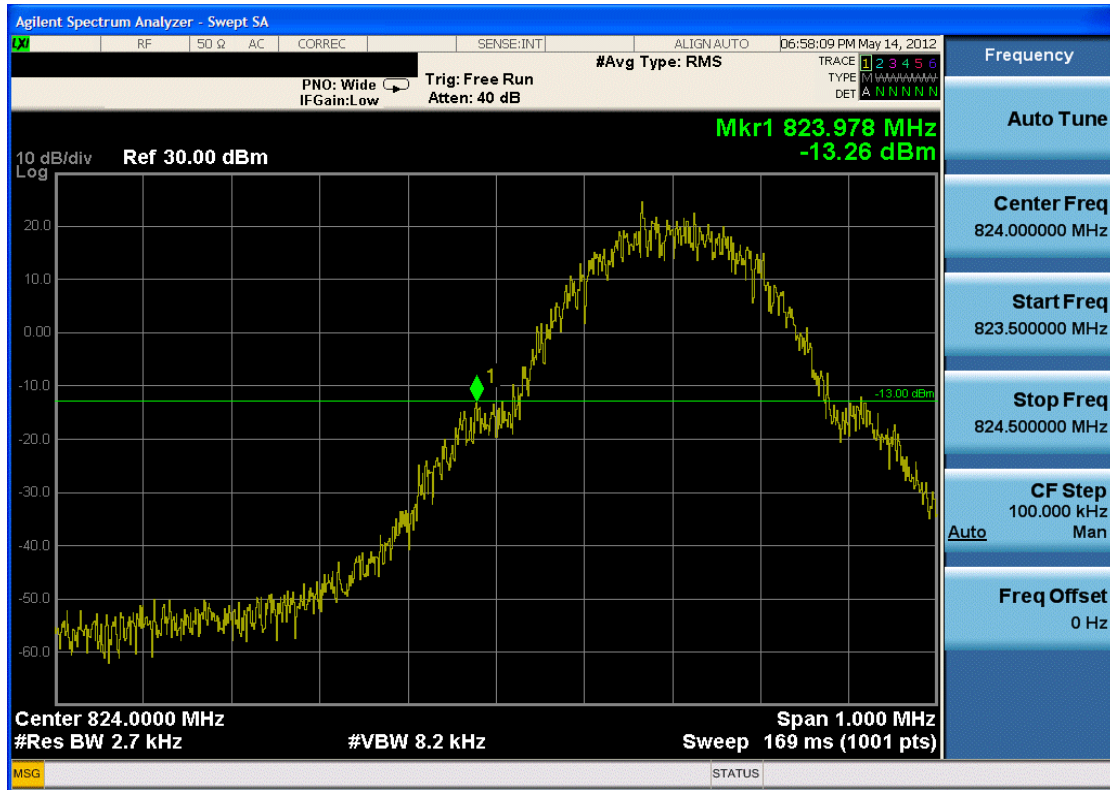


Plot 7-3. Band Edge Plot (Cellular GSM Mode – Ch. 128)

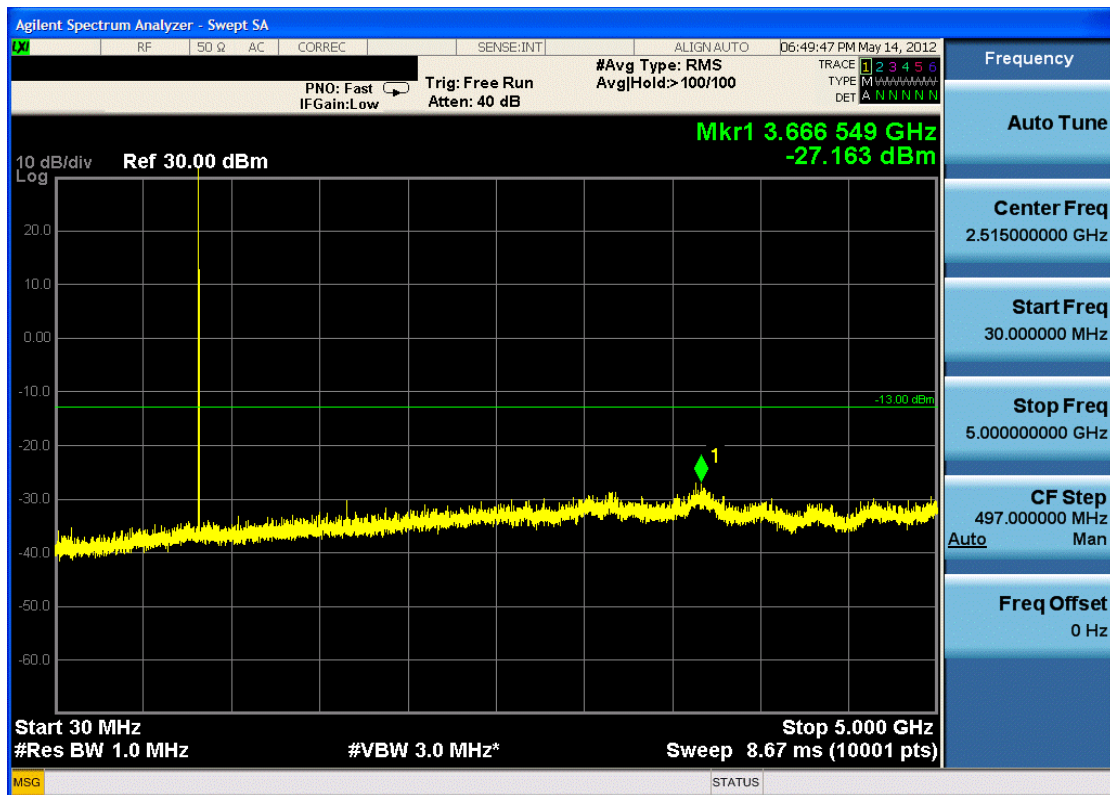


Plot 7-4. Conducted Spurious (Cellular GSM Mode – Ch. 190)

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 25 of 34                   |

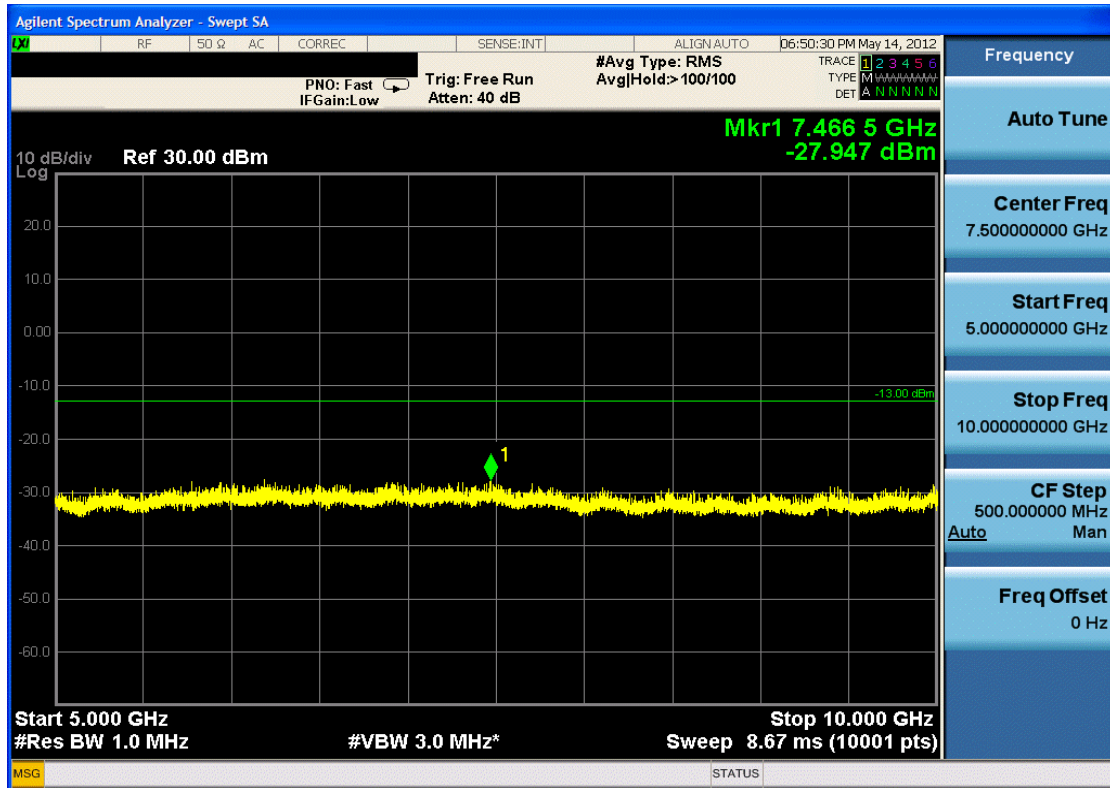


Plot 7-5. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

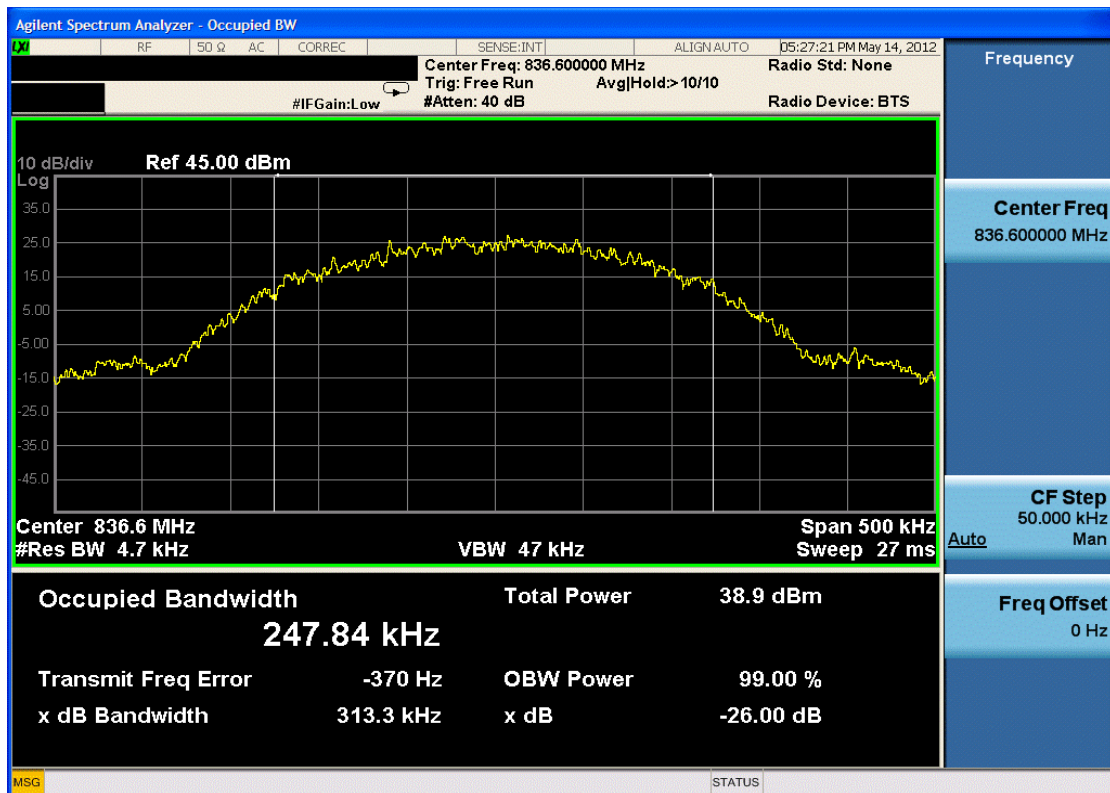


Plot 7-6. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 26 of 34                   |



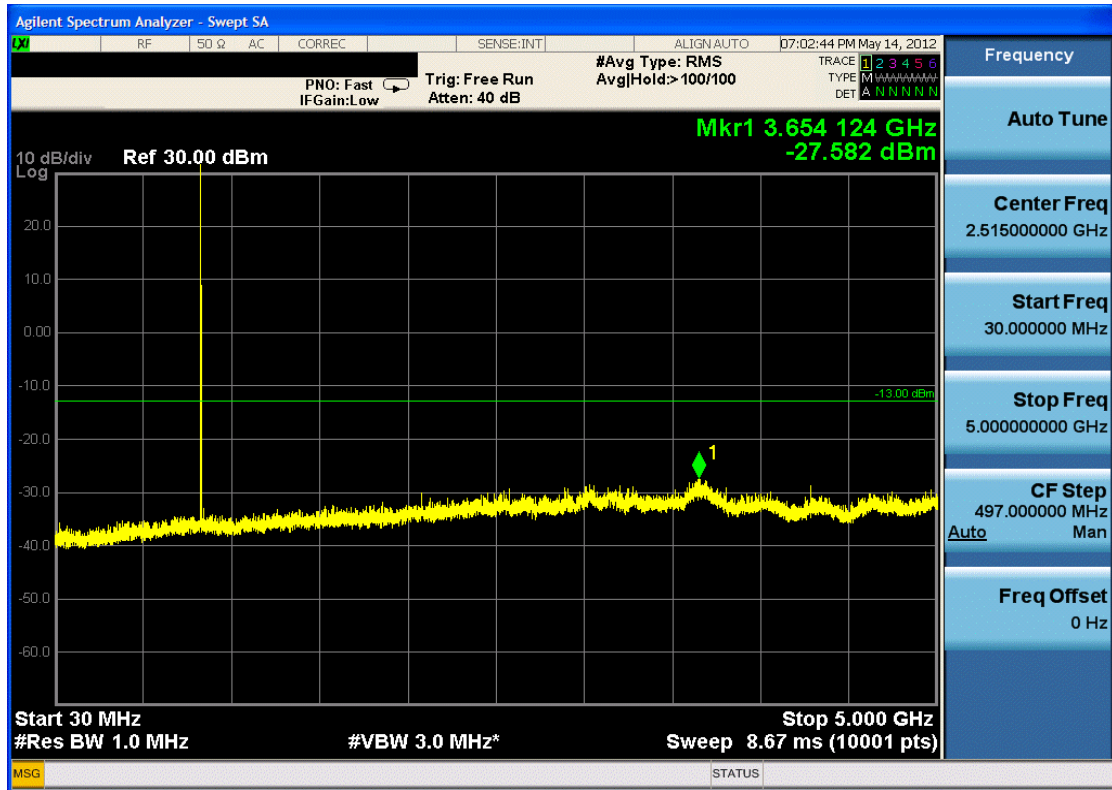


Plot 7-7. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

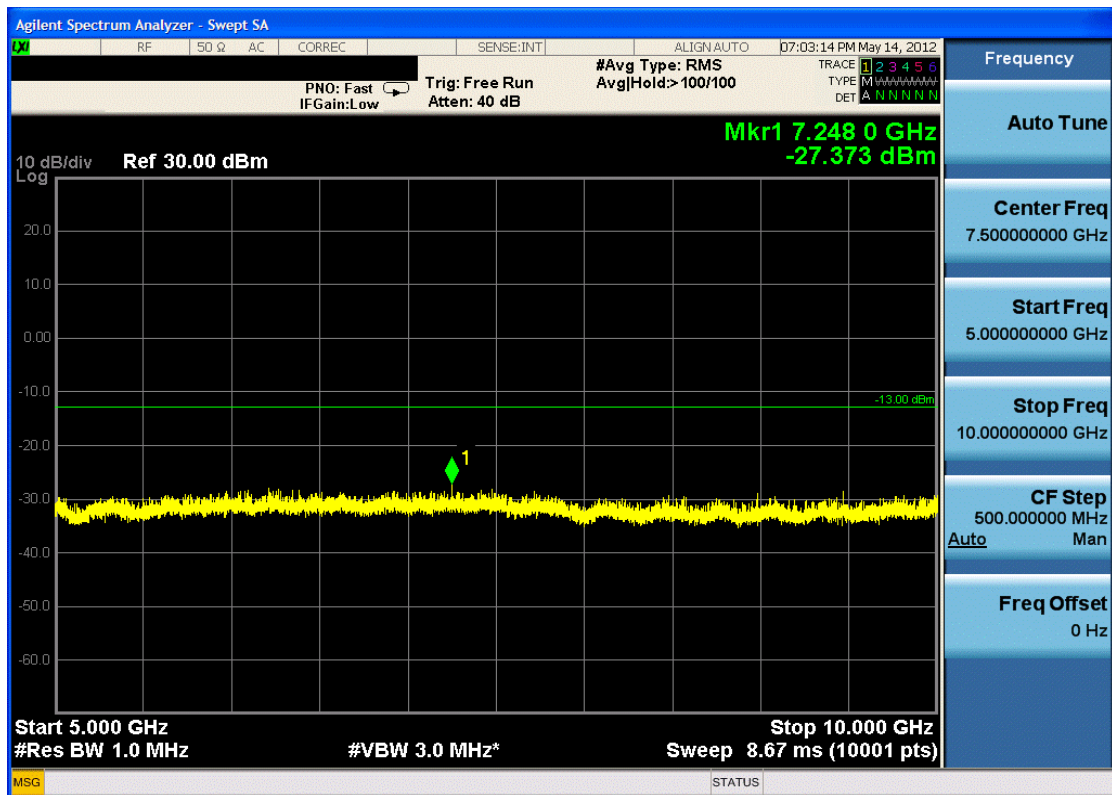


Plot 7-8. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 27 of 34                   |

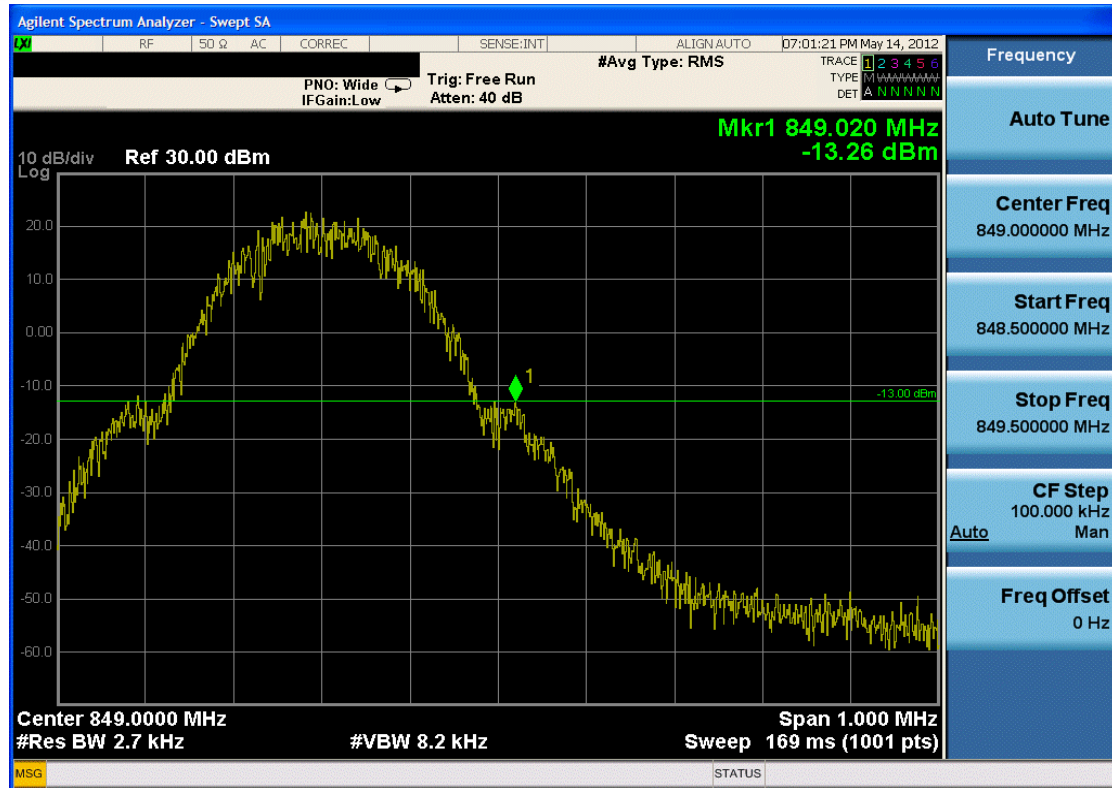


### Plot 7-9. Band Edge Plot (Cellular GSM Mode – Ch. 251)

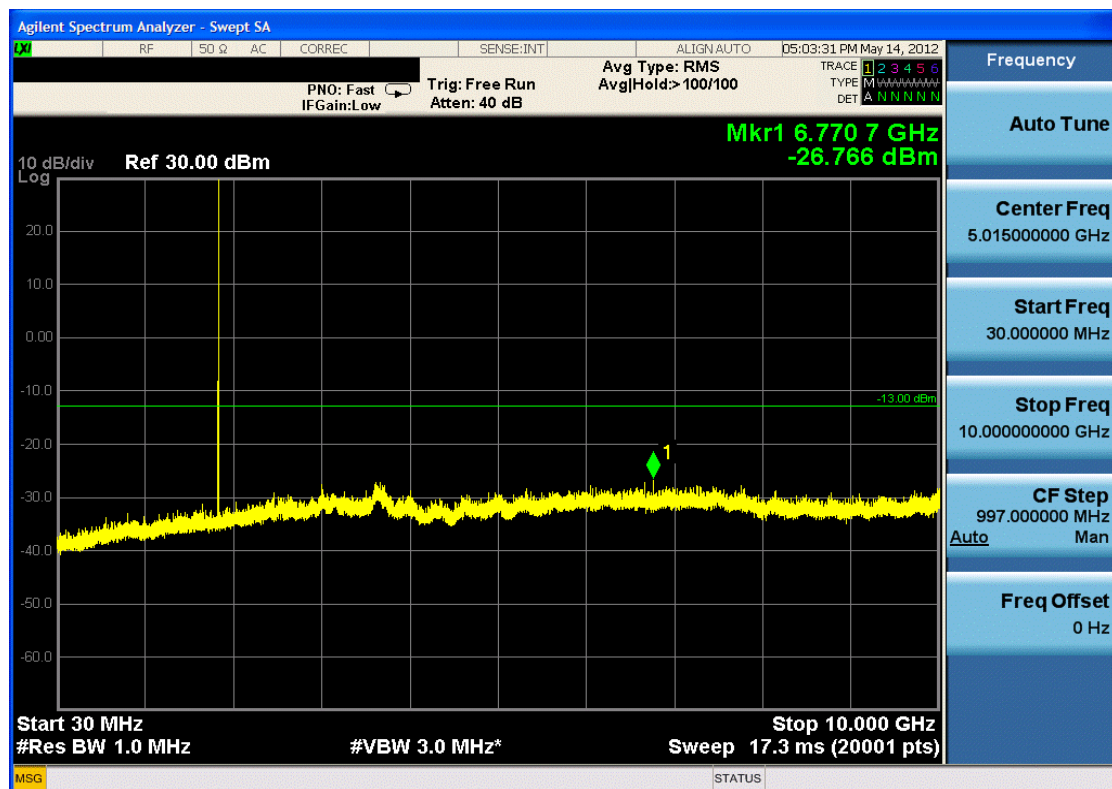


### Plot 7-10. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

|                                             |                                                                                                                                                                                                                                           |                                      |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|----------------------------------------|
| FCC ID: ZNFC195N                            |  <b>FCC Pt. 22/24 GSM MEASUREMENT REPORT<br/>(CERTIFICATION)</b>  |                                      | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1205070639.ZNF | <b>Test Dates:</b><br>May 14 - 15, 2012                                                                                                                                                                                                   | <b>EUT Type:</b><br>Portable Handset | Page 28 of 34                          |

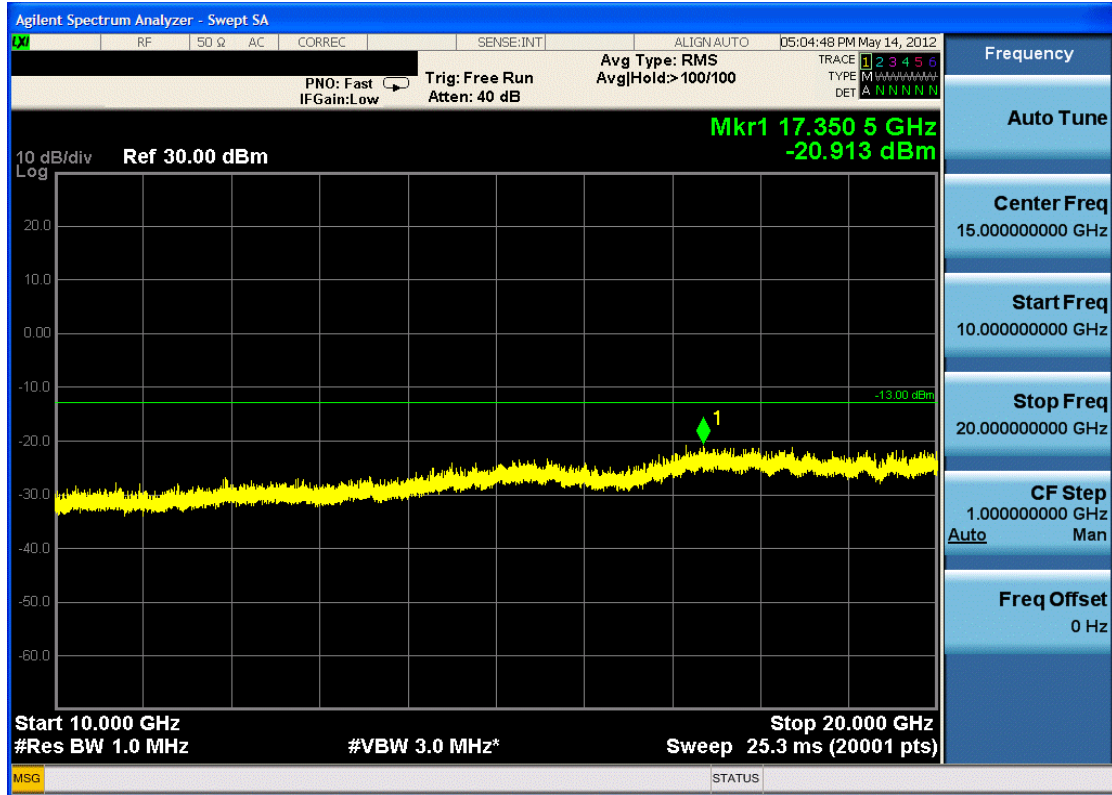


Plot 7-11. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

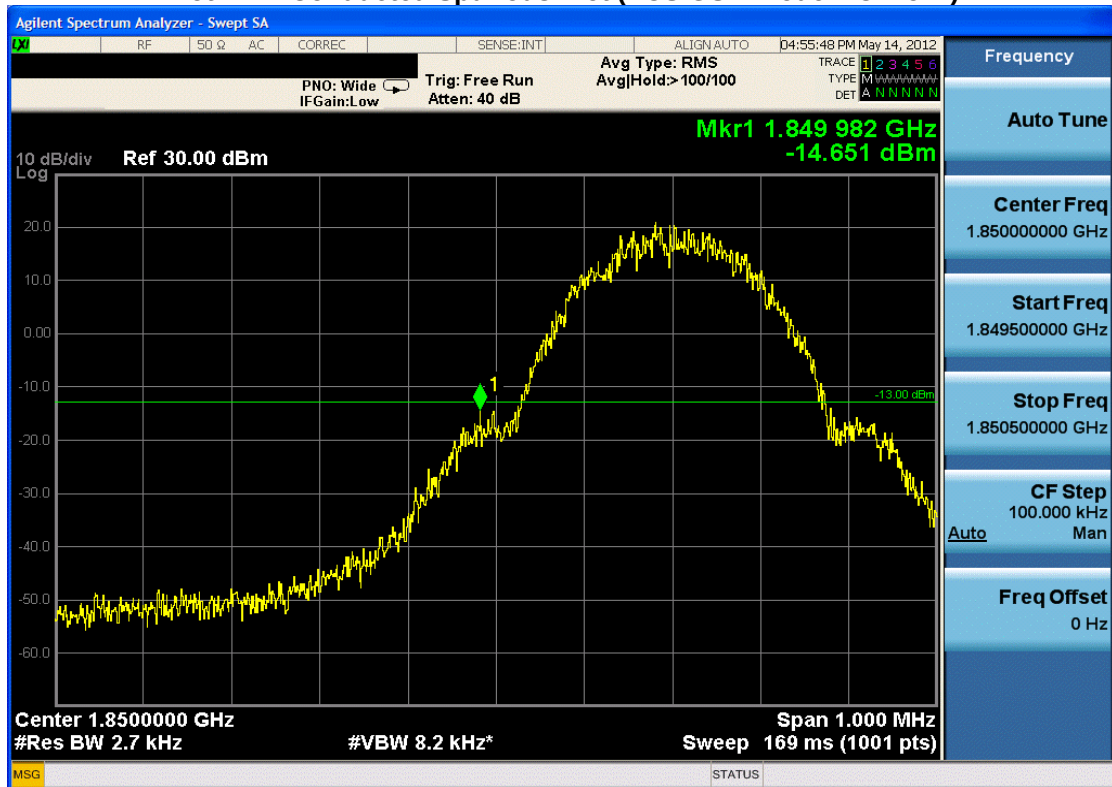


Plot 7-12. Band Edge Plot (PCS GSM Mode – Ch. 512)

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 29 of 34                   |



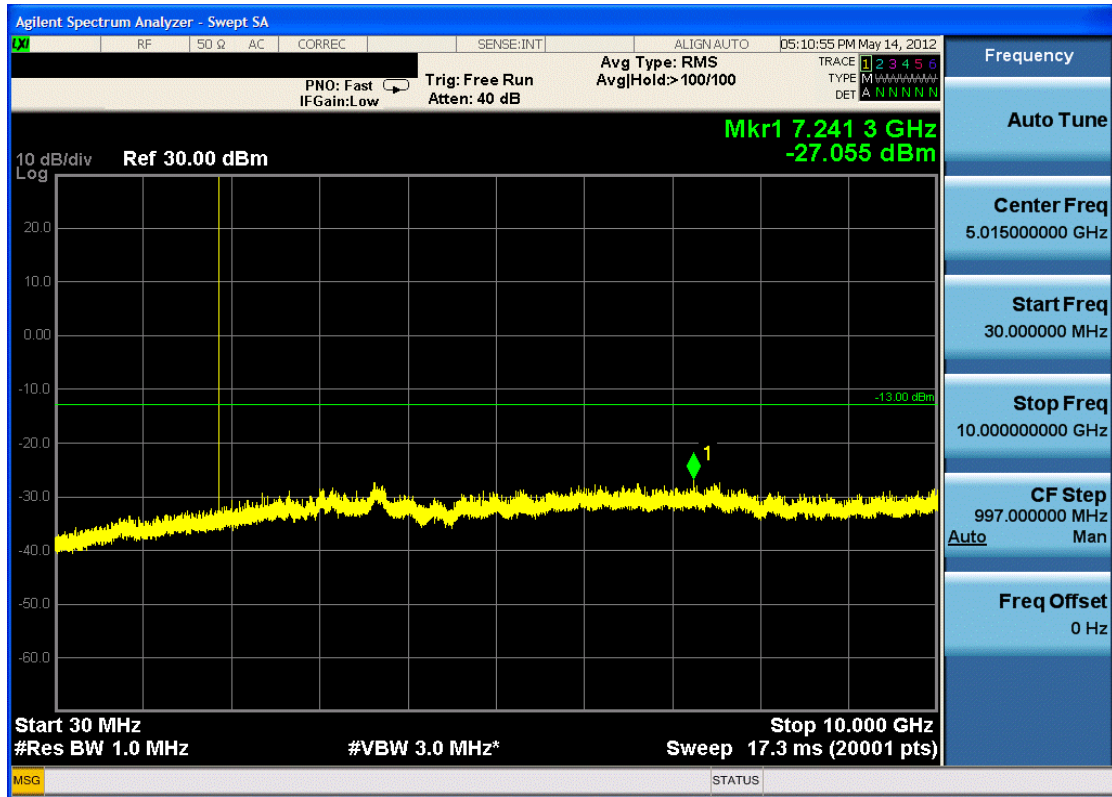


Plot 7-13. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

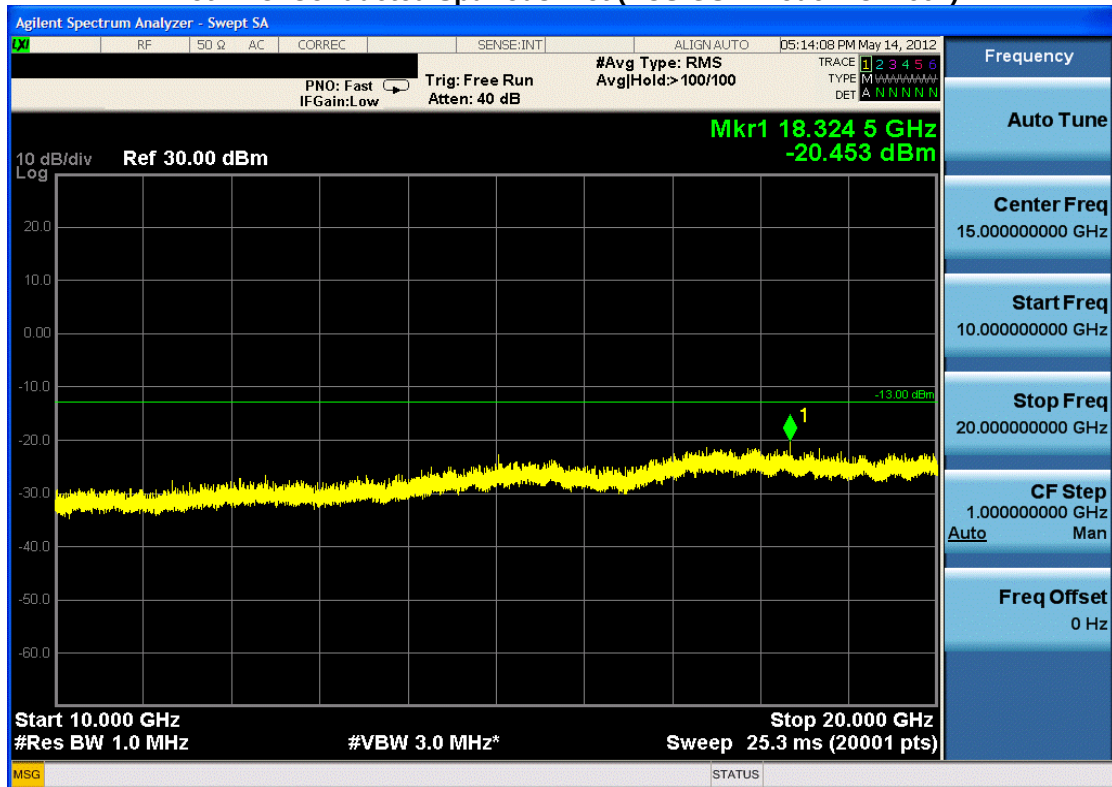


Plot 7-14. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 30 of 34                   |

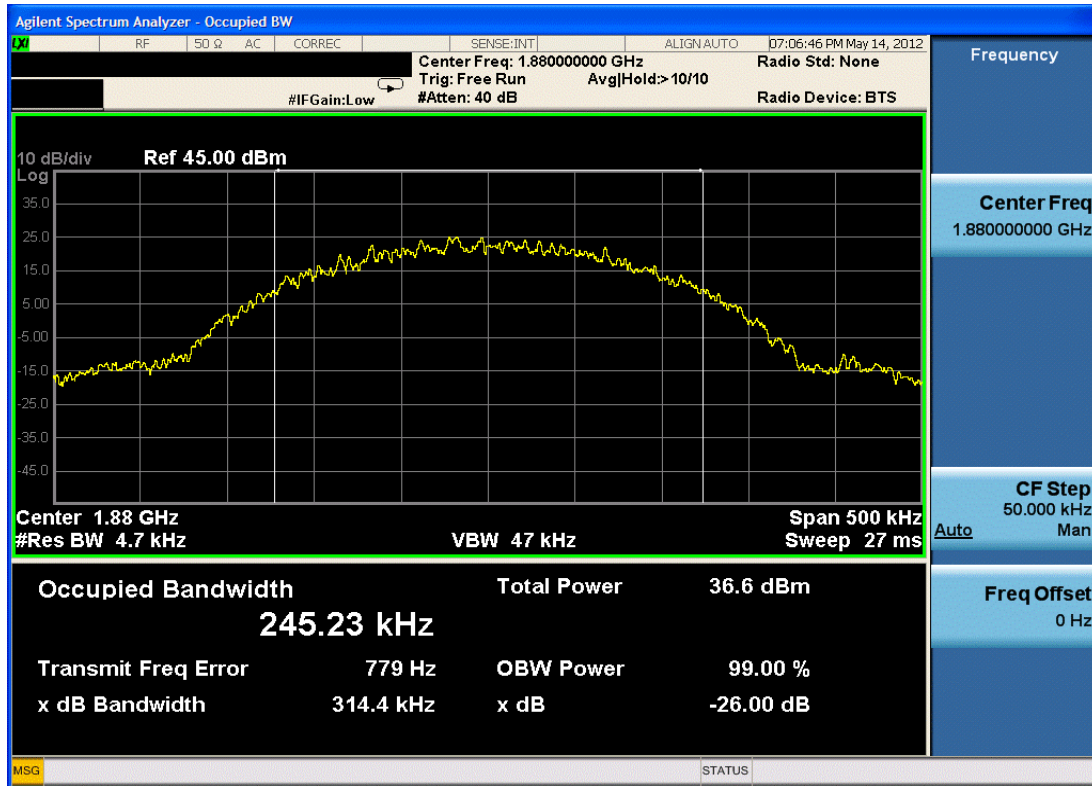


Plot 7-15. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)

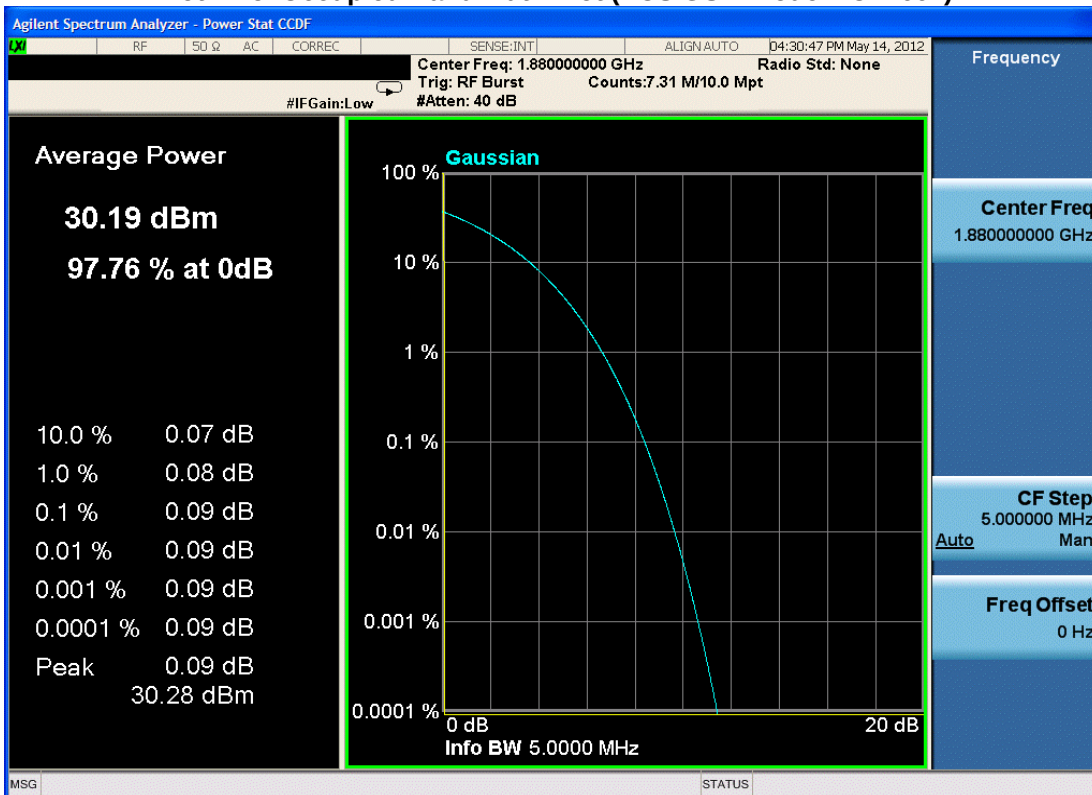


Plot 7-16. Peak-Average Ratio Plot (PCS GSM Mode – Ch. 661)

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 31 of 34                   |

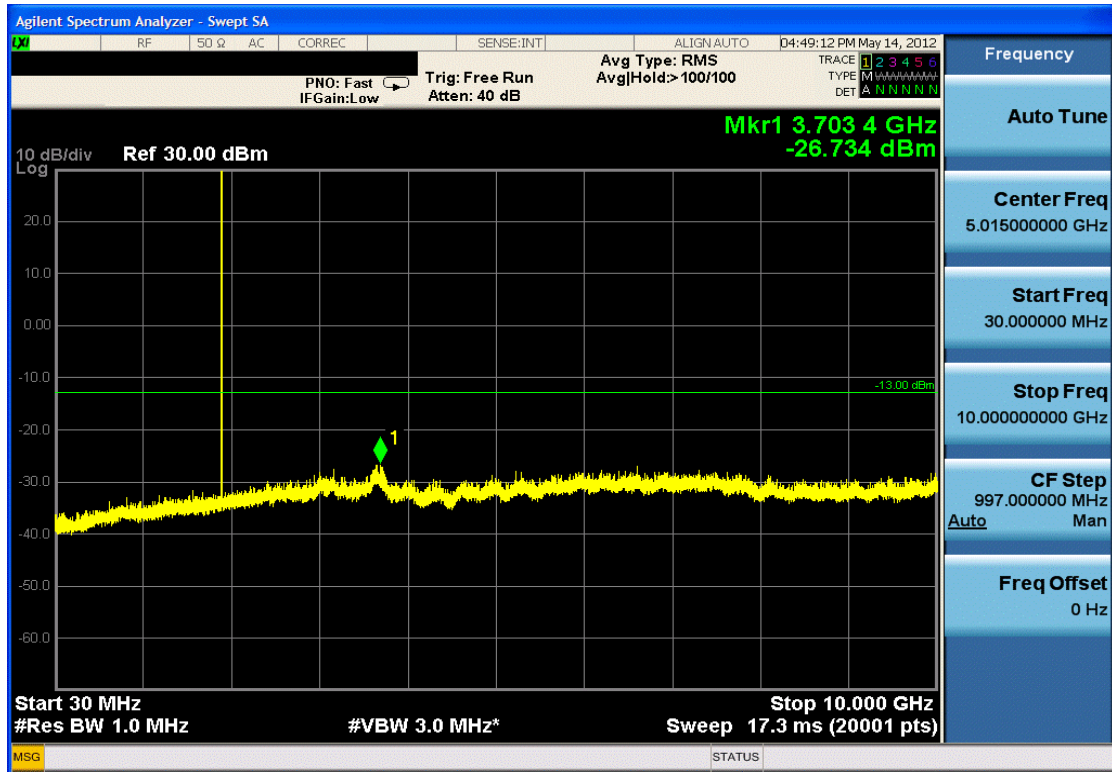

Plot 7-17. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

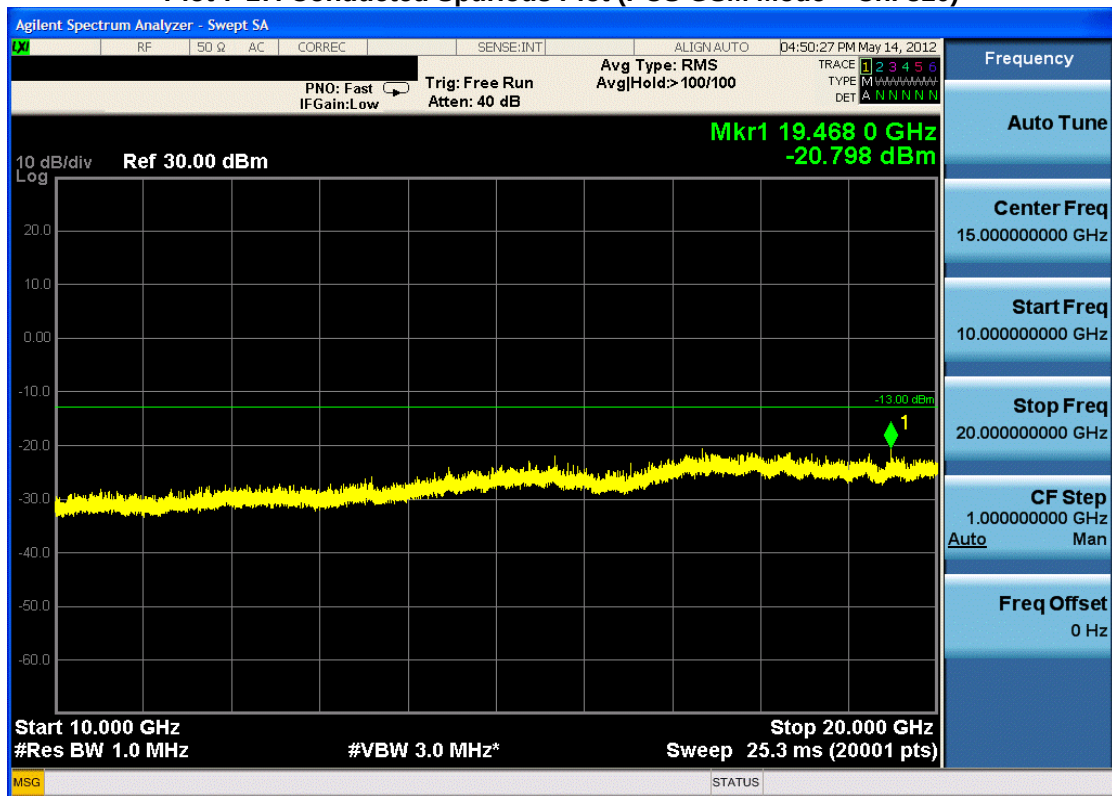

Plot 7-18. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

|                                      |                                               |                                                         |           |                                 |
|--------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFC195N                     | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22/24 GSM MEASUREMENT REPORT<br>(CERTIFICATION) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1205070639.ZNF | Test Dates:<br>May 14 - 15, 2012              | EUT Type:<br>Portable Handset                           |           | Page 32 of 34                   |



## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset**  
**FCC ID: ZNFC195N** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules and RSS-132 and RSS-133 of the Industry Canada rules.

|                                             |                                                                                     |                                                                 |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFC195N                     |  | <b>FCC Pt. 22/24 GSM MEASUREMENT REPORT<br/>(CERTIFICATION)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1205070639.ZNF | <b>Test Dates:</b><br>May 14 - 15, 2012                                             | <b>EUT Type:</b><br>Portable Handset                            |                                                                                       | Page 34 of 34                          |