

# EMC TEST REPORT

Test item : Mobile Handset  
Model No. : LG-D722J  
Order No. : DTNC1408-03706  
Date of receipt : 2014-08-25  
Test duration : 2014-09-15  
Date of Issue : 2014-10-08

Applicant : LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Test laboratory : DT&C Co., Ltd.  
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935


Test specification : ANSI C 63.4:2009  
FCC Part 15 Subpart B  
(Class B personal computers and peripherals)

Test environment : Temperature : 24 °C,  
Humidity : (42 ~ 49) % R.H.

Test result :  Comply  Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.  
This test report shall not be reproduced except in full, without the written approval of Dt&C Co., Ltd.

Tested by:



Engineer  
SangWon Lee

Reviewed by:



Technical Manager  
YoungKyu Shin

**PRESIDENT OF DT&C Co., Ltd.**

## CONTENTS

<b>1. General Remarks</b> .....	3
<b>2. Test Laboratory</b> .....	3
<b>3. General Information of EUT</b> .....	4
<b>4. Test Summary</b> .....	5
4.1 Applied standards and test results .....	5
4.2 Test environment and conditions .....	5
4.3 Test result Summary .....	5
<b>5. Test Set-up and operation mode</b> .....	6
5.1 Principle of Configuration Selection .....	6
5.2 Test Operation Mode .....	6
5.3 Support Equipment Used .....	6
<b>6. Test Results : Emission</b> .....	7
6.1 Conducted Disturbance .....	7
6.2 Radiated Disturbance .....	10
<b>Appendix 1</b> .....	18
<b>List of Test and Measurement Instruments</b> .....	18
<b>Appendix 2</b> .....	20
<b>Report Revision History</b> .....	20

## 1. General Remarks

This report contains the result of tests performed by:

**Dt&C Co., Ltd.**

Address : 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

<http://www.dtn.net>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

## 2. Test Laboratory

Dt&C Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	KR0034 101842 678747 596748	Accredited 2.948 Listed
	Canada	IC	5740A-1 5740A-2	Registered
	Japan	VCCI	C-1427 R-1364, R-3385, R-4076, R-4180, T-1442, G-338, G754, G-815	Registered
Certification	Korea	KC	KR0034	Designation
	Germany	TUV	CARAT 13 11 86721 001	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

### 3. General Information of EUT

Kind of Equipment	Mobile Handset
Model No.	LG-D722J
Add Model No	D722J, LGD722J
Serial No	NONE
FCC ID	ZNFD722J
Supplied Power for Test	AC 120 V, 60 Hz
Operation Frequency	1.2 GHz
Applicant	LG Electronics MobileComm U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
Manufacturer	LG Electronics MobileComm U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Related Submittal(s) / Grant(s)**

**Original submittal only.**

## 4. Test Summary

### 4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2009	C
Radiated Disturbance	ANSI C63.4:2009	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

### 4.2 Test environment and conditions

Test Items	Test date (YYYY-MM-DD)	Temp (°C)	Humidity (% R.H.)
Conducted Disturbance	2014-09-15	24	42
Radiated Disturbance	2014-09-15	24	49

### 4.3 Test result Summary

#### (1) Conducted Emission

Frequency [MHz]	Phase	Result [dB $\mu$ V]	Detector	Limit [dB $\mu$ V]	Margin [dB]
11.62120	N	46.1	Average	50.0	3.9

#### (2) Radiated Emission

Frequency [MHz]	Pol.	Result [dB( $\mu$ V/m)]	Detector	Limit [dB( $\mu$ V/m)]	Margin [dB]
796.713	H	40.4	Quasi-Peak	46.0	5.6

## 5. Test Set-up and operation mode

### 5.1 Principle of Configuration Selection

**Emission** : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 5.2 Test Operation Mode

- PC link mode (The measurement was made of the maximized by : changing the data transmission speed; moving the cable.)

### 5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE				Back shell	FCC ID
				Connect type	Length (m)	shield	With Ferrite		
MONITOR	U2312HMT	CN-036N7K-74445-199-440L	DELL	Power DVI	1.8 1.8	Non-shield Shield	X O <sub>(NOTE)</sub>	Plastic	DOC
KEYBOARD	KB-065	CN11163235	HP	USB	1.6	Shield	X	Plastic	DOC
MOUSE	M-UAE96	N/A	LOGITECH	USB	1.7	Shield	X	Plastic	DOC
PRINTER	SRP-770	N/A	BIXOLON	Power Parallel	1.8 2.0	Non-shield Shield	O <sub>(NOTE)</sub> X	Plastic	DOC
PC	OPTIPLEX330	D8FQFBX	DELL	Power	1.8	Non-shield	X	Plastic	DOC
				DVI	1.8	Shield	O <sub>(NOTE)</sub>		
				USB	1.6	Shield	X		
				USB	1.7	Shield	X		
				USB	3.0	Shield	X		
Parallel	2.0	Non-shield	X						
LAN	3.0	Non-shield	X						
EXTERNAL HDD	9ZR8N1-500	NA0H2L7Z	Seagate	USB	0.5	Shield	X	Plastic	DOC

\* NOTE) The cable with ferrite core is provided by manufacturer.

## 6. Test Results : Emission

### 6.1 Conducted Disturbance

#### 6.1.1 Measurement Procedure

In the range of 0.15 MHz to 30 MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 0.4 m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Connect the EUT's power source lines to the PC power through the LISN. All the other peripherals are connected to the 2<sup>nd</sup> LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

#### 6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1 The lower limit shall apply at the transition frequencies.  
 Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

- Note) 1. Emission Level = Reading Value + Correction Factor.  
 2. Correction Factor = Cable Loss + Insertion Loss of LISN  
 3. Margin = Limit - Emission level

## Test Result

### Results of Conducted Emission

DT&C



Date : 2014-09-15

Model No. : DTNC1408-03706  
 Type :  
 Serial No. :  
 Test Condition :

Reference No. :  
 Power Supply : 120 V 60 Hz  
 Temp/Humi. : 24 °C 42 % R.H.  
 Operator :

Memo :

LIMIT : CISPR22\_B QP  
 CISPR22\_B AV

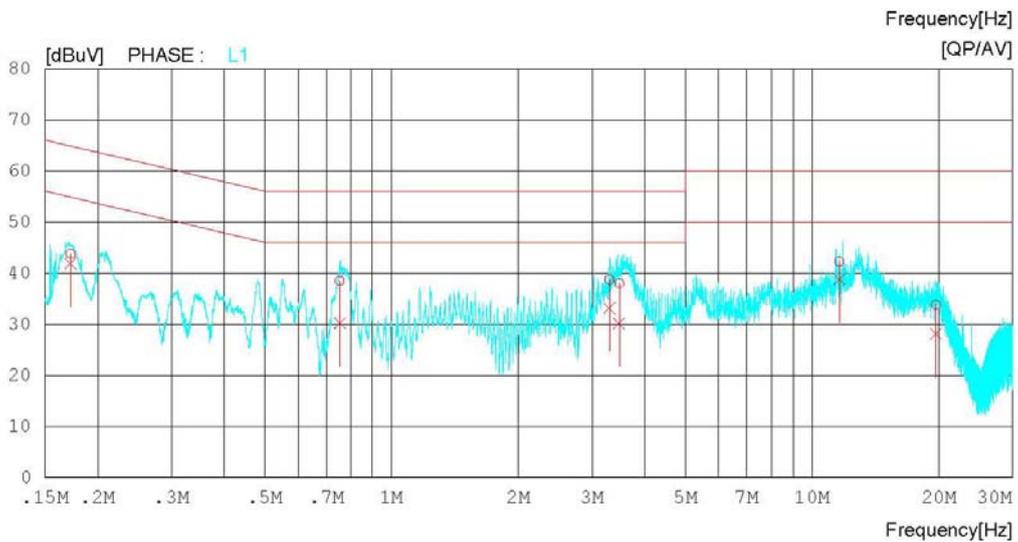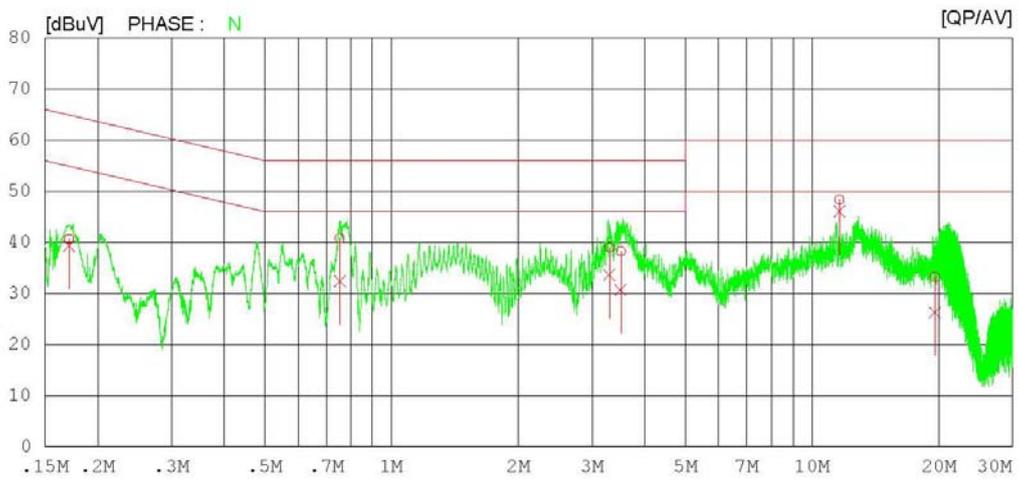

## Results of Conducted Emission

DT&C

Date : 2014-09-15

Model No. : DTNC1408-03706  
 Type :  
 Serial No. :  
 Test Condition :

Reference No. :  
 Power Supply : 120 V 60 Hz  
 Temp/Humi. : 24 °C 42 % R.H.  
 Operator :

Memo :

LIMIT : CISPR22\_B QP  
 CISPR22\_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.17105	40.5	39.1	0.1	40.6	39.2	64.9	54.9	24.3	15.7	N
2	0.75401	40.5	32.2	0.2	40.7	32.4	56.0	46.0	15.3	13.6	N
3	3.29640	38.7	33.4	0.2	38.9	33.6	56.0	46.0	17.1	12.4	N
4	3.50760	38.0	30.5	0.2	38.2	30.7	56.0	46.0	17.8	15.3	N
5	11.62120	47.6	45.4	0.7	48.3	46.1	60.0	50.0	11.7	3.9	N
6	19.58880	32.4	25.4	0.8	33.2	26.2	60.0	50.0	26.8	23.8	N
7	0.17239	43.5	41.6	0.2	43.7	41.8	64.8	54.8	21.1	13.0	L1
8	0.75424	38.4	30.1	0.1	38.5	30.2	56.0	46.0	17.5	15.8	L1
9	3.29760	38.3	32.8	0.4	38.7	33.2	56.0	46.0	17.3	12.8	L1
10	3.48080	37.5	29.7	0.4	37.9	30.1	56.0	46.0	18.1	15.9	L1
11	11.61800	41.3	37.9	0.9	42.2	38.8	60.0	50.0	17.8	11.2	L1
12	19.70840	32.8	27.1	1.0	33.8	28.1	60.0	50.0	26.2	21.9	L1

## 6.2 Radiated Disturbance

### 6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 3 m or 10 m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Rotate the EUT from (0 - 360)° and position the receiving antenna at heights from (1 - 4) m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1 GHz frequency range, Quasi-Peak detector with 120 kHz RBW was used.

Peak detector with 1 MHz RBW and 1 MHz VBW were used for above 1 GHz frequency range, also used linear average detector with defined in CISPR 16-1-1.

For further description of the configuration refer to the picture of the test set-up.

## 6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1 000
108 – 500	2 000
500 – 1 000	5 000
Above 1 000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

### (1) Limit for Radiated Emission below 1 000MHz

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (3 m distance)
	Quasi-peak (dB $\mu$ V/m)	Quasi-peak (dB $\mu$ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1 000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.

Note 2 Additional provisions may be required for cases where interference occurs.

Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (10 m distance)
	Quasi-peak (dB $\mu$ V/m)	Quasi-peak (dB $\mu$ V/m)
30 to 230	40	30
230 to 1 000	47	37

### (2) Limits for Radiated Emission above 1 000MHz at a measuring distance of 3 m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
1 to 40	80	60	74	54

Note)1. Emission Level = Reading Value + loss - gain + Ant Factor

2. Margin = Limit - Emission level

3. Loss = Cable loss, gain = Amp gain, Ant Factor = Antenna Factor

**Test Result**

< 30 MHz ~ 1 GHz >

**RADIATED EMISSION**



Date : 2014-09-15

Model Name : DTNC1408-03706  
 Model No. :  
 Serial No. :  
 Test Condition :

Reference No. :  
 Power Supply : 120 V 60 Hz  
 Temp/Humi : 24 °C 49 % R.H.  
 Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)  
 MARGIN: 3 dB

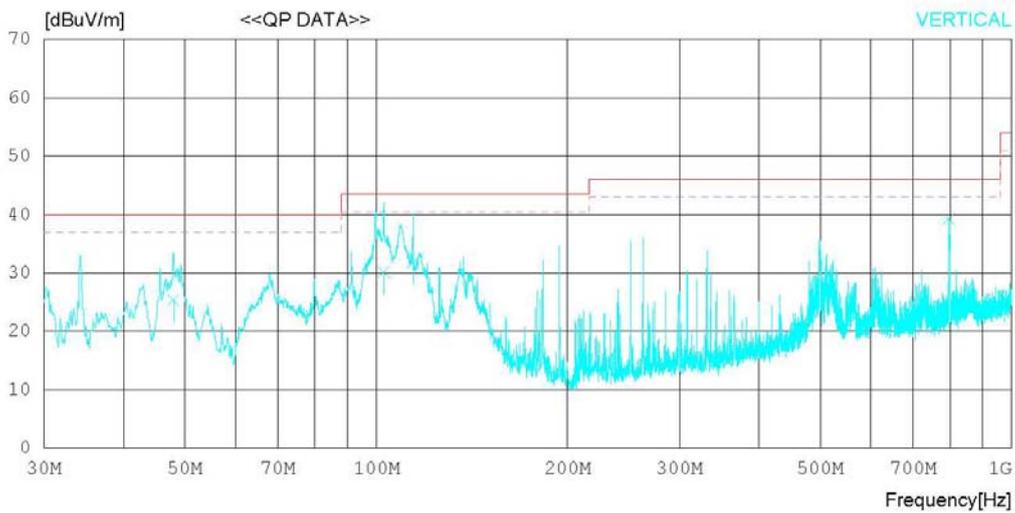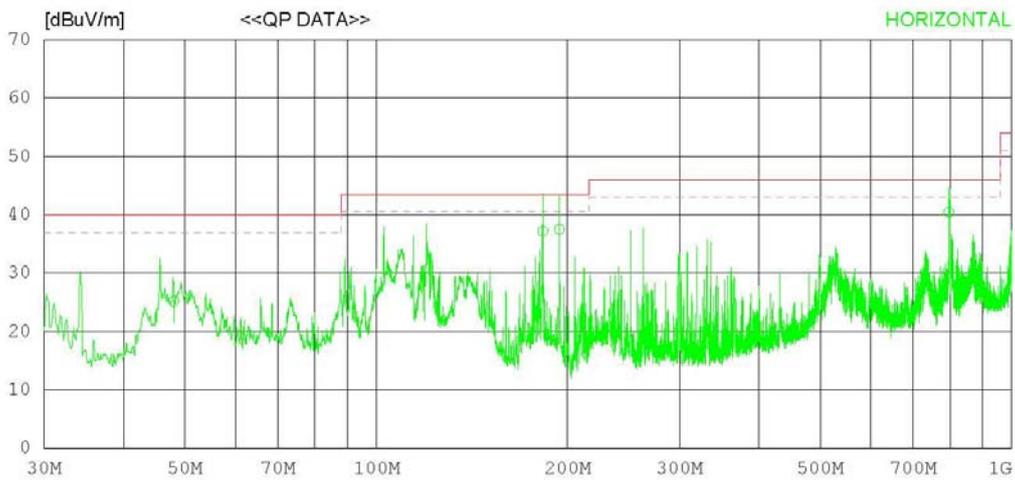

## RADIATED EMISSION

Date : 2014-09-15

Model Name : DTNC1408-03706	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 24 ° C 49 % R.H.
Test Condition :	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)  
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	47.955	36.1	10.6	1.1	22.6	25.2	40.0	14.8	300	358
2	182.798	48.6	9.7	1.8	22.9	37.2	43.5	6.3	300	0
3	194.169	48.9	9.7	1.9	23.0	37.5	43.5	6.0	100	274
4	796.713	39.6	19.9	4.0	23.1	40.4	46.0	5.6	100	157
----- Vertical -----										
5	47.935	36.3	10.6	1.1	22.6	25.4	40.0	14.6	100	359
6	102.748	40.6	10.8	1.4	22.7	30.1	43.5	13.4	100	359
7	114.145	41.6	11.3	1.5	22.7	31.7	43.5	11.8	100	116
8	796.713	38.4	19.9	4.0	23.1	39.2	46.0	6.8	100	359



< (1 ~ 18) GHz \_ Peak >

## RADIATED EMISSION

Date : 2014-09-15

Model Name	: DTNC1408-03706	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 24 'C 49 %R.H.
Test Condition	:	Operator	:
Memo	:		

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)  
 FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

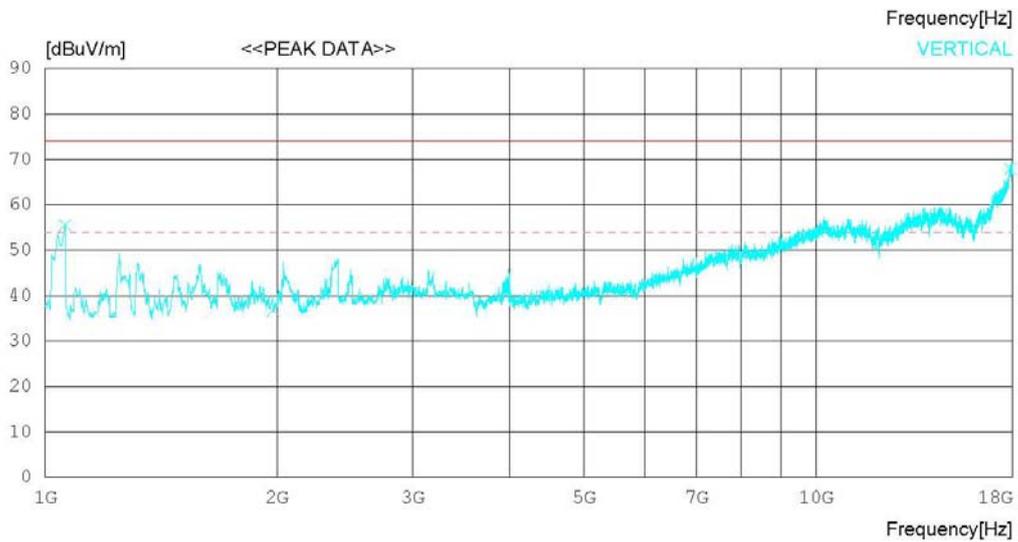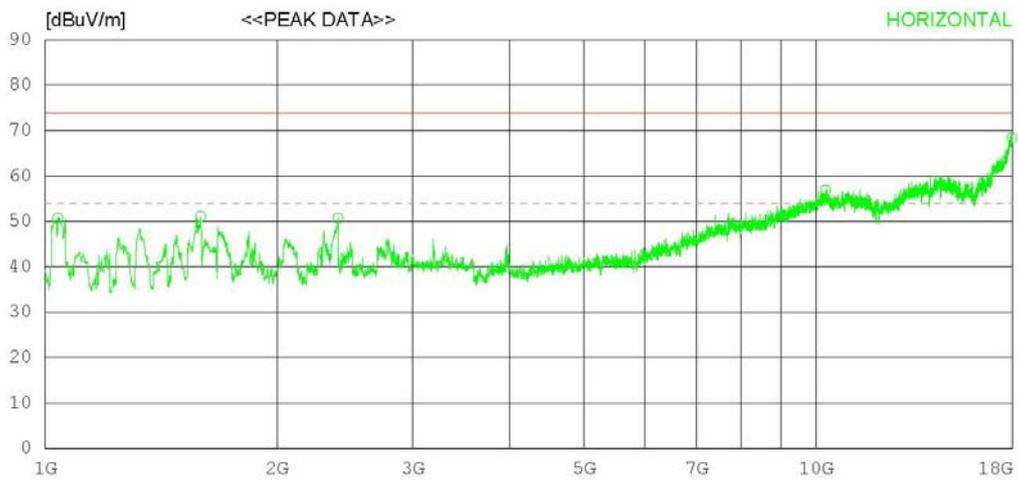

## RADIATED EMISSION

Date : 2014-09-15

Model Name : DTNC1408-03706	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 24 °C 49 %R.H.
Test Condition :	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)  
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1038.250	63.8	25.2	1.6	39.9	50.7	74.0	23.3	100	225
2	1590.750	62.0	25.9	2.2	39.0	51.1	74.0	22.9	100	0
3	2398.250	59.1	27.0	3.0	38.4	50.7	74.0	23.3	100	162
4	10292.630	45.3	39.3	10.1	37.8	56.9	74.0	17.1	100	156
5	17961.750	43.8	49.3	11.1	35.8	68.4	74.0	5.6	100	0
----- Vertical -----										
6	1061.625	68.4	25.3	1.7	39.9	55.5	74.0	18.5	100	1
7	1977.500	46.8	25.9	2.6	38.6	36.7	74.0	37.3	100	184
8	10252.250	42.7	39.2	10.2	37.9	54.2	74.0	19.8	100	6
9	17885.250	44.0	48.3	11.2	35.6	67.9	74.0	6.1	100	1

< (1 ~ 18) GHz \_ Average >



## RADIATED EMISSION

Date : 2014-09-15

Model Name	: DTNC1408-03706	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 24 °C 49 %R.H.
Test Condition	:	Operator	:

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)  
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

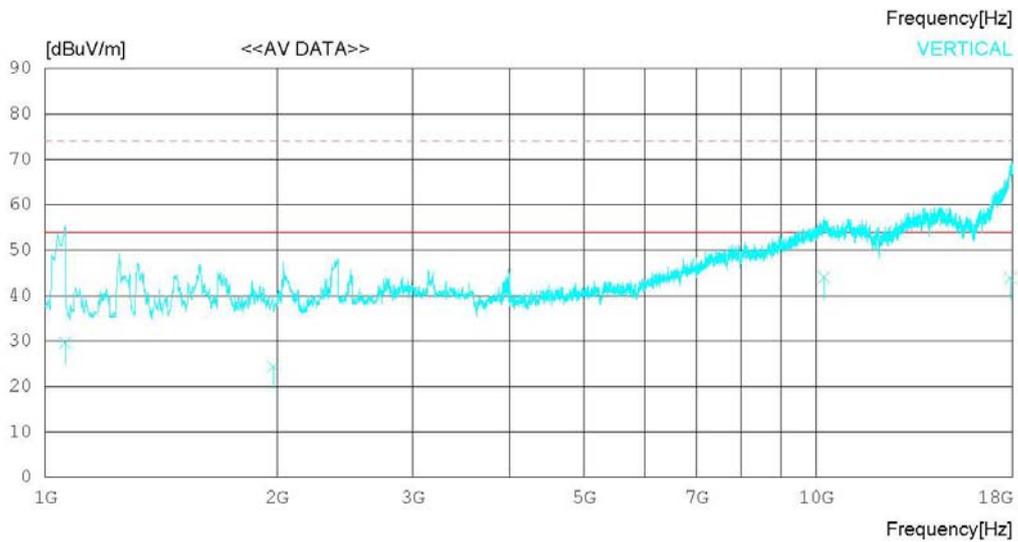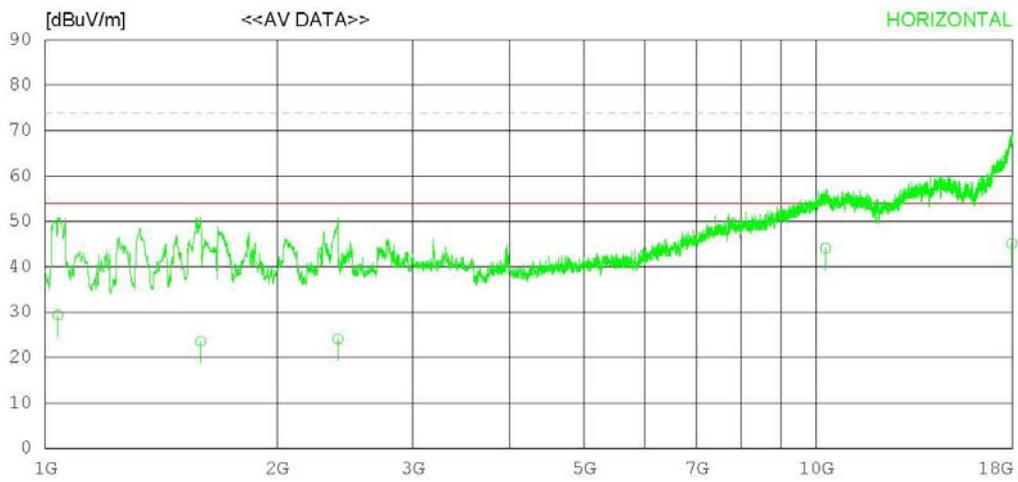

## RADIATED EMISSION

Date : 2014-09-15

Model Name : DTNC1408-03706	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 24 °C 49 %R.H.
Test Condition :	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)  
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1038.246	42.5	25.2	1.6	39.9	29.4	54.0	24.6	100	225
2	1590.745	34.5	25.9	2.2	39.0	23.6	54.0	30.4	100	0
3	2398.248	32.5	27.0	3.0	38.4	24.1	54.0	29.9	100	162
4	10292.630	32.5	39.3	10.1	37.8	44.1	54.0	9.9	100	156
5	17961.750	20.5	49.3	11.1	35.8	45.1	54.0	8.9	100	0
----- Vertical -----										
6	1061.623	42.5	25.3	1.7	39.9	29.6	54.0	24.4	100	1
7	1977.481	34.5	25.9	2.6	38.6	24.4	54.0	29.6	100	184
8	10252.260	32.5	39.2	10.2	37.9	44.0	54.0	10.0	100	6
9	17885.230	20.0	48.3	11.2	35.6	43.9	54.0	10.1	100	1

---

---

## Appendix 1

---

---

### List of Test and Measurement Instruments

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment is identified by the Test Laboratory.

### 1. Conducted Disturbance

	Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/>	MEASUREMENT SOFTWARE	EMI-C VER. 2.00.0143	TSJ	N/A	N/A	N/A
<input type="checkbox"/>	SPECTRUM ANALYZER	8591E	H/P	3649A05889	2014.02.27	2015.02.27
<input type="checkbox"/>	LISN	KNW-407	KYORITSU	8-317-8	2014.01.08	2015.01.08
<input type="checkbox"/>	ARTIFICIAL MAINS NETWORK	PMM L2-16B	NARDA S.T.S. / PMM	000WX20305	2014.06.26	2015.06.26
<input type="checkbox"/>	50 OHM TERMINATOR	CT-01	TME	N/A	2014.01.08	2015.01.08
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2014.02.27	2015.02.27
<input checked="" type="checkbox"/>	LISN	ESH2-Z5	ROHDE & SCHWARZ	828739/006	2014.09.11	2015.09.11
<input checked="" type="checkbox"/>	LISN	LISN1600	TTI	197204	2014.06.27	2015.06.27
<input checked="" type="checkbox"/>	50 OHM TERMINATOR	CT-01	TME	N/A	2014.01.08	2015.01.08

### 2. Radiated Disturbance

	Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/>	MEASUREMENT SOFTWARE	EMI-R VER. 2.00.0121	TSJ	N/A	N/A	N/A
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU	ROHDE & SCHWARZ	100014	2014.01.08	2015.01.08
<input checked="" type="checkbox"/>	BILOG ANTENNA	CBL6112B	SCHAFFNER	2737	2012.11.06	2014.11.06
<input checked="" type="checkbox"/>	HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1014	2014.09.01	2016.09.01
<input checked="" type="checkbox"/>	AMPLIFIER	8447E	H/P	2945A02865	2014.01.08	2015.01.08
<input checked="" type="checkbox"/>	AMPLIFIER	8449B	AGILENT	3008A01590	2014.02.27	2015.02.27
<input type="checkbox"/>	EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2014.02.27	2015.02.27
<input type="checkbox"/>	AMPLIFIER	MLA-100K01-B01-26	TSJ	1252741	2014.02.28	2015.02.28

---

---

**Appendix 2**

---

---

**Report Revision History**

Revision Date	Description	Revised By	Revision Reviewed By
None	Original	N/A	N/A