



## SAR EVALUATION REPORT

**Applicant Name:**  
 LG Electronics MobileComm U.S.A., Inc.  
 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632  
 United States

**Date of Testing:**  
 03/31/14 - 04/07/14  
**Test Site/Location:**  
 PCTEST Lab, Columbia, MD, USA  
**Document Serial No.:**  
 OY1403310642-R1.ZNF

<b>FCC ID:</b>	<b>ZNFD850</b>
<b>APPLICANT:</b>	<b>LG ELECTRONICS MOBILECOMM U.S.A., INC.</b>

**DUT Type:** Portable Handset  
**Application Type:** Certification  
**FCC Rule Part(s):** CFR §2.1093  
**Model(s):** LG-D850, D850, LGD850

Equipment Class	Band & Mode	Tx Frequency	SAR		
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.36	0.65	0.71
PCE	UMTS 850	826.40 - 846.60 MHz	0.43	0.66	0.67
PCE	UMTS 1750	1712.4 - 1752.5 MHz	0.26	0.63	0.63
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.15	0.51	0.55
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.17	0.65	0.65
PCE	LTE Band 17	706.5 - 713.5 MHz	0.17	0.23	0.23
PCE	LTE Band 5 (Cell)	826.5 - 846.5 MHz	0.36	0.53	0.57
PCE	LTE Band 4 (AWS)	1712.5 - 1752.5 MHz	0.12	0.56	0.56
PCE	LTE Band 2 (PCS)	1852.5 - 1907.5 MHz	0.16	0.58	0.66
PCE	LTE Band 7	2502.5 - 2567.5 MHz	0.12	1.10	1.10
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.24	0.10	0.10
DTS	5.8 GHz WLAN	5745 - 5825 MHz	0.50	0.43	0.43
NII	5.2 GHz WLAN	5180 - 5240 MHz	0.26	0.22	
NII	5.3 GHz WLAN	5260 - 5320 MHz	0.28	0.20	
NII	5.5 GHz WLAN	5500 - 5700 MHz	0.48	0.34	
DSS/DTS	Bluetooth	2402 - 2480 MHz		N/A	
<b>Simultaneous SAR per KDB 690783 D01v01r02:</b>			1.54		

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.9 of this report; for North American frequency bands only.

Note: This revised Test Report (S/N: OY1403310642-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

  
 Randy Ortanez  
 President



FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 1 of 62	

# T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	9
3	INTRODUCTION .....	10
4	DOSIMETRIC ASSESSMENT .....	11
5	DEFINITION OF REFERENCE POINTS .....	12
6	TEST CONFIGURATION POSITIONS FOR HANDSETS .....	13
7	RF EXPOSURE LIMITS .....	17
8	FCC MEASUREMENT PROCEDURES.....	18
9	RF CONDUCTED POWERS.....	23
10	SYSTEM VERIFICATION.....	37
11	SAR DATA SUMMARY .....	39
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	50
13	SAR MEASUREMENT VARIABILITY .....	56
14	EQUIPMENT LIST.....	57
15	MEASUREMENT UNCERTAINTIES .....	58
16	CONCLUSION.....	60
17	REFERENCES .....	61
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: SAR TEST SETUP PHOTOGRAPHS		

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 2 of 62	

# 1 DEVICE UNDER TEST

## 1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.5 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 17	Data	706.5 - 713.5 MHz
LTE Band 5 (Cell)	Data	826.5 - 846.5 MHz
LTE Band 4 (AWS)	Data	1712.5 - 1752.5 MHz
LTE Band 2 (PCS)	Data	1852.5 - 1907.5 MHz
LTE Band 7	Data	2502.5 - 2567.5 MHz
2.4 GHz WLAN	Data	2412 - 2462 MHz
5.8 GHz WLAN	Data	5745 - 5825 MHz
5.2 GHz WLAN	Data	5180 - 5240 MHz
5.3 GHz WLAN	Data	5260 - 5320 MHz
5.5 GHz WLAN	Data	5500 - 5700 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

## 1.2 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.2	33.2	31.2	29.2	27.7	27.0	26.0	25.2	24.0
	Nominal	32.7	32.7	30.7	28.7	27.2	26.5	25.5	24.7	23.5
GSM/GPRS/EDGE 1900	Maximum	30.7	30.7	29.7	26.7	25.7	26.5	25.7	24.7	23.75
	Nominal	30.2	30.2	29.2	26.2	25.2	26.0	25.2	24.2	23.25


Mode / Band		Modulated Average (dBm)			
		3GPP RMC	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	24.2	24.2	24.2	24.2
	Nominal	23.7	23.7	23.7	23.7
UMTS Band 4 (1750 MHz)	Maximum	24.8	24.8	24.8	24.8
	Nominal	24.3	24.3	24.3	24.3
UMTS Band 2 (1900 MHz)	Maximum	23.7	23.7	23.7	23.7
	Nominal	23.2	23.2	23.2	23.2

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 3 of 62	

Mode / Band		Modulated Average (dBm)
LTE Band 17	Maximum	24.2
	Nominal	23.7
LTE Band 5 (Cell)	Maximum	23.7
	Nominal	23.2
LTE Band 4 (AWS)	Maximum	24.5
	Nominal	24.0
LTE Band 2 (PCS)	Maximum	23.9
	Nominal	23.4
LTE Band 7	Maximum	23.7
	Nominal	23.2

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	16.5
	Nominal	15.5
IEEE 802.11g (2.4 GHz)	Maximum	14.0
	Nominal	13.0
IEEE 802.11n (2.4 GHz)	Maximum	13.0
	Nominal	12.0
IEEE 802.11a (5 GHz)	Maximum	13.0
	Nominal	12.0
IEEE 802.11n (5 GHz)	Maximum	12.0
	Nominal	11.0
IEEE 802.11ac (5 GHz)	Maximum	12.0
	Nominal	11.0
Bluetooth	Maximum	8.0
	Nominal	7.0
Bluetooth LE	Maximum	4.0
	Nominal	3.0

### 1.3 DUT Antenna Locations

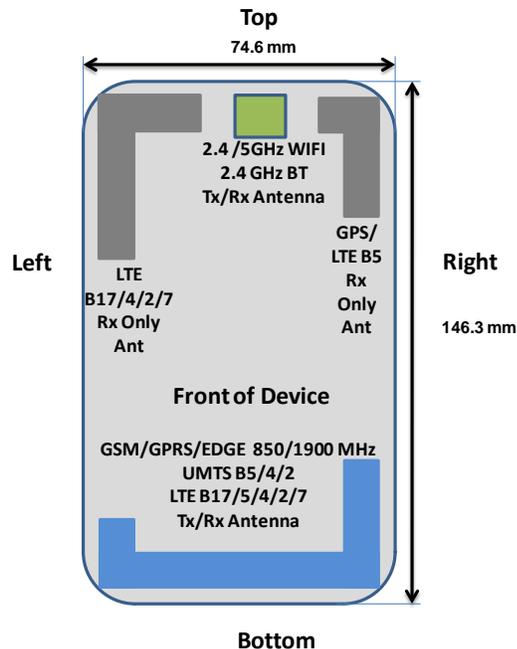

Note: Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC Filing.

**Figure 1-1**  
**DUT Antenna Locations**

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 4 of 62


**Table 1-1  
Mobile Hotspot Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 17	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 2 (PCS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 7	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	No
5 GHz WLAN	Yes	Yes	Yes	No	Yes	No

Note: Particular DUT edges were not required to be evaluated for Wireless Router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v01 guidance, page 2. The antenna document shows the distances between the transmit antennas and the edges of the device. When the wireless router mode is enabled, all 5 GHz bands are disabled except the 5.8 GHz band. Therefore only 5.8 GHz WIFI is considered in this section.

### 1.4 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the back cover. The SAR tests were performed with the back cover with NFC antenna already incorporated.

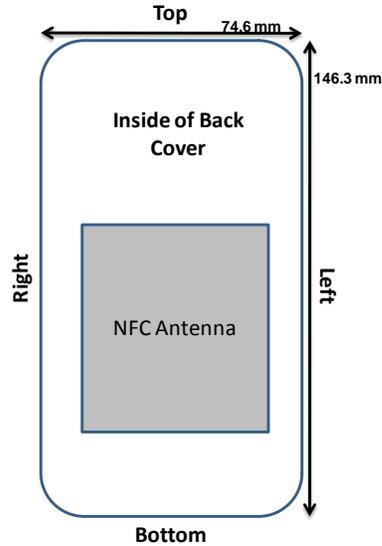

**Figure 1-2  
NFC Antenna Locations**

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 5 of 62	

## 1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-3 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 1-3  
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

Table 1-2  
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Notes
1	GSM voice + 2.4 GHz WI-FI	Yes	Yes	N/A	
2	GSM voice + 5 GHz WI-FI	Yes	Yes	N/A	
3	GSM voice + 2.4 GHz Bluetooth	N/A	Yes	N/A	
4	UMTS + 2.4 GHz WI-FI	Yes	Yes	Yes	
5	UMTS + 5 GHz WI-FI	Yes	Yes	Yes	
6	UMTS + 2.4 GHz Bluetooth	N/A	Yes	N/A	
7	LTE + 2.4 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
8	LTE + 5 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
9	LTE + 2.4 GHz Bluetooth	N/A	Yes*	N/A	*-Pre-installed VOIP applications are considered.
10	GPRS/EDGE + 2.4 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
11	GPRS/EDGE + 5 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
12	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	Yes*	N/A	*-Pre-installed VOIP applications are considered.

When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.

Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.

## 1.6 Wireless Charging Cover

This DUT may be used with a standard battery cover or with an optional wireless charging battery cover which features an extension to wrap around and protect the front side of the device. Per FCC KDB Publication 648474 D04, SAR was measured using the standard battery cover and then repeated with the wireless charging battery cover for the highest reported SAR for each wireless technology, frequency band, operating mode, and exposure condition. Additional head tests using the wireless charging cover were performed with the cover extension both opened and closed. Additional body-worn and hotspot tests were performed with the cover extension closed because operations near the body with the cover extension open are not expected. No additional evaluations with wireless charging cover were required since all reported SAR values were less than 1.2 W/kg.

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 6 of 62

## 1.7 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

## 1.8 SAR Test Exclusions Applied

### (A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using 5 GHz WIFI except in the 5.8 GHz band, only 2.4 GHz and 5.8 GHz WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v01.

Per FCC KDB 447498 D01v05, the SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth SAR was not required;  $[(6/10) * \sqrt{2.441}] = 0.9 < 3.0$ . Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports 20 MHz and 40 MHz Bandwidths for IEEE 802.11n for 5 GHz WIFI only. IEEE 802.11n was not evaluated for SAR since the average output power of 20 MHz and 40 MHz bandwidths was not more than 0.25 dB higher than the average output power of IEEE 802.11a.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) No new 5 GHz channels

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v02.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02.

This device supports inter-band LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC Guidance, LTE CA SAR was not needed for testing since the data sent by uplink on uplink physical channels does not change between Rel 8 and Rel 10.

FCC ID: ZNFD850	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 7 of 62	

## 1.9 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 941225 D01-D06 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05 (General SAR Guidance)
- FCC KDB Publication 865664 D01-D02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D03-D04 (Wireless Charging Cover)
- April 2013 TCB Workshop Notes (IEEE 802.11 ac)
- October 2013 TCB Workshop Notes (GPRS SAR Considerations)

## 1.10 Device Serial Numbers

Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number
GSM/GPRS/EDGE 850	4	4	4
UMTS 850	5	5	5
UMTS 1750	5	5	5
GSM/GPRS/EDGE 1900	4	4	4
UMTS 1900	5	5	5
LTE Band 17	7	6	6
LTE Band 5 (Cell)	7	6	6
LTE Band 4 (AWS)	6	6	6
LTE Band 2 (PCS)	6	6	6
LTE Band 7	6	6	6
2.4 GHz WLAN	16	16	16
5 GHz WLAN	16	16	16

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 8 of 62	

## 2 LTE INFORMATION

LTE Information				
<b>FCC ID</b>	<b>ZNFD850</b>			
Form Factor	Portable Handset			
Frequency Range of each LTE transmission band	LTE Band 17 (706.5 - 713.5 MHz)			
	LTE Band 5 (Cell) (826.5 - 846.5 MHz)			
	LTE Band 4 (AWS) (1712.5 - 1752.5 MHz)			
	LTE Band 2 (PCS) (1852.5 - 1907.5 MHz)			
	LTE Band 7 (2502.5 - 2567.5 MHz)			
Channel Bandwidths	LTE Band 17: 5 MHz, 10 MHz			
	LTE Band 5 (Cell): 5 MHz, 10 MHz			
	LTE Band 4 (AWS): 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 2 (PCS): 5 MHz, 10 MHz, 15 MHz, 20 MHz			
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz			
Channel Numbers and Frequencies (MHz)	Low	Mid	High	
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)	
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)	
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)	
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)	
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)	
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)	
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)	
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)	
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)	
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)	
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)	
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)	
LTE Band 7: 5 MHz	2502.5 (20775)	2535 (21100)	2567.5 (21425)	
LTE Band 7: 10 MHz	2505 (20800)	2535 (21100)	2565 (21400)	
LTE Band 7: 15 MHz	2507.5 (20825)	2535 (21100)	2562.5 (21375)	
LTE Band 7: 20 MHz	2510 (20850)	2535 (21100)	2560 (21350)	
UE Category	4			
Modulations Supported in UL	QPSK, 16QAM			
LTE Carrier Aggregation Possible Considerations	B2 (PCC) + B17(SCC)	B2 (PCC) + B29(SCC)	B4 (PCC) + B17(SCC)	B4 (PCC) + B29(SCC)
	5MHz (B2)+5MHz (B17)	5MHz (B2)+5MHz (B29)	5MHz (B4)+5MHz (B17)	5MHz (B4)+5MHz (B29)
	5MHz (B2)+10MHz (B17)	5MHz (B2)+10MHz (B29)	5MHz (B4)+10MHz (B17)	5MHz (B4)+10MHz (B29)
	10MHz (B2)+5MHz (B17)	10MHz (B2)+5MHz (B29)	10MHz (B4)+5MHz (B17)	10MHz (B4)+5MHz (B29)
	10MHz (B2)+10MHz (B17)	10MHz (B2)+10MHz (B29)	10MHz (B4)+10MHz (B17)	10MHz (B4)+10MHz (B29)
LTE Aggregation Additional Information	<p>This device does not support full CA features on 3GPP Release 10. The following LTE Release 10 features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI offloading, MDT, eMBMA and Cross-Carrier Scheduling.</p> <p>It supports a maximum of 2 carriers in the downlink with a total maximum bandwidth of 10 MHz of the spectrum. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC.</p> <p>Due to carrier capability, only B2 (PCC) + B17(SCC), B2 (PCC) + B29(SCC), B4 (PCC) + B17(SCC), B4 (PCC) + B29(SCC), and B17 (PCC) + B2 (SCC) are supported.</p>			
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES			
A-MPR (Additional MPR) disabled for SAR Testing?	YES			

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 9 of 62	

## 3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

**SAR is expressed in units of Watts per Kilogram (W/kg).**

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 10 of 62	

## 4 DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASy manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.



**Figure 4-1**  
Sample SAR Area Scan

**Table 4-1**  
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01\*

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{area}, \Delta y_{area}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{zoom}, \Delta y_{zoom}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x, y, z)
			Uniform Grid $\Delta z_{zoom}(n)$	Graded Grid		
				$\Delta z_{zoom}(1)^*$	$\Delta z_{zoom}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22


\*Also compliant to IEEE 1528-2013 Table 6

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 11 of 62

# 5 DEFINITION OF REFERENCE POINTS

## 5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view of ERP

## 5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



**Figure 5-2**  
Front, back and side view of SAM Twin Phantom

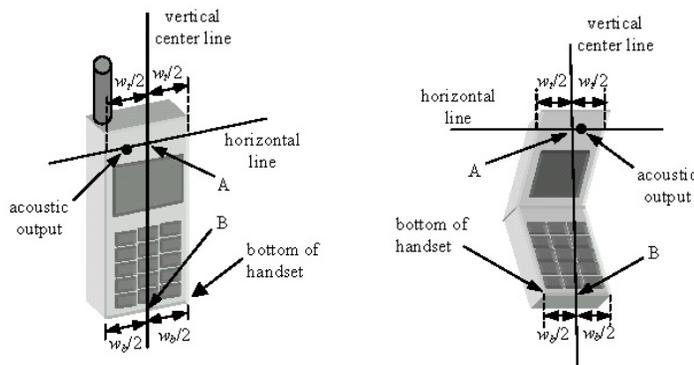

**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 12 of 62

## 6 TEST CONFIGURATION POSITIONS FOR HANDSETS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

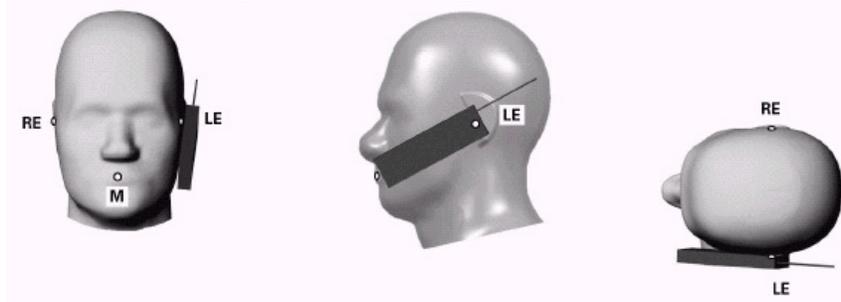


Figure 6-1 Front, Side and Top View of Cheek Position


2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt


With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 13 of 62

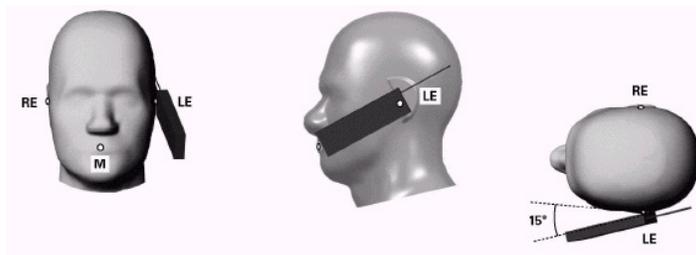

**Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position**




**Figure 6-3 Side view w/ relevant markings**

## 6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04\_v01. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.




**Figure 6-4 Twin SAM Chin20**

FCC ID: ZNFD850	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 14 of 62	

## 6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-5). Per FCC KDB Publication 648474 D04v01, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v05 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

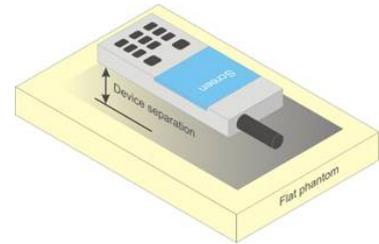

**Figure 6-5**  
**Sample Body-Worn Diagram**

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 44798 D01v05 should be applied to determine SAR test requirements.

Per KDB Publication 44798 D01v05, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 15 of 62

## 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: 0Y1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 16 of 62

# 7 RF EXPOSURE LIMITS

## 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

## 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1  
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFD850	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 17 of 62	

## 8 FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

### 8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

### 8.3 SAR Measurement Conditions for UMTS

#### 8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

#### 8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 18 of 62

### 8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”.

### 8.3.4 SAR Measurements for Handsets with Rel 5 HSDPA

Body SAR for HSDPA is not required for handsets with HSDPA capabilities when the maximum average output power of each RF channel with HSDPA active is less than 0.25 dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of the SAR limit. Otherwise, SAR is measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration measured in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that resulted in the highest SAR in 12.2 kbps RMC mode for that RF channel.

The H-set used in FRC for HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HSPDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the applicable H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the FRC for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 2 ms to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors of  $\beta_c=9$  and  $\beta_d=15$ , and power offset parameters of  $\Delta_{ACK} = \Delta_{NACK} = 5$  and  $\Delta_{CQI}=2$  is used. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the FRC.

Sub-Test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{HS} = \beta_{HS}/\beta_c = 30/15 \Leftrightarrow \beta_{HS} = 30/15 * \beta_c$ .  
 Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 8$  ( $A_{HS} = 30/15$ ) with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 7$  ( $A_{HS} = 24/15$ ) with  $\beta_{HS} = 24/15 * \beta_c$ .  
 Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Figure 8-1  
Table C.10.1.4 of TS 234.121-1

### 8.3.5 SAR Measurements for Handsets with Rel 6 HSUPA

Body SAR for HSUPA is not required when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25 dB higher than as measured without HSUPA/HSDPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is  $\leq 75\%$  of the SAR limit. Otherwise SAR is measured on the maximum output channel for the body exposure configuration produced highest SAR in 12.2 kbps RMC for that RF channel, using the additional procedures under “Release 6 HSPA data devices”

Head SAR for VOIP operations under HSPA is not required when maximum average output of each RF channel with HSPA is less than 0.25 dB higher than as measured using 12.2 kbps RMC. Otherwise SAR is measured using same HSPA configuration as used for body SAR.

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 19 of 62

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM <sup>(2)</sup> (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{d1}: 47/15$ $\beta_{d2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Rightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

### 8.3.6 SAR Measurement Conditions for DC-HSDPA

SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion. DC-HSDPA uplink maximum output power measurements using the four Rel. 5 HSDPA subtests in Table C.10.1.4 of TS 234.121-1 is required.

When the maximum average output power of each RF channel with DC-HSDPA active is  $\leq 1/4$  dB higher than that measured using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC is  $\leq 75\%$  of the SAR limit, SAR evaluation for DC-HSDPA is not required.

## 8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

### 8.4.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 20 of 62

## 8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r01:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

## 8.4.5 Carrier Aggregation

LTE Carrier Aggregation (CA) measurements were made in accordance to 3GPP TS 36.521-1 V10.4.0 (2012-12). The RRC connection is only handled by one cell, the Primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds the Secondary component carrier (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to release 8 specifications on the PCC. Additional output powers were measured using two carriers in the downlink for the release 8 configurations with the highest output power among all channels, RB configurations and bandwidths for each uplink band. Per FCC Guidance, no SAR measurements were required.

## 8.5 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n/ac transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.

### 8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 21 of 62

## 8.5.2 Frequency Channel Configurations [24]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power than the default channels, these "required channels" were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was higher than 0.25 dB or more than the 802.11a mode. 802.11ac SAR was evaluated for highest 802.11a configuration in each 5 GHz band and each exposure condition. 802.11ac modes were additionally evaluated for SAR if the output power for the respective mode was more than 0.25 dB higher than powers of 802.11a modes.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg and if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

FCC ID: ZNFD850	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 22 of 62	

# 9 RF CONDUCTED POWERS

## 9.1 GSM Conducted Powers

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	32.87	32.87	30.88	<b>28.80</b>	27.40	26.85	25.78	24.82	23.61
	190	32.84	32.81	30.79	<b>28.85</b>	27.31	26.91	25.72	24.87	23.72
	251	32.90	32.89	30.81	<b>28.84</b>	27.33	26.99	25.70	24.81	23.67
GSM 1900	512	30.41	30.40	<b>29.41</b>	26.47	25.38	26.45	25.69	24.70	23.62
	661	30.48	30.48	<b>29.39</b>	26.54	25.37	26.49	25.67	24.68	23.70
	810	30.33	30.37	<b>29.43</b>	26.56	25.50	26.48	25.60	24.63	23.66
		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	23.84	23.84	24.86	<b>24.54</b>	24.39	17.82	19.76	20.56	20.60
	190	23.81	23.78	24.77	<b>24.59</b>	24.30	17.88	19.70	20.61	20.71
	251	23.87	23.86	24.79	<b>24.58</b>	24.32	17.96	19.68	20.55	20.66
GSM 1900	512	21.38	21.37	<b>23.39</b>	22.21	22.37	17.42	19.67	20.44	20.61
	661	21.45	21.45	<b>23.37</b>	22.28	22.36	17.46	19.65	20.42	20.69
	810	21.30	21.34	<b>23.41</b>	22.30	22.49	17.45	19.58	20.37	20.65
GSM 850	Frame Avg. Targets:	23.67	23.67	24.68	<b>24.44</b>	24.19	17.47	19.48	20.44	20.49
GSM 1900	Frame Avg. Targets:	21.17	21.17	<b>23.18</b>	21.94	22.19	16.97	19.18	19.94	20.24

Note: Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.

GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.

EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 12 (Max 4 Tx uplink slots)**  
**EDGE Multislot class: 12 (Max 4 Tx uplink slots)**  
**DTM Multislot Class: N/A**



**Figure 9-1**  
**Power Measurement Setup**

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 23 of 62

## 9.2 UMTS Conducted Powers


3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.20	24.17	24.19	24.44	24.45	24.63	23.68	23.64	23.70	-
99		12.2 kbps AMR	24.18	24.11	24.15	24.48	24.43	24.65	23.67	23.55	23.68	-
6	HSDPA	Subtest 1	23.89	23.82	23.85	24.29	24.27	24.50	23.50	23.19	23.10	0
6		Subtest 2	24.00	24.00	23.98	24.33	24.34	24.60	23.49	23.20	23.29	0
6		Subtest 3	23.49	23.44	23.50	23.78	23.72	24.11	22.99	22.88	22.83	0.5
6		Subtest 4	23.49	23.43	23.47	23.76	23.79	24.06	22.97	22.86	22.81	0.5
6	HSUPA	Subtest 1	23.54	23.83	23.15	23.79	23.49	23.61	22.22	22.54	22.37	0
6		Subtest 2	22.64	22.40	22.53	23.01	23.02	22.74	21.83	22.02	22.01	2
6		Subtest 3	23.22	23.32	22.65	23.24	23.18	23.47	22.36	22.55	22.86	1
6		Subtest 4	22.33	23.08	22.35	23.04	23.14	23.25	22.29	22.31	22.37	2
6		Subtest 5	23.99	23.90	23.93	23.54	24.04	24.55	22.32	22.56	22.35	0
8	DC-HSDPA	Subtest 1	23.78	23.71	23.80	24.32	24.42	24.51	23.00	23.10	22.90	0
8		Subtest 2	23.80	23.75	23.66	24.59	24.47	24.65	22.97	23.13	23.14	0
8		Subtest 3	23.30	23.27	23.28	23.90	23.83	24.09	22.67	22.70	22.76	0.5
8		Subtest 4	23.22	23.30	23.27	23.95	23.81	23.78	22.65	22.71	22.82	0.5

UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

### DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- Measured maximum output powers for DC-HSDPA were not greater than 1/4 dB higher than the WCDMA 12.2 kbps RMC maximum output, as a result, SAR is not required for DC-HSDPA
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer that MPR for some HSUPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.

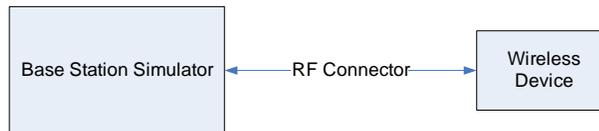

**Figure 9-2**  
**Power Measurement Setup**

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 24 of 62

## 9.3 LTE Conducted Powers

### 9.3.1 LTE Band 17

Table 9-1  
LTE Band 17 Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	710.0	23790	10	QPSK	1	0	24.12	0	0
	710.0	23790	10	QPSK	1	25	24.10	0	0
	710.0	23790	10	QPSK	1	49	<b>24.18</b>	0	0
	710.0	23790	10	QPSK	25	0	23.13	0-1	1
	710.0	23790	10	QPSK	25	12	<b>23.19</b>	0-1	1
	710.0	23790	10	QPSK	25	25	23.12	0-1	1
	710.0	23790	10	QPSK	50	0	23.04	0-1	1
	710.0	23790	10	16QAM	1	0	23.09	0-1	1
	710.0	23790	10	16QAM	1	25	22.98	0-1	1
	710.0	23790	10	16QAM	1	49	22.96	0-1	1
	710.0	23790	10	16QAM	25	0	22.01	0-2	2
	710.0	23790	10	16QAM	25	12	22.20	0-2	2
	710.0	23790	10	16QAM	25	25	22.03	0-2	2
	710.0	23790	10	16QAM	50	0	21.98	0-2	2

Note: LTE Band 17 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-2  
LTE Band 17 Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	710.0	23790	5	QPSK	1	0	24.16	0	0
	710.0	23790	5	QPSK	1	12	24.14	0	0
	710.0	23790	5	QPSK	1	24	24.17	0	0
	710.0	23790	5	QPSK	12	0	22.94	0-1	1
	710.0	23790	5	QPSK	12	6	22.94	0-1	1
	710.0	23790	5	QPSK	12	13	22.96	0-1	1
	710.0	23790	5	QPSK	25	0	22.90	0-1	1
	710.0	23790	5	16-QAM	1	0	22.94	0-1	1
	710.0	23790	5	16-QAM	1	12	22.89	0-1	1
	710.0	23790	5	16-QAM	1	24	22.91	0-1	1
	710.0	23790	5	16-QAM	12	0	21.90	0-2	2
	710.0	23790	5	16-QAM	12	6	21.90	0-2	2
	710.0	23790	5	16-QAM	12	13	21.97	0-2	2
	710.0	23790	5	16-QAM	25	0	21.95	0-2	2

Note: LTE Band 17 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

### 9.3.2 LTE Band 5 (Cell)

Table 9-3  
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	836.5	20525	10	QPSK	1	0	23.56	0	0
	836.5	20525	10	QPSK	1	25	<b>23.63</b>	0	0
	836.5	20525	10	QPSK	1	49	23.61	0	0
	836.5	20525	10	QPSK	25	0	<b>22.44</b>	0-1	1
	836.5	20525	10	QPSK	25	12	22.43	0-1	1
	836.5	20525	10	QPSK	25	25	22.40	0-1	1
	836.5	20525	10	QPSK	50	0	22.43	0-1	1
	836.5	20525	10	16QAM	1	0	22.44	0-1	1
	836.5	20525	10	16QAM	1	25	22.38	0-1	1
	836.5	20525	10	16QAM	1	49	22.41	0-1	1
	836.5	20525	10	16QAM	25	0	21.46	0-2	2
	836.5	20525	10	16QAM	25	12	21.42	0-2	2
	836.5	20525	10	16QAM	25	25	21.41	0-2	2
	836.5	20525	10	16QAM	50	0	21.44	0-2	2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 25 of 62

**Table 9-4**  
**LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	826.5	20425	5	QPSK	1	0	23.63	0	0
	826.5	20425	5	QPSK	1	12	23.62	0	0
	826.5	20425	5	QPSK	1	24	23.70	0	0
	826.5	20425	5	QPSK	12	0	22.48	0-1	1
	826.5	20425	5	QPSK	12	6	22.56	0-1	1
	826.5	20425	5	QPSK	12	13	22.58	0-1	1
	826.5	20425	5	QPSK	25	0	22.46	0-1	1
	826.5	20425	5	16-QAM	1	0	22.60	0-1	1
	826.5	20425	5	16-QAM	1	12	22.56	0-1	1
	826.5	20425	5	16-QAM	1	24	22.44	0-1	1
	826.5	20425	5	16-QAM	12	0	21.41	0-2	2
	826.5	20425	5	16-QAM	12	6	21.43	0-2	2
	826.5	20425	5	16-QAM	12	13	21.48	0-2	2
	826.5	20425	5	16-QAM	25	0	21.55	0-2	2
	826.5	20425	5	16-QAM	25	0	21.55	0-2	2
	Mid	836.5	20525	5	QPSK	1	0	23.62	0
836.5		20525	5	QPSK	1	12	23.54	0	0
836.5		20525	5	QPSK	1	24	23.68	0	0
836.5		20525	5	QPSK	12	0	22.33	0-1	1
836.5		20525	5	QPSK	12	6	22.29	0-1	1
836.5		20525	5	QPSK	12	13	22.37	0-1	1
836.5		20525	5	QPSK	25	0	22.38	0-1	1
836.5		20525	5	16-QAM	1	0	22.31	0-1	1
836.5		20525	5	16-QAM	1	12	22.40	0-1	1
836.5		20525	5	16-QAM	1	24	22.46	0-1	1
836.5		20525	5	16-QAM	12	0	21.31	0-2	2
836.5		20525	5	16-QAM	12	6	21.37	0-2	2
836.5		20525	5	16-QAM	12	13	21.37	0-2	2
836.5		20525	5	16-QAM	25	0	21.32	0-2	2
836.5		20525	5	16-QAM	25	0	21.32	0-2	2
836.5		20525	5	16-QAM	25	0	21.32	0-2	2
High	846.5	20625	5	QPSK	1	0	23.69	0	0
	846.5	20625	5	QPSK	1	12	23.58	0	0
	846.5	20625	5	QPSK	1	24	23.57	0	0
	846.5	20625	5	QPSK	12	0	22.36	0-1	1
	846.5	20625	5	QPSK	12	6	22.41	0-1	1
	846.5	20625	5	QPSK	12	13	22.40	0-1	1
	846.5	20625	5	QPSK	25	0	22.30	0-1	1
	846.5	20625	5	16-QAM	1	0	22.40	0-1	1
	846.5	20625	5	16-QAM	1	12	22.32	0-1	1
	846.5	20625	5	16-QAM	1	24	22.49	0-1	1
	846.5	20625	5	16-QAM	12	0	21.31	0-2	2
	846.5	20625	5	16-QAM	12	6	21.33	0-2	2
	846.5	20625	5	16-QAM	12	13	21.39	0-2	2
	846.5	20625	5	16-QAM	25	0	21.38	0-2	2
	846.5	20625	5	16-QAM	25	0	21.38	0-2	2
	846.5	20625	5	16-QAM	25	0	21.38	0-2	2

### 9.3.3 LTE Band 4 (AWS)

**Table 9-5**  
**LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	24.44	0	0
	1732.5	20175	20	QPSK	1	50	24.35	0	0
	1732.5	20175	20	QPSK	1	99	24.49	0	0
	1732.5	20175	20	QPSK	50	0	23.38	0-1	1
	1732.5	20175	20	QPSK	50	25	23.39	0-1	1
	1732.5	20175	20	QPSK	50	50	23.35	0-1	1
	1732.5	20175	20	QPSK	100	0	23.29	0-1	1
	1732.5	20175	20	16QAM	1	0	23.23	0-1	1
	1732.5	20175	20	16QAM	1	50	23.20	0-1	1
	1732.5	20175	20	16QAM	1	99	23.27	0-1	1
	1732.5	20175	20	16QAM	50	0	22.30	0-2	2
	1732.5	20175	20	16QAM	50	25	22.27	0-2	2
	1732.5	20175	20	16QAM	50	50	22.21	0-2	2
	1732.5	20175	20	16QAM	100	0	22.28	0-2	2
	1732.5	20175	20	16QAM	100	0	22.28	0-2	2
	1732.5	20175	20	16QAM	100	0	22.28	0-2	2
	1732.5	20175	20	16QAM	100	0	22.28	0-2	2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 26 of 62

Table 9-6

LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]	
Low	1717.5	20025	15	QPSK	1	0	24.33	0	0	
	1717.5	20025	15	QPSK	1	36	24.29	0	0	
	1717.5	20025	15	QPSK	1	74	24.21	0	0	
	1717.5	20025	15	QPSK	36	0	23.31	0-1	1	
	1717.5	20025	15	QPSK	36	18	23.27	0-1	1	
	1717.5	20025	15	QPSK	36	37	23.30	0-1	1	
	1717.5	20025	15	QPSK	75	0	23.29	0-1	1	
	1717.5	20025	15	16QAM	1	0	23.11	0-1	1	
	1717.5	20025	15	16QAM	1	36	23.15	0-1	1	
	1717.5	20025	15	16QAM	1	74	23.12	0-1	1	
	1717.5	20025	15	16QAM	36	0	22.35	0-2	2	
	1717.5	20025	15	16QAM	36	18	22.35	0-2	2	
	1717.5	20025	15	16QAM	36	37	22.28	0-2	2	
	1717.5	20025	15	16QAM	75	0	22.41	0-2	2	
	Mid	1732.5	20175	15	QPSK	1	0	24.31	0	0
		1732.5	20175	15	QPSK	1	36	24.31	0	0
		1732.5	20175	15	QPSK	1	74	24.24	0	0
		1732.5	20175	15	QPSK	36	0	23.32	0-1	1
1732.5		20175	15	QPSK	36	18	23.27	0-1	1	
1732.5		20175	15	QPSK	36	37	23.31	0-1	1	
1732.5		20175	15	QPSK	75	0	23.32	0-1	1	
1732.5		20175	15	16QAM	1	0	23.17	0-1	1	
1732.5		20175	15	16QAM	1	36	23.11	0-1	1	
1732.5		20175	15	16QAM	1	74	23.18	0-1	1	
1732.5		20175	15	16QAM	36	0	22.27	0-2	2	
1732.5		20175	15	16QAM	36	18	22.32	0-2	2	
1732.5		20175	15	16QAM	36	37	22.32	0-2	2	
1732.5		20175	15	16QAM	75	0	22.44	0-2	2	
High		1747.5	20325	15	QPSK	1	0	24.37	0	0
		1747.5	20325	15	QPSK	1	36	24.23	0	0
		1747.5	20325	15	QPSK	1	74	24.22	0	0
		1747.5	20325	15	QPSK	36	0	23.36	0-1	1
	1747.5	20325	15	QPSK	36	18	23.25	0-1	1	
	1747.5	20325	15	QPSK	36	37	23.21	0-1	1	
	1747.5	20325	15	QPSK	75	0	23.27	0-1	1	
	1747.5	20325	15	16QAM	1	0	23.20	0-1	1	
	1747.5	20325	15	16QAM	1	36	23.14	0-1	1	
	1747.5	20325	15	16QAM	1	74	23.11	0-1	1	
	1747.5	20325	15	16QAM	36	0	22.36	0-2	2	
	1747.5	20325	15	16QAM	36	18	22.24	0-2	2	
	1747.5	20325	15	16QAM	36	37	22.25	0-2	2	
	1747.5	20325	15	16QAM	75	0	22.32	0-2	2	

Table 9-7

LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]	
Low	1715	20000	10	QPSK	1	0	24.35	0	0	
	1715	20000	10	QPSK	1	25	24.32	0	0	
	1715	20000	10	QPSK	1	49	24.35	0	0	
	1715	20000	10	QPSK	25	0	23.19	0-1	1	
	1715	20000	10	QPSK	25	12	23.24	0-1	1	
	1715	20000	10	QPSK	25	25	23.23	0-1	1	
	1715	20000	10	QPSK	50	0	23.34	0-1	1	
	1715	20000	10	16QAM	1	0	23.14	0-1	1	
	1715	20000	10	16QAM	1	25	23.16	0-1	1	
	1715	20000	10	16QAM	1	49	23.13	0-1	1	
	1715	20000	10	16QAM	25	0	22.32	0-2	2	
	1715	20000	10	16QAM	25	12	22.33	0-2	2	
	1715	20000	10	16QAM	25	25	22.32	0-2	2	
	1715	20000	10	16QAM	50	0	22.42	0-2	2	
	Mid	1732.5	20175	10	QPSK	1	0	24.30	0	0
		1732.5	20175	10	QPSK	1	25	24.35	0	0
		1732.5	20175	10	QPSK	1	49	24.24	0	0
		1732.5	20175	10	QPSK	25	0	23.17	0-1	1
1732.5		20175	10	QPSK	25	12	23.18	0-1	1	
1732.5		20175	10	QPSK	25	25	23.20	0-1	1	
1732.5		20175	10	QPSK	50	0	23.35	0-1	1	
1732.5		20175	10	16QAM	1	0	23.11	0-1	1	
1732.5		20175	10	16QAM	1	25	23.16	0-1	1	
1732.5		20175	10	16QAM	1	49	23.15	0-1	1	
1732.5		20175	10	16QAM	25	0	22.25	0-2	2	
1732.5		20175	10	16QAM	25	12	22.26	0-2	2	
1732.5		20175	10	16QAM	25	25	22.25	0-2	2	
1732.5		20175	10	16QAM	50	0	22.42	0-2	2	
High		1750	20350	10	QPSK	1	0	24.45	0	0
		1750	20350	10	QPSK	1	25	24.31	0	0
		1750	20350	10	QPSK	1	49	24.28	0	0
		1750	20350	10	QPSK	25	0	23.24	0-1	1
	1750	20350	10	QPSK	25	12	23.20	0-1	1	
	1750	20350	10	QPSK	25	25	23.20	0-1	1	
	1750	20350	10	QPSK	50	0	23.28	0-1	1	
	1750	20350	10	16QAM	1	0	23.22	0-1	1	
	1750	20350	10	16QAM	1	25	23.14	0-1	1	
	1750	20350	10	16QAM	1	49	23.13	0-1	1	
	1750	20350	10	16QAM	25	0	22.28	0-2	2	
	1750	20350	10	16QAM	25	12	22.24	0-2	2	
	1750	20350	10	16QAM	25	25	22.26	0-2	2	
	1750	20350	10	16QAM	50	0	22.31	0-2	2	

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 27 of 62

**Table 9-8**  
**LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	24.35	0	0
	1712.5	19975	5	QPSK	1	12	24.34	0	0
	1712.5	19975	5	QPSK	1	24	24.33	0	0
	1712.5	19975	5	QPSK	12	0	23.13	0-1	1
	1712.5	19975	5	QPSK	12	6	23.11	0-1	1
	1712.5	19975	5	QPSK	12	13	23.14	0-1	1
	1712.5	19975	5	QPSK	25	0	23.19	0-1	1
	1712.5	19975	5	16-QAM	1	0	23.17	0-1	1
	1712.5	19975	5	16-QAM	1	12	23.11	0-1	1
	1712.5	19975	5	16-QAM	1	24	23.15	0-1	1
	1712.5	19975	5	16-QAM	12	0	22.25	0-2	2
	1712.5	19975	5	16-QAM	12	6	22.25	0-2	2
	1712.5	19975	5	16-QAM	12	13	22.26	0-2	2
	1712.5	19975	5	16-QAM	25	0	22.29	0-2	2
Mid	1732.5	20175	5	QPSK	1	0	24.34	0	0
	1732.5	20175	5	QPSK	1	12	24.36	0	0
	1732.5	20175	5	QPSK	1	24	24.37	0	0
	1732.5	20175	5	QPSK	12	0	23.15	0-1	1
	1732.5	20175	5	QPSK	12	6	23.13	0-1	1
	1732.5	20175	5	QPSK	12	13	23.13	0-1	1
	1732.5	20175	5	QPSK	25	0	23.23	0-1	1
	1732.5	20175	5	16-QAM	1	0	23.18	0-1	1
	1732.5	20175	5	16-QAM	1	12	23.13	0-1	1
	1732.5	20175	5	16-QAM	1	24	23.14	0-1	1
	1732.5	20175	5	16-QAM	12	0	22.26	0-2	2
	1732.5	20175	5	16-QAM	12	6	22.26	0-2	2
	1732.5	20175	5	16-QAM	12	13	22.25	0-2	2
	1732.5	20175	5	16-QAM	25	0	22.29	0-2	2
High	1752.5	20375	5	QPSK	1	0	24.32	0	0
	1752.5	20375	5	QPSK	1	12	24.28	0	0
	1752.5	20375	5	QPSK	1	24	24.27	0	0
	1752.5	20375	5	QPSK	12	0	23.16	0-1	1
	1752.5	20375	5	QPSK	12	6	23.14	0-1	1
	1752.5	20375	5	QPSK	12	13	23.14	0-1	1
	1752.5	20375	5	QPSK	25	0	23.23	0-1	1
	1752.5	20375	5	16-QAM	1	0	23.11	0-1	1
	1752.5	20375	5	16-QAM	1	12	23.10	0-1	1
	1752.5	20375	5	16-QAM	1	24	23.13	0-1	1
	1752.5	20375	5	16-QAM	12	0	22.22	0-2	2
	1752.5	20375	5	16-QAM	12	6	22.21	0-2	2
	1752.5	20375	5	16-QAM	12	13	22.24	0-2	2
	1752.5	20375	5	16-QAM	25	0	22.22	0-2	2

**9.3.4 LTE Band 2 (PCS)**

**Table 9-9**  
**LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	23.62	0	0
	1860	18700	20	QPSK	1	50	23.52	0	0
	1860	18700	20	QPSK	1	99	23.63	0	0
	1860	18700	20	QPSK	50	0	22.41	0-1	1
	1860	18700	20	QPSK	50	25	22.40	0-1	1
	1860	18700	20	QPSK	50	50	22.43	0-1	1
	1860	18700	20	QPSK	100	0	22.51	0-1	1
	1860	18700	20	16QAM	1	0	22.53	0-1	1
	1860	18700	20	16QAM	1	50	22.49	0-1	1
	1860	18700	20	16QAM	1	99	22.52	0-1	1
	1860	18700	20	16QAM	50	0	21.44	0-2	2
	1860	18700	20	16QAM	50	25	21.41	0-2	2
	1860	18700	20	16QAM	50	50	21.41	0-2	2
	1860	18700	20	16QAM	100	0	21.40	0-2	2
Mid	1880.0	18900	20	QPSK	1	0	23.62	0	0
	1880.0	18900	20	QPSK	1	50	23.55	0	0
	1880.0	18900	20	QPSK	1	99	23.46	0	0
	1880.0	18900	20	QPSK	50	0	22.40	0-1	1
	1880.0	18900	20	QPSK	50	25	22.41	0-1	1
	1880.0	18900	20	QPSK	50	50	22.43	0-1	1
	1880.0	18900	20	QPSK	100	0	22.40	0-1	1
	1880.0	18900	20	16QAM	1	0	22.45	0-1	1
	1880.0	18900	20	16QAM	1	50	22.46	0-1	1
	1880.0	18900	20	16QAM	1	99	22.40	0-1	1
	1880.0	18900	20	16QAM	50	0	21.44	0-2	2
	1880.0	18900	20	16QAM	50	25	21.42	0-2	2
	1880.0	18900	20	16QAM	50	50	21.52	0-2	2
	1880.0	18900	20	16QAM	100	0	21.50	0-2	2
High	1900	19100	20	QPSK	1	0	23.61	0	0
	1900	19100	20	QPSK	1	50	23.56	0	0
	1900	19100	20	QPSK	1	99	23.68	0	0
	1900	19100	20	QPSK	50	0	22.53	0-1	1
	1900	19100	20	QPSK	50	25	22.41	0-1	1
	1900	19100	20	QPSK	50	50	22.44	0-1	1
	1900	19100	20	QPSK	100	0	22.42	0-1	1
	1900	19100	20	16QAM	1	0	22.54	0-1	1
	1900	19100	20	16QAM	1	50	22.42	0-1	1
	1900	19100	20	16QAM	1	99	22.43	0-1	1
	1900	19100	20	16QAM	50	0	21.49	0-2	2
	1900	19100	20	16QAM	50	25	21.48	0-2	2
	1900	19100	20	16QAM	50	50	21.41	0-2	2
	1900	19100	20	16QAM	100	0	21.37	0-2	2

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 28 of 62

**Table 9-10**  
**LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	23.43	0	0
	1857.5	18675	15	QPSK	1	36	23.59	0	0
	1857.5	18675	15	QPSK	1	74	23.50	0	0
	1857.5	18675	15	QPSK	36	0	22.49	0-1	1
	1857.5	18675	15	QPSK	36	18	22.54	0-1	1
	1857.5	18675	15	QPSK	36	37	22.51	0-1	1
	1857.5	18675	15	QPSK	75	0	22.50	0-1	1
	1857.5	18675	15	16QAM	1	0	22.41	0-1	1
	1857.5	18675	15	16QAM	1	36	22.56	0-1	1
	1857.5	18675	15	16QAM	1	74	22.46	0-1	1
	1857.5	18675	15	16QAM	36	0	21.47	0-2	2
	1857.5	18675	15	16QAM	36	18	21.49	0-2	2
	1857.5	18675	15	16QAM	36	37	21.42	0-2	2
	1857.5	18675	15	16QAM	75	0	21.46	0-2	2
	1857.5	18675	15	16QAM	75	0	21.46	0-2	2
Mid	1880.0	18900	15	QPSK	1	0	23.56	0	0
	1880.0	18900	15	QPSK	1	36	23.39	0	0
	1880.0	18900	15	QPSK	1	74	23.39	0	0
	1880.0	18900	15	QPSK	36	0	22.45	0-1	1
	1880.0	18900	15	QPSK	36	18	22.40	0-1	1
	1880.0	18900	15	QPSK	36	37	22.39	0-1	1
	1880.0	18900	15	QPSK	75	0	22.48	0-1	1
	1880.0	18900	15	16QAM	1	0	22.54	0-1	1
	1880.0	18900	15	16QAM	1	36	22.38	0-1	1
	1880.0	18900	15	16QAM	1	74	22.37	0-1	1
	1880.0	18900	15	16QAM	36	0	21.40	0-2	2
	1880.0	18900	15	16QAM	36	18	21.35	0-2	2
	1880.0	18900	15	16QAM	36	37	21.36	0-2	2
	1880.0	18900	15	16QAM	75	0	21.43	0-2	2
	1880.0	18900	15	16QAM	75	0	21.43	0-2	2
High	1902.5	19125	15	QPSK	1	0	23.53	0	0
	1902.5	19125	15	QPSK	1	36	23.60	0	0
	1902.5	19125	15	QPSK	1	74	23.48	0	0
	1902.5	19125	15	QPSK	36	0	22.48	0-1	1
	1902.5	19125	15	QPSK	36	18	22.49	0-1	1
	1902.5	19125	15	QPSK	36	37	22.55	0-1	1
	1902.5	19125	15	QPSK	75	0	22.48	0-1	1
	1902.5	19125	15	16QAM	1	0	22.48	0-1	1
	1902.5	19125	15	16QAM	1	36	22.57	0-1	1
	1902.5	19125	15	16QAM	1	74	22.45	0-1	1
	1902.5	19125	15	16QAM	36	0	21.46	0-2	2
	1902.5	19125	15	16QAM	36	18	21.45	0-2	2
	1902.5	19125	15	16QAM	36	37	21.56	0-2	2
	1902.5	19125	15	16QAM	75	0	21.50	0-2	2
	1902.5	19125	15	16QAM	75	0	21.50	0-2	2

**Table 9-11**  
**LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	23.48	0	0
	1855	18650	10	QPSK	1	25	23.56	0	0
	1855	18650	10	QPSK	1	49	23.54	0	0
	1855	18650	10	QPSK	25	0	22.47	0-1	1
	1855	18650	10	QPSK	25	12	22.52	0-1	1
	1855	18650	10	QPSK	25	25	22.54	0-1	1
	1855	18650	10	QPSK	50	0	22.53	0-1	1
	1855	18650	10	16QAM	1	0	22.35	0-1	1
	1855	18650	10	16QAM	1	25	22.47	0-1	1
	1855	18650	10	16QAM	1	49	22.49	0-1	1
	1855	18650	10	16QAM	25	0	21.46	0-2	2
	1855	18650	10	16QAM	25	12	21.47	0-2	2
	1855	18650	10	16QAM	25	25	21.49	0-2	2
	1855	18650	10	16QAM	50	0	21.44	0-2	2
	1855	18650	10	16QAM	50	0	21.44	0-2	2
Mid	1880.0	18900	10	QPSK	1	0	23.48	0	0
	1880.0	18900	10	QPSK	1	25	23.45	0	0
	1880.0	18900	10	QPSK	1	49	23.46	0	0
	1880.0	18900	10	QPSK	25	0	22.36	0-1	1
	1880.0	18900	10	QPSK	25	12	22.42	0-1	1
	1880.0	18900	10	QPSK	25	25	22.41	0-1	1
	1880.0	18900	10	QPSK	50	0	22.46	0-1	1
	1880.0	18900	10	16QAM	1	0	22.44	0-1	1
	1880.0	18900	10	16QAM	1	25	22.37	0-1	1
	1880.0	18900	10	16QAM	1	49	22.36	0-1	1
	1880.0	18900	10	16QAM	25	0	21.41	0-2	2
	1880.0	18900	10	16QAM	25	12	21.38	0-2	2
	1880.0	18900	10	16QAM	25	25	21.39	0-2	2
	1880.0	18900	10	16QAM	50	0	21.40	0-2	2
	1880.0	18900	10	16QAM	50	0	21.40	0-2	2
High	1905	19150	10	QPSK	1	0	23.61	0	0
	1905	19150	10	QPSK	1	25	23.60	0	0
	1905	19150	10	QPSK	1	49	23.52	0	0
	1905	19150	10	QPSK	25	0	22.48	0-1	1
	1905	19150	10	QPSK	25	12	22.53	0-1	1
	1905	19150	10	QPSK	25	25	22.64	0-1	1
	1905	19150	10	QPSK	50	0	22.61	0-1	1
	1905	19150	10	16QAM	1	0	22.54	0-1	1
	1905	19150	10	16QAM	1	25	22.50	0-1	1
	1905	19150	10	16QAM	1	49	22.40	0-1	1
	1905	19150	10	16QAM	25	0	21.52	0-2	2
	1905	19150	10	16QAM	25	12	21.55	0-2	2
	1905	19150	10	16QAM	25	25	21.60	0-2	2
	1905	19150	10	16QAM	50	0	21.51	0-2	2
	1905	19150	10	16QAM	50	0	21.51	0-2	2

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 29 of 62

**Table 9-12**  
**LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	23.45	0	0
	1852.5	18625	5	QPSK	1	12	23.53	0	0
	1852.5	18625	5	QPSK	1	24	23.60	0	0
	1852.5	18625	5	QPSK	12	0	22.30	0-1	1
	1852.5	18625	5	QPSK	12	6	22.38	0-1	1
	1852.5	18625	5	QPSK	12	13	22.43	0-1	1
	1852.5	18625	5	QPSK	25	0	22.42	0-1	1
	1852.5	18625	5	16-QAM	1	0	22.31	0-1	1
	1852.5	18625	5	16-QAM	1	12	22.38	0-1	1
	1852.5	18625	5	16-QAM	1	24	22.49	0-1	1
	1852.5	18625	5	16-QAM	12	0	21.34	0-2	2
	1852.5	18625	5	16-QAM	12	6	21.33	0-2	2
	1852.5	18625	5	16-QAM	12	13	21.30	0-2	2
	1852.5	18625	5	16-QAM	25	0	21.38	0-2	2
	1852.5	18625	5	16-QAM	25	0	21.38	0-2	2
Mid	1880.0	18900	5	QPSK	1	0	23.47	0	0
	1880.0	18900	5	QPSK	1	12	23.46	0	0
	1880.0	18900	5	QPSK	1	24	23.49	0	0
	1880.0	18900	5	QPSK	12	0	22.40	0-1	1
	1880.0	18900	5	QPSK	12	6	22.34	0-1	1
	1880.0	18900	5	QPSK	12	13	22.38	0-1	1
	1880.0	18900	5	QPSK	25	0	22.36	0-1	1
	1880.0	18900	5	16-QAM	1	0	22.39	0-1	1
	1880.0	18900	5	16-QAM	1	12	22.35	0-1	1
	1880.0	18900	5	16-QAM	1	24	22.41	0-1	1
	1880.0	18900	5	16-QAM	12	0	21.30	0-2	2
	1880.0	18900	5	16-QAM	12	6	21.31	0-2	2
	1880.0	18900	5	16-QAM	12	13	21.34	0-2	2
	1880.0	18900	5	16-QAM	25	0	21.43	0-2	2
	1880.0	18900	5	16-QAM	25	0	21.43	0-2	2
High	1907.5	19175	5	QPSK	1	0	23.61	0	0
	1907.5	19175	5	QPSK	1	12	23.60	0	0
	1907.5	19175	5	QPSK	1	24	23.57	0	0
	1907.5	19175	5	QPSK	12	0	22.49	0-1	1
	1907.5	19175	5	QPSK	12	6	22.52	0-1	1
	1907.5	19175	5	QPSK	12	13	22.58	0-1	1
	1907.5	19175	5	QPSK	25	0	22.55	0-1	1
	1907.5	19175	5	16-QAM	1	0	22.58	0-1	1
	1907.5	19175	5	16-QAM	1	12	22.53	0-1	1
	1907.5	19175	5	16-QAM	1	24	22.48	0-1	1
	1907.5	19175	5	16-QAM	12	0	21.46	0-2	2
	1907.5	19175	5	16-QAM	12	6	21.49	0-2	2
	1907.5	19175	5	16-QAM	12	13	21.47	0-2	2
	1907.5	19175	5	16-QAM	25	0	21.54	0-2	2
	1907.5	19175	5	16-QAM	25	0	21.54	0-2	2

**9.3.5 LTE Band 7**

**Table 9-13**  
**LTE Band 7 Conducted Powers - 20 MHz Bandwidth**

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]	
Low	2510	20850	20	QPSK	1	0	23.67	0	0	
	2510	20850	20	QPSK	1	49	23.62	0	0	
	2510	20850	20	QPSK	1	99	23.66	0	0	
	2510	20850	20	QPSK	50	0	22.44	0-1	1	
	2510	20850	20	QPSK	50	25	22.57	0-1	1	
	2510	20850	20	QPSK	50	50	22.59	0-1	1	
	2510	20850	20	QPSK	100	0	22.53	0-1	1	
	2510	20850	20	16QAM	1	0	22.40	0-1	1	
	2510	20850	20	16QAM	1	49	22.41	0-1	1	
	2510	20850	20	16QAM	1	99	22.59	0-1	1	
	2510	20850	20	16QAM	50	0	21.42	0-2	2	
	2510	20850	20	16QAM	50	25	21.41	0-2	2	
	2510	20850	20	16QAM	50	50	21.51	0-2	2	
	2510	20850	20	16QAM	100	0	21.43	0-2	2	
	Mid	2535.0	21100	20	QPSK	1	0	23.66	0	0
		2535.0	21100	20	QPSK	1	49	23.61	0	0
		2535.0	21100	20	QPSK	1	99	23.69	0	0
		2535.0	21100	20	QPSK	50	0	22.46	0-1	1
		2535.0	21100	20	QPSK	50	25	22.55	0-1	1
		2535.0	21100	20	QPSK	50	50	22.54	0-1	1
2535.0		21100	20	QPSK	100	0	22.53	0-1	1	
2535.0		21100	20	16QAM	1	0	22.42	0-1	1	
2535.0		21100	20	16QAM	1	49	22.54	0-1	1	
2535.0		21100	20	16QAM	1	99	22.49	0-1	1	
2535.0		21100	20	16QAM	50	0	21.50	0-2	2	
2535.0		21100	20	16QAM	50	25	21.58	0-2	2	
2535.0		21100	20	16QAM	50	50	21.51	0-2	2	
2535.0		21100	20	16QAM	100	0	21.55	0-2	2	
High		2560	21350	20	QPSK	1	0	23.69	0	0
	2560	21350	20	QPSK	1	49	23.67	0	0	
	2560	21350	20	QPSK	1	99	<b>23.70</b>	0	0	
	2560	21350	20	QPSK	50	0	22.50	0-1	1	
	2560	21350	20	QPSK	50	25	<b>22.60</b>	0-1	1	
	2560	21350	20	QPSK	50	50	22.41	0-1	1	
	2560	21350	20	QPSK	100	0	22.48	0-1	1	
	2560	21350	20	16QAM	1	0	22.59	0-1	1	
	2560	21350	20	16QAM	1	49	22.63	0-1	1	
	2560	21350	20	16QAM	1	99	22.57	0-1	1	
	2560	21350	20	16QAM	50	0	21.51	0-2	2	
	2560	21350	20	16QAM	50	25	21.40	0-2	2	
	2560	21350	20	16QAM	50	50	21.44	0-2	2	
	2560	21350	20	16QAM	100	0	21.42	0-2	2	

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 30 of 62

**Table 9-14**  
**LTE Band 7 Conducted Powers - 15 MHz Bandwidth**

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]	
Low	2507.5	20825	15	QPSK	1	0	23.56	0	0
	2507.5	20825	15	QPSK	1	36	23.60	0	0
	2507.5	20825	15	QPSK	1	74	23.68	0	0
	2507.5	20825	15	QPSK	36	0	22.47	0-1	1
	2507.5	20825	15	QPSK	36	18	22.40	0-1	1
	2507.5	20825	15	QPSK	36	37	22.46	0-1	1
	2507.5	20825	15	QPSK	75	0	22.42	0-1	1
	2507.5	20825	15	16QAM	1	0	22.45	0-1	1
	2507.5	20825	15	16QAM	1	36	22.41	0-1	1
	2507.5	20825	15	16QAM	1	74	22.45	0-1	1
	2507.5	20825	15	16QAM	36	0	21.40	0-2	2
	2507.5	20825	15	16QAM	36	18	21.41	0-2	2
	2507.5	20825	15	16QAM	36	37	21.44	0-2	2
	2507.5	20825	15	16QAM	75	0	21.39	0-2	2
	Mid	2535.0	21100	15	QPSK	1	0	23.53	0
2535.0		21100	15	QPSK	1	36	23.62	0	0
2535.0		21100	15	QPSK	1	74	23.68	0	0
2535.0		21100	15	QPSK	36	0	22.56	0-1	1
2535.0		21100	15	QPSK	36	18	22.47	0-1	1
2535.0		21100	15	QPSK	36	37	22.38	0-1	1
2535.0		21100	15	QPSK	75	0	22.49	0-1	1
2535.0		21100	15	16QAM	1	0	22.40	0-1	1
2535.0		21100	15	16QAM	1	36	22.41	0-1	1
2535.0		21100	15	16QAM	1	74	22.45	0-1	1
2535.0		21100	15	16QAM	36	0	21.43	0-2	2
2535.0		21100	15	16QAM	36	18	21.40	0-2	2
2535.0		21100	15	16QAM	36	37	21.41	0-2	2
2535.0		21100	15	16QAM	75	0	21.44	0-2	2
High		2562.5	21375	15	QPSK	1	0	23.53	0
	2562.5	21375	15	QPSK	1	36	23.62	0	0
	2562.5	21375	15	QPSK	1	74	23.69	0	0
	2562.5	21375	15	QPSK	36	0	22.43	0-1	1
	2562.5	21375	15	QPSK	36	18	22.46	0-1	1
	2562.5	21375	15	QPSK	36	37	22.43	0-1	1
	2562.5	21375	15	QPSK	75	0	22.39	0-1	1
	2562.5	21375	15	16QAM	1	0	22.35	0-1	1
	2562.5	21375	15	16QAM	1	36	22.39	0-1	1
	2562.5	21375	15	16QAM	1	74	22.45	0-1	1
	2562.5	21375	15	16QAM	36	0	21.44	0-2	2
	2562.5	21375	15	16QAM	36	18	21.42	0-2	2
	2562.5	21375	15	16QAM	36	37	21.45	0-2	2
	2562.5	21375	15	16QAM	75	0	21.42	0-2	2

**Table 9-15**  
**LTE Band 7 Conducted Powers - 10 MHz Bandwidth**

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]	
Low	2505	20800	10	QPSK	1	0	23.67	0	0
	2505	20800	10	QPSK	1	25	23.62	0	0
	2505	20800	10	QPSK	1	49	23.66	0	0
	2505	20800	10	QPSK	25	0	22.44	0-1	1
	2505	20800	10	QPSK	25	12	22.40	0-1	1
	2505	20800	10	QPSK	25	25	22.43	0-1	1
	2505	20800	10	QPSK	50	0	22.38	0-1	1
	2505	20800	10	16QAM	1	0	22.42	0-1	1
	2505	20800	10	16QAM	1	25	22.42	0-1	1
	2505	20800	10	16QAM	1	49	22.36	0-1	1
	2505	20800	10	16QAM	25	0	21.37	0-2	2
	2505	20800	10	16QAM	25	12	21.40	0-2	2
	2505	20800	10	16QAM	25	25	21.45	0-2	2
	2505	20800	10	16QAM	50	0	21.40	0-2	2
	Mid	2535.0	21100	10	QPSK	1	0	23.70	0
2535.0		21100	10	QPSK	1	25	23.65	0	0
2535.0		21100	10	QPSK	1	49	23.69	0	0
2535.0		21100	10	QPSK	25	0	22.41	0-1	1
2535.0		21100	10	QPSK	25	12	22.42	0-1	1
2535.0		21100	10	QPSK	25	25	22.47	0-1	1
2535.0		21100	10	QPSK	50	0	22.45	0-1	1
2535.0		21100	10	16QAM	1	0	22.40	0-1	1
2535.0		21100	10	16QAM	1	25	22.41	0-1	1
2535.0		21100	10	16QAM	1	49	22.48	0-1	1
2535.0		21100	10	16QAM	25	0	21.47	0-2	2
2535.0		21100	10	16QAM	25	12	21.46	0-2	2
2535.0		21100	10	16QAM	25	25	21.46	0-2	2
2535.0		21100	10	16QAM	50	0	21.41	0-2	2
High		2565	21400	10	QPSK	1	0	23.64	0
	2565	21400	10	QPSK	1	25	23.57	0	0
	2565	21400	10	QPSK	1	49	23.68	0	0
	2565	21400	10	QPSK	25	0	22.47	0-1	1
	2565	21400	10	QPSK	25	12	22.50	0-1	1
	2565	21400	10	QPSK	25	25	22.42	0-1	1
	2565	21400	10	QPSK	50	0	22.37	0-1	1
	2565	21400	10	16QAM	1	0	22.47	0-1	1
	2565	21400	10	16QAM	1	25	22.36	0-1	1
	2565	21400	10	16QAM	1	49	22.41	0-1	1
	2565	21400	10	16QAM	25	0	21.37	0-2	2
	2565	21400	10	16QAM	25	12	21.40	0-2	2
	2565	21400	10	16QAM	25	25	21.41	0-2	2
	2565	21400	10	16QAM	50	0	21.40	0-2	2

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 31 of 62

**Table 9-16  
LTE Band 7 Conducted Powers - 5 MHz Bandwidth**

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]	
Low	2502.5	20775	5	QPSK	1	0	23.59	0	0
	2502.5	20775	5	QPSK	1	12	23.61	0	0
	2502.5	20775	5	QPSK	1	24	23.67	0	0
	2502.5	20775	5	QPSK	12	0	22.43	0-1	1
	2502.5	20775	5	QPSK	12	6	22.39	0-1	1
	2502.5	20775	5	QPSK	12	13	22.43	0-1	1
	2502.5	20775	5	QPSK	25	0	22.47	0-1	1
	2502.5	20775	5	16-QAM	1	0	22.41	0-1	1
	2502.5	20775	5	16-QAM	1	12	22.40	0-1	1
	2502.5	20775	5	16-QAM	1	24	22.42	0-1	1
	2502.5	20775	5	16-QAM	12	0	21.43	0-2	2
	2502.5	20775	5	16-QAM	12	6	21.42	0-2	2
	2502.5	20775	5	16-QAM	12	13	21.40	0-2	2
	2502.5	20775	5	16-QAM	25	0	21.38	0-2	2
	Mid	2535.0	21100	5	QPSK	1	0	23.70	0
2535.0		21100	5	QPSK	1	12	23.65	0	0
2535.0		21100	5	QPSK	1	24	23.62	0	0
2535.0		21100	5	QPSK	12	0	22.49	0-1	1
2535.0		21100	5	QPSK	12	6	22.44	0-1	1
2535.0		21100	5	QPSK	12	13	22.59	0-1	1
2535.0		21100	5	QPSK	25	0	22.50	0-1	1
2535.0		21100	5	16-QAM	1	0	22.57	0-1	1
2535.0		21100	5	16-QAM	1	12	22.60	0-1	1
2535.0		21100	5	16-QAM	1	24	22.45	0-1	1
2535.0		21100	5	16-QAM	12	0	21.42	0-2	2
2535.0		21100	5	16-QAM	12	6	21.40	0-2	2
2535.0		21100	5	16-QAM	12	13	21.47	0-2	2
2535.0		21100	5	16-QAM	25	0	21.43	0-2	2
High		2567.5	21425	5	QPSK	1	0	23.57	0
	2567.5	21425	5	QPSK	1	12	23.67	0	0
	2567.5	21425	5	QPSK	1	24	23.68	0	0
	2567.5	21425	5	QPSK	12	0	22.40	0-1	1
	2567.5	21425	5	QPSK	12	6	22.44	0-1	1
	2567.5	21425	5	QPSK	12	13	22.41	0-1	1
	2567.5	21425	5	QPSK	25	0	22.47	0-1	1
	2567.5	21425	5	16-QAM	1	0	22.43	0-1	1
	2567.5	21425	5	16-QAM	1	12	22.46	0-1	1
	2567.5	21425	5	16-QAM	1	24	22.52	0-1	1
	2567.5	21425	5	16-QAM	12	0	21.38	0-2	2
	2567.5	21425	5	16-QAM	12	6	21.42	0-2	2
	2567.5	21425	5	16-QAM	12	13	21.37	0-2	2
	2567.5	21425	5	16-QAM	25	0	21.40	0-2	2

FCC ID: ZNFD850	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 32 of 62	

## 9.4 LTE Carrier Aggregation Conducted Powers

Table 9-17

LTE Carrier Aggregation Conducted Powers - Band 2 (PCC) + Band 17 (SCC) 10 MHz BW

Rel. 10 Band 2 (PCC) + Band 17 (SCC), 10 MHz				Rel. 8 Band 2, 10 MHz
PCC HIGH	1905 MHz / ch.19150 + 740.0 MHz / ch.5790	PCC UL# RB	PCC UL RB Offset	Tx. Power (dBm)
		1	0	23.48
				Tx. Power (dBm)
				23.61

Table 9-18

LTE Carrier Aggregation Conducted Powers - Band 2 (PCC) + Band 29 (SCC) 10 MHz BW

Rel. 10 Band 2 (PCC) + Band 29 (SCC), 10 MHz				Rel. 8 Band 2, 10 MHz
PCC HIGH	1905 MHz / ch.19150 + 722.0 MHz / ch. 9710	PCC UL# RB	PCC UL RB Offset	Tx. Power (dBm)
		1	0	23.46
				Tx. Power (dBm)
				23.61

Table 9-19

LTE Carrier Aggregation Conducted Powers - Band 4 (PCC) + Band 17 (SCC) 10 MHz BW

Rel. 10 Band 4 (PCC) + Band 17 (SCC), 10MHz				Rel. 8 Band 4, 10 MHz
PCC HIGH	1750 MHz / ch.20350 + 740.0 MHz / ch.5790	PCC UL# RB	PCC UL RB Offset	Tx. Power (dBm)
		1	0	24.35
				Tx. Power (dBm)
				24.45

Table 9-20

LTE Carrier Aggregation Conducted Powers - Band 4 (PCC) + Band 29 (SCC) 10 MHz BW

Rel. 10 Band 4 (PCC) + Band 29 (SCC), 10 MHz				Rel. 8 Band 4, 10 MHz
PCC HIGH	1750 MHz / ch.20350 + 722.0 MHz / ch. 9710	PCC UL# RB	PCC UL RB Offset	Tx. Power (dBm)
		1	0	24.32
				Tx. Power (dBm)
				24.45

Table 9-21

LTE Carrier Aggregation Conducted Powers - Band 17 (PCC) + Band 2 (SCC) 10 MHz BW

Rel. 10 Band 17 (PCC) + Band 2 (SCC), 10 MHz				Rel. 8 Band 17, 10 MHz
PCC MID	710.0 MHz / ch.23790 + 1960 MHz / ch.900	PCC UL# RB	PCC UL RB Offset	Tx. Power (dBm)
		1	49	24.09
				Tx. Power (dBm)
				24.18

Notes:

1. The device does not support all Rel. 10 Carrier Aggregation features due to modem chipset limitation.
2. The device only supports downlink Carrier Aggregation. Uplink Carrier Aggregation is not supported. Power measurements were performed with two DL carriers for the Release 8 configuration that had the highest output power (across all bandwidths, channels and RB Configurations) for each band
3. This device only supports inter-band CA with 2 carriers (B2+B17, B2+B29, B4+B17, B4+B29, B17+B2 ) with a maximum of 10 MHz of spectrum.
4. All control and acknowledge data is sent on uplink channels that operate identical to release 8 specifications.

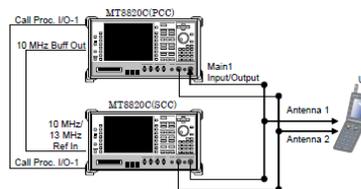


Figure 9-3  
Power Measurement Setup

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 33 of 62

## 9.5 WLAN Conducted Powers

**Table 9-22**  
**IEEE 802.11b Average RF Power**

Mode	Freq [MHz]	Channel	802.11b Conducted Power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1*	16.09	16.15	16.18	16.05
802.11b	2437	6*	16.22	16.21	16.29	16.21
802.11b	2462	11*	16.24	16.17	16.25	16.18

**Table 9-23**  
**IEEE 802.11g Average RF Power**

Mode	Freq [MHz]	Channel	802.11g Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11g	2412	1	13.42	13.47	13.41	13.45	13.46	13.41	13.47	13.49
802.11g	2437	6	13.35	13.40	13.31	13.34	13.30	13.22	13.32	13.35
802.11g	2462	11	13.14	13.23	13.19	13.27	13.28	13.20	13.29	13.25

**Table 9-24**  
**IEEE 802.11n Average RF Power**

Mode	Freq [MHz]	Channel	802.11n (2.4GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	12.44	12.41	12.45	12.36	12.45	12.42	12.45	12.48
802.11n	2437	6	12.48	12.38	12.43	12.34	12.39	12.35	12.42	12.46
802.11n	2462	11	12.41	12.39	12.36	12.29	12.31	12.27	12.33	12.37

**Table 9-25**  
**IEEE 802.11a Average RF Power**

Mode	Freq [MHz]	Channel	802.11a Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11a	5180	36*	12.98	12.90	12.95	12.92	12.99	12.91	12.88	12.85
802.11a	5200	40	12.99	12.87	12.89	12.90	12.93	12.98	12.99	12.79
802.11a	5220	44	12.88	12.82	12.84	12.87	12.86	12.86	12.86	12.73
802.11a	5240	48*	12.94	12.84	12.83	12.92	12.96	12.90	12.92	12.74
802.11a	5260	52*	12.95	12.89	12.85	12.88	12.92	12.90	12.80	12.83
802.11a	5280	56	12.81	12.59	12.65	12.71	12.72	12.74	12.54	12.63
802.11a	5300	60	12.87	12.69	12.68	12.85	12.80	12.75	12.65	12.58
802.11a	5320	64*	12.84	12.66	12.64	12.73	12.76	12.65	12.54	12.61
802.11a	5500	100	12.63	12.64	12.60	12.58	12.52	12.60	12.57	12.60
802.11a	5520	104*	12.59	12.58	12.61	12.54	12.56	12.54	12.48	12.59
802.11a	5540	108	12.69	12.70	12.70	12.67	12.61	12.63	12.62	12.69
802.11a	5560	112	12.49	12.53	12.47	12.51	12.35	12.45	12.44	12.52
802.11a	5580	116*	12.55	12.52	12.53	12.43	12.49	12.54	12.52	12.51
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	12.45	12.49	12.49	12.48	12.34	12.42	12.39	12.43
802.11a	5680	136*	12.42	12.48	12.45	12.36	12.27	12.47	12.30	12.36
802.11a	5700	140	12.50	12.53	12.41	12.47	12.33	12.45	12.46	12.50
802.11a	5745	149*	12.57	12.52	12.52	12.56	12.49	12.48	12.48	12.52
802.11a	5765	153	12.44	12.34	12.45	12.35	12.40	12.34	12.39	12.37
802.11a	5785	157*	12.49	12.42	12.42	12.44	12.37	12.43	12.44	12.39
802.11a	5805	161	12.57	12.52	12.58	12.56	12.53	12.48	12.47	12.51
802.11a	5825	165*	12.60	12.55	12.53	12.60	12.54	12.54	12.49	12.54

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 34 of 62

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

(\*) – indicates default channels per KDB Publication 248227 D01v01r02. When the adjacent channels are higher in power than the default channels, these “required channels” are considered for SAR testing instead of the default channels.

**Table 9-26**  
**IEEE 802.11n Average RF Power – 20 MHz Bandwidth**

Mode	Freq [MHz]	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	19.5	26	39	52	58.5	65
802.11n	5180	36	11.98	11.92	11.97	11.92	11.83	11.80	11.78	11.97
802.11n	5200	40	11.87	11.86	11.84	11.72	11.74	11.65	11.61	11.78
802.11n	5220	44	11.92	11.80	11.85	11.81	11.79	11.74	11.72	11.89
802.11n	5240	48	11.77	11.61	11.82	11.71	11.63	11.58	11.63	11.68
802.11n	5260	52	11.88	11.83	11.91	11.90	11.94	11.82	11.88	11.90
802.11n	5280	56	11.86	11.88	11.92	11.94	11.93	11.74	11.79	11.93
802.11n	5300	60	11.82	11.72	11.91	11.87	11.89	11.79	11.76	11.85
802.11n	5320	64	11.76	11.74	11.81	11.77	11.80	11.67	11.82	11.78
802.11n	5500	100	11.78	11.82	11.78	11.78	11.80	11.77	11.74	11.62
802.11n	5520	104	11.84	11.89	11.80	11.79	11.85	11.79	11.76	11.64
802.11n	5540	108	11.82	11.88	11.95	11.83	11.83	11.81	11.75	11.65
802.11n	5560	112	11.66	11.74	11.75	11.67	11.63	11.62	11.69	11.50
802.11n	5580	116	11.71	11.65	11.73	11.73	11.74	11.67	11.71	11.55
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	11.57	11.50	11.52	11.50	11.64	11.53	11.49	11.44
802.11n	5680	136	11.60	11.55	11.64	11.56	11.61	11.54	11.60	11.37
802.11n	5700	140	11.66	11.68	11.74	11.67	11.70	11.64	11.60	11.56
802.11n	5745	149	11.66	11.67	11.69	11.62	11.61	11.57	11.58	11.54
802.11n	5765	153	11.64	11.71	11.66	11.63	11.62	11.59	11.57	11.49
802.11n	5785	157	11.65	11.68	11.70	11.62	11.55	11.51	11.51	11.53
802.11n	5805	161	11.62	11.60	11.59	11.54	11.56	11.55	11.54	11.57
802.11n	5825	165	11.02	11.09	11.05	10.95	10.97	10.91	10.96	10.87

**Table 9-27**  
**IEEE 802.11n Average RF Power – 40 MHz Bandwidth**

Mode	Freq [MHz]	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			13.5	27	40.5	54	81	108	121.5	135
802.11n	5190	38	11.92	11.89	11.91	11.97	11.95	11.98	11.95	11.94
802.11n	5230	46	11.90	11.86	11.95	11.90	11.94	11.88	11.93	11.85
802.11n	5270	54	11.92	11.91	11.87	11.89	11.91	11.85	11.82	11.88
802.11n	5310	62	11.87	11.97	11.95	11.87	11.95	11.92	11.88	11.94
802.11n	5510	102	11.96	11.72	11.08	11.21	11.17	11.22	11.25	11.40
802.11n	5550	110	11.95	11.71	11.04	11.24	11.13	11.22	11.22	11.38
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	11.78	11.59	10.99	11.07	10.99	11.09	11.12	11.26
802.11n	5755	151	11.63	11.70	11.83	11.70	11.72	11.72	11.66	11.73
802.11n	5795	159	11.84	11.93	11.99	11.82	11.99	11.84	11.86	11.90


FCC ID: ZNFD850	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 35 of 62

**Table 9-28  
IEEE 802.11ac Average RF Power – 80 MHz Bandwidth**


Mode	Freq [MHz]	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
			Data Rate [Mbps]									
			29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5210	42	<b>11.96</b>	11.85	11.91	11.79	11.91	11.85	11.75	11.77	11.78	11.74
802.11ac	5290	58	<b>11.84</b>	11.74	11.88	11.95	11.84	11.93	11.90	11.87	11.81	11.79
802.11ac	5530	106	<b>11.72</b>	11.76	11.60	11.49	11.46	11.70	11.51	11.65	11.74	11.73
802.11ac	5775	155	<b>11.85</b>	11.83	11.94	11.92	11.91	11.94	11.84	11.79	11.92	11.76

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012/April 2013 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- Full SAR tests for all IEEE 802.11ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.

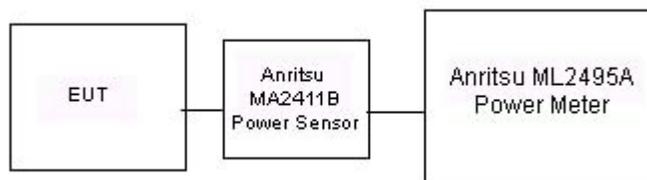

**Figure 9-4  
Power Measurement Setup for Bandwidths < 50 MHz**



**Figure 9-5  
Power Measurement Setup for Bandwidths > 50 MHz**

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 36 of 62

# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification

**Table 10-1  
Measured Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$			
4/2/2014	740H	23.0	710	0.902	42.663	0.890	42.149	1.35%	1.22%			
			725	0.910	42.205	0.891	42.071	2.13%	0.32%			
			740	0.923	42.006	0.893	41.994	3.36%	0.03%			
			755	0.936	41.804	0.894	41.916	4.70%	-0.27%			
3/31/2014	835H	22.7	820	0.903	41.190	0.899	41.578	0.44%	-0.93%			
			835	0.917	40.957	0.900	41.500	1.89%	-1.31%			
			850	0.930	40.789	0.916	41.500	1.53%	-1.71%			
4/3/2014	1750H	24.4	1710	1.319	39.800	1.348	40.142	-2.15%	-0.85%			
			1750	1.382	39.600	1.371	40.079	-0.66%	-1.20%			
			1790	1.402	39.393	1.394	40.016	0.57%	-1.56%			
4/2/2014	1900H	22.6	1850	1.367	40.289	1.400	40.000	-2.36%	0.72%			
			1880	1.402	40.170	1.400	40.000	0.14%	0.43%			
			1910	1.433	40.042	1.400	40.000	2.36%	0.11%			
3/31/2014	2450H - 2600H	22.3	2401	1.804	38.856	1.756	39.287	2.73%	-1.10%			
			2450	1.858	38.630	1.800	39.200	3.22%	-1.45%			
			2499	1.912	38.428	1.853	39.138	3.18%	-1.81%			
			2500	1.912	38.417	1.855	39.136	3.07%	-1.84%			
			2550	1.969	38.196	1.909	39.073	3.14%	-2.24%			
			2600	2.027	38.036	1.964	39.009	3.21%	-2.49%			
			5200	4.615	36.682	4.655	35.986	-0.86%	1.93%			
			5220	4.652	36.660	4.676	35.963	-0.51%	1.94%			
			5260	4.702	36.660	4.717	35.917	-0.32%	2.07%			
			5280	4.704	36.679	4.737	35.894	-0.70%	2.19%			
4/2/2014	5200H-5800H	23.7	5300	4.722	36.559	4.758	35.871	-0.76%	1.92%			
			5500	4.943	36.315	4.963	35.643	-0.40%	1.89%			
			5520	4.956	36.294	4.983	35.620	-0.54%	1.89%			
			5540	4.977	36.291	5.004	35.597	-0.54%	1.95%			
			5580	4.998	36.192	5.045	35.551	-0.93%	1.80%			
			5600	5.033	36.176	5.065	35.529	-0.63%	1.82%			
			5700	5.132	36.059	5.168	35.414	-0.70%	1.82%			
			5745	5.204	36.000	5.214	35.363	-0.19%	1.80%			
			5765	5.219	36.006	5.234	35.340	-0.29%	1.88%			
			5785	5.229	36.014	5.255	35.317	-0.49%	1.97%			
			5800	5.241	35.971	5.270	35.300	-0.55%	1.90%			
			5805	5.251	35.932	5.275	35.294	-0.45%	1.81%			
			5825	5.267	35.919	5.296	35.271	-0.55%	1.84%			
			4/2/2014	740B	23.1	710	0.958	56.516	0.960	55.687	-0.21%	1.49%
						725	0.972	56.362	0.961	55.629	1.14%	1.32%
						740	0.985	56.216	0.963	55.570	2.28%	1.16%
						755	0.998	56.054	0.964	55.512	3.53%	0.96%
			4/1/2014	835B	22.6	820	0.947	53.366	0.969	55.258	-2.27%	-3.42%
835	0.961	53.211				0.970	55.200	-0.93%	-3.60%			
850	0.975	53.090				0.988	55.154	-1.32%	-3.74%			
3/31/2014	1750B	20.0	1710	1.466	52.130	1.463	53.637	0.21%	-2.63%			
			1750	1.511	51.910	1.488	53.432	1.55%	-2.85%			
			1790	1.550	51.781	1.514	53.326	2.38%	-2.90%			
4/3/2014	1900B	23.9	1850	1.512	51.253	1.520	53.300	-0.53%	-3.84%			
			1880	1.547	51.182	1.520	53.300	1.78%	-3.97%			
			1910	1.577	51.062	1.520	53.300	3.75%	-4.20%			
4/7/2014	1900B	22.3	1850	1.532	52.008	1.520	53.300	0.79%	-2.42%			
			1880	1.563	51.908	1.520	53.300	2.83%	-2.61%			
			1910	1.592	51.801	1.520	53.300	4.74%	-2.81%			
4/2/2014	2450B - 2600B	23.1	2401	1.969	52.151	1.903	52.765	3.47%	-1.16%			
			2450	2.038	51.977	1.950	52.700	4.51%	-1.37%			
			2499	2.103	51.789	2.019	52.638	4.16%	-1.61%			
			2500	2.102	51.770	2.021	52.636	4.01%	-1.65%			
			2550	2.177	51.558	2.092	52.573	4.06%	-1.93%			
			2600	2.243	51.398	2.163	52.509	3.70%	-2.12%			
04/01/2014	5200B-5800B	22.0	5200	5.271	48.586	5.299	49.014	-0.53%	-0.87%			
			5220	5.317	48.537	5.323	48.987	-0.11%	-0.92%			
			5260	5.386	48.441	5.369	48.933	0.32%	-1.01%			
			5280	5.394	48.438	5.393	48.906	0.02%	-0.96%			
			5300	5.431	48.317	5.416	48.879	0.28%	-1.15%			
			5500	5.741	47.868	5.650	48.607	1.61%	-1.52%			
			5520	5.770	47.811	5.673	48.580	1.71%	-1.58%			
			5540	5.794	47.785	5.696	48.553	1.72%	-1.58%			
			5745	6.117	47.327	5.936	48.275	3.05%	-1.96%			
			5765	6.140	47.286	5.959	48.248	3.04%	-1.99%			
			5785	6.164	47.267	5.982	48.220	3.04%	-1.99%			
			5800	6.180	47.185	6.000	48.200	3.00%	-2.11%			
			5805	6.196	47.161	6.006	48.193	3.16%	-2.14%			
			5825	6.223	47.134	6.029	48.166	3.22%	-2.14%			

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.


FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset		Page 37 of 62

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

**Table 10-2  
System Verification Results**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
K	750	HEAD	04/02/2014	24.5	23.0	0.100	1003	3287	0.849	8.370	8.490	1.43%
G	835	HEAD	03/31/2014	24.4	22.7	0.100	4d119	3258	0.930	9.680	9.300	-3.93%
H	1750	HEAD	04/03/2014	23.9	23.8	0.100	1008	3589	3.450	36.800	34.500	-6.25%
G	1900	HEAD	04/02/2014	24.3	23.0	0.100	5d149	3258	3.980	40.400	39.800	-1.49%
H	2450	HEAD	03/31/2014	24.3	22.5	0.040	719	3589	2.120	53.200	53.000	-0.38%
H	2600	HEAD	03/31/2014	24.3	22.6	0.040	1004	3589	2.330	58.200	58.250	0.09%
E	5200	HEAD	04/02/2014	24.3	23.7	0.040	1057	3914	2.970	78.000	74.250	-4.81%
E	5300	HEAD	04/02/2014	24.4	23.8	0.040	1057	3914	3.060	83.000	76.500	-7.83%
E	5500	HEAD	04/02/2014	24.5	23.7	0.040	1057	3914	3.410	84.300	85.250	1.13%
E	5600	HEAD	04/02/2014	24.5	23.7	0.040	1057	3914	3.160	83.500	79.000	-5.39%
E	5800	HEAD	04/02/2014	24.3	23.7	0.040	1057	3914	2.960	79.300	74.000	-6.68%
K	750	BODY	04/02/2014	24.5	23.1	0.100	1003	3333	0.846	8.770	8.460	-3.53%
B	835	BODY	04/01/2014	23.0	22.5	0.100	4d133	3288	0.969	9.610	9.690	0.83%
C	1750	BODY	03/31/2014	23.3	20.0	0.100	1008	3263	4.090	38.200	40.900	7.07%
D	1900	BODY	04/03/2014	24.3	23.9	0.100	5d149	3022	4.280	40.500	42.800	5.68%
D	1900	BODY	04/07/2014	24.0	21.6	0.100	5d149	3022	4.270	40.500	42.700	5.43%
G	2450	BODY	04/02/2014	24.4	23.4	0.040	719	3258	2.130	51.700	53.250	3.00%
G	2600	BODY	04/02/2014	24.4	23.4	0.040	1004	3258	2.370	57.500	59.250	3.04%
A	5200	BODY	04/01/2014	23.8	22.3	0.100	1007	3920	7.580	72.600	75.800	4.41%
A	5300	BODY	04/01/2014	23.8	22.3	0.100	1007	3920	7.940	74.700	79.400	6.29%
A	5500	BODY	04/01/2014	23.8	22.3	0.100	1007	3920	7.740	75.900	77.400	1.98%
A	5800	BODY	04/01/2014	23.8	22.3	0.100	1007	3920	7.460	72.900	74.600	2.33%

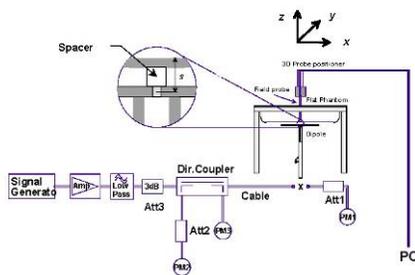

**Figure 10-1  
System Verification Setup Diagram**



**Figure 10-2  
System Verification Setup Photo**

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 38 of 62	

# 11 SAR DATA SUMMARY

## 11.1 Standalone Head SAR Data

**Table 11-1  
GSM 850 Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Back Cover Type	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.2	32.84	0.04	Right	Cheek	Standard	4	1	1:8.3	0.258	1.086	0.280	
836.60	190	GSM 850	GSM	33.2	32.84	0.13	Right	Cheek	WCC Open	4	1	1:8.3	0.269	1.086	0.292	
836.60	190	GSM 850	GSM	33.2	32.84	-0.12	Right	Cheek	WCC Closed	4	1	1:8.3	0.260	1.086	0.282	
836.60	190	GSM 850	GSM	33.2	32.84	-0.02	Right	Tilt	Standard	4	1	1:8.3	0.197	1.086	0.214	
836.60	190	GSM 850	GSM	33.2	32.84	-0.10	Left	Cheek	Standard	4	1	1:8.3	0.192	1.086	0.209	
836.60	190	GSM 850	GSM	33.2	32.84	-0.02	Left	Tilt	Standard	4	1	1:8.3	0.159	1.086	0.173	
836.60	190	GSM 850	GPRS	29.2	28.85	-0.13	Right	Cheek	Standard	4	3	1:2.76	0.288	1.084	0.312	
836.60	190	GSM 850	GPRS	29.2	28.85	-0.17	Right	Cheek	WCC Open	4	3	1:2.76	0.334	1.084	0.362	A1
836.60	190	GSM 850	GPRS	29.2	28.85	-0.13	Right	Cheek	WCC Closed	4	3	1:2.76	0.303	1.084	0.328	
836.60	190	GSM 850	GPRS	29.2	28.85	0.14	Right	Tilt	Standard	4	3	1:2.76	0.226	1.084	0.245	
836.60	190	GSM 850	GPRS	29.2	28.85	-0.09	Left	Cheek	Standard	4	3	1:2.76	0.255	1.084	0.276	
836.60	190	GSM 850	GPRS	29.2	28.85	-0.14	Left	Tilt	Standard	4	3	1:2.76	0.206	1.084	0.223	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2  
UMTS 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Back Cover Type	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	24.2	24.17	0.05	Right	Cheek	Standard	5	1:1	0.429	1.007	0.432	A2
836.60	4183	UMTS 850	RMC	24.2	24.17	-0.03	Right	Cheek	WCC Open	5	1:1	0.411	1.007	0.414	
836.60	4183	UMTS 850	RMC	24.2	24.17	0.07	Right	Cheek	WCC Closed	5	1:1	0.365	1.007	0.368	
836.60	4183	UMTS 850	RMC	24.2	24.17	-0.08	Right	Tilt	Standard	5	1:1	0.281	1.007	0.263	
836.60	4183	UMTS 850	RMC	24.2	24.17	0.01	Left	Cheek	Standard	5	1:1	0.326	1.007	0.328	
836.60	4183	UMTS 850	RMC	24.2	24.17	-0.02	Left	Tilt	Standard	5	1:1	0.240	1.007	0.242	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-3  
UMTS 1750 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Back Cover Type	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.8	24.45	-0.07	Right	Cheek	Standard	5	1:1	0.146	1.084	0.158	
1732.40	1412	UMTS 1750	RMC	24.8	24.45	-0.02	Right	Tilt	Standard	5	1:1	0.157	1.084	0.170	
1732.40	1412	UMTS 1750	RMC	24.8	24.45	-0.05	Left	Cheek	Standard	5	1:1	0.238	1.084	0.258	A3
1732.40	1412	UMTS 1750	RMC	24.8	24.45	0.07	Left	Cheek	WCC Open	5	1:1	0.200	1.084	0.217	
1732.40	1412	UMTS 1750	RMC	24.8	24.45	0.05	Left	Cheek	WCC Closed	5	1:1	0.226	1.084	0.245	
1732.40	1412	UMTS 1750	RMC	24.8	24.45	0.14	Left	Tilt	Standard	5	1:1	0.149	1.084	0.162	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 39 of 62

**Table 11-4  
GSM 1900 Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Back Cover Type	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.7	30.48	-0.02	Right	Cheek	Standard	4	1	1:8.3	0.086	1.052	0.090	
1880.00	661	GSM 1900	GSM	30.7	30.48	-0.12	Right	Cheek	WCC Open	4	1	1:8.3	0.076	1.052	0.080	
1880.00	661	GSM 1900	GSM	30.7	30.48	0.04	Right	Cheek	WCC Closed	4	1	1:8.3	0.072	1.052	0.076	
1880.00	661	GSM 1900	GSM	30.7	30.48	-0.10	Right	Tilt	Standard	4	1	1:8.3	0.029	1.052	0.031	
1880.00	661	GSM 1900	GSM	30.7	30.48	-0.13	Left	Cheek	Standard	4	1	1:8.3	0.058	1.052	0.061	
1880.00	661	GSM 1900	GSM	30.7	30.48	-0.09	Left	Tilt	Standard	4	1	1:8.3	0.050	1.052	0.053	
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.02	Right	Cheek	Standard	4	2	1:4.15	0.140	1.074	0.150	A4
1880.00	661	GSM 1900	GPRS	29.7	29.39	0.02	Right	Cheek	WCC Open	4	2	1:4.15	0.131	1.074	0.141	
1880.00	661	GSM 1900	GPRS	29.7	29.39	0.03	Right	Cheek	WCC Closed	4	2	1:4.15	0.084	1.074	0.090	
1880.00	661	GSM 1900	GPRS	29.7	29.39	0.02	Right	Tilt	Standard	4	2	1:4.15	0.046	1.074	0.049	
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.16	Left	Cheek	Standard	4	2	1:4.15	0.104	1.074	0.112	
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.14	Left	Tilt	Standard	4	2	1:4.15	0.079	1.074	0.085	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-5  
UMTS 1900 Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Back Cover Type	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.											(W/kg)		(W/kg)		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.04	Right	Cheek	Standard	5	1:1	0.170	1.014	0.172	A5	
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.03	Right	Cheek	WCC Open	5	1:1	0.170	1.014	0.172		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.01	Right	Cheek	WCC Closed	5	1:1	0.155	1.014	0.157		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.04	Right	Tilt	Standard	5	1:1	0.060	1.014	0.061		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.01	Left	Cheek	Standard	5	1:1	0.142	1.014	0.144		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	-0.08	Left	Tilt	Standard	5	1:1	0.093	1.014	0.094		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-6  
LTE Band 17 Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
710.00	23790	Md	LTE Band 17	10	Standard	24.2	24.18	-0.08	0	Right	Cheek	QPSK	1	49	7	1:1	0.130	1.005	0.131	
710.00	23790	Md	LTE Band 17	10	Standard	23.2	23.19	-0.11	1	Right	Cheek	QPSK	25	12	7	1:1	0.101	1.002	0.101	
710.00	23790	Md	LTE Band 17	10	Standard	24.2	24.18	0.06	0	Right	Tilt	QPSK	1	49	7	1:1	0.095	1.005	0.095	
710.00	23790	Md	LTE Band 17	10	Standard	23.2	23.19	-0.16	1	Right	Tilt	QPSK	25	12	7	1:1	0.075	1.002	0.075	
710.00	23790	Md	LTE Band 17	10	Standard	24.2	24.18	-0.05	0	Left	Cheek	QPSK	1	49	7	1:1	0.170	1.005	0.171	A6
710.00	23790	Md	LTE Band 17	10	WCC Open	24.2	24.18	0.13	0	Left	Cheek	QPSK	1	49	7	1:1	0.160	1.005	0.161	
710.00	23790	Md	LTE Band 17	10	WCC Closed	24.2	24.18	-0.18	0	Left	Cheek	QPSK	1	49	7	1:1	0.134	1.005	0.135	
710.00	23790	Md	LTE Band 17	10	Standard	23.2	23.19	0.02	1	Left	Cheek	QPSK	25	12	7	1:1	0.117	1.002	0.117	
710.00	23790	Md	LTE Band 17	10	Standard	24.2	24.18	0.07	0	Left	Tilt	QPSK	1	49	7	1:1	0.110	1.005	0.111	
710.00	23790	Md	LTE Band 17	10	Standard	23.2	23.19	0.11	1	Left	Tilt	QPSK	25	12	7	1:1	0.082	1.002	0.082	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram												

**Table 11-7  
LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	-0.06	0	Right	Cheek	QPSK	1	25	7	1:1	0.358	1.016	0.364	A7
836.50	20525	Mid	LTE Band 5 (Cell)	10	WCC Open	23.7	23.63	0.13	0	Right	Cheek	QPSK	1	25	7	1:1	0.317	1.016	0.322	
836.50	20525	Mid	LTE Band 5 (Cell)	10	WCC Closed	23.7	23.63	0.03	0	Right	Cheek	QPSK	1	25	7	1:1	0.298	1.016	0.303	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	0.10	1	Right	Cheek	QPSK	25	0	7	1:1	0.268	1.062	0.285	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	0.15	0	Right	Tilt	QPSK	1	25	7	1:1	0.200	1.016	0.203	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	0.04	1	Right	Tilt	QPSK	25	0	7	1:1	0.150	1.062	0.159	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	0.07	0	Left	Cheek	QPSK	1	25	7	1:1	0.278	1.016	0.282	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	0.14	1	Left	Cheek	QPSK	25	0	7	1:1	0.195	1.062	0.207	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	-0.01	0	Left	Tilt	QPSK	1	25	7	1:1	0.175	1.016	0.178	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	0.07	1	Left	Tilt	QPSK	25	0	7	1:1	0.126	1.062	0.134	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-8  
LTE Band 4 (AWS) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	0.10	0	Right	Cheek	QPSK	1	99	6	1:1	0.071	1.002	0.071	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	0.11	1	Right	Cheek	QPSK	50	25	6	1:1	0.057	1.026	0.058	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	0.10	0	Right	Tilt	QPSK	1	99	6	1:1	0.095	1.002	0.095	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	0.12	1	Right	Tilt	QPSK	50	25	6	1:1	0.086	1.026	0.088	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	0.05	0	Left	Cheek	QPSK	1	99	6	1:1	0.109	1.002	0.109	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	WCC Open	24.5	24.49	0.14	0	Left	Cheek	QPSK	1	99	6	1:1	0.123	1.002	0.123	A8
1732.50	20175	Mid	LTE Band 4 (AWS)	20	WCC Closed	24.5	24.49	-0.13	0	Left	Cheek	QPSK	1	99	6	1:1	0.122	1.002	0.122	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	0.01	1	Left	Cheek	QPSK	50	25	6	1:1	0.092	1.026	0.094	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	0.12	0	Left	Tilt	QPSK	1	99	6	1:1	0.058	1.002	0.058	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	0.14	1	Left	Tilt	QPSK	50	25	6	1:1	0.048	1.026	0.049	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-9  
LTE Band 2 (PCS) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	0.01	0	Right	Cheek	QPSK	1	99	6	1:1	0.154	1.052	0.162	A9
1900.00	19100	High	LTE Band 2 (PCS)	20	WCC Open	23.9	23.68	0.15	0	Right	Cheek	QPSK	1	99	6	1:1	0.119	1.052	0.125	
1900.00	19100	High	LTE Band 2 (PCS)	20	WCC Closed	23.9	23.68	0.13	0	Right	Cheek	QPSK	1	99	6	1:1	0.092	1.052	0.097	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	0.03	1	Right	Cheek	QPSK	50	0	6	1:1	0.148	1.089	0.161	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	-0.07	0	Right	Tilt	QPSK	1	99	6	1:1	0.051	1.052	0.054	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	0.02	1	Right	Tilt	QPSK	50	0	6	1:1	0.045	1.089	0.049	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	0.14	0	Left	Cheek	QPSK	1	99	6	1:1	0.141	1.052	0.148	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	-0.03	1	Left	Cheek	QPSK	50	0	6	1:1	0.131	1.089	0.143	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	-0.09	0	Left	Tilt	QPSK	1	99	6	1:1	0.103	1.052	0.108	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	0.12	1	Left	Tilt	QPSK	50	0	6	1:1	0.084	1.089	0.091	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 41 of 62	

**Table 11-10  
LTE Band 7 Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	0.11	0	Right	Cheek	QPSK	1	99	6	1:1	0.026	1.000	0.026	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.04	1	Right	Cheek	QPSK	50	25	6	1:1	0.015	1.023	0.015	
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	0.05	0	Right	Tilt	QPSK	1	99	6	1:1	0.054	1.000	0.054	
2560.00	21350	High	LTE Band 7	20	WCC Open	23.7	23.70	0.15	0	Right	Tilt	QPSK	1	99	6	1:1	0.121	1.000	0.121	A9
2560.00	21350	High	LTE Band 7	20	WCC Closed	23.7	23.70	0.12	0	Right	Tilt	QPSK	1	99	6	1:1	0.097	1.000	0.097	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.06	1	Right	Tilt	QPSK	50	25	6	1:1	0.040	1.023	0.041	
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	0.05	0	Left	Cheek	QPSK	1	99	6	1:1	0.047	1.000	0.047	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.03	1	Left	Cheek	QPSK	50	25	6	1:1	0.034	1.023	0.035	
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	0.07	0	Left	Tilt	QPSK	1	99	6	1:1	0.045	1.000	0.045	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.08	1	Left	Tilt	QPSK	50	25	6	1:1	0.033	1.023	0.034	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-11  
DTS Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Back Cover Type	Device Serial Number	Data Rate (Mbps)	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.												(W/kg)		(W/kg)		
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.12	Right	Cheek	Standard	16	1	1:1	0.114	1.062	0.121		
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.14	Right	Tilt	Standard	16	1	1:1	0.112	1.062	0.119		
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.03	Left	Cheek	Standard	16	1	1:1	0.178	1.062	0.189		
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.11	Left	Cheek	WCC Open	16	1	1:1	0.228	1.062	0.242	A11	
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.19	Left	Cheek	WCC Closed	16	1	1:1	0.171	1.062	0.182		
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.06	Left	Tilt	Standard	16	1	1:1	0.167	1.062	0.177		
5745	149	IEEE 802.11a	OFDM	13.0	12.57	0.16	Right	Cheek	Standard	16	6	1:1	0.368	1.104	0.406		
5805	161	IEEE 802.11a	OFDM	13.0	12.57	0.16	Right	Cheek	Standard	16	6	1:1	0.376	1.104	0.415		
5825	165	IEEE 802.11a	OFDM	13.0	12.60	0.13	Right	Cheek	Standard	16	6	1:1	0.377	1.096	0.413		
5745	149	IEEE 802.11a	OFDM	13.0	12.57	0.13	Right	Tilt	Standard	16	6	1:1	0.427	1.104	0.471		
5805	161	IEEE 802.11a	OFDM	13.0	12.57	-0.16	Right	Tilt	Standard	16	6	1:1	0.455	1.104	0.502	A12	
5825	165	IEEE 802.11a	OFDM	13.0	12.60	0.07	Right	Tilt	Standard	16	6	1:1	0.446	1.096	0.489		
5805	161	IEEE 802.11a	OFDM	13.0	12.57	0.05	Right	Tilt	WCC Open	16	6	1:1	0.357	1.104	0.394		
5805	161	IEEE 802.11a	OFDM	13.0	12.57	0.05	Right	Tilt	WCC Closed	16	6	1:1	0.356	1.104	0.393		
5775	155	IEEE 802.11ac	OFDM	12.0	11.85	0.04	Right	Tilt	Standard	16	29.3	1:1	0.262	1.035	0.271		
5745	149	IEEE 802.11a	OFDM	13.0	12.57	0.13	Left	Cheek	Standard	16	6	1:1	0.388	1.104	0.428		
5805	161	IEEE 802.11a	OFDM	13.0	12.57	0.19	Left	Cheek	Standard	16	6	1:1	0.366	1.104	0.404		
5825	165	IEEE 802.11a	OFDM	13.0	12.60	0.20	Left	Cheek	Standard	16	6	1:1	0.368	1.096	0.403		
5745	149	IEEE 802.11a	OFDM	13.0	12.57	0.11	Left	Tilt	Standard	16	6	1:1	0.425	1.104	0.469		
5805	161	IEEE 802.11a	OFDM	13.0	12.57	0.10	Left	Tilt	Standard	16	6	1:1	0.412	1.104	0.455		
5825	165	IEEE 802.11a	OFDM	13.0	12.60	0.16	Left	Tilt	Standard	16	6	1:1	0.425	1.096	0.466		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 42 of 62	

**Table 11-12  
NII Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Back Cover Type	Device Serial Number	Data Rate (Mbps)	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
5200	40	IEEE 802.11a	OFDM	13.0	12.99	0.14	Right	Cheek	Standard	16	6	1:1	0.172	1.002	0.172	
5200	40	IEEE 802.11a	OFDM	13.0	12.99	0.13	Right	Tilt	Standard	16	6	1:1	0.255	1.002	0.256	
5200	40	IEEE 802.11a	OFDM	13.0	12.99	-0.20	Left	Cheek	Standard	16	6	1:1	0.244	1.002	0.244	
5200	40	IEEE 802.11a	OFDM	13.0	12.99	0.12	Left	Tilt	Standard	16	6	1:1	0.263	1.002	0.264	
5210	42	IEEE 802.11ac	OFDM	12.0	11.96	0.13	Left	Tilt	Standard	16	29.3	1:1	0.177	1.009	0.179	
5260	52	IEEE 802.11a	OFDM	13.0	12.95	0.14	Right	Cheek	Standard	16	6	1:1	0.195	1.012	0.197	
5260	52	IEEE 802.11a	OFDM	13.0	12.95	0.13	Right	Tilt	Standard	16	6	1:1	0.274	1.012	0.277	
5260	52	IEEE 802.11a	OFDM	13.0	12.95	0.16	Left	Cheek	Standard	16	6	1:1	0.255	1.012	0.258	
5260	52	IEEE 802.11a	OFDM	13.0	12.95	-0.02	Left	Tilt	Standard	16	6	1:1	0.281	1.012	0.284	
5290	58	IEEE 802.11ac	OFDM	12.0	11.84	0.15	Left	Tilt	Standard	16	29.3	1:1	0.192	1.038	0.199	
5540	108	IEEE 802.11a	OFDM	13.0	12.69	0.13	Right	Cheek	Standard	16	6	1:1	0.286	1.074	0.307	
5540	108	IEEE 802.11a	OFDM	13.0	12.69	0.21	Right	Tilt	Standard	16	6	1:1	0.319	1.074	0.343	
5540	108	IEEE 802.11a	OFDM	13.0	12.69	0.01	Left	Cheek	Standard	16	6	1:1	0.392	1.074	0.421	
5580	116	IEEE 802.11a	OFDM	13.0	12.55	0.01	Left	Cheek	Standard	16	6	1:1	0.392	1.109	0.435	
5700	140	IEEE 802.11a	OFDM	13.0	12.50	0.02	Left	Cheek	Standard	16	6	1:1	0.429	1.122	0.481	
5540	108	IEEE 802.11a	OFDM	13.0	12.69	0.05	Left	Tilt	Standard	16	6	1:1	0.384	1.074	0.412	
5580	116	IEEE 802.11a	OFDM	13.0	12.55	0.10	Left	Tilt	Standard	16	6	1:1	0.402	1.109	0.446	
5700	140	IEEE 802.11a	OFDM	13.0	12.50	0.13	Left	Tilt	Standard	16	6	1:1	0.431	1.122	0.484	A13
5530	106	IEEE 802.11ac	OFDM	12.0	11.72	0.13	Left	Tilt	Standard	16	29.3	1:1	0.261	1.067	0.278	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram									

**11.2 Standalone Body-Worn SAR Data**

**Table 11-13  
GSM/UMTS Body-Worn SAR Data**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Back Cover Type	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.2	32.84	0.05	10 mm	Standard	4	1	1:8.3	back	0.547	1.086	0.594	
836.60	190	GSM 850	GSM	33.2	32.84	0.03	10 mm	WCC Closed	4	1	1:8.3	back	0.436	1.086	0.473	
836.60	190	GSM 850	GPRS	29.2	28.85	0.01	10 mm	Standard	4	3	1:2.76	back	0.595	1.084	0.645	A14
836.60	190	GSM 850	GPRS	29.2	28.85	0.01	10 mm	WCC Closed	4	3	1:2.76	back	0.476	1.084	0.516	
836.60	4183	UMTS 850	RMC	24.2	24.17	0.10	10 mm	Standard	5	N/A	1:1	back	0.653	1.007	0.658	A16
836.60	4183	UMTS 850	RMC	24.2	24.17	0.02	10 mm	WCC Closed	5	N/A	1:1	back	0.427	1.007	0.430	
1732.40	1412	UMTS 1750	RMC	24.8	24.45	0.12	10 mm	Standard	5	N/A	1:1	back	0.570	1.084	0.618	
1732.40	1412	UMTS 1750	RMC	24.8	24.45	-0.01	10 mm	WCC Closed	5	N/A	1:1	back	0.577	1.084	0.625	A18
1880.00	661	GSM 1900	GSM	30.7	30.48	-0.06	10 mm	Standard	4	1	1:8.3	back	0.293	1.052	0.308	
1880.00	661	GSM 1900	GSM	30.7	30.48	-0.05	10 mm	WCC Closed	4	1	1:8.3	back	0.280	1.052	0.295	
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.04	10 mm	Standard	4	2	1:4.15	back	0.470	1.074	0.505	A19
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.04	10 mm	WCC Closed	4	2	1:4.15	back	0.418	1.074	0.449	
1880.00	9400	UMTS 1900	RMC	23.7	23.64	-0.05	10 mm	Standard	5	N/A	1:1	back	0.637	1.014	0.646	A21
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.02	10 mm	WCC Closed	5	N/A	1:1	back	0.594	1.014	0.602	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 43 of 62

**Table 11-14  
LTE Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)	Factor	(W/kg)		
710.00	23790	Mid	LTE Band 17	10	Standard	24.2	24.18	-0.09	0	6	QPSK	1	49	10 mm	back	1:1	0.231	1.005	0.232	A22
710.00	23790	Mid	LTE Band 17	10	WCC Closed	24.2	24.18	0.13	0	6	QPSK	1	49	10 mm	back	1:1	0.187	1.005	0.188	
710.00	23790	Mid	LTE Band 17	10	Standard	23.2	23.19	-0.17	1	6	QPSK	25	12	10 mm	back	1:1	0.193	1.002	0.193	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	-0.04	0	6	QPSK	1	25	10 mm	back	1:1	0.523	1.016	0.531	A23
836.50	20525	Mid	LTE Band 5 (Cell)	10	WCC Closed	23.7	23.63	0.02	0	6	QPSK	1	25	10 mm	back	1:1	0.328	1.016	0.333	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	0.01	1	6	QPSK	25	0	10 mm	back	1:1	0.392	1.062	0.416	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	0.14	0	6	QPSK	1	99	10 mm	back	1:1	0.554	1.002	0.555	A25
1732.50	20175	Mid	LTE Band 4 (AWS)	20	WCC Closed	24.5	24.49	0.10	0	6	QPSK	1	99	10 mm	back	1:1	0.412	1.002	0.413	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	0.01	1	6	QPSK	50	25	10 mm	back	1:1	0.455	1.026	0.467	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	-0.06	0	6	QPSK	1	99	10 mm	back	1:1	0.554	1.052	0.583	A26
1900.00	19100	High	LTE Band 2 (PCS)	20	WCC Closed	23.9	23.68	0.00	0	6	QPSK	1	99	10 mm	back	1:1	0.530	1.052	0.558	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	0.04	1	6	QPSK	50	0	10 mm	back	1:1	0.477	1.089	0.519	
2510.00	20850	Low	LTE Band 7	20	Standard	23.7	23.67	-0.05	0	6	QPSK	1	0	10 mm	back	1:1	0.878	1.007	0.884	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.69	-0.01	0	6	QPSK	1	99	10 mm	back	1:1	1.100	1.002	1.102	A28
2535.00	21100	Mid	LTE Band 7	20	WCC Closed	23.7	23.69	0.05	0	6	QPSK	1	99	10 mm	back	1:1	0.803	1.002	0.805	
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	-0.08	0	6	QPSK	1	99	10 mm	back	1:1	0.870	1.000	0.870	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.02	1	6	QPSK	50	25	10 mm	back	1:1	0.694	1.023	0.710	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.53	0.00	1	6	QPSK	100	0	10 mm	back	1:1	0.678	1.040	0.705	
2510.00	20850	Low	LTE Band 7	20	Standard	23.7	23.67	-0.08	0	6	QPSK	1	0	10 mm	back	1:1	0.824	1.007	0.830	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.69	0.02	0	6	QPSK	1	99	10 mm	back	1:1	1.090	1.002	1.092	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Body								
Spatial Peak												1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population												averaged over 1 gram								

Note: Blue entries represent variability measurements.

**Table 11-15  
DTS Body-Worn SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Back Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)	Factor	(W/kg)	
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.00	10 mm	Standard	16	1	back	1:1	0.096	1.062	0.102	A29
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.01	10 mm	WCC Closed	16	1	back	1:1	0.077	1.062	0.082	
5745	149	IEEE 802.11a	OFDM	13.0	12.57	-0.15	10 mm	Standard	16	6	back	1:1	0.351	1.104	0.388	
5805	161	IEEE 802.11a	OFDM	13.0	12.57	0.05	10 mm	Standard	16	6	back	1:1	0.367	1.104	0.405	
5825	165	IEEE 802.11a	OFDM	13.0	12.60	-0.15	10 mm	Standard	16	6	back	1:1	0.374	1.096	0.410	
5825	165	IEEE 802.11a	OFDM	13.0	12.60	-0.14	10 mm	WCC Closed	16	6	back	1:1	0.396	1.096	0.434	A30
5775	155	IEEE 802.11ac	OFDM	12.0	11.85	0.13	10 mm	Standard	16	29.3	back	1:1	0.231	1.035	0.239	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Body				
Spatial Peak												1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population												averaged over 1 gram				

**Table 11-16  
NII Body-Worn SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Back Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)	Factor	(W/kg)	
5200	40	IEEE 802.11a	OFDM	13.0	12.99	0.13	10 mm	Standard	16	6	back	1:1	0.218	1.002	0.218	
5210	42	IEEE 802.11ac	OFDM	12.0	11.96	-0.06	10 mm	Standard	16	29.3	back	1:1	0.145	1.009	0.146	
5260	52	IEEE 802.11a	OFDM	13.0	12.95	-0.21	10 mm	Standard	16	6	back	1:1	0.200	1.012	0.202	
5290	58	IEEE 802.11ac	OFDM	12.0	11.84	0.20	10 mm	Standard	16	29.3	back	1:1	0.145	1.038	0.151	
5540	108	IEEE 802.11a	OFDM	13.0	12.69	-0.15	10 mm	Standard	16	6	back	1:1	0.318	1.074	0.342	A31
5530	106	IEEE 802.11ac	OFDM	12.0	11.72	0.12	10 mm	Standard	16	29.3	back	1:1	0.236	1.067	0.252	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Body				
Spatial Peak												1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population												averaged over 1 gram				

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 44 of 62	

# 11.3 Standalone Wireless Router SAR Data

**Table 11-17  
GPRS/UMTS Hotspot SAR Data**

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Back Cover Type	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.												(W/kg)		(W/kg)		
836.60	190	GSM 850	GPRS	29.2	28.85	0.01	10 mm	Standard	4	3	1:2.76	back	0.595	1.084	0.645		
836.60	190	GSM 850	GPRS	29.2	28.85	-0.04	10 mm	Standard	4	3	1:2.76	front	0.443	1.084	0.480		
836.60	190	GSM 850	GPRS	29.2	28.85	-0.12	10 mm	Standard	4	3	1:2.76	bottom	0.303	1.084	0.328		
836.60	190	GSM 850	GPRS	29.2	28.85	0.00	10 mm	Standard	4	3	1:2.76	right	0.656	1.084	0.711	A15	
836.60	190	GSM 850	GPRS	29.2	28.85	-0.18	10 mm	WCC Closed	4	3	1:2.76	right	0.601	1.084	0.651		
836.60	190	GSM 850	GPRS	29.2	28.85	-0.14	10 mm	Standard	4	3	1:2.76	left	0.405	1.084	0.439		
836.60	4183	UMTS 850	RMC	24.2	24.17	0.10	10 mm	Standard	5	N/A	1:1	back	0.653	1.007	0.658		
836.60	4183	UMTS 850	RMC	24.2	24.17	-0.02	10 mm	Standard	5	N/A	1:1	front	0.505	1.007	0.509		
836.60	4183	UMTS 850	RMC	24.2	24.17	-0.04	10 mm	Standard	5	N/A	1:1	bottom	0.332	1.007	0.334		
836.60	4183	UMTS 850	RMC	24.2	24.17	-0.03	10 mm	Standard	5	N/A	1:1	right	0.669	1.007	0.674	A17	
836.60	4183	UMTS 850	RMC	24.2	24.17	-0.05	10 mm	WCC Closed	5	N/A	1:1	right	0.546	1.007	0.550		
836.60	4183	UMTS 850	RMC	24.2	24.17	-0.06	10 mm	Standard	5	N/A	1:1	left	0.484	1.007	0.487		
1732.40	1412	UMTS 1750	RMC	24.8	24.45	0.12	10 mm	Standard	5	N/A	1:1	back	0.570	1.084	0.618		
1732.40	1412	UMTS 1750	RMC	24.8	24.45	-0.01	10 mm	WCC Closed	5	N/A	1:1	back	0.577	1.084	0.625	A18	
1732.40	1412	UMTS 1750	RMC	24.8	24.45	0.00	10 mm	Standard	5	N/A	1:1	front	0.425	1.084	0.461		
1732.40	1412	UMTS 1750	RMC	24.8	24.45	0.05	10 mm	Standard	5	N/A	1:1	bottom	0.547	1.084	0.593		
1732.40	1412	UMTS 1750	RMC	24.8	24.45	0.10	10 mm	Standard	5	N/A	1:1	right	0.068	1.084	0.074		
1732.40	1412	UMTS 1750	RMC	24.8	24.45	0.07	10 mm	Standard	5	N/A	1:1	left	0.549	1.084	0.595		
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.04	10 mm	Standard	4	2	1:4.15	back	0.470	1.074	0.505		
1880.00	661	GSM 1900	GPRS	29.7	29.39	0.05	10 mm	Standard	4	2	1:4.15	front	0.305	1.074	0.328		
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.15	10 mm	Standard	4	2	1:4.15	bottom	0.510	1.074	0.548	A20	
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.15	10 mm	WCC Closed	4	2	1:4.15	bottom	0.455	1.074	0.489		
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.04	10 mm	Standard	4	2	1:4.15	right	0.113	1.074	0.121		
1880.00	661	GSM 1900	GPRS	29.7	29.39	-0.04	10 mm	Standard	4	2	1:4.15	left	0.041	1.074	0.044		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	-0.05	10 mm	Standard	5	N/A	1:1	back	0.637	1.014	0.646	A21	
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.02	10 mm	WCC Closed	5	N/A	1:1	back	0.594	1.014	0.602		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	-0.07	10 mm	Standard	5	N/A	1:1	front	0.400	1.014	0.406		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.05	10 mm	Standard	5	N/A	1:1	bottom	0.600	1.014	0.608		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.04	10 mm	Standard	5	N/A	1:1	right	0.144	1.014	0.146		
1880.00	9400	UMTS 1900	RMC	23.7	23.64	0.11	10 mm	Standard	5	N/A	1:1	left	0.058	1.014	0.059		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-18  
LTE Band 17 Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
710.00	23790	Mid	LTE Band 17	10	Standard	24.2	24.18	-0.09	0	6	QPSK	1	49	10 mm	back	1:1	0.231	1.005	0.232	A22
710.00	23790	Mid	LTE Band 17	10	WCC Closed	24.2	24.18	0.13	0	6	QPSK	1	49	10 mm	back	1:1	0.187	1.005	0.188	
710.00	23790	Mid	LTE Band 17	10	Standard	23.2	23.19	-0.17	1	6	QPSK	25	12	10 mm	back	1:1	0.193	1.002	0.193	
710.00	23790	Mid	LTE Band 17	10	Standard	24.2	24.18	0.13	0	6	QPSK	1	49	10 mm	front	1:1	0.183	1.005	0.184	
710.00	23790	Mid	LTE Band 17	10	Standard	23.2	23.19	0.06	1	6	QPSK	25	12	10 mm	front	1:1	0.161	1.002	0.161	
710.00	23790	Mid	LTE Band 17	10	Standard	24.2	24.18	0.03	0	6	QPSK	1	49	10 mm	bottom	1:1	0.207	1.005	0.208	
710.00	23790	Mid	LTE Band 17	10	Standard	23.2	23.19	0.13	1	6	QPSK	25	12	10 mm	bottom	1:1	0.138	1.002	0.138	
710.00	23790	Mid	LTE Band 17	10	Standard	24.2	24.18	0.13	0	6	QPSK	1	49	10 mm	right	1:1	0.107	1.005	0.108	
710.00	23790	Mid	LTE Band 17	10	Standard	23.2	23.19	0.20	1	6	QPSK	25	12	10 mm	right	1:1	0.063	1.002	0.063	
710.00	23790	Mid	LTE Band 17	10	Standard	24.2	24.18	0.13	0	6	QPSK	1	49	10 mm	left	1:1	0.123	1.005	0.124	
710.00	23790	Mid	LTE Band 17	10	Standard	23.2	23.19	0.15	1	6	QPSK	25	12	10 mm	left	1:1	0.096	1.002	0.096	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram													

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 45 of 62	

**Table 11-19  
LTE Band 5 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.	(W/kg)															(W/kg)			
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	-0.04	0	6	QPSK	1	25	10 mm	back	1:1	0.523	1.016	0.531	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	0.01	1	6	QPSK	25	0	10 mm	back	1:1	0.392	1.062	0.416	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	0.01	0	6	QPSK	1	25	10 mm	front	1:1	0.420	1.016	0.427	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	0.02	1	6	QPSK	25	0	10 mm	front	1:1	0.313	1.062	0.332	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	-0.07	0	6	QPSK	1	25	10 mm	bottom	1:1	0.277	1.016	0.281	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	-0.08	1	6	QPSK	25	0	10 mm	bottom	1:1	0.198	1.062	0.210	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	0.10	0	6	QPSK	1	25	10 mm	right	1:1	0.557	1.016	0.566	A24
836.50	20525	Mid	LTE Band 5 (Cell)	10	WCC Closed	23.7	23.63	0.00	0	6	QPSK	1	25	10 mm	right	1:1	0.408	1.016	0.415	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	-0.04	1	6	QPSK	25	0	10 mm	right	1:1	0.393	1.062	0.417	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.7	23.63	0.06	0	6	QPSK	1	25	10 mm	left	1:1	0.417	1.016	0.424	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	22.7	22.44	0.05	1	6	QPSK	25	0	10 mm	left	1:1	0.295	1.062	0.313	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body										
Spatial Peak										1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population										averaged over 1 gram										

**Table 11-20  
LTE Band 4 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.	(W/kg)															(W/kg)			
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	0.14	0	6	QPSK	1	99	10 mm	back	1:1	0.554	1.002	0.555	A25
1732.50	20175	Mid	LTE Band 4 (AWS)	20	WCC Closed	24.5	24.49	0.10	0	6	QPSK	1	99	10 mm	back	1:1	0.412	1.002	0.413	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	0.01	1	6	QPSK	50	25	10 mm	back	1:1	0.455	1.026	0.467	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	-0.17	0	6	QPSK	1	99	10 mm	front	1:1	0.396	1.002	0.397	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	-0.07	1	6	QPSK	50	25	10 mm	front	1:1	0.312	1.026	0.320	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	-0.01	0	6	QPSK	1	99	10 mm	bottom	1:1	0.433	1.002	0.434	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	0.02	1	6	QPSK	50	25	10 mm	bottom	1:1	0.362	1.026	0.371	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	-0.08	0	6	QPSK	1	99	10 mm	right	1:1	0.063	1.002	0.063	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	0.03	1	6	QPSK	50	25	10 mm	right	1:1	0.053	1.026	0.054	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.5	24.49	0.04	0	6	QPSK	1	99	10 mm	left	1:1	0.463	1.002	0.464	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.5	23.39	0.02	1	6	QPSK	50	25	10 mm	left	1:1	0.355	1.026	0.364	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body										
Spatial Peak										1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population										averaged over 1 gram										

**Table 11-21  
LTE Band 2 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.	(W/kg)															(W/kg)			
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	-0.06	0	6	QPSK	1	99	10 mm	back	1:1	0.554	1.052	0.583	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	0.04	1	6	QPSK	50	0	10 mm	back	1:1	0.477	1.089	0.519	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	0.01	0	6	QPSK	1	99	10 mm	front	1:1	0.408	1.052	0.429	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	0.02	1	6	QPSK	50	0	10 mm	front	1:1	0.340	1.089	0.370	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	0.00	0	6	QPSK	1	99	10 mm	bottom	1:1	0.621	1.052	0.653	
1900.00	19100	High	LTE Band 2 (PCS)	20	WCC Closed	23.9	23.68	0.11	0	6	QPSK	1	99	10 mm	bottom	1:1	0.628	1.052	0.661	A27
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	-0.01	1	6	QPSK	50	0	10 mm	bottom	1:1	0.559	1.089	0.609	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	-0.03	0	6	QPSK	1	99	10 mm	right	1:1	0.157	1.052	0.165	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	-0.04	1	6	QPSK	50	0	10 mm	right	1:1	0.137	1.089	0.149	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.9	23.68	-0.05	0	6	QPSK	1	99	10 mm	left	1:1	0.095	1.052	0.100	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	22.9	22.53	0.05	1	6	QPSK	50	0	10 mm	left	1:1	0.086	1.089	0.094	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body										
Spatial Peak										1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population										averaged over 1 gram										

**Table 11-22  
LTE Band 7 Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Back Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
2510.00	20850	Low	LTE Band 7	20	Standard	23.7	23.67	-0.05	0	6	QPSK	1	0	10 mm	back	1:1	0.878	1.007	0.884	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.69	-0.01	0	6	QPSK	1	99	10 mm	back	1:1	1.100	1.002	1.102	A28
2535.00	21100	Mid	LTE Band 7	20	WCC Closed	23.7	23.69	0.05	0	6	QPSK	1	99	10 mm	back	1:1	0.803	1.002	0.805	
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	-0.08	0	6	QPSK	1	99	10 mm	back	1:1	0.870	1.000	0.870	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.02	1	6	QPSK	50	25	10 mm	back	1:01	0.694	1.023	0.710	
2510.00	20850	Low	LTE Band 7	20	Standard	22.7	22.53	0.00	1	6	QPSK	100	0	10 mm	back	1:1	0.678	1.040	0.705	
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	0.02	0	6	QPSK	1	99	10 mm	front	1:1	0.129	1.000	0.129	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.07	1	6	QPSK	50	25	10 mm	front	1:1	0.106	1.023	0.108	
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	0.03	0	6	QPSK	1	99	10 mm	bottom	1:1	0.225	1.000	0.225	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.00	1	6	QPSK	50	25	10 mm	bottom	1:1	0.142	1.023	0.145	
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	0.13	0	6	QPSK	1	99	10 mm	right	1:1	0.007	1.000	0.007	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.15	1	6	QPSK	50	25	10 mm	right	1:1	0.006	1.023	0.006	
2560.00	21350	High	LTE Band 7	20	Standard	23.7	23.70	-0.07	0	6	QPSK	1	99	10 mm	left	1:1	0.387	1.000	0.387	
2560.00	21350	High	LTE Band 7	20	Standard	22.7	22.60	0.16	1	6	QPSK	50	25	10 mm	left	1:1	0.329	1.023	0.337	
2510.00	20850	Low	LTE Band 7	20	Standard	23.7	23.67	-0.08	0	6	QPSK	1	0	10 mm	back	1:1	0.824	1.007	0.830	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.69	0.02	0	6	QPSK	1	99	10 mm	back	1:1	1.090	1.002	1.092	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entries represent variability measurements.

**Table 11-23  
WLAN Hotspot SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Back Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.												(W/kg)		(W/kg)		
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.00	10 mm	Standard	16	1	back	1:1	0.096	1.062	0.102	A29	
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.01	10 mm	WCC Closed	16	1	back	1:1	0.077	1.062	0.082		
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.09	10 mm	Standard	16	1	front	1:1	0.041	1.062	0.044		
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.02	10 mm	Standard	16	1	top	1:1	0.041	1.062	0.044		
2462	11	IEEE 802.11b	DSSS	16.5	16.24	0.01	10 mm	Standard	16	1	right	1:1	0.018	1.062	0.019		
5745	149	IEEE 802.11a	OFDM	13.0	12.57	-0.15	10 mm	Standard	16	6	back	1:1	0.351	1.104	0.388		
5805	161	IEEE 802.11a	OFDM	13.0	12.57	0.05	10 mm	Standard	16	6	back	1:1	0.367	1.104	0.405		
5825	165	IEEE 802.11a	OFDM	13.0	12.60	-0.15	10 mm	Standard	16	6	back	1:1	0.374	1.096	0.410		
5825	165	IEEE 802.11a	OFDM	13.0	12.60	-0.04	10 mm	WCC Closed	16	6	back	1:1	0.396	1.096	0.434	A30	
5775	155	IEEE 802.11ac	OFDM	12.0	11.85	0.13	10 mm	Standard	16	29.3	back	1:1	0.231	1.035	0.239		
5825	165	IEEE 802.11a	OFDM	13.0	12.60	-0.15	10 mm	Standard	16	6	front	1:1	0.090	1.096	0.099		
5825	165	IEEE 802.11a	OFDM	13.0	12.60	0.12	10 mm	Standard	16	6	top	1:1	0.360	1.096	0.395		
5825	165	IEEE 802.11a	OFDM	13.0	12.60	0.16	10 mm	Standard	16	6	right	1:1	0.040	1.096	0.044		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 47 of 62	

## 11.4 SAR Test Notes

### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01, SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was  $\leq 1.2$  W/kg, no additional SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. This DUT may be used with a wireless charging cover (WCC) accessory. The cover fits the back of the handset and features an extension to wrap around and protect the front side of the device. Per FCC KDB Publication 648474 D04, SAR was measured using the standard battery cover and then repeated with the wireless charging battery cover for the highest reported SAR for each wireless technology, frequency band, operating mode, and exposure condition. Additional head tests were performed with the cover extension both opened and closed. Additional body-worn and hotspot tests were performed with the wireless charging cover extension closed because operations near the body with the cover extension opened are not expected. No additional evaluations with wireless charging cover were required since all reported SAR values were less than 1.2 W/kg.

### GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR. GPRS body-worn SAR was additionally evaluated for VoIP considerations.
2. Justification for reduced test configurations per KDB Publication 941225 D03v01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.
4. GPRS Head SAR was additionally evaluated for VoIP considerations.

FCC ID: ZNFD850		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 48 of 62

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r01. The general test procedures used for testing can be found in Section 8.4.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC Guidance, LTE CA SAR was not needed for testing since the data sent by uplink on uplink physical channels does not change between Rel 8 and Rel 10.

WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz bandwidths) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
3. Per April 2013 TCB Workshop notes, full SAR tests for all IEEE 802.11ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.
4. When Hotspot is enabled, all 5 GHz bands are disabled except the 5.8 GHz band. Therefore only 5.8 GHz WIFI Wireless Router SAR Data was required.
5. WIFI transmission was verified using an uncalibrated spectrum analyzer.
6. Since the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is  $< 1.6$  W/kg and the reported 1g averaged SAR is  $< 0.8$  W/kg, SAR testing on other default channels was not required.

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 49 of 62

# 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

## 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to handsets with built-in unlicensed transmitters such as 802.11a/b/g/n/ac and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

## 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is  $\leq 1.6$  W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

**Table 12-1  
Estimated SAR**

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2441	8.00	10	<b>0.125</b>

Note: Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID: ZNFD850	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> 0Y1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset		Page 50 of 62

## 12.3 Head SAR Simultaneous Transmission Analysis

**Table 12-2**  
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Simult Tx	Configuration	GSM 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.292	0.121	0.413	Head SAR	Right Cheek	0.362	0.121	0.483
	Right Tilt	0.214	0.119	0.333		Right Tilt	0.245	0.119	0.364
	Left Cheek	0.209	0.242	<b>0.451</b>		Left Cheek	0.276	0.242	<b>0.518</b>
	Left Tilt	0.173	0.177	0.350		Left Tilt	0.223	0.177	0.400
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.432	0.121	0.553	Head SAR	Right Cheek	0.158	0.121	0.279
	Right Tilt	0.263	0.119	0.382		Right Tilt	0.170	0.119	0.289
	Left Cheek	0.328	0.242	<b>0.570</b>		Left Cheek	0.258	0.242	<b>0.500</b>
	Left Tilt	0.242	0.177	0.419		Left Tilt	0.162	0.177	0.339
Simult Tx	Configuration	GSM 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.090	0.121	0.211	Head SAR	Right Cheek	0.150	0.121	0.271
	Right Tilt	0.031	0.119	0.150		Right Tilt	0.049	0.119	0.168
	Left Cheek	0.061	0.242	<b>0.303</b>		Left Cheek	0.112	0.242	<b>0.354</b>
	Left Tilt	0.053	0.177	0.230		Left Tilt	0.085	0.177	0.262
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.172	0.121	0.293	Head SAR	Right Cheek	0.131	0.121	0.252
	Right Tilt	0.061	0.119	0.180		Right Tilt	0.095	0.119	0.214
	Left Cheek	0.144	0.242	<b>0.386</b>		Left Cheek	0.171	0.242	<b>0.413</b>
	Left Tilt	0.094	0.177	0.271		Left Tilt	0.111	0.177	0.288
Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.364	0.121	0.485	Head SAR	Right Cheek	0.071	0.121	0.192
	Right Tilt	0.203	0.119	0.322		Right Tilt	0.095	0.119	0.214
	Left Cheek	0.282	0.242	<b>0.524</b>		Left Cheek	0.123	0.242	<b>0.365</b>
	Left Tilt	0.178	0.177	0.355		Left Tilt	0.058	0.177	0.235
Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 7 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.162	0.121	0.283	Head SAR	Right Cheek	0.026	0.121	0.147
	Right Tilt	0.054	0.119	0.173		Right Tilt	0.121	0.119	0.240
	Left Cheek	0.148	0.242	<b>0.390</b>		Left Cheek	0.047	0.242	<b>0.289</b>
	Left Tilt	0.108	0.177	0.285		Left Tilt	0.045	0.177	0.222

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 51 of 62

**Table 12-3  
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**

Simult Tx	Configuration	GSM 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.292	0.415	0.707	Head SAR	Right Cheek	0.362	0.415	<b>0.777</b>
	Right Tilt	0.214	0.502	<b>0.716</b>		Right Tilt	0.245	0.502	0.747
	Left Cheek	0.209	0.481	0.690		Left Cheek	0.276	0.481	0.757
	Left Tilt	0.173	0.484	0.657		Left Tilt	0.223	0.484	0.707
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.432	0.415	<b>0.847</b>	Head SAR	Right Cheek	0.158	0.415	0.573
	Right Tilt	0.263	0.502	0.765		Right Tilt	0.170	0.502	0.672
	Left Cheek	0.328	0.481	0.809		Left Cheek	0.258	0.481	<b>0.739</b>
	Left Tilt	0.242	0.484	0.726		Left Tilt	0.162	0.484	0.646
Simult Tx	Configuration	GSM 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.090	0.415	0.505	Head SAR	Right Cheek	0.150	0.415	0.565
	Right Tilt	0.031	0.502	0.533		Right Tilt	0.049	0.502	0.551
	Left Cheek	0.061	0.481	<b>0.542</b>		Left Cheek	0.112	0.481	<b>0.593</b>
	Left Tilt	0.053	0.484	0.537		Left Tilt	0.085	0.484	0.569
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.172	0.415	0.587	Head SAR	Right Cheek	0.131	0.415	0.546
	Right Tilt	0.061	0.502	0.563		Right Tilt	0.095	0.502	0.597
	Left Cheek	0.144	0.481	<b>0.625</b>		Left Cheek	0.171	0.481	<b>0.652</b>
	Left Tilt	0.094	0.484	0.578		Left Tilt	0.111	0.484	0.595
Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.364	0.415	<b>0.779</b>	Head SAR	Right Cheek	0.071	0.415	0.486
	Right Tilt	0.203	0.502	0.705		Right Tilt	0.095	0.502	0.597
	Left Cheek	0.282	0.481	0.763		Left Cheek	0.123	0.481	<b>0.604</b>
	Left Tilt	0.178	0.484	0.662		Left Tilt	0.058	0.484	0.542
Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 7 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.162	0.415	0.577	Head SAR	Right Cheek	0.026	0.415	0.441
	Right Tilt	0.054	0.502	0.556		Right Tilt	0.121	0.502	<b>0.623</b>
	Left Cheek	0.148	0.481	<b>0.629</b>		Left Cheek	0.047	0.481	0.528
	Left Tilt	0.108	0.484	0.592		Left Tilt	0.045	0.484	0.529

The worst case 5 GHz WIFI reported SAR for each head configuration was considered for simultaneous SAR exclusion via summation of standalone SAR, regardless of whether the WIFI channel has WIFI Hotspot capability, for simplicity to determine compliance. Please note that the actual simultaneous transmission SAR will not exceed the summed levels indicated.

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 52 of 62	

## 12.4 Body-Worn Simultaneous Transmission Analysis

**Table 12-4**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)**

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.594	0.102	0.696
Back Side	GPRS 850	0.645	0.102	0.747
Back Side	UMTS 850	0.658	0.102	0.760
Back Side	UMTS 1750	0.625	0.102	0.727
Back Side	GSM 1900	0.308	0.102	0.410
Back Side	GPRS 1900	0.505	0.102	0.607
Back Side	UMTS 1900	0.646	0.102	0.748
Back Side	LTE Band 17	0.232	0.102	0.334
Back Side	LTE Band 5 (Cell)	0.531	0.102	0.633
Back Side	LTE Band 4 (AWS)	0.555	0.102	0.657
Back Side	LTE Band 2 (PCS)	0.583	0.102	0.685
Back Side	LTE Band 7	1.102	0.102	1.204

**Table 12-5**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)**

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.594	0.434	1.028
Back Side	GPRS 850	0.645	0.434	1.079
Back Side	UMTS 850	0.658	0.434	1.092
Back Side	UMTS 1750	0.625	0.434	1.059
Back Side	GSM 1900	0.308	0.434	0.742
Back Side	GPRS 1900	0.505	0.434	0.939
Back Side	UMTS 1900	0.646	0.434	1.080
Back Side	LTE Band 17	0.232	0.434	0.666
Back Side	LTE Band 5 (Cell)	0.531	0.434	0.965
Back Side	LTE Band 4 (AWS)	0.555	0.434	0.989
Back Side	LTE Band 2 (PCS)	0.583	0.434	1.017
Back Side	LTE Band 7	1.102	0.434	1.536

The worst case 5 GHz WIFI reported SAR for each body-worn configuration was considered for simultaneous SAR exclusion via summation of standalone SAR, regardless of whether the WIFI channel has WIFI Hotspot capability, for simplicity to determine compliance. Please note that the actual simultaneous transmission SAR will not exceed the summed levels indicated.

**Table 12-6**  
**Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)**

Configuration	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.594	0.125	0.719
Back Side	GPRS 850	0.645	0.125	0.770
Back Side	UMTS 850	0.658	0.125	0.783
Back Side	UMTS 1750	0.625	0.125	0.750
Back Side	GSM 1900	0.308	0.125	0.433
Back Side	GPRS 1900	0.505	0.125	0.630
Back Side	UMTS 1900	0.646	0.125	0.771
Back Side	LTE Band 17	0.232	0.125	0.357
Back Side	LTE Band 5 (Cell)	0.531	0.125	0.656
Back Side	LTE Band 4 (AWS)	0.555	0.125	0.680
Back Side	LTE Band 2 (PCS)	0.583	0.125	0.708
Back Side	LTE Band 7	1.102	0.125	1.227

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 53 of 62

## 12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

**Table 12-7**  
**Simultaneous Transmission Scenario (2.4 GHz Hotspot at 1.0 cm)**

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.645	0.102	<b>0.747</b>	Body SAR	Back	0.658	0.102	<b>0.760</b>
	Front	0.480	0.044	0.524		Front	0.509	0.044	0.553
	Top	-	0.044	0.044		Top	-	0.044	0.044
	Bottom	0.328	-	0.328		Bottom	0.334	-	0.334
	Right	0.711	0.019	0.730		Right	0.674	0.019	0.693
	Left	0.439	-	0.439		Left	0.487	-	0.487
Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.625	0.102	<b>0.727</b>	Body SAR	Back	0.505	0.102	<b>0.607</b>
	Front	0.461	0.044	0.505		Front	0.328	0.044	0.372
	Top	-	0.044	0.044		Top	-	0.044	0.044
	Bottom	0.593	-	0.593		Bottom	0.548	-	0.548
	Right	0.074	0.019	0.093		Right	0.121	0.019	0.140
	Left	0.595	-	0.595		Left	0.044	-	0.044
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.646	0.102	<b>0.748</b>	Body SAR	Back	0.232	0.102	<b>0.334</b>
	Front	0.406	0.044	0.450		Front	0.184	0.044	0.228
	Top	-	0.044	0.044		Top	-	0.044	0.044
	Bottom	0.608	-	0.608		Bottom	0.208	-	0.208
	Right	0.146	0.019	0.165		Right	0.108	0.019	0.127
	Left	0.059	-	0.059		Left	0.124	-	0.124
Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.531	0.102	<b>0.633</b>	Body SAR	Back	0.555	0.102	<b>0.657</b>
	Front	0.427	0.044	0.471		Front	0.397	0.044	0.441
	Top	-	0.044	0.044		Top	-	0.044	0.044
	Bottom	0.281	-	0.281		Bottom	0.434	-	0.434
	Right	0.566	0.019	0.585		Right	0.063	0.019	0.082
	Left	0.424	-	0.424		Left	0.464	-	0.464
Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 7 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.583	0.102	<b>0.685</b>	Body SAR	Back	1.102	0.102	<b>1.204</b>
	Front	0.429	0.044	0.473		Front	0.129	0.044	0.173
	Top	-	0.044	0.044		Top	-	0.044	0.044
	Bottom	0.661	-	0.661		Bottom	0.225	-	0.225
	Right	0.165	0.019	0.184		Right	0.007	0.019	0.026
	Left	0.100	-	0.100		Left	0.387	-	0.387

FCC ID: ZNFD850			<b>SAR EVALUATION REPORT</b> 		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset			Page 54 of 62

**Table 12-8**  
**Simultaneous Transmission Scenario (5 GHz Hotspot at 1.0 cm)**

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.645	0.434	<b>1.079</b>	Body SAR	Back	0.658	0.434	<b>1.092</b>
	Front	0.480	0.099	0.579		Front	0.509	0.099	0.608
	Top	-	0.395	0.395		Top	-	0.395	0.395
	Bottom	0.328	-	0.328		Bottom	0.334	-	0.334
	Right	0.711	0.044	0.755		Right	0.674	0.044	0.718
	Left	0.439	-	0.439		Left	0.487	-	0.487
Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.625	0.434	<b>1.059</b>	Body SAR	Back	0.505	0.434	<b>0.939</b>
	Front	0.461	0.099	0.560		Front	0.328	0.099	0.427
	Top	-	0.395	0.395		Top	-	0.395	0.395
	Bottom	0.593	-	0.593		Bottom	0.548	-	0.548
	Right	0.074	0.044	0.118		Right	0.121	0.044	0.165
	Left	0.595	-	0.595		Left	0.044	-	0.044
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.646	0.434	<b>1.080</b>	Body SAR	Back	0.232	0.434	<b>0.666</b>
	Front	0.406	0.099	0.505		Front	0.184	0.099	0.283
	Top	-	0.395	0.395		Top	-	0.395	0.395
	Bottom	0.608	-	0.608		Bottom	0.208	-	0.208
	Right	0.146	0.044	0.190		Right	0.108	0.044	0.152
	Left	0.059	-	0.059		Left	0.124	-	0.124
Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.531	0.434	<b>0.965</b>	Body SAR	Back	0.555	0.434	<b>0.989</b>
	Front	0.427	0.099	0.526		Front	0.397	0.099	0.496
	Top	-	0.395	0.395		Top	-	0.395	0.395
	Bottom	0.281	-	0.281		Bottom	0.434	-	0.434
	Right	0.566	0.044	0.610		Right	0.063	0.044	0.107
	Left	0.424	-	0.424		Left	0.464	-	0.464
Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 7 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.583	0.434	<b>1.017</b>	Body SAR	Back	1.102	0.434	<b>1.536</b>
	Front	0.429	0.099	0.528		Front	0.129	0.099	0.228
	Top	-	0.395	0.395		Top	-	0.395	0.395
	Bottom	0.661	-	0.661		Bottom	0.225	-	0.225
	Right	0.165	0.044	0.209		Right	0.007	0.044	0.051
	Left	0.100	-	0.100		Left	0.387	-	0.387

## 12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 55 of 62	

## 13 SAR MEASUREMENT VARIABILITY

### 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

**Table 13-1  
Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
2450	2510.00	20850	LTE Band 7	QPSK, 1 RB, 0 RB Offset	back	10 mm	0.878	0.824	1.07	N/A	N/A	N/A	N/A
2600	2535.00	21100	LTE Band 7	QPSK, 1 RB, 99 RB Offset	back	10 mm	1.100	1.090	1.01	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram						

### 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: ZNFD850	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 56 of 62

# 14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	85047A	S-Parameter Test Set	N/A	N/A	N/A	2904A00579
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8753E	(30kHz-6GHz) Network Analyzer	7/23/2013	Annual	7/23/2014	US37390350
Agilent	8753ES	S-Parameter Network Analyzer	10/29/2013	Annual	10/29/2014	US39170122
Agilent	E5515C	Wireless Communications Test Set	3/18/2014	Annual	3/18/2015	GB46110872
Agilent	E5515C	Wireless Communications Test Set	5/9/2013	Biennial	5/9/2015	GB43304447
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433974
Anritsu	MA24106A	USB Power Sensor	12/18/2013	Annual	12/18/2014	1344555
Anritsu	MA24106A	USB Power Sensor	12/18/2013	Annual	12/18/2014	1344556
Anritsu	MA2411B	Pulse Power Sensor	3/25/2014	Annual	3/25/2015	1207470
Anritsu	MA2411B	Pulse Power Sensor	2/3/2014	Annual	2/3/2015	1339018
Anritsu	MA2481A	Power Sensor	10/30/2013	Annual	10/30/2014	5605
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	2400
Anritsu	MA2481D	Universal Sensor	12/17/2012	Annual	12/17/2013	1204419
Anritsu	ML2495A	Power Meter	10/31/2013	Annual	10/31/2014	1039008
Anritsu	MT8820C	Radio Communication Analyzer	12/12/2013	Annual	12/12/2014	6200901190
Anritsu	MT8820C	Radio Communication Analyzer	6/28/2013	Annual	6/28/2014	6201240328
Fisher Scientific	15-077-960	Digital Thermometer	11/6/2012	Biennial	11/6/2014	122640025
Fisher Scientific	15-0781	Long Stem Thermometer	10/30/2012	Biennial	10/30/2014	122626059
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/30/2013	Annual	10/30/2014	1833460
Gigatronics	8651A	Universal Power Meter	10/30/2013	Annual	10/30/2014	8650319
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/3/2013	Annual	5/3/2014	836371/0079
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/18/2013	Annual	10/18/2014	100976
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/4/2013	Biennial	10/4/2015	103962
Rohde & Schwarz	NRV0	Dual Channel Power Meter	10/12/2012	Biennial	10/12/2014	101695
Rohde & Schwarz	NRV5	Single Channel Power Meter	10/31/2013	Annual	10/31/2014	835360/0079
Rohde & Schwarz	NRV-232	Peak Power Sensor	10/12/2012	Biennial	10/12/2014	836019/013
Rohde & Schwarz	SME06	Signal Generator	10/30/2013	Annual	10/30/2014	832026
Rohde & Schwarz	SMIQ09B	Signal Generator	4/17/2013	Annual	4/17/2014	DE27259
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	3/18/2014	Biennial	3/18/2016	N/A
SPEAG	D1765V2	1765 MHz SAR Dipole	5/14/2013	Annual	5/14/2014	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	7/22/2013	Annual	7/22/2014	5d149
SPEAG	D2450V2	2450 MHz SAR Dipole	8/23/2013	Annual	8/23/2014	719
SPEAG	D2600V2	2600 MHz SAR Dipole	5/2/2013	Annual	5/2/2014	1004
SPEAG	D5GH2V2	5 GHz SAR Dipole	9/23/2013	Annual	9/23/2014	1007
SPEAG	D5GH2V2	5 GHz SAR Dipole	1/27/2014	Annual	1/27/2015	1057
SPEAG	D750V3	750 MHz Dipole	1/20/2014	Annual	1/20/2015	1003
SPEAG	D835V2	835 MHz SAR Dipole	4/25/2013	Annual	4/25/2014	4d119
SPEAG	D835V2	835 MHz SAR Dipole	7/17/2013	Annual	7/17/2014	4d133
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/26/2014	Annual	2/26/2015	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	12/12/2013	Annual	12/12/2014	649
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/13/2013	Annual	5/13/2014	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/22/2014	Annual	1/22/2015	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/17/2013	Annual	9/17/2014	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/19/2013	Annual	11/19/2014	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/21/2013	Annual	8/21/2014	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/19/2013	Annual	11/19/2014	1408
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/14/2013	Annual	5/14/2014	1070
SPEAG	DAK-3.5	Dielectric Assessment Kit	11/13/2013	Annual	11/13/2014	1091
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/18/2013	Annual	8/18/2014	1008
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/18/2013	Annual	8/18/2014	1009
SPEAG	ES3DV2	SAR Probe	8/22/2013	Annual	8/22/2014	3022
SPEAG	ES3DV3	SAR Probe	2/25/2014	Annual	2/25/2015	3258
SPEAG	ES3DV3	SAR Probe	5/16/2013	Annual	5/16/2014	3263
SPEAG	ES3DV3	SAR Probe	9/23/2013	Annual	9/23/2014	3288
SPEAG	ES3DV3	SAR Probe	11/20/2013	Annual	11/20/2014	3287
SPEAG	ES3DV3	SAR Probe	11/22/2013	Annual	11/22/2014	3333
SPEAG	EX3DV4	SAR Probe	1/29/2014	Annual	1/29/2015	3589
SPEAG	EX3DV4	SAR Probe	12/18/2013	Annual	12/18/2014	3920
SPEAG	EX3DV4	SAR Probe	10/23/2013	Annual	10/23/2014	3914
VWR	23226-658	Long Stem Thermometer	7/11/2012	Biennial	7/11/2014	122389334
VWR	36934-158	Wall-Mounted Thermometer	8/8/2013	Biennial	8/8/2015	13047866

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 57 of 62	

# 15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
<b>Phantom &amp; Tissue Parameters</b>									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
<b>Combined Standard Uncertainty (k=1)</b>				RSS			12.1	11.7	299
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)				k=2			24.2	23.5	

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: ZNFD850		<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset		Page 58 of 62

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h= c x f/e	i= c x g/e	k	
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>	
<b>Measurement System</b>										
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞	
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞	
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞	
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞	
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞	
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞	
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞	
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞	
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞	
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞	
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞	
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞	
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞	
<b>Test Sample Related</b>										
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287	
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞	
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞	
<b>Phantom &amp; Tissue Parameters</b>										
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞	
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞	
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6	
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞	
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6	
<b>Combined Standard Uncertainty (k=1)</b>							RSS	12.4	12.0	299
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)							k=2	24.7	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		Reviewed by: Quality Manager
Document S/N: OY1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 59 of 62

## 16 CONCLUSION

### 16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: ZNFD850	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> 0Y1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 60 of 62	

## 17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: ZNFD850	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Document S/N:</b> OY1403310642-R1.ZNF	<b>Test Dates:</b> 03/31/14 - 04/07/14	<b>DUT Type:</b> Portable Handset	Page 61 of 62	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: ZNFD850	 <b>SAR EVALUATION REPORT</b> 		<b>Reviewed by:</b> Quality Manager
Document S/N: 0Y1403310642-R1.ZNF	Test Dates: 03/31/14 - 04/07/14	DUT Type: Portable Handset	Page 62 of 62

## APPENDIX A: SAR TEST DATA

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 4**

Communication System: UID 0, GSM GPRS; 3 Tx slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.918 \text{ S/m}$ ;  $\epsilon_r = 40.939$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-31-2014; Ambient Temp: 24.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3258; ConvF(6.27, 6.27, 6.27); Calibrated: 2/25/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 850, Right Head, Cheek, Mid.ch, 3 Tx slots, WCC Open**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.460 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.421 W/kg

**SAR(1 g) = 0.334 W/kg**

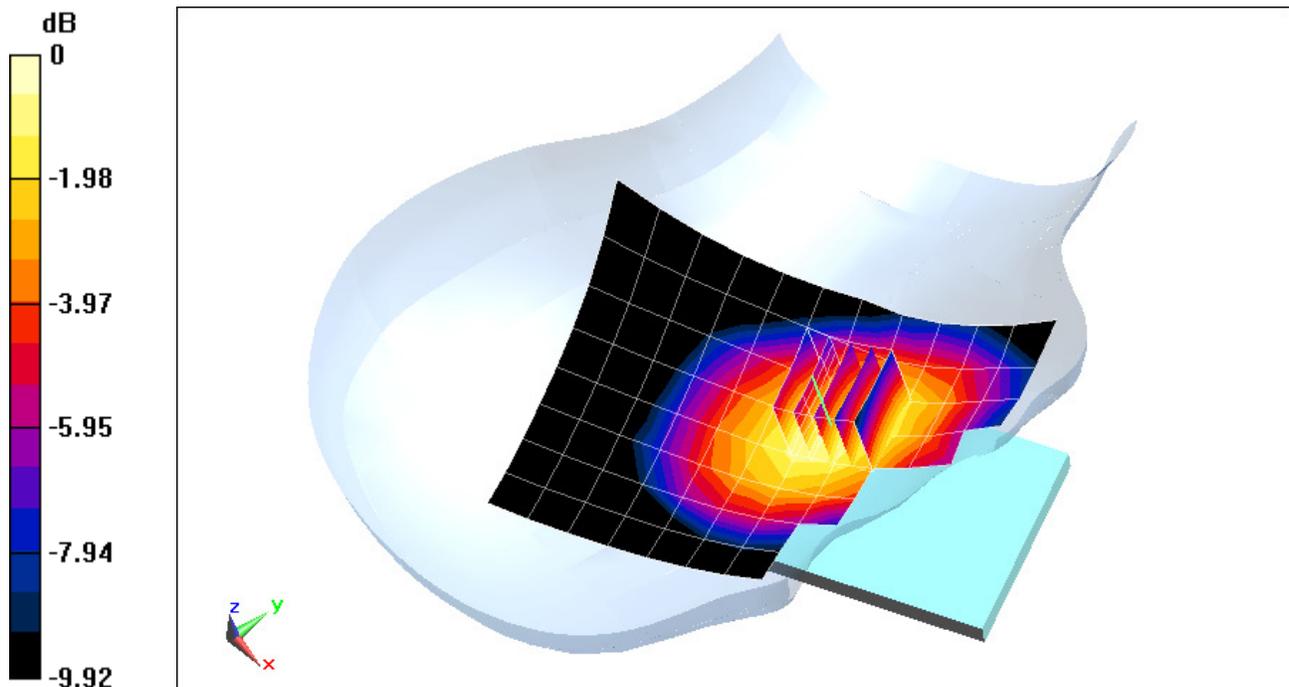

0 dB = 0.351 W/kg = -4.55 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 5**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.918 \text{ S/m}$ ;  $\epsilon_r = 40.939$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-31-2014; Ambient Temp: 24.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3258; ConvF(6.27, 6.27, 6.27); Calibrated: 2/25/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 850, Right Head, Cheek, Mid.ch, Standard Cover**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.650 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.549 W/kg

**SAR(1 g) = 0.429 W/kg**

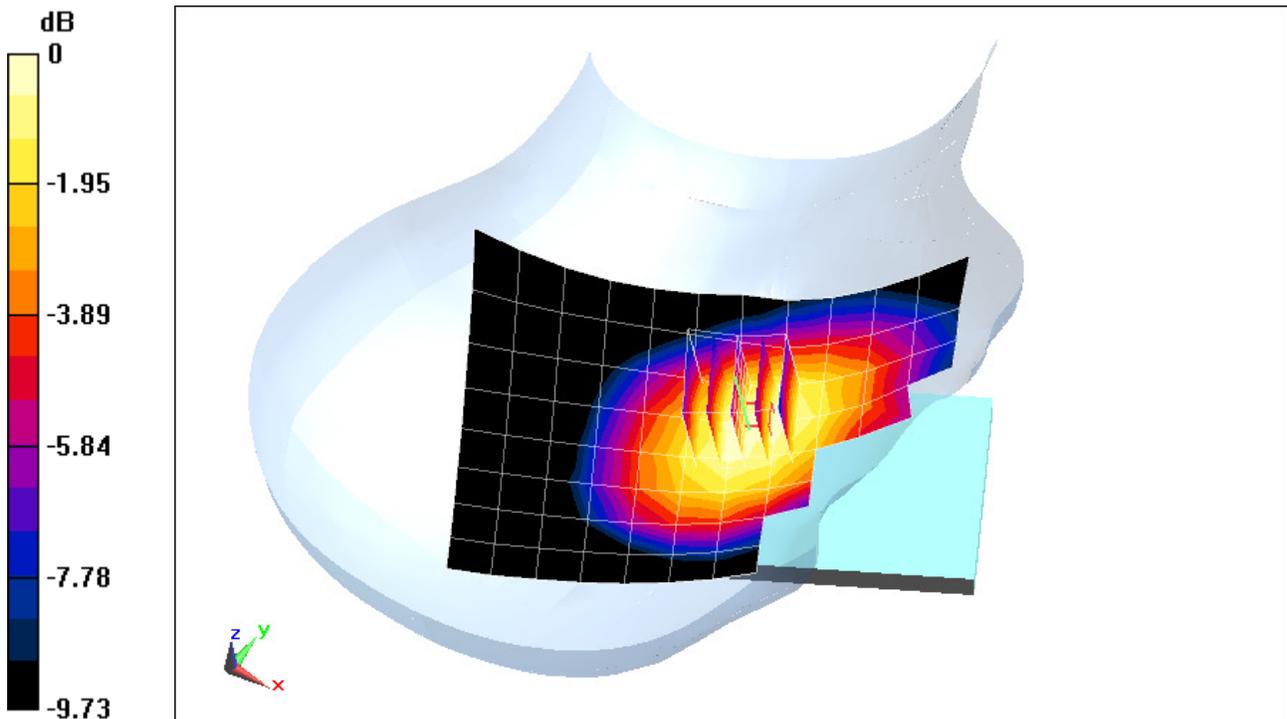

0 dB = 0.448 W/kg = -3.49 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 5**

Communication System: UID 0, UMTS (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.343 \text{ S/m}$ ;  $\epsilon_r = 39.688$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-03-2014; Ambient Temp: 23.9°C; Tissue Temp: 23.8°C

Probe: EX3DV4 - SN3589; ConvF(7.31, 7.31, 7.31); Calibrated: 1/29/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/22/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: AWS UMTS, Left Head, Cheek, Mid.ch, Standard Cover**


**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.177 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.352 W/kg

**SAR(1 g) = 0.238 W/kg**

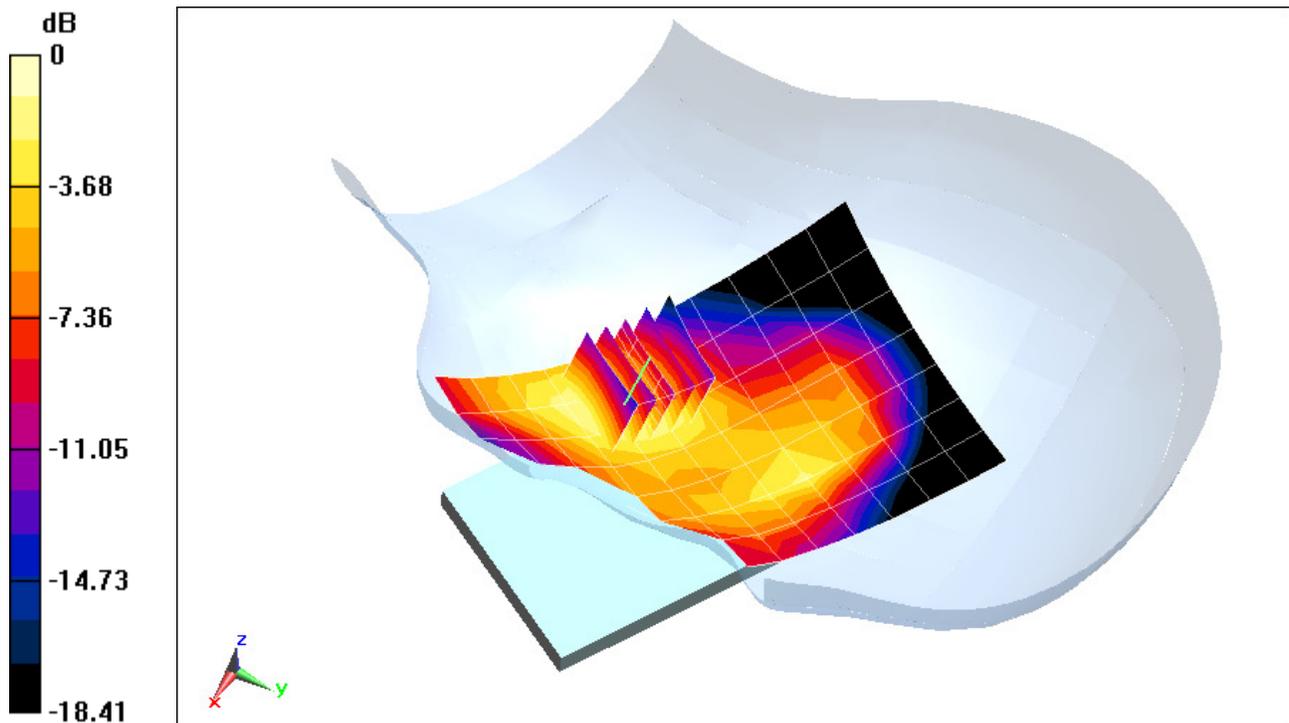

0 dB = 0.262 W/kg = -5.82 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 4**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Head Medium parameters used:

$$f = 1880 \text{ MHz}; \sigma = 1.402 \text{ S/m}; \epsilon_r = 40.17; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Right Section

Test Date: 04-02-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(5.04, 5.04, 5.04); Calibrated: 2/25/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 1900, Right Head, Cheek, Mid.ch, 2 Tx slots, Standard Cover**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.047 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.217 W/kg

**SAR(1 g) = 0.140 W/kg**

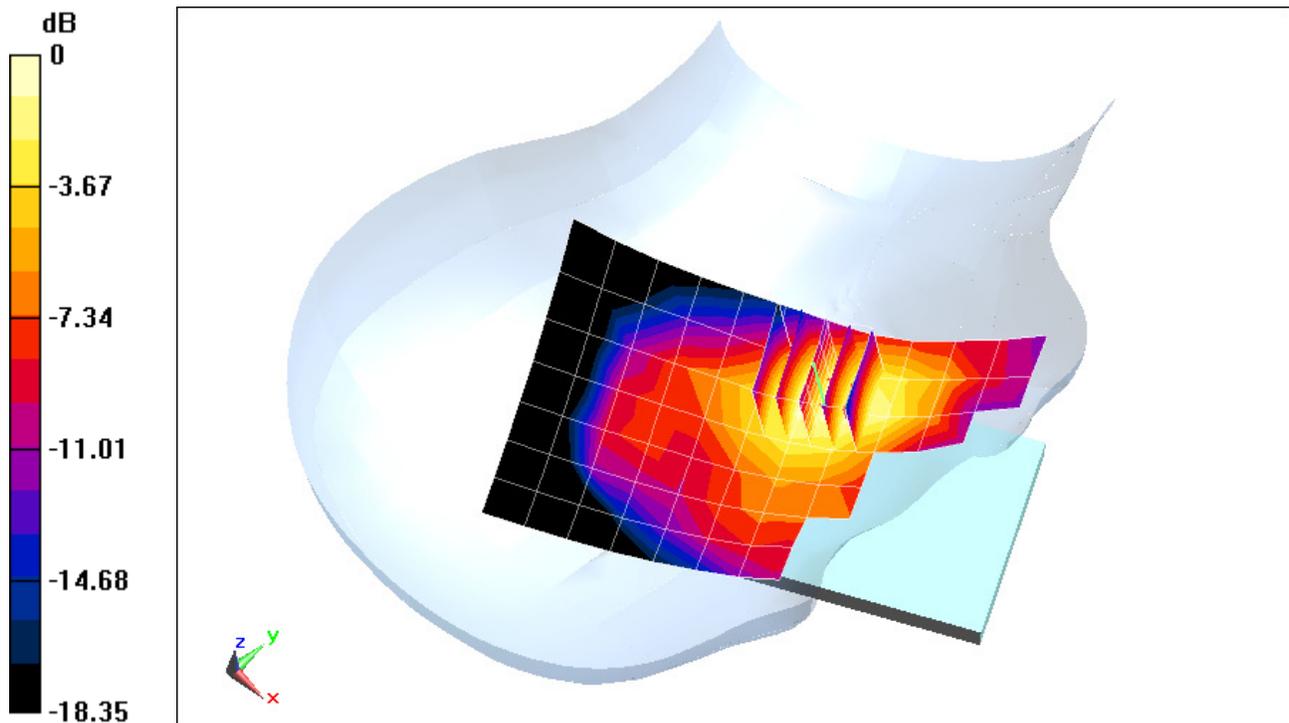

0 dB = 0.148 W/kg = -8.30 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 5**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.402 \text{ S/m}$ ;  $\epsilon_r = 40.17$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-02-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(5.04, 5.04, 5.04); Calibrated: 2/25/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 1900, Right Head, Cheek, Mid.ch, Standard Cover**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.566 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.257 W/kg

**SAR(1 g) = 0.170 W/kg**

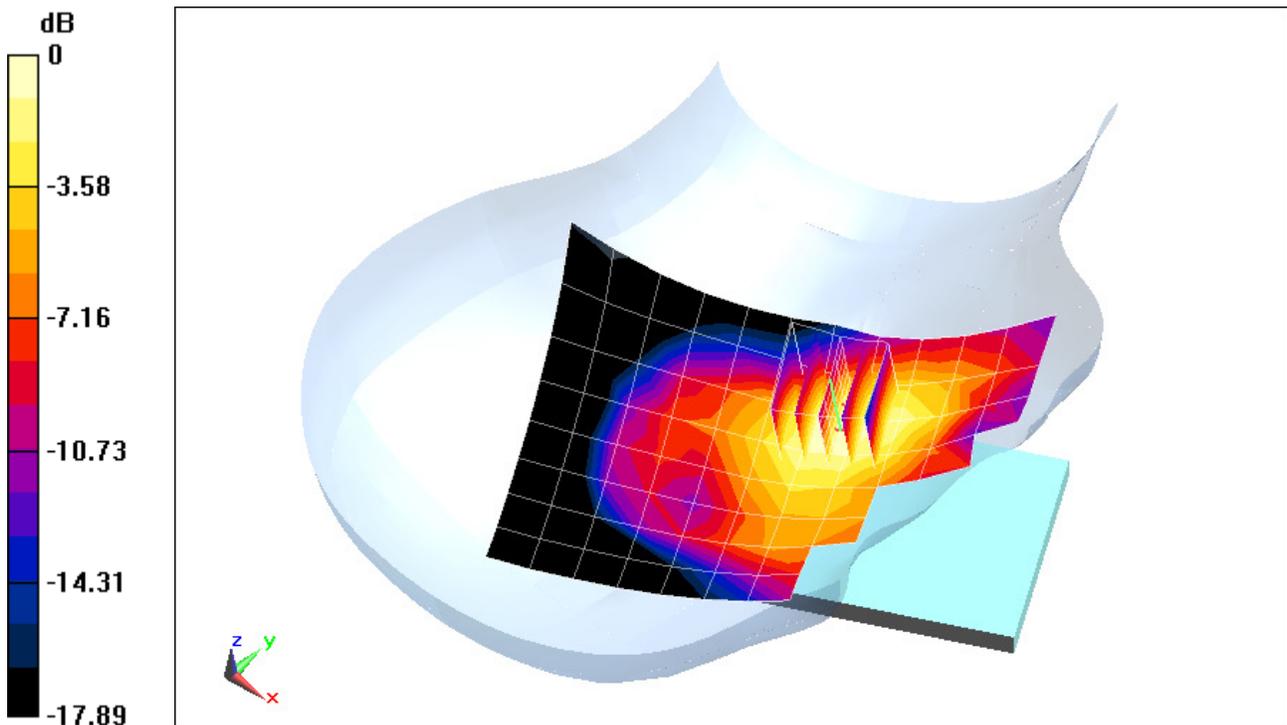

0 dB = 0.183 W/kg = -7.38 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 7**

Communication System: UID 0, LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used:

$$f = 710 \text{ MHz}; \sigma = 0.902 \text{ S/m}; \epsilon_r = 42.663; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Left Section

Test Date: 04-02-2014; Ambient Temp: 24.5°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(6.52, 6.52, 6.52); Calibrated: 11/20/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 17, Left Head, Cheek, Mid.ch**  
**QPSK, 10 MHz Bandwidth, 1 RB, 49 RB Offset, Standard Cover**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.697 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.170 W/kg**

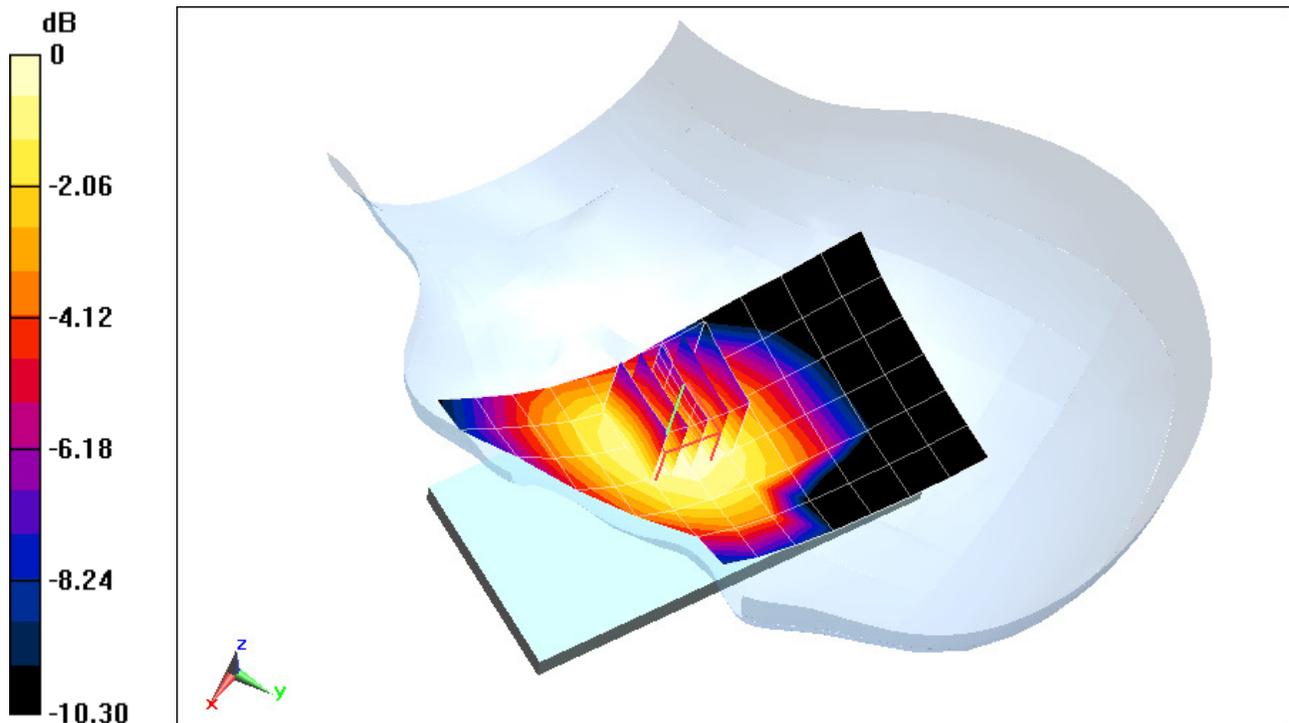

0 dB = 0.180 W/kg = -7.45 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 7**

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$ ;  $\sigma = 0.918 \text{ S/m}$ ;  $\epsilon_r = 40.94$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-31-2014; Ambient Temp: 24.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3258; ConvF(6.27, 6.27, 6.27); Calibrated: 2/25/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch**

**10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset, Standard Cover**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.379 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.452 W/kg

**SAR(1 g) = 0.358 W/kg**

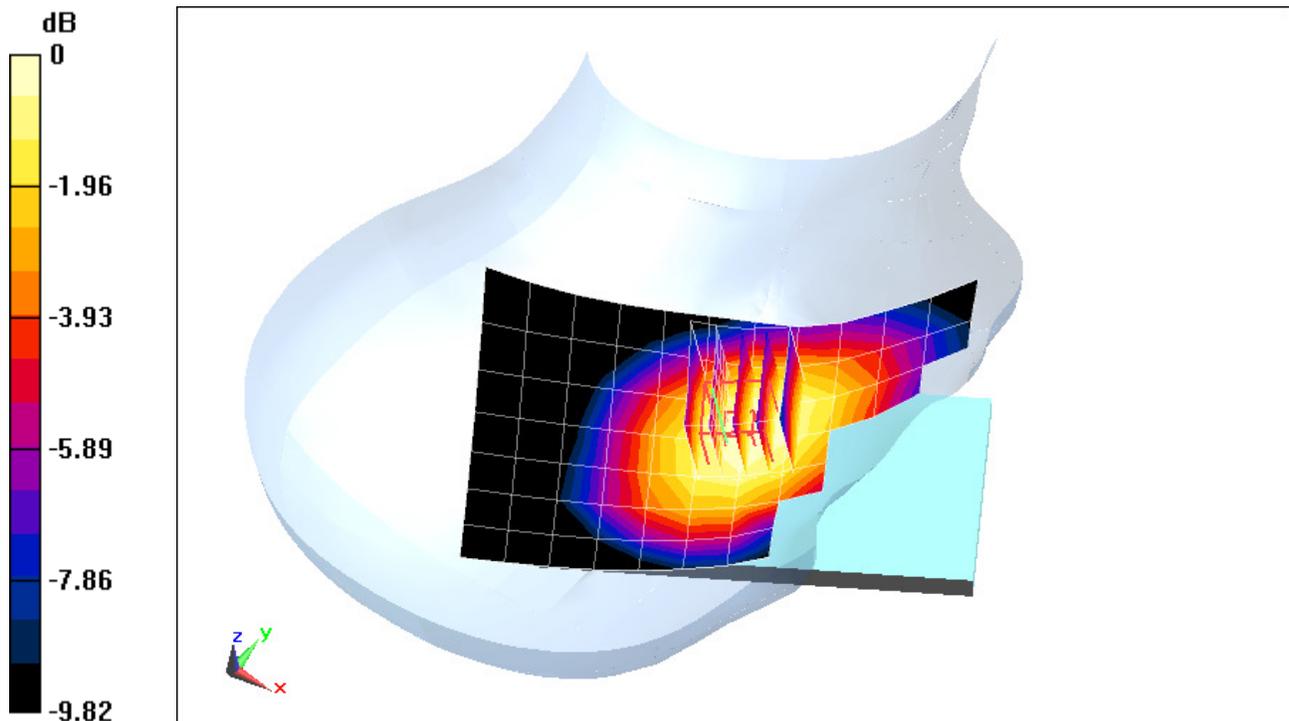

0 dB = 0.373 W/kg = -4.28 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.343 \text{ S/m}$ ;  $\epsilon_r = 39.688$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-03-2014; Ambient Temp: 23.9°C; Tissue Temp: 23.8°C

Probe: EX3DV4 - SN3589; ConvF(7.31, 7.31, 7.31); Calibrated: 1/29/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/22/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch**  
**QPSK, 20 MHz Bandwidth, 1 RB, 99 RB Offset, WCC Open**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.368 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.123 W/kg**

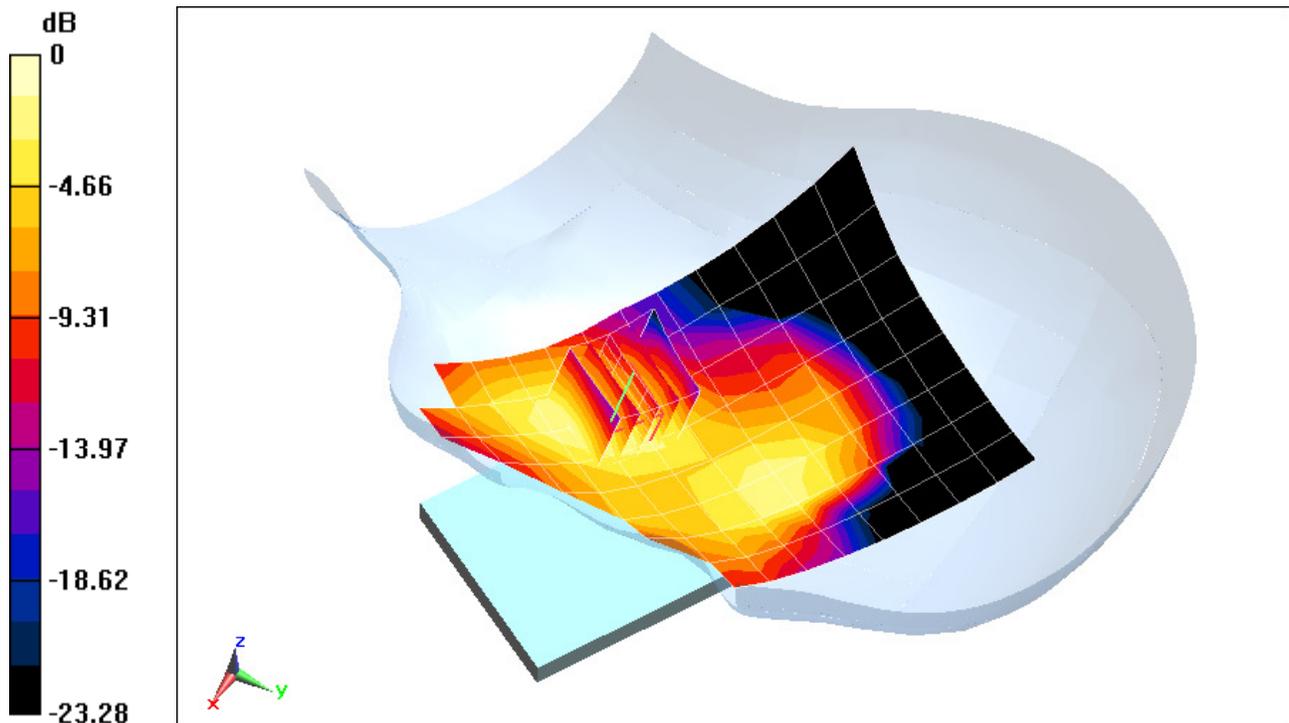

0 dB = 0.134 W/kg = -8.73 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE Band 2 (PCS) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.423 \text{ S/m}$ ;  $\epsilon_r = 40.085$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-02-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(5.04, 5.04, 5.04); Calibrated: 2/25/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 2 (PCS), Right Head, Cheek, High.ch**  
**20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset, Standard Cover**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.634 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.235 W/kg

**SAR(1 g) = 0.154 W/kg**

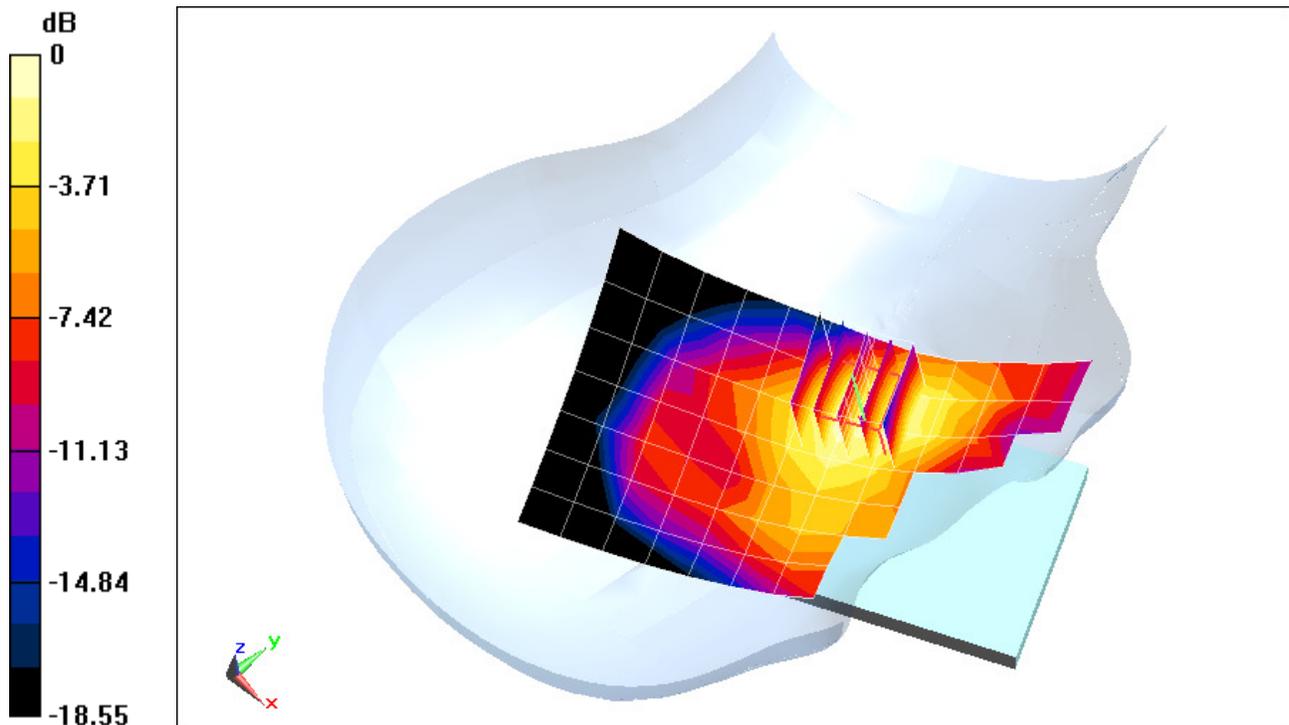

0 dB = 0.166 W/kg = -7.80 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2560 \text{ MHz}$ ;  $\sigma = 1.981 \text{ S/m}$ ;  $\epsilon_r = 38.164$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-31-2014; Ambient Temp: 24.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3589; ConvF(6.24, 6.24, 6.24); Calibrated: 1/29/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/22/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 7, Right Head, Tilt, High.ch**  
**20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset, WCC Open**


**Area Scan (11x18x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.771 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.243 W/kg

**SAR(1 g) = 0.121 W/kg**

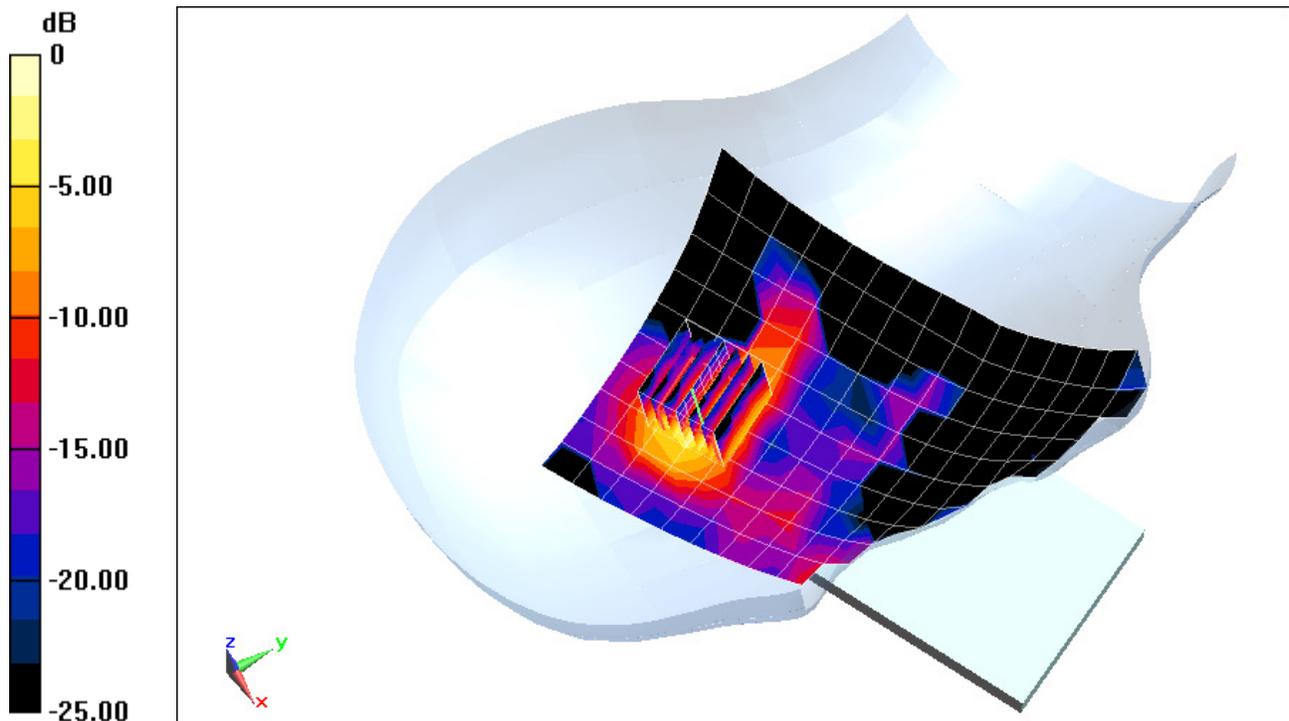

0 dB = 0.157 W/kg = -8.04 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 16**

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 1.871 \text{ S/m}$ ;  $\epsilon_r = 38.581$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03-31-2014; Ambient Temp: 24.3°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3589; ConvF(6.45, 6.45, 6.45); Calibrated: 1/29/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/22/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11b, Left Head, Cheek, Ch 11, 1 Mbps, WCC Open**


**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.640 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.498 W/kg

**SAR(1 g) = 0.228 W/kg**

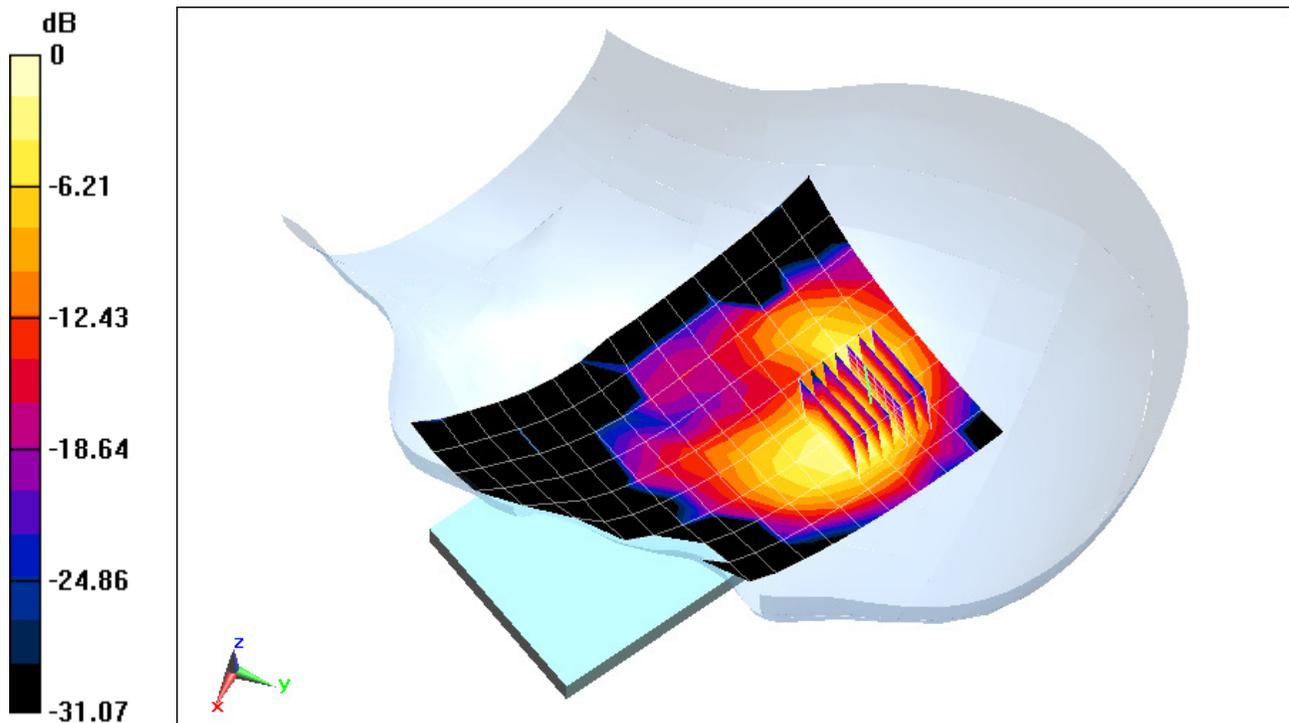

0 dB = 0.293 W/kg = -5.33 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 16**

Communication System: UID 0, IEEE 802.11a; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5805 \text{ MHz}$ ;  $\sigma = 5.251 \text{ S/m}$ ;  $\epsilon_r = 35.932$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-02-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3914; ConvF(4.52, 4.52, 4.52); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.8 GHz, Right Head, Tilt, Ch 161, 6 Mbps, Standard Cover**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 8.358 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.97 W/kg

**SAR(1 g) = 0.455 W/kg**

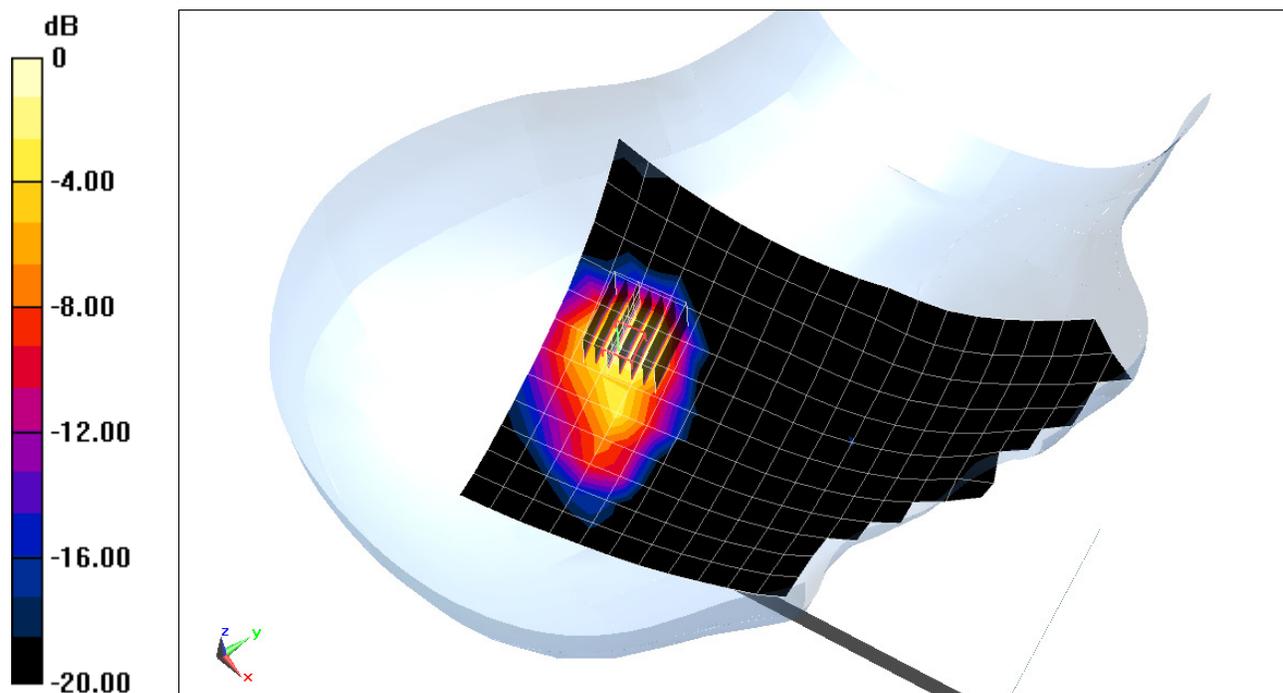

0 dB = 1.09 W/kg = 0.37 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 16**

Communication System: UID 0, IEEE 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5700 \text{ MHz}$ ;  $\sigma = 5.132 \text{ S/m}$ ;  $\epsilon_r = 36.059$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-02-2014; Ambient Temp: 24.5°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3914; ConvF(4.37, 4.37, 4.37); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.5-5.7 GHz, Left Head, Tilt, Ch 140, 6 Mbps, Standard Cover**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 6.689 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.84 W/kg

**SAR(1 g) = 0.431 W/kg**

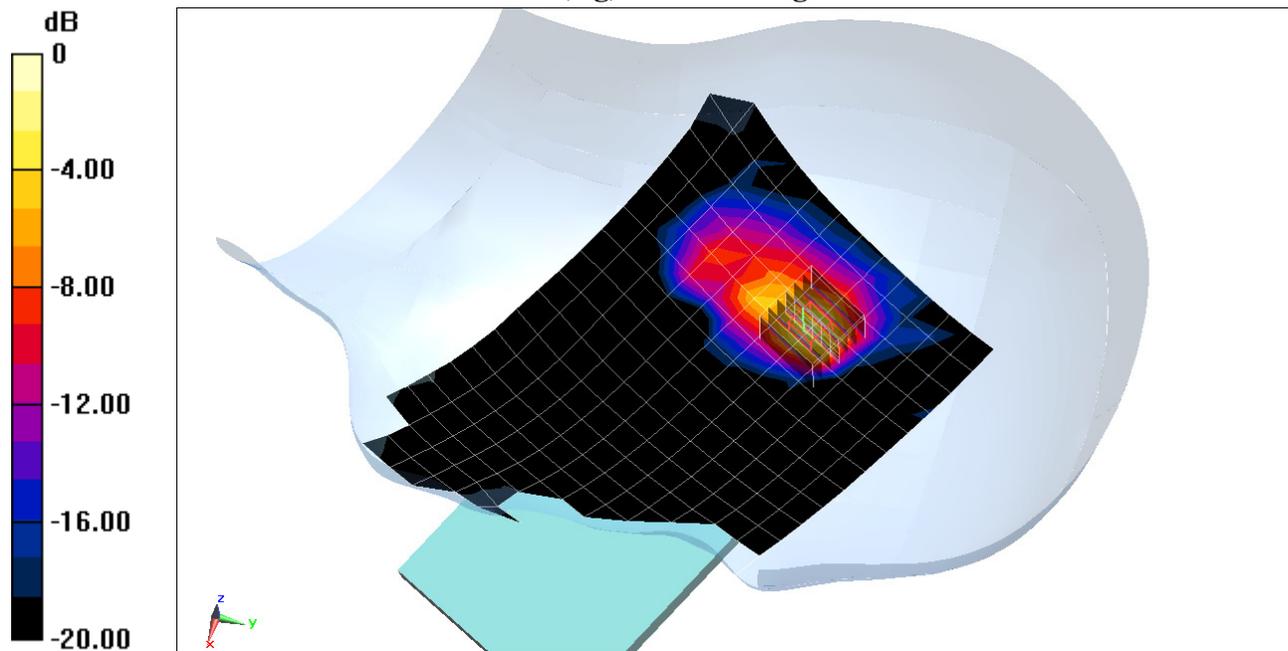

0 dB = 1.06 W/kg = 0.25 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 4**

Communication System: UID 0, GSM850 GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.198$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3288; ConvF(6.27, 6.27, 6.27); Calibrated: 9/23/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2013

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots, Standard Cover**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.414 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.756 W/kg

**SAR(1 g) = 0.595 W/kg**

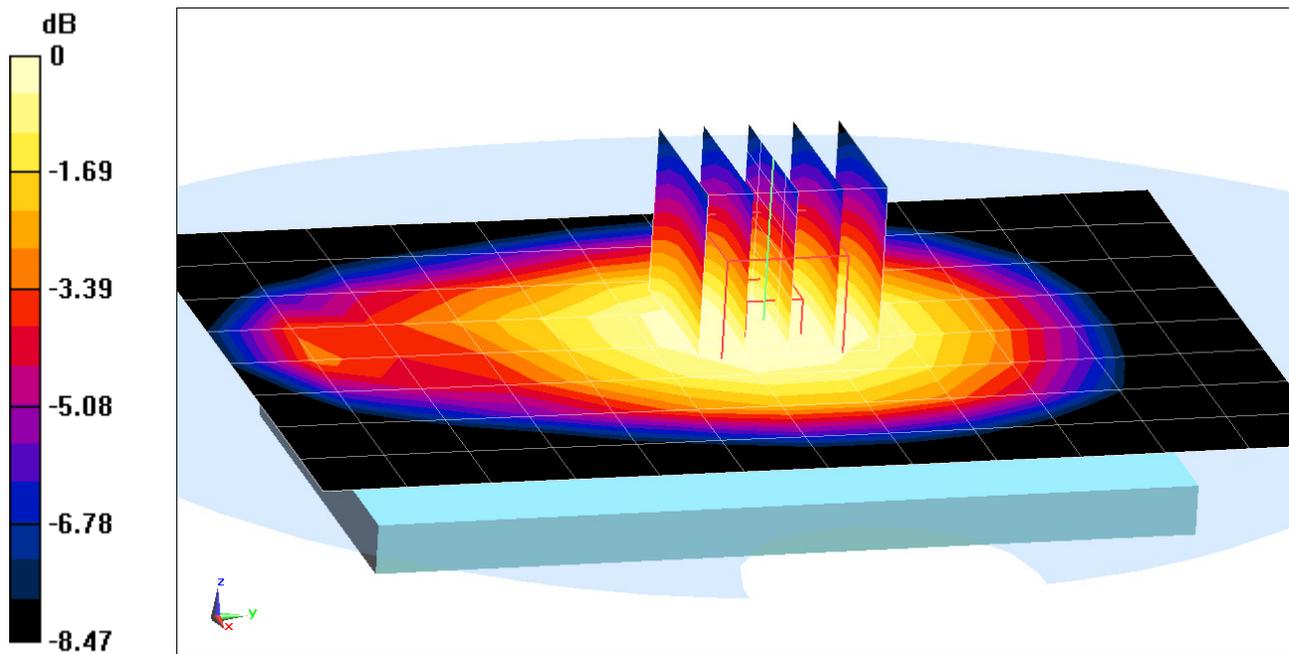

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 4**

Communication System: UID 0, GSM850 GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.198$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3288; ConvF(6.27, 6.27, 6.27); Calibrated: 9/23/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2013

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 850, Body SAR, Right Edge, Mid.ch, 3 Tx Slots, Standard Cover**


**Area Scan (11x13x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.058 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.918 W/kg

**SAR(1 g) = 0.656 W/kg**

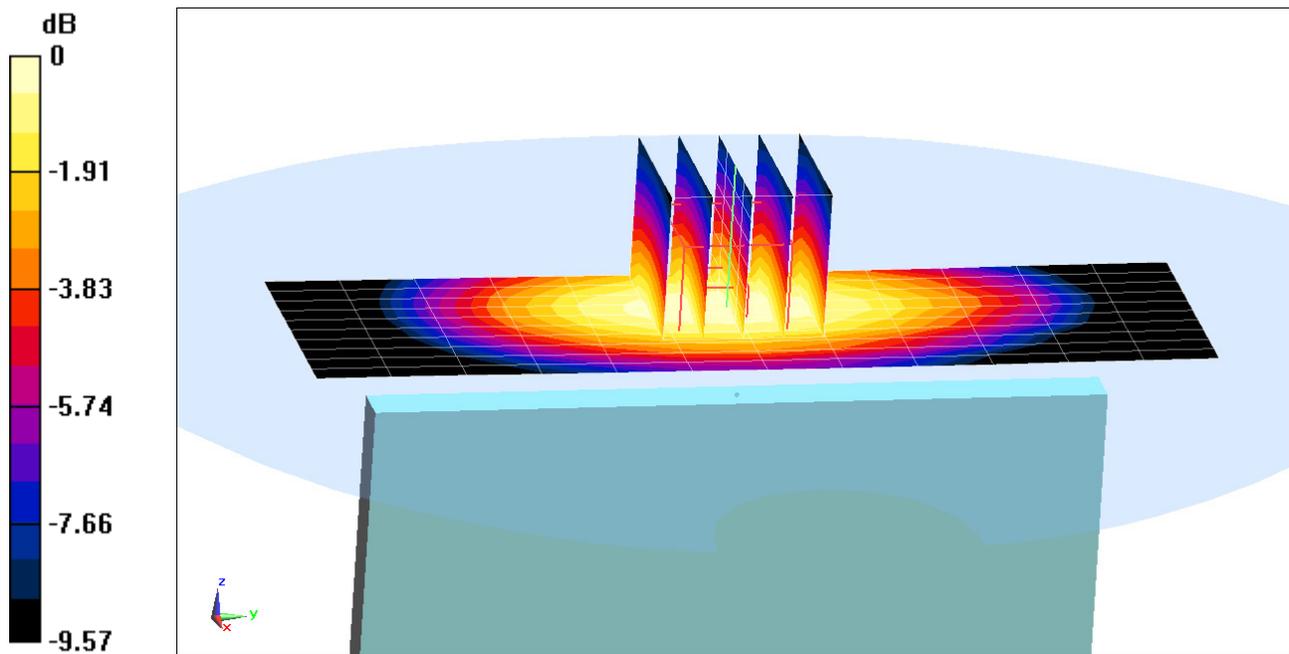

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 5**

Communication System: UID 0, WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.198$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3288; ConvF(6.27, 6.27, 6.27); Calibrated: 9/23/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2013

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 850, Body SAR, Back side, Mid.ch, Standard Cover**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.551 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.814 W/kg

**SAR(1 g) = 0.653 W/kg**

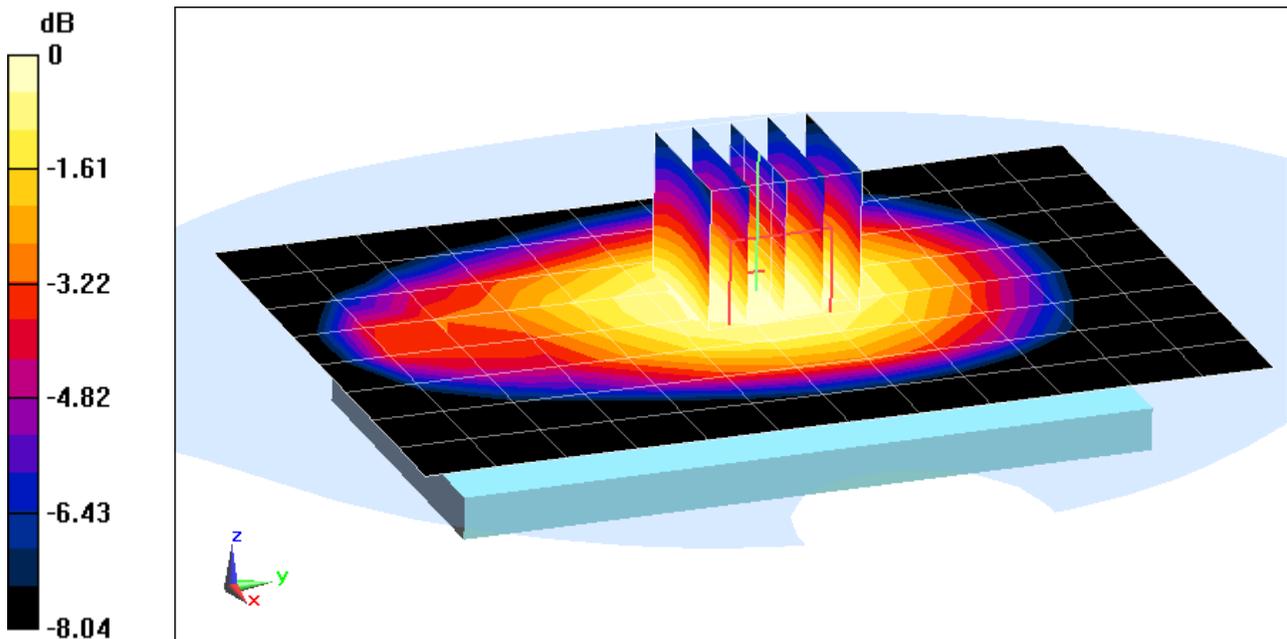

0 dB = 0.682 W/kg = -1.66 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 5**

Communication System: UID 0, WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.198$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3288; ConvF(6.27, 6.27, 6.27); Calibrated: 9/23/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2013

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 850, Body SAR, Right Edge, Mid.ch, Standard Cover**


**Area Scan (11x13x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.437 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.929 W/kg

**SAR(1 g) = 0.669 W/kg**

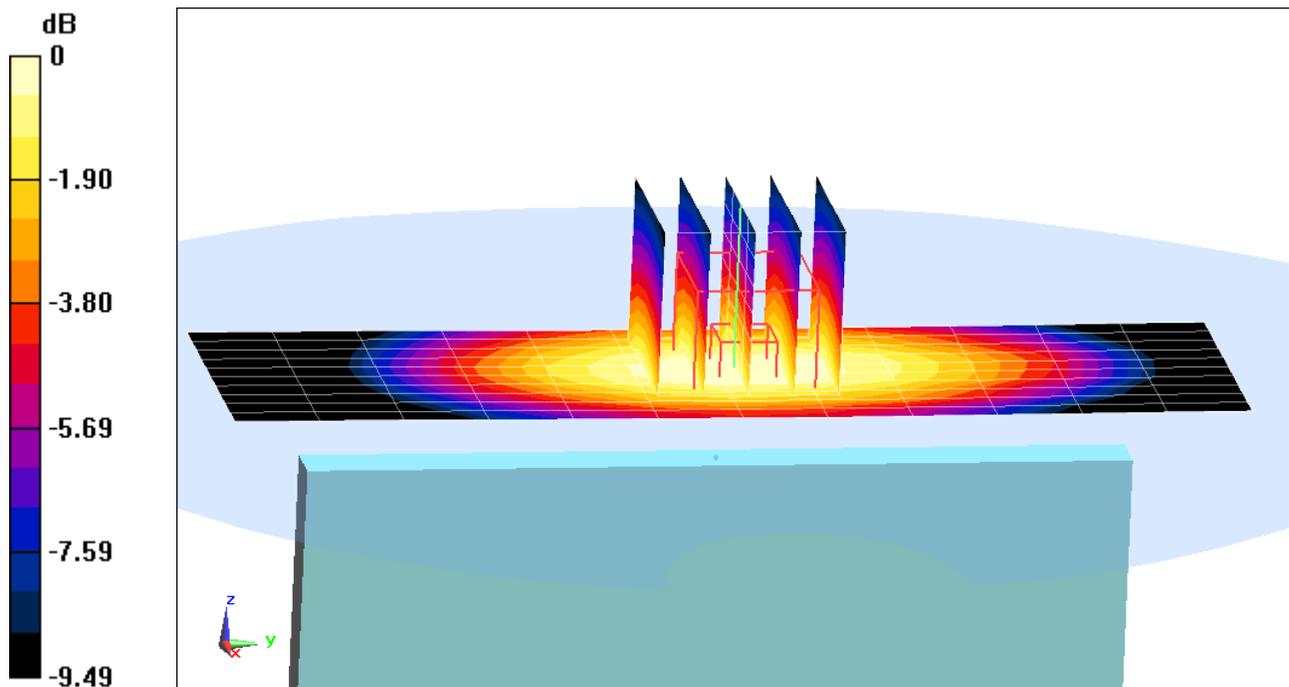

0 dB = 0.714 W/kg = -1.46 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 5**

Communication System: UID 0, AWS UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 52.007$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-31-2014; Ambient Temp: 23.3°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3263; ConvF(5.01, 5.01, 5.01); Calibrated: 5/16/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/13/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: AWS UMTS, Body SAR, Back side, Mid.ch, WCC Closed**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.092 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.577 W/kg**

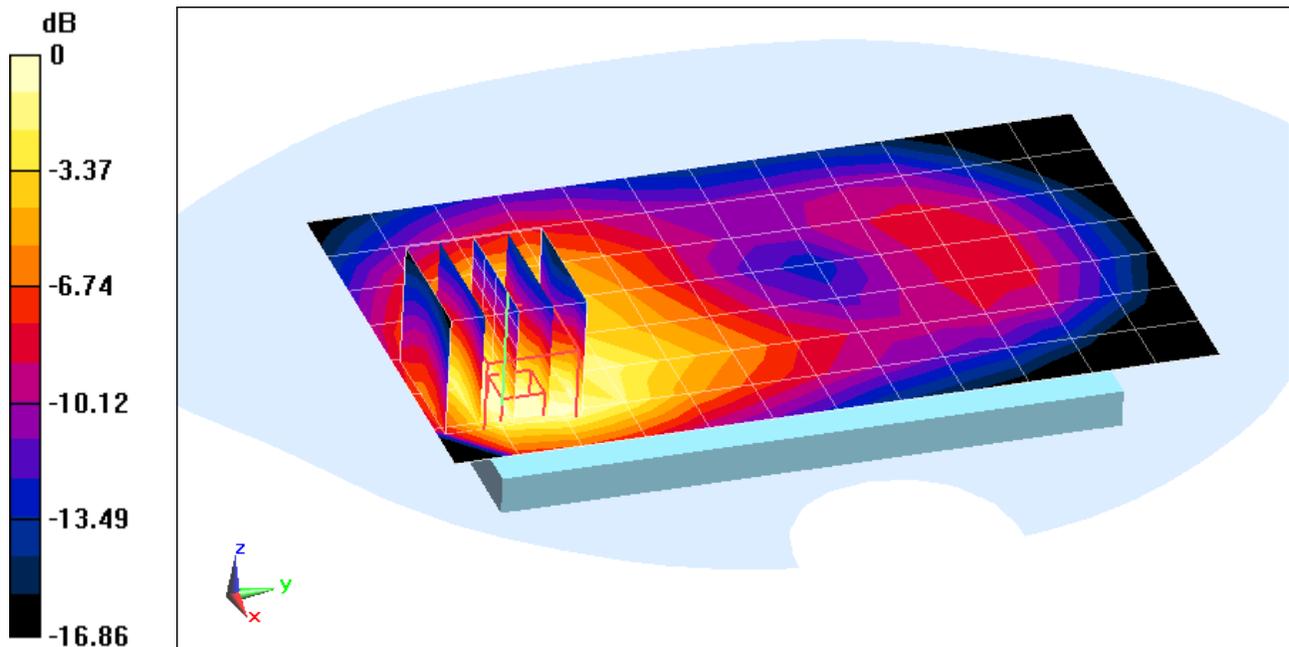

0 dB = 0.632 W/kg = -1.99 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 4**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.563 \text{ S/m}$ ;  $\epsilon_r = 51.908$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-07-2014; Ambient Temp: 24.0°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 2 Tx Slots, Standard Cover**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.217 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.798 W/kg

**SAR(1 g) = 0.470 W/kg**

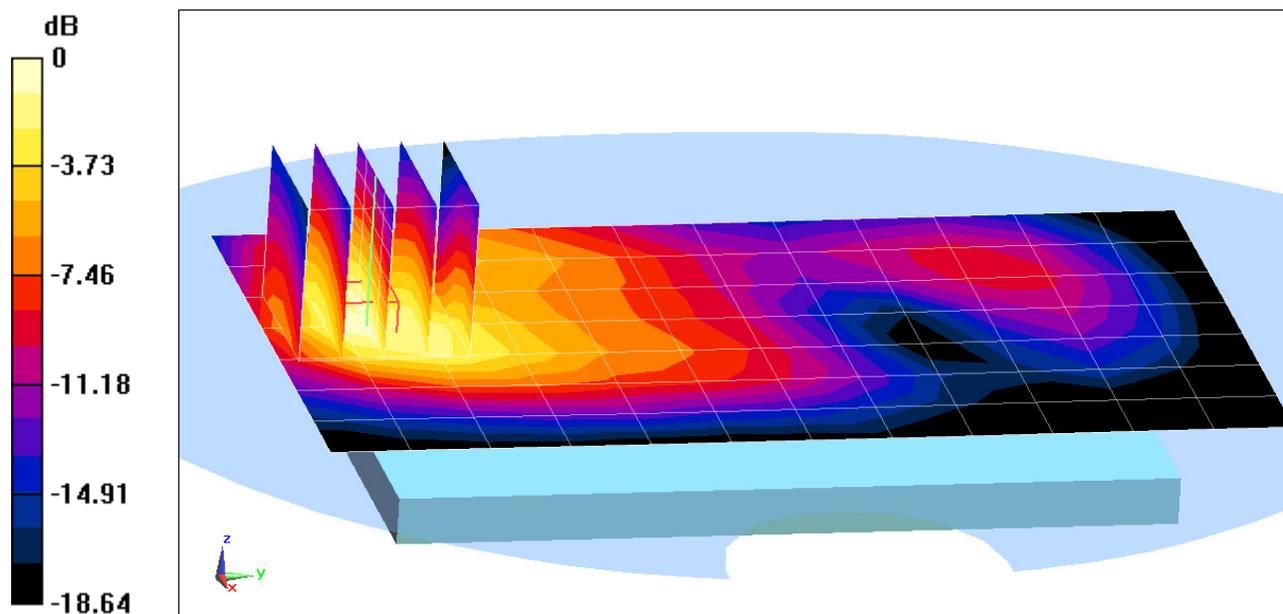

0 dB = 0.470 W/kg = -3.28 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 4**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.563 \text{ S/m}$ ;  $\epsilon_r = 51.908$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-07-2014; Ambient Temp: 24.0°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 2 Tx Slots, Standard Cover**


**Area Scan (10x8x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.857 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.877 W/kg

**SAR(1 g) = 0.510 W/kg**

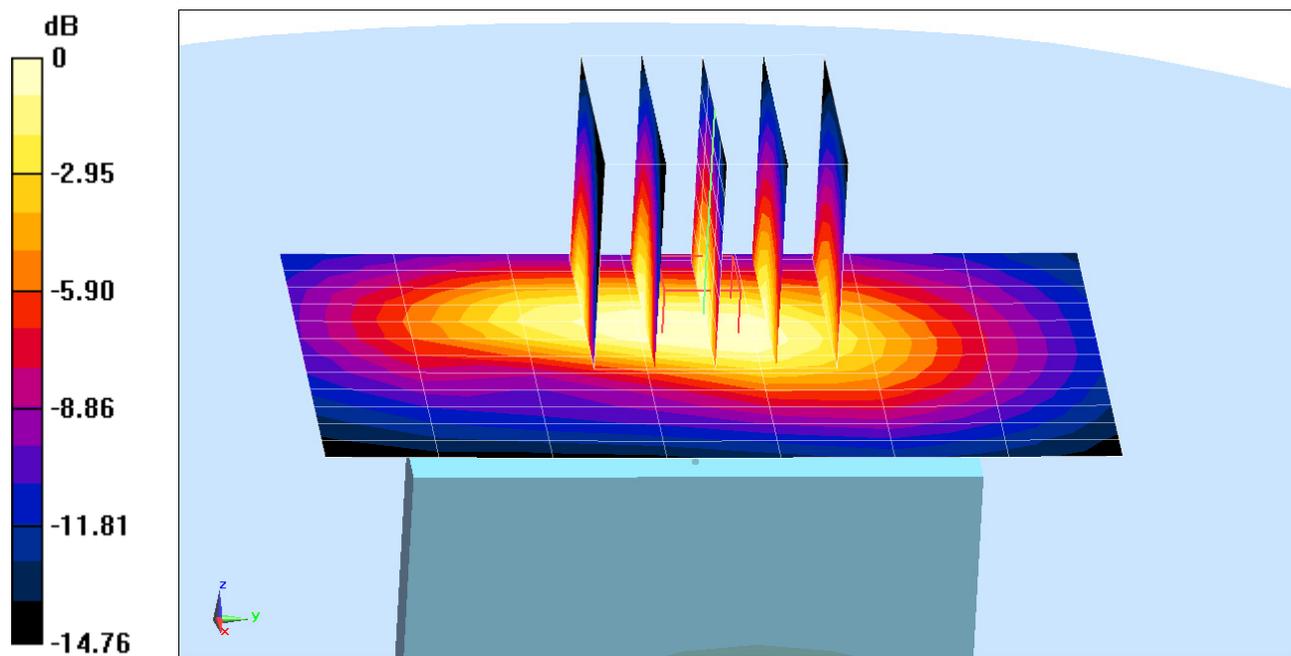

0 dB = 0.481 W/kg = -3.18 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 5**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$$f = 1880 \text{ MHz}; \sigma = 1.563 \text{ S/m}; \epsilon_r = 51.908; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-07-2014; Ambient Temp: 24.0°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: UMTS 1900, Body SAR, Back side, Mid.ch, Standard Cover**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.874 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.637 W/kg**

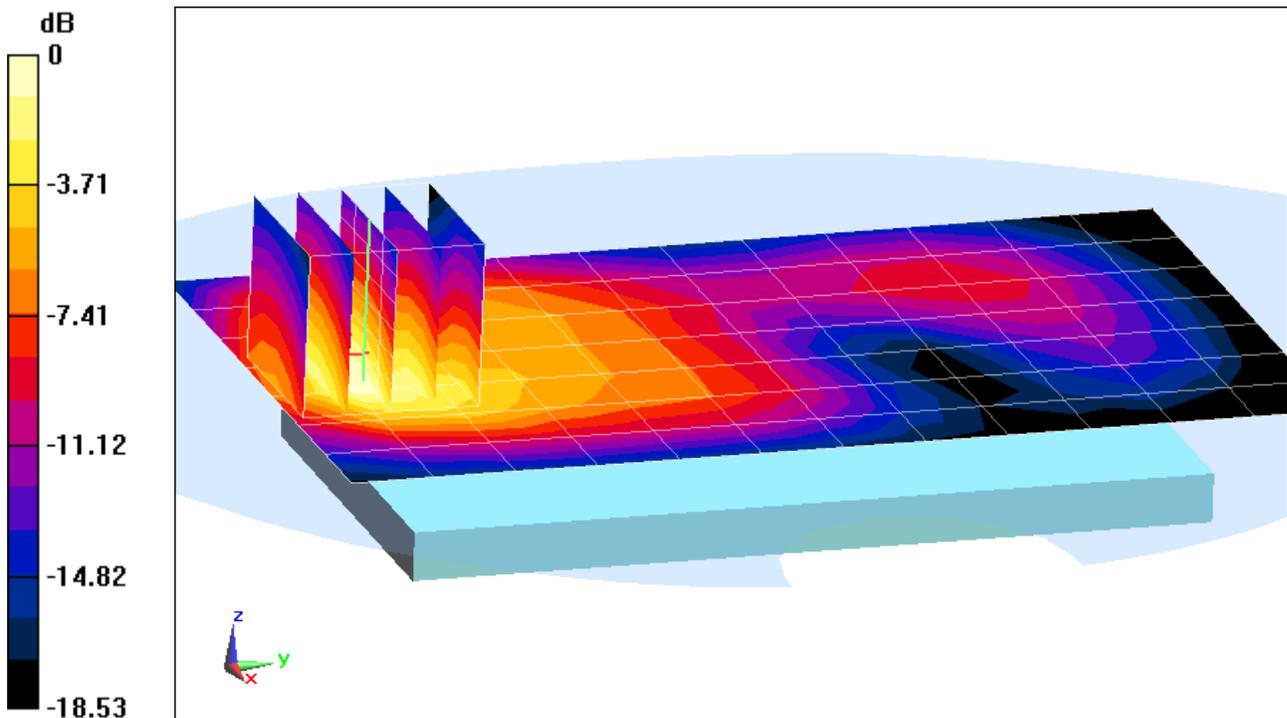

0 dB = 0.712 W/kg = -1.48 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$f = 710 \text{ MHz}$ ;  $\sigma = 0.958 \text{ S/m}$ ;  $\epsilon_r = 56.516$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.5°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3333; ConvF(6.11, 6.11, 6.11); Calibrated: 11/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 17, Body SAR, Back side, Mid.ch**  
**10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset, Standard Cover**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x9x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.710 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.337 W/kg

**SAR(1 g) = 0.231 W/kg**

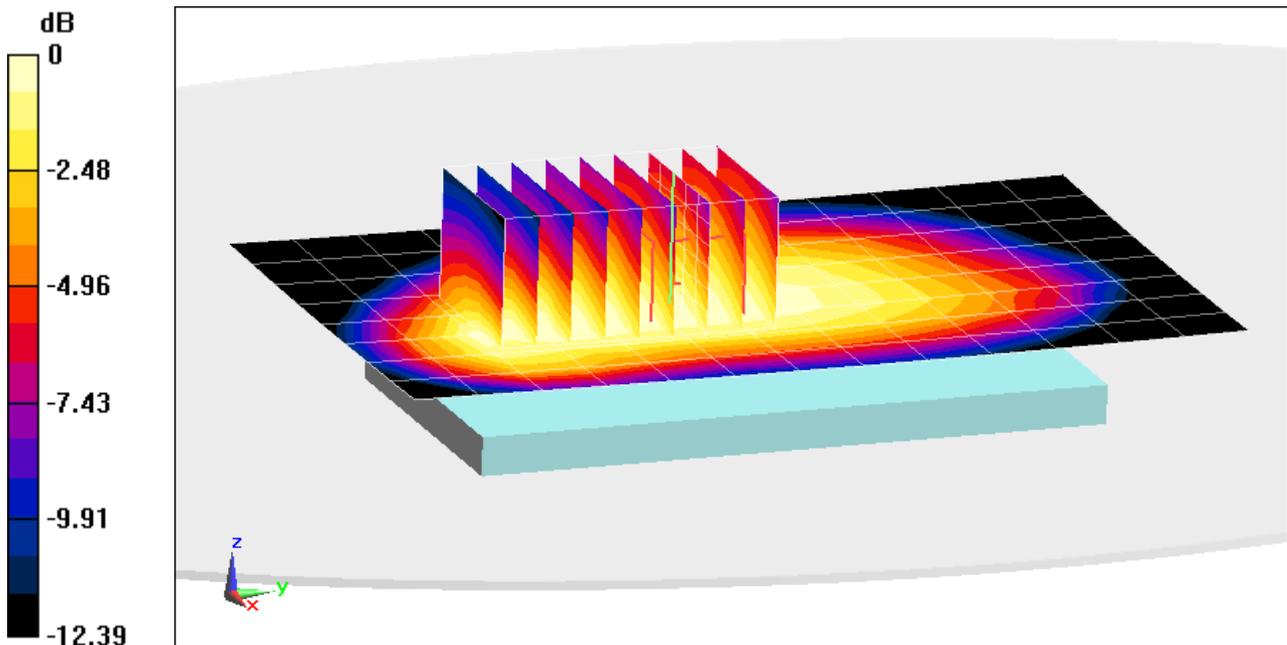

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE BAND 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.199$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3288; ConvF(6.27, 6.27, 6.27); Calibrated: 9/23/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2013

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 5 (Cell), Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset, Standard Cover**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.003 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.652 W/kg

**SAR(1 g) = 0.523 W/kg**

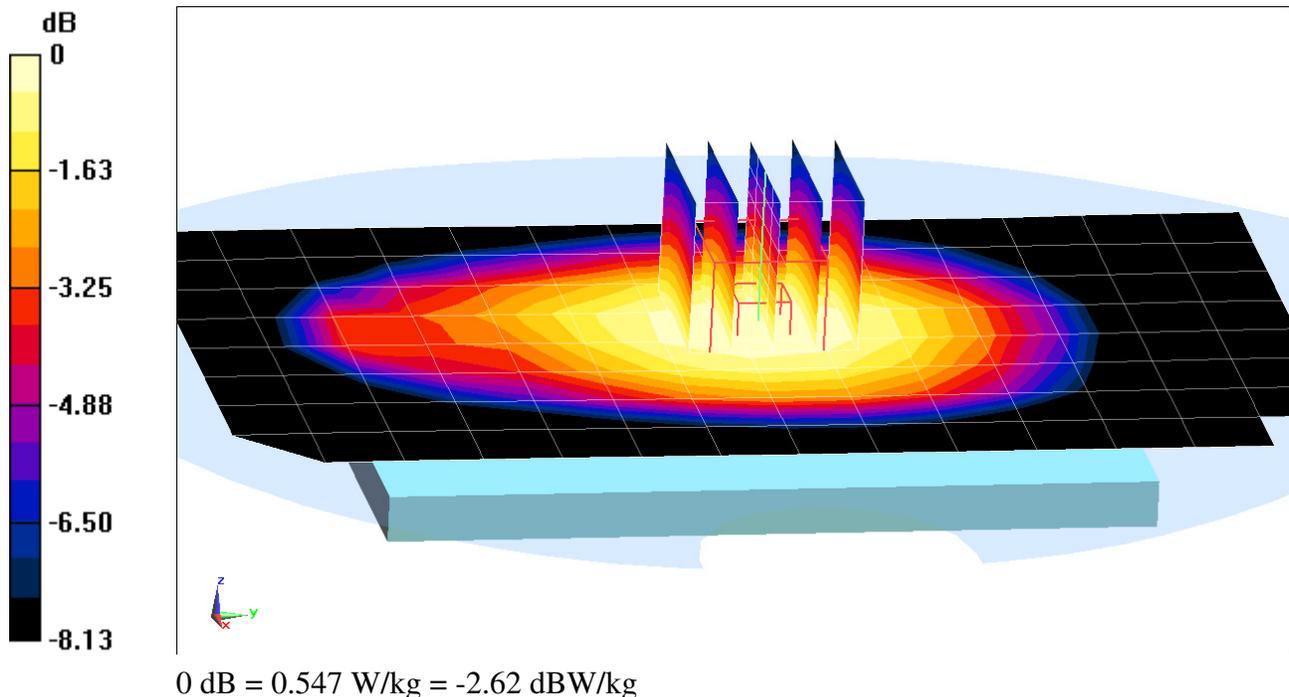

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE BAND 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.199$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3288; ConvF(6.27, 6.27, 6.27); Calibrated: 9/23/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2013

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 5 (Cell), Body SAR, Right Edge, Mid.ch,**

**10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset, Standard Cover**


**Area Scan (13x15x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.863 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.779 W/kg

**SAR(1 g) = 0.557 W/kg**

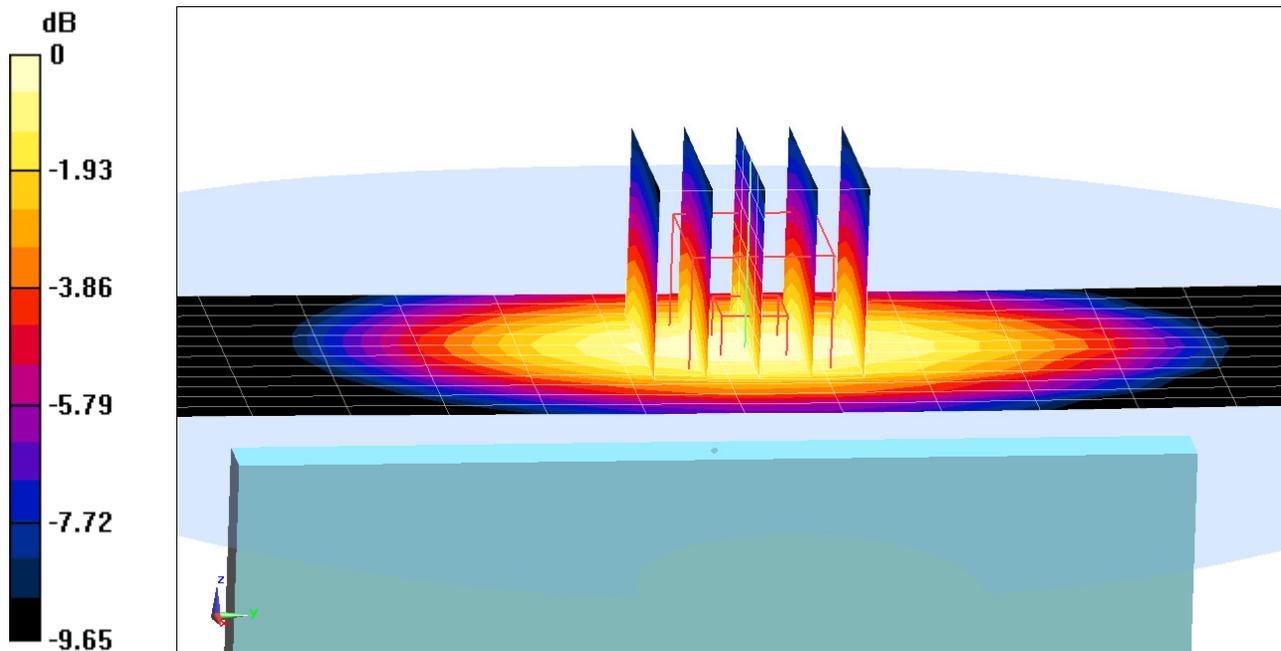

0 dB = 0.597 W/kg = -2.24 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE RF; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 52.006$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-31-2014; Ambient Temp: 23.3°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3263; ConvF(5.01, 5.01, 5.01); Calibrated: 5/16/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/13/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch**

**20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset, Standard Cover**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.598 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.554 W/kg**

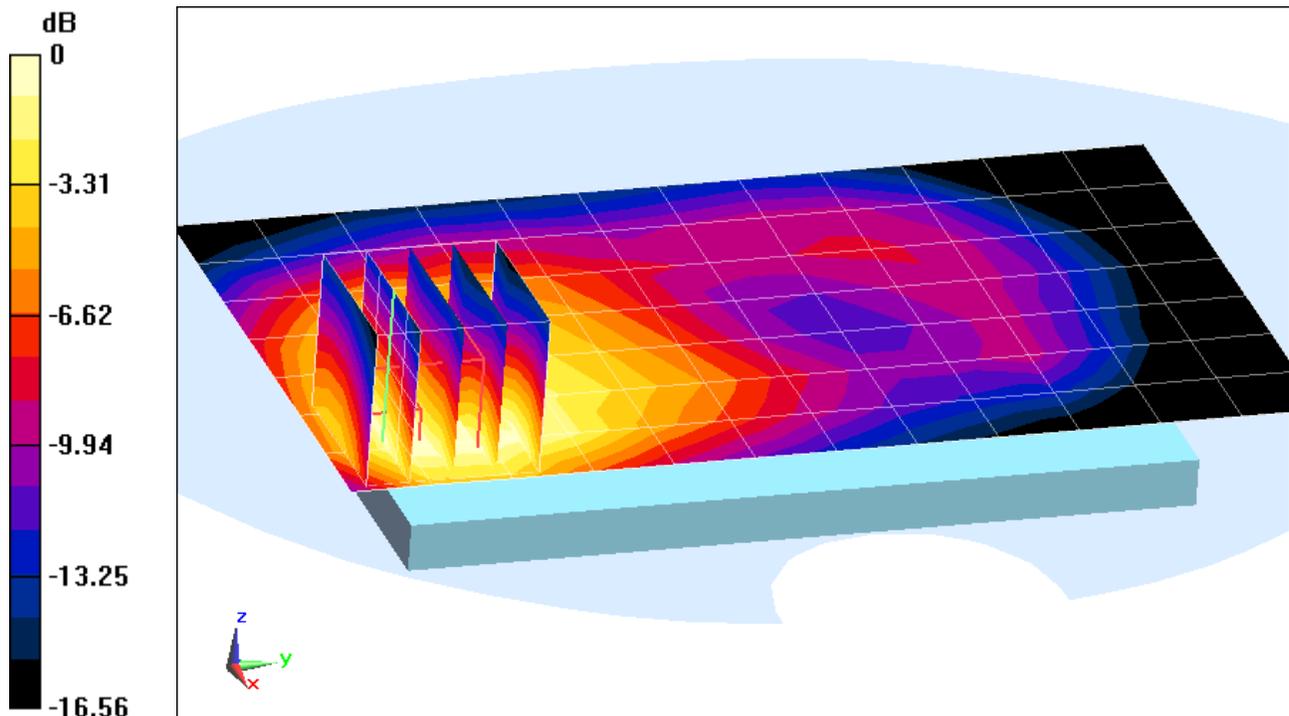

0 dB = 0.632 W/kg = -1.99 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE Band 2 (PCS) (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.567 \text{ S/m}$ ;  $\epsilon_r = 51.102$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-03-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, High.ch**  
**20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset, Standard Cover**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.237 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.938 W/kg

**SAR(1 g) = 0.554 W/kg**

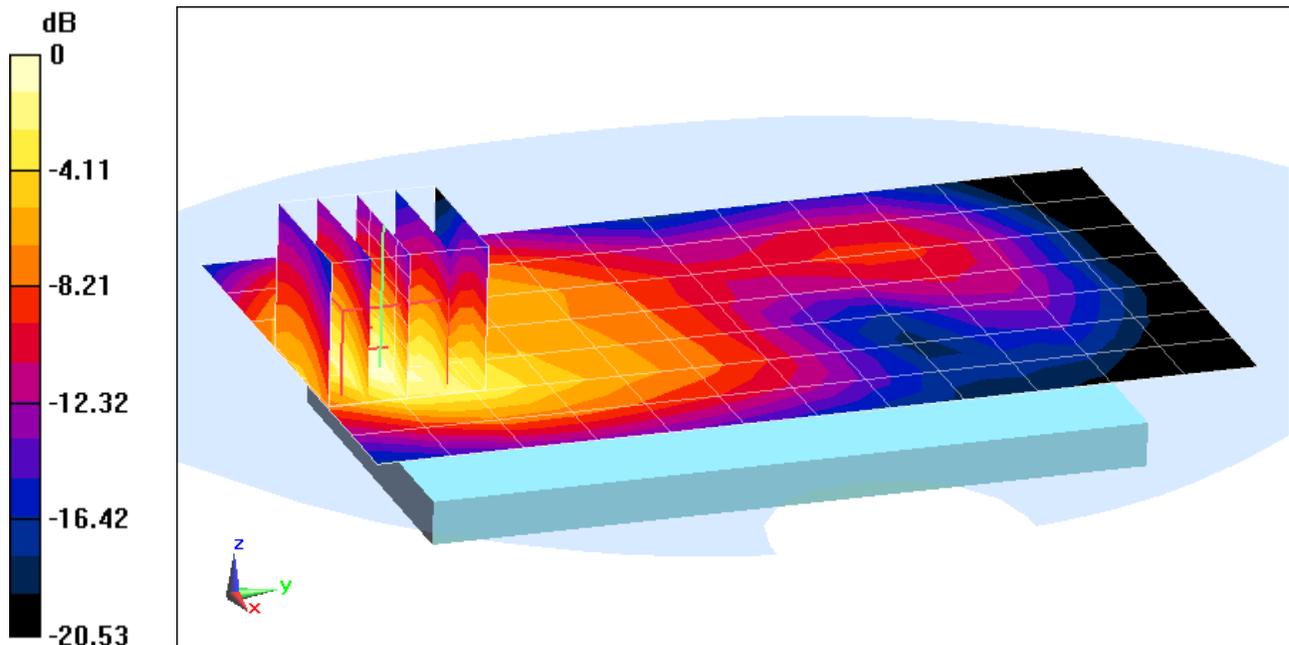

0 dB = 0.615 W/kg = -2.11 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.567 \text{ S/m}$ ;  $\epsilon_r = 51.102$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-03-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 2 (PCS), Body SAR, Bottom Edge, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset, WCC Closed**


**Area Scan (10x8x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.084 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.628 W/kg**

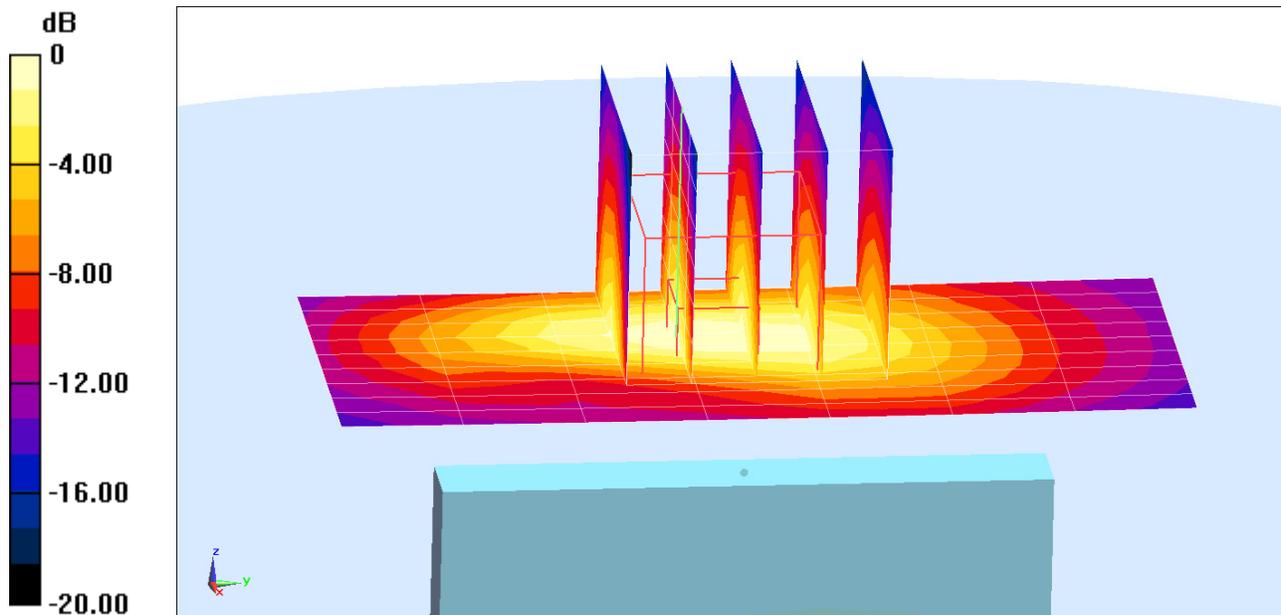

0 dB = 0.704 W/kg = -1.52 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 6**

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2535 \text{ MHz}$ ;  $\sigma = 2.154 \text{ S/m}$ ;  $\epsilon_r = 51.622$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.4°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3258; ConvF(3.91, 3.91, 3.91); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 7, Body SAR, Back side, Mid.ch**  
**20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset, Standard Cover**


**Area Scan (9x16x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.092 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.44 W/kg

**SAR(1 g) = 1.1 W/kg**

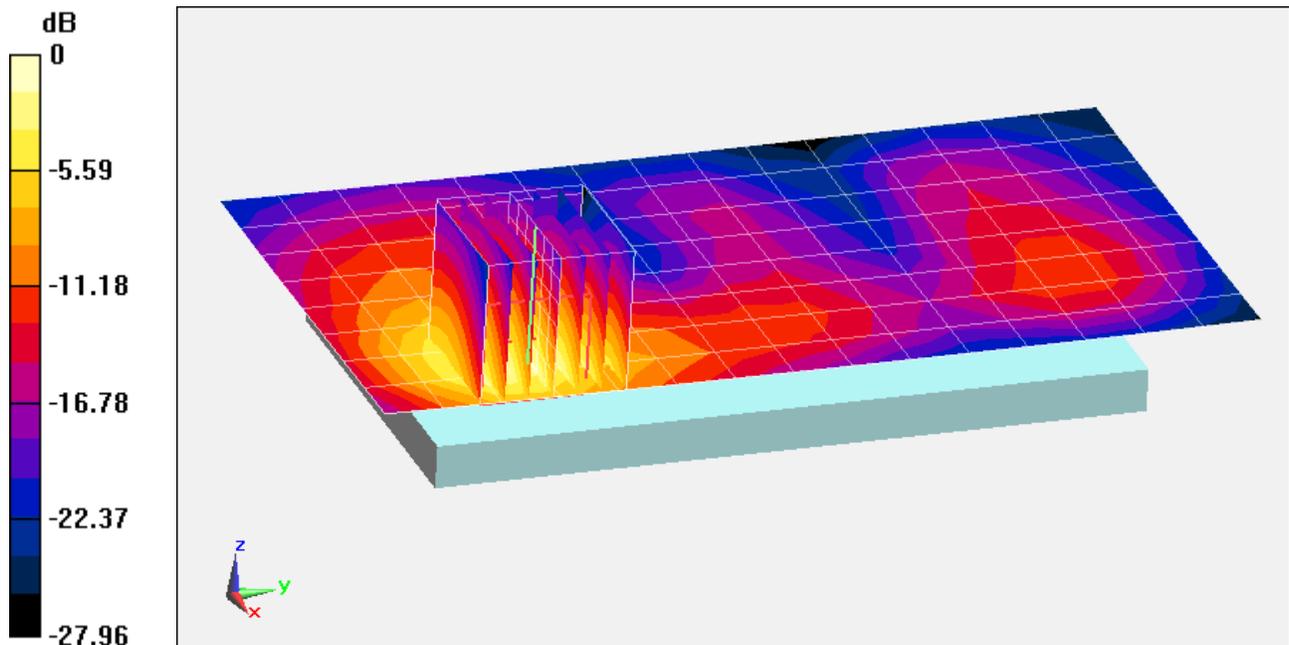

0 dB = 1.44 W/kg = 1.58 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 16**

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 2.054 \text{ S/m}$ ;  $\epsilon_r = 51.931$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.4°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3258; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11b, Body SAR, Ch 11, 1 Mbps, Back Side, Standard Cover**


**Area Scan (9x16x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.025 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.206 W/kg

**SAR(1 g) = 0.096 W/kg**

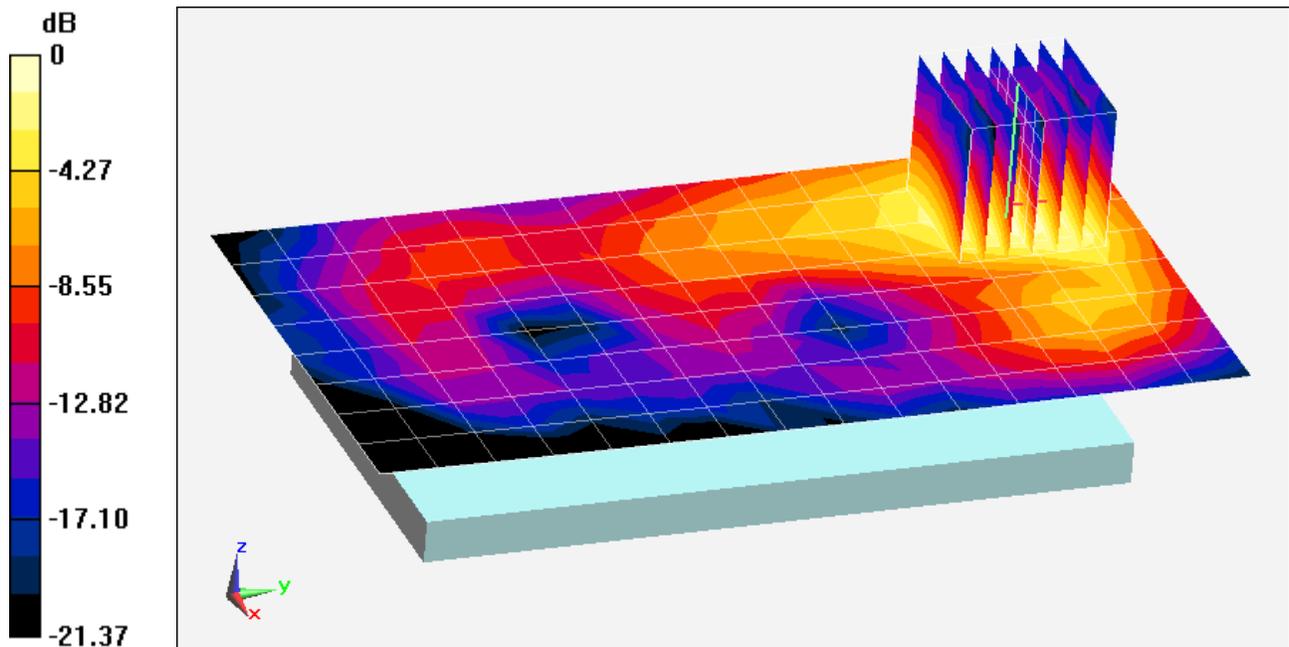

0 dB = 0.120 W/kg = -9.21 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 16**

Communication System: UID 0, IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$$f = 5825 \text{ MHz}; \sigma = 6.223 \text{ S/m}; \epsilon_r = 47.134; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.8°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3920; ConvF(4, 4, 4); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.8 GHz, Body SAR, Ch 165, 6 Mbps, Back Side, WCC Closed**


**Area Scan (13x20x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 3.806 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 0.396 W/kg**

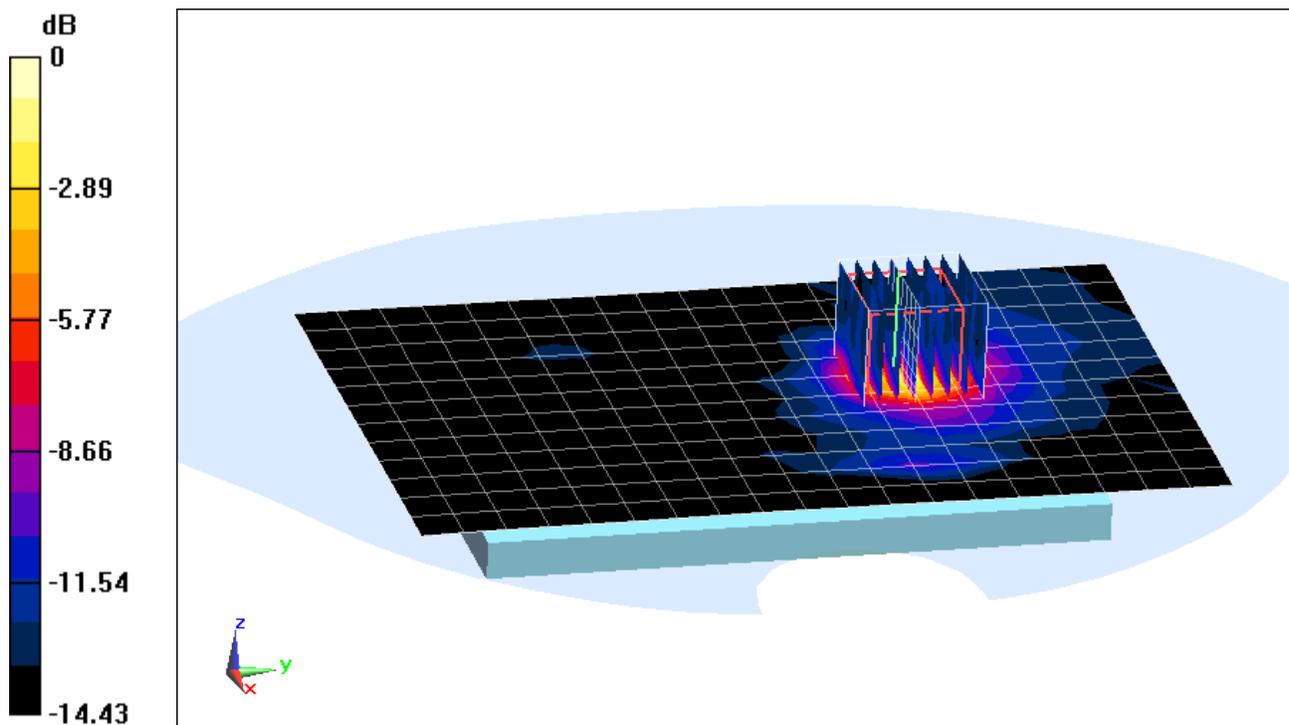

0 dB = 0.916 W/kg = -0.38 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFD850; Type: Portable Handset; Serial: 16**

Communication System: UID 0, IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5540 \text{ MHz}$ ;  $\sigma = 5.794 \text{ S/m}$ ;  $\epsilon_r = 47.785$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.8°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3920; ConvF(3.8, 3.8, 3.8); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: IEEE 802.11a, 5.5 GHz, Body SAR, Ch 108, 6 Mbps, Back Side, Standard Cover**


**Area Scan (13x20x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 8.052 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.318 W/kg**

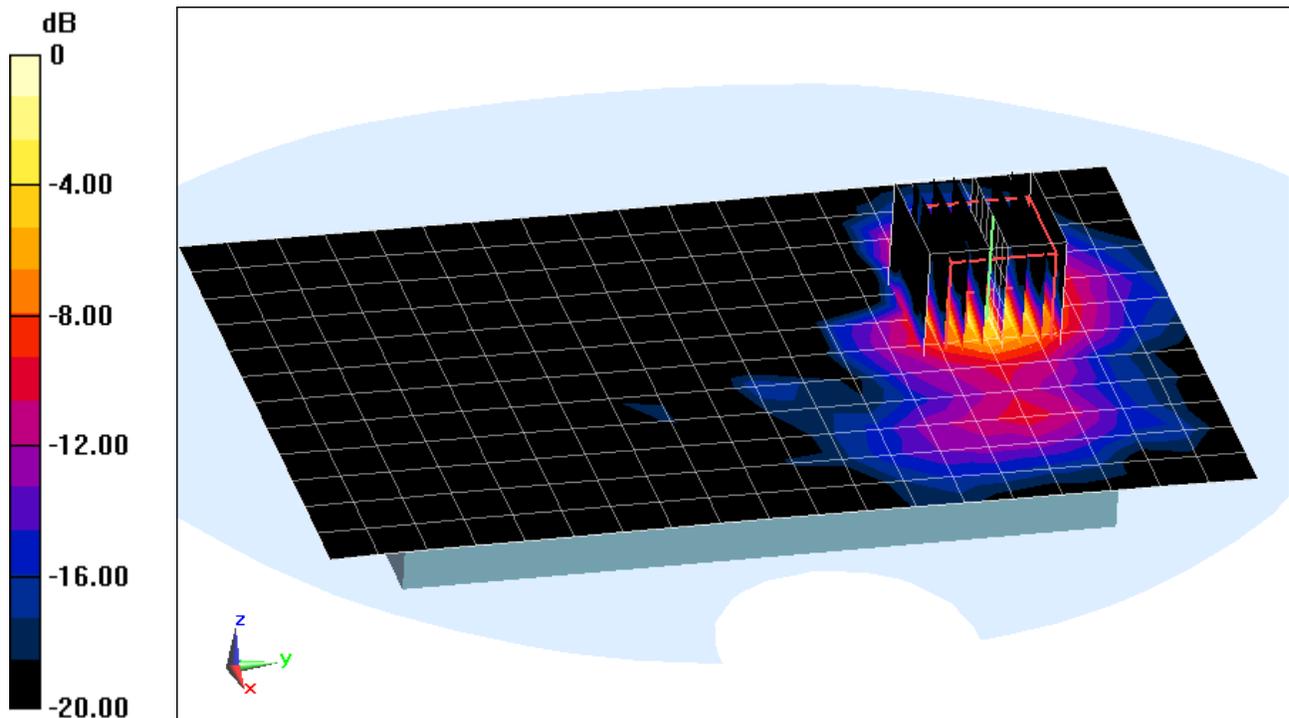

0 dB = 0.733 W/kg = -1.35 dBW/kg

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 740 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.932 \text{ S/m}$ ;  $\epsilon_r = 41.871$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-02-2014; Ambient Temp: 24.5°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(6.52, 6.52, 6.52); Calibrated: 11/20/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 750 MHz System Verification

**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.849 W/kg**

Deviation = 1.43%

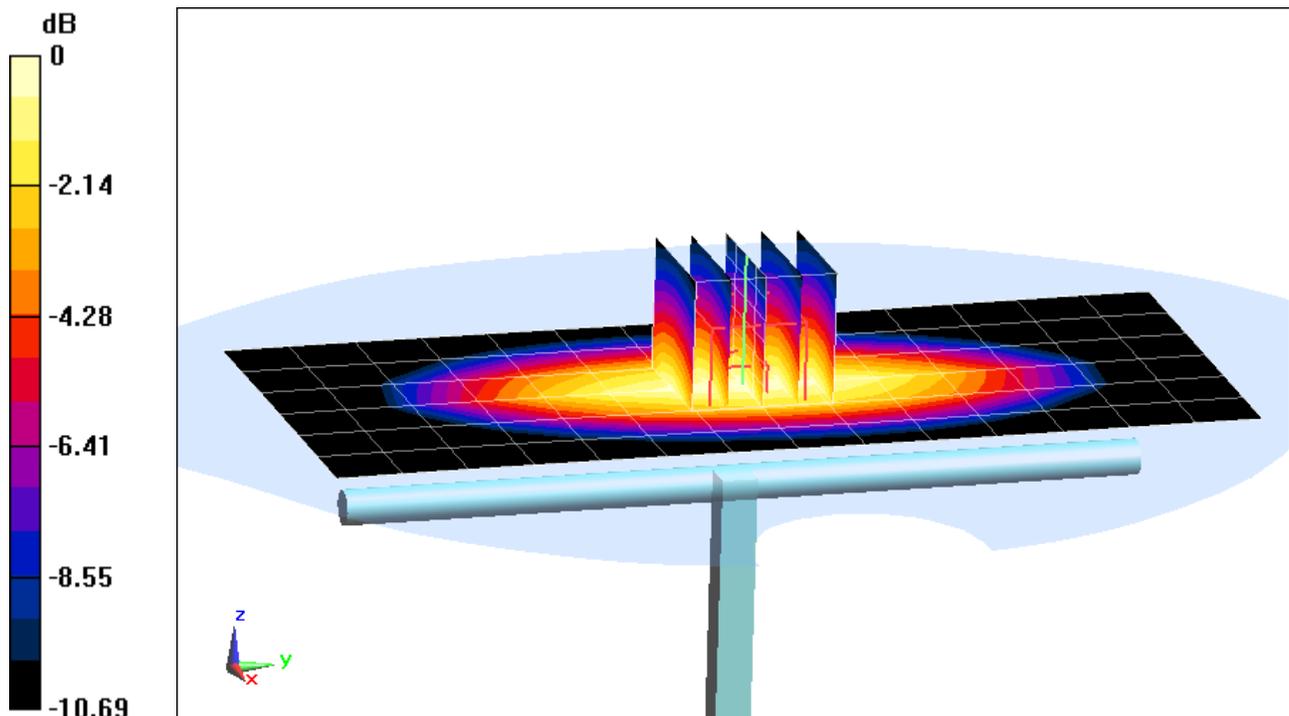

0 dB = 0.921 W/kg = -0.36 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d119**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.917 \text{ S/m}$ ;  $\epsilon_r = 40.957$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-31-2014; Ambient Temp: 24.4°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3258; ConvF(6.27, 6.27, 6.27); Calibrated: 2/25/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 835 MHz System Verification

**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.930 W/kg**

Deviation = -3.93%

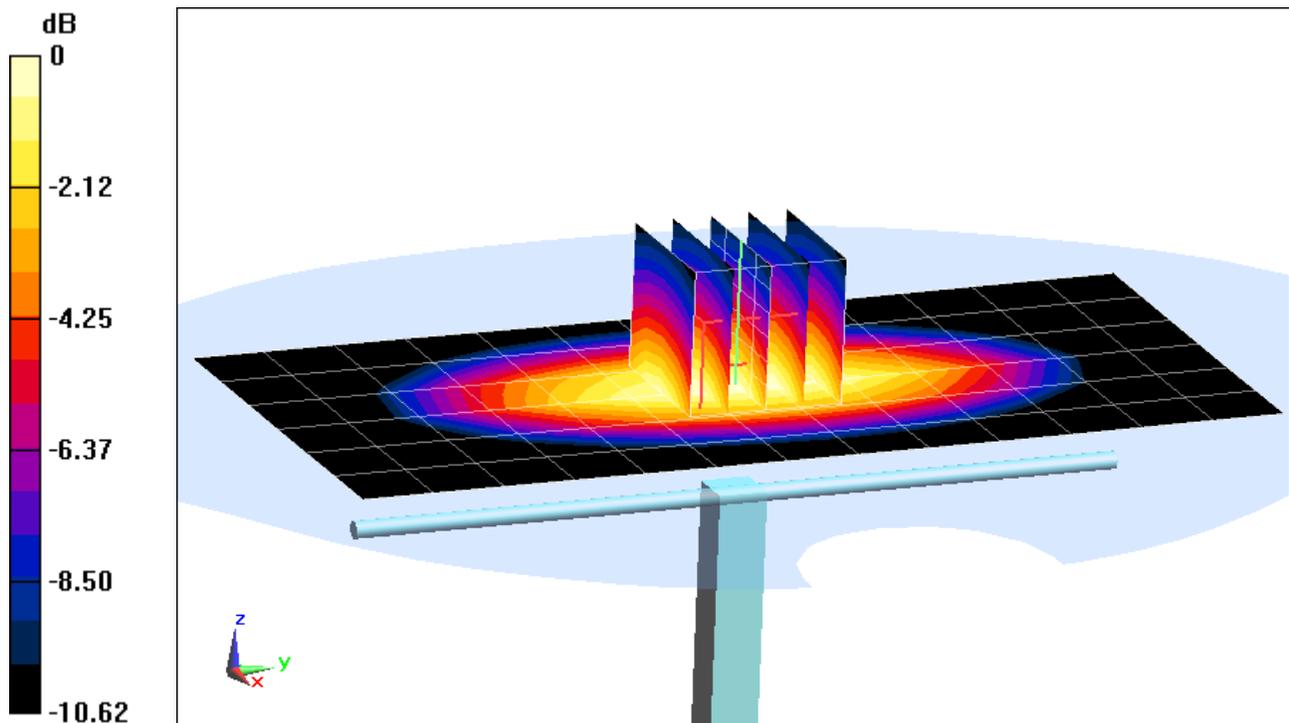

0 dB = 1.01 W/kg = 0.04 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.362 \text{ S/m}$ ;  $\epsilon_r = 39.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section: Space: 1.0 cm

Test Date: 04-03-2014; Ambient Temp: 23.9°C; Tissue Temp: 23.8°C

Probe: EX3DV4 - SN3589; ConvF(7.31, 7.31, 7.31); Calibrated: 1/29/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/22/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 1750 MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.31 W/kg

**SAR(1 g) = 3.45 W/kg**

Deviation = -6.25%

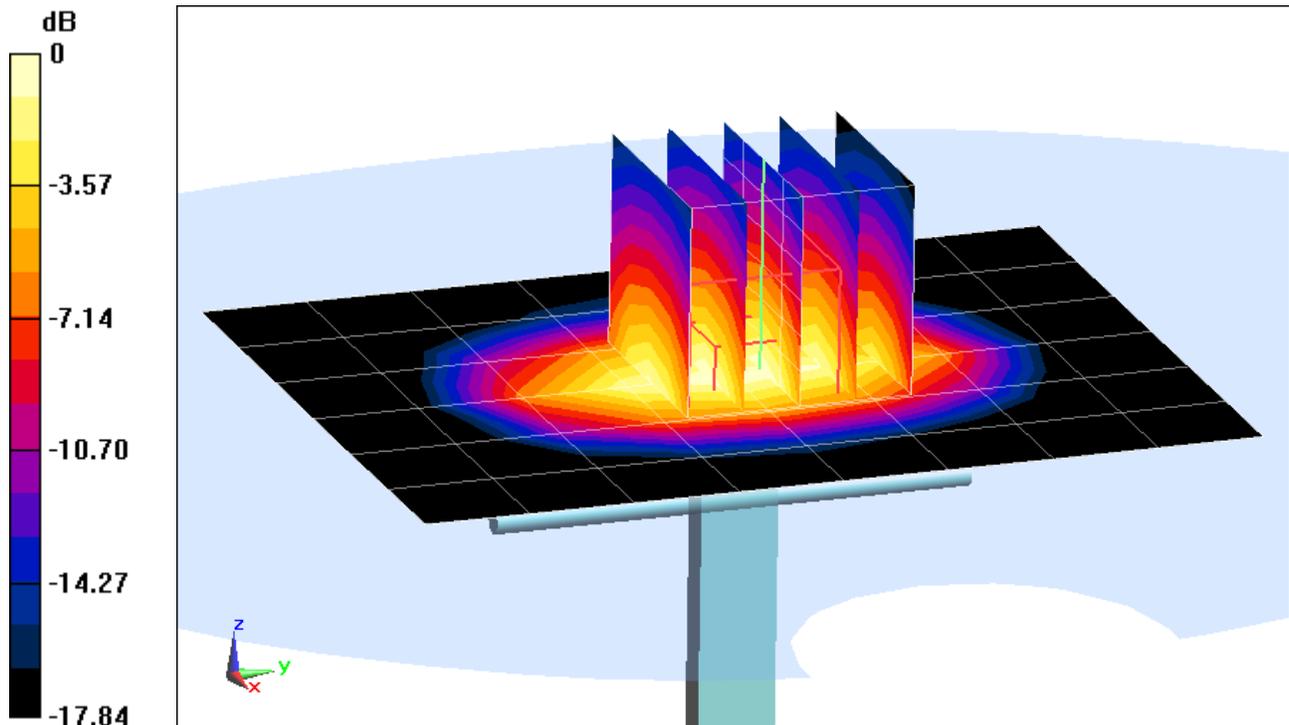

0 dB = 3.77 W/kg = 5.76 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.423 \text{ S/m}$ ;  $\epsilon_r = 40.085$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3258; ConvF(5.04, 5.04, 5.04); Calibrated: 2/25/2014;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.39 W/kg

**SAR(1 g) = 3.98 W/kg**

Deviation = -1.49%

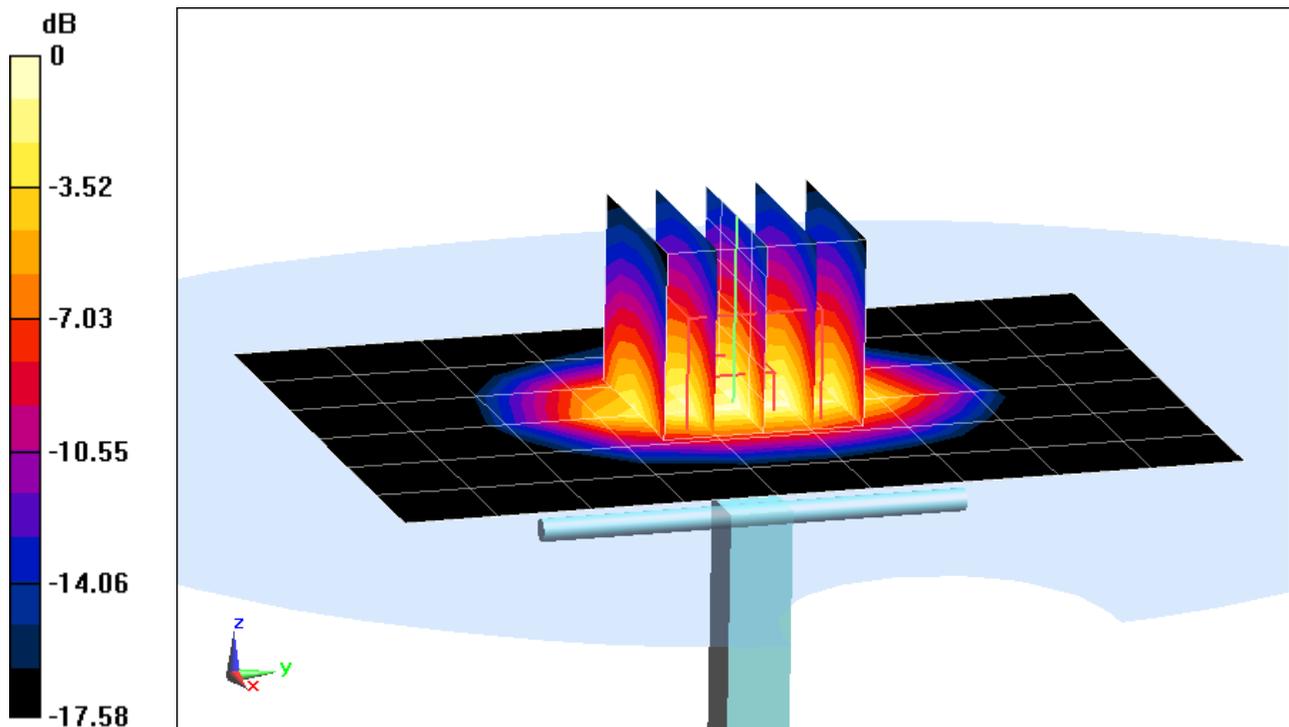

0 dB = 4.48 W/kg = 6.51 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.858 \text{ S/m}$ ;  $\epsilon_r = 38.63$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-31-2014; Ambient Temp: 24.3°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3589; ConvF(6.45, 6.45, 6.45); Calibrated: 1/29/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/22/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 2450 MHz System Verification

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 16 dBm (40 mW)

Peak SAR (extrapolated) = 4.34 W/kg

**SAR(1 g) = 2.12 W/kg**

Deviation = -0.38%

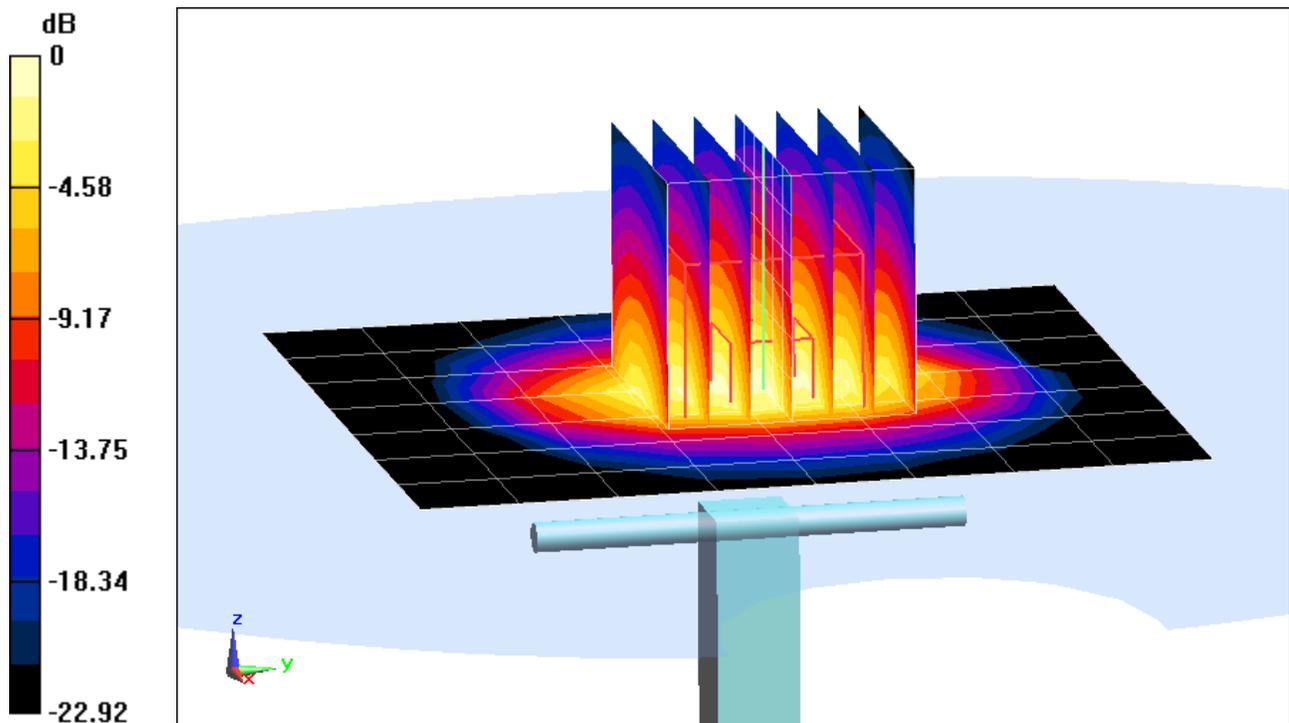

0 dB = 2.79 W/kg = 4.46 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 2.027 \text{ S/m}$ ;  $\epsilon_r = 38.036$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-31-2014; Ambient Temp: 24.3°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN3589; ConvF(6.24, 6.24, 6.24); Calibrated: 1/29/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/22/2014

Phantom: SAM; Type: QD000P40CD; Serial: TP:1758

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 2600 MHz System Verification

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 16 dBm (40 mW)

Peak SAR (extrapolated) = 5.12 W/kg

**SAR(1 g) = 2.33 W/kg**

Deviation = 0.09%

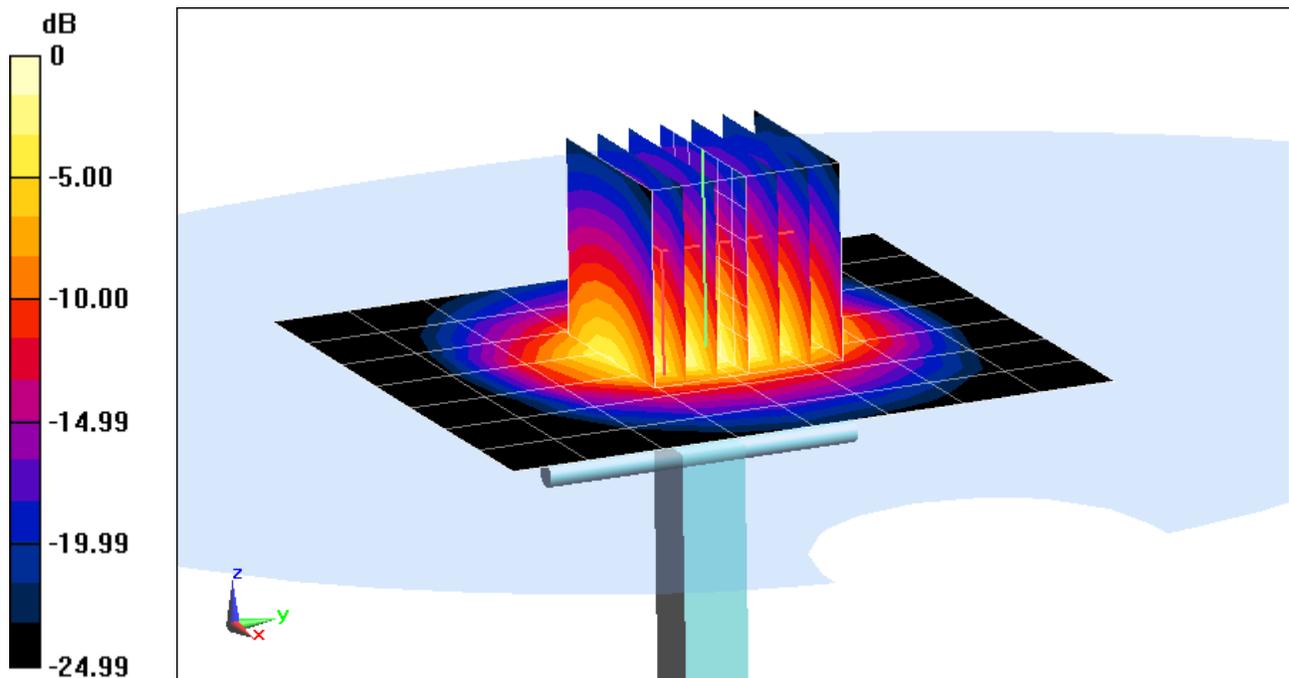

0 dB = 3.07 W/kg = 4.87 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5200 \text{ MHz}$ ;  $\sigma = 4.615 \text{ S/m}$ ;  $\epsilon_r = 36.682$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3914; ConvF(4.99, 4.99, 4.99); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 5200 MHz System Verification

**Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 16 dBm (40 mW)

Peak SAR (extrapolated) = 12.3 W/kg

**SAR(1 g) = 2.97 W/kg**

Deviation = -4.81%

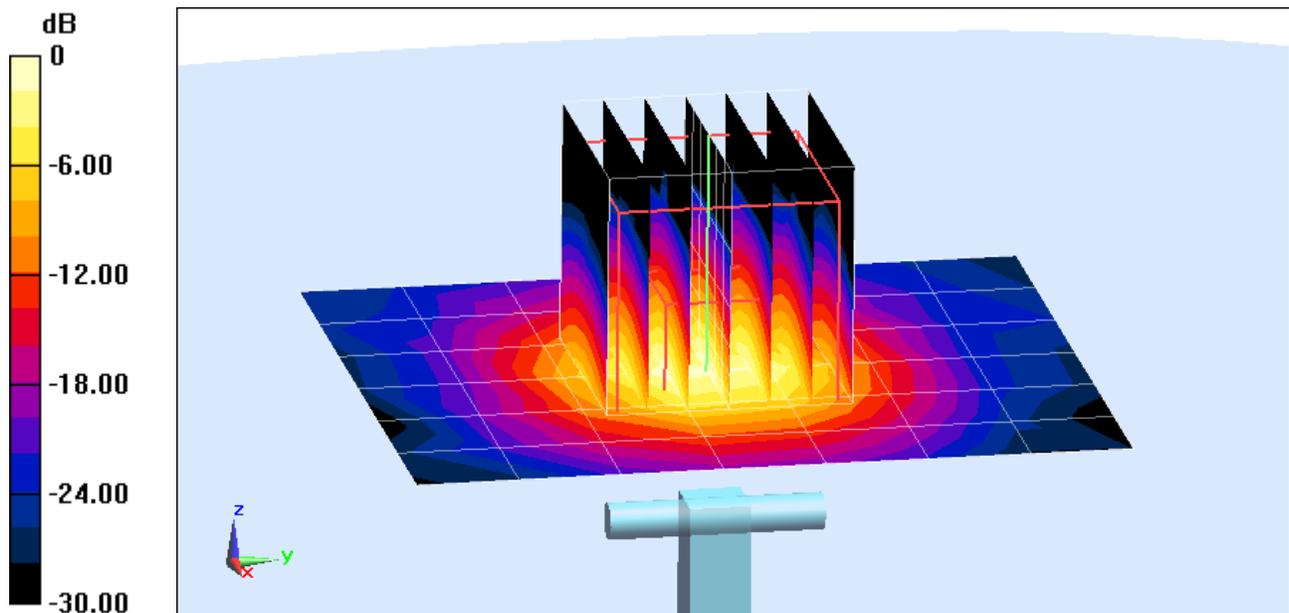

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 5300 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5300 \text{ MHz}$ ;  $\sigma = 4.722 \text{ S/m}$ ;  $\epsilon_r = 36.559$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.4°C; Tissue Temp: 23.8°C

Probe: EX3DV4 - SN3914; ConvF(4.82, 4.82, 4.82); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 5300 MHz System Verification

**Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4

Input Power = 16 dBm (40 mW)

Peak SAR (extrapolated) = 13.2 W/kg

**SAR(1 g) = 3.06 W/kg**

Deviation = -7.83%

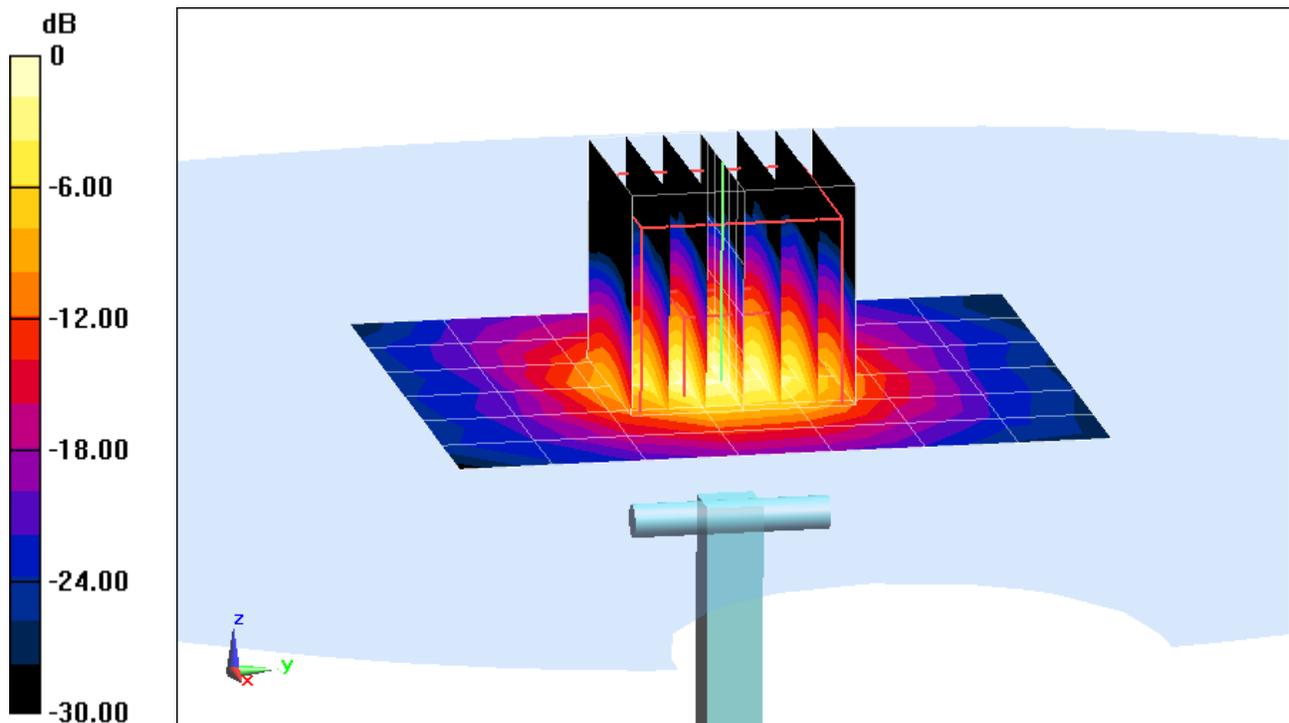

0 dB = 7.82 W/kg = 8.93 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 4.943 \text{ S/m}$ ;  $\epsilon_r = 36.315$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.5°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3914; ConvF(4.55, 4.55, 4.55); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 5500 MHz System Verification

**Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4

Input Power = 16 dBm (40 mW)

Peak SAR (extrapolated) = 14.9 W/kg

**SAR(1 g) = 3.41 W/kg**

Deviation = 1.13%

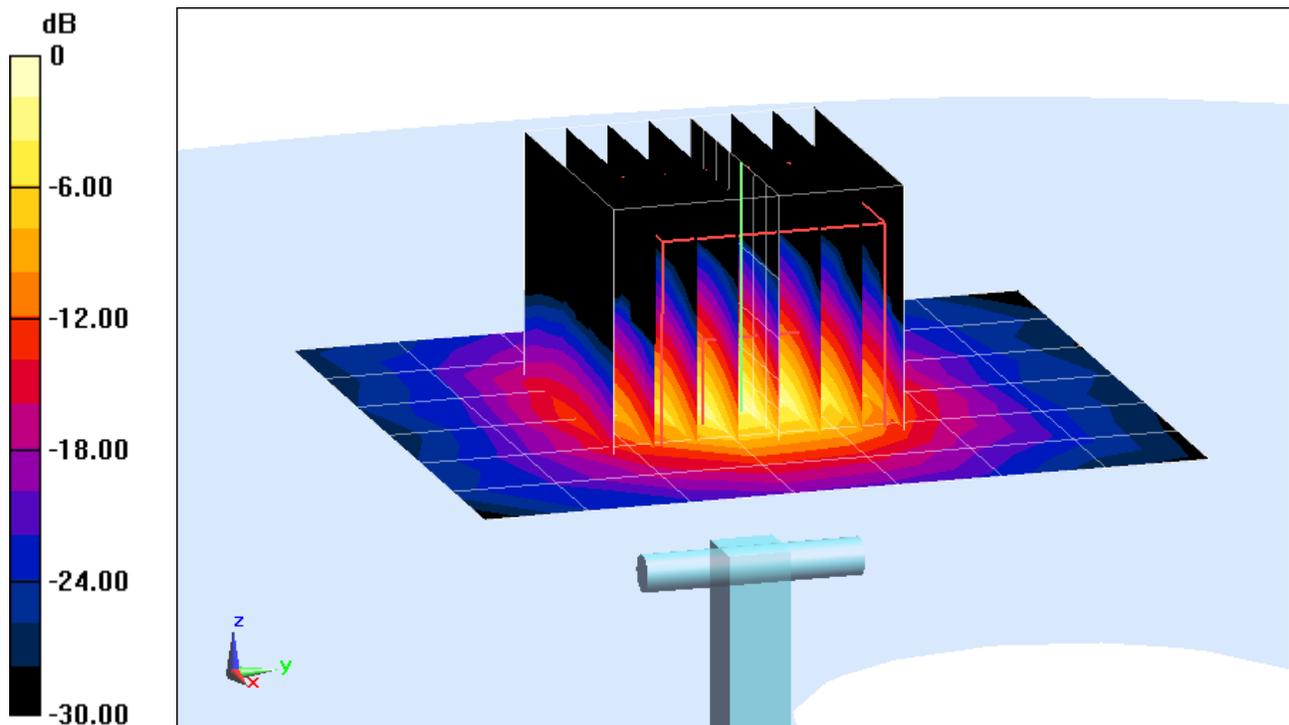

0 dB = 8.76 W/kg = 9.43 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 5600 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5600 \text{ MHz}$ ;  $\sigma = 5.033 \text{ S/m}$ ;  $\epsilon_r = 36.176$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.5°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3914; ConvF(4.37, 4.37, 4.37); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 5600 MHz System Verification

**Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4

Input Power = 16 dBm (40 mW)

Peak SAR (extrapolated) = 13.9 W/kg

**SAR(1 g) = 3.16 W/kg**

Deviation = -5.39%

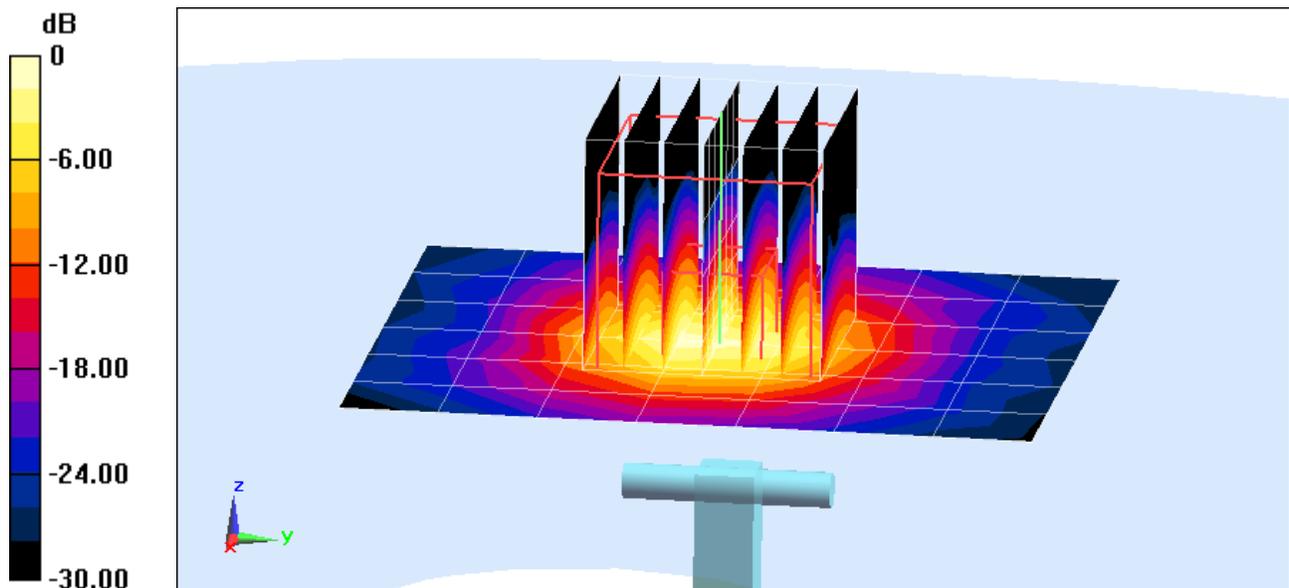

0 dB = 8.15 W/kg = 9.11 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used:

$f = 5800 \text{ MHz}$ ;  $\sigma = 5.241 \text{ S/m}$ ;  $\epsilon_r = 35.971$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3914; ConvF(4.52, 4.52, 4.52); Calibrated: 10/23/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/19/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 5800 MHz System Verification

**Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4

Input Power = 16 dBm (40 mW)

Peak SAR (extrapolated) = 14.0 W/kg

**SAR(1 g) = 2.96 W/kg**

Deviation = -6.68%

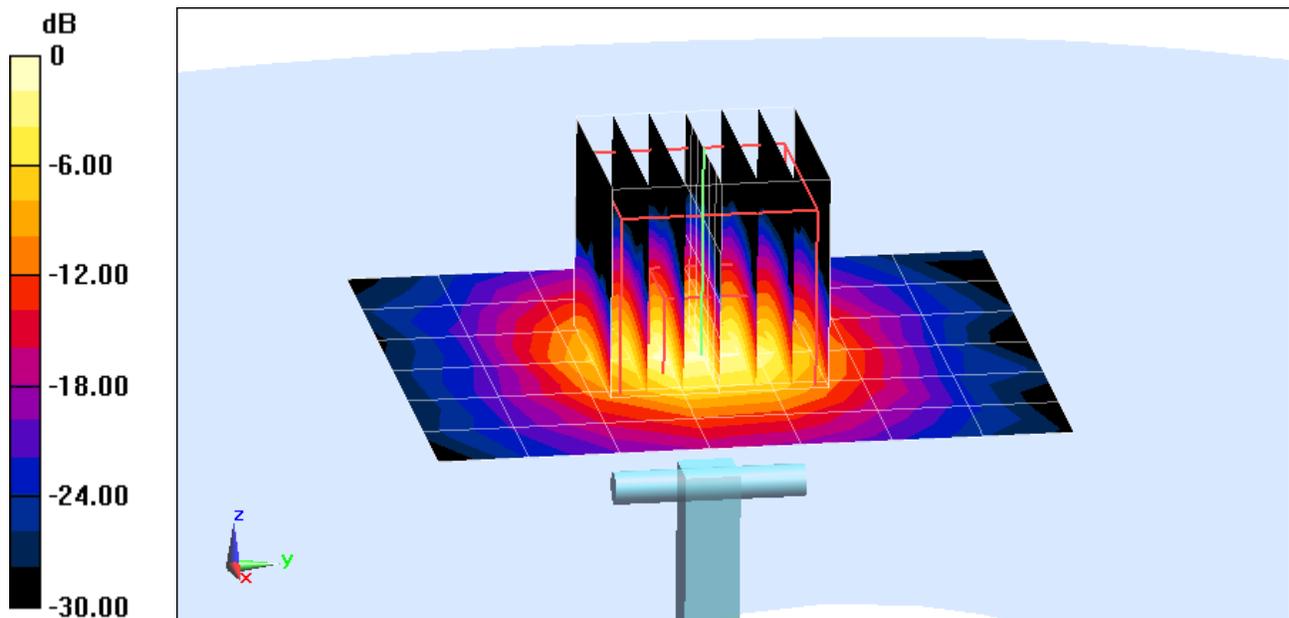

0 dB = 7.87 W/kg = 8.96 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.994 \text{ S/m}$ ;  $\epsilon_r = 56.108$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-02-2014; Ambient Temp: 24.5°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3333; ConvF(6.11, 6.11, 6.11); Calibrated: 11/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 11/19/2013

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 750 MHz System Verification

**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.846 W/kg**

Deviation = -3.53%

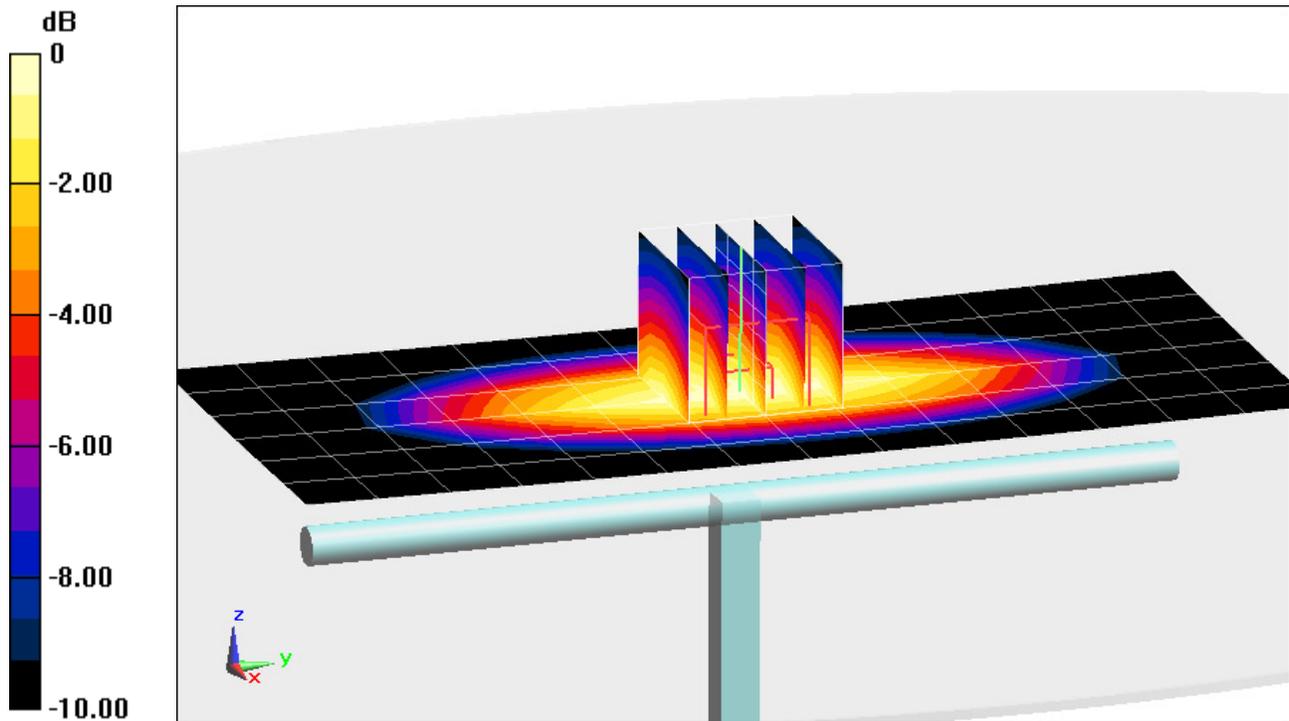

0 dB = 0.914 W/kg = -0.39 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.961 \text{ S/m}$ ;  $\epsilon_r = 53.211$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3288; ConvF(6.27, 6.27, 6.27); Calibrated: 9/23/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2013

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 835MHz System Verification

**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.969 W/kg**

Deviation = 0.83%

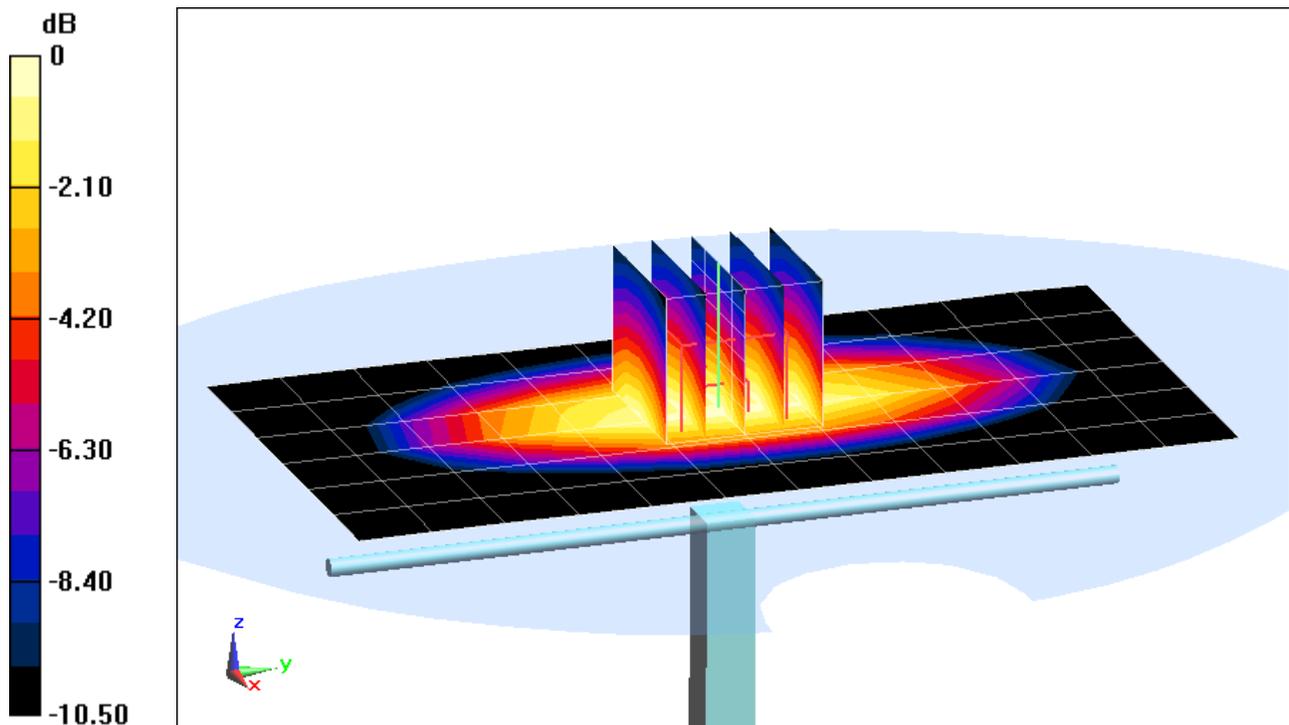

0 dB = 1.04 W/kg = 0.17 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1008**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.511 \text{ S/m}$ ;  $\epsilon_r = 51.91$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-31-2014; Ambient Temp: 23.3°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3263; ConvF(5.01, 5.01, 5.01); Calibrated: 5/16/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/13/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 1750 MHz System Verification

**Area Scan (6x8x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.52 W/kg

**SAR(1 g) = 4.09 W/kg**

Deviation = 7.07%

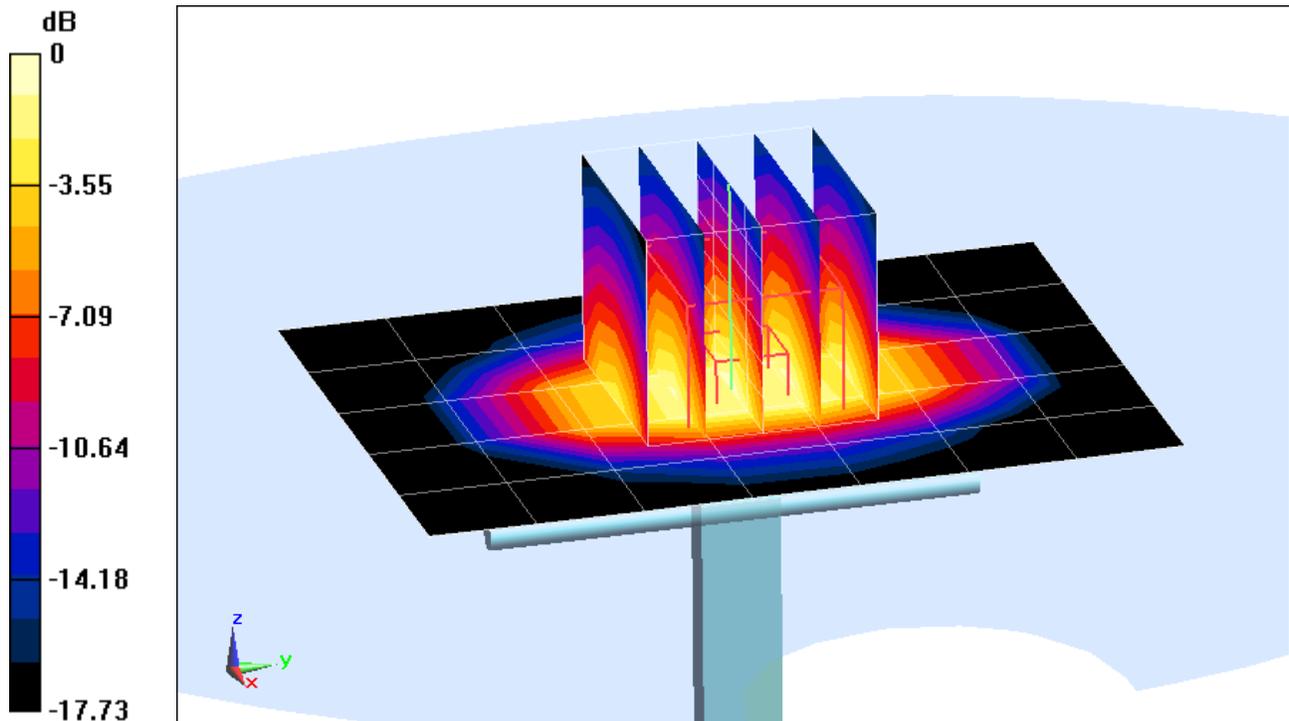

0 dB = 4.57 W/kg = 6.60 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.567 \text{ S/m}$ ;  $\epsilon_r = 51.102$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-03-2014; Ambient Temp: 24.3°C; Tissue Temp: 23.9°C

Probe: ES3DV2 - SN3022; ConvF(4.49, 4.49, 4.49); Calibrated: 8/22/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/21/2013

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 1900 MHz System Verification

**Area Scan (7x10x1):** Measurement grid: dx=15mm, dy=15mm


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.70 W/kg

**SAR(1 g) = 4.28 W/kg**

Deviation = 5.68%

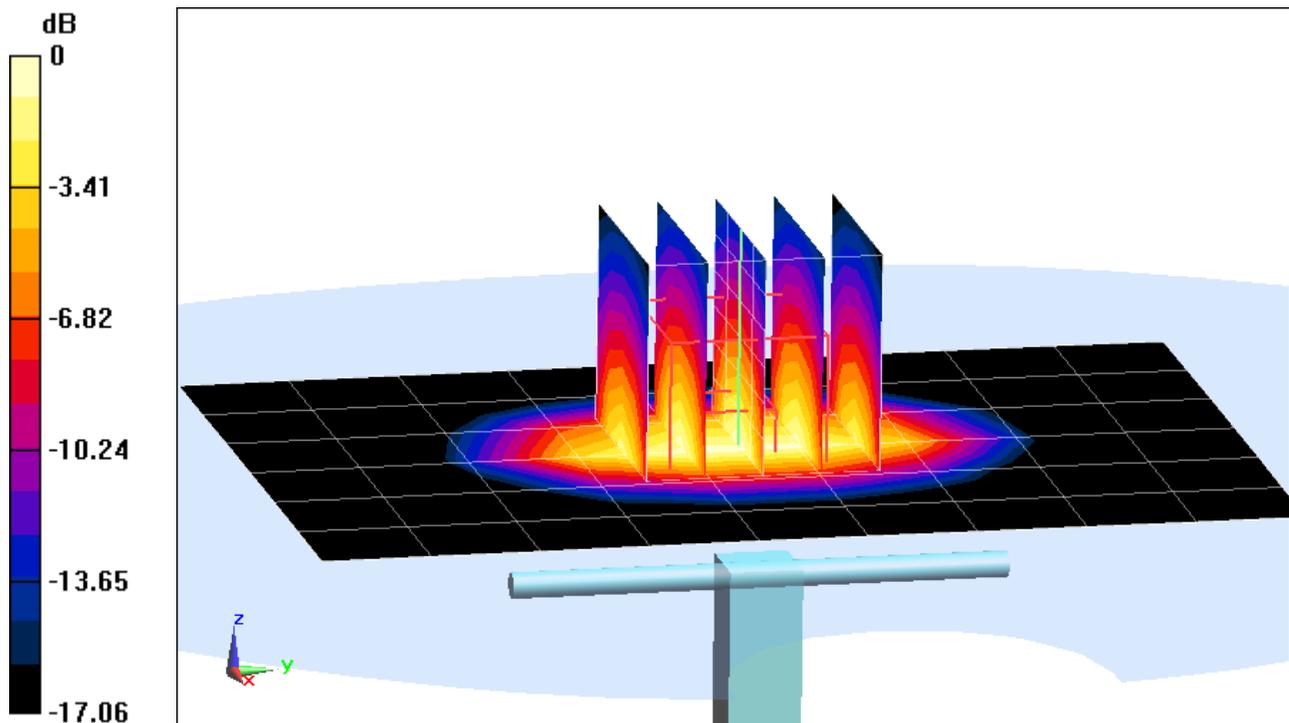

0 dB = 4.82 W/kg = 6.83 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 2.038 \text{ S/m}$ ;  $\epsilon_r = 51.977$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.4°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3258; ConvF(4.14, 4.14, 4.14); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 2450 MHz System Verification

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 16 dBm (40 mW)

Peak SAR (extrapolated) = 4.46 W/kg

**SAR(1 g) = 2.13 W/kg**

Deviation = 3.00%

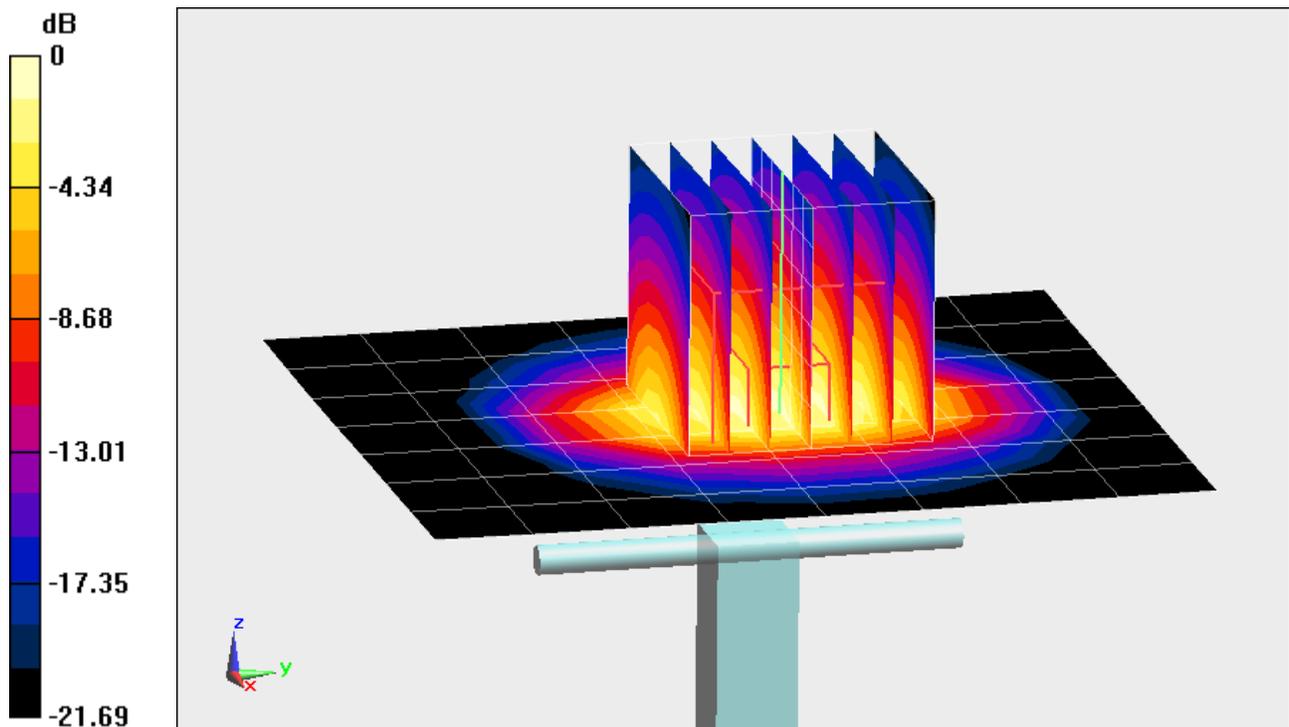

0 dB = 2.78 W/kg = 4.44 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 2.243 \text{ S/m}$ ;  $\epsilon_r = 51.398$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2014; Ambient Temp: 24.4°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3258; ConvF(3.91, 3.91, 3.91); Calibrated: 2/25/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/26/2014

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## 2600 MHz System Verification

**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 16 dBm (40 mW)

Peak SAR (extrapolated) = 5.41 W/kg

**SAR(1 g) = 2.37 W/kg**

Deviation = 3.04%

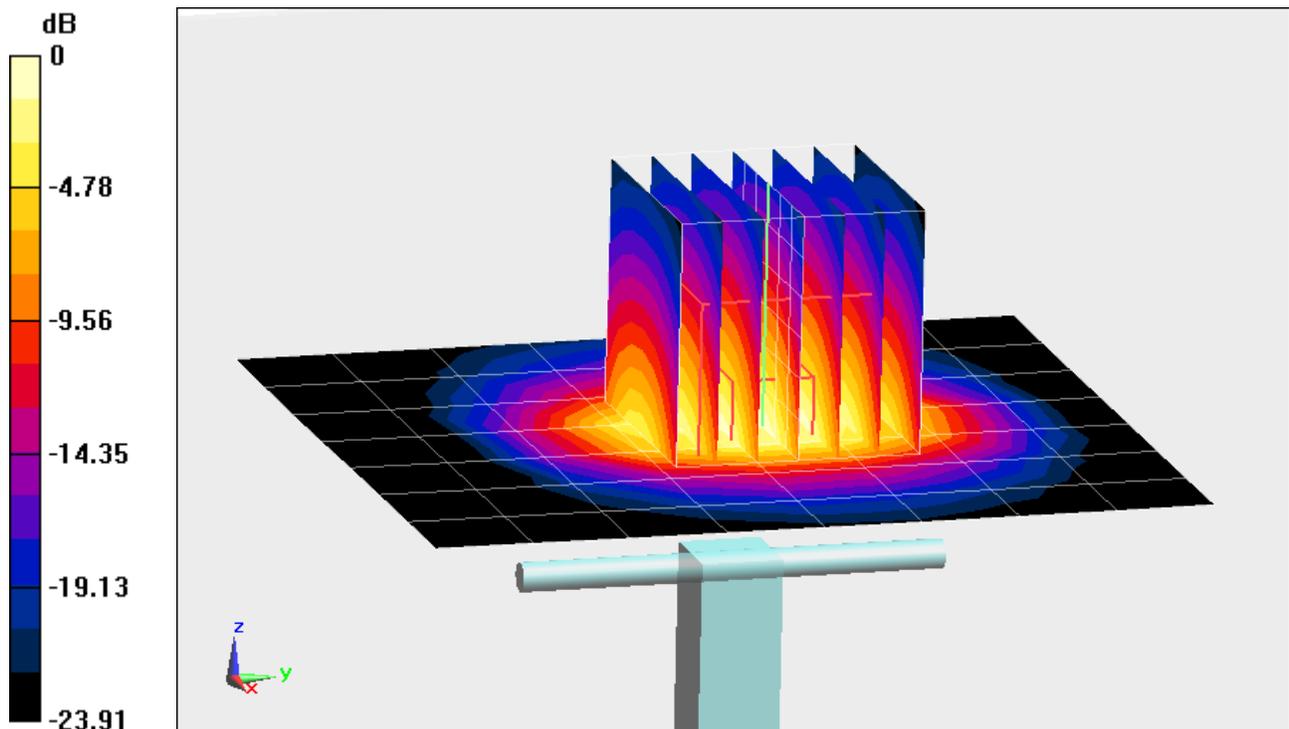

0 dB = 3.17 W/kg = 5.01 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1007**

Communication System: UID 0, CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5200 \text{ MHz}$ ;  $\sigma = 5.271 \text{ S/m}$ ;  $\epsilon_r = 48.586$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.8°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3920; ConvF(4.23, 4.23, 4.23); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 5200MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 28.4 W/kg

**SAR(1 g) = 7.58 W/kg**

Deviation = 4.41%

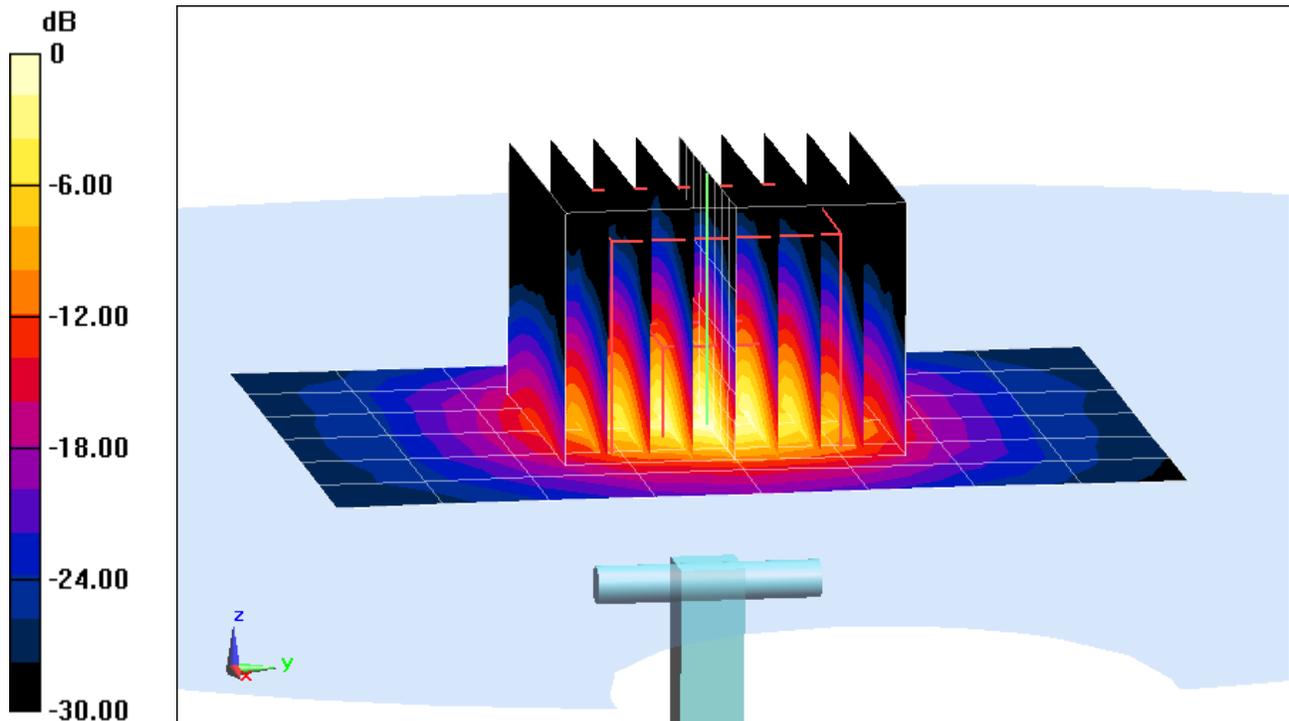

0 dB = 19.2 W/kg = 12.83 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1007**

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5300 \text{ MHz}$ ;  $\sigma = 5.431 \text{ S/m}$ ;  $\epsilon_r = 48.317$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.8°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3920; ConvF(4.11, 4.11, 4.11); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 5300MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 31.6 W/kg

**SAR(1 g) = 7.94 W/kg**

Deviation = 6.29%

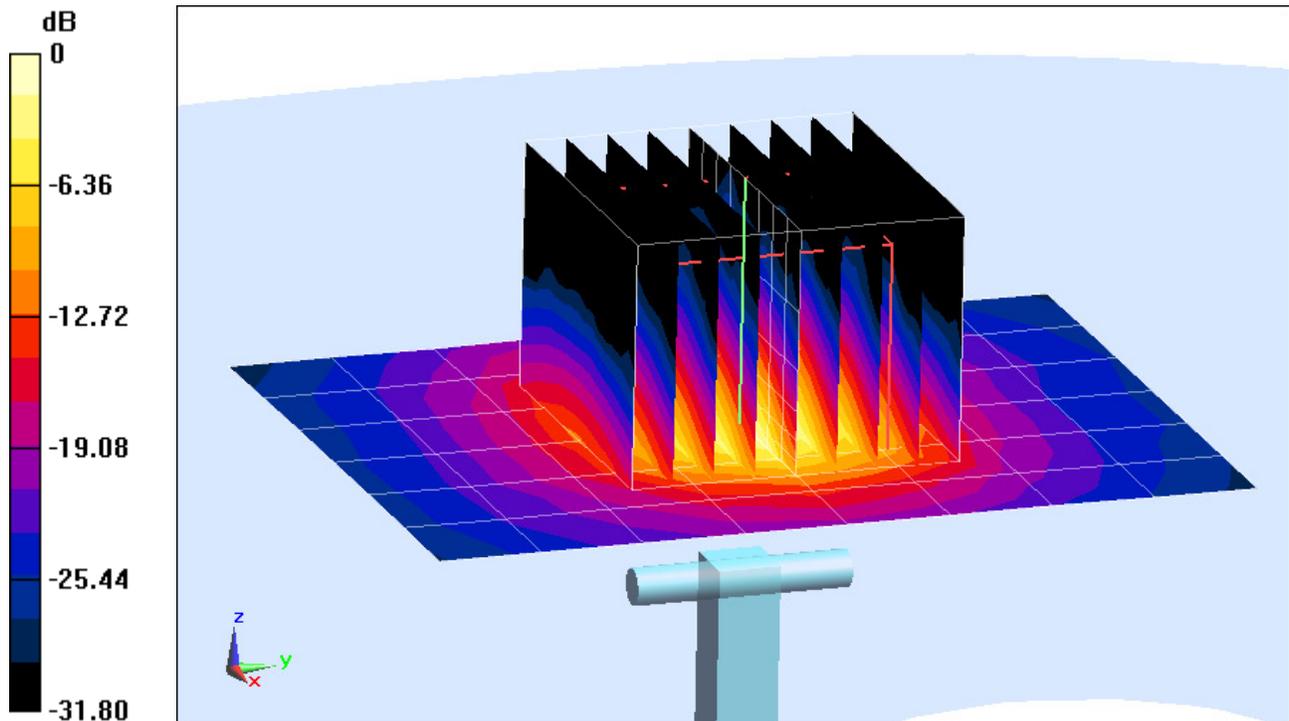

0 dB = 19.9 W/kg = 12.99 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1007**

Communication System: UID 0, CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 5.741 \text{ S/m}$ ;  $\epsilon_r = 47.868$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.8°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3920; ConvF(3.8, 3.8, 3.8); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 5500MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 34.5 W/kg

**SAR(1 g) = 7.74 W/kg**

Deviation = 1.98%

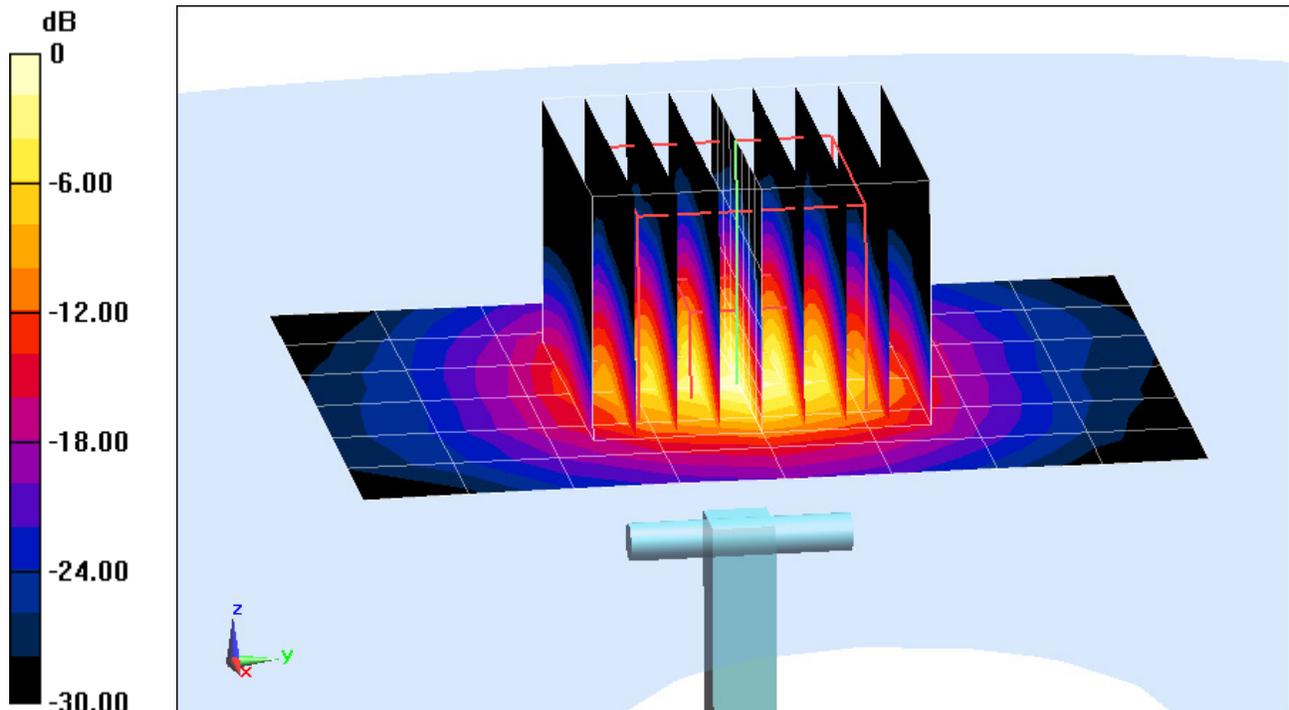

0 dB = 20.9 W/kg = 13.20 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1007**

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5800 \text{ MHz}$ ;  $\sigma = 6.18 \text{ S/m}$ ;  $\epsilon_r = 47.185$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-01-2014; Ambient Temp: 23.8°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3920; ConvF(4, 4, 4); Calibrated: 12/18/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 12/12/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

## 5800MHz System Verification

**Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm


**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio:1.4

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 33.1 W/kg

**SAR(1 g) = 7.46 W/kg**

Deviation = 2.33%

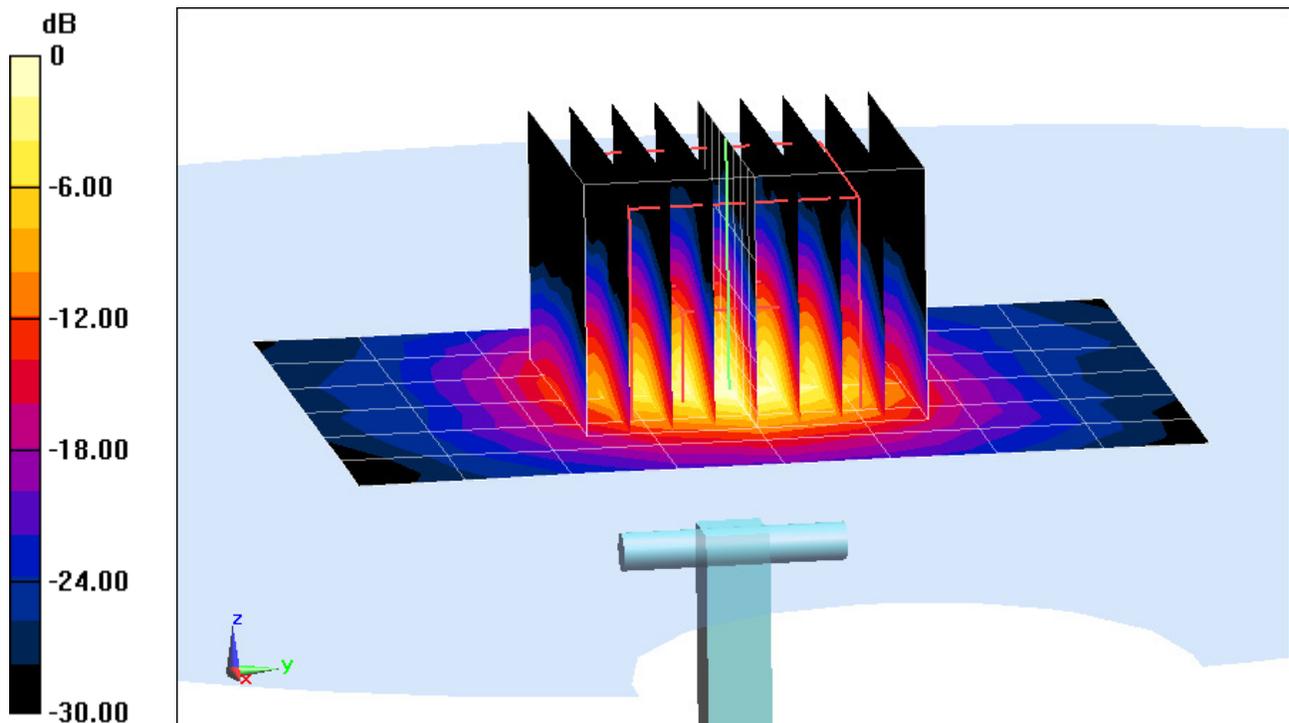

0 dB = 19.6 W/kg = 12.92 dBW/kg

## APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3287\_Nov13**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3287**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **November 20, 2013** ✓ CC 11/20/2013

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	4-Sep-13 (No. DAE4-660_Sep13)	Sep-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Kalja Pokovic	Technical Manager	

Issued: November 20, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ϑ = 0 is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- *NORM<sub>x,y,z</sub>*: Assessed for E-field polarization ϑ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). *NORM<sub>x,y,z</sub>* are only intermediate values, i.e., the uncertainties of *NORM<sub>x,y,z</sub>* does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)<sub>x,y,z</sub>* = *NORM<sub>x,y,z</sub>* \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP<sub>x,y,z</sub>*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A<sub>x,y,z</sub>*; *B<sub>x,y,z</sub>*; *C<sub>x,y,z</sub>*; *D<sub>x,y,z</sub>*; *VR<sub>x,y,z</sub>*: *A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM<sub>x,y,z</sub>* \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM<sub>x</sub>* (no uncertainty required).

# Probe ES3DV3

## SN:3287

Manufactured: June 7, 2010  
Calibrated: November 20, 2013

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.31	1.25	1.25	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	102.6	102.5	100.4	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	157.3	$\pm 2.7\%$
		Y	0.0	0.0	1.0		159.9	
		Z	0.0	0.0	1.0		152.5	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.23	57.9	9.9	10.00	45.7	$\pm 1.4\%$
		Y	2.13	57.6	9.8		46.6	
		Z	3.31	61.1	11.8		47.6	
10011- CAA	UMTS-FDD (WCDMA)	X	3.25	66.3	17.9	2.91	124.8	$\pm 0.5\%$
		Y	3.16	65.7	17.4		127.4	
		Z	3.15	65.5	17.4		122.8	
10012- CAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	3.08	68.7	18.3	1.87	127.2	$\pm 0.7\%$
		Y	3.03	68.2	17.9		129.4	
		Z	2.87	67.0	17.3		126.5	
10021- DAA	GSM-FDD (TDMA, GMSK)	X	15.99	90.6	25.0	9.39	99.9	$\pm 1.2\%$
		Y	12.41	86.6	23.6		101.5	
		Z	29.18	99.9	28.5		109.2	
10023- DAA	GPRS-FDD (TDMA, GMSK, TN 0)	X	25.67	98.9	27.8	9.57	97.9	$\pm 1.7\%$
		Y	14.20	88.5	24.3		100.6	
		Z	27.68	99.8	28.8		107.7	
10024- DAA	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	42.95	99.6	24.9	6.56	124.4	$\pm 1.4\%$
		Y	45.27	99.9	24.8		128.8	
		Z	42.64	99.6	25.5		135.7	
10027- DAA	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	27.78	91.3	21.1	4.80	136.0	$\pm 1.4\%$
		Y	32.74	93.9	21.9		146.6	
		Z	23.93	89.5	21.1		144.8	
10028- DAA	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	59.17	99.6	22.4	3.55	142.5	$\pm 1.2\%$
		Y	78.76	99.7	21.7		104.9	
		Z	38.06	94.2	21.4		148.8	
10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	93.35	99.7	19.5	1.16	108.1	$\pm 0.9\%$
		Y	96.67	94.0	16.9		114.7	
		Z	98.17	96.2	18.2		108.9	
10039- CAA	CDMA2000 (1xRTT, RC1)	X	4.84	66.7	18.8	4.57	126.5	$\pm 0.9\%$
		Y	4.83	66.6	18.6		134.4	
		Z	4.76	66.0	18.3		125.9	
10081- CAA	CDMA2000 (1xRTT, RC3)	X	4.00	66.2	18.5	3.97	121.9	$\pm 0.7\%$
		Y	3.91	65.5	17.9		128.9	
		Z	3.88	65.2	17.8		120.7	

10098-CAA	UMTS-FDD (HSUPA, Subtest 2)	X	4.66	66.6	18.4	3.98	132.5	±0.7 %
		Y	4.66	66.5	18.2		141.3	
		Z	4.54	65.9	17.9		130.7	
10100-CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	6.65	68.3	20.1	5.67	139.5	±1.4 %
		Y	6.69	68.3	19.9		148.9	
		Z	6.60	67.9	19.8		137.5	
10108-CAB	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	6.52	67.8	20.0	5.80	137.3	±1.4 %
		Y	6.53	67.6	19.7		147.5	
		Z	6.51	67.6	19.8		135.3	
10110-CAB	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	6.19	67.2	19.7	5.75	134.3	±1.2 %
		Y	6.24	67.3	19.6		142.9	
		Z	6.23	67.1	19.6		132.3	
10151-CAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	11.56	79.1	27.9	9.28	130.1	±3.0 %
		Y	11.01	76.8	26.2		141.9	
		Z	12.98	81.2	28.7		135.7	
10154-CAB	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	6.25	67.4	19.8	5.75	135.1	±1.2 %
		Y	6.17	66.9	19.3		143.6	
		Z	6.16	66.8	19.4		132.8	
10160-CAB	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	6.66	67.8	20.0	5.82	140.3	±1.4 %
		Y	6.72	67.9	19.9		148.8	
		Z	6.66	67.6	19.8		137.4	
10169-CAB	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.05	66.7	19.5	5.73	117.8	±0.9 %
		Y	4.93	66.0	18.9		125.0	
		Z	5.08	66.3	19.3		116.3	
10172-CAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	8.47	76.8	26.9	9.21	100.3	±2.2 %
		Y	8.06	74.6	25.3		107.5	
		Z	9.43	78.2	27.4		102.5	
10175-CAB	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.98	66.3	19.3	5.72	118.2	±0.9 %
		Y	4.96	66.1	19.0		119.9	
		Z	5.03	66.1	19.1		116.1	
10181-CAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	5.06	66.7	19.6	5.72	118.7	±0.9 %
		Y	4.97	66.2	19.1		120.0	
		Z	5.03	66.1	19.1		116.3	
10225-CAA	UMTS-FDD (HSPA+)	X	6.78	66.1	18.9	5.97	105.3	±1.2 %
		Y	6.68	65.7	18.6		106.8	
		Z	7.32	67.6	19.7		148.0	
10237-CAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	8.56	77.1	27.1	9.21	100.8	±1.9 %
		Y	8.33	75.8	26.1		103.8	
		Z	9.39	78.0	27.3		101.9	
10252-CAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	10.58	77.8	27.4	9.24	123.3	±2.5 %
		Y	10.48	76.9	26.5		128.1	
		Z	11.79	79.6	28.0		127.0	
10267-CAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	11.52	79.1	27.9	9.30	130.1	±2.7 %
		Y	11.24	77.7	26.9		136.0	
		Z	12.96	81.2	28.8		134.8	

10274-CAA	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	6.14	67.4	19.0	4.87	145.5	±1.2 %
		Y	6.19	67.4	19.0		149.2	
		Z	6.10	66.9	18.8		142.3	
10275-CAA	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	4.41	66.4	18.3	3.96	126.4	±0.7 %
		Y	4.43	66.3	18.2		130.4	
		Z	4.36	65.9	18.0		123.8	
10291-AAA	CDMA2000, RC3, SO55, Full Rate	X	3.57	65.9	17.9	3.46	120.0	±0.5 %
		Y	3.55	65.6	17.6		121.7	
		Z	3.50	65.1	17.5		117.2	
10292-AAA	CDMA2000, RC3, SO32, Full Rate	X	3.55	66.1	18.0	3.39	121.3	±0.5 %
		Y	3.54	66.0	17.8		123.6	
		Z	3.45	65.2	17.4		118.9	
10297-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.53	67.8	20.0	5.81	136.2	±1.2 %
		Y	6.48	67.5	19.6		139.3	
		Z	6.52	67.6	19.8		134.1	
10311-AAA	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	7.12	68.4	20.4	6.06	141.7	±1.4 %
		Y	7.11	68.3	20.1		145.3	
		Z	7.14	68.4	20.3		139.8	
10315-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	2.79	67.6	18.0	1.71	125.5	±0.5 %
		Y	2.71	66.9	17.3		128.2	
		Z	2.64	66.2	17.0		123.5	
10403-AAA	CDMA2000 (1xEV-DO, Rev. 0)	X	4.78	67.5	18.3	3.76	130.6	±0.5 %
		Y	4.77	67.5	18.2		133.8	
		Z	4.65	66.5	17.8		130.0	
10404-AAA	CDMA2000 (1xEV-DO, Rev. A)	X	4.83	68.2	18.6	3.77	129.2	±0.7 %
		Y	4.68	67.4	18.0		131.9	
		Z	4.52	66.3	17.7		128.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 7 and 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	6.52	6.52	6.52	0.47	1.46	± 12.0 %
835	41.5	0.90	6.30	6.30	6.30	0.40	1.59	± 12.0 %
1750	40.1	1.37	5.27	5.27	5.27	0.63	1.34	± 12.0 %
1900	40.0	1.40	5.08	5.08	5.08	0.62	1.37	± 12.0 %
2450	39.2	1.80	4.43	4.43	4.43	0.79	1.28	± 12.0 %
2600	39.0	1.96	4.29	4.29	4.29	0.77	1.38	± 12.0 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	55.5	0.96	6.09	6.09	6.09	0.55	1.37	± 12.0 %
835	55.2	0.97	6.04	6.04	6.04	0.55	1.39	± 12.0 %
1750	53.4	1.49	4.93	4.93	4.93	0.39	1.73	± 12.0 %
1900	53.3	1.52	4.67	4.67	4.67	0.38	1.75	± 12.0 %
2450	52.7	1.95	4.17	4.17	4.17	0.60	1.20	± 12.0 %
2600	52.5	2.16	4.00	4.00	4.00	0.60	1.10	± 12.0 %


<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

# Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

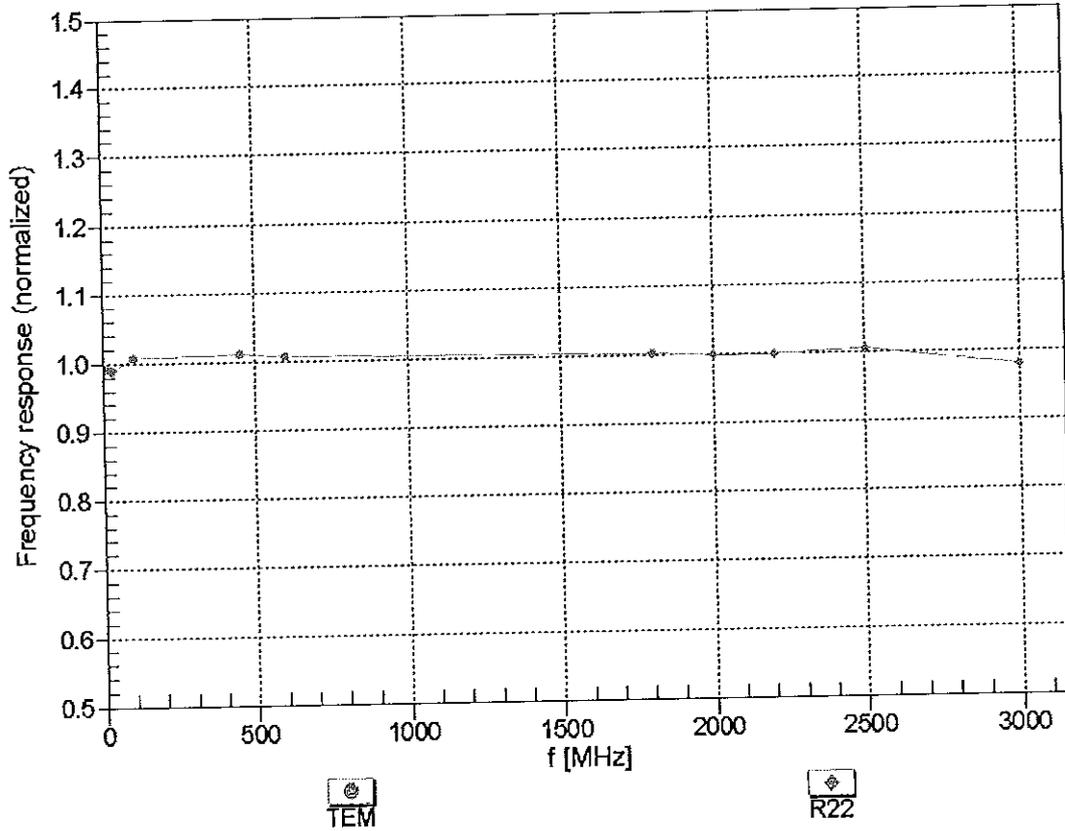



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz, TEM


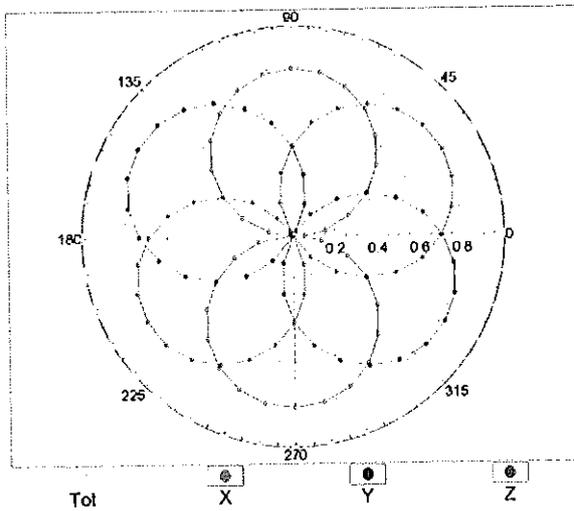


f=1800 MHz, R22

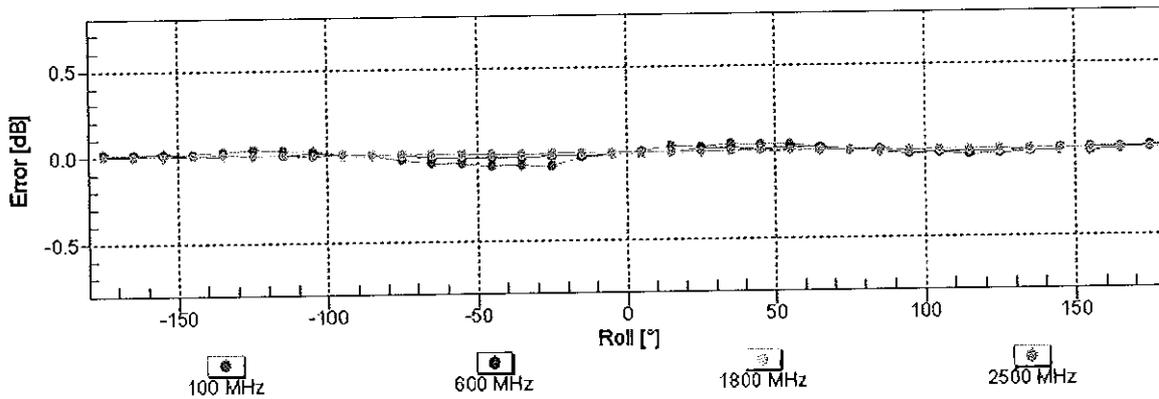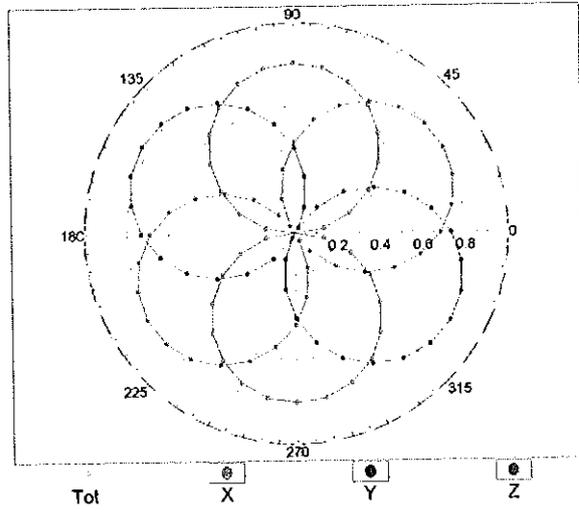


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f = 900 MHz)

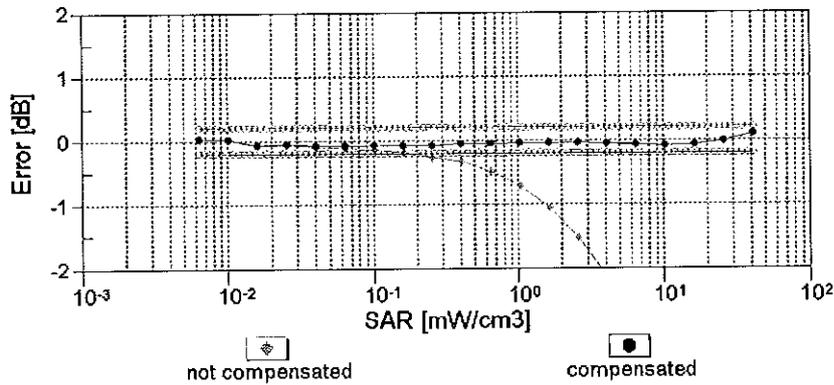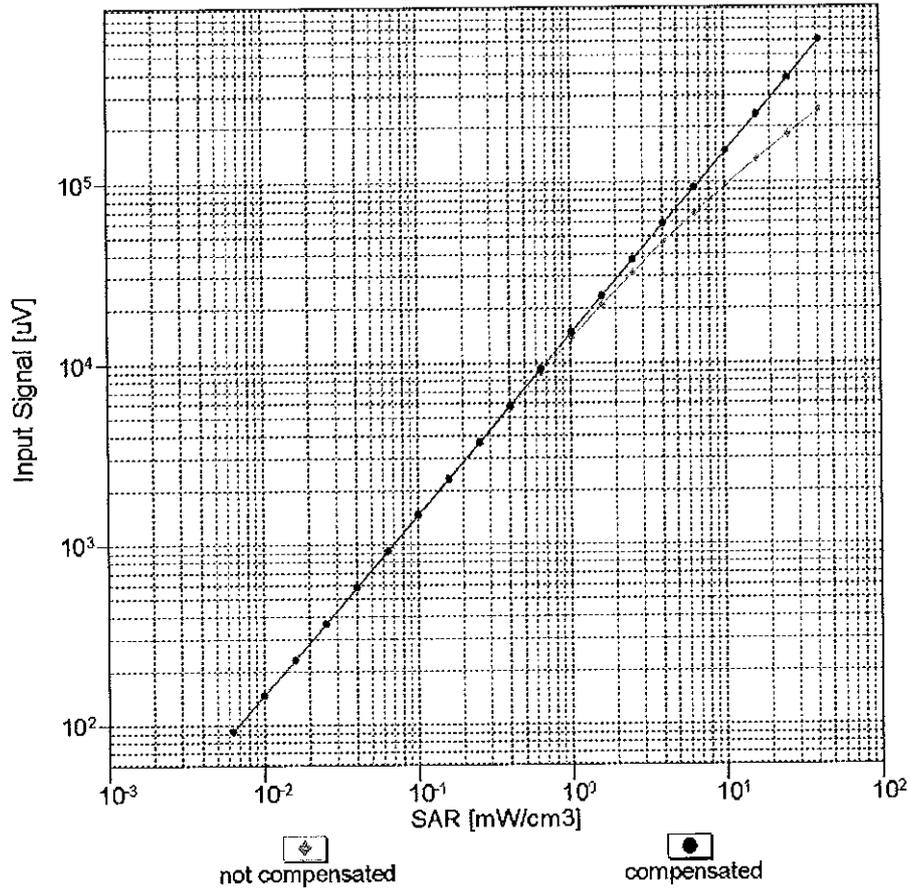



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

# Conversion Factor Assessment

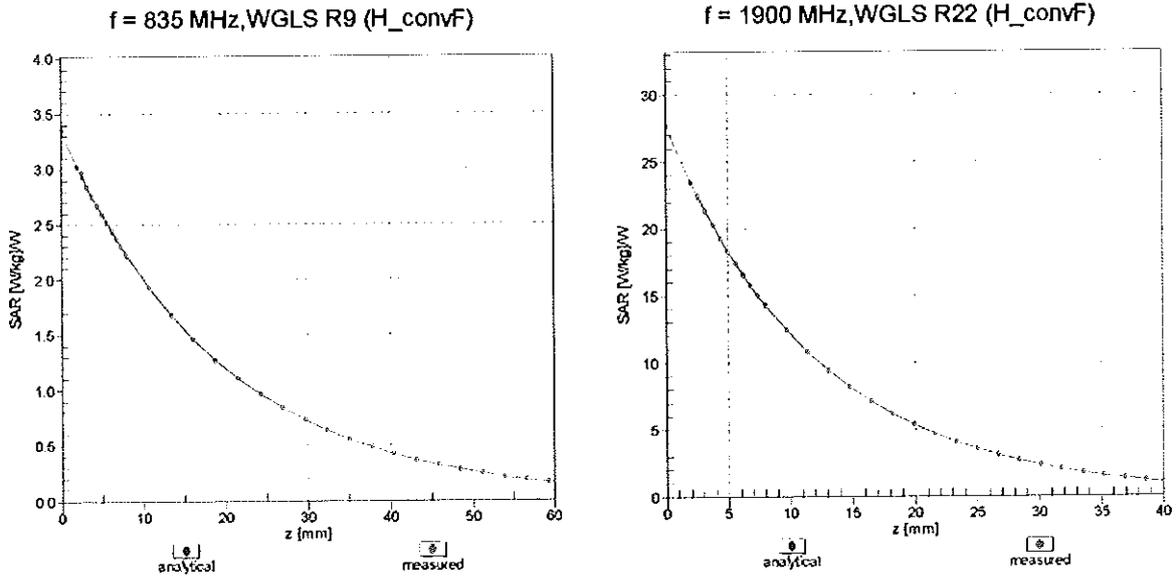

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ), f = 900 MHz

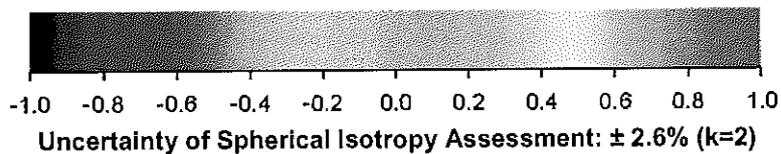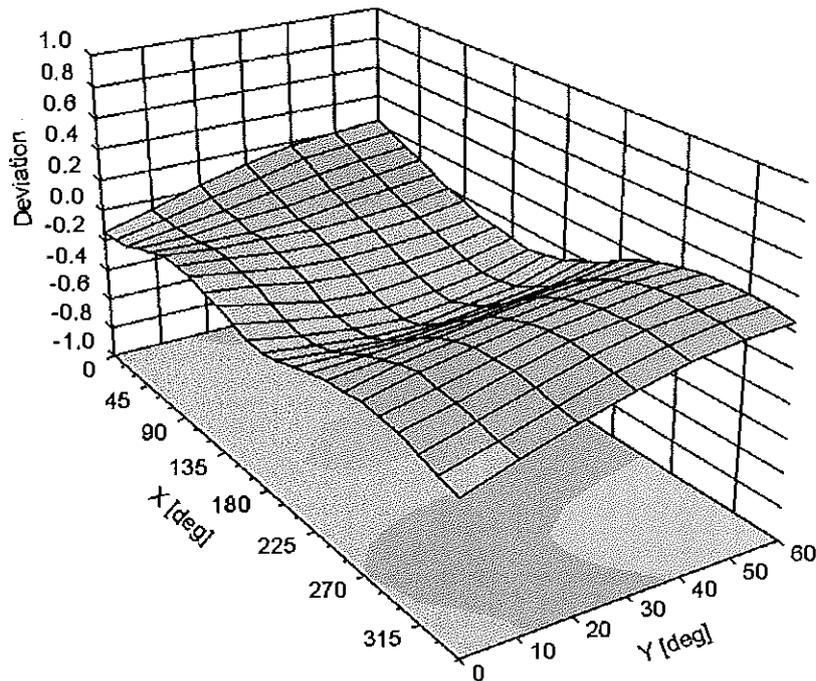

**DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	-15
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **ES3-3333\_Nov13**

**CALIBRATION CERTIFICATE**

Object **ES3DV3 - SN:3333**

Calibration procedure(s) **QA CAL 01.15, QA CAL 23.15, QA CAL 25.15  
Calibration procedure for dielectric E-field probes**

Calibration date: **November 22, 2013**

*KOK  
11/21/14*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	04-Apr-13 (No. 217-01733)	Apr-14
Power sensor E4412A	MY41498087	04-Apr-13 (No. 217-01733)	Apr-14
Reference 3 dB Attenuator	SN: S5054 (3c)	04-Apr-13 (No. 217-01737)	Apr-14
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-13 (No. 217-01735)	Apr-14
Reference 30 dB Attenuator	SN: S5129 (30b)	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV2	SN: 3013	28-Dec-12 (No. ES3-3013_Dec12)	Dec-13
DAE4	SN: 660	4-Sep-13 (No. DAE4-660_Sep13)	Sep-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-15
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-13)	In house check: Oct-14

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	<i>[Signature]</i>
Approved by:	Katja Pokovic	Technical Manager	<i>[Signature]</i>

Issued: November 25, 2013

This calibration certificate shell not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe ES3DV3

## SN:3333

Manufactured: January 24, 2012  
Calibrated: November 22, 2013

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.08	0.90	0.88	± 10.1 %
DCP (mV) <sup>B</sup>	104.9	103.3	101.7	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	140.9	±2.2 %
		Y	0.0	0.0	1.0		132.0	
		Z	0.0	0.0	1.0		170.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	6.56	6.56	6.56	0.44	1.54	± 12.0 %
850	41.5	0.92	6.30	6.30	6.30	0.46	1.48	± 12.0 %
1750	40.1	1.37	5.23	5.23	5.23	0.77	1.17	± 12.0 %
1900	40.0	1.40	5.05	5.05	5.05	0.80	1.19	± 12.0 %
2450	39.2	1.80	4.42	4.42	4.42	0.74	1.31	± 12.0 %
2600	39.0	1.96	4.28	4.28	4.28	0.80	1.30	± 12.0 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

### Calibration Parameter Determined in Body Tissue Simulating Media


f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	55.5	0.96	6.11	6.11	6.11	0.33	1.90	± 12.0 %
850	55.2	0.99	6.07	6.07	6.07	0.80	1.19	± 12.0 %
1750	53.4	1.49	4.95	4.95	4.95	0.80	1.26	± 12.0 %
1900	53.3	1.52	4.71	4.71	4.71	0.49	1.54	± 12.0 %
2450	52.7	1.95	4.22	4.22	4.22	0.80	0.95	± 12.0 %
2600	52.5	2.16	4.16	4.16	4.16	0.80	1.07	± 12.0 %

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)



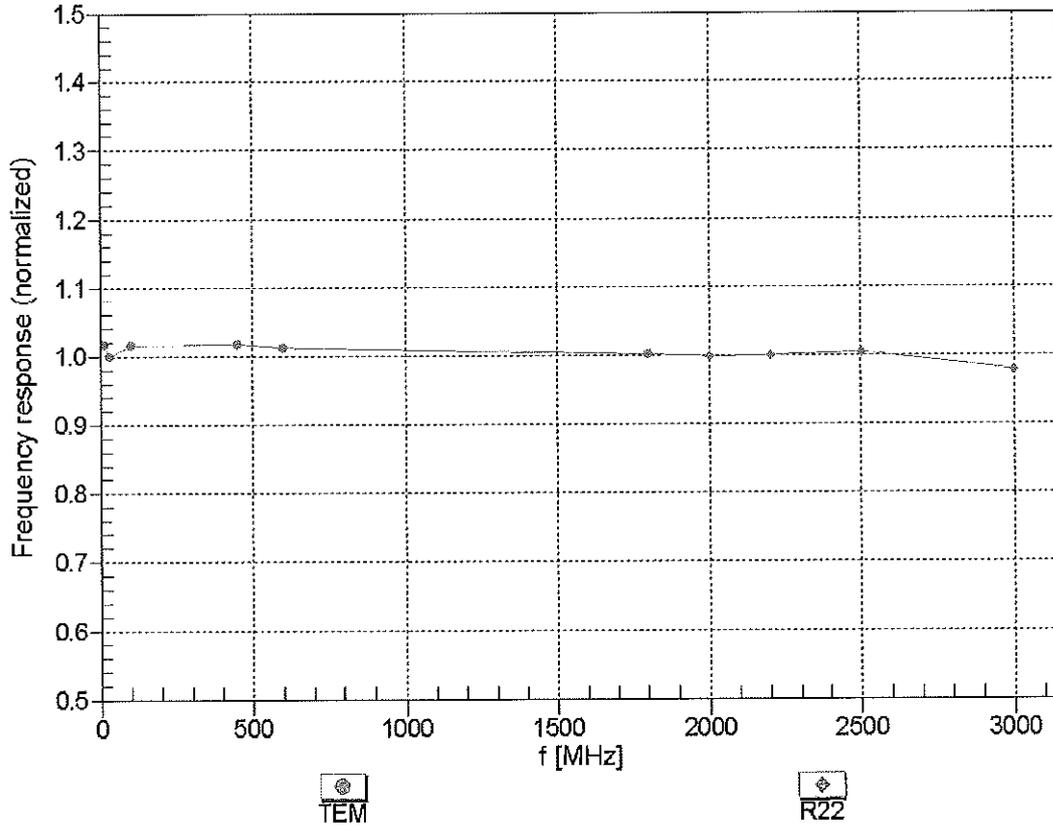


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

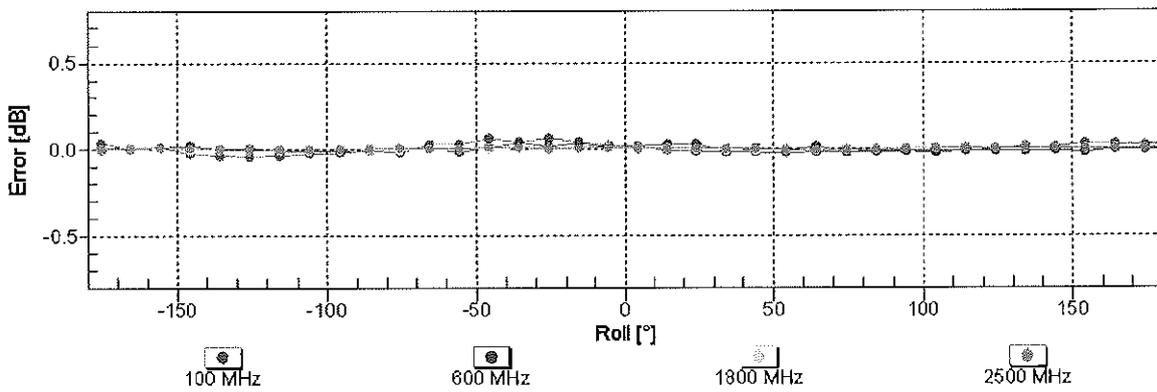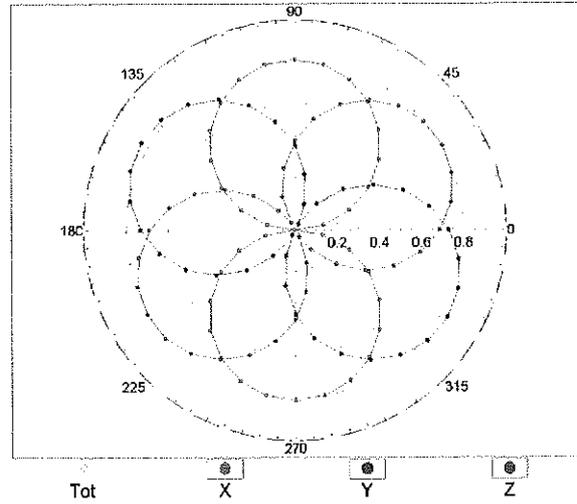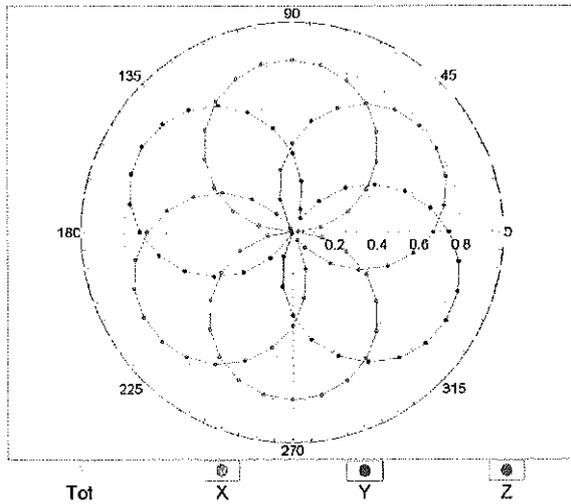


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

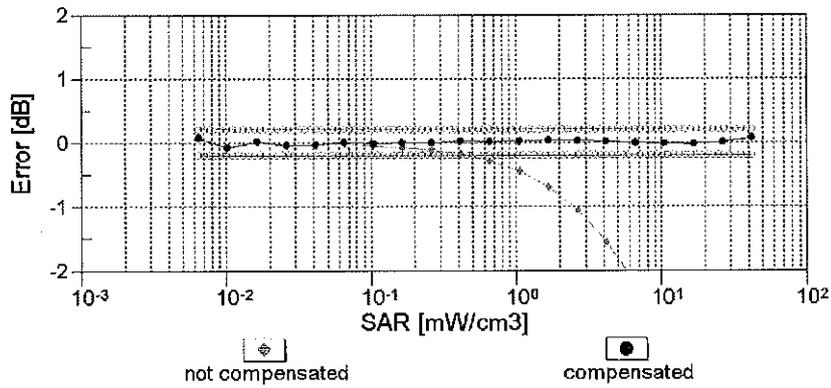
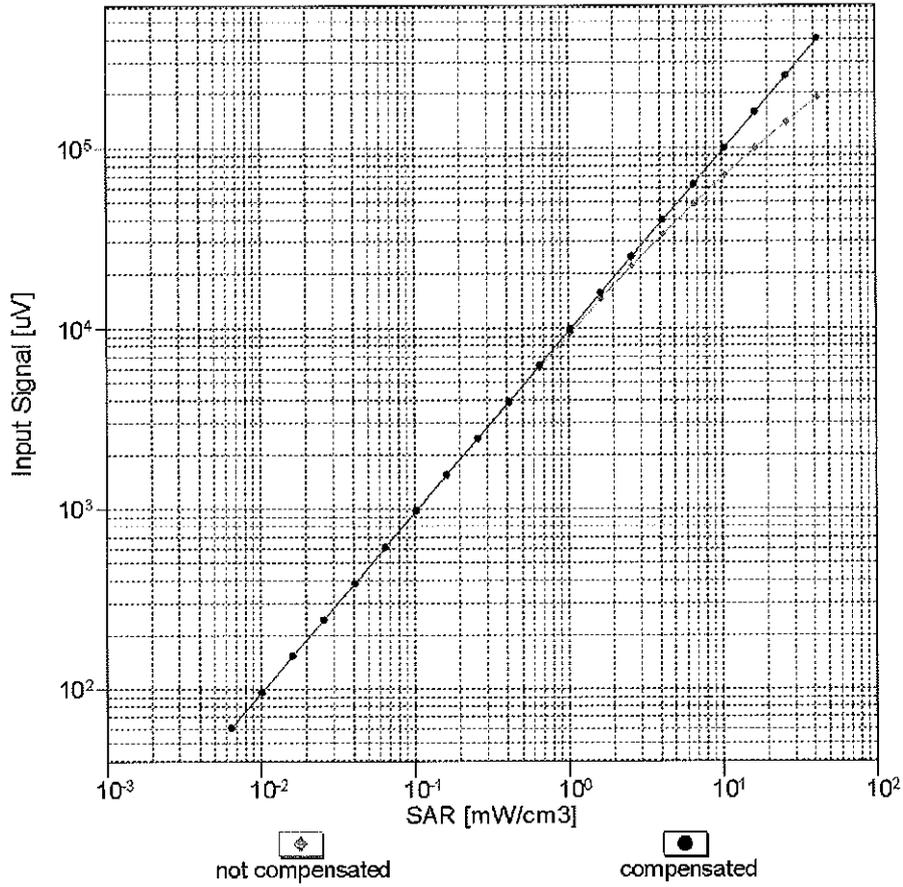


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

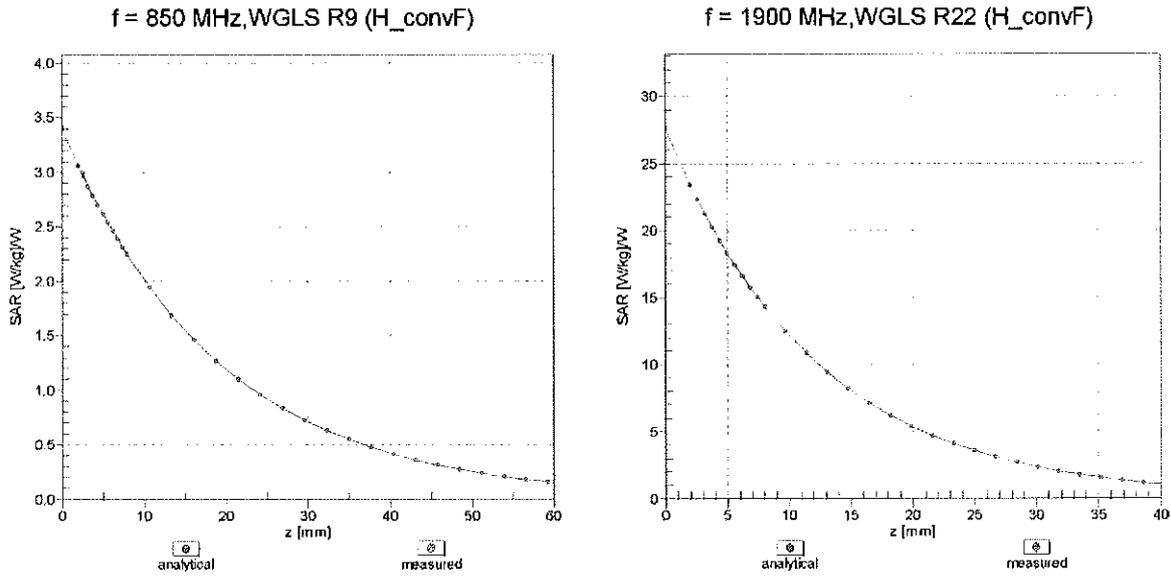

## Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), f = 900 MHz

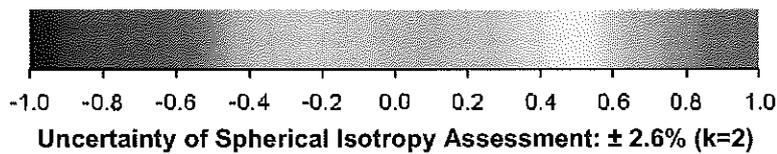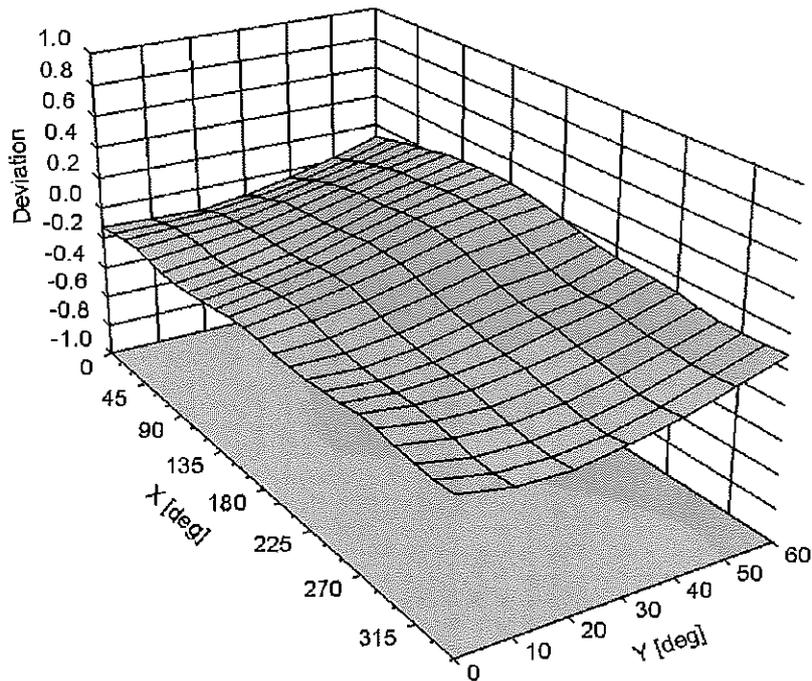

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3333

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-35.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm