



HCT CO., LTD.

CERTIFICATION DIVISION

74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA  
TEL: +82 31 645 6300 FAX: +82 31 645 6401

## EMI CERTIFICATION REPORT

**Applicant:**

LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Date of Issue: December 24, 2013**

**Test Report No.: HCTE1312FE07-1**

**Test Site: HCT CO., LTD.**

**HCT FRN: 0005-8664-21**

**FCC ID:**

**ZNFD956**

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B  
Equipment Type : Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with  
Bluetooth, WLAN and RFID  
Model Name : LG-D956  
Additional Model Name : D956, LGD956, LG-D951, D951, LGD951  
Port / Connector(s) : USB / Earphone Port  
Date of Test : December 09, 2013 - December 10, 2013

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4/2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Report prepared by  
: Gu-Cheol Yoon  
Test Engineer of EMC Team

Approved by  
: Sang-Jun Lee  
Manager of EMC Team

## DOCUMENT HISTORY

---

The revision history for this document is shown in table.

Version	Date	Description
HCTE1312FE07	December 12, 2013	Initial Release
HCTE1312FE07-1	December 24, 2013	Change EUT Type

## TABLE OF CONTENTS

---

	<b>PAGE</b>
1. GENERAL INFORMATION .....	4
1.1 Product Description .....	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Tested System Details.....	5
1.4 Cable Description .....	6
1.5 Noise Suppression Parts on Cable. (I/O cable) .....	6
1.6 Test Methodology .....	7
1.7 Test Facility .....	7
1.8 Frequency Range of Radiated Measurements .....	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 Configuration of Test System.....	8
3. PRELIMINARY TEST .....	9
3.1 Conducted Emission Test .....	9
3.2 Radiated Emission Test .....	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY .....	10
4.1 Conducted Emission Test .....	10
4.2 Radiated Emission Test .....	11
5. FIELD STRENGTH CALCULATION .....	17
6. TEST EQUIPMENT.....	18
7. CONCLUSION .....	19

**ATTACHMENT: TEST SETUP PHOTOGRAPHS**

## 1. GENERAL INFORMATION

### 1.1 Product Description

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**  
 Its basic purpose is used for communications.

<b>Model Name</b>	LG-D956
<b>Additional Model</b>	D956, LGD956, LG-D951, D951, LGD951
<b>FCC ID</b>	ZNFD956
<b>EUT Type</b>	Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID
<b>TX Frequency</b>	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 1 852.4 MHz to 1 907.6 MHz (WCDMA 1 900) 2 500 MHz to 2 570 MHz (LTE B7)
<b>RX Frequency</b>	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 1 932.4 MHz to 1 987.6 MHz (WCDMA 1 900) 2 620 MHz to 2 690 MHz (LTE B7)

### 1.2 Related Submittal(s) / Grant(s)

Original submittal only.

### 1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	LG-D956	LG	ZNFD956	Notebook PC Ear-phone
USB cable (USB2.0)	EAD62588801	CRESYN	-	E.U.T Notebook PC
Ear-phone	EAB62950101	LG	-	E.U.T
Notebook PC	ProBook6560b	H.P	DoC	EUT Notebook PC adaptor
Notebook PC adaptor	PPP009D	DELTA Electronics (JIANGSU)LTD	-	Notebook PC
Gateway	MV440	Axesstel	PH7MV440	Notebook PC, Adaptor
Mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
Adaptor	DA-60M12	Yang Ming Industrial	-	Gateway
RJ45 cable	-	-	-	Notebook PC, Gateway

### 1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.0
	Ear-phone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

\* The marked "(D)" means the data cable and "(P)" means the power cable.

### 1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Ear-phone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End

## 1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to EUT distance of 3 m.

## 1.7 Test Facility

Chamber used to collect the test data is located at the 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA. Those measurement facilities are constructed in conformance with the requirements of C63.4/2003.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3m)	90661 (June 21, 2011)
Radiated Field strength measurement facility (10m)	90661 (June 21, 2011)

## 1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

## 2. SYSTEM TEST CONFIGURATION

### 2.1 Configuration of Test System


#### 2.1.1 Conducted Emission Test

EUT was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

#### 2.1.2 Radiated Emission Test

Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[ Configuration of Tested System ]

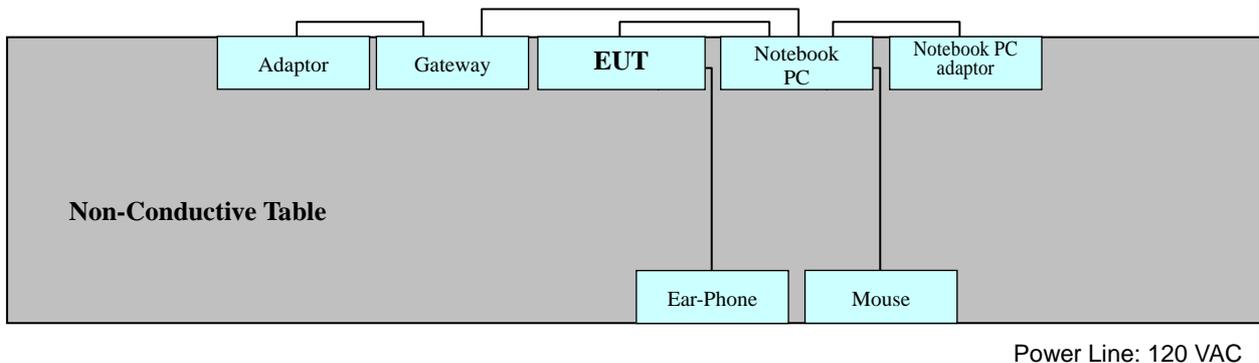

### **3. PRELIMINARY TEST**

---

#### **3.1 Conducted Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**       Data Communication mode

#### **3. 2 Radiated Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**       Data Communication mode

## 4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data Communication mode
Temperature	: 20.1°C
Humidity Level	: 38.6 %
Test Date	: December 09, 2013

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit	Measurement Level	Result Level	Limit	Measurement Level	Result Level
			(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)
0.198	10.0	N	64	41.0	51.0	54	24.5	34.5
0.202	9.8	H	64	38.1	47.9	54	23.4	33.2
4.240	10.1	H	56	-	-	46	20.2	30.3
4.248	10.3	N	56	29.5	39.8	46	-	-
4.320	10.1	H	56	27.7	37.8	46	-	-
4.432	10.3	N	56	-	-	46	21.2	31.5

※ **NOTE:** Refer to page 11 to page 14 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor


**HCT**

**EMC**

EUT: LG-D956  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: GC YOON  
 Test Specification: FCC PART15B  
 Comment: H  
 Start of Test: 2013-12-09 / 2:45:31 오후

**SCAN TABLE: "FCC CLASS B(H)"**

Short Description:			FCC CLASS B(H)			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

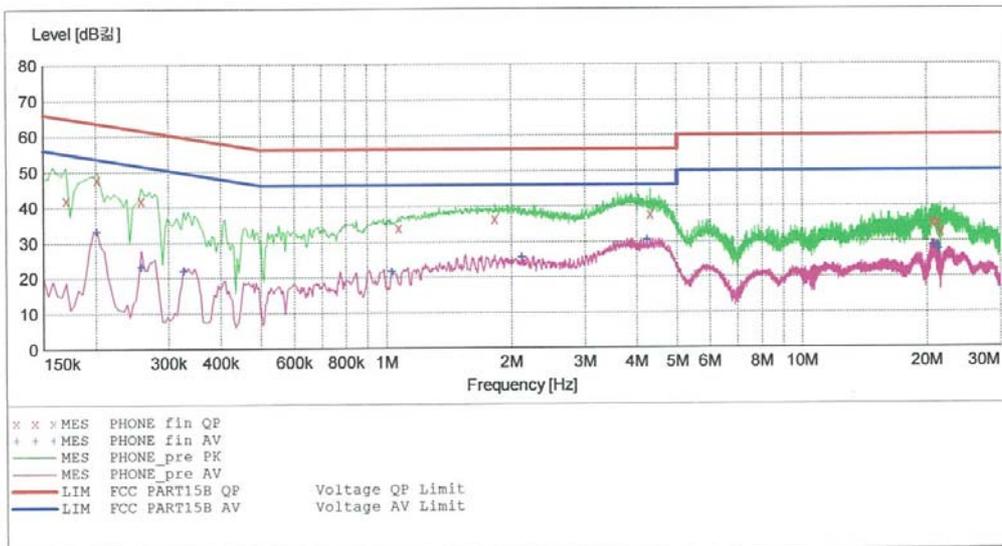

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2013-12-09 2:48 오후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.170001	42.00	9.8	65	23.0	---	---
0.202001	47.90	9.8	64	15.7	---	---
0.258001	41.90	9.8	62	19.5	---	---
1.072000	34.00	9.8	56	22.0	---	---
1.824000	36.50	9.9	56	19.5	---	---
4.320000	37.80	10.1	56	18.2	---	---
20.596000	35.60	10.9	60	24.4	---	---
21.168000	35.10	11.0	60	24.9	---	---
21.588000	32.70	11.0	60	27.3	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-12-09 2:48 오후

Frequency MHz	Level dB <sub>μV</sub>	Transd dB	Limit dB <sub>μV</sub>	Margin dB	Line	PE
0.202001	33.20	9.8	54	20.3	---	---
0.258001	23.20	9.8	52	28.3	---	---
0.326001	22.00	9.8	50	27.5	---	---
1.032000	21.70	9.8	46	24.3	---	---
2.120000	25.70	10.0	46	20.3	---	---
4.240000	30.30	10.1	46	15.7	---	---
20.708000	28.80	11.0	50	21.2	---	---
21.168000	28.60	11.0	50	21.4	---	---
21.296000	27.60	11.0	50	22.4	---	---


**HCT**

**EMC**

EUT: LG-D956  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: GC YOON  
 Test Specification: FCC PART15B  
 Comment: N  
 Start of Test: 2013-12-09 / 2:48:55오후

**SCAN TABLE: "FCC CLASS B(N)"**

Short Description:			FCC CLASS B(N)			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

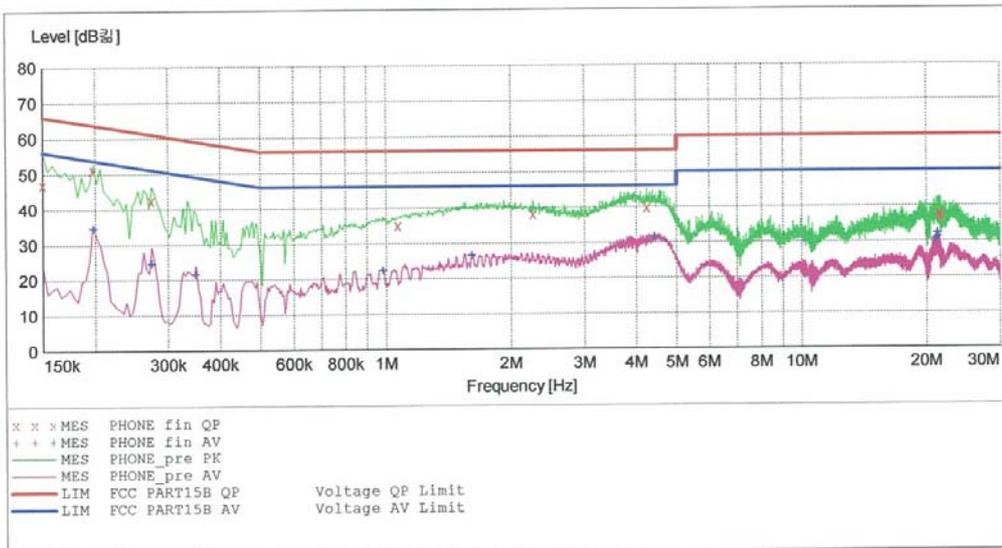

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2013-12-09 2:51오후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150001	47.00	10.0	66	19.0	---	---
0.198001	51.00	10.0	64	12.7	---	---
0.274001	42.40	10.0	61	18.6	---	---
1.068000	35.00	10.1	56	21.0	---	---
2.264000	38.20	10.2	56	17.8	---	---
4.248000	39.80	10.3	56	16.2	---	---
21.376000	37.90	11.3	60	22.1	---	---
21.512000	37.40	11.3	60	22.6	---	---
21.656000	36.80	11.3	60	23.2	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-12-09 2:51 오후

Frequency MHz	Level dB <sub>μV</sub>	Transd dB	Limit dB <sub>μV</sub>	Margin dB	Line	PE
0.198001	34.50	10.0	54	19.2	---	---
0.274001	24.60	10.0	51	26.4	---	---
0.350001	21.50	10.0	49	27.4	---	---
0.988000	22.40	10.0	46	23.6	---	---
1.612000	26.50	10.1	46	19.5	---	---
4.432000	31.50	10.3	46	14.5	---	---
21.032000	30.50	11.3	50	19.5	---	---
21.232000	32.10	11.3	50	17.9	---	---
21.304000	31.10	11.3	50	18.9	---	---

## 4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

### -For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

Temperature : 20.6°C

Humidity Level : 32.7 %

Test Date : December 10, 2013

Frequency (MHz)	Reading (dBuV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBuV/m)	Level (dBuV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
34.6	11.80	V	1.0	11.46	3.34	40.0	26.60	13.40
77.2	19.15	H	2.5	8.75	3.65	40.0	31.55	8.45
132.0	14.44	V	1.0	12.35	3.93	43.5	30.72	12.78
275.2	16.19	H	2.0	12.60	4.45	46.0	33.24	12.76
375.0	11.62	H	2.5	15.08	4.79	46.0	31.49	14.51
625.2	10.16	V	1.0	19.97	5.39	46.0	35.52	10.48

※ **NOTE:** Polarity H = Horizontal, Polarity V = Vertical

**-For measurement above 1 GHz**

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)  
 : Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data Communication mode

Temperature : 20.6°C

Humidity Level : 32.7 %

Test Date : December 10, 2013

Frequency (GHz)	Peak			POL	Average		
	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)		Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1.3322	50.7	74	23.3	V	27.9	54	26.1
1.9951	53.1	74	20.9	V	30.3	54	23.7
2.1034	51.7	74	22.3	V	30.3	54	23.7
2.6622	54.0	74	20.0	V	31.4	54	22.6

※ **NOTE:**

1. Measurement above 1 GHz was performed from 1 GHz to the 5<sup>th</sup> harmonic of highest fundamental frequency. Test was measured by 12 GHz.

## 5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB $\mu$ V/m value is mathematically converted to its corresponding level in  $\mu$ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

### [Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	$\mu$ V/m	dB $\mu$ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

## 6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<b><u>Conducted Emission</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2014.04.25
<input checked="" type="checkbox"/> LISN	EMCO	3816/2SH	9706-1070	1 year	2014.04.26
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	2014.02.06
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100033	1 year	2014.06.23
<input type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2014.07.03
<input type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2014.07.03
<b><u>Radiated Emission (30 Mhz to 1 GHz)</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2014.12.17
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
<input type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9168	185	2 year	2015.04.16
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<b><u>Radiated Emission (1 GHz to 12 GHz)</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBLU1183540	21690	1 year	2014.07.12
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	2014.12.13
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-

## 7. CONCLUSION

---

The data collected shows that the **EUT type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID, FCC ID: ZNFD956, Model: LG-D956** complies with §15.107 and §15.109 of the FCC rules.