

# RF TEST REPORT

Test item : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA Phone  
with Bluetooth and WLAN  
Model No. : LG-E510g, E510g, LGE510g, LG-E510G, E510G, LGE510G  
Order No. : 1108-01120  
Date of receipt : 2011-08-17  
Test duration : 2011-08-25 ~ 2011-09-08  
Date of issue : 2011-09-08  
Use of report : FCC Original Grant

Applicant : LG Electronics MobileComm U.S.A., Inc.  
10101 Old Grove Road., San Diego, CA 92131

Test laboratory : Digital EMC Co., Ltd.  
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

Test specification : FCC Part 15 Subpart C 247  
Test environment : See appended test report  
Test result :  Pass  Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer  
S.K.Ryu

Witnessed by:

N/A

Reviewed by:



Manager  
W.J. Lee

## Table of Contents

|   |           |
|---|-----------|
| <b>1. General Information .....</b>   | <b>3</b>  |
| 1.1 Testing Laboratory .....  | 3         |
| 1.2 Details of Applicant .....  | 3         |
| 1.3 Description of EUT .....  | 3         |
| 1.4 Declaration by the manufacturer.....  | 3         |
| 1.5 Information about the FHSS characteristics:.....                                    | 4         |
| 1.5.1 Pseudorandom Frequency Hopping Sequence .....                                     | 4         |
| 1.5.2 Equal Hopping Frequency Use.....  | 4         |
| 1.5.3 System Receiver Input Bandwidth .....   | 4         |
| 1.6 Test Equipment List .....   | 5         |
| 1.7 Summary of Test Results .....   | 6         |
| 1.8 Conclusion of worst-case and operation mode.....                                    | 7         |
| 1.9 Test report revision .....  | 7         |
| <b>2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission .....</b> | <b>8</b>  |
| 2.1. Test Setup.....  | 8         |
| 2.1.1. Transmitter Radiated Spurious Emissions.....                                     | 8         |
| 2.1.2. Conducted Spurious Emissions.....  | 8         |
| 2.2. Limit.....   | 9         |
| 2.3. Test Procedures.....   | 10        |
| 2.3.1. Test Procedures for Radiated Spurious Emissions .....                            | 10        |
| 2.3.2. Test Procedures for Conducted Spurious Emissions.....                            | 10        |
| 2.4. Test Results.....  | 11        |
| 2.4.1. Radiated Emission.....   | 11        |
| 2.4.2. Conducted Spurious Emissions.....  | 14        |
| <b>3. 99 % &amp; 20dBc BW.....</b>  | <b>29</b> |
| 3.1. Test Setup.....  | 29        |
| 3.2. Limit.....   | 29        |
| 3.3. Test Procedure.....  | 29        |
| 3.4. Test Results.....  | 29        |
| <b>5. Maximum Peak Output Power Measurement .....</b>                                   | <b>35</b> |
| 5.1. Test Setup.....  | 35        |
| 5.2. Limit.....   | 35        |
| 5.3. Test Procedure .....   | 35        |
| 5.4. Test Results.....  | 36        |
| <b>6. Transmitter AC Power Line Conducted Emission .....</b>                            | <b>42</b> |
| 6.1. Test Setup.....  | 42        |
| 6.2. Limit.....   | 42        |
| 6.3. Test Procedures .....  | 42        |
| 6.4. Test Results.....  | 43        |

## 1. General Information

### 1.1 Testing Laboratory

**Digital EMC Co., Ltd.**

683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

[www.digitalemc.com](http://www.digitalemc.com)

Telephone : + 82-31-321-2664

FAX : + 82-31-321-1664

### 1.2 Details of Applicant

Applicant : LG Electronics MobileComm U.S.A., Inc.

Address : 10101 Old Grove Road., San Diego, CA 92131

Contact person : Cheol Goo Lee

Phone No. : +82-2-2033-1111

### 1.3 Description of EUT

|                             |  |
|-----------------------------|--|
| <b>Product</b>              | Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA Phone with Bluetooth and WLAN |
| <b>Model Name</b>           | LG-E510g, E510g, LGE510g, LG-E510G, E510G, LGE510G                   |
| <b>Serial Number</b>        | Identical prototype  |
| <b>Power Supply</b>         | Lithium Ion Battery: DC 3.7V   |
| <b>Frequency Range</b>      | 2402 ~ 2480MHz   |
| <b>Modulation Technique</b> | GFSK, $\pi/4$ -DQPSK, 8DPSK  |
| <b>Number of Channels</b>   | 79   |
| <b>Antenna Type</b>         | Internal Antenna   |
| <b>Antenna Gain</b>         | -1.538 dBi (PK)  |

### 1.4. Declaration by the manufacturer

- N/A

## **1.5. Information about the FHSS characteristics:**

### **1.5.1. Pseudorandom Frequency Hopping Sequence**

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1600 hops/s.

### **1.5.2. Equal Hopping Frequency Use**

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

### **1.5.3. System Receiver Input Bandwidth**

Each channel bandwidth is 1MHz

**1.6. Test Equipment List**

| Type                      | Manufacturer  | Model      | Cal.Date<br>(yy/mm/dd) | Next.Cal.Date<br>(yy/mm/dd) | S/N                    |
|---------------------------|---------------|------------|------------------------|-----------------------------|------------------------|
| Spectrum Analyzer         | Agilent       | E4440A     | 10/09/30               | 11/09/30                    | MY45304199             |
| Spectrum Analyzer         | Rohde Schwarz | FSQ26      | 11/01/11               | 12/01/11                    | 200445                 |
| Spectrum Analyzer         | Agilent       | N9020A     | 11/01/07               | 12/01/07                    | MY49100833             |
| Power Splitter            | Anritsu       | K241B      | 10/10/05               | 11/10/05                    | 020611                 |
| Digital Multimeter        | H.P           | 34401A     | 11/03/07               | 12/03/07                    | 3146A13475, US36122178 |
| Signal Generator          | Rohde Schwarz | SMR20      | 11/03/08               | 12/03/08                    | 101251                 |
| Vector Signal Generator   | Rohde Schwarz | SMJ100A    | 11/01/11               | 12/01/11                    | 100148                 |
| Bluetooth Tester          | TESCOM        | TC-3000B   | 11/07/01               | 12/07/01                    | 3000B000268            |
| Thermo hygrometer         | BODYCOM       | BJ5478     | 11/01/13               | 12/01/13                    | 090205-2               |
| DC Power Supply           | HP            | 6622A      | 11/03/07               | 12/03/07                    | 3448A03760             |
| High-pass filter          | Wainwright    | WHNX3.0    | N/A                    | N/A                         | 9                      |
| BICONICAL ANT.            | Schwarzbeck   | VHA 9103   | 10/12/21               | 12/12/21                    | 91031946               |
| LOG-PERIODIC ANT.         | Schwarzbeck   | UHALP9108A | 10/07/07               | 12/07/07                    | 590                    |
| BILOG ANTENNA             | SCHAFFNER     | CBL6112B   | 10/07/14               | 12/07/14                    | 2737                   |
| HORN ANT                  | ETS           | 3115       | 11/03/22               | 12/03/22                    | 6419                   |
| HORN ANT                  | A.H.Systems   | SAS-574    | 11/03/25               | 13/03/25                    | 154                    |
| Amplifier (22dB)          | H.P           | 8447E      | 11/01/11               | 12/01/11                    | 2945A02865             |
| Amplifier (25dB)          | Agilent       | 8447D      | 11/03/07               | 12/03/07                    | 2944A10144             |
| Amplifier (30dB)          | Agilent       | 8449B      | 11/03/07               | 12/03/07                    | 3008A01590             |
| EMI TEST RECEIVER         | R&S           | ESU        | 11/01/20               | 12/01/20                    | 100014                 |
| Spectrum Analyzer(CE)     | H.P           | 8591E      | 11/03/07               | 12/03/07                    | 3649A05889             |
| LISN                      | Kyoritsu      | KNW-407    | 11/01/11               | 12/01/11                    | 8-317-8                |
| LISN                      | Kyoritsu      | KNW-242    | 11/07/02               | 12/07/02                    | 8-654-15               |
| CVCF                      | NF Electronic | 4420       | 11/03/08               | 12/03/08                    | 304935/337980          |
| 50 ohm Terminator         | HME           | CT-01      | 11/01/11               | 12/01/11                    | N/A                    |
| RFI/FIELD Intensity Meter | Kyoritsu      | KNM-2402   | 11/07/02               | 12/07/02                    | 4N-170-3               |

**1.7. Summary of Test Results**

| FCC Part Section(s)  | Parameter                    | Limit<br>(Using in 2400 ~ 2483.5MHz)  | Test Condition    | Status<br>Note 1 |
|--|------------------------------|---|-------------------|------------------|
| 15.247(a)  | 99% & 20 dB Bandwidth        | None  | Conducted         | <b>C</b>         |
| 15.247(b)  | Transmitter Output Power     | =< 1Watt , if CHs >= 75<br>Others =<0.125W  |                   | <b>C</b>         |
| 15.247(d)  | Band-edge                    | The radiated emission to any 100 kHz of out-band shall be at least 20dB below the highest in-band spectral density. |                   | <b>C</b>         |
|  | Conducted Spurious Emissions |   |                   | <b>C</b>         |
| 15.205<br>15.209   | Radiated Emissions           | FCC 15.209 Limits   | Radiated          | <b>C</b>         |
| 15.207   | AC Conducted Emissions       | FCC 15.207 Limits   | AC Line Conducted | <b>C</b>         |
| 15.203   | Antenna Requirements         | FCC 15.203  | -                 | <b>C</b>         |
| <p>Note 1: <b>C</b>=Comply    <b>NC</b>=Not Comply    <b>NT</b>=Not Tested    <b>NA</b>=Not Applicable</p> <p>Note 2: The sample was tested according to the following specification:<br/>ANSI C-63.4-2003, DA00-705</p> |                              |   |                   |                  |

## 1.8 Conclusion of worst-case and operation mode

The EUT has three type of modulations (GFSK,  $\pi/4$ DQPSK and 8DPSK).

Therefore all applicable requirements were tested with all the modulations.

The field strength of spurious emission was measured in three orthogonal EUT positions (X-axis, Y-axis and Z-axis).

Tested frequency information,

- Hopping Function: Enable

|                     | TX Frequency (MHz) | RX Frequency (MHz) |
|---------------------|--------------------|--------------------|
| <b>Hopping Band</b> | 2402 ~ 2480        | 2402 ~ 2480        |

- Hopping Function: Disable

|                        | TX Frequency (MHz) | RX Frequency (MHz) |
|------------------------|--------------------|--------------------|
| <b>Lowest Channel</b>  | 2402               | 2402               |
| <b>Middle Channel</b>  | 2441               | 2441               |
| <b>Highest Channel</b> | 2480               | 2480               |

## 1.9 Test report revision


| Test Report No. | Date               | Description                |
|-----------------|--------------------|----------------------------|
| DRTFCC1109-0335 | September 08, 2011 | Final version for approval |
|                 |                    |                            |
|                 |                    |                            |
|                 |                    |                            |
|                 |                    |                            |
|                 |                    |                            |
|                 |                    |                            |
|                 |                    |                            |
|                 |                    |                            |

## 2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission

### 2.1. Test Setup


#### 2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 25 GHz Emissions.

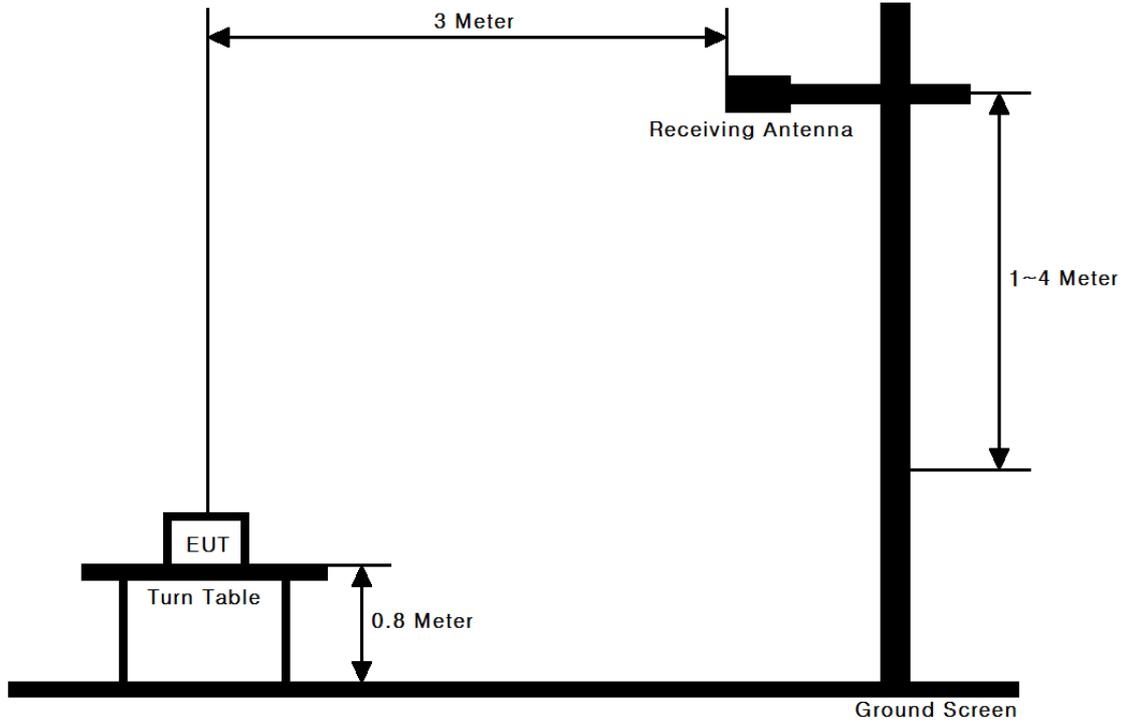

Refer to test setup photo.

#### 2.1.2. Conducted Spurious Emissions

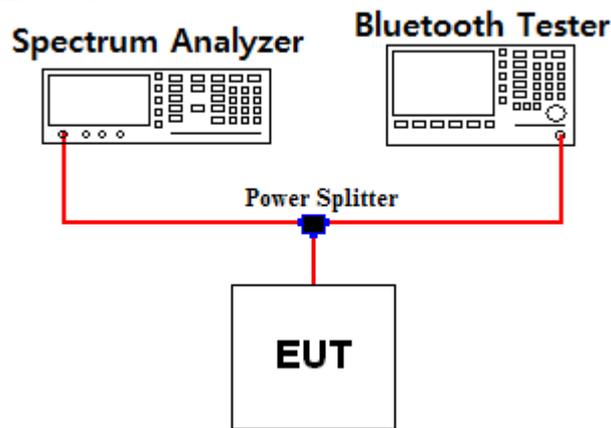

## 2.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

| Frequency (MHz) | Limit (uV/m) @ 3m |
|-----------------|-------------------|
| 30 ~ 88         | 100 **            |
| 88 ~ 216        | 150 **            |
| 216 ~ 960       | 200 **            |
| Above 960       | 500               |

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz               | MHz             | GHz          | GHz           |
|-------------------|---------------------|-------------------|-----------------|--------------|---------------|
| 0.009 ~ 0.110     | 8.41425 ~ 8.41475   | 108 ~ 121.94      | 1300 ~ 1427     | 3600 ~ 4400  | 14.47 ~ 14.5  |
| 0.495 ~ 0.505     | 12.29 ~ 12.293      | 123 ~ 138         | 1435 ~ 1626.5   | 4.5 ~ 5.15   | 15.35 ~ 16.2  |
| 2.1735 ~ 2.1905   | 12.51975 ~ 12.52025 | 149.9 ~ 150.05    | 1645.5 ~ 1646.5 | 5.35 ~ 5.46  | 17.7 ~ 21.4   |
| 4.125 ~ 4.128     | 12.57675 ~ 12.57725 | 156.52475 ~       | 1660 ~ 1710     | 7.25 ~ 7.75  | 22.01 ~ 23.12 |
| 4.17725 ~ 4.17775 | 13.36 ~ 13.41       | 156.52525         | 1718.8 ~ 1722.2 | 8.025 ~ 8.5  | 23.6 ~ 24.0   |
| 4.20725 ~ 4.20775 | 16.42 ~ 16.423      | 156.7 ~ 156.9     | 2200 ~ 2300     | 9.0 ~ 9.2    | 31.2 ~ 31.8   |
| 6.215 ~ 6.218     | 16.69475 ~ 16.69525 | 162.0125 ~ 167.17 | 2310 ~ 2390     | 9.3 ~ 9.5    | 36.43 ~ 36.5  |
| 6.26775 ~ 6.26825 | 16.80425 ~ 16.80475 | 167.72 ~ 173.2    | 2483.5 ~ 2500   | 10.6 ~ 12.7  | Above 38.6    |
| 6.31175 ~ 6.31225 | 25.5 ~ 25.67        | 240 ~ 285         | 2655 ~ 2900     | 13.25 ~ 13.4 |               |
| 8.291 ~ 8.294     | 37.5 ~ 38.25        | 322 ~ 335.4       | 3260 ~ 3267     |              |               |
| 8.362 ~ 8.366     | 73 ~ 74.6           | 399.90 ~ 410      | 3332 ~ 3339     |              |               |
| 8.37625 ~ 8.38675 | 74.8 ~ 75.2         | 608 ~ 614         | 3345.8 ~ 3358   |              |               |
|                   |                     | 960 ~ 1240        |                 |              |               |

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

### 2.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### NOTE ;

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

### 2.3.2. Test Procedures for Conducted Spurious Emissions

1. The transmitter output was connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=100 kHz, VBW=100 kHz.

## 2.4. Test Results

Ambient temperature : 20 °C ~ 26 °C  
Relative humidity : 37 % ~ 46 %

### 2.4.1. Radiated Emission

#### 30MHz ~ 25GHz Data(Modulation: GFSK)

##### ▪ Lowest Channel

| Frequency (MHz) | ANT Pol | The worst case EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 2389.600        | H       | Y                                  | PK            | 49.75          | -3.30      | 46.45           | 74.00          | 27.55       |
| 2390.000        | H       | Y                                  | AV            | 37.37          | -3.30      | 34.07           | 54.00          | 19.93       |
| 4803.592        | V       | Y                                  | PK            | 56.65          | -25.92     | 30.73           | 74.00          | 43.27       |
| 4803.994        | V       | Y                                  | AV            | 49.10          | -25.92     | 23.18           | 54.00          | 30.82       |
| -               | -       | -                                  | -             | -              | -          | -               | -              | -           |

##### ▪ Middle Channel

| Frequency (MHz) | ANT Pol | The worst case EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 4881.733        | V       | Y                                  | PK            | 57.00          | -26.70     | 30.30           | 74.00          | 43.70       |
| 4882.006        | V       | Y                                  | AV            | 49.05          | -26.70     | 22.35           | 54.00          | 31.65       |
| -               | -       | -                                  | -             | -              | -          | -               | -              | -           |

##### ▪ Highest Channel

| Frequency (MHz) | ANT Pol | The worst case EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 2483.510        | H       | Y                                  | PK            | 52.61          | -3.30      | 49.31           | 74.00          | 24.69       |
| 2483.533        | H       | Y                                  | AV            | 39.66          | -3.30      | 36.36           | 54.00          | 17.64       |
| 4959.700        | V       | Y                                  | PK            | 55.20          | -24.96     | 30.24           | 74.00          | 43.76       |
| 4959.990        | V       | Y                                  | AV            | 47.16          | -24.96     | 22.20           | 54.00          | 31.80       |
| -               | -       | -                                  | -             | -              | -          | -               | -              | -           |

#### Note.

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG} + \text{DCF}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,  
DCF = Duty Cycle Correction Factor =  $20\log(\text{dwell time} / 100\text{ms})$

**30MHz ~ 25GHz Data(Modulation:  $\pi/4$  DQPSK)**

## ▪ Lowest Channel

| Frequency (MHz) | ANT Pol | The worst case EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 2379.680        | H       | Y                                  | PK            | 50.47          | -3.30      | 47.17           | 74.00          | 26.83       |
| 2389.760        | H       | Y                                  | AV            | 37.33          | -3.30      | 34.03           | 54.00          | 19.97       |
| 4803.748        | V       | Y                                  | PK            | 55.67          | -25.92     | 29.75           | 74.00          | 44.25       |
| 4804.009        | V       | Y                                  | AV            | 45.29          | -25.92     | 19.37           | 54.00          | 34.63       |
| -               | -       | -                                  | -             | -              | -          | -               | -              | -           |

## ▪ Middle Channel

| Frequency (MHz) | ANT Pol | The worst case EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 4882.261        | V       | Y                                  | PK            | 55.63          | -26.70     | 28.93           | 74.00          | 45.07       |
| 4881.973        | V       | Y                                  | AV            | 45.23          | -26.70     | 18.53           | 54.00          | 35.47       |
| -               | -       | -                                  | -             | -              | -          | -               | -              | -           |

## ▪ Highest Channel

| Frequency (MHz) | ANT Pol | The worst case EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 2483.582        | H       | Y                                  | PK            | 52.38          | -3.30      | 49.08           | 74.00          | 24.92       |
| 2483.516        | H       | Y                                  | AV            | 39.20          | -3.30      | 35.90           | 54.00          | 18.10       |
| 4960.110        | V       | Y                                  | PK            | 54.37          | -24.96     | 29.41           | 74.00          | 44.59       |
| 4960.030        | V       | Y                                  | AV            | 43.31          | -24.96     | 18.35           | 54.00          | 35.65       |
| -               | -       | -                                  | -             | -              | -          | -               | -              | -           |

**Note.**

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG} + \text{DCF}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor =  $20\log(\text{dwell time} / 100\text{ms})$

**30MHz ~ 25GHz Data(Modulation: 8DPSK)**▪ **Lowest Channel**

| Frequency (MHz) | ANT Pol | The worst case EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 2378.560        | H       | Y                                  | PK            | 50.11          | -3.30      | 46.81           | 74.00          | 27.19       |
| 2388.480        | H       | Y                                  | AV            | 37.32          | -3.30      | 34.02           | 54.00          | 19.98       |
| 4803.649        | V       | Y                                  | PK            | 55.90          | -25.92     | 29.98           | 74.00          | 44.02       |
| 4804.045        | V       | Y                                  | AV            | 45.38          | -25.92     | 19.46           | 54.00          | 34.54       |
| -               | -       | -                                  | -             | -              | -          | -               | -              | -           |

▪ **Middle Channel**

| Frequency (MHz) | ANT Pol | The worst case EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 4881.811        | V       | Y                                  | PK            | 55.72          | -26.70     | 29.02           | 74.00          | 44.98       |
| 4882.024        | V       | Y                                  | AV            | 45.30          | -26.70     | 18.60           | 54.00          | 35.40       |
| -               | -       | -                                  | -             | -              | -          | -               | -              | -           |

▪ **Highest Channel**

| Frequency (MHz) | ANT Pol | The worst case EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|------------------------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 2483.516        | H       | Y                                  | PK            | 51.77          | -3.30      | 48.47           | 74.00          | 25.53       |
| 2483.500        | H       | Y                                  | AV            | 39.23          | -3.30      | 35.93           | 54.00          | 18.07       |
| 4960.360        | V       | Y                                  | PK            | 54.36          | -24.96     | 29.40           | 74.00          | 44.60       |
| 4959.990        | V       | Y                                  | AV            | 43.37          | -24.96     | 18.41           | 54.00          | 35.59       |
| -               | -       | -                                  | -             | -              | -          | -               | -              | -           |

**Note.**

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG} + \text{DCF}$$


Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor =  $20\log(\text{dwell time} / 100\text{ms})$

**2.4.2. Conducted Spurious Emissions**


**Low Band-edge**

**Lowest Channel & Modulation: GFSK**

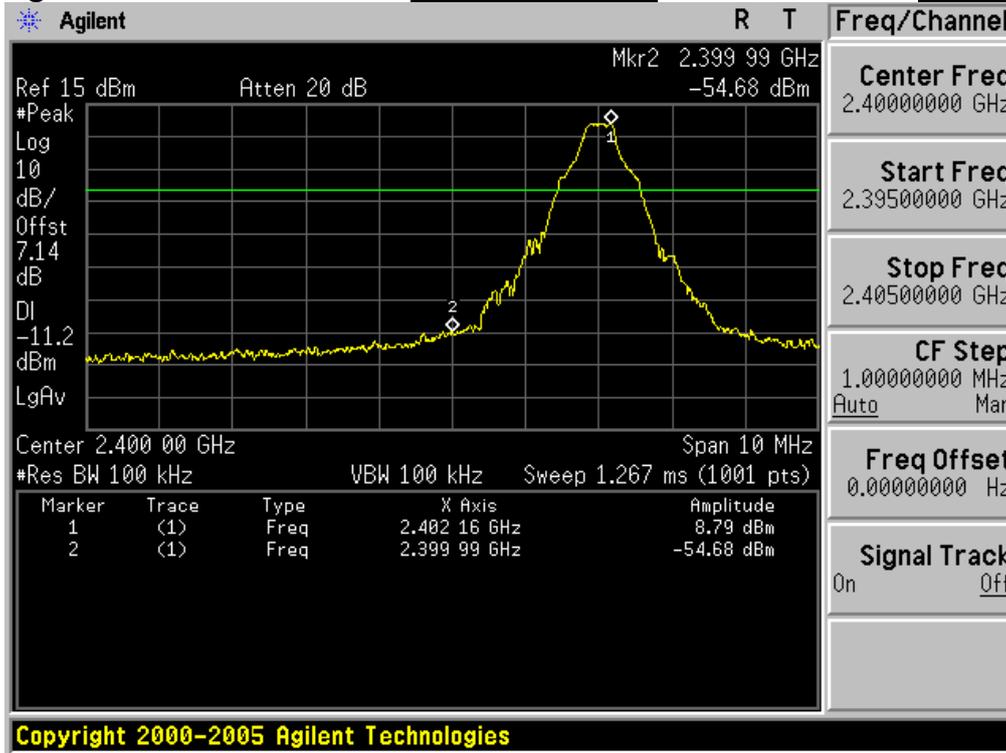


**Low Band-edge**

**Hopping mode & Modulation: GFSK**

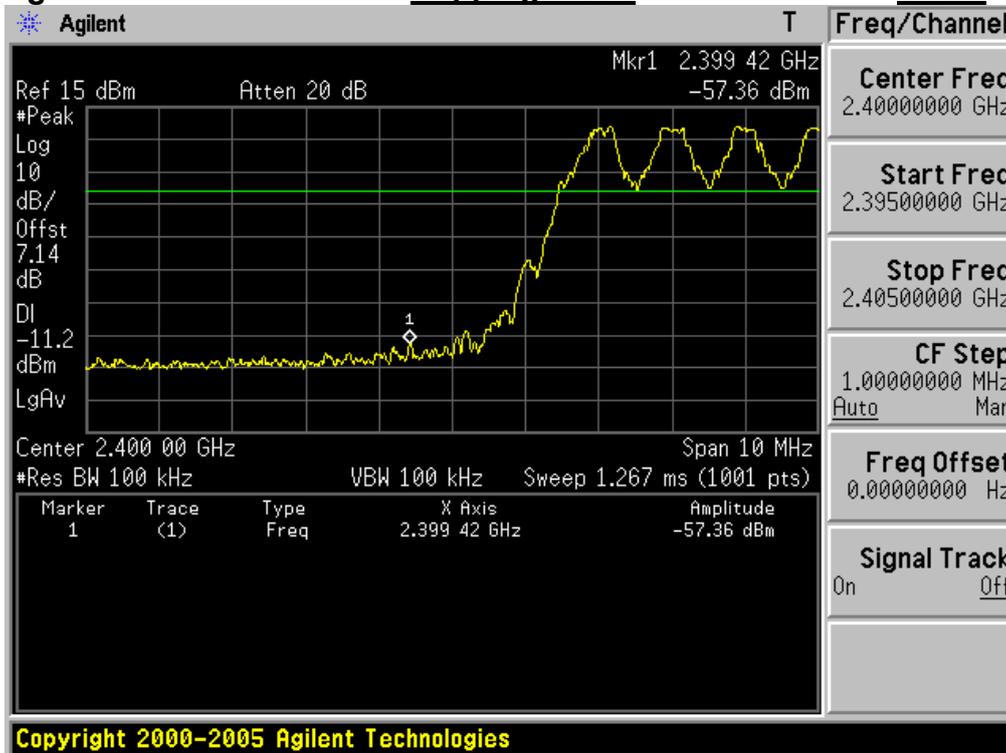

Conducted Spurious Emissions


Lowest Channel & Modulation: GFSK

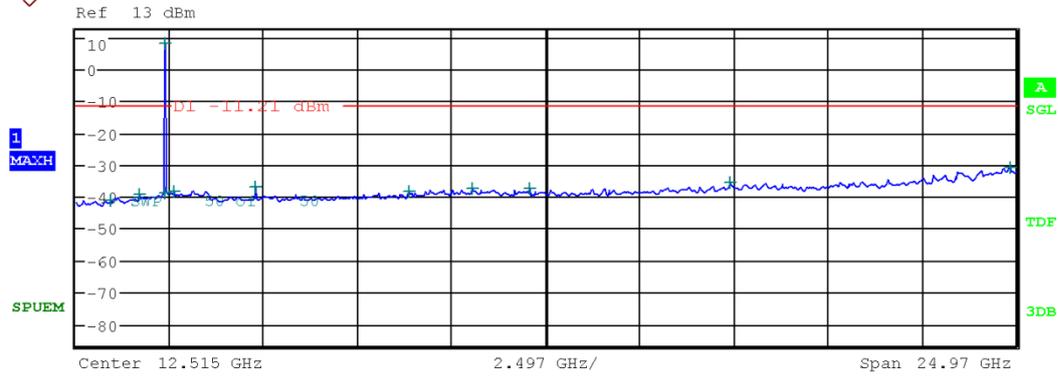


| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz]    | PwrAbs [dBm] | Δ Limit [dB] |
|------------|-----------|----------|--------------|--------------|--------------|
| 30.000 M   | 1.000 G   | 100.00 k | 937.920000 M | -41.17       | -200.00      |
| 1.000 G    | 2.000 G   | 100.00 k | 1.723000 G   | -39.42       | -200.00      |
| 2.000 G    | 2.400 G   | 100.00 k | 2.378400 G   | -39.01       | -200.00      |
| 2.400 G    | 2.483 G   | 100.00 k | 2.402054 G   | 7.95         | -200.00      |
| 2.483 G    | 3.000 G   | 100.00 k | 2.639845 G   | -38.29       | -200.00      |
| 3.000 G    | 6.000 G   | 100.00 k | 4.803667 G   | -36.88       | -200.00      |
| 6.000 G    | 9.000 G   | 100.00 k | 8.871000 G   | -38.32       | -200.00      |
| 9.000 G    | 12.000 G  | 100.00 k | 10.569333 G  | -37.31       | -200.00      |
| 12.000 G   | 15.000 G  | 100.00 k | 12.055333 G  | -37.59       | -200.00      |
| 15.000 G   | 20.000 G  | 100.00 k | 17.408889 G  | -35.38       | -200.00      |
| 20.000 G   | 25.000 G  | 100.00 k | 24.825556 G  | -30.87       | -200.00      |



**High Band-edge** *Highest Channel* & Modulation: *GFSK*

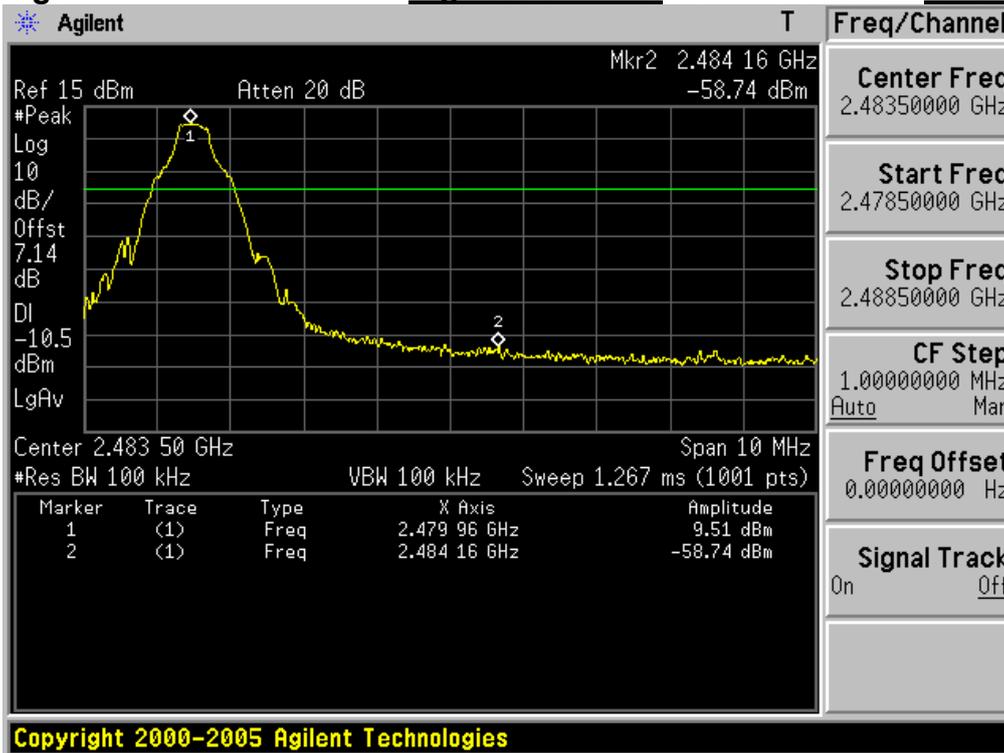


**High Band-edge** *Hopping mode* & Modulation: *GFSK*

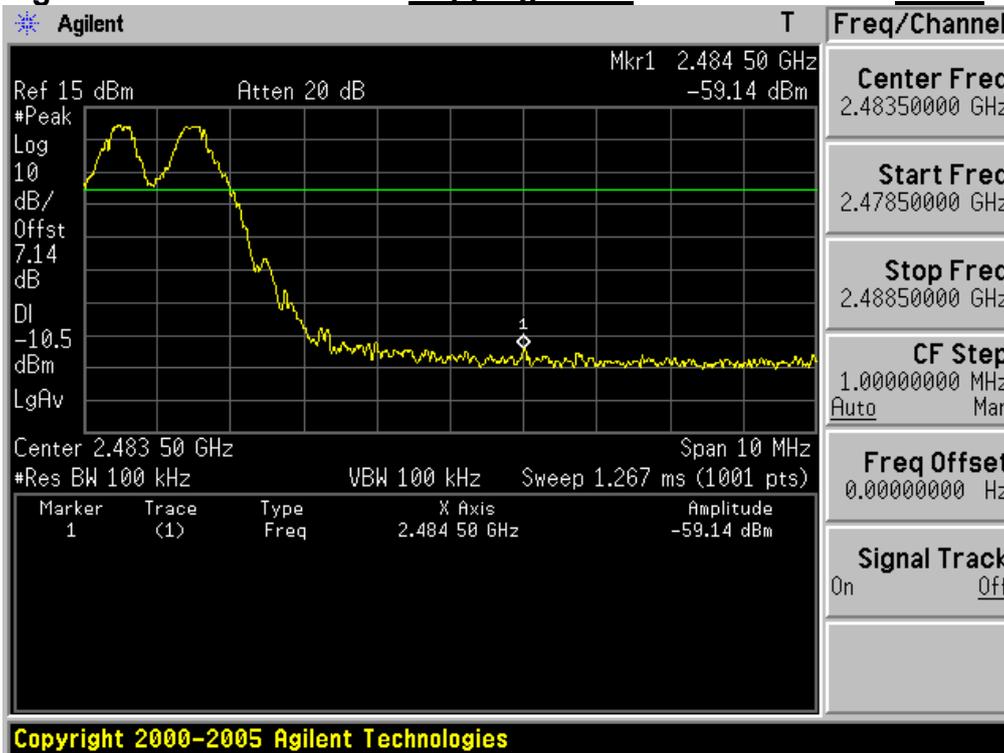


**Conducted Spurious Emissions**

**Highest Channel** & Modulation: **GFSK**

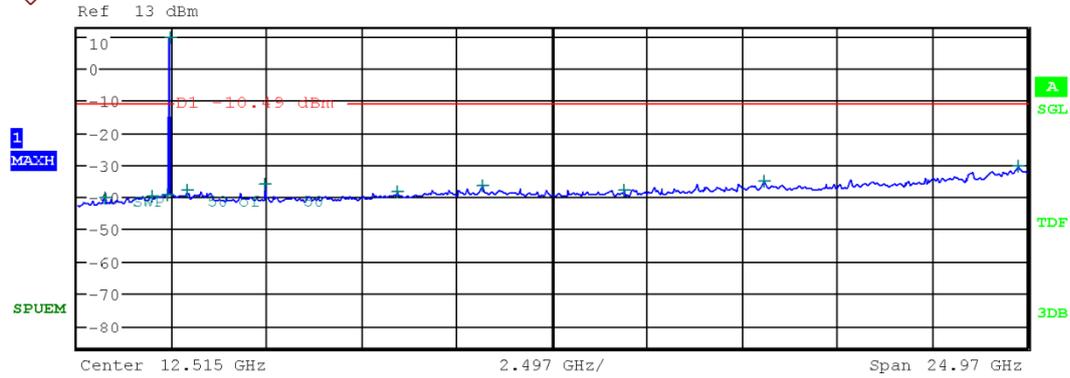


| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz]    | PwrAbs [dBm] | Δ Limit [dB] |
|------------|-----------|----------|--------------|--------------|--------------|
| 30.000 M   | 1.000 G   | 100.00 k | 748.770000 M | -40.34       | -200.00      |
| 1.000 G    | 2.000 G   | 100.00 k | 1.996000 G   | -39.94       | -200.00      |
| 2.000 G    | 2.400 G   | 100.00 k | 2.386400 G   | -39.31       | -200.00      |
| 2.400 G    | 2.483 G   | 100.00 k | 2.480135 G   | 9.46         | -200.00      |
| 2.483 G    | 3.000 G   | 100.00 k | 2.903518 G   | -38.06       | -200.00      |
| 3.000 G    | 6.000 G   | 100.00 k | 4.960333 G   | -35.92       | -200.00      |
| 6.000 G    | 9.000 G   | 100.00 k | 8.435333 G   | -38.62       | -200.00      |
| 9.000 G    | 12.000 G  | 100.00 k | 10.692667 G  | -36.70       | -200.00      |
| 12.000 G   | 15.000 G  | 100.00 k | 14.388333 G  | -37.74       | -200.00      |
| 15.000 G   | 20.000 G  | 100.00 k | 18.078333 G  | -35.26       | -200.00      |
| 20.000 G   | 25.000 G  | 100.00 k | 24.760000 G  | -30.59       | -200.00      |

**Low Band-edge** Lowest Channel & Modulation:  $\pi/4$  DQPSK

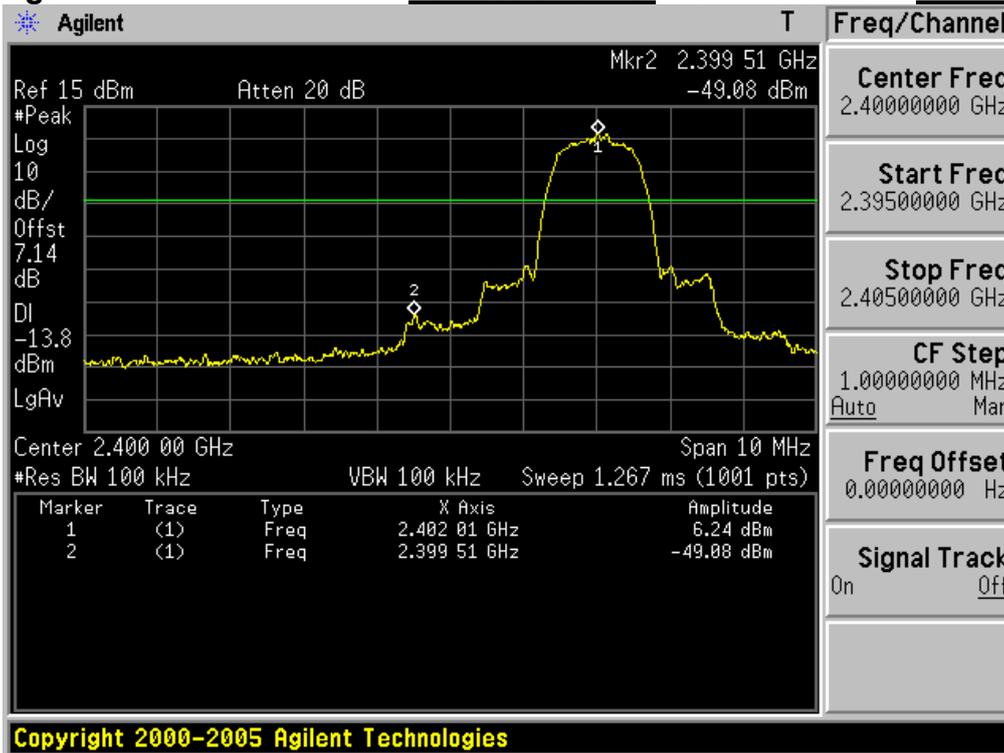


**Low Band-edge** Hopping mode & Modulation:  $\pi/4$  DQPSK

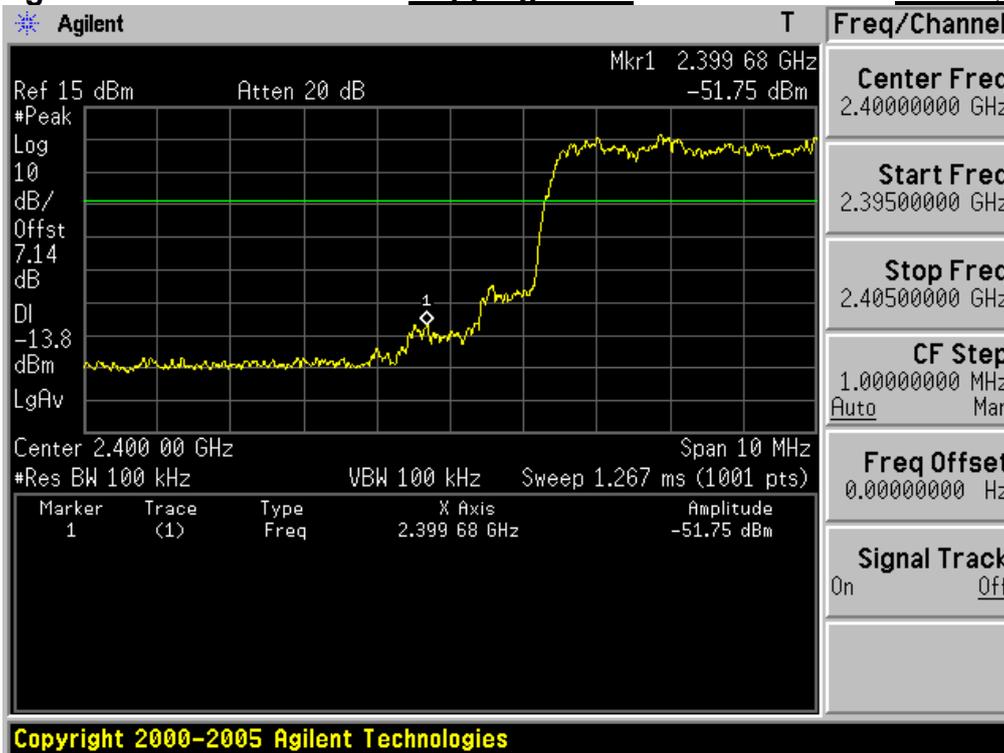




**Reference for limit**

**Middle Channel** & Modulation:  **$\pi/4$  DQPSK**

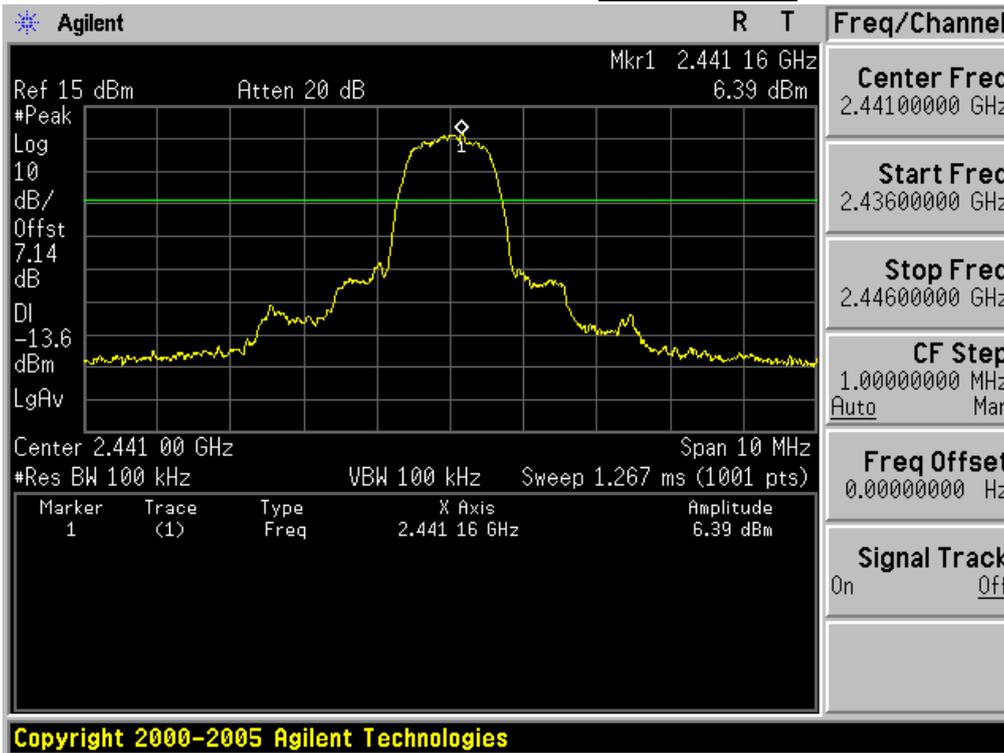


**Conducted Spurious Emissions**

**Middle Channel** & Modulation:  **$\pi/4$  DQPSK**

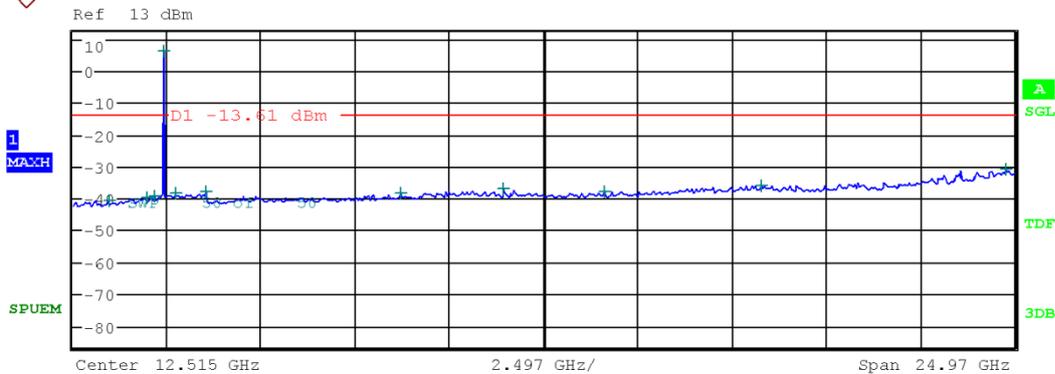


| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz]    | PwrAbs [dBm] | Δ Limit [dB] |
|------------|-----------|----------|--------------|--------------|--------------|
| 30.000 M   | 1.000 G   | 100.00 k | 994.180000 M | -40.66       | -200.00      |
| 1.000 G    | 2.000 G   | 100.00 k | 1.993000 G   | -39.67       | -200.00      |
| 2.000 G    | 2.400 G   | 100.00 k | 2.184560 G   | -39.21       | -200.00      |
| 2.400 G    | 2.483 G   | 100.00 k | 2.441128 G   | 6.35         | -200.00      |
| 2.483 G    | 3.000 G   | 100.00 k | 2.740510 G   | -38.60       | -200.00      |
| 3.000 G    | 6.000 G   | 100.00 k | 3.550333 G   | -37.91       | -200.00      |
| 6.000 G    | 9.000 G   | 100.00 k | 8.719333 G   | -38.48       | -200.00      |
| 9.000 G    | 12.000 G  | 100.00 k | 11.423000 G  | -36.97       | -200.00      |
| 12.000 G   | 15.000 G  | 100.00 k | 14.097000 G  | -37.99       | -200.00      |
| 15.000 G   | 20.000 G  | 100.00 k | 18.296667 G  | -35.88       | -200.00      |
| 20.000 G   | 25.000 G  | 100.00 k | 24.772778 G  | -31.01       | -200.00      |

High Band-edge Highest Channel & Modulation:  $\pi/4$  DQPSK

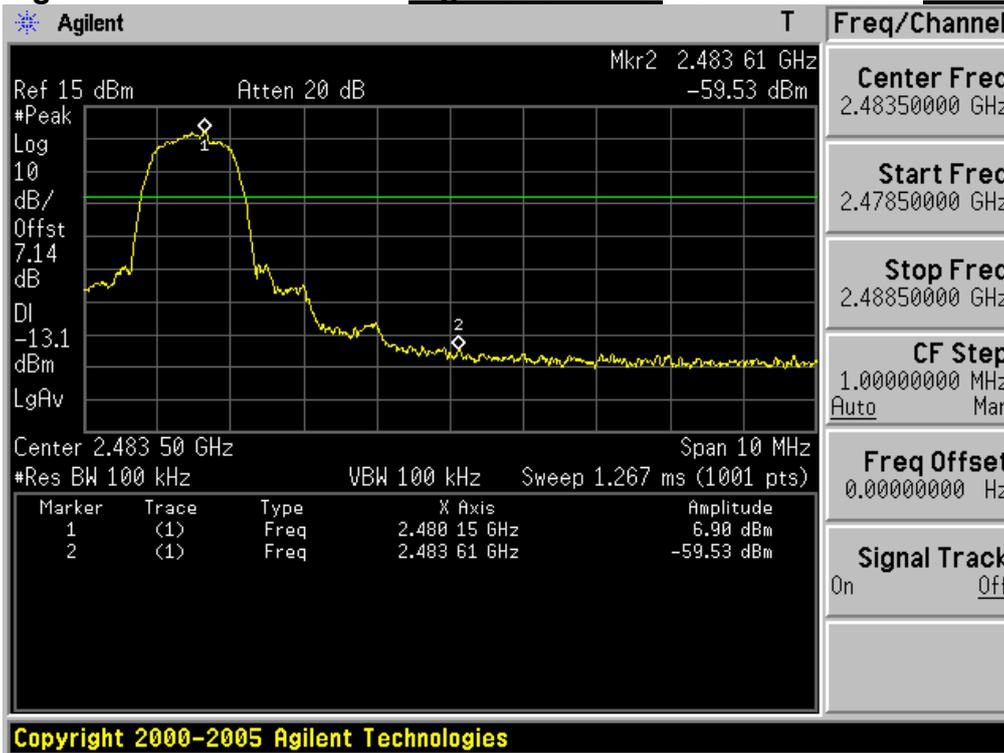


High Band-edge Hopping mode & Modulation:  $\pi/4$  DQPSK

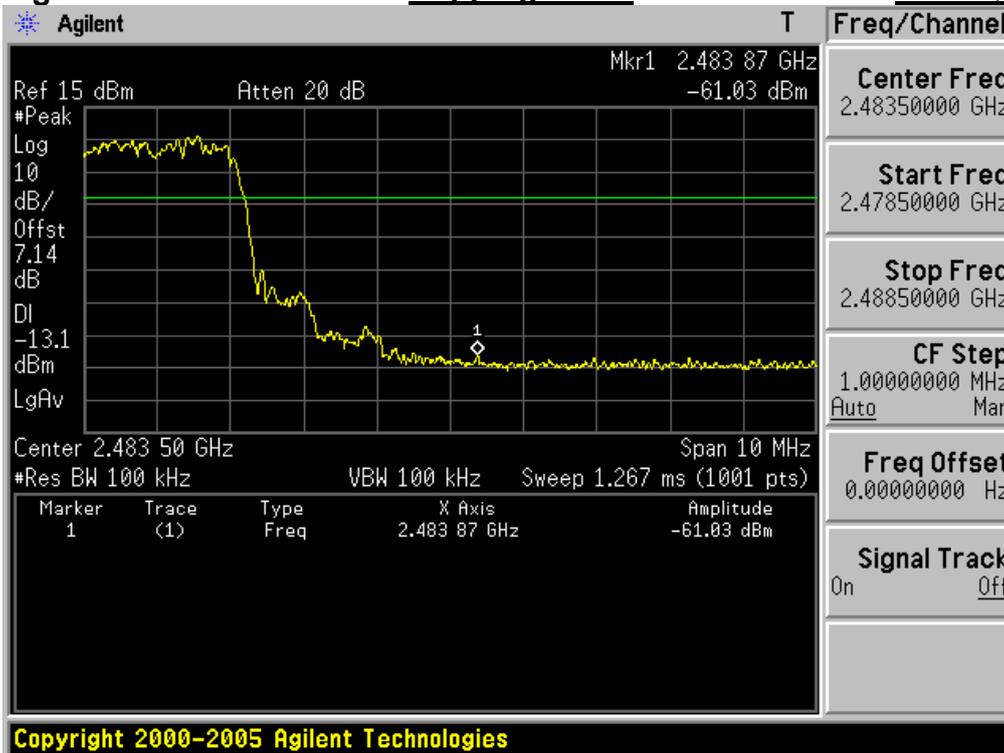


**Conducted Spurious Emissions**

**Highest Channel** & Modulation:  $\pi/4$  DQPSK

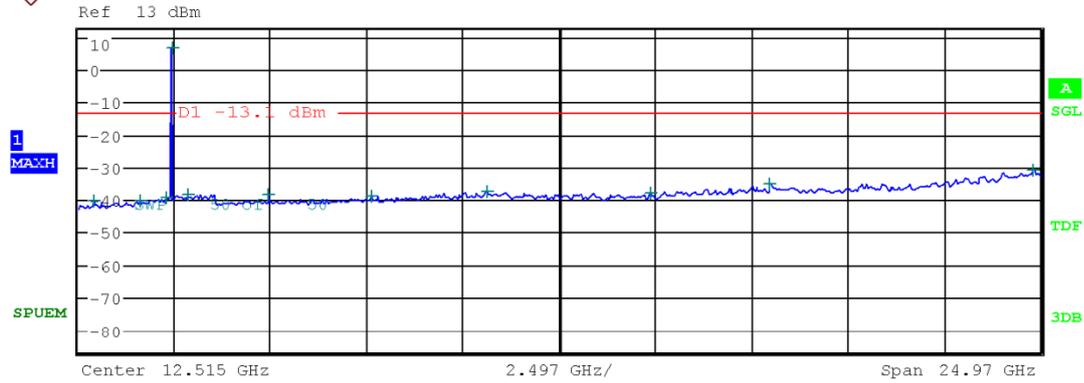


| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz]    | PwrAbs [dBm] | Δ Limit [dB] |
|------------|-----------|----------|--------------|--------------|--------------|
| 30.000 M   | 1.000 G   | 100.00 k | 418.000000 M | -40.20       | -200.00      |
| 1.000 G    | 2.000 G   | 100.00 k | 1.639000 G   | -40.32       | -200.00      |
| 2.000 G    | 2.400 G   | 100.00 k | 2.318120 G   | -39.48       | -200.00      |
| 2.400 G    | 2.483 G   | 100.00 k | 2.480001 G   | 6.76         | -200.00      |
| 2.483 G    | 3.000 G   | 100.00 k | 2.859409 G   | -38.33       | -200.00      |
| 3.000 G    | 6.000 G   | 100.00 k | 4.960000 G   | -38.41       | -200.00      |
| 6.000 G    | 9.000 G   | 100.00 k | 7.629667 G   | -38.69       | -200.00      |
| 9.000 G    | 12.000 G  | 100.00 k | 10.623333 G  | -37.27       | -200.00      |
| 12.000 G   | 15.000 G  | 100.00 k | 14.881000 G  | -37.78       | -200.00      |
| 15.000 G   | 20.000 G  | 100.00 k | 17.976667 G  | -35.00       | -200.00      |
| 20.000 G   | 25.000 G  | 100.00 k | 24.783889 G  | -30.79       | -200.00      |

**Low Band-edge** Lowest Channel & Modulation: **8DPSK**

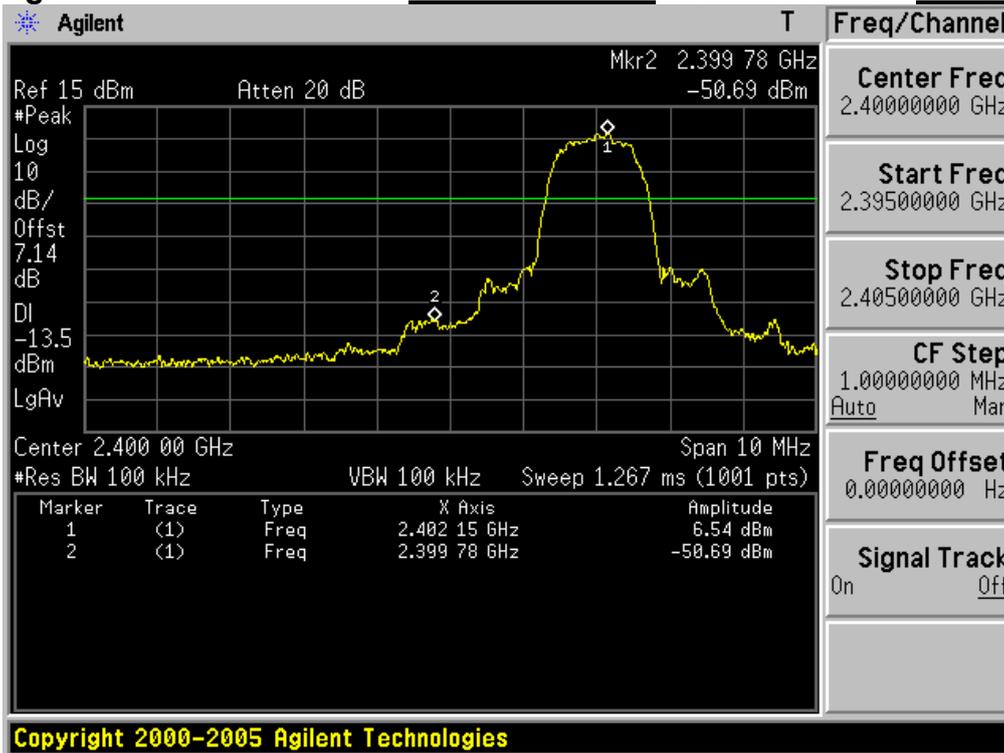


**Low Band-edge** Hopping mode & Modulation: **8DPSK**

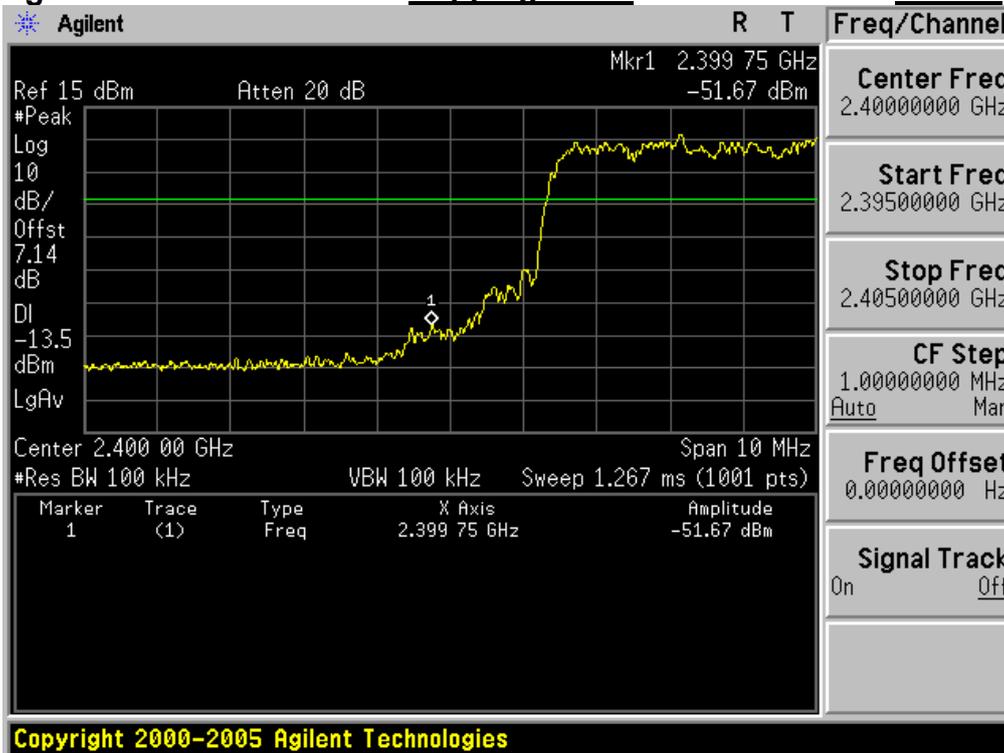

**Conducted Spurious Emissions**


**Lowest Channel** & Modulation: **8DPSK**

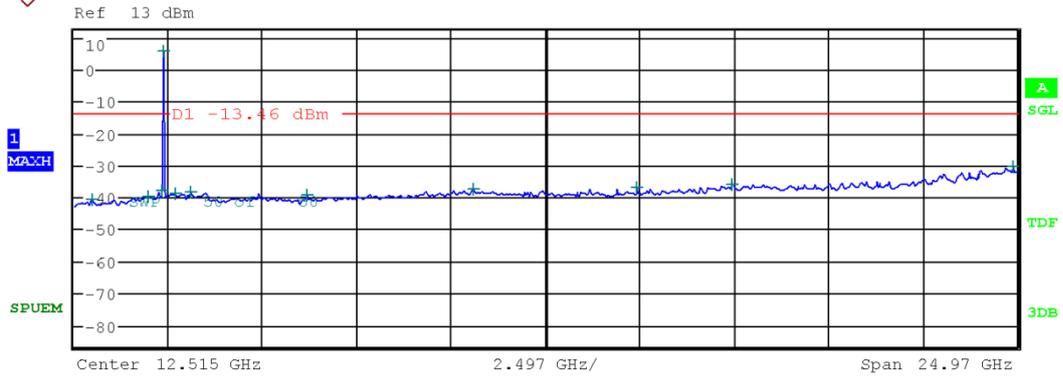

| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz]    | PwrAbs [dBm] | Δ Limit [dB] |
|------------|-----------|----------|--------------|--------------|--------------|
| 30.000 M   | 1.000 G   | 100.00 k | 511.120000 M | -40.86       | -200.00      |
| 1.000 G    | 2.000 G   | 100.00 k | 1.981000 G   | -39.69       | -200.00      |
| 2.000 G    | 2.400 G   | 100.00 k | 2.355720 G   | -38.14       | -200.00      |
| 2.400 G    | 2.483 G   | 100.00 k | 2.401824 G   | 5.59         | -200.00      |
| 2.483 G    | 3.000 G   | 100.00 k | 2.696401 G   | -39.11       | -200.00      |
| 3.000 G    | 6.000 G   | 100.00 k | 3.107333 G   | -38.62       | -200.00      |
| 6.000 G    | 9.000 G   | 100.00 k | 6.201000 G   | -39.28       | -200.00      |
| 9.000 G    | 12.000 G  | 100.00 k | 10.576000 G  | -37.62       | -200.00      |
| 12.000 G   | 15.000 G  | 100.00 k | 14.899333 G  | -37.19       | -200.00      |
| 15.000 G   | 20.000 G  | 100.00 k | 17.454444 G  | -35.84       | -200.00      |
| 20.000 G   | 25.000 G  | 100.00 k | 24.883333 G  | -30.48       | -200.00      |


**Reference for limit**

**Middle Channel** & Modulation: **8DPSK**

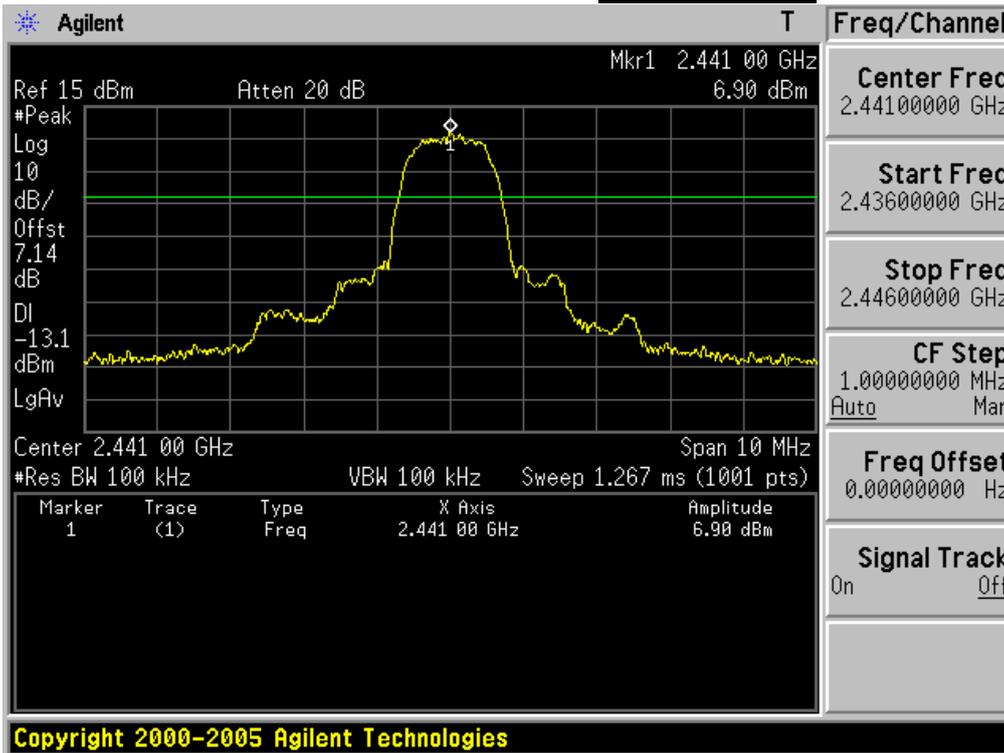


**Conducted Spurious Emissions**


**Middle Channel** & Modulation: **8DPSK**

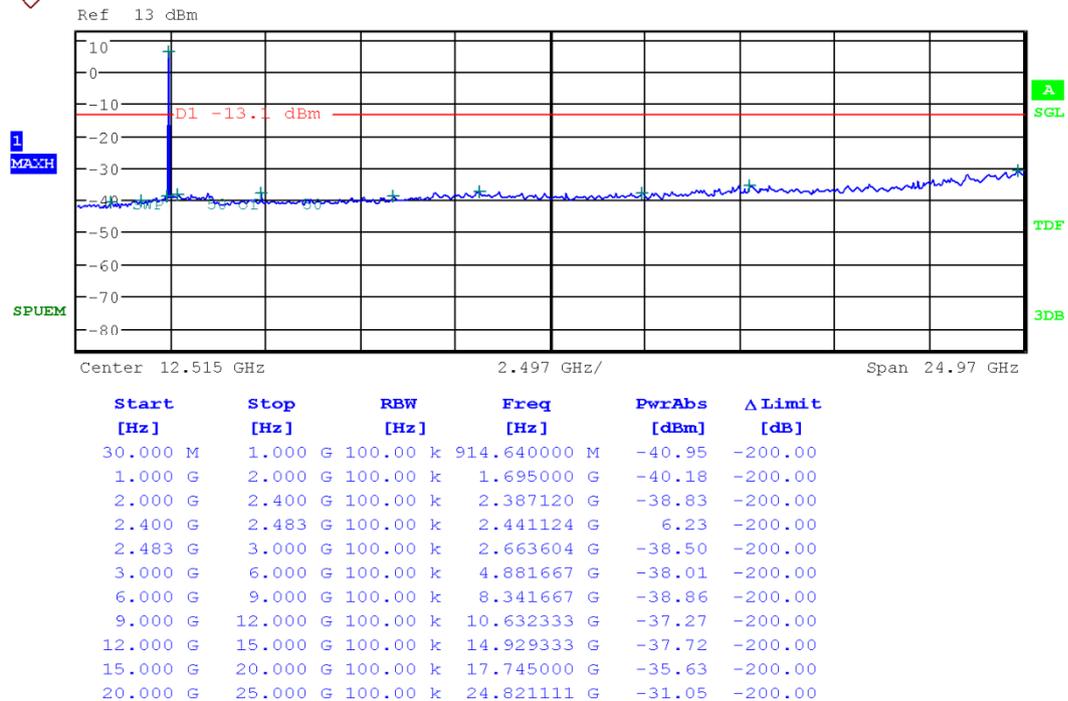

**High Band-edge** Highest Channel & Modulation: **8DPSK**

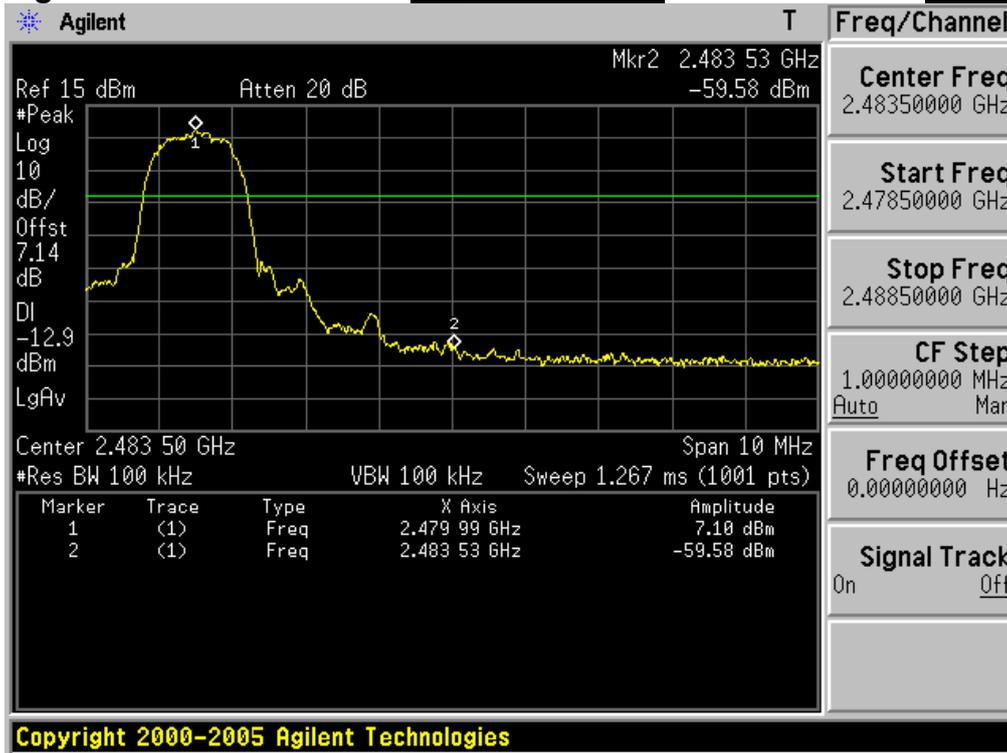


**High Band-edge** Hopping mode & Modulation: **8DPSK**

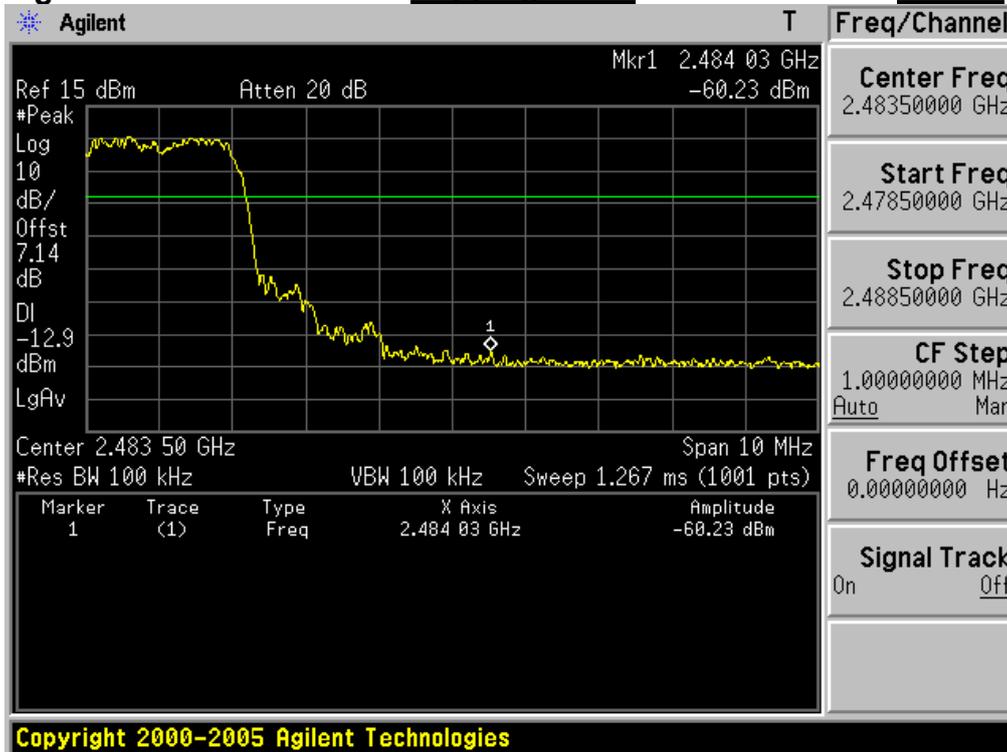

**Conducted Spurious Emissions**


**Highest Channel** & Modulation: **8DPSK**

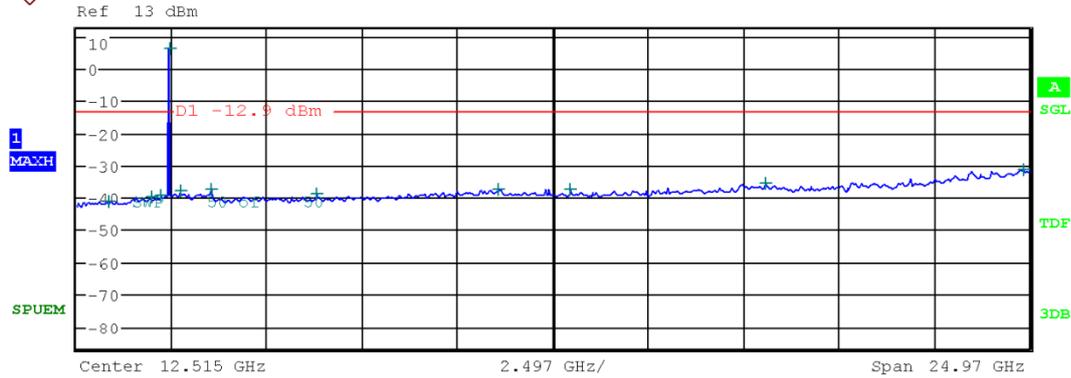

| Start [Hz] | Stop [Hz] | RBW [Hz] | Freq [Hz]    | PwrAbs [dBm] | Δ Limit [dB] |
|------------|-----------|----------|--------------|--------------|--------------|
| 30.000 M   | 1.000 G   | 100.00 k | 889.420000 M | -41.01       | -200.00      |
| 1.000 G    | 2.000 G   | 100.00 k | 1.983000 G   | -39.60       | -200.00      |
| 2.000 G    | 2.400 G   | 100.00 k | 2.230680 G   | -39.40       | -200.00      |
| 2.400 G    | 2.483 G   | 100.00 k | 2.479997 G   | 6.12         | -200.00      |
| 2.483 G    | 3.000 G   | 100.00 k | 2.753784 G   | -38.11       | -200.00      |
| 3.000 G    | 6.000 G   | 100.00 k | 3.568000 G   | -37.51       | -200.00      |
| 6.000 G    | 9.000 G   | 100.00 k | 6.318000 G   | -38.79       | -200.00      |
| 9.000 G    | 12.000 G  | 100.00 k | 11.090667 G  | -37.56       | -200.00      |
| 12.000 G   | 15.000 G  | 100.00 k | 12.943000 G  | -37.55       | -200.00      |
| 15.000 G   | 20.000 G  | 100.00 k | 18.057222 G  | -35.73       | -200.00      |
| 20.000 G   | 25.000 G  | 100.00 k | 24.858333 G  | -31.30       | -200.00      |

### 3. 99 % & 20dBc BW

#### 3.1. Test Setup

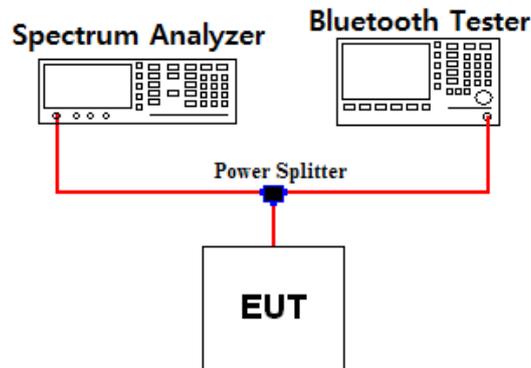

#### 3.2. Limit

Limit: Not Applicable

#### 3.3. Test Procedure

1. The 99% and 20dBc bandwidth were measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 10 kHz, VBW = 100 kHz, Span = 5 MHz.

#### 3.4. Test Results

Ambient temperature : 23 ~ 24 °C  
Relative humidity : 40 %


| Modulation                      | Tested Channel | 20dBc BW (MHz) | 99% BW (MHz) |
|---------------------------------|----------------|----------------|--------------|
| <u>GFSK</u>                     | Lowest         | 0.921          | 0.879        |
|                                 | Middle         | 0.923          | 0.878        |
|                                 | Highest        | 0.919          | 0.880        |
| <u><math>\pi/4</math> DQPSK</u> | Lowest         | 1.339          | 1.198        |
|                                 | Middle         | 1.337          | 1.194        |
|                                 | Highest        | 1.331          | 1.198        |
| <u>8DPSK</u>                    | Lowest         | 1.322          | 1.206        |
|                                 | Middle         | 1.347          | 1.205        |
|                                 | Highest        | 1.349          | 1.208        |

Note 1: See next pages for actual measured spectrum plots.

**99% & 20dB Bandwidth** Lowest Channel & Modulation: **GFSK**




**99% & 20dB Bandwidth** Middle Channel & Modulation: **GFSK**

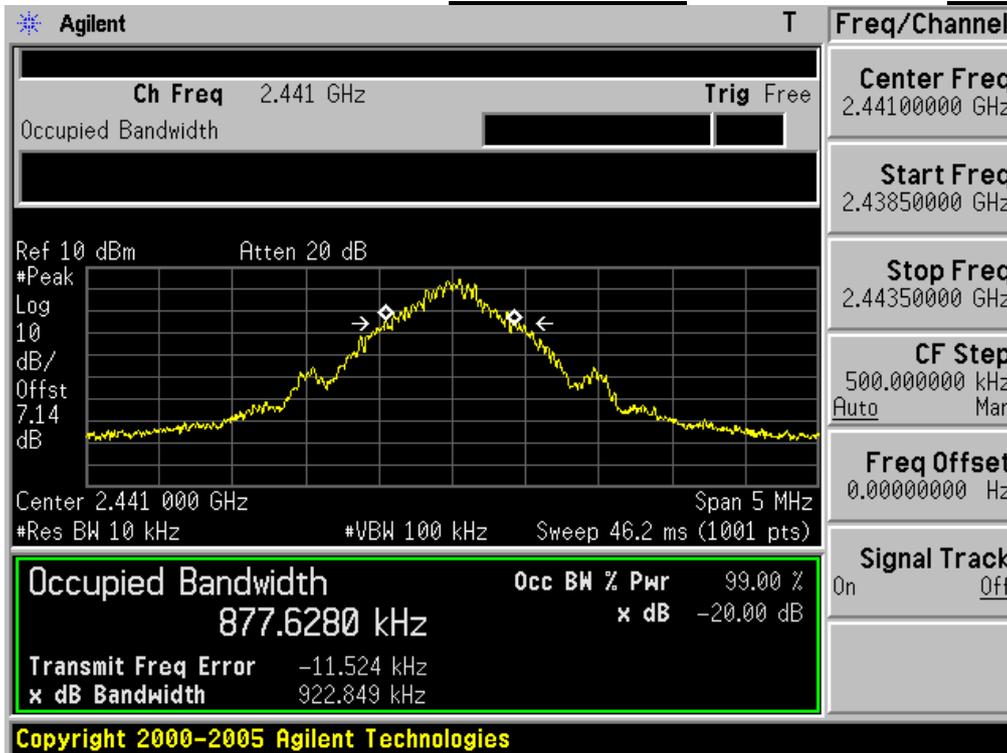


**99% & 20dB Bandwidth**

**Highest Channel** & Modulation: **GFSK**

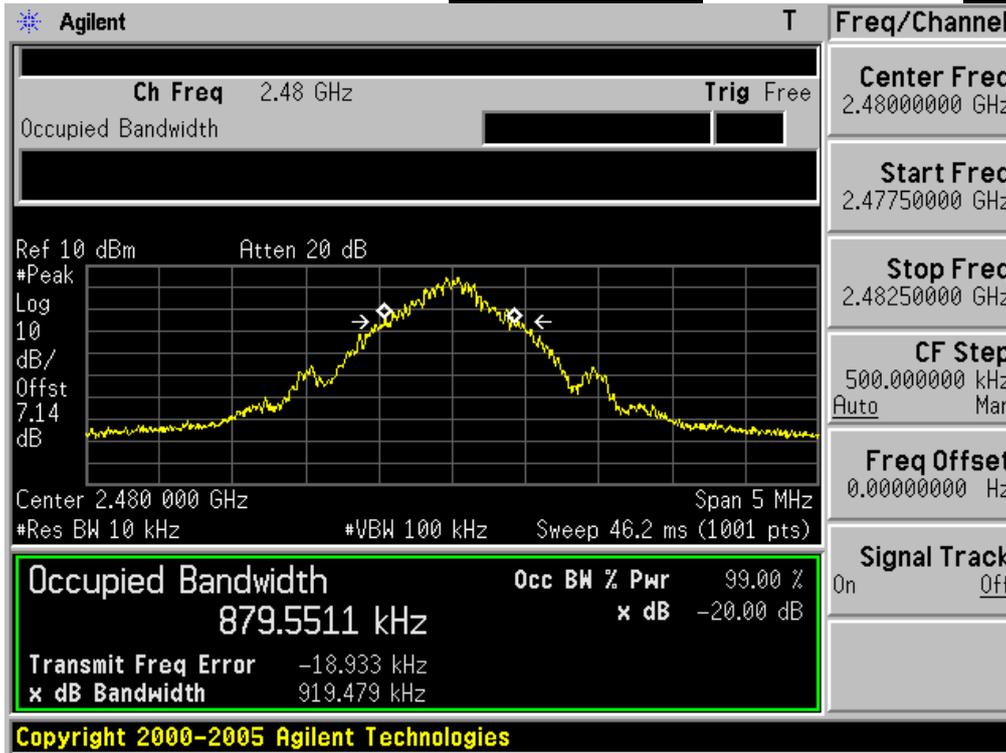


**99% & 20dB Bandwidth**

**Lowest Channel** & Modulation:  **$\pi/4$  DQPSK**

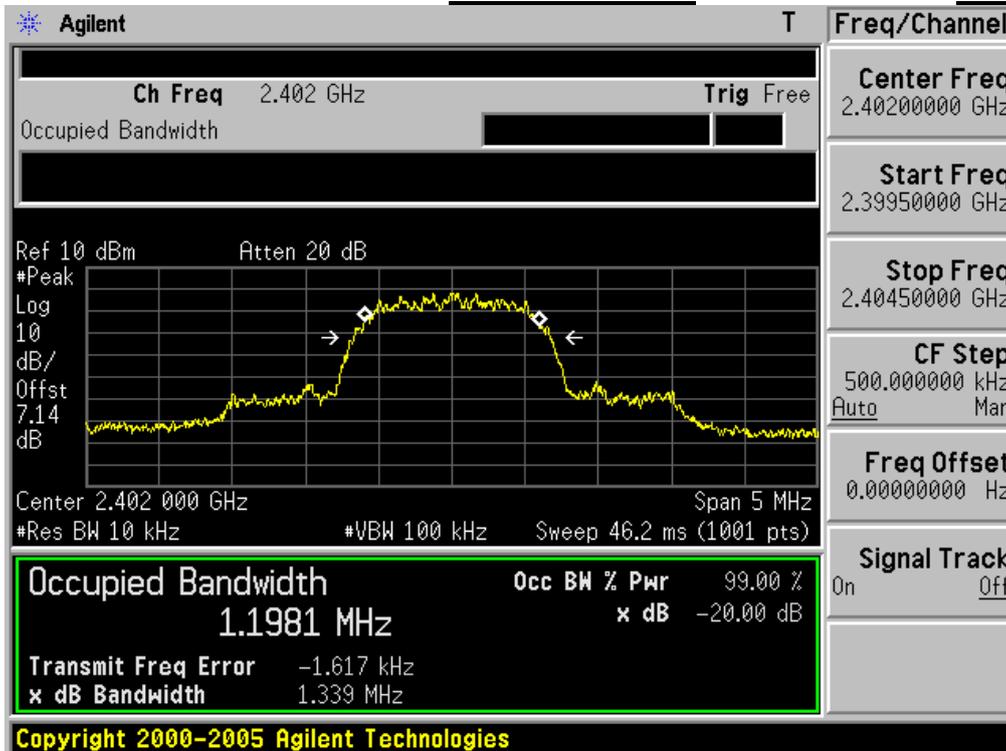


**99% & 20dB Bandwidth**

**Middle Channel & Modulation:  $\pi/4$  DQPSK**

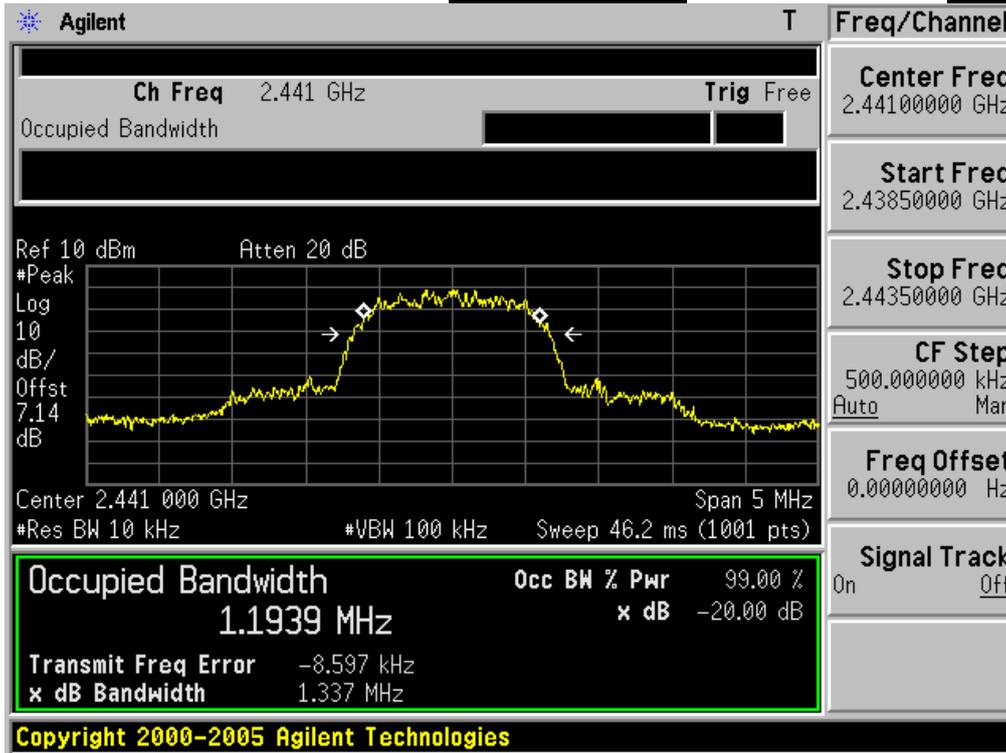


**99% & 20dB Bandwidth**

**Highest Channel & Modulation:  $\pi/4$  DQPSK**

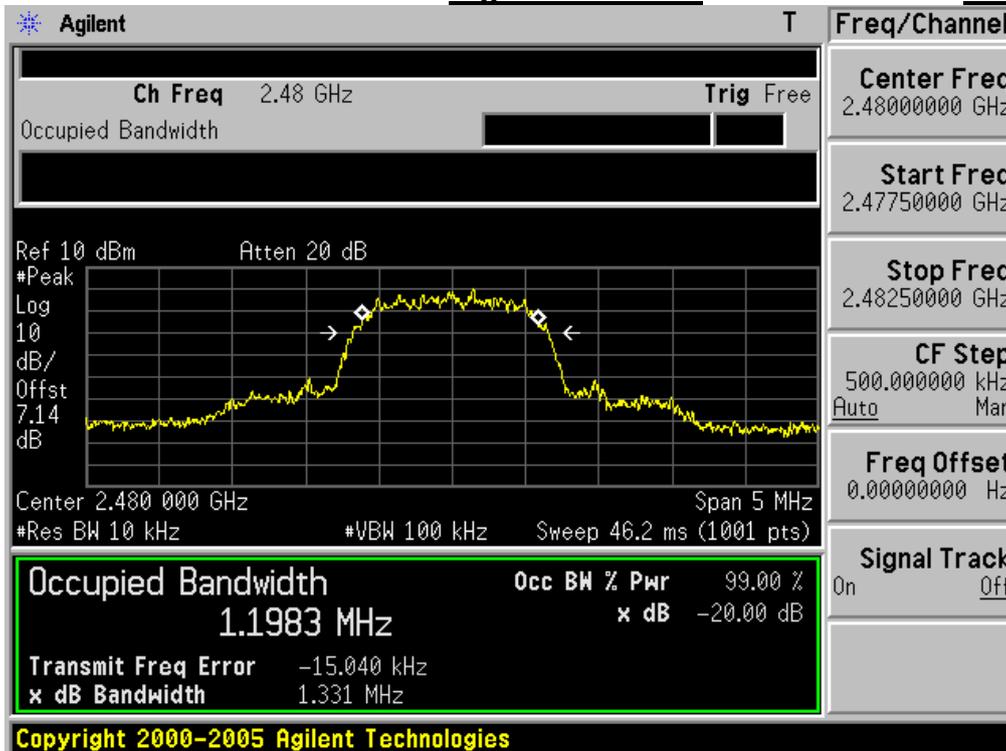


**99% & 20dB Bandwidth**

**Lowest Channel & Modulation: 8DPSK**

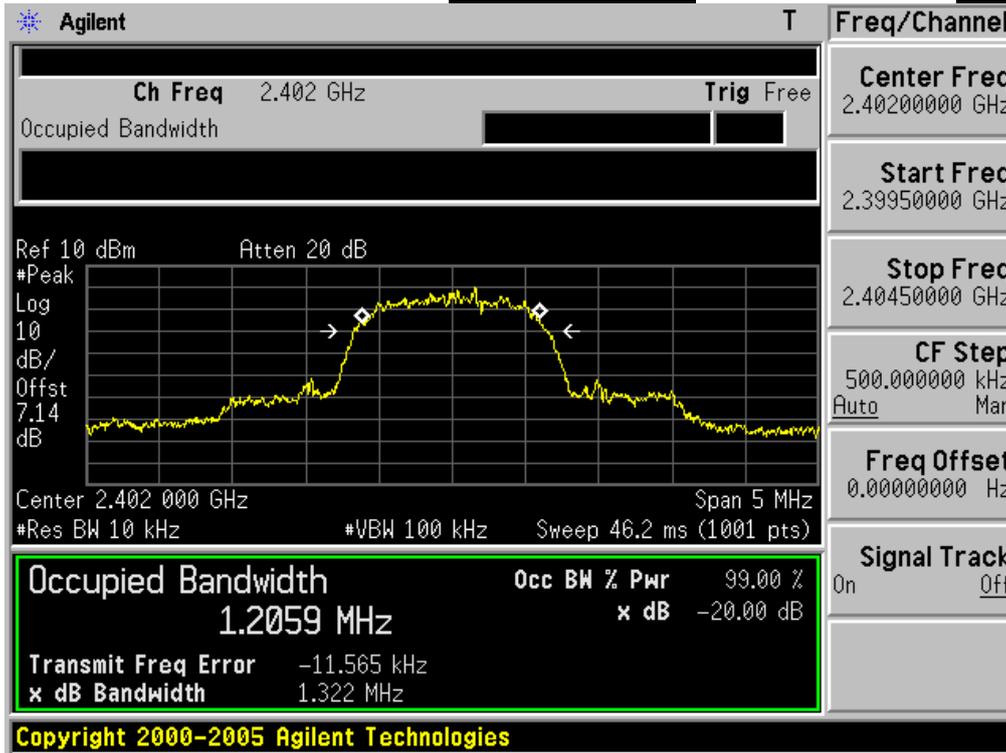


**99% & 20dB Bandwidth**

**Middle Channel & Modulation: 8DPSK**

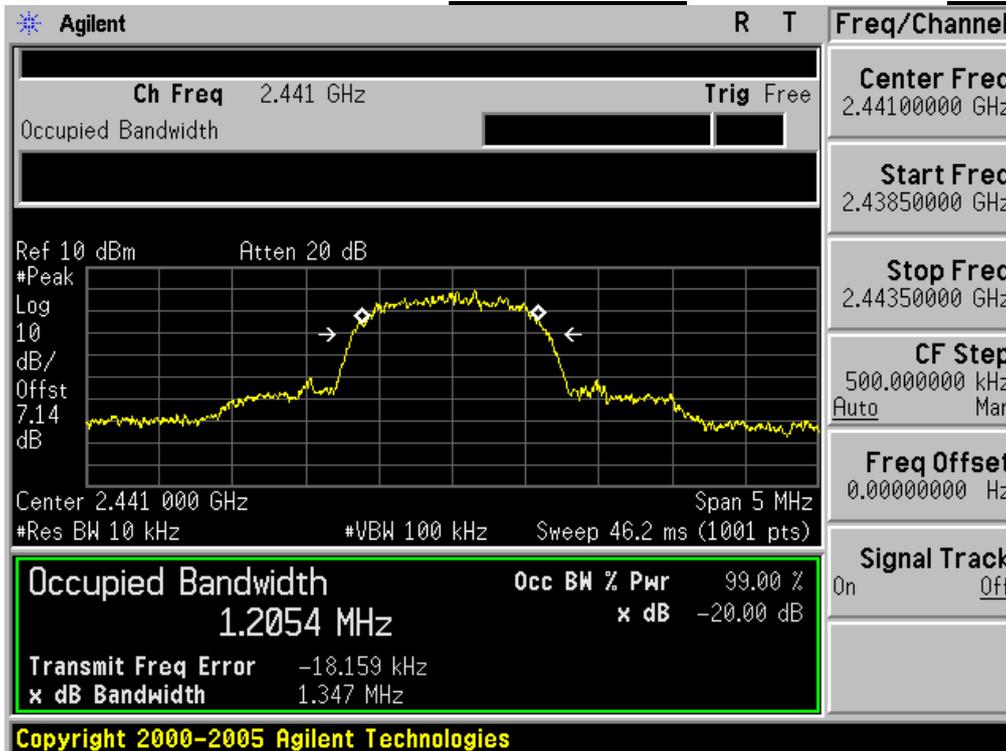


**99% & 20dB Bandwidth**

**Highest Channel & Modulation: 8DPSK**

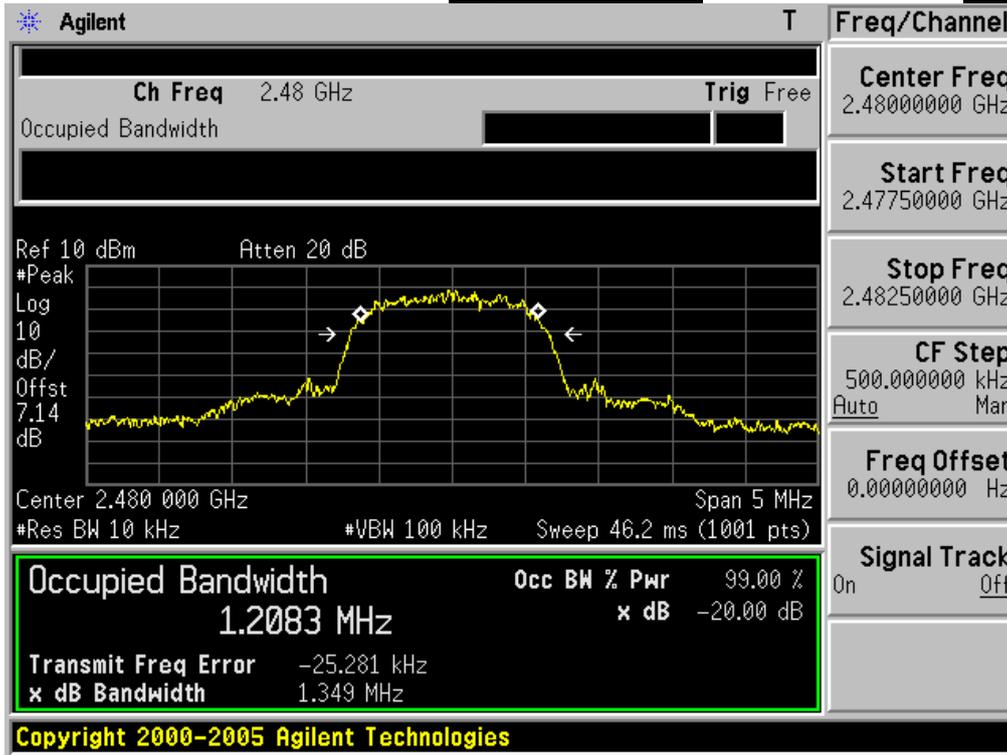

## 5. Maximum Peak Output Power Measurement

### 5.1. Test Setup

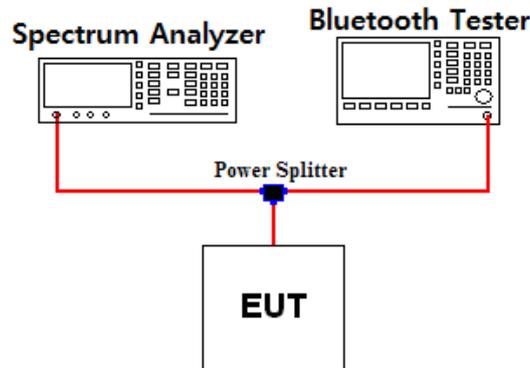

### 5.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following :

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

### 5.3. Test Procedure

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using ;  
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  20dB BW  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold

**5.4. Test Results**


Ambient temperature : 23 ~ 25 °C  
Relative humidity : 40 ~ 41 %

| Modulation                             | Tested Channel | Peak Output Power |        |
|--|----------------|-------------------|--------|
|  |                | dBm               | mW     |
| <b><u>GFSK</u></b>                     | <b>Lowest</b>  | 9.37              | 8.650  |
|  | <b>Middle</b>  | 9.89              | 9.750  |
|  | <b>Highest</b> | 10.20             | 10.471 |
| <b><u><math>\pi/4</math> DQPSK</u></b> | <b>Lowest</b>  | 9.24              | 8.395  |
|  | <b>Middle</b>  | 9.76              | 9.462  |
|  | <b>Highest</b> | 10.08             | 10.186 |
| <b><u>8DPSK</u></b>                    | <b>Lowest</b>  | 9.74              | 9.419  |
|  | <b>Middle</b>  | 10.30             | 10.715 |
|  | <b>Highest</b> | 10.63             | 11.561 |

Note 1: See next pages for actual measured spectrum plots.


**Peak Output Power**

**Lowest Channel** & Modulation: **GFSK**

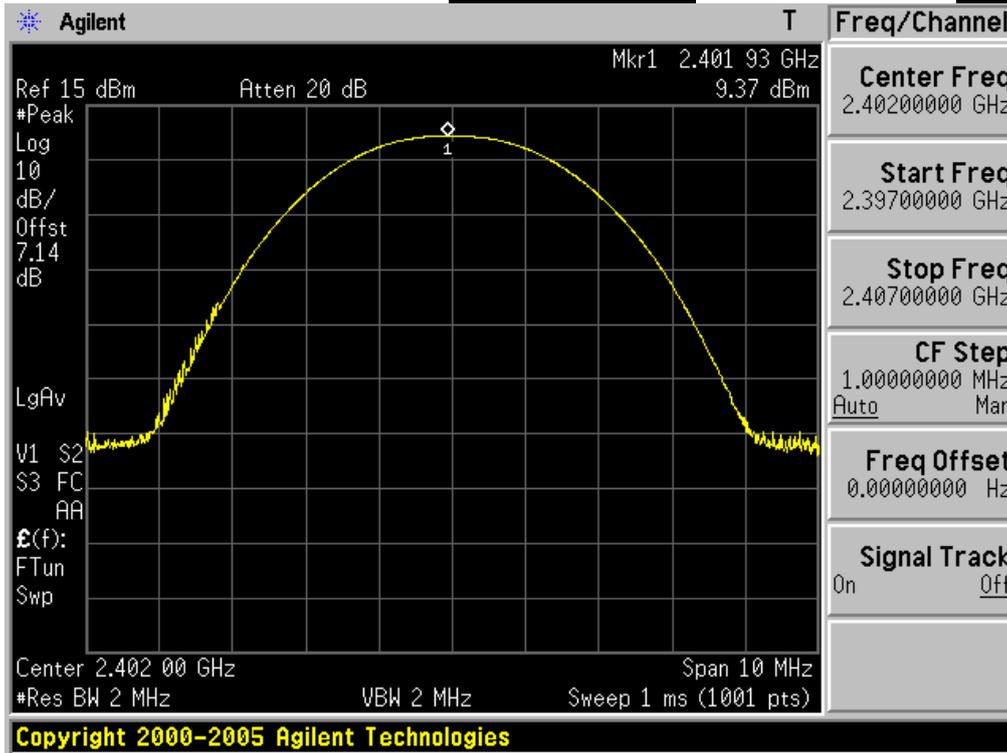


**Peak Output Power**

**Middle Channel** & Modulation: **GFSK**

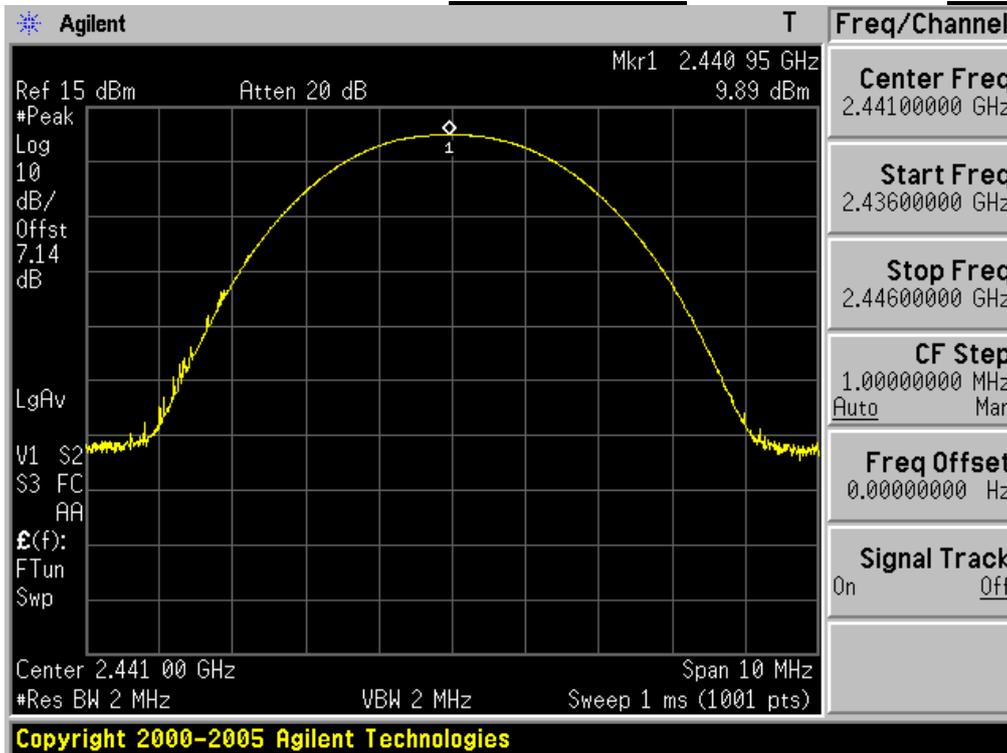


**Peak Output Power**

**Highest Channel** & Modulation: **GFSK**

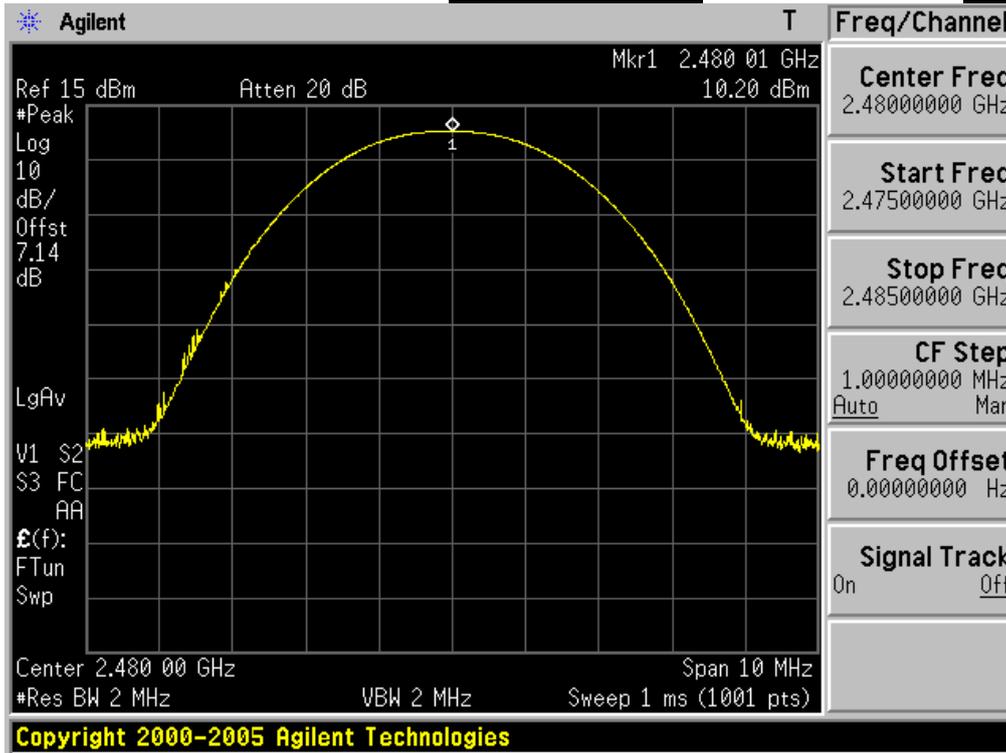


**Peak Output Power**

**Lowest Channel** & Modulation:  **$\pi/4$  DQPSK**

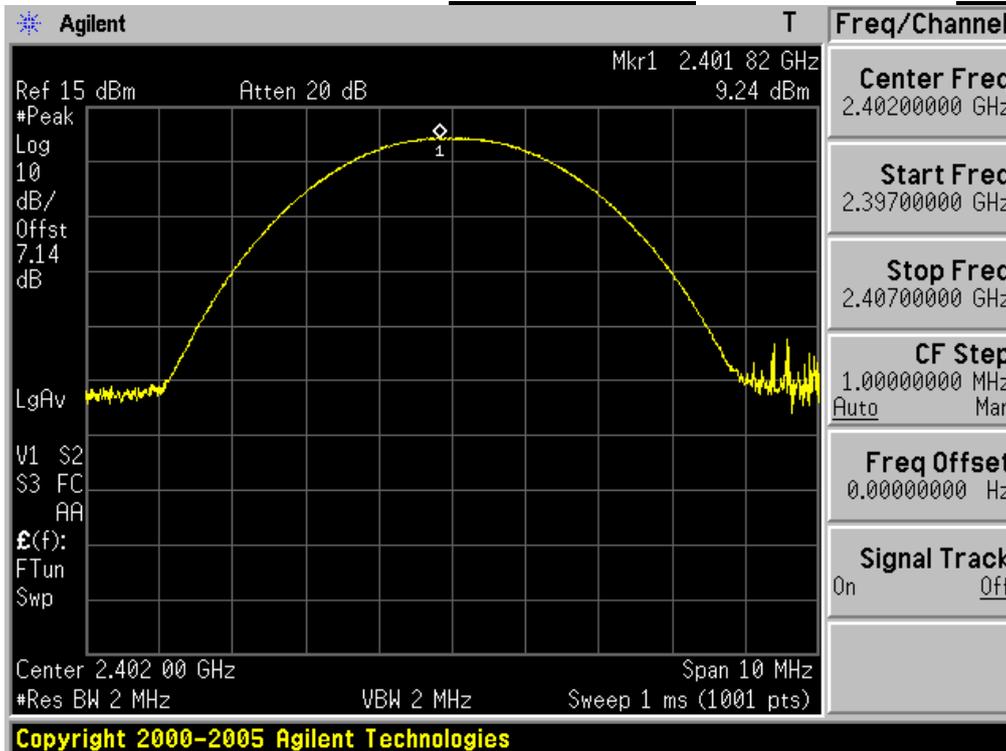


**Peak Output Power**

**Middle Channel & Modulation:  $\pi/4$  DQPSK**

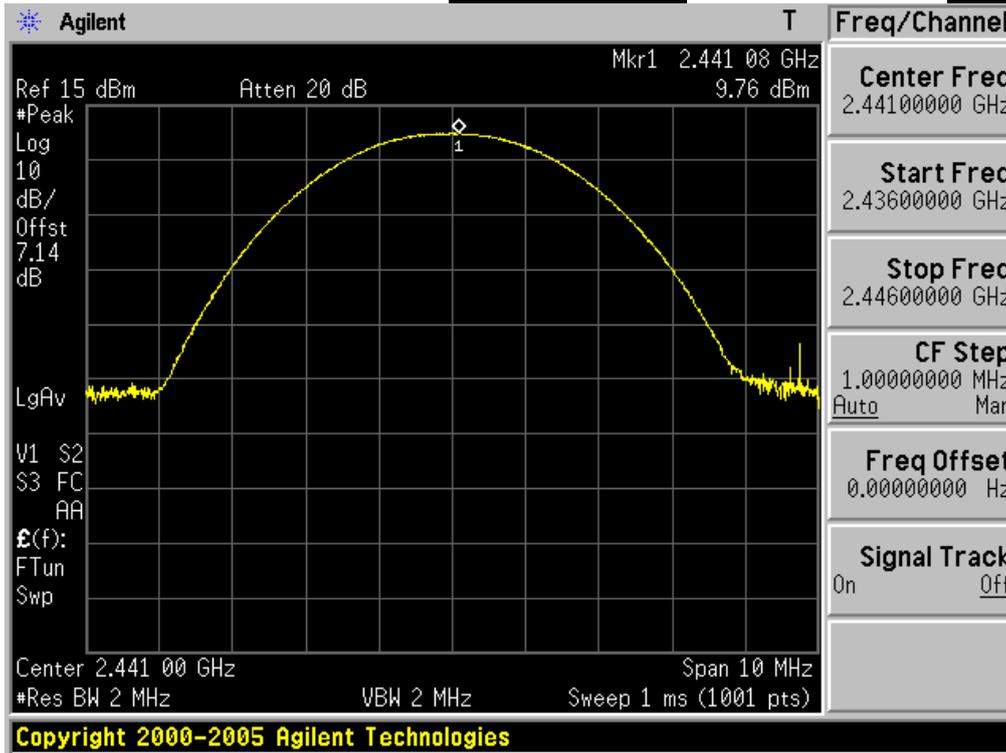


**Peak Output Power**

**Highest Channel & Modulation:  $\pi/4$  DQPSK**

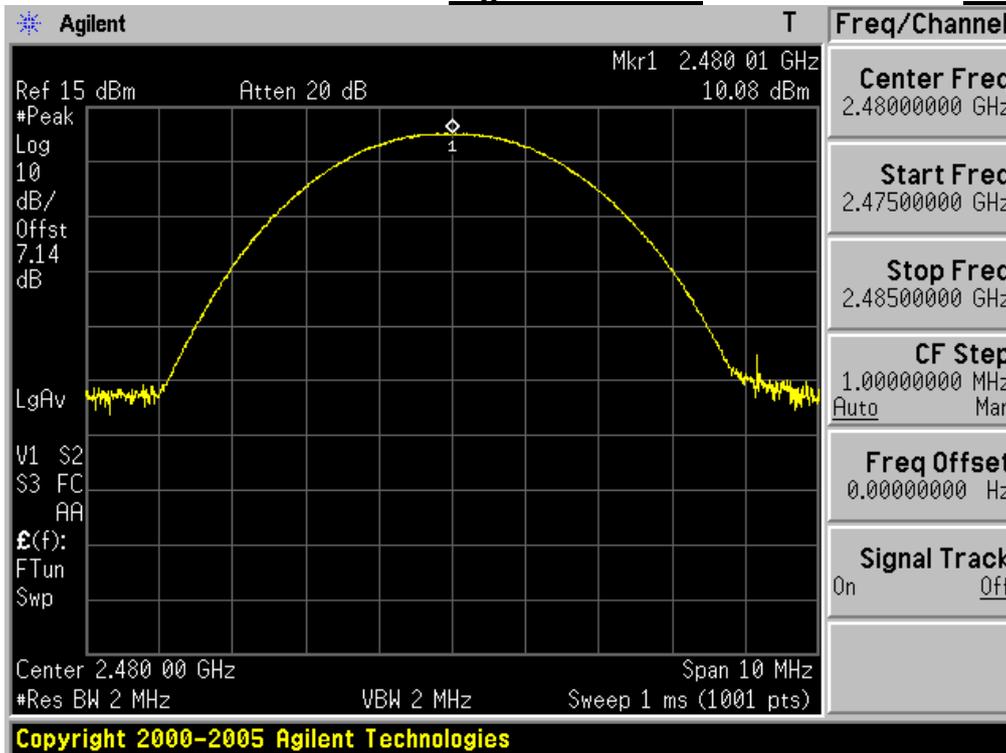


**Peak Output Power**

**Lowest Channel & Modulation: 8DPSK**

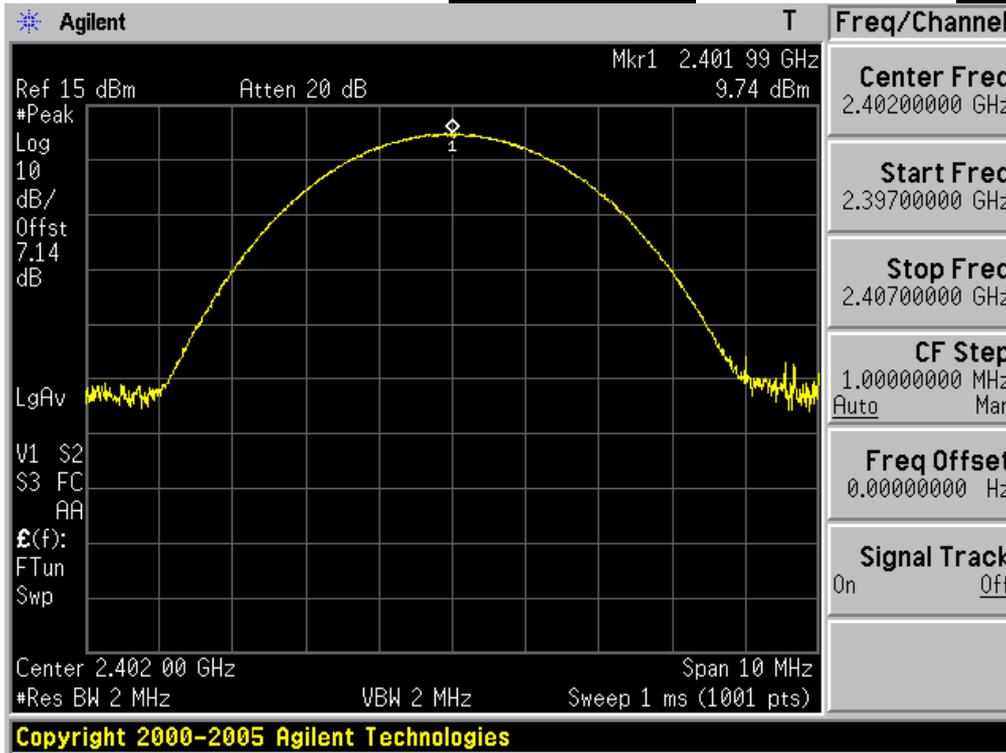


**Peak Output Power**

**Middle Channel & Modulation: 8DPSK**

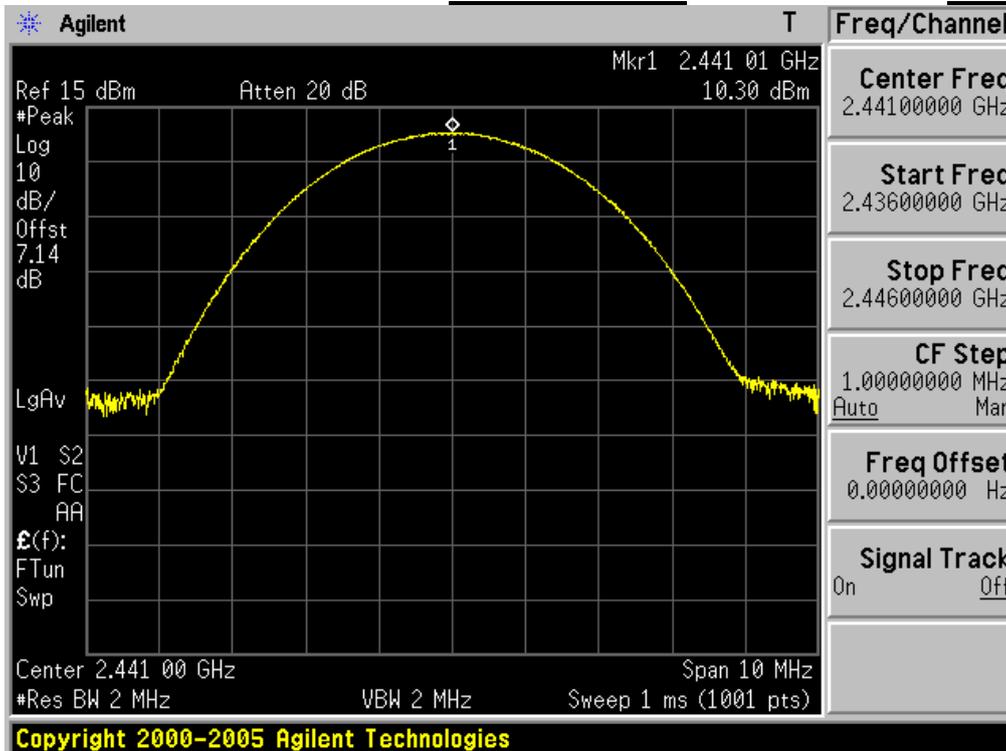

Peak Output Power

Highest Channel & Modulation: 8DPSK

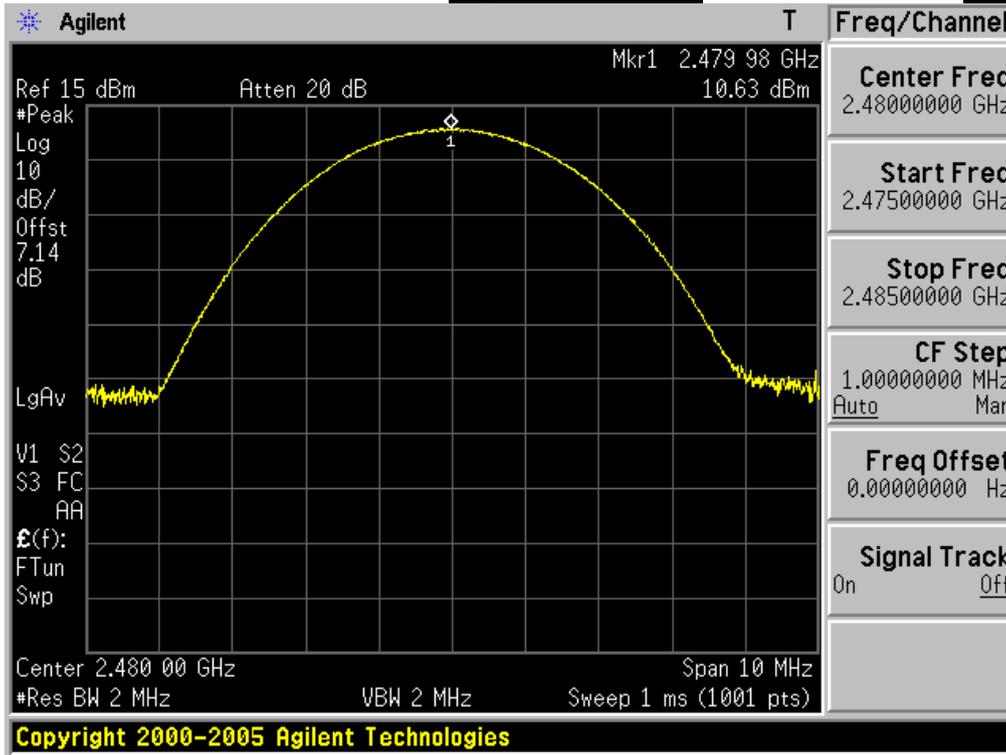

## 6. Transmitter AC Power Line Conducted Emission

### 6.1. Test Setup

Refer to test setup photo.

### 6.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Conducted Limit (dBuV) |            |
|-----------------------|------------------------|------------|
|                       | Quasi-Peak             | Average    |
| 0.15 ~ 0.5            | 66 to 56 *             | 56 to 46 * |
| 0.5 ~ 5               | 56                     | 46         |
| 5 ~ 30                | 60                     | 50         |

\* Decreases with the logarithm of the frequency

### 6.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

### 6.4. Test Results



#### AC Line Conducted Emissions (Graph) & Modulation: **GFSK**



#### Results of Conducted Emission

Digital EMC  
 Date : 2011/09/08

|                      |                |               |                   |
|----------------------|----------------|---------------|-------------------|
| Model No.            | : LG-E510g     | Reference No. | :                 |
| Type                 | :              | Power Supply  | : 120 V 60 Hz     |
| Serial No.           | :              | Temp/Humi.    | : 24 °C 41 % R.H. |
| Test Condition       | : Hopping Mode | Operator      | : S.K.RYU         |
| Memo                 | :              |               |                   |
| LIMIT : CISPR22_B QP |                |               |                   |
| CISPR22_B AV         |                |               |                   |

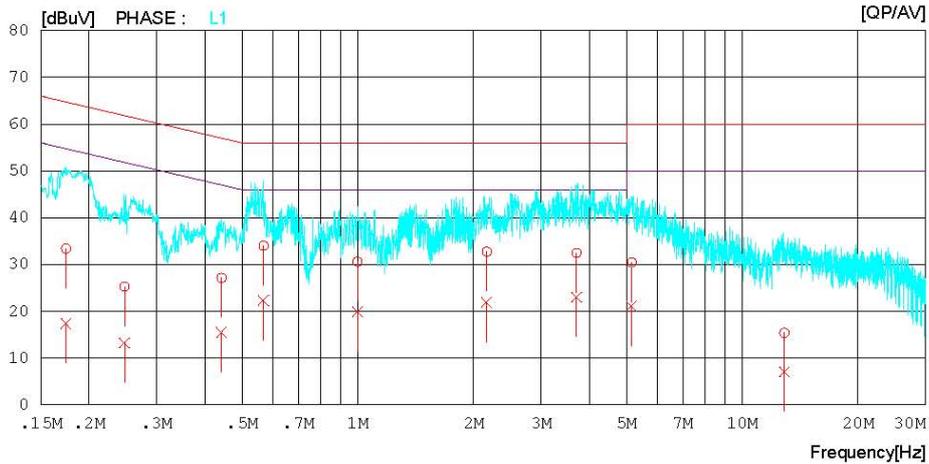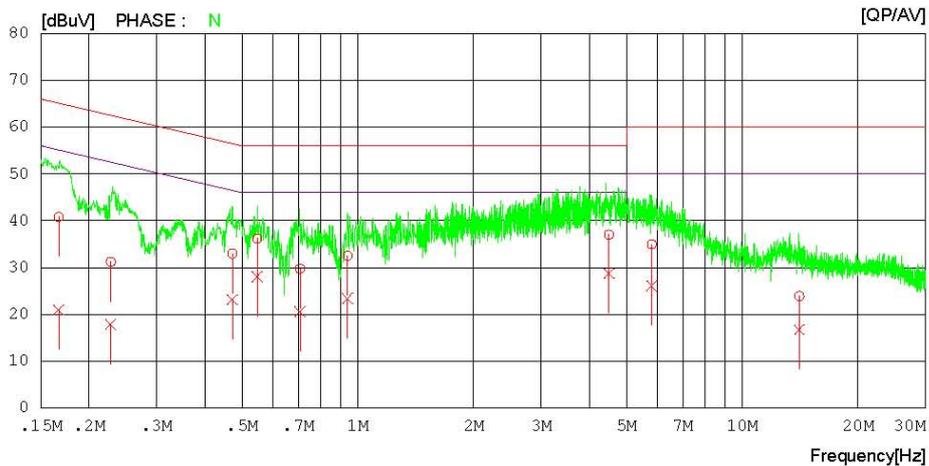

**AC Line Conducted Emissions (List) & Modulation: GFSK**

**Results of Conducted Emission**

Digital EMC  
 Date : 2011/09/08

Model No. : LG-E510g  
 Type :  
 Serial No. :  
 Test Condition : Hopping Mode  
 Reference No. :  
 Power Supply : 120 V 60 Hz  
 Temp/Humi. : 24 °C 41 % R.H.  
 Operator : S.K.RYU

Memo :  
 LIMIT : CISPR22\_B QP  
 CISPR22\_B AV

| NO | FREQ<br>[MHz] | READING      |              | C. FACTOR<br>[dB] | RESULT       |              | LIMIT        |              | MARGIN       |              | PHASE |
|----|---------------|--------------|--------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|-------|
|    |               | QP<br>[dBuV] | AV<br>[dBuV] |                   | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dBuV] | AV<br>[dBuV] |       |
| 1  | 0.16666       | 40.7         | 20.8         | 0.1               | 40.8         | 20.9         | 65.1         | 55.1         | 24.3         | 34.2         | N     |
| 2  | 0.22785       | 31.1         | 17.8         | 0.1               | 31.2         | 17.9         | 62.5         | 52.5         | 31.3         | 34.6         | N     |
| 3  | 0.47188       | 32.8         | 23.0         | 0.1               | 32.9         | 23.1         | 56.5         | 46.5         | 23.6         | 23.4         | N     |
| 4  | 0.54709       | 36.1         | 27.9         | 0.1               | 36.2         | 28.0         | 56.0         | 46.0         | 19.8         | 18.0         | N     |
| 5  | 0.70733       | 29.5         | 20.4         | 0.2               | 29.7         | 20.6         | 56.0         | 46.0         | 26.3         | 25.4         | N     |
| 6  | 0.94021       | 32.3         | 23.2         | 0.2               | 32.5         | 23.4         | 56.0         | 46.0         | 23.5         | 22.6         | N     |
| 7  | 4.49800       | 36.6         | 28.3         | 0.4               | 37.0         | 28.7         | 56.0         | 46.0         | 19.0         | 17.3         | N     |
| 8  | 5.81550       | 34.5         | 25.7         | 0.4               | 34.9         | 26.1         | 60.0         | 50.0         | 25.1         | 23.9         | N     |
| 9  | 14.06300      | 23.1         | 15.9         | 0.8               | 23.9         | 16.7         | 60.0         | 50.0         | 36.1         | 33.3         | N     |
| 10 | 0.17413       | 33.3         | 17.3         | 0.1               | 33.4         | 17.4         | 64.8         | 54.8         | 31.4         | 37.4         | L1    |
| 11 | 0.24729       | 25.2         | 13.1         | 0.1               | 25.3         | 13.2         | 61.8         | 51.8         | 36.5         | 38.6         | L1    |
| 12 | 0.44223       | 27.1         | 15.4         | 0.1               | 27.2         | 15.5         | 57.0         | 47.0         | 29.8         | 31.5         | L1    |
| 13 | 0.56840       | 33.9         | 22.3         | 0.1               | 34.0         | 22.4         | 56.0         | 46.0         | 22.0         | 23.6         | L1    |
| 14 | 0.99819       | 30.4         | 19.8         | 0.2               | 30.6         | 20.0         | 56.0         | 46.0         | 25.4         | 26.0         | L1    |
| 15 | 2.16450       | 32.5         | 21.7         | 0.3               | 32.8         | 22.0         | 56.0         | 46.0         | 23.2         | 24.0         | L1    |
| 16 | 3.70550       | 32.1         | 22.7         | 0.4               | 32.5         | 23.1         | 56.0         | 46.0         | 23.5         | 22.9         | L1    |
| 17 | 5.15550       | 30.0         | 20.8         | 0.4               | 30.4         | 21.2         | 60.0         | 50.0         | 29.6         | 28.8         | L1    |
| 18 | 12.85900      | 14.6         | 6.3          | 0.8               | 15.4         | 7.1          | 60.0         | 50.0         | 44.6         | 42.9         | L1    |