

## MEASUREMENT REPORT

### GSM / GPRS / CDMA / WCDMA

**Applicant Name:**

LG Electronics USA, Inc.  
111 Sylvan Avenue, North Building  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**

07/25 - 09/14/2020

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M2007230114-06.ZNF

**FCC ID:**

**ZNFF100VM**

**APPLICANT:**

**LG Electronics USA, Inc.**

**Application Type:**

Class II Permissive Change

**Model:**

LM-F100VM

**Additional Model(s):**

LMF100VM, F100VM

**EUT Type:**

Portable Handset

**FCC Classification:**

PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):**

22, 24, & 27

**Test Procedure(s):**


ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01,  
KDB 648474 D03 v01r04

**Class II Permissive Change:**

Please see FCC change document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


  
 Randy Ortanez  
 President


|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 1 of 28                    |

## TABLE OF CONTENTS


|     |                                                |    |
|-----|------------------------------------------------|----|
| 1.0 | INTRODUCTION .....                             | 4  |
| 1.1 | Scope .....                                    | 4  |
| 1.2 | PCTEST Test Location .....                     | 4  |
| 1.3 | Test Facility / Accreditations .....           | 4  |
| 2.0 | PRODUCT INFORMATION.....                       | 5  |
| 2.1 | Equipment Description.....                     | 5  |
| 2.2 | Device Capabilities .....                      | 5  |
| 2.3 | Test Configuration.....                        | 5  |
| 2.4 | EMI Suppression Device(s)/Modifications .....  | 5  |
| 3.0 | DESCRIPTION OF TESTS .....                     | 6  |
| 3.1 | Evaluation Procedure.....                      | 6  |
| 3.2 | Cellular - Base Frequency Blocks.....          | 6  |
| 3.3 | Cellular - Mobile Frequency Blocks .....       | 6  |
| 3.4 | PCS - Base Frequency Blocks.....               | 6  |
| 3.5 | PCS - Mobile Frequency Blocks .....            | 7  |
| 3.6 | AWS - Base Frequency Blocks.....               | 7  |
| 3.7 | AWS - Mobile Frequency Blocks .....            | 7  |
| 3.8 | Radiated Measurements.....                     | 8  |
| 4.0 | MEASUREMENT UNCERTAINTY .....                  | 9  |
| 5.0 | TEST EQUIPMENT CALIBRATION DATA .....          | 10 |
| 6.0 | SAMPLE CALCULATIONS .....                      | 11 |
| 7.0 | TEST RESULTS.....                              | 12 |
| 7.1 | Summary.....                                   | 12 |
| 7.2 | Radiated Power (ERP/EIRP) .....                | 13 |
| 7.3 | Radiated Spurious Emissions Measurements ..... | 18 |
| 8.0 | CONCLUSION.....                                | 28 |

|                                         |                                                                                                                                                 |                                                    |                                                                                                 |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  <b>PCTEST</b><br><small>Proud to be part of element</small> | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  <b>LG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                                                                               | EUT Type:<br>Portable Handset                      | Page 2 of 28                                                                                    |                                 |



## MEASUREMENT REPORT

### GSM / GPRS / EDGE / CDMA / WCDMA



| Mode      | FCC Rule Part | Tx Frequency (MHz) | ERP            |                  | EIRP           |                  |
|-----------|---------------|--------------------|----------------|------------------|----------------|------------------|
|           |               |                    | Max. Power (W) | Max. Power (dBm) | Max. Power (W) | Max. Power (dBm) |
| GPRS850   | 22H           | 824.2 - 848.8      | 0.313          | 24.96            | 0.514          | 27.11            |
| EDGE850   | 22H           | 824.2 - 848.8      | 0.234          | 23.70            | 0.385          | 25.85            |
| CDMA850   | 22H           | 824.70 - 848.31    | 0.051          | 17.04            | 0.083          | 19.19            |
| WCDMA850  | 22H           | 826.4 - 846.6      | 0.060          | 17.77            | 0.098          | 19.92            |
| WCDMA1700 | 27            | 1712.4 - 1752.6    |                |                  | 0.052          | 17.14            |
| GPRS1900  | 24E           | 1850.2 - 1909.8    |                |                  | 1.079          | 30.33            |
| EDGE1900  | 24E           | 1850.2 - 1909.8    |                |                  | 0.561          | 27.49            |
| CDMA1900  | 24E           | 1851.25 - 1908.75  |                |                  | 0.215          | 23.33            |
| WCDMA1900 | 24E           | 1852.4 - 1907.6    |                |                  | 0.172          | 22.34            |

**EUT Overview**

|                                                |                                                                                     |                                                           |                                                                                       |                                        |
|------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFF100VM                       |  | <b>MEASUREMENT REPORT</b><br>(CLASS II PERMISSIVE CHANGE) |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2007230114-06.ZNF | <b>Test Dates:</b><br>07/25 - 09/14/2020                                            | <b>EUT Type:</b><br>Portable Handset                      |                                                                                       | Page 3 of 28                           |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 4 of 28                    |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFF100VM**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

**Test Device Serial No.:** 04254, 04296

### 2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-Band 5G NR, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

The EUT is capable of operating in screen closed and screen open configurations. The worst-case configuration for radiated emissions was determined from open and closed configurations in X, Y, and Z orientations for horizontal and vertical antenna polarizations. The worst case radiated emissions data is shown in this report. Additionally, the EUT is support a camera that mechanically pops up from the device. The worst case configuration was investigated with the camera down and popped up and worst case radiated data is reported herein.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 5 of 28                    |


## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-E-2016) and "Measurement Guidance for Certification of Licensed Digital Transmitters" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

### 3.2 Cellular - Base Frequency Blocks

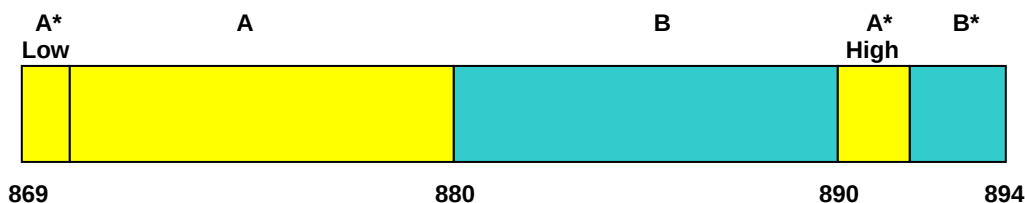


BLOCK 1: 869 – 880 MHz (A\* Low + A)

BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B\*)

### 3.3 Cellular - Mobile Frequency Blocks

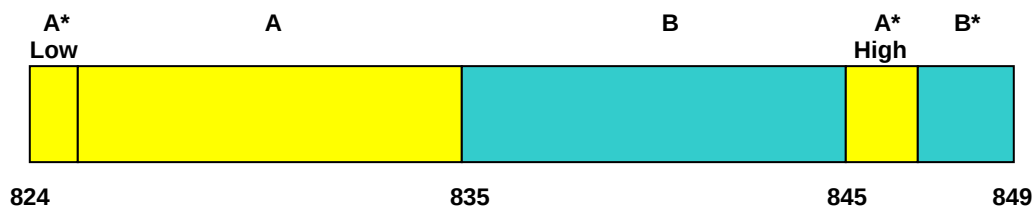


BLOCK 1: 824 – 835 MHz (A\* Low + A)

BLOCK 3: 845 – 846.5 MHz (A\* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B\*)

### 3.4 PCS - Base Frequency Blocks

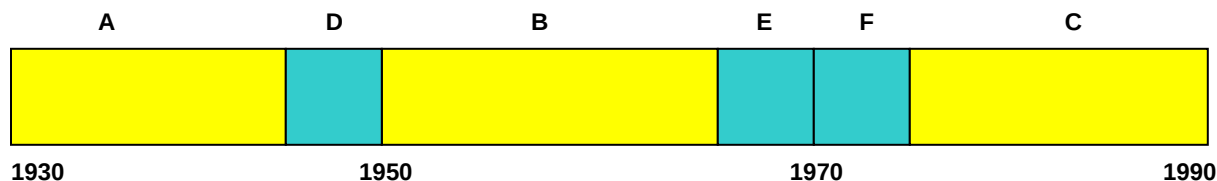

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)


BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 6 of 28                    |

### 3.5 PCS - Mobile Frequency Blocks

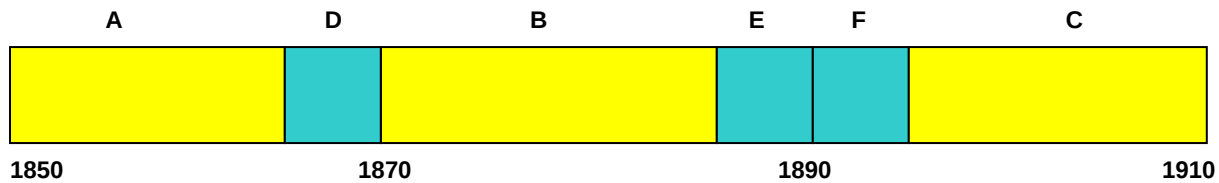

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)


BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

### 3.6 AWS - Base Frequency Blocks

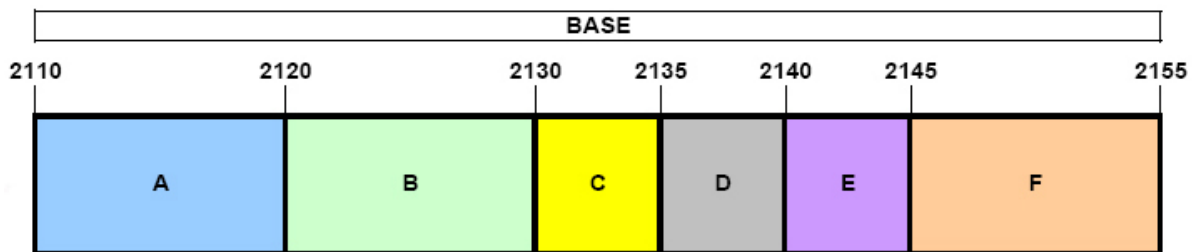

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)


BLOCK 2: 2120 – 2130 MHz (B)

BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (F)

### 3.7 AWS - Mobile Frequency Blocks

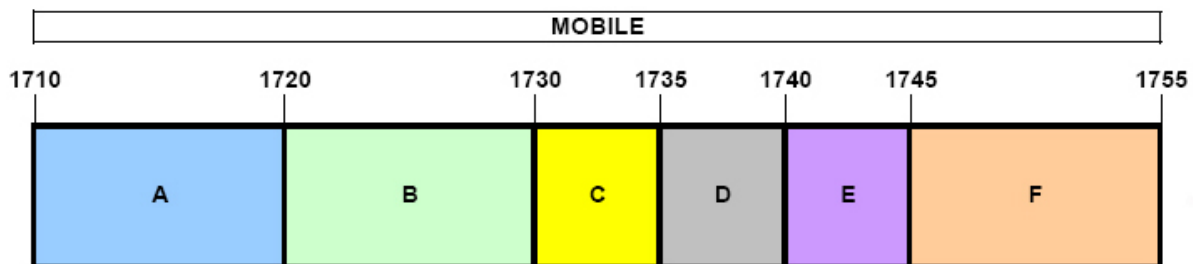

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 7 of 28                    |

### 3.8 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 8 of 28                    |

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                  | Expanded Uncertainty ( $\pm$ dB) |
|-------------------------------|----------------------------------|
| Radiated Disturbance (<1GHz)  | 4.98                             |
| Radiated Disturbance (>1GHz)  | 5.07                             |
| Radiated Disturbance (>18GHz) | 5.09                             |

|                                         |                                                                                                                                               |                                                                                       |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  <b>MEASUREMENT REPORT</b><br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                                                                             | EUT Type:<br>Portable Handset                                                         | Page 9 of 28                    |

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer    | Model      | Description                      | Cal Date  | Cal Interval | Cal Due   | Serial Number |
|-----------------|------------|----------------------------------|-----------|--------------|-----------|---------------|
| Agilent         | E5515C     | Wireless Communications Test Set | N/A       |              |           | GB46310798    |
| Agilent         | E5515C     | Wireless Communications Test Set | N/A       |              |           | GB45360985    |
| Agilent         | N9038A     | MXE EMI Receiver                 | 8/11/2020 | Annual       | 8/11/2021 | MY51210133    |
| Agilent         | N9030A     | PXA Signal Analyzer (44GHz)      | 8/17/2020 | Annual       | 8/17/2021 | MY52350166    |
| COM-Power       | AL-130R    | Active Loop Antenna              | 8/22/2019 | Biennial     | 8/22/2021 | 121085        |
| Emco            | 3115       | Horn Antenna (1-18GHz)           | 6/18/2020 | Biennial     | 6/18/2022 | 9704-5182     |
| ETS Lindgren    | 3117       | 1-18 GHz DRG Horn (Medium)       | 2/14/2019 | Biennial     | 2/14/2021 | 125518        |
| ETS Lindgren    | 3164-08    | Quad Ridge Horn Antenna          | 2/22/2019 | Biennial     | 2/22/2021 | 128338        |
| Mini Circuits   | TVA-11-422 | RF Power Amp                     | N/A       |              |           | QA1317001     |
| Mini-Circuits   | SSG-4000HP | Synthesized Signal Generator     | N/A       |              |           | 11208010032   |
| Mini Circuits   | PWR-4GHS   | USB Power Sensor                 | 6/18/2020 | Annual       | 6/18/2021 | 12001070013   |
| Mini-Circuits   | SSG-4000HP | Synthesized Signal Generator     | N/A       |              |           | 11403100002   |
| Rohde & Schwarz | CMU200     | Base Station Simulator           | N/A       |              |           | 836371/0079   |
| Rohde & Schwarz | CMU200     | Base Station Simulator           | N/A       |              |           | 833855/0010   |
| Rohde & Schwarz | CMW500     | Radio Communication Tester       | N/A       |              |           | 100976        |
| Rohde & Schwarz | CMW500     | Radio Communication Tester       | N/A       |              |           | 112347        |
| Rohde & Schwarz | ESU26      | EMI Test Receiver (26.5GHz)      | 7/15/2020 | Annual       | 7/15/2021 | 100342        |
| Rohde & Schwarz | ESU40      | EMI Test Receiver (40GHz)        | 9/23/2019 | Annual       | 9/23/2020 | 100348        |
| Rohde & Schwarz | SFUNIT-Rx  | Shielded Filter Unit             | 2/10/2020 | Annual       | 2/10/2021 | 102134        |
| Rohde & Schwarz | SFUNIT-Rx  | Shielded Filter Unit             | 2/21/2020 | Annual       | 2/21/2021 | 102133        |
| Sunol           | DRH-118    | Horn Antenna (1-18GHz)           | 10/3/2019 | Biennial     | 10/3/2021 | A050307       |
| Sunol Science   | JB5        | Bi-Log Antenna (30M - 5GHz)      | 7/27/2020 | Biennial     | 7/27/2022 | A051107       |

**Table 5-1. Test Equipment**

### Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      | Page 10 of 28                                                                         |                                 |

## 6.0 SAMPLE CALCULATIONS

### Spurious Radiated Emission

#### Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

|                                         |                                                                                                                                   |                                                    |                                                                                       |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       | <br><small>Proud to be part of element</small> | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                                                                 | EUT Type:<br>Portable Handset                      |                                                                                       | Page 11 of 28                   |

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics USA, Inc.  
FCC ID: ZNFF100VM  
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
Mode(s): GSM / GPRS / EDGE / CDMA / WCDMA

| FCC Part Section(s)                          | RSS Section(s)                               | Test Description                    | Test Limit                                                           | Test Condition | Test Result | Reference   |
|----------------------------------------------|----------------------------------------------|-------------------------------------|----------------------------------------------------------------------|----------------|-------------|-------------|
| 22.913(a)(5)                                 | RSS-132(5.4)                                 | Effective Radiated Power            | < 7 Watts max. ERP                                                   | RADIATED       | PASS        | Section 7.2 |
| 24.232(c)                                    | RSS-133(6.4)                                 | Equivalent Isotropic Radiated Power | < 2 Watts max. EIRP                                                  |                | PASS        | Section 7.2 |
| 27.50(d)(4)                                  | RSS-139(6.5)                                 | Equivalent Isotropic Radiated Power | < 1 Watts max. EIRP                                                  |                | PASS        | Section 7.2 |
| 2.1053<br>22.917(a)<br>24.238(a)<br>27.53(h) | RSS-132(5.5)<br>RSS-133(6.5)<br>RSS-139(6.6) | Radiated Spurious Emissions         | > 43 + 10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions |                | PASS        | Section 7.3 |

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 12 of 28                   |

## 7.2 Radiated Power (ERP/EIRP)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize


|                                         |                                                                                                                                                                                                              |                                                    |                                                                                                 |                                 |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  <b>PCTEST</b><br>Proud to be part of  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  <b>LG</b> | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                                                                                                                                            | EUT Type:<br>Portable Handset                      |                                                                                                 | Page 13 of 28                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

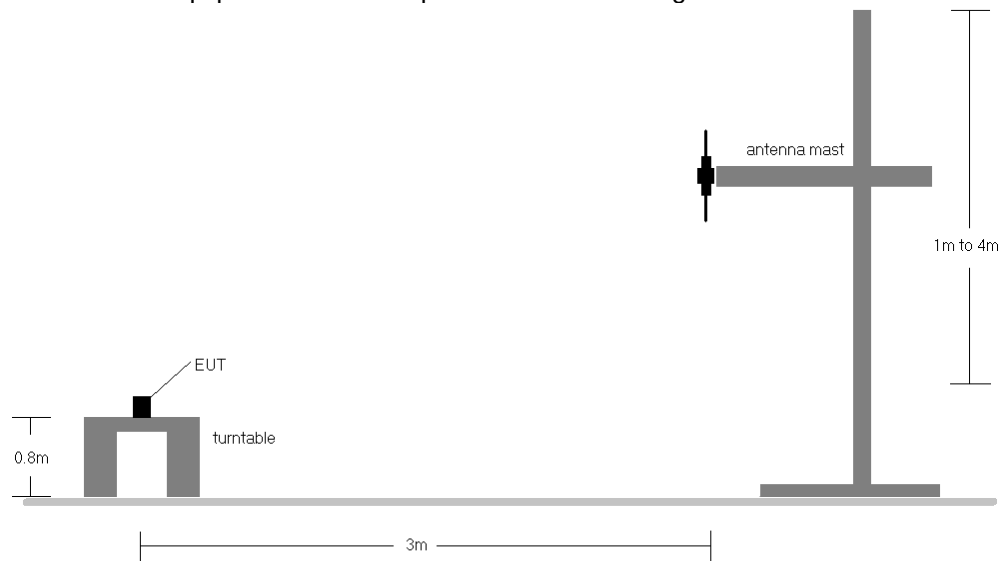

**Figure 7-1. Radiated Test Setup <1GHz**

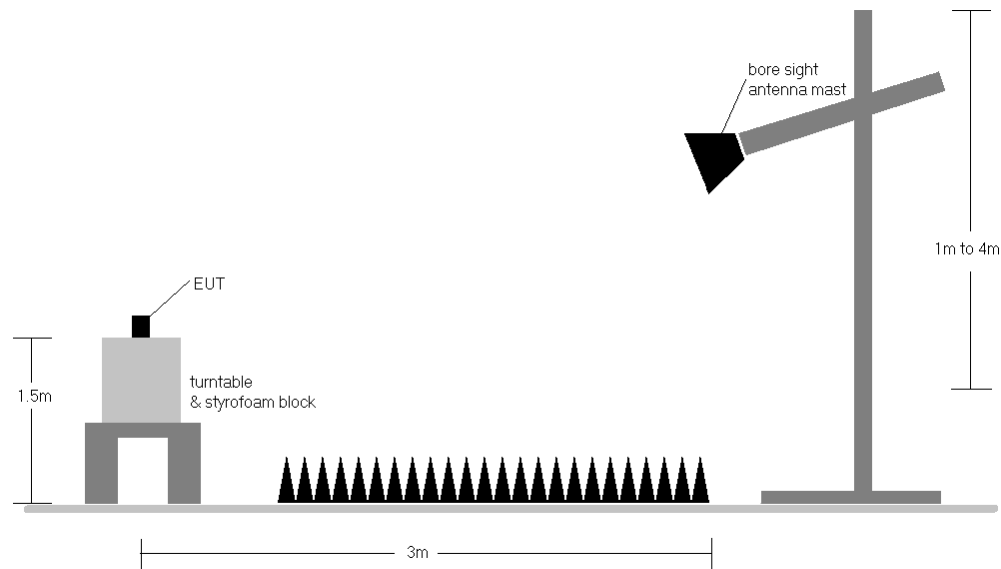

**Figure 7-2. Radiated Test Setup >1GHz**

|                                         |                                              |                                                    |    |                                 |
|-----------------------------------------|----------------------------------------------|----------------------------------------------------|----|---------------------------------|
| FCC ID: ZNFF100VM                       | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020            | EUT Type:<br>Portable Handset                      |    | Page 14 of 28                   |

## Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

| Frequency [MHz] | Mode          | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Substitute Level [dBm] | Ant. Gain [dBi] | ERP [dBm]    | ERP [Watts]  | ERP Limit [dBm] | Margin [dB] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|---------------|-----------------|---------------------|----------------------------|------------------------|-----------------|--------------|--------------|-----------------|-------------|--------------|--------------|------------------|-------------|
| 824.20          | GPRS850       | V-Swivel        | 168                 | 80                         | 20.55                  | 6.35            | 24.75        | 0.299        | 38.45           | -13.70      | 26.90        | 0.490        | 40.61            | -13.71      |
| 836.60          | GPRS850       | V-Swivel        | 129                 | 110                        | 20.73                  | 6.38            | <b>24.96</b> | <b>0.313</b> | 38.45           | -13.49      | <b>27.11</b> | <b>0.514</b> | 40.61            | -13.50      |
| 848.80          | GPRS850       | V-Swivel        | 129                 | 87                         | 20.11                  | 6.51            | 24.47        | 0.280        | 38.45           | -13.99      | 26.62        | 0.459        | 40.61            | -13.99      |
| 836.60          | GPRS850       | H-Swivel        | 191                 | 333                        | 20.58                  | 6.38            | 24.81        | 0.303        | 38.45           | -13.64      | 26.96        | 0.497        | 40.61            | -13.65      |
| 836.60          | EDGE850       | V-Swivel        | 162                 | 76                         | 19.47                  | 6.38            | <b>23.70</b> | 0.234        | 38.45           | -14.75      | <b>25.85</b> | <b>0.385</b> | 40.61            | -14.76      |
| 836.60          | GPRS850 (WCP) | V-Swivel        | 150                 | 113                        | 19.13                  | 6.38            | 23.36        | 0.217        | 38.45           | -15.09      | 25.51        | 0.356        | 40.61            | -15.10      |

**Table 7-2. ERP/EIRP (Cellular GPRS)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 15 of 28                   |

| Frequency [MHz] | Mode           | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Substitute Level [dBm] | Ant. Gain [dBi] | ERP [dBm]    | ERP [Watts]  | ERP Limit [dBm] | Margin [dB] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|----------------|-----------------|---------------------|----------------------------|------------------------|-----------------|--------------|--------------|-----------------|-------------|--------------|--------------|------------------|-------------|
| 824.70          | CDMA850 (Open) | V               | 145                 | 97                         | 12.83                  | 6.36            | <b>17.04</b> | <b>0.051</b> | 38.45           | -21.42      | <b>19.19</b> | <b>0.083</b> | 40.61            | -21.42      |
| 836.52          | CDMA850 (Open) | V               | 160                 | 72                         | 10.71                  | 6.38            | 14.94        | 0.031        | 38.45           | -23.51      | 17.09        | 0.051        | 40.61            | -23.52      |
| 848.31          | CDMA850 (Open) | V               | 128                 | 65                         | 9.96                   | 6.50            | 14.31        | 0.027        | 38.45           | -24.14      | 16.46        | 0.044        | 40.61            | -24.15      |

**Table 7-3. ERP/EIRP (Cellular CDMA)**

| Frequency [MHz] | Mode            | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Substitute Level [dBm] | Ant. Gain [dBi] | ERP [dBm]    | ERP [Watts]  | ERP Limit [dBm] | Margin [dB] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|-----------------|-----------------|---------------------|----------------------------|------------------------|-----------------|--------------|--------------|-----------------|-------------|--------------|--------------|------------------|-------------|
| 826.40          | WCDMA850 (Open) | V               | 143                 | 110                        | 13.37                  | 6.37            | 17.59        | 0.057        | 38.45           | -20.86      | 19.74        | 0.094        | 40.61            | -20.86      |
| 836.60          | WCDMA850 (Open) | V               | 145                 | 122                        | 13.39                  | 6.38            | 17.62        | 0.058        | 38.45           | -20.83      | 19.77        | 0.095        | 40.61            | -20.84      |
| 846.60          | WCDMA850 (Open) | V               | 143                 | 111                        | 13.44                  | 6.48            | <b>17.77</b> | <b>0.060</b> | 38.45           | -20.68      | <b>19.92</b> | <b>0.098</b> | 40.61            | -20.68      |
| 846.60          | WCDMA850 (Open) | H               | 100                 | 92                         | 12.56                  | 6.48            | 16.89        | 0.049        | 38.45           | -21.56      | 19.04        | 0.080        | 40.61            | -21.56      |

**Table 7-4. ERP/EIRP (Cellular WCDMA)**

| Frequency [MHz] | Mode             | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|------------------|-----------------|---------------------|----------------------------|------------------------|-----------------|--------------|--------------|------------------|-------------|
| 1712.40         | WCDMA1700 (OPEN) | H               | 149                 | 363                        | 7.09                   | 9.46            | 16.55        | 0.045        | 30.00            | -13.45      |
| 1732.60         | WCDMA1700 (OPEN) | H               | 102                 | 10                         | 7.80                   | 9.34            | <b>17.14</b> | <b>0.052</b> | 30.00            | -12.86      |
| 1752.60         | WCDMA1700 (OPEN) | H               | 100                 | 6                          | 4.52                   | 9.24            | 13.76        | 0.024        | 30.00            | -16.24      |
| 1732.60         | WCDMA1700 (OPEN) | H               | 146                 | 326                        | -0.11                  | 9.34            | 9.23         | 0.008        | 30.00            | -20.77      |

**Table 7-5. EIRP (AWS WCDMA)**

| Frequency [MHz] | Mode            | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|-----------------|-----------------|---------------------|----------------------------|------------------------|-----------------|--------------|--------------|------------------|-------------|
| 1850.20         | GPRS (Open)     | H               | 108                 | 347                        | 20.61                  | 9.51            | 30.12        | 1.027        | 33.01            | -2.89       |
| 1880.00         | GPRS (Open)     | H               | 101                 | 369                        | 19.98                  | 9.93            | 29.91        | 0.979        | 33.01            | -3.10       |
| 1909.80         | GPRS (Open)     | H               | 146                 | 358                        | 20.05                  | 10.28           | <b>30.33</b> | <b>1.079</b> | 33.01            | -2.68       |
| 1909.80         | GPRS (Open)     | V               | 154                 | 330                        | 18.62                  | 10.28           | 28.90        | 0.776        | 33.01            | -4.11       |
| 1909.80         | EDGE1900 (Open) | H               | 146                 | 358                        | 17.21                  | 10.28           | <b>27.49</b> | 0.561        | 33.01            | -5.52       |

**Table 7-6. EIRP (PCS GPRS)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 16 of 28                   |

| Frequency [MHz] | Mode            | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|-----------------|-----------------|---------------------|----------------------------|------------------------|-----------------|--------------|--------------|------------------|-------------|
| 1851.25         | CDMA1900 (Open) | H               | 102                 | 359                        | 11.21                  | 9.52            | 20.73        | 0.118        | 33.01            | -12.28      |
| 1880.00         | CDMA1900 (Open) | H               | 104                 | 352                        | 11.57                  | 9.93            | 21.50        | 0.141        | 33.01            | -11.51      |
| 1908.75         | CDMA1900 (Open) | H               | 100                 | 351                        | 13.06                  | 10.27           | <b>23.33</b> | <b>0.215</b> | 33.01            | -9.68       |

**Table 7-7. EIRP (PCS CDMA)**

| Frequency [MHz] | Mode             | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm]   | EIRP [Watts] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|------------------|-----------------|---------------------|----------------------------|------------------------|-----------------|--------------|--------------|------------------|-------------|
| 1852.40         | WCDMA1900 (Open) | H               | 104                 | 354                        | 12.14                  | 9.54            | 21.68        | 0.147        | 33.01            | -11.33      |
| 1880.00         | WCDMA1900 (Open) | H               | 119                 | 3                          | 12.32                  | 9.93            | 22.25        | 0.168        | 33.01            | -10.76      |
| 1907.60         | WCDMA1900 (Open) | H               | 146                 | 354                        | 12.08                  | 10.26           | <b>22.34</b> | <b>0.172</b> | 33.01            | -10.67      |
| 1907.60         | WCDMA1900 (Open) | V               | 115                 | 345                        | 12.15                  | 9.93            | 22.08        | 0.161        | 33.01            | -10.93      |

**Table 7-8. EIRP (PCS WCDMA)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 17 of 28                   |

## 7.3 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


|                                         |                                                                                                                                   |                                                    |                                                                                       |                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       | <br><small>Proud to be part of element</small> | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                                                                 | EUT Type:<br>Portable Handset                      |                                                                                       | Page 18 of 28                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

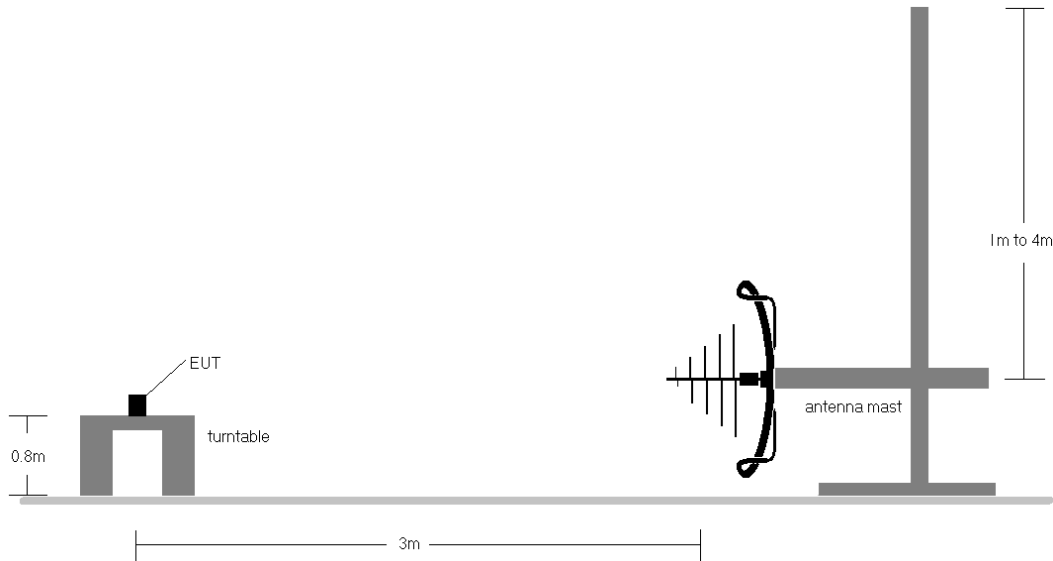

**Figure 7-3. Test Instrument & Measurement Setup < 1GHz**

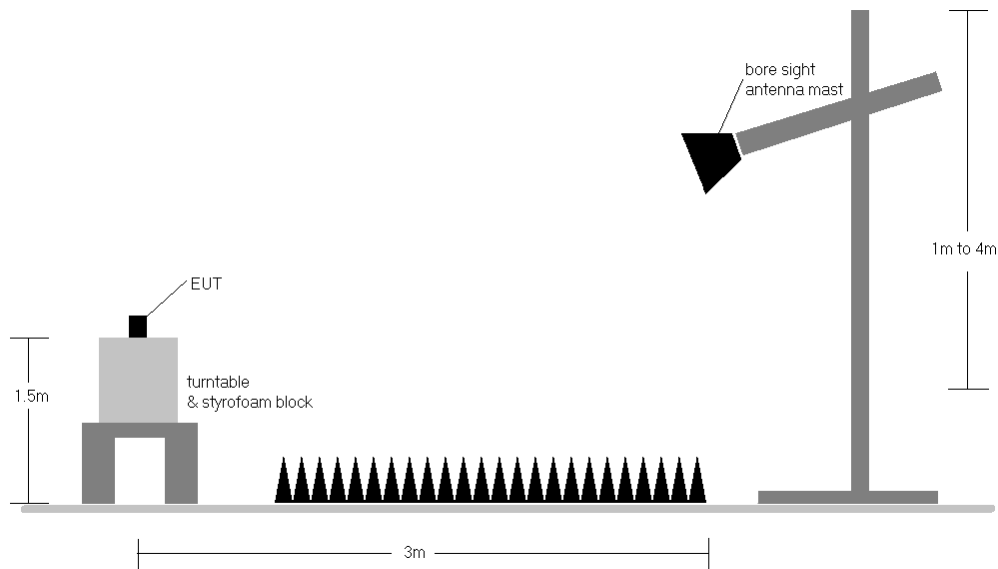

**Figure 7-4. Test Instrument & Measurement Setup >1 GHz**

## Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."

|                                         |                                              |                                                    |    |                                 |
|-----------------------------------------|----------------------------------------------|----------------------------------------------------|----|---------------------------------|
| FCC ID: ZNFF100VM                       | <b>PCTEST</b><br>Proud to be part of element | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | LG | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020            | EUT Type:<br>Portable Handset                      |    | Page 19 of 28                   |

- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

|                                                |                                                                                                                                   |                                                                  |                                                                                       |                                        |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFF100VM                       | <br><small>Proud to be part of element</small> | <b>MEASUREMENT REPORT</b><br><b>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2007230114-06.ZNF | <b>Test Dates:</b><br>07/25 - 09/14/2020                                                                                          | <b>EUT Type:</b><br>Portable Handset                             |                                                                                       | Page 20 of 28                          |

## Cellular GPRS Mode

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1673.20         | V-Swivel        | 110                 | 40                         | -48.48                           | 3.10                          | -45.38                        | -32.4       |
| 2509.80         | V-Swivel        | 214                 | 223                        | -44.78                           | 4.02                          | -40.76                        | -27.8       |
| 3346.40         | V-Swivel        | -                   | -                          | -52.64                           | 6.03                          | -46.61                        | -33.6       |
| 4183.00         | V-Swivel        | -                   | -                          | -52.71                           | 7.79                          | -44.92                        | -31.9       |
| 5019.60         | V-Swivel        | -                   | -                          | -51.71                           | 8.78                          | -42.92                        | -29.9       |

**Table 7-9. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)**

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1673.20         | V-Swivel        | 355                 | 342                        | -52.74                           | 3.88                          | -48.86                        | -35.9       |
| 2509.80         | V-Swivel        | 283                 | 46                         | -45.30                           | 4.48                          | -40.82                        | -27.8       |
| 3346.40         | V-Swivel        | -                   | -                          | -55.95                           | 6.03                          | -49.92                        | -36.9       |
| 4183.00         | V-Swivel        | -                   | -                          | -56.44                           | 7.90                          | -48.54                        | -35.5       |
| 5019.60         | V-Swivel        | -                   | -                          | -56.17                           | 8.83                          | -47.35                        | -34.3       |

**Table 7-10. Radiated Spurious Data with WCP (Cellular GPRS Mode – Ch. 190)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 21 of 28                   |

## Cellular CDMA Mode

OPERATING FREQUENCY: 836.52 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1673.04         | H-Swivel        | -                   | -                          | -54.51                           | 4.02                          | -50.49                        | -37.5       |
| 2509.56         | H-Swivel        | -                   | -                          | -53.83                           | 6.03                          | -47.80                        | -34.8       |
| 3346.08         | H-Swivel        | -                   | -                          | -54.42                           | 7.79                          | -46.63                        | -33.6       |
| 4182.60         | H-Swivel        | -                   | -                          | -53.42                           | 8.78                          | -44.64                        | -31.6       |

**Table 7-11. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 22 of 28                   |

## Cellular WCDMA Mode

OPERATING FREQUENCY: 836.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 1673.20         | V-Swivel        | -                   | -                          | -53.27                           | 3.10                          | -50.17                        | -37.2       |
| 2509.80         | V-Swivel        | 153                 | 355                        | -48.39                           | 4.20                          | -44.19                        | -31.2       |
| 3346.40         | V-Swivel        | -                   | -                          | -52.48                           | 6.03                          | -46.45                        | -33.5       |
| 4183.00         | V-Swivel        | -                   | -                          | -52.70                           | 7.79                          | -44.91                        | -31.9       |

**Table 7-12. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 23 of 28                   |

## AWS WCDMA Mode

OPERATING FREQUENCY: 1732.60 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 3465.20         | H-Swivel        | 206                 | 260                        | -53.32                           | 6.41                          | -46.91                        | -33.9       |
| 5197.80         | H-Swivel        | 380                 | 33                         | -51.11                           | 8.80                          | -42.31                        | -29.3       |
| 6930.40         | H-Swivel        | -                   | -                          | -50.61                           | 8.85                          | -41.75                        | -28.8       |
| 8663.00         | H-Swivel        | -                   | -                          | -48.58                           | 9.34                          | -39.24                        | -26.2       |

**Table 7-13. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 24 of 28                   |

## PCS GPRS Mode

OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: GPRS (GMSK)  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 3760.00         | H-Swivel        | 127                 | 60                         | -52.92                           | 6.93                          | -45.99                        | -33.0       |
| 5640.00         | H-Swivel        | 137                 | 322                        | -48.23                           | 9.15                          | -39.07                        | -26.1       |
| 7520.00         | H-Swivel        | 194                 | 323                        | -45.75                           | 9.31                          | -36.43                        | -23.4       |
| 9400.00         | H-Swivel        | 155                 | 53                         | -46.96                           | 9.49                          | -37.47                        | -24.5       |
| 11280.00        | H-Swivel        | -                   | -                          | -44.86                           | 9.48                          | -35.38                        | -22.4       |

**Table 7-14. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 25 of 28                   |

## PCS CDMA Mode

OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: CDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 3760.00         | H-Swivel        | -                   | -                          | -53.42                           | 6.93                          | -46.49                        | -33.5       |
| 5640.00         | H-Swivel        | -                   | -                          | -53.91                           | 9.15                          | -44.75                        | -31.8       |
| 7520.00         | H-Swivel        | -                   | -                          | -50.19                           | 9.31                          | -40.87                        | -27.9       |
| 9400.00         | H-Swivel        | -                   | -                          | -48.40                           | 9.49                          | -38.91                        | -25.9       |

**Table 7-15. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 26 of 28                   |

## PCS WCDMA Mode

OPERATING FREQUENCY: 1880.00 MHz  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT: -13 dBm

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | Margin [dB] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------------|
| 3760.00         | H-Swivel        | -                   | -                          | -53.78                           | 6.92                          | -46.86                        | -33.9       |
| 5640.00         | H-Swivel        | -                   | -                          | -53.56                           | 8.92                          | -44.63                        | -31.6       |
| 7520.00         | H-Swivel        | -                   | -                          | -48.66                           | 8.44                          | -40.22                        | -27.2       |
| 9400.00         | H-Swivel        | -                   | -                          | -47.51                           | 9.30                          | -38.21                        | -25.2       |

**Table 7-16. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)**

|                                         |                                                                                     |                                                    |                                                                                       |                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFF100VM                       |  | MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M2007230114-06.ZNF | Test Dates:<br>07/25 - 09/14/2020                                                   | EUT Type:<br>Portable Handset                      |                                                                                       | Page 27 of 28                   |

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset** **FCC ID: ZNFF100VM** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules.

|                                                |                                                                                                                                                                                                               |                                                                  |                                                                                       |                                        |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFF100VM                       | <br><small>Proud to be part of </small> | <b>MEASUREMENT REPORT</b><br><b>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M2007230114-06.ZNF | <b>Test Dates:</b><br>07/25 - 09/14/2020                                                                                                                                                                      | <b>EUT Type:</b><br>Portable Handset                             |                                                                                       | Page 28 of 28                          |