



SAR EVALUATION REPORT

Applicant Name:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:

04/13/15 - 04/20/15

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1504130695-R1.ZNF

FCC ID:

ZNFH811

APPLICANT:

LG ELECTRONICS MOBILECOMM U.S.A., INC.

DUT Type:

Portable Handset

Application Type:

Class II Permissive Change

FCC Rule Part(s):

CFR §2.1093

Model(s):

LG-H811, LGH811, H811

Permissive Change(s):

See FCC Change Document

Date of Original Certification:

05/01/2015

Equipment Class	Band & Mode	Tx Frequency	SAR			10 gm Extremity (W/kg)
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)	
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.67	0.98	0.98	
PCE	UMTS 850	826.40 - 846.60 MHz	0.52	0.68	0.68	
PCE	UMTS 1755	1712.4 - 1752.5 MHz	1.05	0.58	1.03	
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.58	0.37	0.44	
PCE	UMTS 1900	1852.4 - 1907.6 MHz	1.04	0.64	0.94	
PCE	LTE Band 12	699.7 - 715.3 MHz	0.33	0.37	0.47	
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.48	0.69	0.69	
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.96	0.59	0.82	
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	1.08	0.56	0.99	
PCE	LTE Band 7	2502.5 - 2567.5 MHz	0.50	0.40	0.46	
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.37	0.18	0.18	
Nil	U-NII-1	5180 - 5240 MHz	N/A	N/A		
Nil	U-NII-2A	5260 - 5320 MHz	0.38	0.22		0.39
Nil	U-NII-2C	5500 - 5700 MHz	0.25	0.15		0.27
Nil	U-NII-3	5745 - 5825 MHz	0.19	< 0.1	0.13	
DSS/DTS	Bluetooth	2402 - 2480 MHz	N/A			
Simultaneous SAR per KDB 690783 D01v01r03:			1.47	1.27	1.21	0.39

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.9 of this report; for North American frequency bands only.

This revised Test Report (S/N: 0Y1504130695-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmfai.info.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 1 of 76

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	9
3	INTRODUCTION	11
4	DOSIMETRIC ASSESSMENT	12
5	DEFINITION OF REFERENCE POINTS	13
6	TEST CONFIGURATION POSITIONS FOR HANDSETS	14
7	RF EXPOSURE LIMITS	17
8	FCC MEASUREMENT PROCEDURES.....	18
9	RF CONDUCTED POWERS.....	24
10	SYSTEM VERIFICATION.....	50
11	SAR DATA SUMMARY	53
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	65
13	SAR MEASUREMENT VARIABILITY	70
14	EQUIPMENT LIST.....	71
15	MEASUREMENT UNCERTAINTIES	72
16	CONCLUSION.....	74
17	REFERENCES	75
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 2 of 76	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.5 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5700 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

1.2 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.7	33.7	31.7	30.0	28.4	27.7	27.7	26.7	25.7
	Nominal	33.2	33.2	31.2	29.5	27.9	27.2	27.2	26.2	25.2
GSM/GPRS/EDGE 1900	Maximum	30.2	30.2	28.2	27.2	25.2	26.7	26.7	25.7	24.7
	Nominal	29.7	29.7	27.7	26.7	24.7	26.2	26.2	25.2	24.2

Mode / Band		Modulated Average (dBm)			
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	24.2	24.2	24.2	24.2
	Nominal	23.7	23.7	23.7	23.7
UMTS Band 4 (1750 MHz)	Maximum	24.7	24.7	24.7	24.7
	Nominal	24.2	24.2	24.2	24.2
UMTS Band 2 (1900 MHz)	Maximum	24.2	24.2	24.2	24.2
	Nominal	23.7	23.7	23.7	23.7

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 3 of 76

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	24.2
	Nominal	23.7
LTE Band 5 (Cell)	Maximum	24.2
	Nominal	23.7
LTE Band 4 (AWS)	Maximum	24.7
	Nominal	24.2
LTE Band 2 (PCS)	Maximum	24.2
	Nominal	23.7
LTE Band 7	Maximum	23.7
	Nominal	23.2

Mode / Band		Modulated Average (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	16.0
	Nominal	15.0
IEEE 802.11g (2.4 GHz)	Maximum	15.0
	Nominal	14.0
IEEE 802.11n (2.4 GHz)	Maximum	14.0
	Nominal	13.0
IEEE 802.11ac (2.4 GHz)	Maximum	12.0
	Nominal	11.0
Bluetooth 1 Mbps (GFSK)	Maximum	11.5
	Nominal	10.5
Bluetooth 2 Mbps (DPSK)	Maximum	8.5
	Nominal	7.5
Bluetooth 3 Mbps (8DPSK)	Maximum	8.5
	Nominal	7.5
Bluetooth LE	Peak Power	7.0

Mode / Band		Modulated Average (dBm)		
		20 MHz Bandwidth	40 MHz Bandwidth	80 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	12.0		
	Nominal	11.0		
IEEE 802.11n (5 GHz)	Maximum	11.0	11.0	
	Nominal	10.0	10.0	
IEEE 802.11ac (5 GHz)	Maximum	11.0	11.0	11.0
	Nominal	10.0	10.0	10.0

1.3 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filing. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”.

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 4 of 76

Table 1-1
Mobile Hotspot Sides for SAR Testing

Sides for SAR Testing							
Mode	Condition	Back	Front	Top	Bottom	Right	Left
GPRS 850	Hotspot	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Hotspot	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Hotspot	Yes	Yes	No	Yes	No	Yes
GPRS 1900	Hotspot	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Hotspot	Yes	Yes	No	Yes	No	Yes
LTE Band 12	Hotspot	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Hotspot	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Hotspot	Yes	Yes	No	Yes	No	Yes
LTE Band 2 (PCS)	Hotspot	Yes	Yes	No	Yes	No	Yes
LTE Band 7	Hotspot	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN	Hotspot	Yes	Yes	Yes	No	Yes	No
U-NII-3	Hotspot	Yes	Yes	Yes	No	Yes	No
UNII-2A/U-NII-2C	Extremity	Yes	Yes	Yes	No	Yes	No

Note: Particular DUT edges were not required to be evaluated for Wireless Router SAR or Extremity SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02 guidance, page 2 and FCC KDB 648474 D04v01r01. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, 5.2-5.7 GHz WLAN operations are disabled. Therefore 5.2-5.7 GHz WLAN operations are not considered in this section.

1.4 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device. The NFC antenna location diagram can be found in appendix F. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filing. The NFC antenna is integrated into the device; therefore all SAR tests were performed with the NFC antenna

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in

Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 1-1
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 5 of 76	

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Extremity
1	GSM voice + 2.4 GHz WI-FI	Yes	Yes	N/A	Yes
2	GSM voice + 5 GHz WI-FI	Yes	Yes	N/A	Yes
3	GSM voice + 2.4 GHz Bluetooth	N/A	Yes	N/A	Yes
4	UMTS + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes
5	UMTS + 5 GHz WI-FI	Yes	Yes	Yes	Yes
6	UMTS + 2.4 GHz Bluetooth	N/A	Yes	N/A	Yes
7	LTE + 2.4 GHz WI-FI	Yes	Yes	Yes	Yes
8	LTE + 5 GHz WI-FI	Yes	Yes	Yes	Yes
9	LTE + 2.4 GHz Bluetooth	N/A	Yes	N/A	Yes
10	GPRS/EDGE + 2.4 GHz WI-FI	Yes*	Yes*	Yes	Yes
11	GPRS/EDGE + 5 GHz WI-FI	Yes*	Yes*	Yes	Yes
12	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	Yes*	N/A	Yes

- 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- (*) = for VOIP applications possibly used by the end-user
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WIFI direct are specified above.
- 5 GHz Wireless Router is only supported for the U-NII-3 by SW, therefore U-NII-1, U-NII2A, and U-NII2C were not evaluated for wireless router conditions.
- U-NII-3 WIFI supports Hotspot and WIFI-Direct(GO/GC).
- This device supports VoLTE.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02.

Per FCC KDB 447498 D01v05, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required; $[(14/10) * \sqrt{2.480}] = 2.2 < 3.0$. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 6 of 76	

Per FCC KDB 447498 D01v05, the 10g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, extremity Bluetooth SAR was not required; $[(14/5) * \sqrt{2.480}] = 4.4 < 7.5$. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) New 5 GHz channels 138, 142, and 144 are supported

Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A & U-NII-2C WLAN, extremity SAR tests were performed. Extremity SAR was not evaluated for 2.4 GHz and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r03.

This device supports inter-band LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r01, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, extremity SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Extremity SAR was not evaluated for licensed technologies since wireless router 1g SAR was < 1.2 W/kg for these modes.

1.7 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 7 of 76

1.8 Quick Cover

This DUT may be used with a standard battery cover or with an optional quick cover which features an extension to wrap around and protect the front side of the device. Per FCC KDB Publication 648474 D04, SAR was measured using the standard battery cover and then repeated with the quick cover for the configuration with the highest measured SAR for each wireless technology, frequency band, operating mode, and exposure condition. Additional head and extremity tests using the quick cover were performed with the cover extension both open and closed. Additional body-worn and hotspot tests were performed with the cover extension closed because operations near the body with the cover extension open are not expected. Since reported SAR did not exceed 1.2 W/kg, additional testing with the quick cover was not required.

1.9 Guidance Applied

- IEEE 1528-2003
- FCC KDB Publication 941225 D01v03, D05v02r03, D05Av01, D06v02 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01 802.11 WIFI SAR v02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05r02 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r03, D02v01r01 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D03-D04 (Phablet Procedures, Wireless Charging Cover)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

1.10 Device Serial Numbers

Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number	Extremity Serial Number
GSM/GPRS/EDGE 850	1VUA8	1VUA8	1VUA8	-
UMTS 850	1VUC9	1VUC9	1VUC9	-
UMTS 1750	1VUC9	1VUC9	1VUC9	-
GSM/GPRS/EDGE 1900	1VUC9	1VUC9	1VUC9	-
UMTS 1900	1VUC9	1VUC9	1VUC9	-
LTE Band 12	1VUHU	1VUBN	1VUBN	-
LTE Band 5 (Cell)	1VUHU	1VUBN	1VUBN	-
LTE Band 4 (AWS)	1VUHU	1VUHU	1VUHU	-
LTE Band 2 (PCS)	1VUBN	1VUBN	1VUBN	-
LTE Band 7	1VUHU	1VUHU	1VUHU	-
2.4 GHz WLAN	1VUDS	1VUDS	1VUDS	-
5 GHz WLAN	1VUDS	1VUDS	1VUDS	1VUDS

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 8 of 76	

2

LTE INFORMATION

LTE Information			
FCC ID	ZNFH811		
Form Factor	Portable Handset		
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)		
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)		
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)		
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)		
	LTE Band 7 (2502.5 - 2567.5 MHz)		
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Numbers and Frequencies (MHz)	Low	Mid	High
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
LTE Band 7: 5 MHz	2502.5 (20775)	2535 (21100)	2567.5 (21425)
LTE Band 7: 10 MHz	2505 (20800)	2535 (21100)	2565 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	2535 (21100)	2562.5 (21375)
LTE Band 7: 20 MHz	2510 (20850)	2535 (21100)	2560 (21350)
UE Category	6		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		
LTE Carrier Aggregation Possible Combinations	Please see next page for LTE Carrier Aggregation Possible Combinations		
LTE Carrier Aggregation Additional Information	This device does not support full CA features on 3GPP Release 10. It supports a maximum of 2 carriers in the downlink. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed on the following page are supported. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.		

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 9 of 76

<u>LTE B12 (PCC) + LTE B4 (SCC)</u>	<u>LTE B12 (PCC) + LTE B2 (SCC)</u>	<u>LTE B4 (PCC) + LTE B12 (SCC)</u>	<u>LTE B4 (PCC) + LTE B4 (SCC)</u>
3MHz (B12) + 1.4MHz (B4)	3MHz (B12) + 5MHz (B2)	1.4MHz (B4) + 3MHz (B12)	5MHz(B4) + 5MHz(B4)
3MHz (B12) + 3MHz (B4)	3MHz (B12) + 10MHz (B2)	1.4MHz (B4) + 5MHz (B12)	5MHz(B4) + 10MHz(B4)
3MHz (B12) + 5MHz (B4)	3MHz (B12) + 15MHz (B2)	1.4MHz (B4) + 10MHz (B12)	5MHz(B4) + 15MHz(B4)
3MHz (B12) + 10MHz (B4)	3MHz (B12) + 20MHz (B2)	3MHz (B4) + 3MHz (B12)	5MHz(B4) + 20MHz(B4)
3MHz (B12) + 15MHz (B4)	5MHz (B12) + 5MHz (B2)	3MHz (B4) + 5MHz (B12)	10MHz(B4) + 5MHz(B4)
3MHz (B12) + 20MHz (B4)	5MHz (B12) + 10MHz (B2)	3MHz (B4) + 10MHz (B12)	10MHz(B4) + 10MHz(B4)
5MHz (B12) + 1.4MHz (B4)	5MHz (B12) + 15MHz (B2)	5MHz (B4) + 3MHz (B12)	10MHz(B4) + 15MHz(B4)
5MHz (B12) + 3MHz (B4)	5MHz (B12) + 20MHz (B2)	5MHz (B4) + 5MHz (B12)	10MHz(B4) + 20MHz(B4)
5MHz (B12) + 5MHz (B4)	10MHz (B12) + 5MHz (B2)	5MHz (B4) + 10MHz (B12)	15MHz(B4) + 5MHz(B4)
5MHz (B12) + 10MHz (B4)	10MHz (B12) + 10MHz (B2)	10MHz (B4) + 3MHz (B12)	15MHz(B4) + 10MHz(B4)
5MHz (B12) + 15MHz (B4)	10MHz (B12) + 15MHz (B2)	10MHz (B4) + 5MHz (B12)	15MHz(B4) + 15MHz(B4)
5MHz (B12) + 20MHz (B4)	10MHz (B12) + 20MHz (B2)	10MHz (B4) + 10MHz (B12)	15MHz(B4) + 20MHz(B4)
10MHz (B12) + 1.4MHz (B4)		15MHz (B4) + 3MHz (B12)	20MHz(B4) + 5MHz(B4)
10MHz (B12) + 3MHz (B4)		15MHz (B4) + 5MHz (B12)	20MHz(B4) + 10MHz(B4)
10MHz (B12) + 5MHz (B4)		15MHz (B4) + 10MHz (B12)	20MHz(B4) + 15MHz(B4)
10MHz (B12) + 10MHz (B4)		20MHz (B4) + 3MHz (B12)	20MHz(B4) + 20MHz(B4)
10MHz (B12) + 15MHz (B4)		20MHz (B4) + 5MHz (B12)	
10MHz (B12) + 20MHz (B4)		20MHz (B4) + 10MHz (B12)	
<u>LTE B4 (PCC) + LTE B2 (SCC)</u>	<u>LTE B2 (PCC) + LTE B12 (SCC)</u>	<u>LTE B2 (PCC) + LTE B4 (SCC)</u>	
5MHz (B4) + 1.4MHz (B2)	5MHz (B2) + 3MHz (B12)	1.4MHz (B2) + 5MHz (B4)	
5MHz (B4) + 3MHz (B2)	5MHz (B2) + 5MHz (B12)	1.4MHz (B2) + 10MHz (B4)	
5MHz (B4) + 5MHz (B2)	5MHz (B2) + 10MHz (B12)	1.4MHz (B2) + 15MHz (B4)	
5MHz (B4) + 10MHz (B2)	10MHz (B2) + 3MHz (B12)	1.4MHz (B2) + 20MHz (B4)	
5MHz (B4) + 15MHz (B2)	10MHz (B2) + 5MHz (B12)	3MHz (B2) + 5MHz (B4)	
5MHz (B4) + 20MHz (B2)	10MHz (B2) + 10MHz (B12)	3MHz (B2) + 10MHz (B4)	
10MHz (B4) + 1.4MHz (B2)	15MHz (B2) + 3MHz (B12)	3MHz (B2) + 15MHz (B4)	
10MHz (B4) + 3MHz (B2)	15MHz (B2) + 5MHz (B12)	3MHz (B2) + 20MHz (B4)	
10MHz (B4) + 5MHz (B2)	15MHz (B2) + 10MHz (B12)	5MHz (B2) + 5MHz (B4)	
10MHz (B4) + 10MHz (B2)	20MHz (B2) + 3MHz (B12)	5MHz (B2) + 10MHz (B4)	
10MHz (B4) + 15MHz (B2)	20MHz (B2) + 5MHz (B12)	5MHz (B2) + 15MHz (B4)	
10MHz (B4) + 20MHz (B2)	20MHz (B2) + 10MHz (B12)	5MHz (B2) + 20MHz (B4)	
15MHz (B4) + 1.4MHz (B2)		10MHz (B2) + 5MHz (B4)	
15MHz (B4) + 3MHz (B2)		10MHz (B2) + 10MHz (B4)	
15MHz (B4) + 5MHz (B2)		10MHz (B2) + 15MHz (B4)	
15MHz (B4) + 10MHz (B2)		10MHz (B2) + 20MHz (B4)	
15MHz (B4) + 15MHz (B2)		15MHz (B2) + 5MHz (B4)	
15MHz (B4) + 20MHz (B2)		15MHz (B2) + 10MHz (B4)	
20MHz (B4) + 1.4MHz (B2)		15MHz (B2) + 15MHz (B4)	
20MHz (B4) + 3MHz (B2)		15MHz (B2) + 20MHz (B4)	
20MHz (B4) + 5MHz (B2)		20MHz (B2) + 5MHz (B4)	
20MHz (B4) + 10MHz (B2)		20MHz (B2) + 10MHz (B4)	
20MHz (B4) + 15MHz (B2)		20MHz (B2) + 15MHz (B4)	
20MHz (B4) + 20MHz (B2)		20MHz (B2) + 20MHz (B4)	

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 10 of 76

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 11 of 76	

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area
Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: ZNFH811	 SAR EVALUATION REPORT 			Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 12 of 76

5

DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

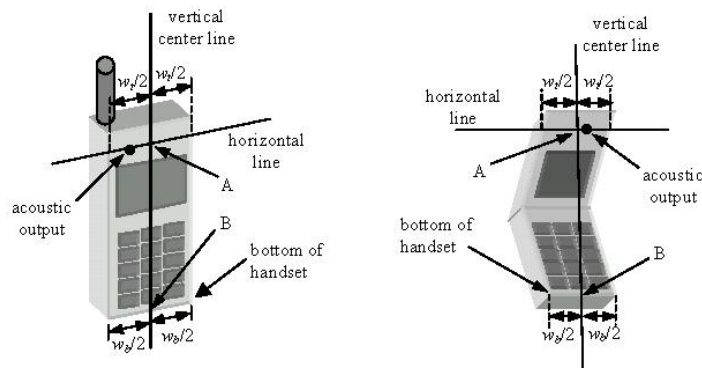


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 13 of 76

6

TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

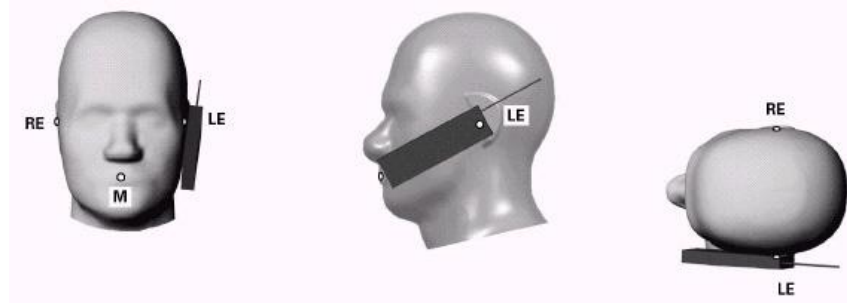


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 14 of 76

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 44798 D01v05 should be applied to determine SAR test requirements.

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC minitables that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04 v01r01DR04 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 16 of 76

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 17 of 76	

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for UMTS

8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 18 of 76

in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.4.6 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r03 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 19 of 76	

output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r03:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.5.5 Downlink Carrier Aggregation

LTE Carrier Aggregation (CA) measurements are made in accordance to 3GPP TS 36.521-1 V10.4.0 (2012-12). The RRC connection is only handled by one cell, the Primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds the Secondary component carrier (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to release 8 specifications on the PCC. Additional output powers are measured using two carriers in the downlink for the release 8 configurations with the highest output power among all channels, RB configurations and bandwidths for each uplink band. Per FCC KDB Publication 941225 D05A v01r01, no SAR

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 20 of 76	

measurements are required when the average output power with downlink carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink carrier aggregation inactive.

8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01 802.11 WIFI SAR v02 for more details.

8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg.

8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Band gap channels are not aggregated, so each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 21 of 76

scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.6.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6).

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 22 of 76

8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: 0Y1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 23 of 76	

9 RF CONDUCTED POWERS

9.1 GSM Conducted Powers

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	33.06	33.11	31.16	29.26	27.38	27.11	27.03	25.94	24.95
	190	33.17	33.20	31.37	29.43	27.59	27.21	27.19	26.11	25.08
	251	33.28	33.31	31.40	29.41	27.71	27.22	27.13	26.13	25.12
GSM 1900	512	29.67	29.79	27.97	26.71	24.55	26.36	26.17	25.26	24.08
	661	29.93	30.01	27.87	26.68	25.05	26.58	26.38	25.39	24.26
	810	30.14	30.14	28.19	27.07	25.13	26.64	26.51	25.39	24.33
		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.03	24.08	25.14	25.00	24.37	18.08	21.01	21.68	21.94
	190	24.14	24.17	25.35	25.17	24.58	18.18	21.17	21.85	22.07
	251	24.25	24.28	25.38	25.15	24.70	18.19	21.11	21.87	22.11
GSM 1900	512	20.64	20.76	21.95	22.45	21.54	17.33	20.15	21.00	21.07
	661	20.90	20.98	21.85	22.42	22.04	17.55	20.36	21.13	21.25
	810	21.11	21.11	22.17	22.81	22.12	17.61	20.49	21.13	21.32
GSM 850	Frame	24.17	24.17	25.18	25.24	24.89	18.17	21.18	21.94	22.19
GSM 1900	Avg. Targets:	20.67	20.67	21.68	22.44	21.69	17.17	20.18	20.94	21.19

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
 GPRS Multislot class: 12 (Max 4 Tx uplink slots)
 EDGE Multislot class: 12 (Max 4 Tx uplink slots)
 DTM Multislot Class: N/A




Figure 9-1
Power Measurement Setup

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 24 of 76	

9.2 UMTS Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.05	24.01	23.91	24.32	24.23	24.10	24.19	24.02	23.71	-
99		12.2 kbps AMR	24.01	23.99	23.96	24.42	24.32	24.29	24.11	23.81	23.72	-
6	HSDPA	Subtest 1	23.92	23.88	23.86	23.77	23.71	23.70	24.01	23.95	24.06	0
6		Subtest 2	23.76	23.84	23.77	23.81	23.79	23.80	24.15	24.04	23.62	0
6		Subtest 3	23.40	23.45	23.44	23.45	23.22	23.66	23.69	23.64	23.53	0.5
6		Subtest 4	23.34	23.39	23.35	23.40	23.21	23.54	23.69	23.68	23.48	0.5
6	HSUPA	Subtest 1	22.61	22.98	22.82	23.50	22.92	22.97	22.88	22.85	22.68	0
6		Subtest 2	21.84	22.18	21.57	21.95	21.88	21.89	21.71	21.70	21.57	2
6		Subtest 3	22.85	22.88	22.76	23.01	22.89	22.85	23.14	22.87	22.80	1
6		Subtest 4	21.90	21.91	21.78	22.66	22.63	22.94	22.46	22.57	22.58	2
6		Subtest 5	24.07	23.97	23.90	23.89	23.87	23.95	24.04	23.89	23.54	0
8	DC-HSDPA	Subtest 1	23.52	23.89	23.27	24.12	24.41	24.13	24.16	24.12	24.06	0
8		Subtest 2	23.46	23.88	23.33	24.13	24.35	24.12	24.13	24.09	23.95	0
8		Subtest 3	23.11	23.52	22.98	24.10	24.20	23.94	23.59	23.51	23.69	0.5
8		Subtest 4	23.07	23.51	22.94	23.87	24.09	23.88	23.63	23.52	23.66	0.5

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA

It is expected by the manufacturer for some HSUPA subtests transmit power results to be within +/- 1.0 dB of the expected MPR specified by 3GPP.



Figure 9-2
Power Measurement Setup

9.3 LTE Conducted Powers

9.3.1 LTE Band 12

Table 9-1
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	707.5	23095	10	QPSK	1	0	24.11	0	0
	707.5	23095	10	QPSK	1	25	23.97	0	0
	707.5	23095	10	QPSK	1	49	24.10	0	0
	707.5	23095	10	QPSK	25	0	22.97	0-1	1
	707.5	23095	10	QPSK	25	12	22.96	0-1	1
	707.5	23095	10	QPSK	25	25	22.87	0-1	1
	707.5	23095	10	QPSK	50	0	22.97	0-1	1
	707.5	23095	10	16QAM	1	0	23.20	0-1	1
	707.5	23095	10	16QAM	1	25	23.18	0-1	1
	707.5	23095	10	16QAM	1	49	23.20	0-1	1
	707.5	23095	10	16QAM	25	0	21.95	0-2	2
	707.5	23095	10	16QAM	25	12	21.90	0-2	2
	707.5	23095	10	16QAM	25	25	21.92	0-2	2
	707.5	23095	10	16QAM	50	0	21.90	0-2	2

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 25 of 76

Table 9-2
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	701.5	23035	5	QPSK	1	0	23.84	0	0
	701.5	23035	5	QPSK	1	12	23.84	0	0
	701.5	23035	5	QPSK	1	24	24.00	0	0
	701.5	23035	5	QPSK	12	0	22.89	0-1	1
	701.5	23035	5	QPSK	12	6	22.86	0-1	1
	701.5	23035	5	QPSK	12	13	22.98	0-1	1
	701.5	23035	5	QPSK	25	0	22.87	0-1	1
	701.5	23035	5	16-QAM	1	0	22.91	0-1	1
	701.5	23035	5	16-QAM	1	12	22.84	0-1	1
	701.5	23035	5	16-QAM	1	24	22.93	0-1	1
	701.5	23035	5	16-QAM	12	0	21.83	0-2	2
	701.5	23035	5	16-QAM	12	6	21.85	0-2	2
	701.5	23035	5	16-QAM	12	13	21.88	0-2	2
	701.5	23035	5	16-QAM	25	0	21.86	0-2	2
Mid	707.5	23095	5	QPSK	1	0	24.03	0	0
	707.5	23095	5	QPSK	1	12	24.06	0	0
	707.5	23095	5	QPSK	1	24	24.06	0	0
	707.5	23095	5	QPSK	12	0	22.97	0-1	1
	707.5	23095	5	QPSK	12	6	23.01	0-1	1
	707.5	23095	5	QPSK	12	13	23.01	0-1	1
	707.5	23095	5	QPSK	25	0	22.95	0-1	1
	707.5	23095	5	16-QAM	1	0	23.16	0-1	1
	707.5	23095	5	16-QAM	1	12	23.19	0-1	1
	707.5	23095	5	16-QAM	1	24	23.17	0-1	1
	707.5	23095	5	16-QAM	12	0	21.87	0-2	2
	707.5	23095	5	16-QAM	12	6	21.96	0-2	2
	707.5	23095	5	16-QAM	12	13	21.90	0-2	2
	707.5	23095	5	16-QAM	25	0	21.85	0-2	2
High	713.5	23155	5	QPSK	1	0	24.00	0	0
	713.5	23155	5	QPSK	1	12	23.99	0	0
	713.5	23155	5	QPSK	1	24	24.20	0	0
	713.5	23155	5	QPSK	12	0	22.85	0-1	1
	713.5	23155	5	QPSK	12	6	22.98	0-1	1
	713.5	23155	5	QPSK	12	13	22.90	0-1	1
	713.5	23155	5	QPSK	25	0	22.96	0-1	1
	713.5	23155	5	16-QAM	1	0	22.81	0-1	1
	713.5	23155	5	16-QAM	1	12	22.86	0-1	1
	713.5	23155	5	16-QAM	1	24	22.95	0-1	1
	713.5	23155	5	16-QAM	12	0	21.91	0-2	2
	713.5	23155	5	16-QAM	12	6	22.01	0-2	2
	713.5	23155	5	16-QAM	12	13	21.98	0-2	2
	713.5	23155	5	16-QAM	25	0	21.92	0-2	2

Table 9-3
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	700.5	23025	3	QPSK	1	0	23.86	0	0
	700.5	23025	3	QPSK	1	7	23.86	0	0
	700.5	23025	3	QPSK	1	14	23.93	0	0
	700.5	23025	3	QPSK	8	0	22.81	0-1	1
	700.5	23025	3	QPSK	8	4	22.87	0-1	1
	700.5	23025	3	QPSK	8	7	23.04	0-1	1
	700.5	23025	3	QPSK	15	0	22.84	0-1	1
	700.5	23025	3	16-QAM	1	0	22.87	0-1	1
	700.5	23025	3	16-QAM	1	7	22.87	0-1	1
	700.5	23025	3	16-QAM	1	14	22.90	0-1	1
	700.5	23025	3	16-QAM	8	0	21.92	0-2	2
	700.5	23025	3	16-QAM	8	4	21.82	0-2	2
	700.5	23025	3	16-QAM	8	7	21.86	0-2	2
	700.5	23025	3	16-QAM	15	0	21.91	0-2	2
	707.5	23095	3	QPSK	1	0	24.08	0	0
Mid	707.5	23095	3	QPSK	1	7	24.04	0	0
	707.5	23095	3	QPSK	1	14	24.02	0	0
	707.5	23095	3	QPSK	8	0	23.03	0-1	1
	707.5	23095	3	QPSK	8	4	22.97	0-1	1
	707.5	23095	3	QPSK	8	7	22.91	0-1	1
	707.5	23095	3	QPSK	15	0	22.94	0-1	1
	707.5	23095	3	16-QAM	1	0	23.18	0-1	1
	707.5	23095	3	16-QAM	1	7	23.20	0-1	1
	707.5	23095	3	16-QAM	1	14	23.10	0-1	1
	707.5	23095	3	16-QAM	8	0	21.95	0-2	2
	707.5	23095	3	16-QAM	8	4	22.06	0-2	2
	707.5	23095	3	16-QAM	8	7	21.90	0-2	2
	707.5	23095	3	16-QAM	15	0	21.91	0-2	2
	714.5	23165	3	QPSK	1	0	23.95	0	0
	714.5	23165	3	QPSK	1	7	23.99	0	0
High	714.5	23165	3	QPSK	1	14	24.18	0	0
	714.5	23165	3	QPSK	8	0	22.84	0-1	1
	714.5	23165	3	QPSK	8	4	23.00	0-1	1
	714.5	23165	3	QPSK	8	7	22.84	0-1	1
	714.5	23165	3	QPSK	15	0	22.93	0-1	1
	714.5	23165	3	16-QAM	1	0	22.88	0-1	1
	714.5	23165	3	16-QAM	1	7	22.81	0-1	1
	714.5	23165	3	16-QAM	1	14	22.87	0-1	1
	714.5	23165	3	16-QAM	8	0	21.89	0-2	2
	714.5	23165	3	16-QAM	8	4	22.07	0-2	2
	714.5	23165	3	16-QAM	8	7	22.02	0-2	2
	714.5	23165	3	16-QAM	15	0	21.85	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 27 of 76

Table 9-4
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	699.7	23017	1.4	QPSK	1	0	23.90	0	0
	699.7	23017	1.4	QPSK	1	2	23.84	0	0
	699.7	23017	1.4	QPSK	1	5	24.01	0	0
	699.7	23017	1.4	QPSK	3	0	23.99	0	0
	699.7	23017	1.4	QPSK	3	2	23.81	0	0
	699.7	23017	1.4	QPSK	3	3	23.95	0	0
	699.7	23017	1.4	QPSK	6	0	22.96	0-1	1
	699.7	23017	1.4	16-QAM	1	0	22.84	0-1	1
	699.7	23017	1.4	16-QAM	1	2	22.92	0-1	1
	699.7	23017	1.4	16-QAM	1	5	22.96	0-1	1
	699.7	23017	1.4	16-QAM	3	0	22.88	0-1	1
	699.7	23017	1.4	16-QAM	3	2	22.85	0-1	1
Mid	699.7	23017	1.4	16-QAM	3	3	22.86	0-1	1
	699.7	23017	1.4	16-QAM	6	0	21.80	0-2	2
	707.5	23095	1.4	QPSK	1	0	24.07	0	0
	707.5	23095	1.4	QPSK	1	2	24.02	0	0
	707.5	23095	1.4	QPSK	1	5	24.03	0	0
	707.5	23095	1.4	QPSK	3	0	23.95	0	0
	707.5	23095	1.4	QPSK	3	2	24.10	0	0
	707.5	23095	1.4	QPSK	3	3	24.09	0	0
	707.5	23095	1.4	QPSK	6	0	22.94	0-1	1
	707.5	23095	1.4	16-QAM	1	0	23.06	0-1	1
	707.5	23095	1.4	16-QAM	1	2	23.19	0-1	1
	707.5	23095	1.4	16-QAM	1	5	23.10	0-1	1
High	707.5	23095	1.4	16-QAM	3	0	22.80	0-1	1
	707.5	23095	1.4	16-QAM	3	2	23.06	0-1	1
	707.5	23095	1.4	16-QAM	3	3	22.89	0-1	1
	707.5	23095	1.4	16-QAM	6	0	21.86	0-2	2
	715.3	23173	1.4	QPSK	1	0	24.07	0	0
	715.3	23173	1.4	QPSK	1	2	23.92	0	0
	715.3	23173	1.4	QPSK	1	5	24.14	0	0
	715.3	23173	1.4	QPSK	3	0	23.85	0	0
	715.3	23173	1.4	QPSK	3	2	24.05	0	0
	715.3	23173	1.4	QPSK	3	3	23.99	0	0
	715.3	23173	1.4	QPSK	6	0	22.94	0-1	1
	715.3	23173	1.4	16-QAM	1	0	22.83	0-1	1
	715.3	23173	1.4	16-QAM	1	2	22.88	0-1	1
	715.3	23173	1.4	16-QAM	1	5	22.87	0-1	1
	715.3	23173	1.4	16-QAM	3	0	23.00	0-1	1
	715.3	23173	1.4	16-QAM	3	2	23.04	0-1	1
	715.3	23173	1.4	16-QAM	3	3	23.05	0-1	1
	715.3	23173	1.4	16-QAM	6	0	21.84	0-2	2

9.3.2 LTE Band 5 (Cell)

Table 9-5
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	836.5	20525	10	QPSK	1	0	24.00	0	0
	836.5	20525	10	QPSK	1	25	23.86	0	0
	836.5	20525	10	QPSK	1	49	23.89	0	0
	836.5	20525	10	QPSK	25	0	22.86	0-1	1
	836.5	20525	10	QPSK	25	12	22.95	0-1	1
	836.5	20525	10	QPSK	25	25	22.89	0-1	1
	836.5	20525	10	QPSK	50	0	22.93	0-1	1
	836.5	20525	10	16QAM	1	0	23.20	0-1	1
	836.5	20525	10	16QAM	1	25	23.19	0-1	1
	836.5	20525	10	16QAM	1	49	23.20	0-1	1
	836.5	20525	10	16QAM	25	0	21.80	0-2	2
	836.5	20525	10	16QAM	25	12	21.87	0-2	2
	836.5	20525	10	16QAM	25	25	21.86	0-2	2
	836.5	20525	10	16QAM	50	0	21.89	0-2	2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 28 of 76	

Table 9-6
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	826.5	20425	5	QPSK	1	0	24.03	0	0
	826.5	20425	5	QPSK	1	12	23.98	0	0
	826.5	20425	5	QPSK	1	24	24.00	0	0
	826.5	20425	5	QPSK	12	0	22.82	0-1	1
	826.5	20425	5	QPSK	12	6	22.80	0-1	1
	826.5	20425	5	QPSK	12	13	22.83	0-1	1
	826.5	20425	5	QPSK	25	0	22.81	0-1	1
	826.5	20425	5	16-QAM	1	0	23.13	0-1	1
	826.5	20425	5	16-QAM	1	12	23.00	0-1	1
	826.5	20425	5	16-QAM	1	24	23.05	0-1	1
	826.5	20425	5	16-QAM	12	0	21.81	0-2	2
	826.5	20425	5	16-QAM	12	6	21.84	0-2	2
	826.5	20425	5	16-QAM	12	13	21.81	0-2	2
	826.5	20425	5	16-QAM	25	0	21.82	0-2	2
	836.5	20525	5	QPSK	1	0	23.88	0	0
	836.5	20525	5	QPSK	1	12	23.82	0	0
Mid	836.5	20525	5	QPSK	1	24	23.94	0	0
	836.5	20525	5	QPSK	12	0	22.97	0-1	1
	836.5	20525	5	QPSK	12	6	22.90	0-1	1
	836.5	20525	5	QPSK	12	13	22.85	0-1	1
	836.5	20525	5	QPSK	25	0	22.90	0-1	1
	836.5	20525	5	16-QAM	1	0	22.86	0-1	1
	836.5	20525	5	16-QAM	1	12	22.89	0-1	1
	836.5	20525	5	16-QAM	1	24	23.02	0-1	1
	836.5	20525	5	16-QAM	12	0	21.93	0-2	2
	836.5	20525	5	16-QAM	12	6	21.96	0-2	2
	836.5	20525	5	16-QAM	12	13	21.85	0-2	2
	836.5	20525	5	16-QAM	25	0	21.89	0-2	2
	846.5	20625	5	QPSK	1	0	23.96	0	0
	846.5	20625	5	QPSK	1	12	23.95	0	0
	846.5	20625	5	QPSK	1	24	23.91	0	0
	846.5	20625	5	QPSK	12	0	22.97	0-1	1
High	846.5	20625	5	QPSK	12	6	23.00	0-1	1
	846.5	20625	5	QPSK	12	13	23.06	0-1	1
	846.5	20625	5	QPSK	25	0	22.98	0-1	1
	846.5	20625	5	16-QAM	1	0	22.89	0-1	1
	846.5	20625	5	16-QAM	1	12	22.83	0-1	1
	846.5	20625	5	16-QAM	1	24	22.90	0-1	1
	846.5	20625	5	16-QAM	12	0	21.93	0-2	2
	846.5	20625	5	16-QAM	12	6	21.99	0-2	2
	846.5	20625	5	16-QAM	12	13	22.00	0-2	2
	846.5	20625	5	16-QAM	25	0	21.87	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 29 of 76	

Table 9-7
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	825.5	20415	3	QPSK	1	0	24.12	0	0
	825.5	20415	3	QPSK	1	7	23.91	0	0
	825.5	20415	3	QPSK	1	14	23.96	0	0
	825.5	20415	3	QPSK	8	0	22.82	0-1	1
	825.5	20415	3	QPSK	8	4	22.90	0-1	1
	825.5	20415	3	QPSK	8	7	22.87	0-1	1
	825.5	20415	3	QPSK	15	0	22.82	0-1	1
	825.5	20415	3	16-QAM	1	0	23.16	0-1	1
	825.5	20415	3	16-QAM	1	7	23.04	0-1	1
	825.5	20415	3	16-QAM	1	14	23.12	0-1	1
	825.5	20415	3	16-QAM	8	0	21.87	0-2	2
	825.5	20415	3	16-QAM	8	4	21.82	0-2	2
	825.5	20415	3	16-QAM	8	7	21.86	0-2	2
	825.5	20415	3	16-QAM	15	0	21.85	0-2	2
	836.5	20525	3	QPSK	1	0	23.96	0	0
Mid	836.5	20525	3	QPSK	1	7	23.88	0	0
	836.5	20525	3	QPSK	1	14	23.95	0	0
	836.5	20525	3	QPSK	8	0	22.92	0-1	1
	836.5	20525	3	QPSK	8	4	22.86	0-1	1
	836.5	20525	3	QPSK	8	7	22.95	0-1	1
	836.5	20525	3	QPSK	15	0	22.96	0-1	1
	836.5	20525	3	16-QAM	1	0	22.82	0-1	1
	836.5	20525	3	16-QAM	1	7	22.95	0-1	1
	836.5	20525	3	16-QAM	1	14	23.08	0-1	1
	836.5	20525	3	16-QAM	8	0	22.01	0-2	2
	836.5	20525	3	16-QAM	8	4	21.88	0-2	2
	836.5	20525	3	16-QAM	8	7	21.92	0-2	2
	836.5	20525	3	16-QAM	15	0	21.99	0-2	2
	847.5	20635	3	QPSK	1	0	24.05	0	0
	847.5	20635	3	QPSK	1	7	23.85	0	0
	847.5	20635	3	QPSK	1	14	23.96	0	0
High	847.5	20635	3	QPSK	8	0	22.94	0-1	1
	847.5	20635	3	QPSK	8	4	23.04	0-1	1
	847.5	20635	3	QPSK	8	7	23.10	0-1	1
	847.5	20635	3	QPSK	15	0	22.94	0-1	1
	847.5	20635	3	16-QAM	1	0	22.90	0-1	1
	847.5	20635	3	16-QAM	1	7	22.86	0-1	1
	847.5	20635	3	16-QAM	1	14	22.97	0-1	1
	847.5	20635	3	16-QAM	8	0	21.93	0-2	2
	847.5	20635	3	16-QAM	8	4	22.03	0-2	2
	847.5	20635	3	16-QAM	8	7	22.01	0-2	2
	847.5	20635	3	16-QAM	15	0	21.84	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 30 of 76

Table 9-8
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	824.7	20407	1.4	QPSK	1	0	24.00	0	0
	824.7	20407	1.4	QPSK	1	2	24.08	0	0
	824.7	20407	1.4	QPSK	1	5	23.98	0	0
	824.7	20407	1.4	QPSK	3	0	23.92	0	0
	824.7	20407	1.4	QPSK	3	2	23.85	0	0
	824.7	20407	1.4	QPSK	3	3	23.86	0	0
	824.7	20407	1.4	QPSK	6	0	22.88	0-1	1
	824.7	20407	1.4	16-QAM	1	0	23.07	0-1	1
	824.7	20407	1.4	16-QAM	1	2	23.07	0-1	1
	824.7	20407	1.4	16-QAM	1	5	23.01	0-1	1
	824.7	20407	1.4	16-QAM	3	0	22.89	0-1	1
	824.7	20407	1.4	16-QAM	3	2	22.83	0-1	1
	824.7	20407	1.4	16-QAM	3	3	22.81	0-1	1
	824.7	20407	1.4	16-QAM	6	0	21.91	0-2	2
Mid	836.5	20525	1.4	QPSK	1	0	23.95	0	0
	836.5	20525	1.4	QPSK	1	2	23.84	0	0
	836.5	20525	1.4	QPSK	1	5	23.96	0	0
	836.5	20525	1.4	QPSK	3	0	23.87	0	0
	836.5	20525	1.4	QPSK	3	2	24.00	0	0
	836.5	20525	1.4	QPSK	3	3	23.91	0	0
	836.5	20525	1.4	QPSK	6	0	22.93	0-1	1
	836.5	20525	1.4	16-QAM	1	0	22.92	0-1	1
	836.5	20525	1.4	16-QAM	1	2	22.80	0-1	1
	836.5	20525	1.4	16-QAM	1	5	22.94	0-1	1
	836.5	20525	1.4	16-QAM	3	0	22.87	0-1	1
	836.5	20525	1.4	16-QAM	3	2	23.03	0-1	1
	836.5	20525	1.4	16-QAM	3	3	22.82	0-1	1
	836.5	20525	1.4	16-QAM	6	0	21.89	0-2	2
High	848.3	20643	1.4	QPSK	1	0	23.97	0	0
	848.3	20643	1.4	QPSK	1	2	23.93	0	0
	848.3	20643	1.4	QPSK	1	5	23.83	0	0
	848.3	20643	1.4	QPSK	3	0	23.97	0	0
	848.3	20643	1.4	QPSK	3	2	24.09	0	0
	848.3	20643	1.4	QPSK	3	3	24.16	0	0
	848.3	20643	1.4	QPSK	6	0	23.06	0-1	1
	848.3	20643	1.4	16-QAM	1	0	22.83	0-1	1
	848.3	20643	1.4	16-QAM	1	2	22.92	0-1	1
	848.3	20643	1.4	16-QAM	1	5	22.82	0-1	1
	848.3	20643	1.4	16-QAM	3	0	22.95	0-1	1
	848.3	20643	1.4	16-QAM	3	2	22.93	0-1	1
	848.3	20643	1.4	16-QAM	3	3	23.08	0-1	1
	848.3	20643	1.4	16-QAM	6	0	21.86	0-2	2

9.3.3 LTE Band 4 (AWS)

Table 9-9
LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Mid	1732.5	20175	20	QPSK	1	0	24.57	0	0
	1732.5	20175	20	QPSK	1	50	24.59	0	0
	1732.5	20175	20	QPSK	1	99	24.42	0	0
	1732.5	20175	20	QPSK	50	0	23.51	0-1	1
	1732.5	20175	20	QPSK	50	25	23.55	0-1	1
	1732.5	20175	20	QPSK	50	50	23.58	0-1	1
	1732.5	20175	20	QPSK	100	0	23.52	0-1	1
	1732.5	20175	20	16QAM	1	0	23.49	0-1	1
	1732.5	20175	20	16QAM	1	50	23.62	0-1	1
	1732.5	20175	20	16QAM	1	99	23.65	0-1	1
	1732.5	20175	20	16QAM	50	0	22.47	0-2	2
	1732.5	20175	20	16QAM	50	25	22.49	0-2	2
	1732.5	20175	20	16QAM	50	50	22.56	0-2	2
	1732.5	20175	20	16QAM	100	0	22.51	0-2	2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 31 of 76

Table 9-10
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1717.5	20025	15	QPSK	1	0	24.44	0	0
	1717.5	20025	15	QPSK	1	36	24.53	0	0
	1717.5	20025	15	QPSK	1	74	24.46	0	0
	1717.5	20025	15	QPSK	36	0	23.39	0-1	1
	1717.5	20025	15	QPSK	36	18	23.34	0-1	1
	1717.5	20025	15	QPSK	36	37	23.51	0-1	1
	1717.5	20025	15	QPSK	75	0	23.35	0-1	1
	1717.5	20025	15	16QAM	1	0	23.61	0-1	1
	1717.5	20025	15	16QAM	1	36	23.57	0-1	1
	1717.5	20025	15	16QAM	1	74	23.50	0-1	1
	1717.5	20025	15	16QAM	36	0	22.37	0-2	2
	1717.5	20025	15	16QAM	36	18	22.43	0-2	2
	1717.5	20025	15	16QAM	36	37	22.51	0-2	2
	1717.5	20025	15	16QAM	75	0	22.41	0-2	2
	1732.5	20175	15	QPSK	1	0	24.56	0	0
Mid	1732.5	20175	15	QPSK	1	36	24.50	0	0
	1732.5	20175	15	QPSK	1	74	24.40	0	0
	1732.5	20175	15	QPSK	36	0	23.49	0-1	1
	1732.5	20175	15	QPSK	36	18	23.56	0-1	1
	1732.5	20175	15	QPSK	36	37	23.57	0-1	1
	1732.5	20175	15	QPSK	75	0	23.44	0-1	1
	1732.5	20175	15	16QAM	1	0	23.45	0-1	1
	1732.5	20175	15	16QAM	1	36	23.36	0-1	1
	1732.5	20175	15	16QAM	1	74	23.35	0-1	1
	1732.5	20175	15	16QAM	36	0	22.47	0-2	2
	1732.5	20175	15	16QAM	36	18	22.50	0-2	2
	1732.5	20175	15	16QAM	36	37	22.52	0-2	2
	1732.5	20175	15	16QAM	75	0	22.46	0-2	2
	1747.5	20325	15	QPSK	1	0	24.67	0	0
	1747.5	20325	15	QPSK	1	36	24.50	0	0
	1747.5	20325	15	QPSK	1	74	24.56	0	0
High	1747.5	20325	15	QPSK	36	0	23.40	0-1	1
	1747.5	20325	15	QPSK	36	18	23.44	0-1	1
	1747.5	20325	15	QPSK	36	37	23.30	0-1	1
	1747.5	20325	15	QPSK	75	0	23.39	0-1	1
	1747.5	20325	15	16QAM	1	0	23.50	0-1	1
	1747.5	20325	15	16QAM	1	36	23.40	0-1	1
	1747.5	20325	15	16QAM	1	74	23.38	0-1	1
	1747.5	20325	15	16QAM	36	0	22.45	0-2	2
	1747.5	20325	15	16QAM	36	18	22.37	0-2	2
	1747.5	20325	15	16QAM	36	37	22.32	0-2	2
	1747.5	20325	15	16QAM	75	0	22.30	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 32 of 76

Table 9-11
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1715	20000	10	QPSK	1	0	24.70	0	0
	1715	20000	10	QPSK	1	25	24.59	0	0
	1715	20000	10	QPSK	1	49	24.41	0	0
	1715	20000	10	QPSK	25	0	23.67	0-1	1
	1715	20000	10	QPSK	25	12	23.62	0-1	1
	1715	20000	10	QPSK	25	25	23.57	0-1	1
	1715	20000	10	QPSK	50	0	23.55	0-1	1
	1715	20000	10	16QAM	1	0	23.63	0-1	1
	1715	20000	10	16QAM	1	25	23.56	0-1	1
	1715	20000	10	16QAM	1	49	23.47	0-1	1
	1715	20000	10	16QAM	25	0	22.62	0-2	2
	1715	20000	10	16QAM	25	12	22.66	0-2	2
	1715	20000	10	16QAM	25	25	22.54	0-2	2
	1715	20000	10	16QAM	50	0	22.58	0-2	2
	1732.5	20175	10	QPSK	1	0	24.45	0	0
	1732.5	20175	10	QPSK	1	25	24.31	0	0
Mid	1732.5	20175	10	QPSK	1	49	24.33	0	0
	1732.5	20175	10	QPSK	25	0	23.51	0-1	1
	1732.5	20175	10	QPSK	25	12	23.53	0-1	1
	1732.5	20175	10	QPSK	25	25	23.47	0-1	1
	1732.5	20175	10	QPSK	50	0	23.52	0-1	1
	1732.5	20175	10	16QAM	1	0	23.70	0-1	1
	1732.5	20175	10	16QAM	1	25	23.65	0-1	1
	1732.5	20175	10	16QAM	1	49	23.63	0-1	1
	1732.5	20175	10	16QAM	25	0	22.53	0-2	2
	1732.5	20175	10	16QAM	25	12	22.58	0-2	2
	1732.5	20175	10	16QAM	25	25	22.45	0-2	2
	1732.5	20175	10	16QAM	50	0	22.52	0-2	2
	1750	20350	10	QPSK	1	0	24.40	0	0
	1750	20350	10	QPSK	1	25	24.42	0	0
	1750	20350	10	QPSK	1	49	24.36	0	0
	1750	20350	10	QPSK	25	0	23.45	0-1	1
High	1750	20350	10	QPSK	25	12	23.47	0-1	1
	1750	20350	10	QPSK	25	25	23.30	0-1	1
	1750	20350	10	QPSK	50	0	23.40	0-1	1
	1750	20350	10	16QAM	1	0	23.37	0-1	1
	1750	20350	10	16QAM	1	25	23.34	0-1	1
	1750	20350	10	16QAM	1	49	23.33	0-1	1
	1750	20350	10	16QAM	25	0	22.42	0-2	2
	1750	20350	10	16QAM	25	12	22.43	0-2	2
	1750	20350	10	16QAM	25	25	22.39	0-2	2
	1750	20350	10	16QAM	50	0	22.37	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 33 of 76	

Table 9-12

LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1712.5	19975	5	QPSK	1	0	24.47	0	0
	1712.5	19975	5	QPSK	1	12	24.36	0	0
	1712.5	19975	5	QPSK	1	24	24.53	0	0
	1712.5	19975	5	QPSK	12	0	23.43	0-1	1
	1712.5	19975	5	QPSK	12	6	23.52	0-1	1
	1712.5	19975	5	QPSK	12	13	23.51	0-1	1
	1712.5	19975	5	QPSK	25	0	23.42	0-1	1
	1712.5	19975	5	16-QAM	1	0	23.49	0-1	1
	1712.5	19975	5	16-QAM	1	12	23.36	0-1	1
	1712.5	19975	5	16-QAM	1	24	23.44	0-1	1
	1712.5	19975	5	16-QAM	12	0	22.52	0-2	2
	1712.5	19975	5	16-QAM	12	6	22.50	0-2	2
Mid	1712.5	19975	5	16-QAM	12	13	22.46	0-2	2
	1712.5	19975	5	16-QAM	25	0	22.43	0-2	2
	1732.5	20175	5	QPSK	1	0	24.47	0	0
	1732.5	20175	5	QPSK	1	12	24.30	0	0
	1732.5	20175	5	QPSK	1	24	24.42	0	0
	1732.5	20175	5	QPSK	12	0	23.49	0-1	1
	1732.5	20175	5	QPSK	12	6	23.47	0-1	1
	1732.5	20175	5	QPSK	12	13	23.40	0-1	1
	1732.5	20175	5	QPSK	25	0	23.42	0-1	1
	1732.5	20175	5	16-QAM	1	0	23.52	0-1	1
	1732.5	20175	5	16-QAM	1	12	23.41	0-1	1
	1732.5	20175	5	16-QAM	1	24	23.51	0-1	1
High	1732.5	20175	5	16-QAM	12	0	22.45	0-2	2
	1732.5	20175	5	16-QAM	12	6	22.32	0-2	2
	1732.5	20175	5	16-QAM	12	13	22.35	0-2	2
	1732.5	20175	5	16-QAM	25	0	22.39	0-2	2
	1752.5	20375	5	QPSK	1	0	24.39	0	0
	1752.5	20375	5	QPSK	1	12	24.31	0	0
	1752.5	20375	5	QPSK	1	24	24.31	0	0
	1752.5	20375	5	QPSK	12	0	23.36	0-1	1
	1752.5	20375	5	QPSK	12	6	23.31	0-1	1
	1752.5	20375	5	QPSK	12	13	23.30	0-1	1
	1752.5	20375	5	QPSK	25	0	23.33	0-1	1
	1752.5	20375	5	16-QAM	1	0	23.42	0-1	1
	1752.5	20375	5	16-QAM	1	12	23.34	0-1	1
	1752.5	20375	5	16-QAM	1	24	23.33	0-1	1
	1752.5	20375	5	16-QAM	12	0	22.37	0-2	2
	1752.5	20375	5	16-QAM	12	6	22.33	0-2	2
	1752.5	20375	5	16-QAM	12	13	22.38	0-2	2
	1752.5	20375	5	16-QAM	25	0	22.34	0-2	2

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 34 of 76

Table 9-13

LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1711.5	19965	3	QPSK	1	0	24.54	0	0
	1711.5	19965	3	QPSK	1	7	24.49	0	0
	1711.5	19965	3	QPSK	1	14	24.47	0	0
	1711.5	19965	3	QPSK	8	0	23.50	0-1	1
	1711.5	19965	3	QPSK	8	4	23.49	0-1	1
	1711.5	19965	3	QPSK	8	7	23.53	0-1	1
	1711.5	19965	3	QPSK	15	0	23.44	0-1	1
	1711.5	19965	3	16-QAM	1	0	23.58	0-1	1
	1711.5	19965	3	16-QAM	1	7	23.50	0-1	1
	1711.5	19965	3	16-QAM	1	14	23.47	0-1	1
	1711.5	19965	3	16-QAM	8	0	22.50	0-2	2
	1711.5	19965	3	16-QAM	8	4	22.53	0-2	2
	1711.5	19965	3	16-QAM	8	7	22.50	0-2	2
	1711.5	19965	3	16-QAM	15	0	22.47	0-2	2
	1732.5	20175	3	QPSK	1	0	24.49	0	0
Mid	1732.5	20175	3	QPSK	1	7	24.37	0	0
	1732.5	20175	3	QPSK	1	14	24.38	0	0
	1732.5	20175	3	QPSK	8	0	23.49	0-1	1
	1732.5	20175	3	QPSK	8	4	23.52	0-1	1
	1732.5	20175	3	QPSK	8	7	23.48	0-1	1
	1732.5	20175	3	QPSK	15	0	23.46	0-1	1
	1732.5	20175	3	16-QAM	1	0	23.56	0-1	1
	1732.5	20175	3	16-QAM	1	7	23.44	0-1	1
	1732.5	20175	3	16-QAM	1	14	23.46	0-1	1
	1732.5	20175	3	16-QAM	8	0	22.48	0-2	2
	1732.5	20175	3	16-QAM	8	4	22.47	0-2	2
	1732.5	20175	3	16-QAM	8	7	22.44	0-2	2
	1732.5	20175	3	16-QAM	15	0	22.46	0-2	2
	1753.5	20385	3	QPSK	1	0	24.45	0	0
	1753.5	20385	3	QPSK	1	7	24.34	0	0
High	1753.5	20385	3	QPSK	1	14	24.33	0	0
	1753.5	20385	3	QPSK	8	0	23.37	0-1	1
	1753.5	20385	3	QPSK	8	4	23.37	0-1	1
	1753.5	20385	3	QPSK	8	7	23.30	0-1	1
	1753.5	20385	3	QPSK	15	0	23.39	0-1	1
	1753.5	20385	3	16-QAM	1	0	23.43	0-1	1
	1753.5	20385	3	16-QAM	1	7	23.36	0-1	1
	1753.5	20385	3	16-QAM	1	14	23.35	0-1	1
	1753.5	20385	3	16-QAM	8	0	22.38	0-2	2
	1753.5	20385	3	16-QAM	8	4	22.34	0-2	2
	1753.5	20385	3	16-QAM	8	7	22.30	0-2	2
	1753.5	20385	3	16-QAM	15	0	22.30	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 35 of 76

Table 9-14
LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1710.7	19957	1.4	QPSK	1	0	24.54	0	0
	1710.7	19957	1.4	QPSK	1	2	24.51	0	0
	1710.7	19957	1.4	QPSK	1	5	24.44	0	0
	1710.7	19957	1.4	QPSK	3	0	24.60	0	0
	1710.7	19957	1.4	QPSK	3	2	24.44	0	0
	1710.7	19957	1.4	QPSK	3	3	24.62	0	0
	1710.7	19957	1.4	QPSK	6	0	23.45	0-1	1
	1710.7	19957	1.4	16-QAM	1	0	23.49	0-1	1
	1710.7	19957	1.4	16-QAM	1	2	23.51	0-1	1
	1710.7	19957	1.4	16-QAM	1	5	23.51	0-1	1
	1710.7	19957	1.4	16-QAM	3	0	23.43	0-1	1
	1710.7	19957	1.4	16-QAM	3	2	23.53	0-1	1
	1710.7	19957	1.4	16-QAM	3	3	23.47	0-1	1
	1710.7	19957	1.4	16-QAM	6	0	22.42	0-2	2
Mid	1732.5	20175	1.4	QPSK	1	0	24.54	0	0
	1732.5	20175	1.4	QPSK	1	2	24.39	0	0
	1732.5	20175	1.4	QPSK	1	5	24.30	0	0
	1732.5	20175	1.4	QPSK	3	0	24.57	0	0
	1732.5	20175	1.4	QPSK	3	2	24.49	0	0
	1732.5	20175	1.4	QPSK	3	3	24.45	0	0
	1732.5	20175	1.4	QPSK	6	0	23.55	0-1	1
	1732.5	20175	1.4	16-QAM	1	0	23.55	0-1	1
	1732.5	20175	1.4	16-QAM	1	2	23.38	0-1	1
	1732.5	20175	1.4	16-QAM	1	5	23.47	0-1	1
	1732.5	20175	1.4	16-QAM	3	0	23.51	0-1	1
	1732.5	20175	1.4	16-QAM	3	2	23.47	0-1	1
	1732.5	20175	1.4	16-QAM	3	3	23.35	0-1	1
	1732.5	20175	1.4	16-QAM	6	0	22.40	0-2	2
High	1754.3	20393	1.4	QPSK	1	0	24.54	0	0
	1754.3	20393	1.4	QPSK	1	2	24.33	0	0
	1754.3	20393	1.4	QPSK	1	5	24.40	0	0
	1754.3	20393	1.4	QPSK	3	0	24.35	0	0
	1754.3	20393	1.4	QPSK	3	2	24.31	0	0
	1754.3	20393	1.4	QPSK	3	3	24.31	0	0
	1754.3	20393	1.4	QPSK	6	0	23.32	0-1	1
	1754.3	20393	1.4	16-QAM	1	0	23.46	0-1	1
	1754.3	20393	1.4	16-QAM	1	2	23.36	0-1	1
	1754.3	20393	1.4	16-QAM	1	5	23.31	0-1	1
	1754.3	20393	1.4	16-QAM	3	0	23.37	0-1	1
	1754.3	20393	1.4	16-QAM	3	2	23.35	0-1	1
	1754.3	20393	1.4	16-QAM	3	3	23.34	0-1	1
	1754.3	20393	1.4	16-QAM	6	0	22.32	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 36 of 76	

9.3.4

LTE Band 2 (PCS)

Table 9-15
LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1860	18700	20	QPSK	1	0	24.01	0	0
	1860	18700	20	QPSK	1	50	23.94	0	0
	1860	18700	20	QPSK	1	99	23.83	0	0
	1860	18700	20	QPSK	50	0	23.02	0-1	1
	1860	18700	20	QPSK	50	25	22.97	0-1	1
	1860	18700	20	QPSK	50	50	23.06	0-1	1
	1860	18700	20	QPSK	100	0	22.98	0-1	1
	1860	18700	20	16QAM	1	0	23.18	0-1	1
	1860	18700	20	16QAM	1	50	23.14	0-1	1
	1860	18700	20	16QAM	1	99	23.17	0-1	1
	1860	18700	20	16QAM	50	0	21.93	0-2	2
	1860	18700	20	16QAM	50	25	21.99	0-2	2
	1860	18700	20	16QAM	50	50	21.98	0-2	2
	1860	18700	20	16QAM	100	0	21.93	0-2	2
Mid	1880.0	18900	20	QPSK	1	0	24.19	0	0
	1880.0	18900	20	QPSK	1	50	23.88	0	0
	1880.0	18900	20	QPSK	1	99	24.02	0	0
	1880.0	18900	20	QPSK	50	0	22.92	0-1	1
	1880.0	18900	20	QPSK	50	25	22.89	0-1	1
	1880.0	18900	20	QPSK	50	50	22.92	0-1	1
	1880.0	18900	20	QPSK	100	0	22.89	0-1	1
	1880.0	18900	20	16QAM	1	0	23.20	0-1	1
	1880.0	18900	20	16QAM	1	50	23.16	0-1	1
	1880.0	18900	20	16QAM	1	99	23.14	0-1	1
	1880.0	18900	20	16QAM	50	0	22.02	0-2	2
	1880.0	18900	20	16QAM	50	25	21.89	0-2	2
	1880.0	18900	20	16QAM	50	50	21.96	0-2	2
	1880.0	18900	20	16QAM	100	0	21.95	0-2	2
High	1900	19100	20	QPSK	1	0	24.20	0	0
	1900	19100	20	QPSK	1	50	24.01	0	0
	1900	19100	20	QPSK	1	99	24.18	0	0
	1900	19100	20	QPSK	50	0	23.02	0-1	1
	1900	19100	20	QPSK	50	25	23.10	0-1	1
	1900	19100	20	QPSK	50	50	22.80	0-1	1
	1900	19100	20	QPSK	100	0	23.09	0-1	1
	1900	19100	20	16QAM	1	0	23.14	0-1	1
	1900	19100	20	16QAM	1	50	23.17	0-1	1
	1900	19100	20	16QAM	1	99	22.83	0-1	1
	1900	19100	20	16QAM	50	0	22.00	0-2	2
	1900	19100	20	16QAM	50	25	22.00	0-2	2
	1900	19100	20	16QAM	50	50	21.83	0-2	2
	1900	19100	20	16QAM	100	0	22.16	0-2	2

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 37 of 76

Table 9-16
LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1857.5	18675	15	QPSK	1	0	24.20	0	0
	1857.5	18675	15	QPSK	1	36	24.18	0	0
	1857.5	18675	15	QPSK	1	74	24.11	0	0
	1857.5	18675	15	QPSK	36	0	22.91	0-1	1
	1857.5	18675	15	QPSK	36	18	22.89	0-1	1
	1857.5	18675	15	QPSK	36	37	22.90	0-1	1
	1857.5	18675	15	QPSK	75	0	22.91	0-1	1
	1857.5	18675	15	16QAM	1	0	23.20	0-1	1
	1857.5	18675	15	16QAM	1	36	23.15	0-1	1
	1857.5	18675	15	16QAM	1	74	23.20	0-1	1
	1857.5	18675	15	16QAM	36	0	21.93	0-2	2
	1857.5	18675	15	16QAM	36	18	21.93	0-2	2
	1857.5	18675	15	16QAM	36	37	21.94	0-2	2
	1857.5	18675	15	16QAM	75	0	21.87	0-2	2
Mid	1880.0	18900	15	QPSK	1	0	24.12	0	0
	1880.0	18900	15	QPSK	1	36	24.08	0	0
	1880.0	18900	15	QPSK	1	74	23.88	0	0
	1880.0	18900	15	QPSK	36	0	22.84	0-1	1
	1880.0	18900	15	QPSK	36	18	22.83	0-1	1
	1880.0	18900	15	QPSK	36	37	22.80	0-1	1
	1880.0	18900	15	QPSK	75	0	22.83	0-1	1
	1880.0	18900	15	16QAM	1	0	23.20	0-1	1
	1880.0	18900	15	16QAM	1	36	23.13	0-1	1
	1880.0	18900	15	16QAM	1	74	23.06	0-1	1
	1880.0	18900	15	16QAM	36	0	21.95	0-2	2
	1880.0	18900	15	16QAM	36	18	21.88	0-2	2
	1880.0	18900	15	16QAM	36	37	21.87	0-2	2
	1880.0	18900	15	16QAM	75	0	21.87	0-2	2
High	1902.5	19125	15	QPSK	1	0	24.20	0	0
	1902.5	19125	15	QPSK	1	36	24.15	0	0
	1902.5	19125	15	QPSK	1	74	24.04	0	0
	1902.5	19125	15	QPSK	36	0	23.09	0-1	1
	1902.5	19125	15	QPSK	36	18	22.98	0-1	1
	1902.5	19125	15	QPSK	36	37	22.94	0-1	1
	1902.5	19125	15	QPSK	75	0	22.97	0-1	1
	1902.5	19125	15	16QAM	1	0	23.09	0-1	1
	1902.5	19125	15	16QAM	1	36	23.14	0-1	1
	1902.5	19125	15	16QAM	1	74	23.03	0-1	1
	1902.5	19125	15	16QAM	36	0	21.87	0-2	2
	1902.5	19125	15	16QAM	36	18	21.88	0-2	2
	1902.5	19125	15	16QAM	36	37	21.86	0-2	2
	1902.5	19125	15	16QAM	75	0	21.98	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 38 of 76

Table 9-17

LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1855	18650	10	QPSK	1	0	24.10	0	0
	1855	18650	10	QPSK	1	25	24.06	0	0
	1855	18650	10	QPSK	1	49	23.97	0	0
	1855	18650	10	QPSK	25	0	22.96	0-1	1
	1855	18650	10	QPSK	25	12	22.93	0-1	1
	1855	18650	10	QPSK	25	25	22.98	0-1	1
	1855	18650	10	QPSK	50	0	22.94	0-1	1
	1855	18650	10	16QAM	1	0	23.19	0-1	1
	1855	18650	10	16QAM	1	25	23.14	0-1	1
	1855	18650	10	16QAM	1	49	23.18	0-1	1
	1855	18650	10	16QAM	25	0	21.93	0-2	2
	1855	18650	10	16QAM	25	12	21.96	0-2	2
	1855	18650	10	16QAM	25	25	21.96	0-2	2
	1855	18650	10	16QAM	50	0	21.90	0-2	2
	1880.0	18900	10	QPSK	1	0	24.15	0	0
Mid	1880.0	18900	10	QPSK	1	25	23.98	0	0
	1880.0	18900	10	QPSK	1	49	23.95	0	0
	1880.0	18900	10	QPSK	25	0	22.88	0-1	1
	1880.0	18900	10	QPSK	25	12	22.86	0-1	1
	1880.0	18900	10	QPSK	25	25	22.86	0-1	1
	1880.0	18900	10	QPSK	50	0	22.86	0-1	1
	1880.0	18900	10	16QAM	1	0	23.20	0-1	1
	1880.0	18900	10	16QAM	1	25	23.14	0-1	1
	1880.0	18900	10	16QAM	1	49	23.10	0-1	1
	1880.0	18900	10	16QAM	25	0	21.98	0-2	2
	1880.0	18900	10	16QAM	25	12	21.88	0-2	2
	1880.0	18900	10	16QAM	25	25	21.91	0-2	2
	1880.0	18900	10	16QAM	50	0	21.91	0-2	2
	1905	19150	10	QPSK	1	0	24.20	0	0
	1905	19150	10	QPSK	1	25	24.08	0	0
High	1905	19150	10	QPSK	1	49	24.11	0	0
	1905	19150	10	QPSK	25	0	23.05	0-1	1
	1905	19150	10	QPSK	25	12	23.04	0-1	1
	1905	19150	10	QPSK	25	25	22.87	0-1	1
	1905	19150	10	QPSK	50	0	23.03	0-1	1
	1905	19150	10	16QAM	1	0	23.11	0-1	1
	1905	19150	10	16QAM	1	25	23.15	0-1	1
	1905	19150	10	16QAM	1	49	22.93	0-1	1
	1905	19150	10	16QAM	25	0	21.93	0-2	2
	1905	19150	10	16QAM	25	12	21.94	0-2	2
	1905	19150	10	16QAM	25	25	21.84	0-2	2
	1905	19150	10	16QAM	50	0	22.07	0-2	2

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 39 of 76

Table 9-18
LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1852.5	18625	5	QPSK	1	0	24.18	0	0
	1852.5	18625	5	QPSK	1	12	24.12	0	0
	1852.5	18625	5	QPSK	1	24	23.95	0	0
	1852.5	18625	5	QPSK	12	0	23.00	0-1	1
	1852.5	18625	5	QPSK	12	6	22.98	0-1	1
	1852.5	18625	5	QPSK	12	13	22.99	0-1	1
	1852.5	18625	5	QPSK	25	0	22.90	0-1	1
	1852.5	18625	5	16-QAM	1	0	23.13	0-1	1
	1852.5	18625	5	16-QAM	1	12	23.20	0-1	1
	1852.5	18625	5	16-QAM	1	24	23.13	0-1	1
	1852.5	18625	5	16-QAM	12	0	21.94	0-2	2
	1852.5	18625	5	16-QAM	12	6	22.05	0-2	2
	1852.5	18625	5	16-QAM	12	13	21.94	0-2	2
	1852.5	18625	5	16-QAM	25	0	21.96	0-2	2
	1880.0	18900	5	QPSK	1	0	24.06	0	0
	1880.0	18900	5	QPSK	1	12	24.05	0	0
Mid	1880.0	18900	5	QPSK	1	24	23.86	0	0
	1880.0	18900	5	QPSK	12	0	22.96	0-1	1
	1880.0	18900	5	QPSK	12	6	22.86	0-1	1
	1880.0	18900	5	QPSK	12	13	22.90	0-1	1
	1880.0	18900	5	QPSK	25	0	22.88	0-1	1
	1880.0	18900	5	16-QAM	1	0	23.20	0-1	1
	1880.0	18900	5	16-QAM	1	12	23.06	0-1	1
	1880.0	18900	5	16-QAM	1	24	23.00	0-1	1
	1880.0	18900	5	16-QAM	12	0	21.97	0-2	2
	1880.0	18900	5	16-QAM	12	6	21.96	0-2	2
	1880.0	18900	5	16-QAM	12	13	21.86	0-2	2
	1880.0	18900	5	16-QAM	25	0	21.93	0-2	2
	1907.5	19175	5	QPSK	1	0	24.10	0	0
	1907.5	19175	5	QPSK	1	12	24.15	0	0
	1907.5	19175	5	QPSK	1	24	24.14	0	0
	1907.5	19175	5	QPSK	12	0	22.95	0-1	1
High	1907.5	19175	5	QPSK	12	6	23.13	0-1	1
	1907.5	19175	5	QPSK	12	13	22.92	0-1	1
	1907.5	19175	5	QPSK	25	0	22.95	0-1	1
	1907.5	19175	5	16-QAM	1	0	23.02	0-1	1
	1907.5	19175	5	16-QAM	1	12	23.20	0-1	1
	1907.5	19175	5	16-QAM	1	24	23.00	0-1	1
	1907.5	19175	5	16-QAM	12	0	21.91	0-2	2
	1907.5	19175	5	16-QAM	12	6	21.93	0-2	2
	1907.5	19175	5	16-QAM	12	13	21.84	0-2	2
	1907.5	19175	5	16-QAM	25	0	21.97	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 40 of 76	

Table 9-19
LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1851.5	18615	3	QPSK	1	0	24.13	0	0
	1851.5	18615	3	QPSK	1	7	24.10	0	0
	1851.5	18615	3	QPSK	1	14	24.06	0	0
	1851.5	18615	3	QPSK	8	0	23.03	0-1	1
	1851.5	18615	3	QPSK	8	4	22.98	0-1	1
	1851.5	18615	3	QPSK	8	7	22.98	0-1	1
	1851.5	18615	3	QPSK	15	0	23.04	0-1	1
	1851.5	18615	3	16-QAM	1	0	23.19	0-1	1
	1851.5	18615	3	16-QAM	1	7	23.06	0-1	1
	1851.5	18615	3	16-QAM	1	14	23.16	0-1	1
	1851.5	18615	3	16-QAM	8	0	21.99	0-2	2
	1851.5	18615	3	16-QAM	8	4	21.97	0-2	2
	1851.5	18615	3	16-QAM	8	7	21.97	0-2	2
	1851.5	18615	3	16-QAM	15	0	21.82	0-2	2
Mid	1880.0	18900	3	QPSK	1	0	24.14	0	0
	1880.0	18900	3	QPSK	1	7	24.05	0	0
	1880.0	18900	3	QPSK	1	14	23.92	0	0
	1880.0	18900	3	QPSK	8	0	22.81	0-1	1
	1880.0	18900	3	QPSK	8	4	22.87	0-1	1
	1880.0	18900	3	QPSK	8	7	22.85	0-1	1
	1880.0	18900	3	QPSK	15	0	22.83	0-1	1
	1880.0	18900	3	16-QAM	1	0	23.10	0-1	1
	1880.0	18900	3	16-QAM	1	7	23.07	0-1	1
	1880.0	18900	3	16-QAM	1	14	23.18	0-1	1
	1880.0	18900	3	16-QAM	8	0	22.02	0-2	2
	1880.0	18900	3	16-QAM	8	4	21.92	0-2	2
	1880.0	18900	3	16-QAM	8	7	21.95	0-2	2
	1880.0	18900	3	16-QAM	15	0	21.87	0-2	2
High	1908.5	19185	3	QPSK	1	0	24.16	0	0
	1908.5	19185	3	QPSK	1	7	24.09	0	0
	1908.5	19185	3	QPSK	1	14	24.02	0	0
	1908.5	19185	3	QPSK	8	0	23.12	0-1	1
	1908.5	19185	3	QPSK	8	4	22.98	0-1	1
	1908.5	19185	3	QPSK	8	7	22.85	0-1	1
	1908.5	19185	3	QPSK	15	0	23.12	0-1	1
	1908.5	19185	3	16-QAM	1	0	23.12	0-1	1
	1908.5	19185	3	16-QAM	1	7	23.09	0-1	1
	1908.5	19185	3	16-QAM	1	14	22.88	0-1	1
	1908.5	19185	3	16-QAM	8	0	21.97	0-2	2
	1908.5	19185	3	16-QAM	8	4	21.88	0-2	2
	1908.5	19185	3	16-QAM	8	7	21.87	0-2	2
	1908.5	19185	3	16-QAM	15	0	22.16	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 41 of 76

Table 9-20
LTE Band 2 (PCS) Conducted Powers -1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	1850.7	18607	1.4	QPSK	1	0	24.05	0	0
	1850.7	18607	1.4	QPSK	1	2	24.09	0	0
	1850.7	18607	1.4	QPSK	1	5	24.06	0	0
	1850.7	18607	1.4	QPSK	3	0	23.86	0	0
	1850.7	18607	1.4	QPSK	3	2	23.86	0	0
	1850.7	18607	1.4	QPSK	3	3	23.90	0	0
	1850.7	18607	1.4	QPSK	6	0	22.94	0-1	1
	1850.7	18607	1.4	16-QAM	1	0	23.10	0-1	1
	1850.7	18607	1.4	16-QAM	1	2	23.17	0-1	1
	1850.7	18607	1.4	16-QAM	1	5	23.15	0-1	1
	1850.7	18607	1.4	16-QAM	3	0	23.00	0-1	1
	1850.7	18607	1.4	16-QAM	3	2	22.97	0-1	1
	1850.7	18607	1.4	16-QAM	3	3	23.00	0-1	1
	1850.7	18607	1.4	16-QAM	6	0	22.00	0-2	2
Mid	1880.0	18900	1.4	QPSK	1	0	24.20	0	0
	1880.0	18900	1.4	QPSK	1	2	23.89	0	0
	1880.0	18900	1.4	QPSK	1	5	23.98	0	0
	1880.0	18900	1.4	QPSK	3	0	23.89	0	0
	1880.0	18900	1.4	QPSK	3	2	23.87	0	0
	1880.0	18900	1.4	QPSK	3	3	23.88	0	0
	1880.0	18900	1.4	QPSK	6	0	22.83	0-1	1
	1880.0	18900	1.4	16-QAM	1	0	23.20	0-1	1
	1880.0	18900	1.4	16-QAM	1	2	23.14	0-1	1
	1880.0	18900	1.4	16-QAM	1	5	23.03	0-1	1
	1880.0	18900	1.4	16-QAM	3	0	22.92	0-1	1
	1880.0	18900	1.4	16-QAM	3	2	22.93	0-1	1
	1880.0	18900	1.4	16-QAM	3	3	22.96	0-1	1
	1880.0	18900	1.4	16-QAM	6	0	21.98	0-2	2
High	1909.3	19193	1.4	QPSK	1	0	24.12	0	0
	1909.3	19193	1.4	QPSK	1	2	24.03	0	0
	1909.3	19193	1.4	QPSK	1	5	24.17	0	0
	1909.3	19193	1.4	QPSK	3	0	24.11	0	0
	1909.3	19193	1.4	QPSK	3	2	23.95	0	0
	1909.3	19193	1.4	QPSK	3	3	23.86	0	0
	1909.3	19193	1.4	QPSK	6	0	23.02	0-1	1
	1909.3	19193	1.4	16-QAM	1	0	23.03	0-1	1
	1909.3	19193	1.4	16-QAM	1	2	23.05	0-1	1
	1909.3	19193	1.4	16-QAM	1	5	22.91	0-1	1
	1909.3	19193	1.4	16-QAM	3	0	23.00	0-1	1
	1909.3	19193	1.4	16-QAM	3	2	22.94	0-1	1
	1909.3	19193	1.4	16-QAM	3	3	22.84	0-1	1
	1909.3	19193	1.4	16-QAM	6	0	22.09	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 42 of 76

9.3.5

LTE Band 7

Table 9-21
LTE Band 7 Conducted Powers - 20 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	2510	20850	20	QPSK	1	0	23.69	0	0
	2510	20850	20	QPSK	1	50	23.62	0	0
	2510	20850	20	QPSK	1	99	23.68	0	0
	2510	20850	20	QPSK	50	0	22.50	0-1	1
	2510	20850	20	QPSK	50	25	22.52	0-1	1
	2510	20850	20	QPSK	50	50	22.59	0-1	1
	2510	20850	20	QPSK	100	0	22.52	0-1	1
	2510	20850	20	16QAM	1	0	22.60	0-1	1
	2510	20850	20	16QAM	1	50	22.62	0-1	1
	2510	20850	20	16QAM	1	99	22.63	0-1	1
	2510	20850	20	16QAM	50	0	21.46	0-2	2
	2510	20850	20	16QAM	50	25	21.51	0-2	2
	2510	20850	20	16QAM	50	50	21.61	0-2	2
	2510	20850	20	16QAM	100	0	21.55	0-2	2
	2535.0	21100	20	QPSK	1	0	23.70	0	0
Mid	2535.0	21100	20	QPSK	1	50	23.56	0	0
	2535.0	21100	20	QPSK	1	99	23.55	0	0
	2535.0	21100	20	QPSK	50	0	22.57	0-1	1
	2535.0	21100	20	QPSK	50	25	22.63	0-1	1
	2535.0	21100	20	QPSK	50	50	22.62	0-1	1
	2535.0	21100	20	QPSK	100	0	22.59	0-1	1
	2535.0	21100	20	16QAM	1	0	22.62	0-1	1
	2535.0	21100	20	16QAM	1	50	22.63	0-1	1
	2535.0	21100	20	16QAM	1	99	22.50	0-1	1
	2535.0	21100	20	16QAM	50	0	21.44	0-2	2
	2535.0	21100	20	16QAM	50	25	21.55	0-2	2
	2535.0	21100	20	16QAM	50	50	21.54	0-2	2
	2535.0	21100	20	16QAM	100	0	21.56	0-2	2
	2560	21350	20	QPSK	1	0	23.38	0	0
	2560	21350	20	QPSK	1	50	23.40	0	0
	2560	21350	20	QPSK	1	99	23.31	0	0
High	2560	21350	20	QPSK	50	0	22.56	0-1	1
	2560	21350	20	QPSK	50	25	22.59	0-1	1
	2560	21350	20	QPSK	50	50	22.48	0-1	1
	2560	21350	20	QPSK	100	0	22.46	0-1	1
	2560	21350	20	16QAM	1	0	22.62	0-1	1
	2560	21350	20	16QAM	1	50	22.59	0-1	1
	2560	21350	20	16QAM	1	99	22.42	0-1	1
	2560	21350	20	16QAM	50	0	21.57	0-2	2
	2560	21350	20	16QAM	50	25	21.58	0-2	2
	2560	21350	20	16QAM	50	50	21.49	0-2	2
	2560	21350	20	16QAM	100	0	21.52	0-2	2

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 43 of 76

Table 9-22
LTE Band 7 Conducted Powers - 15 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	2507.5	20825	15	QPSK	1	0	23.64	0	0
	2507.5	20825	15	QPSK	1	36	23.68	0	0
	2507.5	20825	15	QPSK	1	74	23.57	0	0
	2507.5	20825	15	QPSK	36	0	22.46	0-1	1
	2507.5	20825	15	QPSK	36	18	22.41	0-1	1
	2507.5	20825	15	QPSK	36	37	22.38	0-1	1
	2507.5	20825	15	QPSK	75	0	22.40	0-1	1
	2507.5	20825	15	16QAM	1	0	22.57	0-1	1
	2507.5	20825	15	16QAM	1	36	22.49	0-1	1
	2507.5	20825	15	16QAM	1	74	22.40	0-1	1
	2507.5	20825	15	16QAM	36	0	21.49	0-2	2
	2507.5	20825	15	16QAM	36	18	21.52	0-2	2
	2507.5	20825	15	16QAM	36	37	21.40	0-2	2
	2507.5	20825	15	16QAM	75	0	21.36	0-2	2
	2535.0	21100	15	QPSK	1	0	23.41	0	0
Mid	2535.0	21100	15	QPSK	1	36	23.42	0	0
	2535.0	21100	15	QPSK	1	74	23.47	0	0
	2535.0	21100	15	QPSK	36	0	22.42	0-1	1
	2535.0	21100	15	QPSK	36	18	22.46	0-1	1
	2535.0	21100	15	QPSK	36	37	22.36	0-1	1
	2535.0	21100	15	QPSK	75	0	22.36	0-1	1
	2535.0	21100	15	16QAM	1	0	22.53	0-1	1
	2535.0	21100	15	16QAM	1	36	22.58	0-1	1
	2535.0	21100	15	16QAM	1	74	22.48	0-1	1
	2535.0	21100	15	16QAM	36	0	21.39	0-2	2
	2535.0	21100	15	16QAM	36	18	21.40	0-2	2
	2535.0	21100	15	16QAM	36	37	21.37	0-2	2
	2535.0	21100	15	16QAM	75	0	21.38	0-2	2
	2562.5	21375	15	QPSK	1	0	23.46	0	0
	2562.5	21375	15	QPSK	1	36	23.37	0	0
High	2562.5	21375	15	QPSK	1	74	23.45	0	0
	2562.5	21375	15	QPSK	36	0	22.37	0-1	1
	2562.5	21375	15	QPSK	36	18	22.30	0-1	1
	2562.5	21375	15	QPSK	36	37	22.38	0-1	1
	2562.5	21375	15	QPSK	75	0	22.33	0-1	1
	2562.5	21375	15	16QAM	1	0	22.33	0-1	1
	2562.5	21375	15	16QAM	1	36	22.31	0-1	1
	2562.5	21375	15	16QAM	1	74	22.42	0-1	1
	2562.5	21375	15	16QAM	36	0	21.42	0-2	2
	2562.5	21375	15	16QAM	36	18	21.46	0-2	2
	2562.5	21375	15	16QAM	36	37	21.42	0-2	2
	2562.5	21375	15	16QAM	75	0	21.33	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 44 of 76

Table 9-23
LTE Band 7 Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	2505	20800	10	QPSK	1	0	23.66	0	0
	2505	20800	10	QPSK	1	25	23.65	0	0
	2505	20800	10	QPSK	1	49	23.62	0	0
	2505	20800	10	QPSK	25	0	22.48	0-1	1
	2505	20800	10	QPSK	25	12	22.46	0-1	1
	2505	20800	10	QPSK	25	25	22.48	0-1	1
	2505	20800	10	QPSK	50	0	22.46	0-1	1
	2505	20800	10	16QAM	1	0	22.58	0-1	1
	2505	20800	10	16QAM	1	25	22.55	0-1	1
	2505	20800	10	16QAM	1	49	22.51	0-1	1
	2505	20800	10	16QAM	25	0	21.47	0-2	2
	2505	20800	10	16QAM	25	12	21.51	0-2	2
	2505	20800	10	16QAM	25	25	21.50	0-2	2
	2505	20800	10	16QAM	50	0	21.45	0-2	2
Mid	2535.0	21100	10	QPSK	1	0	23.55	0	0
	2535.0	21100	10	QPSK	1	25	23.49	0	0
	2535.0	21100	10	QPSK	1	49	23.51	0	0
	2535.0	21100	10	QPSK	25	0	22.49	0-1	1
	2535.0	21100	10	QPSK	25	12	22.54	0-1	1
	2535.0	21100	10	QPSK	25	25	22.49	0-1	1
	2535.0	21100	10	QPSK	50	0	22.47	0-1	1
	2535.0	21100	10	16QAM	1	0	22.57	0-1	1
	2535.0	21100	10	16QAM	1	25	22.60	0-1	1
	2535.0	21100	10	16QAM	1	49	22.49	0-1	1
	2535.0	21100	10	16QAM	25	0	21.41	0-2	2
	2535.0	21100	10	16QAM	25	12	21.47	0-2	2
	2535.0	21100	10	16QAM	25	25	21.45	0-2	2
	2535.0	21100	10	16QAM	50	0	21.47	0-2	2
High	2565	21400	10	QPSK	1	0	23.42	0	0
	2565	21400	10	QPSK	1	25	23.38	0	0
	2565	21400	10	QPSK	1	49	23.33	0	0
	2565	21400	10	QPSK	25	0	22.46	0-1	1
	2565	21400	10	QPSK	25	12	22.44	0-1	1
	2565	21400	10	QPSK	25	25	22.43	0-1	1
	2565	21400	10	QPSK	50	0	22.34	0-1	1
	2565	21400	10	16QAM	1	0	22.47	0-1	1
	2565	21400	10	16QAM	1	25	22.45	0-1	1
	2565	21400	10	16QAM	1	49	22.42	0-1	1
	2565	21400	10	16QAM	25	0	21.49	0-2	2
	2565	21400	10	16QAM	25	12	21.52	0-2	2
	2565	21400	10	16QAM	25	25	21.45	0-2	2
	2565	21400	10	16QAM	50	0	21.42	0-2	2

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 45 of 76

Table 9-24
LTE Band 7 Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	MPR Allowed per 3GPP [dB]	MPR [dB]
Low	2502.5	20775	5	QPSK	1	0	23.70	0	0
	2502.5	20775	5	QPSK	1	12	23.60	0	0
	2502.5	20775	5	QPSK	1	24	23.58	0	0
	2502.5	20775	5	QPSK	12	0	22.54	0-1	1
	2502.5	20775	5	QPSK	12	6	22.48	0-1	1
	2502.5	20775	5	QPSK	12	13	22.48	0-1	1
	2502.5	20775	5	QPSK	25	0	22.40	0-1	1
	2502.5	20775	5	16-QAM	1	0	22.64	0-1	1
	2502.5	20775	5	16-QAM	1	12	22.45	0-1	1
	2502.5	20775	5	16-QAM	1	24	22.45	0-1	1
	2502.5	20775	5	16-QAM	12	0	21.56	0-2	2
	2502.5	20775	5	16-QAM	12	6	21.49	0-2	2
	2502.5	20775	5	16-QAM	12	13	21.49	0-2	2
	2502.5	20775	5	16-QAM	25	0	21.55	0-2	2
	2535.0	21100	5	QPSK	1	0	23.64	0	0
Mid	2535.0	21100	5	QPSK	1	12	23.46	0	0
	2535.0	21100	5	QPSK	1	24	23.59	0	0
	2535.0	21100	5	QPSK	12	0	22.50	0-1	1
	2535.0	21100	5	QPSK	12	6	22.49	0-1	1
	2535.0	21100	5	QPSK	12	13	22.44	0-1	1
	2535.0	21100	5	QPSK	25	0	22.44	0-1	1
	2535.0	21100	5	16-QAM	1	0	22.62	0-1	1
	2535.0	21100	5	16-QAM	1	12	22.66	0-1	1
	2535.0	21100	5	16-QAM	1	24	22.47	0-1	1
	2535.0	21100	5	16-QAM	12	0	21.43	0-2	2
	2535.0	21100	5	16-QAM	12	6	21.41	0-2	2
	2535.0	21100	5	16-QAM	12	13	21.42	0-2	2
	2535.0	21100	5	16-QAM	25	0	21.42	0-2	2
	2567.5	21425	5	QPSK	1	0	23.47	0	0
	2567.5	21425	5	QPSK	1	12	23.47	0	0
High	2567.5	21425	5	QPSK	1	24	23.31	0	0
	2567.5	21425	5	QPSK	12	0	22.40	0-1	1
	2567.5	21425	5	QPSK	12	6	22.50	0-1	1
	2567.5	21425	5	QPSK	12	13	22.44	0-1	1
	2567.5	21425	5	QPSK	25	0	22.39	0-1	1
	2567.5	21425	5	16-QAM	1	0	22.57	0-1	1
	2567.5	21425	5	16-QAM	1	12	22.38	0-1	1
	2567.5	21425	5	16-QAM	1	24	22.38	0-1	1
	2567.5	21425	5	16-QAM	12	0	21.43	0-2	2
	2567.5	21425	5	16-QAM	12	6	21.57	0-2	2
	2567.5	21425	5	16-QAM	12	13	21.39	0-2	2
	2567.5	21425	5	16-QAM	25	0	21.41	0-2	2

9.3.6 LTE Carrier Aggregation Conducted Powers

Table 9-25
LTE Carrier Aggregation Conducted Powers – Band 12 (PCC) 5 MHz BW + Band 4 (SCC) 20 MHz BW

PCC		PCC Bandwidth [MHz]		+	SCC		SCC Bandwidth [MHz]	
LTE B12		5			LTE B4		20	
PCC Frequency [MHz]	PCC Channel	SCC Frequency [MHz]	SCC Channel		PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
713.5	23155	2132.5	2175		1	24	24.18	24.20

Table 9-26
LTE Carrier Aggregation Conducted Powers – Band 12 (PCC) 5 MHz BW + Band 2 (SCC) 20 MHz BW

PCC		PCC Bandwidth [MHz]		+	SCC		SCC Bandwidth [MHz]	
LTE B12		5			LTE B2		20	
PCC Frequency [MHz]	PCC Channel	SCC Frequency [MHz]	SCC Channel		PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
713.5	23155	1960.0	900		1	24	24.14	24.20

Table 9-27
LTE Carrier Aggregation Conducted Powers – Band 4 (PCC) 10 MHz BW + Band 12 (SCC) 10 MHz BW

PCC		PCC Bandwidth [MHz]		+	SCC		SCC Bandwidth [MHz]	
LTE B4		10			LTE 12		10	
PCC Frequency [MHz]	PCC Channel	SCC Frequency [MHz]	SCC Channel		PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
1715.0	20000	737.5	5095		1	0	24.65	24.70

FCC ID: ZNFH811		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 46 of 76	

Table 9-28

LTE Carrier Aggregation Conducted Powers – Band 4 (PCC) 10 MHz BW + Band 4 (SCC) 20 MHz BW

PCC		PCC Bandwidth [MHz]		+	SCC		SCC Bandwidth [MHz]	
LTE B4		10			LTE B4		20	
PCC Frequency [MHz]	PCC Channel	SCC Frequency [MHz]	SCC Channel		PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
1715.0	20000	2132.5	2175		1	0	24.62	24.70

Table 9-29

LTE Carrier Aggregation Conducted Powers – Band 4 (PCC) 10 MHz BW + Band 2 (SCC) 20 MHz BW

PCC		PCC Bandwidth [MHz]		+	SCC		SCC Bandwidth [MHz]	
LTE B4		10			LTE B2		20	
PCC Frequency [MHz]	PCC Channel	SCC Frequency [MHz]	SCC Channel	PCC UL# RB		PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
1715.0	20000	1960.0	900	1		0	24.64	24.70

Table 9-30

LTE Carrier Aggregation Conducted Powers – Band 2 (PCC) 20 MHz BW + Band 4 (SCC) 20 MHz BW

PCC		PCC Bandwidth [MHz]		+	SCC		SCC Bandwidth [MHz]	
LTE B2		20			LTE B4		20	
PCC Frequency [MHz]	PCC Channel	SCC Frequency [MHz]	SCC Channel		PCC UL# RB	PCC UL RB Offset	LTE Rel 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
1900.0	19100	2132.5	2175		1	0	24.20	24.20


Table 9-31

LTE Carrier Aggregation Conducted Powers – Band 2 (PCC) 20 MHz BW + Band 12 (SCC) 10 MHz BW

PCC		PCC Bandwidth [MHz]		+	SCC		SCC Bandwidth [MHz]	
LTE B2		20			LTE B12		10	
PCC Frequency [MHz]	PCC Channel	SCC Frequency [MHz]	SCC Channel		PCC UL# RB	PCC UL RB Offset	LTE Rel. 10 Tx.Power (dBm)	LTE Rel. 8 Tx.Power (dBm)
1900.0	19100	737.5	5095		1	0	24.15	24.20

Notes:

1. The device does not support all Rel. 10 Carrier Aggregation features due to modem chipset limitation.
2. The device only supports downlink Carrier Aggregation. Uplink Carrier Aggregation is not supported. Power measurements were performed with two DL carriers for the Release 8 configuration that had the highest output power (across all bandwidths, channels and RB Configurations) for each band
3. This device supports inter-band and intra-brand CA with 2 carriers (B12+B4, B12+B2, B4+B12, B4+B4, B4+B2, B2+B12, B2+B4).
4. All control and acknowledge data is sent on uplink channels that operate identical to release 8 specifications.

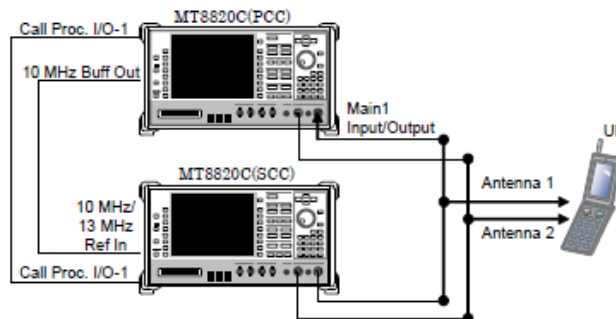Figure 9-3
Power Measurement Setup

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 47 of 76

9.4 WLAN Conducted Powers

Table 9-32
IEEE 802.11b Average RF Power

802.11b Conducted Power [dBm]			
Mode	Freq [MHz]	Channel	Data
			1
802.11b	2412	1	15.36
802.11b	2437	6	15.62
802.11b	2462	11	15.16

Table 9-33
IEEE 802.11g Average RF Power

802.11g Conducted Power [dBm]			
Mode	Freq [MHz]	Channel	Data
			6
802.11g	2412	1	14.41
802.11g	2437	6	14.53
802.11g	2462	11	14.48

Table 9-34
IEEE 802.11a Average RF Power

802.11a Conducted Power [dBm]			
Mode	Freq [MHz]	Channel	Data Rate [Mbps]
			6
802.11a	5180	36	11.13
802.11a	5200	40	11.04
802.11a	5220	44	10.78
802.11a	5240	48	11.00
802.11a	5260	52	11.30
802.11a	5280	56	11.15
802.11a	5300	60	11.14
802.11a	5320	64	11.13
802.11a	5500	100	10.66
802.11a	5580	116	10.03
802.11a	5660	132	10.85
802.11a	5720	144	10.04
802.11a	5745	149	10.14
802.11a	5785	157	10.33
802.11a	5825	165	10.70

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 48 of 76

Justification for test configurations for WLAN per KDB Publication 248227 D01 802.11 WIFI SAR v02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

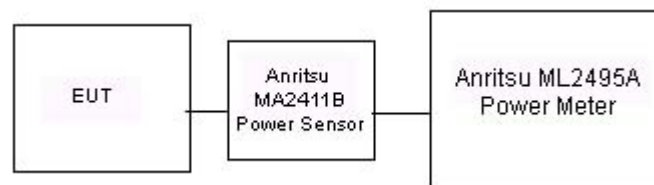


Figure 9-4
Power Measurement Setup for Bandwidths < 50 MHz

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 49 of 76

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
04/20/2015	750H	21.5	695	0.855	41.889	0.889	42.227	-3.82%	-0.80%
			710	0.875	41.608	0.890	42.149	-1.69%	-1.28%
			725	0.885	41.310	0.891	42.071	-0.67%	-1.81%
			740	0.898	41.256	0.893	41.994	0.56%	-1.76%
			755	0.918	41.043	0.894	41.916	2.68%	-2.08%
04/14/2015	835H	22.1	820	0.900	41.764	0.899	41.578	0.11%	0.45%
			835	0.915	41.580	0.900	41.500	1.67%	0.19%
			850	0.929	41.394	0.916	41.500	1.42%	-0.26%
04/14/2015	1750H	21.6	1710	1.353	39.586	1.348	40.142	0.37%	-1.39%
			1750	1.393	39.443	1.371	40.079	1.60%	-1.59%
			1790	1.431	39.231	1.394	40.016	2.65%	-1.96%
04/13/2015	1900H	21.8	1850	1.375	39.012	1.400	40.000	-1.79%	-2.47%
			1880	1.406	38.879	1.400	40.000	0.43%	-2.80%
			1910	1.437	38.731	1.400	40.000	2.64%	-3.17%
04/20/2015	1900H	22.0	1850	1.406	41.332	1.400	40.000	0.43%	3.33%
			1880	1.434	41.262	1.400	40.000	2.43%	3.16%
			1910	1.466	41.059	1.400	40.000	4.71%	2.65%
04/15/2015	2450H	22.7	2401	1.764	38.238	1.756	39.287	0.46%	-2.67%
			2450	1.821	38.065	1.800	39.200	1.17%	-2.90%
			2499	1.870	37.875	1.853	39.138	0.92%	-3.23%
04/20/2015	2600H	22.0	2500	1.877	37.954	1.855	39.136	1.19%	-3.02%
			2550	1.931	37.754	1.909	39.073	1.15%	-3.38%
			2600	1.987	37.570	1.964	39.009	1.17%	-3.69%
04/20/2015	5200H-5800H	22.8	5260	4.534	35.874	4.717	35.917	-3.88%	-0.12%
			5300	4.581	35.811	4.758	35.871	-3.72%	-0.17%
			5600	4.898	35.371	5.065	35.529	-3.30%	-0.44%
			5660	4.951	35.281	5.127	35.460	-3.43%	-0.50%
			5800	5.101	35.064	5.270	35.300	-3.21%	-0.67%
			5825	5.120	35.048	5.296	35.271	-3.32%	-0.63%
			5825	5.120	35.048	5.296	35.271	-3.32%	-0.63%
04/15/2015	750B	21.8	695	0.919	55.219	0.959	55.745	-4.17%	-0.94%
			710	0.934	55.036	0.960	55.687	-2.71%	-1.17%
			725	0.947	54.896	0.961	55.629	-1.46%	-1.32%
			740	0.962	54.724	0.963	55.570	-0.10%	-1.52%
			755	0.975	54.539	0.964	55.512	1.14%	-1.75%
04/14/2015	835B	22.9	820	0.981	54.076	0.969	55.258	1.24%	-2.14%
			835	0.996	53.917	0.970	55.200	2.68%	-2.32%
			850	1.011	53.765	0.988	55.154	2.33%	-2.52%
04/20/2015	835B	22.0	820	0.979	53.874	0.969	55.258	1.03%	-2.50%
			835	0.996	53.694	0.970	55.200	2.68%	-2.73%
			850	1.009	53.530	0.988	55.154	2.13%	-2.94%
04/20/2015	1750B	22.3	1710	1.427	52.930	1.463	53.537	-2.46%	-1.13%
			1750	1.468	52.838	1.488	53.432	-1.34%	-1.11%
			1790	1.520	52.556	1.514	53.326	0.40%	-1.44%
04/13/2015	1900B	22.0	1850	1.469	52.464	1.520	53.300	-3.36%	-1.57%
			1880	1.502	52.342	1.520	53.300	-1.18%	-1.80%
			1910	1.539	52.231	1.520	53.300	1.25%	-2.01%
04/20/2015	1900B	21.8	1850	1.476	52.645	1.520	53.300	-2.89%	-1.23%
			1880	1.514	52.553	1.520	53.300	-0.39%	-1.40%
			1910	1.550	52.428	1.520	53.300	1.97%	-1.64%
04/20/2015	2450B	22.5	2401	1.976	50.935	1.903	52.765	3.84%	-3.47%
			2450	2.041	50.778	1.950	52.700	4.67%	-3.65%
			2499	2.107	50.579	2.019	52.638	4.36%	-3.91%
04/20/2015	2600B	22.5	2500	2.108	50.580	2.021	52.636	4.30%	-3.91%
			2550	2.186	50.416	2.092	52.573	4.49%	-4.10%
			2600	2.250	50.245	2.163	52.509	4.02%	-4.31%
04/13/2015	5200B-5800B	22.8	5260	5.404	47.002	5.369	48.933	0.65%	-3.95%
			5300	5.464	46.965	5.416	48.879	0.89%	-3.92%
			5600	5.857	46.428	5.766	48.471	1.58%	-4.21%
			5660	5.940	46.380	5.837	48.390	1.76%	-4.15%
			5800	6.122	46.189	6.000	48.200	2.03%	-4.17%
			5825	6.152	46.157	6.029	48.166	2.04%	-4.17%
			5825	6.152	46.157	6.029	48.166	2.04%	-4.17%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 50 of 76

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-2
System Verification Results 1 g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
G	750	HEAD	04/20/2015	22.3	21.5	0.100	1054	3318	0.816	8.280	8.160	-1.45%
C	835	HEAD	04/14/2015	21.3	22.1	0.100	4d132	3333	0.986	9.250	9.860	6.59%
B	1750	HEAD	04/14/2015	22.7	22.1	0.100	1008	3334	3.840	36.900	38.400	4.07%
J	1900	HEAD	04/13/2015	21.9	21.8	0.100	5d149	3022	4.300	40.200	43.000	6.97%
K	1900	HEAD	04/20/2015	23.1	22.0	0.100	5d149	3288	4.010	40.200	40.100	-0.25%
H	2450	HEAD	04/15/2015	21.1	22.7	0.100	719	3258	5.570	52.100	55.700	6.91%
H	2600	HEAD	04/20/2015	22.7	22.0	0.100	1071	3258	5.990	57.500	59.900	4.17%
A	5300	HEAD	04/20/2015	22.9	21.7	0.050	1191	3914	4.090	85.800	81.800	-4.66%
A	5600	HEAD	04/20/2015	22.9	21.7	0.050	1191	3914	4.140	86.900	82.800	-4.72%
A	5800	HEAD	04/20/2015	22.9	21.7	0.050	1191	3914	3.970	82.300	79.400	-3.52%
E	750	BODY	04/15/2015	22.1	21.9	0.100	1054	3332	0.857	8.530	8.570	0.47%
D	835	BODY	04/14/2015	23.6	22.9	0.100	4d133	3209	1.010	9.350	10.100	8.02%
D	835	BODY	04/20/2015	22.5	22.0	0.100	4d133	3209	1.020	9.350	10.200	9.09%
J	1750	BODY	04/20/2015	23.0	22.1	0.100	1008	3022	3.720	37.600	37.200	-1.06%
K	1900	BODY	04/13/2015	22.9	22.0	0.100	5d149	3288	4.210	40.400	42.100	4.21%
K	1900	BODY	04/20/2015	22.9	21.8	0.100	5d149	3288	4.040	40.400	40.400	0.00%
B	2450	BODY	04/20/2015	23.4	22.5	0.100	882	3334	5.440	50.700	54.400	7.30%
B	2600	BODY	04/20/2015	23.4	22.5	0.100	1071	3334	6.070	56.900	60.700	6.68%
A	5300	BODY	04/13/2015	24.0	22.0	0.050	1191	3914	3.920	79.900	78.400	-1.88%
A	5600	BODY	04/13/2015	24.3	22.3	0.050	1191	3914	3.920	84.100	78.400	-6.78%
A	5800	BODY	04/13/2015	24.3	22.3	0.050	1191	3914	3.860	78.000	77.200	-1.03%

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 51 of 76

Table 10-3
System Verification Results 10 g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
A	5300	BODY	04/13/2015	24.0	22.0	0.050	1191	3914	1.080	22.300	21.600	-3.14%
A	5600	BODY	04/13/2015	24.3	22.3	0.050	1191	3914	1.070	23.300	21.400	-8.15%

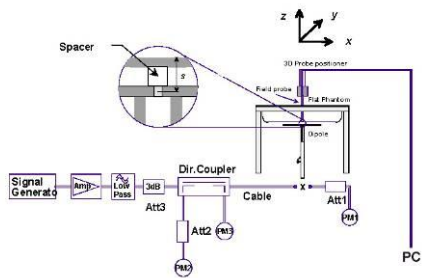


Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 52 of 76	

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

Table 11-1
GSM 850 Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.7	33.17	-0.02	Right	Cheek	Standard	1VUA8	1	1:8.3	0.504	1.130	0.570	
836.60	190	GSM 850	GSM	33.7	33.17	0.00	Right	Cheek	Quick Cover (Open)	1VUA8	1	1:8.3	0.547	1.130	0.618	
836.60	190	GSM 850	GSM	33.7	33.17	-0.02	Right	Cheek	Quick Cover (Closed)	1VUA8	1	1:8.3	0.485	1.130	0.548	
836.60	190	GSM 850	GSM	33.7	33.17	-0.04	Right	Tilt	Standard	1VUA8	1	1:8.3	0.309	1.130	0.349	
836.60	190	GSM 850	GSM	33.7	33.17	0.03	Left	Cheek	Standard	1VUA8	1	1:8.3	0.377	1.130	0.426	
836.60	190	GSM 850	GSM	33.7	33.17	-0.01	Left	Tilt	Standard	1VUA8	1	1:8.3	0.267	1.130	0.302	
836.60	190	GSM 850	GPRS	30.0	29.43	0.10	Right	Cheek	Standard	1VUA8	3	1:2.76	0.565	1.140	0.644	
836.60	190	GSM 850	GPRS	30.0	29.43	-0.10	Right	Cheek	Quick Cover (Open)	1VUA8	3	1:2.76	0.580	1.140	0.661	
836.60	190	GSM 850	GPRS	30.0	29.43	0.00	Right	Cheek	Quick Cover (Closed)	1VUA8	3	1:2.76	0.583	1.140	0.665	A1
836.60	190	GSM 850	GPRS	30.0	29.43	-0.02	Right	Tilt	Standard	1VUA8	3	1:2.76	0.303	1.140	0.345	
836.60	190	GSM 850	GPRS	30.0	29.43	-0.06	Left	Cheek	Standard	1VUA8	3	1:2.76	0.387	1.140	0.441	
836.60	190	GSM 850	GPRS	30.0	29.43	-0.05	Left	Tilt	Standard	1VUA8	3	1:2.76	0.244	1.140	0.278	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11-2
UMTS 850 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #
MHz	Ch.														
836.60	4183	UMTS 850	RMC	24.2	24.01	0.01	Right	Cheek	Standard	1VUC9	1:1	0.480	1.045	0.502	
836.60	4183	UMTS 850	RMC	24.2	24.01	0.02	Right	Cheek	Quick Cover (Open)	1VUC9	1:1	0.497	1.045	0.519	A2
836.60	4183	UMTS 850	RMC	24.2	24.01	0.06	Right	Cheek	Quick Cover (Closed)	1VUC9	1:1	0.451	1.045	0.471	
836.60	4183	UMTS 850	RMC	24.2	24.01	-0.03	Right	Tilt	Standard	1VUC9	1:1	0.287	1.045	0.300	
836.60	4183	UMTS 850	RMC	24.2	24.01	-0.08	Left	Cheek	Standard	1VUC9	1:1	0.357	1.045	0.373	
836.60	4183	UMTS 850	RMC	24.2	24.01	0.03	Left	Tilt	Standard	1VUC9	1:1	0.286	1.045	0.299	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-3
UMTS 1750 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #
MHz	Ch.														
1732.40	1412	UMTS 1750	RMC	24.7	24.23	0.04	Right	Cheek	Standard	1VUC9	1:1	0.278	1.114	0.310	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	0.18	Right	Tilt	Standard	1VUC9	1:1	0.287	1.114	0.320	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	-0.04	Left	Cheek	Standard	1VUC9	1:1	0.604	1.114	0.673	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	-0.02	Left	Cheek	Quick Cover (Open)	1VUC9	1:1	0.785	1.114	0.874	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	-0.03	Left	Cheek	Quick Cover (Closed)	1VUC9	1:1	0.942	1.114	1.049	A3
1732.40	1412	UMTS 1750	RMC	24.7	24.23	0.00	Left	Tilt	Standard	1VUC9	1:1	0.311	1.114	0.346	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	-0.16	Left	Cheek	Quick Cover (Closed)	1VUC9	1:1	0.866	1.114	0.965	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFH811			SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15		DUT Type: Portable Handset		Page 53 of 76	

Table 11-4
GSM 1900 Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.2	29.93	-0.02	Right	Cheek	Standard	1VUC9	1	1:8.3	0.148	1.064	0.157	
1880.00	661	GSM 1900	GSM	30.2	29.93	-0.03	Right	Tilt	Standard	1VUC9	1	1:8.3	0.135	1.064	0.144	
1880.00	661	GSM 1900	GSM	30.2	29.93	-0.08	Left	Cheek	Standard	1VUC9	1	1:8.3	0.309	1.064	0.329	
1880.00	661	GSM 1900	GSM	30.2	29.93	-0.09	Left	Cheek	Quick Cover (Open)	1VUC9	1	1:8.3	0.352	1.064	0.375	
1880.00	661	GSM 1900	GSM	30.2	29.93	-0.12	Left	Cheek	Quick Cover (Closed)	1VUC9	1	1:8.3	0.329	1.064	0.350	
1880.00	661	GSM 1900	GSM	30.2	29.93	0.06	Left	Tilt	Standard	1VUC9	1	1:8.3	0.137	1.064	0.146	
1880.00	661	GSM 1900	GPRS	27.2	26.68	-0.03	Right	Cheek	Standard	1VUC9	3	1:2.76	0.214	1.127	0.241	
1880.00	661	GSM 1900	GPRS	27.2	26.68	-0.03	Right	Tilt	Standard	1VUC9	3	1:2.76	0.189	1.127	0.213	
1880.00	661	GSM 1900	GPRS	27.2	26.68	-0.04	Left	Cheek	Standard	1VUC9	3	1:2.76	0.321	1.127	0.362	
1880.00	661	GSM 1900	GPRS	27.2	26.68	-0.03	Left	Cheek	Quick Cover (Open)	1VUC9	3	1:2.76	0.517	1.127	0.583	A4
1880.00	661	GSM 1900	GPRS	27.2	26.68	-0.19	Left	Cheek	Quick Cover (Closed)	1VUC9	3	1:2.76	0.443	1.127	0.499	
1880.00	661	GSM 1900	GPRS	27.2	26.68	0.18	Left	Tilt	Standard	1VUC9	3	1:2.76	0.199	1.127	0.224	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-5
UMTS 1900 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.2	24.02	-0.07	Right	Cheek	Standard	1VUC9	1:1	0.509	1.042	0.530	
1880.00	9400	UMTS 1900	RMC	24.2	24.02	0.02	Right	Tilt	Standard	1VUC9	1:1	0.386	1.042	0.402	
1852.40	9262	UMTS 1900	RMC	24.2	24.19	-0.11	Left	Cheek	Standard	1VUC9	1:1	0.671	1.002	0.672	
1880.00	9400	UMTS 1900	RMC	24.2	24.02	0.09	Left	Cheek	Standard	1VUC9	1:1	0.929	1.042	0.968	
1880.00	9400	UMTS 1900	RMC	24.2	24.02	-0.07	Left	Cheek	Quick Cover (Open)	1VUC9	1:1	1.000	1.042	1.042	A5
1880.00	9400	UMTS 1900	RMC	24.2	24.02	-0.03	Left	Cheek	Quick Cover (Closed)	1VUC9	1:1	0.961	1.042	1.001	
1907.60	9538	UMTS 1900	RMC	24.2	23.71	-0.06	Left	Cheek	Standard	1VUC9	1:1	0.715	1.119	0.800	
1880.00	9400	UMTS 1900	RMC	24.2	24.02	0.12	Left	Tilt	Standard	1VUC9	1:1	0.452	1.042	0.471	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11-6
LTE Band 12 Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR [1g]	Scaling Factor	Scaled SAR [1g]	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	-0.02	0	Right	Cheek	QPSK	1	0	1VUHU	1:1	0.322	1.021	0.329	A6
707.50	23095	Mid	LTE Band 12	10	Quick Cover (Open)	24.2	24.11	-0.17	0	Right	Cheek	QPSK	1	0	1VUHU	1:1	0.284	1.021	0.290	
707.50	23095	Mid	LTE Band 12	10	Quick Cover (Closed)	24.2	24.11	-0.16	0	Right	Cheek	QPSK	1	0	1VUHU	1:1	0.282	1.021	0.288	
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	0.01	1	Right	Cheek	QPSK	25	0	1VUHU	1:1	0.250	1.054	0.264	
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	0.02	0	Right	Tilt	QPSK	1	0	1VUHU	1:1	0.142	1.021	0.145	
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	0.11	1	Right	Tilt	QPSK	25	0	1VUHU	1:1	0.116	1.054	0.122	
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	-0.10	0	Left	Cheek	QPSK	1	0	1VUHU	1:1	0.239	1.021	0.244	
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	0.00	1	Left	Cheek	QPSK	25	0	1VUHU	1:1	0.197	1.054	0.208	
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	0.09	0	Left	Tilt	QPSK	1	0	1VUHU	1:1	0.153	1.021	0.156	
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	0.10	1	Left	Tilt	QPSK	25	0	1VUHU	1:1	0.123	1.054	0.130	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Head										
Spatial Peak										1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population										averaged over 1 gram										

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 54 of 76

Table 11-7
LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	0.01	0	Right	Cheek	QPSK	1	0	1VUHU	1:1	0.462	1.047	0.484	A7
836.50	20525	Mid	LTE Band 5 (Cell)	10	Quick Cover (Open)	24.2	24.00	-0.06	0	Right	Cheek	QPSK	1	0	1VUHU	1:1	0.427	1.047	0.447	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Quick Cover (Closed)	24.2	24.00	-0.07	0	Right	Cheek	QPSK	1	0	1VUHU	1:1	0.433	1.047	0.453	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	0.00	1	Right	Cheek	QPSK	25	12	1VUHU	1:1	0.373	1.059	0.395	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	0.07	0	Right	Tilt	QPSK	1	0	1VUHU	1:1	0.261	1.047	0.273	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	-0.02	1	Right	Tilt	QPSK	25	12	1VUHU	1:1	0.206	1.059	0.218	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	0.00	0	Left	Cheek	QPSK	1	0	1VUHU	1:1	0.353	1.047	0.370	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	0.01	1	Left	Cheek	QPSK	25	12	1VUHU	1:1	0.276	1.059	0.292	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	-0.04	0	Left	Tilt	QPSK	1	0	1VUHU	1:1	0.260	1.047	0.272	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	-0.01	1	Left	Tilt	QPSK	25	12	1VUHU	1:1	0.203	1.059	0.215	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-8
LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.59	0.12	0	Right	Cheek	QPSK	1	50	1VUHU	1:1	0.331	1.026	0.340	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.58	0.00	1	Right	Cheek	QPSK	50	50	1VUHU	1:1	0.267	1.028	0.274	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.59	0.10	0	Right	Tilt	QPSK	1	50	1VUHU	1:1	0.310	1.026	0.318	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.58	0.06	1	Right	Tilt	QPSK	50	50	1VUHU	1:1	0.252	1.028	0.259	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.59	0.06	0	Left	Cheek	QPSK	1	50	1VUHU	1:1	0.766	1.026	0.786	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Quick Cover (Open)	24.7	24.59	0.02	0	Left	Cheek	QPSK	1	50	1VUHU	1:1	0.930	1.026	0.954	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Quick Cover (Closed)	24.7	24.59	-0.10	0	Left	Cheek	QPSK	1	50	1VUHU	1:1	0.937	1.026	0.961	A8
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.58	0.01	1	Left	Cheek	QPSK	50	50	1VUHU	1:1	0.634	1.028	0.652	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.59	-0.03	0	Left	Tilt	QPSK	1	50	1VUHU	1:1	0.345	1.026	0.354	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.58	0.02	1	Left	Tilt	QPSK	50	50	1VUHU	1:1	0.285	1.028	0.293	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-9
LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.	(W/kg)															(W/kg)			
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	24.20	-0.04	0	Right	Cheek	QPSK	1	0	1VUBN	1:1	0.501	1.000	0.501	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.10	0.04	1	Right	Cheek	QPSK	50	25	1VUBN	1:1	0.364	1.023	0.372	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.08	0	Right	Tilt	QPSK	1	0	1VUBN	1:1	0.375	1.000	0.375	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.10	-0.05	1	Right	Tilt	QPSK	50	25	1VUBN	1:1	0.295	1.023	0.302	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.01	-0.06	0	Left	Cheek	QPSK	1	0	1VUBN	1:1	0.865	1.045	0.904	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	Standard	24.2	24.19	0.00	0	Left	Cheek	QPSK	1	0	1VUBN	1:1	0.960	1.002	0.962	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	Quick Cover (Open)	24.2	24.19	-0.14	0	Left	Cheek	QPSK	1	0	1VUBN	1:1	1.080	1.002	1.082	A9
1880.00	18900	Mid	LTE Band 2 (PCS)	20	Quick Cover (Closed)	24.2	24.19	0.03	0	Left	Cheek	QPSK	1	0	1VUBN	1:1	1.050	1.002	1.052	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	24.20	-0.10	0	Left	Cheek	QPSK	1	0	1VUBN	1:1	0.958	1.000	0.958	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.10	0.07	1	Left	Cheek	QPSK	50	25	1VUBN	1:1	0.754	1.023	0.771	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.09	-0.03	1	Left	Cheek	QPSK	100	0	1VUBN	1:1	0.787	1.026	0.807	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	24.20	-0.03	0	Left	Tilt	QPSK	1	0	1VUBN	1:1	0.375	1.000	0.375	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.10	-0.07	1	Left	Tilt	QPSK	50	25	1VUBN	1:1	0.288	1.023	0.295	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	Quick Cover (Open)	24.2	24.19	0.19	0	Left	Cheek	QPSK	1	0	1VUBN	1:1	1.050	1.002	1.052	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 55 of 76

Table 11-10
LTE Band 7 Head SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.70	0.15	0	Right	Cheek	QPSK	1	0	1VUHU	1.1	0.231	1.000	0.231	A10
2535.00	21100	Mid	LTE Band 7	20	Standard	22.7	22.63	0.16	1	Right	Cheek	QPSK	50	25	1VUHU	1.1	0.164	1.016	0.167	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.70	-0.04	0	Right	Tilt	QPSK	1	0	1VUHU	1.1	0.287	1.000	0.287	
2535.00	21100	Mid	LTE Band 7	20	Standard	22.7	22.63	0.11	1	Right	Tilt	QPSK	50	25	1VUHU	1.1	0.200	1.016	0.203	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.70	0.03	0	Left	Cheek	QPSK	1	0	1VUHU	1.1	0.500	1.000	0.500	
2535.00	21100	Mid	LTE Band 7	20	Quick Cover (Open)	23.7	23.70	-0.02	0	Left	Cheek	QPSK	1	0	1VUHU	1.1	0.486	1.000	0.486	
2535.00	21100	Mid	LTE Band 7	20	Quick Cover (Closed)	23.7	23.70	0.02	0	Left	Cheek	QPSK	1	0	1VUHU	1.1	0.464	1.000	0.464	
2535.00	21100	Mid	LTE Band 7	20	Standard	22.7	22.63	0.03	1	Left	Cheek	QPSK	50	25	1VUHU	1.1	0.359	1.016	0.365	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.70	0.02	0	Left	Tilt	QPSK	1	0	1VUHU	1.1	0.178	1.000	0.178	
2535.00	21100	Mid	LTE Band 7	20	Standard	22.7	22.63	0.14	1	Left	Tilt	QPSK	50	25	1VUHU	1.1	0.129	1.016	0.131	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-11
DTS Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(Power)	(Duty Cycle)	(W/kg)	
2437	6	802.11b	DSSS	22	16.0	15.62	-	Right	Cheek	Standard	1VUDS	1	99.2	0.255	-	1.091	1.008	-	
2437	6	802.11b	DSSS	22	16.0	15.62	-	Right	Tilt	Standard	1VUDS	1	99.2	0.276	-	1.091	1.008	-	
2437	6	802.11b	DSSS	22	16.0	15.62	-	Left	Cheek	Standard	1VUDS	1	99.2	0.328	-	1.091	1.008	-	
2437	6	802.11b	DSSS	22	16.0	15.62	0.02	Left	Tilt	Standard	1VUDS	1	99.2	0.375	0.338	1.091	1.008	0.372	A11
2437	6	802.11b	DSSS	22	16.0	15.62	0.14	Left	Tilt	Quick Cover (Open)	1VUDS	1	99.2	0.384	0.335	1.091	1.008	0.368	
2437	6	802.11b	DSSS	22	16.0	15.62	0.03	Left	Tilt	Quick Cover (Closed)	1VUDS	1	99.2	0.274	0.251	1.091	1.008	0.276	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-12
NII Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Cover Type	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g) (W/kg)	Plot #
MHz	Ch.													W/kg	(W/kg)				
5260	52	802.11a	OFDM	20	12.0	11.30	-	Right	Cheek	Standard	1VUDS	6	95.4	0.606	-	1.175	1.048	-	
5260	52	802.11a	OFDM	20	12.0	11.30	-	Right	Tilt	Standard	1VUDS	6	95.4	0.652	-	1.175	1.048	-	
5260	52	802.11a	OFDM	20	12.0	11.30	-0.06	Left	Cheek	Standard	1VUDS	6	95.4	0.756	0.311	1.175	1.048	0.383	A12
5260	52	802.11a	OFDM	20	12.0	11.30	-0.12	Left	Cheek	Quick Cover (Open)	1VUDS	6	95.4	0.537	0.260	1.175	1.048	0.321	
5260	52	802.11a	OFDM	20	12.0	11.30	0.00	Left	Cheek	Quick Cover (Closed)	1VUDS	6	95.4	0.434	0.212	1.175	1.048	0.261	
5260	52	802.11a	OFDM	20	12.0	11.30	-	Left	Tilt	Standard	1VUDS	6	95.4	0.657	-	1.175	1.048	-	
5660	132	802.11a	OFDM	20	12.0	10.85	-	Right	Cheek	Standard	1VUDS	6	95.4	0.363	-	1.303	1.048	-	
5660	132	802.11a	OFDM	20	12.0	10.85	0.10	Right	Tilt	Standard	1VUDS	6	95.4	0.467	0.186	1.303	1.048	0.254	
5660	132	802.11a	OFDM	20	12.0	10.85	-	Left	Cheek	Standard	1VUDS	6	95.4	0.393	-	1.303	1.048	-	
5660	132	802.11a	OFDM	20	12.0	10.85	-	Left	Tilt	Standard	1VUDS	6	95.4	0.454	-	1.303	1.048	-	
5825	165	802.11a	OFDM	20	12.0	10.70	-	Right	Cheek	Standard	1VUDS	6	95.4	0.363	-	1.349	1.048	-	
5825	165	802.11a	OFDM	20	12.0	10.70	-	Right	Tilt	Standard	1VUDS	6	95.4	0.427	-	1.349	1.048	-	
5825	165	802.11a	OFDM	20	12.0	10.70	-	Left	Cheek	Standard	1VUDS	6	95.4	0.357	-	1.349	1.048	-	
5825	165	802.11a	OFDM	20	12.0	10.70	0.04	Left	Tilt	Standard	1VUDS	6	95.4	0.431	0.136	1.349	1.048	0.192	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 56 of 76

11.2 Standalone Body-Worn SAR Data

Table 11-13
GSM/UMTS Body-Worn SAR Data

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
824.20	128	GSM 850	GSM	33.7	33.06	0.02	10 mm	Standard	1VJA8	1	1.8.3	back	0.700	1.159	0.811	
836.60	190	GSM 850	GSM	33.7	33.17	0.01	10 mm	Standard	1VJA8	1	1.8.3	back	0.749	1.130	0.846	
836.60	190	GSM 850	GSM	33.7	33.17	-0.02	10 mm	Quick Cover (Closed)	1VJA8	1	1.8.3	back	0.568	1.130	0.642	
848.80	251	GSM 850	GSM	33.7	33.28	-0.03	10 mm	Standard	1VJA8	1	1.8.3	back	0.701	1.102	0.773	
824.20	128	GSM 850	GPRS	30.0	29.26	0.03	10 mm	Standard	1VJA8	3	1.2.76	back	0.807	1.186	0.957	
836.60	190	GSM 850	GPRS	30.0	29.43	-0.03	10 mm	Standard	1VJA8	3	1.2.76	back	0.846	1.140	0.964	
836.60	190	GSM 850	GPRS	30.0	29.43	0.00	10 mm	Quick Cover (Closed)	1VJA8	3	1.2.76	back	0.756	1.140	0.862	
848.80	251	GSM 850	GPRS	30.0	29.41	-0.01	10 mm	Standard	1VJA8	3	1.2.76	back	0.784	1.146	0.898	
836.60	190	GSM 850	GPRS	30.0	29.43	-0.05	10 mm	Standard	1VJA8	3	1.2.76	back	0.857	1.140	0.977	A13
836.60	4183	UMTS 850	RMC	24.2	24.01	0.05	10 mm	Standard	1VUC9	N/A	1:1	back	0.648	1.045	0.677	A14
836.60	4183	UMTS 850	RMC	24.2	24.01	0.07	10 mm	Quick Cover (Closed)	1VUC9	N/A	1:1	back	0.520	1.045	0.543	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	-0.04	10 mm	Standard	1VUC9	N/A	1:1	back	0.522	1.114	0.582	A15
1732.40	1412	UMTS 1750	RMC	24.7	24.23	-0.04	10 mm	Quick Cover (Closed)	1VUC9	N/A	1:1	back	0.451	1.114	0.502	
1880.00	661	GSM 1900	GSM	30.2	29.93	-0.08	10 mm	Standard	1VUC9	1	1.8.3	back	0.213	1.064	0.227	
1880.00	661	GSM 1900	GSM	30.2	29.93	0.05	10 mm	Quick Cover (Closed)	1VUC9	1	1.8.3	back	0.219	1.064	0.233	
1880.00	661	GSM 1900	GPRS	27.2	26.68	0.01	10 mm	Standard	1VUC9	3	1.2.76	back	0.273	1.127	0.308	
1880.00	661	GSM 1900	GPRS	27.2	26.68	0.11	10 mm	Quick Cover (Closed)	1VUC9	3	1.2.76	back	0.326	1.127	0.367	A17
1880.00	9400	UMTS 1900	RMC	24.2	24.02	-0.03	10 mm	Standard	1VUC9	N/A	1:1	back	0.614	1.042	0.640	A19
1880.00	9400	UMTS 1900	RMC	24.2	24.02	-0.09	10 mm	Quick Cover (Closed)	1VUC9	N/A	1:1	back	0.562	1.042	0.586	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-14
LTE Body-Worn SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	0.05	0	1VJBN	QPSK	1	0	10 mm	back	1:1	0.365	1.021	0.373	A21
707.50	23095	Mid	LTE Band 12	10	Quick Cover (Closed)	24.2	24.11	-0.02	0	1VJBN	QPSK	1	0	10 mm	back	1:1	0.324	1.021	0.331	
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	-0.10	1	1VJBN	QPSK	25	0	10 mm	back	1:1	0.292	1.054	0.308	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	0.00	0	1VJBN	QPSK	1	0	10 mm	back	1:1	0.654	1.047	0.685	A23
836.50	20525	Mid	LTE Band 5 (Cell)	10	Quick Cover (Closed)	24.2	24.00	-0.04	0	1VJBN	QPSK	1	0	10 mm	back	1:1	0.562	1.047	0.588	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	-0.01	1	1VJBN	QPSK	25	12	10 mm	back	1:1	0.536	1.059	0.568	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.59	-0.06	0	1VJHU	QPSK	1	50	10 mm	back	1:1	0.559	1.026	0.574	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Quick Cover (Closed)	24.7	24.59	0.09	0	1VJHU	QPSK	1	50	10 mm	back	1:1	0.571	1.026	0.586	A24
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.58	0.00	1	1VJHU	QPSK	50	50	10 mm	back	1:1	0.449	1.028	0.462	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.01	0	1VJBN	QPSK	1	0	10 mm	back	1:1	0.562	1.000	0.562	A26
1900.00	19100	High	LTE Band 2 (PCS)	20	Quick Cover (Closed)	24.2	24.20	0.02	0	1VJBN	QPSK	1	0	10 mm	back	1:1	0.550	1.000	0.550	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.10	0.00	1	1VJBN	QPSK	50	25	10 mm	back	1:1	0.442	1.023	0.452	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.70	0.17	0	1VJHU	QPSK	1	0	10 mm	back	1:1	0.366	1.000	0.366	
2535.00	21100	Mid	LTE Band 7	20	Quick Cover (Closed)	23.7	23.70	-0.11	0	1VJHU	QPSK	1	0	10 mm	back	1:1	0.404	1.000	0.404	A28
2535.00	21100	Mid	LTE Band 7	20	Standard	22.7	22.63	0.07	1	1VJHU	QPSK	50	25	10 mm	back	1:1	0.260	1.016	0.264	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body										
Spatial Peak										1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population										averaged over 1 gram										

FCC ID: ZNFH811			SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 57 of 76		

**Table 11-15
DTS Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.														W/kg	(W/kg)	(W/kg)			
2437	6	802.11b	DSSS	22	16.0	15.62	-0.04	10 mm	1	Standard	1VUDS	1	back	99.2	0.174	0.155	1.091	1.008	0.170	
2437	6	802.11b	DSSS	22	16.0	15.62	-0.01	10 mm	1	Quick Cover (Closed)	1VUDS	1	back	99.2	0.181	0.167	1.091	1.008	0.183	A30
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram												

**Table 11-16
NII Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)		(W/kg)		
5260	52	802.11a	OFDM	20	12.0	11.30	0.18	10 mm	Standard	1VUDS	6	back	95.4	0.347	0.180	1.175	1.048	0.222	A31
5260	52	802.11a	OFDM	20	12.0	11.30	0.02	10 mm	Quick Cover (Closed)	1VUDS	6	back	95.4	0.302	0.166	1.175	1.048	0.204	
5660	132	802.11a	OFDM	20	12.0	10.85	-0.05	10 mm	Standard	1VUDS	6	back	95.4	0.209	0.106	1.303	1.048	0.145	
5825	165	802.11a	OFDM	20	12.0	10.70	0.09	10 mm	Standard	1VUDS	6	back	95.4	0.111	0.055	1.349	1.048	0.078	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 58 of 76

11.3 Standalone Wireless Router SAR Data

Table 11-17
GPRS/UMTS Hotspot SAR Data

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
824.20	128	GSM 850	GPRS	30.0	29.26	0.03	10 mm	Standard	1VUA8	3	1:2.76	back	0.807	1.186	0.957	
836.60	190	GSM 850	GPRS	30.0	29.43	-0.03	10 mm	Standard	1VUA8	3	1:2.76	back	0.846	1.140	0.964	
836.60	190	GSM 850	GPRS	30.0	29.43	0.00	10 mm	Quick Cover (Closed)	1VUA8	3	1:2.76	back	0.756	1.140	0.862	
848.80	251	GSM 850	GPRS	30.0	29.41	-0.01	10 mm	Standard	1VUA8	3	1:2.76	back	0.784	1.146	0.898	
824.20	128	GSM 850	GPRS	30.0	29.26	-0.02	10 mm	Standard	1VUA8	3	1:2.76	front	0.699	1.186	0.829	
836.60	190	GSM 850	GPRS	30.0	29.43	-0.01	10 mm	Standard	1VUA8	3	1:2.76	front	0.742	1.140	0.846	
848.80	251	GSM 850	GPRS	30.0	29.41	-0.14	10 mm	Standard	1VUA8	3	1:2.76	front	0.726	1.146	0.832	
836.60	190	GSM 850	GPRS	30.0	29.43	0.06	10 mm	Standard	1VUA8	3	1:2.76	bottom	0.671	1.140	0.765	
824.20	128	GSM 850	GPRS	30.0	29.26	-0.03	10 mm	Standard	1VUA8	3	1:2.76	right	0.674	1.186	0.799	
836.60	190	GSM 850	GPRS	30.0	29.43	-0.07	10 mm	Standard	1VUA8	3	1:2.76	right	0.833	1.140	0.950	
848.80	251	GSM 850	GPRS	30.0	29.41	-0.02	10 mm	Standard	1VUA8	3	1:2.76	right	0.814	1.146	0.933	
836.60	190	GSM 850	GPRS	30.0	29.43	0.06	10 mm	Standard	1VUA8	3	1:2.76	left	0.479	1.140	0.546	
836.60	190	GSM 850	GPRS	30.0	29.43	-0.05	10 mm	Standard	1VUA8	3	1:2.76	back	0.857	1.140	0.977	A13
836.60	4183	UMTS 850	RMC	24.2	24.01	0.05	10 mm	Standard	1VUC9	N/A	1:1	back	0.648	1.045	0.677	A14
836.60	4183	UMTS 850	RMC	24.2	24.01	0.07	10 mm	Quick Cover (Closed)	1VUC9	N/A	1:1	back	0.520	1.045	0.543	
836.60	4183	UMTS 850	RMC	24.2	24.01	-0.02	10 mm	Standard	1VUC9	N/A	1:1	front	0.609	1.045	0.636	
836.60	4183	UMTS 850	RMC	24.2	24.01	-0.06	10 mm	Standard	1VUC9	N/A	1:1	bottom	0.462	1.045	0.483	
836.60	4183	UMTS 850	RMC	24.2	24.01	0.03	10 mm	Standard	1VUC9	N/A	1:1	right	0.528	1.045	0.552	
836.60	4183	UMTS 850	RMC	24.2	24.01	0.03	10 mm	Standard	1VUC9	N/A	1:1	left	0.339	1.045	0.354	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	-0.04	10 mm	Standard	1VUC9	N/A	1:1	back	0.522	1.114	0.582	
1712.40	1312	UMTS 1750	RMC	24.7	24.32	-0.01	10 mm	Standard	1VUC9	N/A	1:1	front	0.627	1.091	0.684	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	-0.04	10 mm	Standard	1VUC9	N/A	1:1	front	0.772	1.114	0.860	
1752.50	1862	UMTS 1750	RMC	24.7	24.10	-0.01	10 mm	Standard	1VUC9	N/A	1:1	front	0.895	1.148	1.027	A16
1752.50	1862	UMTS 1750	RMC	24.7	24.10	-0.09	10 mm	Quick Cover (Closed)	1VUC9	N/A	1:1	front	0.788	1.148	0.905	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	0.05	10 mm	Standard	1VUC9	N/A	1:1	bottom	0.428	1.114	0.477	
1732.40	1412	UMTS 1750	RMC	24.7	24.23	-0.04	10 mm	Standard	1VUC9	N/A	1:1	left	0.505	1.114	0.563	
1880.00	661	GSM 1900	GPRS	27.2	26.68	0.01	10 mm	Standard	1VUC9	3	1:2.76	back	0.273	1.127	0.308	
1880.00	661	GSM 1900	GPRS	27.2	26.68	-0.04	10 mm	Standard	1VUC9	3	1:2.76	front	0.390	1.127	0.440	A18
1880.00	661	GSM 1900	GPRS	27.2	26.68	-0.03	10 mm	Quick Cover (Closed)	1VUC9	3	1:2.76	front	0.311	1.127	0.350	
1880.00	661	GSM 1900	GPRS	27.2	26.68	-0.02	10 mm	Standard	1VUC9	3	1:2.76	bottom	0.296	1.127	0.334	
1880.00	661	GSM 1900	GPRS	27.2	26.68	-0.03	10 mm	Standard	1VUC9	3	1:2.76	left	0.310	1.127	0.349	
1880.00	9400	UMTS 1900	RMC	24.2	24.02	-0.03	10 mm	Standard	1VUC9	N/A	1:1	back	0.614	1.042	0.640	
1852.40	9262	UMTS 1900	RMC	24.2	24.19	0.03	10 mm	Standard	1VUC9	N/A	1:1	front	0.636	1.002	0.637	
1880.00	9400	UMTS 1900	RMC	24.2	24.02	-0.02	10 mm	Standard	1VUC9	N/A	1:1	front	0.888	1.042	0.925	A20
1880.00	9400	UMTS 1900	RMC	24.2	24.02	-0.03	10 mm	Quick Cover (Closed)	1VUC9	N/A	1:1	front	0.753	1.042	0.785	
1907.60	9538	UMTS 1900	RMC	24.2	23.71	-0.03	10 mm	Standard	1VUC9	N/A	1:1	front	0.842	1.119	0.942	
1880.00	9400	UMTS 1900	RMC	24.2	24.02	0.09	10 mm	Standard	1VUC9	N/A	1:1	bottom	0.694	1.042	0.723	
1880.00	9400	UMTS 1900	RMC	24.2	24.02	-0.02	10 mm	Standard	1VUC9	N/A	1:1	left	0.767	1.042	0.799	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body									
Spatial Peak							1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population							averaged over 1 gram									

FCC ID: ZNFH811			SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 59 of 76	

Table 11-18
LTE Band 12 Hotspot SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	0.05	0	1VUBN	QPSK	1	0	10 mm	back	1:1	0.365	1.021	0.373	A22
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	-0.10	1	1VUBN	QPSK	25	0	10 mm	back	1:1	0.292	1.054	0.308	
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	0.05	0	1VUBN	QPSK	1	0	10 mm	front	1:1	0.464	1.021	0.474	
707.50	23095	Mid	LTE Band 12	10	Quick Cover (Closed)	24.2	24.11	0.00	0	1VUBN	QPSK	1	0	10 mm	front	1:1	0.335	1.021	0.342	
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	0.01	1	1VUBN	QPSK	25	0	10 mm	front	1:1	0.361	1.054	0.380	
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	-0.10	0	1VUBN	QPSK	1	0	10 mm	bottom	1:1	0.221	1.021	0.226	
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	0.00	1	1VUBN	QPSK	25	0	10 mm	bottom	1:1	0.176	1.054	0.186	
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	-0.17	0	1VUBN	QPSK	1	0	10 mm	right	1:1	0.354	1.021	0.361	
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	-0.04	1	1VUBN	QPSK	25	0	10 mm	right	1:1	0.289	1.054	0.305	
707.50	23095	Mid	LTE Band 12	10	Standard	24.2	24.11	-0.08	0	1VUBN	QPSK	1	0	10 mm	left	1:1	0.219	1.021	0.224	
707.50	23095	Mid	LTE Band 12	10	Standard	23.2	22.97	0.01	1	1VUBN	QPSK	25	0	10 mm	left	1:1	0.180	1.054	0.190	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-19
LTE Band 5 (Cell) Hotspot SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	0.00	0	1VUBN	QPSK	1	0	10 mm	back	1:1	0.654	1.047	0.685	A23
836.50	20525	Mid	LTE Band 5 (Cell)	10	Quick Cover (Closed)	24.2	24.00	-0.04	0	1VUBN	QPSK	1	0	10 mm	back	1:1	0.562	1.047	0.588	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	-0.01	1	1VUBN	QPSK	25	12	10 mm	back	1:1	0.536	1.059	0.568	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	-0.01	0	1VUBN	QPSK	1	0	10 mm	front	1:1	0.639	1.047	0.669	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	-0.07	1	1VUBN	QPSK	25	12	10 mm	front	1:1	0.578	1.059	0.612	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	-0.03	0	1VUBN	QPSK	1	0	10 mm	bottom	1:1	0.534	1.047	0.559	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	0.02	1	1VUBN	QPSK	25	12	10 mm	bottom	1:1	0.427	1.059	0.452	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	-0.02	0	1VUBN	QPSK	1	0	10 mm	right	1:1	0.544	1.047	0.570	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	0.02	1	1VUBN	QPSK	25	12	10 mm	right	1:1	0.515	1.059	0.545	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	24.2	24.00	0.00	0	1VUBN	QPSK	1	0	10 mm	left	1:1	0.187	1.047	0.196	
836.50	20525	Mid	LTE Band 5 (Cell)	10	Standard	23.2	22.95	0.02	1	1VUBN	QPSK	25	12	10 mm	left	1:1	0.145	1.059	0.154	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																				
Spatial Peak									Body											
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-20
LTE Band 4 (AWS) Hotspot SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																			
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.59	-0.06	0	1VUHU	QPSK	1	50	10 mm	back	1:1	0.559	1.026	0.574	A25
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.58	0.00	1	1VUHU	QPSK	50	50	10 mm	back	1:1	0.449	1.028	0.462	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.59	-0.13	0	1VUHU	QPSK	1	50	10 mm	front	1:1	0.796	1.026	0.817	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Quick Cover (Closed)	24.7	24.59	-0.11	0	1VUHU	QPSK	1	50	10 mm	front	1:1	0.607	1.026	0.623	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.58	0.00	1	1VUHU	QPSK	50	50	10 mm	front	1:1	0.641	1.028	0.659	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.52	-0.02	1	1VUHU	QPSK	100	0	10 mm	front	1:1	0.647	1.042	0.674	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.59	-0.03	0	1VUHU	QPSK	1	50	10 mm	bottom	1:1	0.509	1.026	0.522	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.58	0.02	1	1VUHU	QPSK	50	50	10 mm	bottom	1:1	0.409	1.028	0.420	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	24.7	24.59	-0.05	0	1VUHU	QPSK	1	50	10 mm	left	1:1	0.515	1.026	0.528	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	Standard	23.7	23.58	-0.01	1	1VUHU	QPSK	50	50	10 mm	left	1:1	0.439	1.028	0.451	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body											
Spatial Peak									1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population									averaged over 1 gram											

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 60 of 76

Table 11-21
LTE Band 2 (PCS) Hotspot SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.01	0	1VUBN	QPSK	1	0	10 mm	back	1:1	0.562	1.000	0.562	A27
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.10	0.00	1	1VUBN	QPSK	50	25	10 mm	back	1:1	0.442	1.023	0.452	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Standard	24.2	24.01	-0.01	0	1VUBN	QPSK	1	0	10 mm	front	1:1	0.946	1.045	0.989	
1860.00	18700	Low	LTE Band 2 (PCS)	20	Quick Cover (Closed)	24.2	24.01	-0.07	0	1VUBN	QPSK	1	0	10 mm	front	1:1	0.873	1.045	0.912	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	Standard	24.2	24.19	0.07	0	1VUBN	QPSK	1	0	10 mm	front	1:1	0.858	1.002	0.860	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	24.20	-0.02	0	1VUBN	QPSK	1	0	10 mm	front	1:1	0.935	1.000	0.935	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.10	-0.07	1	1VUBN	QPSK	50	25	10 mm	front	1:1	0.705	1.023	0.721	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.09	-0.04	1	1VUBN	QPSK	100	0	10 mm	front	1:1	0.729	1.026	0.748	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	24.20	0.08	0	1VUBN	QPSK	1	0	10 mm	bottom	1:1	0.668	1.000	0.668	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.10	-0.11	1	1VUBN	QPSK	50	25	10 mm	bottom	1:1	0.454	1.023	0.464	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	24.2	24.20	-0.03	0	1VUBN	QPSK	1	0	10 mm	left	1:1	0.794	1.000	0.794	
1900.00	19100	High	LTE Band 2 (PCS)	20	Standard	23.2	23.10	0.03	1	1VUBN	QPSK	50	25	10 mm	left	1:1	0.580	1.023	0.593	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Body								
Spatial Peak												1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population												averaged over 1 gram								

Table 11-22
LTE Band 7 Hotspot SAR

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Cover Type	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.70	0.17	0	1VUHU	QPSK	1	0	10 mm	back	1:1	0.366	1.000	0.366	
2535.00	21100	Mid	LTE Band 7	20	Standard	22.7	22.63	0.07	1	1VUHU	QPSK	50	25	10 mm	back	1:1	0.260	1.016	0.264	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.70	0.07	0	1VUHU	QPSK	1	0	10 mm	front	1:1	0.462	1.000	0.462	A29
2535.00	21100	Mid	LTE Band 7	20	Quick Cover (Closed)	23.7	23.70	0.02	0	1VUHU	QPSK	1	0	10 mm	front	1:1	0.403	1.000	0.403	
2535.00	21100	Mid	LTE Band 7	20	Standard	22.7	22.63	0.05	1	1VUHU	QPSK	50	25	10 mm	front	1:1	0.312	1.016	0.317	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.70	0.00	0	1VUHU	QPSK	1	0	10 mm	bottom	1:1	0.227	1.000	0.227	
2535.00	21100	Mid	LTE Band 7	20	Standard	22.7	22.63	0.05	1	1VUHU	QPSK	50	25	10 mm	bottom	1:1	0.156	1.016	0.158	
2535.00	21100	Mid	LTE Band 7	20	Standard	23.7	23.70	-0.10	0	1VUHU	QPSK	1	0	10 mm	left	1:1	0.434	1.000	0.434	
2535.00	21100	Mid	LTE Band 7	20	Standard	22.7	22.63	0.05	1	1VUHU	QPSK	50	25	10 mm	left	1:1	0.297	1.016	0.302	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-23
WLAN Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	16.0	15.62	-0.04	10 mm	Standard	1VUDS	1	back	99.2	0.174	0.155	1.091	1.008	0.170	A30
2437	6	802.11b	DSSS	22	16.0	15.62	-0.01	10 mm	Quick Cover (Closed)	1VUDS	1	back	99.2	0.181	0.167	1.091	1.008	0.183	
2437	6	802.11b	DSSS	22	16.0	15.62	-	10 mm	Standard	1VUDS	1	front	99.2	0.091	-	1.091	1.008	-	
2437	6	802.11b	DSSS	22	16.0	15.62	-	10 mm	Standard	1VUDS	1	top	99.2	0.152	-	1.091	1.008	-	
2437	6	802.11b	DSSS	22	16.0	15.62	-	10 mm	Standard	1VUDS	1	right	99.2	0.045	-	1.091	1.008	-	
5825	165	802.11a	OFDM	20	12.0	10.70	-	10 mm	Standard	1VUDS	6	back	95.4	0.111	-	1.349	1.048	-	A32
5825	165	802.11a	OFDM	20	12.0	10.70	-	10 mm	Standard	1VUDS	6	front	95.4	0.046	-	1.349	1.048	-	
5825	165	802.11a	OFDM	20	12.0	10.70	0.03	10 mm	Standard	1VUDS	6	top	95.4	0.235	0.091	1.349	1.048	0.129	
5825	165	802.11a	OFDM	20	12.0	10.70	0.05	10 mm	Quick Cover (Closed)	1VUDS	6	top	95.4	0.181	0.070	1.349	1.048	0.099	
5825	165	802.11a	OFDM	20	12.0	10.70	-	10 mm	Standard	1VUDS	6	right	95.4	0.015	-	1.349	1.048	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body										
Spatial Peak									1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population									averaged over 1 gram										

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 61 of 76	

11.4 Standalone Hand SAR Data

Table 11-24
WLAN Hand SAR Data

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Cover Type	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Scaled SAR (10g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	12.0	11.30	-	0 mm	Standard	1VJDS	6	back	95.4	2.560	-	1.175	1.048	-	
5260	52	802.11a	OFDM	20	12.0	11.30	-	0 mm	Standard	1VJDS	6	front	95.4	0.861	-	1.175	1.048	-	
5260	52	802.11a	OFDM	20	12.0	11.30	-0.12	0 mm	Standard	1VJDS	6	top	95.4	4.660	0.319	1.175	1.048	0.393	A33
5260	52	802.11a	OFDM	20	12.0	11.30	-0.16	0 mm	Quick Cover (Open)	1VJDS	6	top	95.4	2.310	0.218	1.175	1.048	0.268	
5260	52	802.11a	OFDM	20	12.0	11.30	-0.01	0 mm	Quick Cover (Closed)	1VJDS	6	top	95.4	3.770	0.262	1.175	1.048	0.323	
5260	52	802.11a	OFDM	20	12.0	11.30	-	0 mm	Standard	1VJDS	6	right	95.4	0.221	-	1.175	1.048	-	
5660	132	802.11a	OFDM	20	12.0	10.85	-	0 mm	Standard	1VJDS	6	back	95.4	1.632	-	1.303	1.048	-	
5660	132	802.11a	OFDM	20	12.0	10.85	-	0 mm	Standard	1VJDS	6	front	95.4	0.645	-	1.303	1.048	-	
5660	132	802.11a	OFDM	20	12.0	10.85	-0.02	0 mm	Standard	1VJDS	6	top	95.4	3.223	0.197	1.303	1.048	0.269	
5660	132	802.11a	OFDM	20	12.0	10.85	-	0 mm	Standard	1VJDS	6	right	95.4	0.115	-	1.303	1.048	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak								Extremity											
Uncontrolled Exposure/General Population								4.0 W/kg (mW/g) averaged over 10 grams											

11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured SAR results for a frequency band were greater than 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. Per FCC KDB Publication 648474 D04v01r01, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, hand SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
11. Per FCC KDB Publication 648474 D04, SAR was measured using the standard battery cover and then repeated with the quick cover for the configuration with the highest reported SAR for each wireless technology, frequency band, operating mode, and exposure condition. Since reported SAR did not exceed 1.2 W/kg, additional testing with the quick cover was not required.

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 62 of 76

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR. GPRS was additionally evaluated for head and body-worn voice calls to cover VoIP.
2. Justification for reduced test configurations per KDB Publication 941225 D01v01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r03. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per KDB Publication 941225 D05Av01r01, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01 802.11 WIFI SAR v02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01 802.11 WIFI SAR v02 for 5 GHz WIFI operations, the initial test configuration was selected according to the

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 63 of 76

- transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 8.6.6 for more information.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
 5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 64 of 76

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05r02 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05 IV.C.1.iii and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05 4.3.2 2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 12-1
Estimated SAR

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2480	11.50	10	0.294

Note: Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

Main antenna SAR testing was not required for extremity exposure conditions per FCC KDB 648474. Therefore, no further analysis was required to determine that possible simultaneous scenarios would not exceed the SAR limit.

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 65 of 76	

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	GSM 850	0.618	0.372	0.990
	GPRS 850	0.665	0.372	1.037
	UMTS 850	0.519	0.372	0.891
	UMTS 1750	1.049	0.372	1.421
	GSM 1900	0.375	0.372	0.747
	GPRS 1900	0.583	0.372	0.955
	UMTS 1900	1.042	0.372	1.414
	LTE Band 12	0.329	0.372	0.701
	LTE Band 5 (Cell)	0.484	0.372	0.856
	LTE Band 4 (AWS)	0.961	0.372	1.333
	LTE Band 2 (PCS)	1.082	0.372	1.454
	LTE Band 7	0.500	0.372	0.872

Table 12-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	GSM 850	0.618	0.383	1.001
	GPRS 850	0.665	0.383	1.048
	UMTS 850	0.519	0.383	0.902
	UMTS 1750	1.049	0.383	1.432
	GSM 1900	0.375	0.383	0.758
	GPRS 1900	0.583	0.383	0.966
	UMTS 1900	1.042	0.383	1.425
	LTE Band 12	0.329	0.383	0.712
	LTE Band 5 (Cell)	0.484	0.383	0.867
	LTE Band 4 (AWS)	0.961	0.383	1.344
	LTE Band 2 (PCS)	1.082	0.383	1.465
	LTE Band 7	0.500	0.383	0.883

The worst case 5 GHz WIFI reported SAR for each head configuration was considered for simultaneous SAR exclusion via summation of standalone SAR, regardless of whether the WIFI channel has WIFI Hotspot capability, for simplicity to determine compliance. Please note that the actual simultaneous transmission SAR will not exceed the summed levels indicated.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 66 of 76	

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm))

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	GSM 850	0.846	0.183	1.029
	GPRS 850	0.977	0.183	1.160
	UMTS 850	0.677	0.183	0.860
	UMTS 1750	0.582	0.183	0.765
	GSM 1900	0.233	0.183	0.416
	GPRS 1900	0.367	0.183	0.550
	UMTS 1900	0.640	0.183	0.823
	LTE Band 12	0.373	0.183	0.556
	LTE Band 5 (Cell)	0.685	0.183	0.868
	LTE Band 4 (AWS)	0.586	0.183	0.769
	LTE Band 2 (PCS)	0.562	0.183	0.745
	LTE Band 7	0.404	0.183	0.587

Table 12-5
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	GSM 850	0.846	0.222	1.068
	GPRS 850	0.977	0.222	1.199
	UMTS 850	0.677	0.222	0.899
	UMTS 1750	0.582	0.222	0.804
	GSM 1900	0.233	0.222	0.455
	GPRS 1900	0.367	0.222	0.589
	UMTS 1900	0.640	0.222	0.862
	LTE Band 12	0.373	0.222	0.595
	LTE Band 5 (Cell)	0.685	0.222	0.907
	LTE Band 4 (AWS)	0.586	0.222	0.808
	LTE Band 2 (PCS)	0.562	0.222	0.784
	LTE Band 7	0.404	0.222	0.626

The worst case 5 GHz WIFI reported SAR for each body-worn configuration was considered for simultaneous SAR exclusion via summation of standalone SAR, regardless of whether the WIFI channel has WIFI Hotspot capability, for simplicity to determine compliance. Please note that the actual simultaneous transmission SAR will not exceed the summed levels indicated.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 67 of 76

Table 12-6
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	GSM 850	0.846	0.294	1.140
	GPRS 850	0.977	0.294	1.271
	UMTS 850	0.677	0.294	0.971
	UMTS 1750	0.582	0.294	0.876
	GSM 1900	0.233	0.294	0.527
	GPRS 1900	0.367	0.294	0.661
	UMTS 1900	0.640	0.294	0.934
	LTE Band 12	0.373	0.294	0.667
	LTE Band 5 (Cell)	0.685	0.294	0.979
	LTE Band 4 (AWS)	0.586	0.294	0.880
	LTE Band 2 (PCS)	0.562	0.294	0.856
	LTE Band 7	0.404	0.294	0.698

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 68 of 76

12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

Table 12-7
Simultaneous Transmission Scenario (2.4 GHz Hotspot at 1.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Hotspot SAR	GPRS 850	0.977	0.183	1.160
	UMTS 850	0.677	0.183	0.860
	UMTS 1750	1.027	0.183	1.210
	GPRS 1900	0.440	0.183	0.623
	UMTS 1900	0.942	0.183	1.125
	LTE Band 12	0.474	0.183	0.657
	LTE Band 5 (Cell)	0.685	0.183	0.868
	LTE Band 4 (AWS)	0.817	0.183	1.000
	LTE Band 2 (PCS)	0.989	0.183	1.172
	LTE Band 7	0.462	0.183	0.645

Table 12-8
Simultaneous Transmission Scenario (5 GHz Hotspot at 1.0 cm)

Exposure Condition	Mode	3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Hotspot SAR	GPRS 850	0.977	0.129	1.106
	UMTS 850	0.677	0.129	0.806
	UMTS 1750	1.027	0.129	1.156
	GPRS 1900	0.440	0.129	0.569
	UMTS 1900	0.942	0.129	1.071
	LTE Band 12	0.474	0.129	0.603
	LTE Band 5 (Cell)	0.685	0.129	0.814
	LTE Band 4 (AWS)	0.817	0.129	0.946
	LTE Band 2 (PCS)	0.989	0.129	1.118
	LTE Band 7	0.462	0.129	0.591

12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 69 of 76

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) 10 g Extremity SAR measurement variability analysis applies a factor of 2.5 to the procedures outlined above.

Table 13-1
Head SAR Measurement Variability Results

HEAD VARIABILITY RESULTS													
Band	FREQUENCY		Mode/Band	Service	Side	Test Position	Cover Type	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)
1750	1732.40	1412	UMTS 1750	RMC	Left	Cheek	Quick Cover (Closed)	0.942	0.866	1.1	N/A	N/A	N/A
1900	1880.00	18900	LTE Band 2 (PCS)	QPSK, 1 RB, 0 RB Offset	Left	Cheek	Quick Cover (Open)	1.080	1.050	1.0	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 13-2
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	# of Time Slots	Cover Type	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)	
835	836.60	190	GSM 850	GPRS	3	Standard	back	10 mm	0.846	0.857	1.01	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram					

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the extended measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 70 of 76

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/15/2015	Annual	3/15/2016	MY45470194
Agilent	8753E	(30kHz-6GHz) Network Analyzer	12/30/2014	Annual	12/30/2015	JP38020182
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8648D	(9kHz-4GHz) Signal Generator	3/15/2015	Annual	3/15/2016	3629U00687
Agilent	E4438C	ESG Vector Signal Generator	3/15/2015	Annual	3/15/2016	MY45091346
Agilent	E4432B	ESG-D Series Signal Generator	3/16/2015	Annual	3/16/2016	US40053896
Agilent	N5182A	MXG Vector Signal Generator	10/27/2014	Annual	10/27/2015	MY47420603
Agilent	8753ES	Network Analyzer	3/20/2015	Annual	3/20/2016	MY40001472
Agilent	8753ES	S-Parameter Network Analyzer	1/20/2015	Annual	1/20/2016	US39170122
Agilent	E5515C	Wireless Communications Test Set	12/24/2014	Annual	12/24/2015	GB44400860
Agilent	N4010A	Wireless Connectivity Test Set	CBT	N/A	CBT	GB44450273
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433978
Anritsu	MA2411B	Pulse Power Sensor	11/17/2014	Annual	11/17/2015	1126066
Anritsu	MT8820C	Radio Communication Analyzer	8/28/2014	Annual	8/28/2015	6201240328
Anritsu	MT8820C	Radio Communication Analyzer	9/19/2014	Annual	9/19/2015	6201144418
Anritsu	MA24106A	USB Power Sensor	3/2/2015	Annual	3/2/2016	1349503
Anritsu	ML2495A	Power Meter	7/12/2013	Biennial	7/12/2015	1328004
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4040	Digital Thermometer	3/18/2015	Biennial	3/18/2017	150195001
Control Company	4040	Digital Thermometer	3/15/2015	Biennial	3/15/2017	150195005
Control Company	4353	Long Stem Thermometer	3/5/2015	Biennial	3/5/2017	150149534
Control Company	4353	Long Stem Thermometer	3/5/2015	Biennial	3/5/2017	150149565
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/30/2014	Annual	10/30/2015	1833460
Gigatronics	8651A	Universal Power Meter	10/30/2014	Annual	10/30/2015	8650319
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mitutoyo	CD-6"CSX	Digital Caliper	5/8/2014	Biennial	5/8/2016	13264162
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	3/18/2015	Annual	3/18/2016	128633
Rohde & Schwarz	CMW500	Radio Communication Tester	4/8/2015	Annual	4/8/2016	140148
Seekonk	NC-100	Torque Wrench	3/18/2014	Biennial	3/18/2016	N/A
SPEAG	D1765V2	1765 MHz SAR Dipole	5/7/2014	Annual	5/7/2015	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	7/23/2014	Annual	7/23/2015	5d149
SPEAG	D2450V2	2450 MHz SAR Dipole	8/11/2014	Annual	8/11/2015	719
SPEAG	D2450V2	2450 MHz SAR Dipole	2/18/2015	Annual	2/18/2016	882
SPEAG	D2600V2	2600 MHz SAR Dipole	10/20/2014	Annual	10/20/2015	1071
SPEAG	D5GHzV2	5 GHz SAR Dipole	9/25/2014	Annual	9/25/2015	1191
SPEAG	D750V3	750 MHz Dipole	3/11/2015	Annual	3/11/2016	1054
SPEAG	D835V2	835 MHz SAR Dipole	1/16/2015	Annual	1/16/2016	4d132
SPEAG	D835V2	835 MHz SAR Dipole	7/24/2014	Annual	7/24/2015	4d133
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/18/2015	Annual	2/18/2016	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/14/2015	Annual	1/14/2016	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/12/2014	Annual	8/12/2015	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/17/2014	Annual	9/17/2015	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/31/2014	Annual	10/31/2015	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/13/2015	Annual	3/13/2016	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/18/2014	Annual	9/18/2015	1364
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/23/2014	Annual	10/23/2015	1408
SPEAG	DAE4	Dasy Data Acquisition Electronics	12/12/2014	Annual	12/12/2015	1415
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/6/2014	Annual	5/6/2015	1070
SPEAG	DAK-3.5	Dielectric Assessment Kit	10/21/2014	Annual	10/21/2015	1091
SPEAG	ES3DV2	SAR Probe	8/19/2014	Annual	8/19/2015	3022
SPEAG	ES3DV3	SAR Probe	3/19/2015	Annual	3/19/2016	3209
SPEAG	ES3DV3	SAR Probe	2/27/2015	Annual	2/27/2016	3258
SPEAG	ES3DV3	SAR Probe	9/24/2014	Annual	9/24/2015	3288
SPEAG	ES3DV3	SAR Probe	1/23/2015	Annual	1/23/2016	3318
SPEAG	ES3DV3	SAR Probe	9/18/2014	Annual	9/18/2015	3332
SPEAG	ES3DV3	SAR Probe	10/24/2014	Annual	10/24/2015	3333
SPEAG	ES3DV3	SAR Probe	12/16/2014	Annual	12/16/2015	3334
SPEAG	EX3DV4	SAR Probe	2/10/2015	Annual	2/10/2016	3914

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 71 of 76

15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.1	11.7
Expanded Uncertainty							k=2	24.2	23.5
(95% CONFIDENCE LEVEL)									

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: ZNFH811		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset		Page 72 of 76

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 73 of 76

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: ZNFH811	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Document S/N: 0Y1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 74 of 76	

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 75 of 76

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01 802.11 WIFI SAR v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: ZNFH811	 SAR EVALUATION REPORT 		Reviewed by: Quality Manager
Document S/N: OY1504130695-R1.ZNF	Test Dates: 04/13/15 - 04/20/15	DUT Type: Portable Handset	Page 76 of 76

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUA8

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 41.56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-14-2015; Ambient Temp: 21.3°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3333; ConvF(6.33, 6.33, 6.33); Calibrated: 10/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 10/23/2014

Phantom: Main TWIN SAM; Type: QD000P40CC; Serial: TP-1406

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 850, Right Head, Cheek, Mid.ch, 3 Tx slots, Quick Cover Closed


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.381 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.583 W/kg

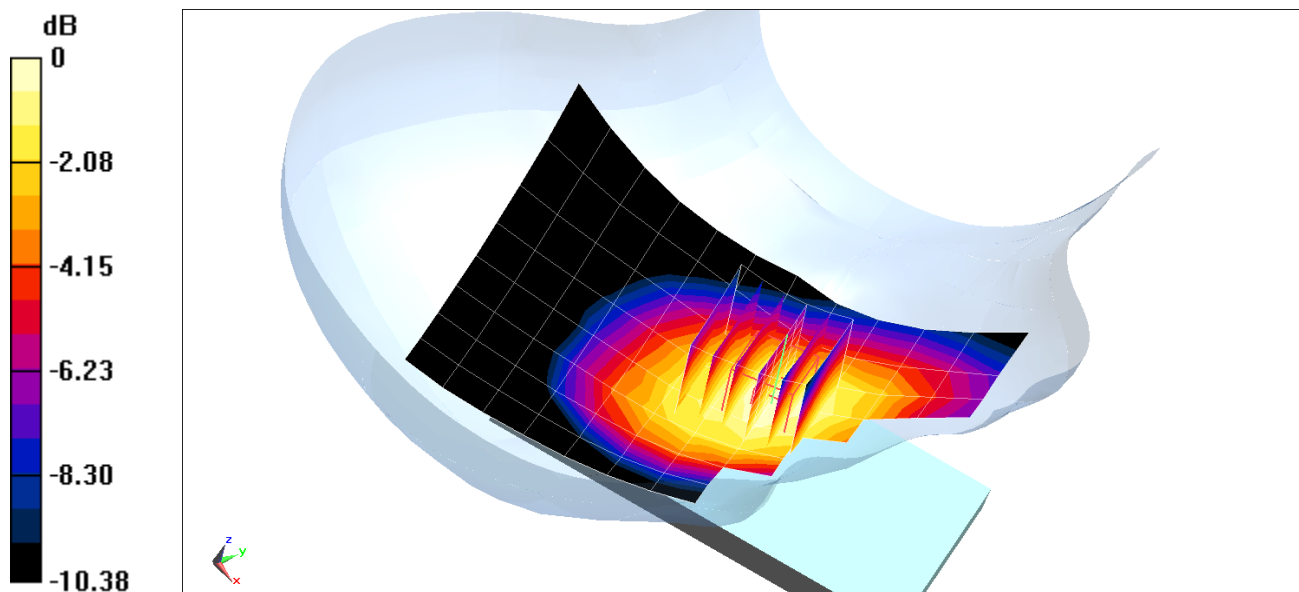

0 dB = 0.643 W/kg = -1.92 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 41.56$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-14-2015; Ambient Temp: 21.3°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3333; ConvF(6.33, 6.33, 6.33); Calibrated: 10/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 10/23/2014

Phantom: Main TWIN SAM; Type: QD000P40CC; Serial: TP-1406

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Right Head, Cheek, Mid.ch, Quick Cover Open


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.144 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.497 W/kg

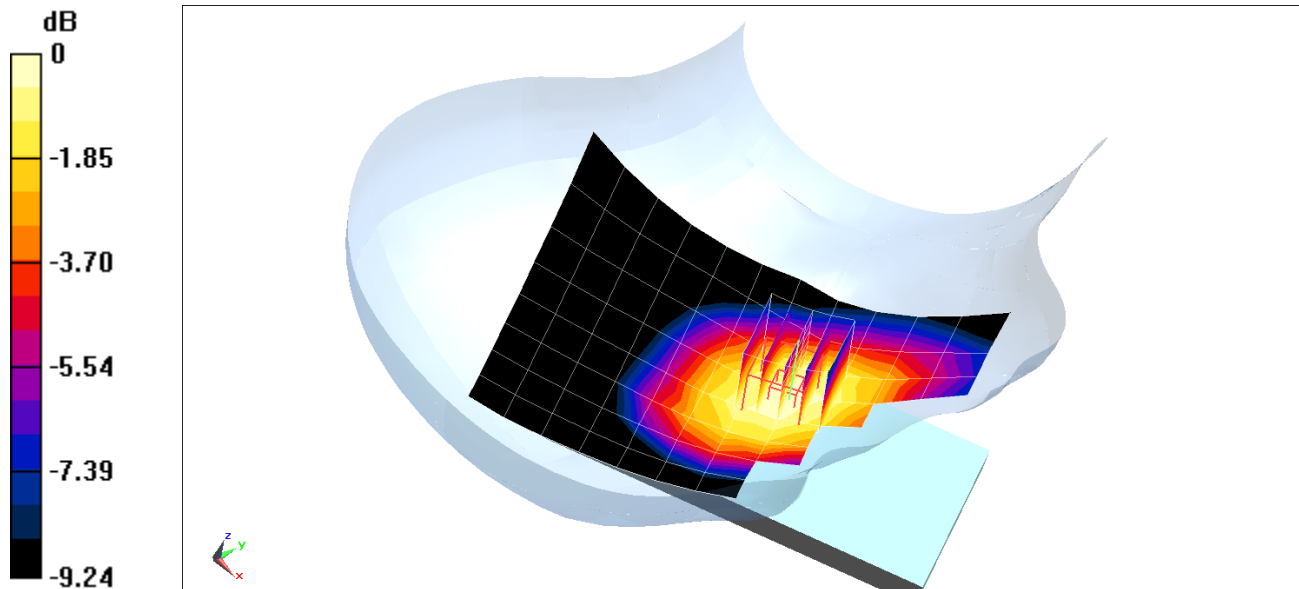

0 dB = 0.543 W/kg = -2.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 39.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-14-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3334; ConvF(5.21, 5.21, 5.21); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Left Head, Cheek, Mid.ch, Quick Cover Closed


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.005 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.942 W/kg

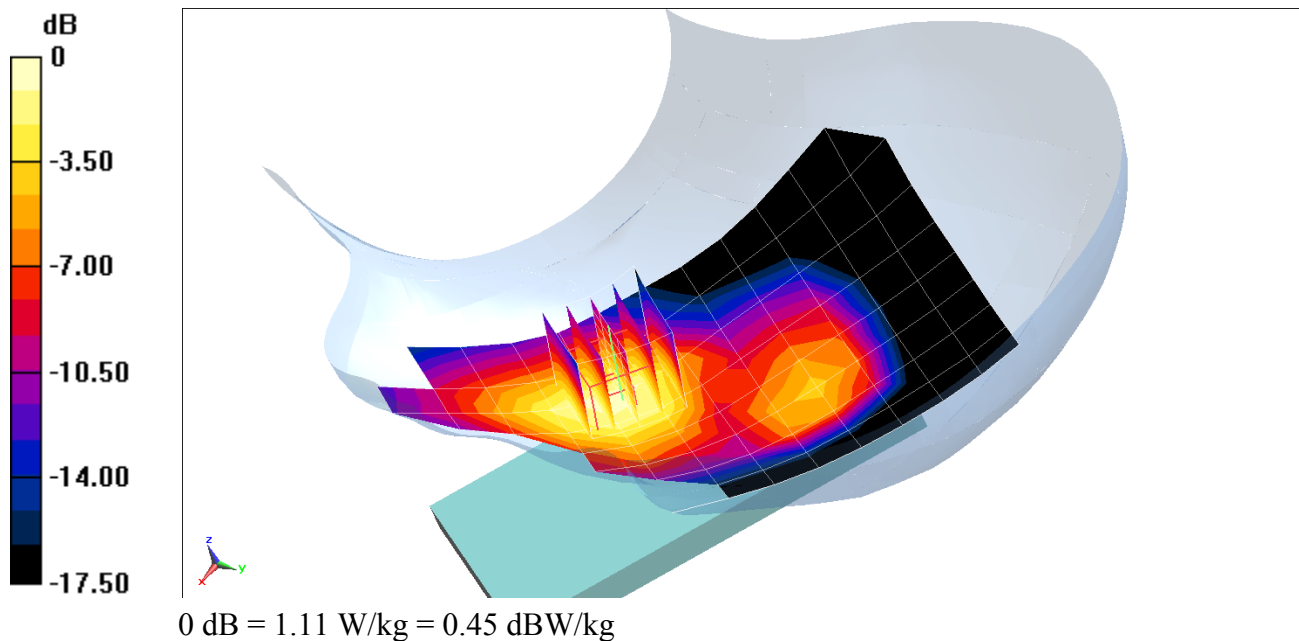

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.434 \text{ S/m}$; $\epsilon_r = 41.262$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-20-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(5.17, 5.17, 5.17); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Left Head, Cheek, Mid.ch, 3 Tx slots, Quick Cover Open


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.697 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.517 W/kg

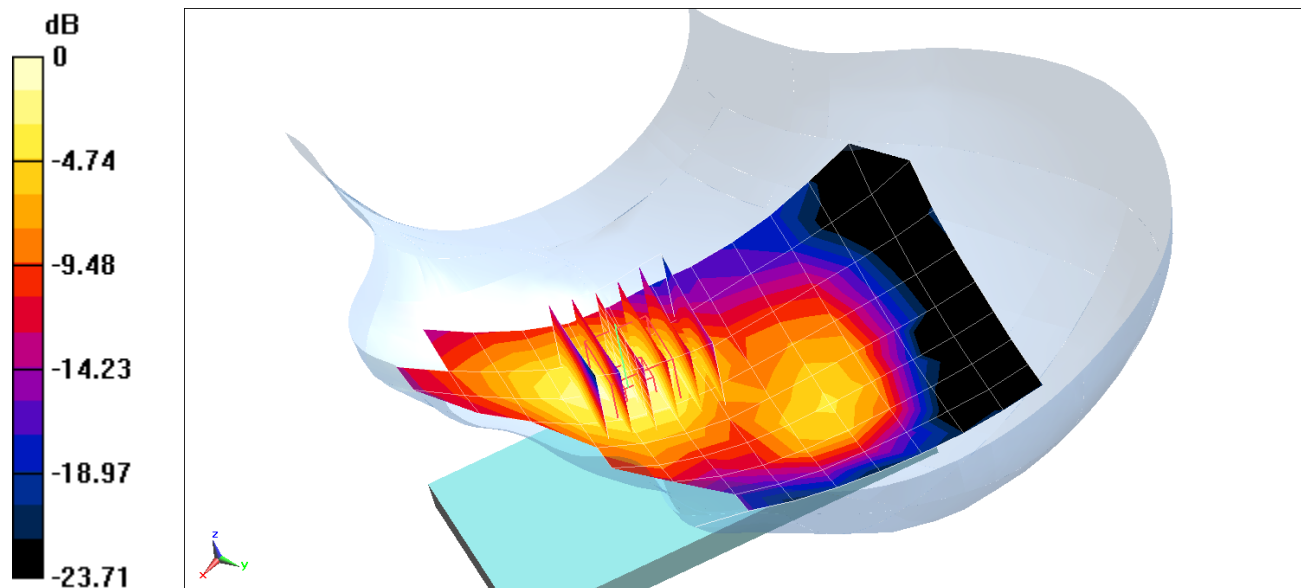

0 dB = 0.612 W/kg = -2.13 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.434 \text{ S/m}$; $\epsilon_r = 41.262$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-20-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(5.17, 5.17, 5.17); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch, Quick Cover Open


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.217 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.00 W/kg

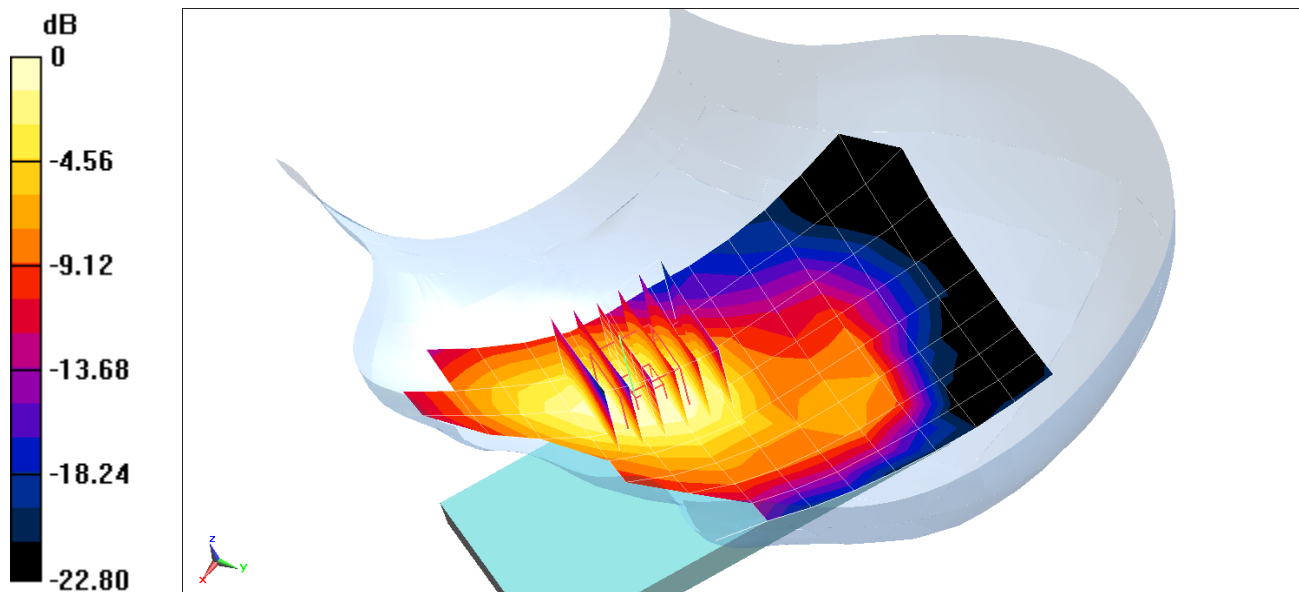

0 dB = 1.17 W/kg = 0.68 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUHU

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.872 \text{ S/m}$; $\epsilon_r = 41.655$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-20-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.58, 6.58, 6.58); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 12, Right Head, Cheek, Mid.ch, Standard Cover

10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.597 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.322 W/kg

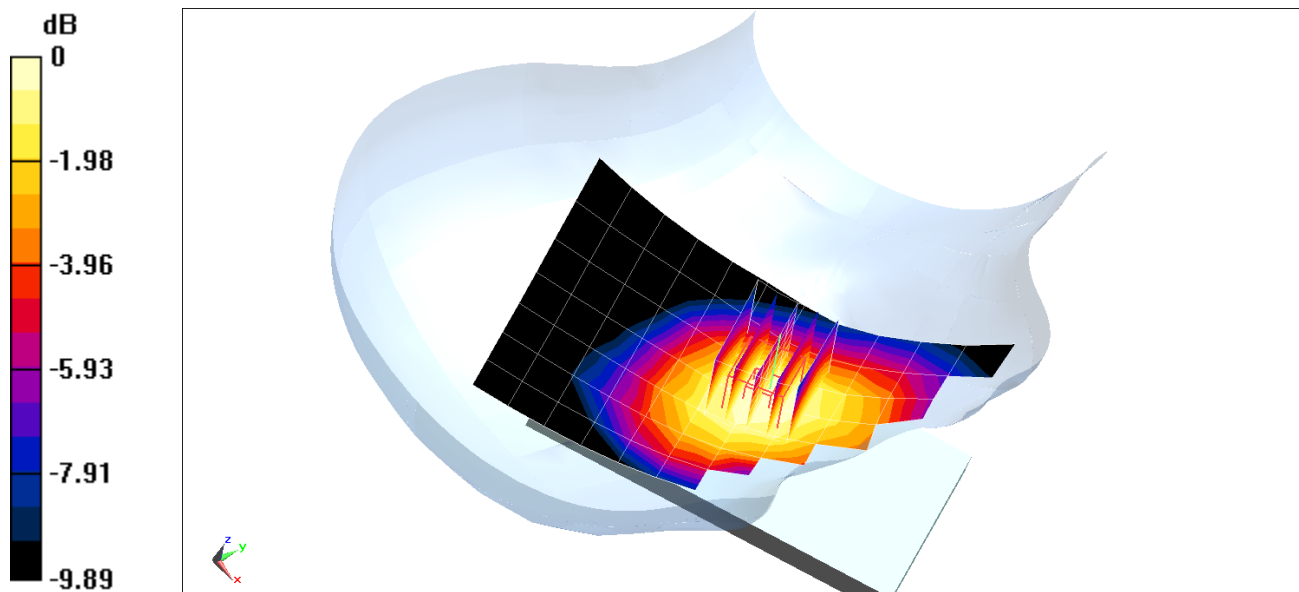

0 dB = 0.351 W/kg = -4.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUHU

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 41.561$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04-14-2015; Ambient Temp: 21.3°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3333; ConvF(6.33, 6.33, 6.33); Calibrated: 10/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 10/23/2014

Phantom: Main TWIN SAM; Type: QD000P40CC; Serial: TP-1406

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch, Standard Cover
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.321 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.462 W/kg

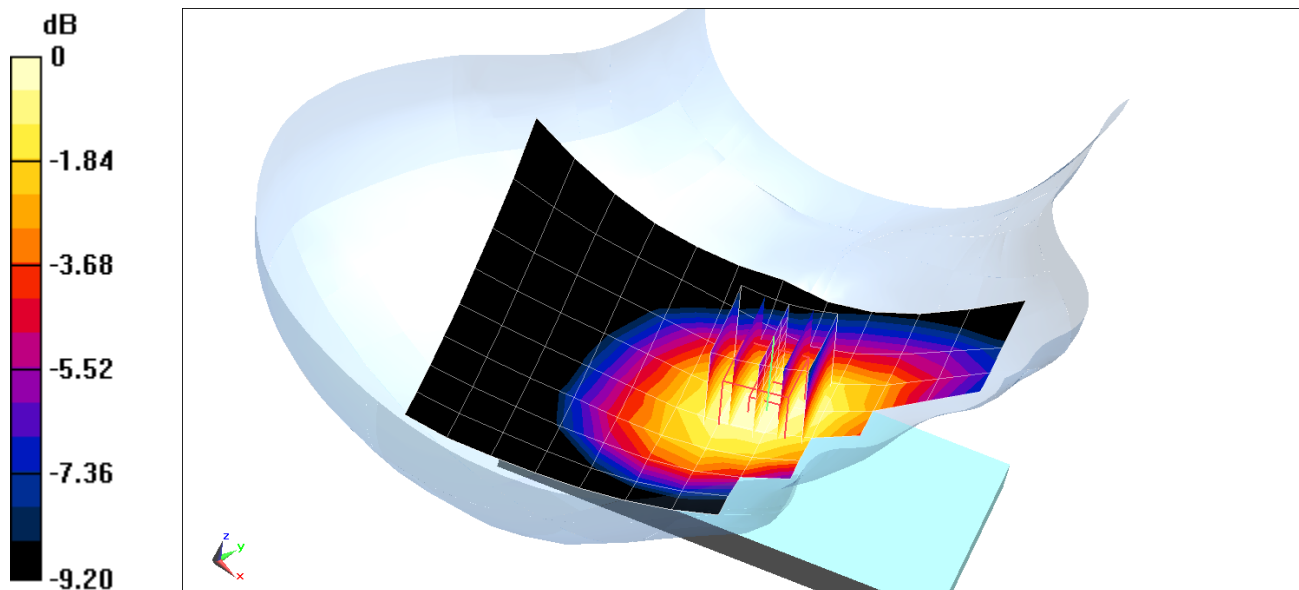

0 dB = 0.511 W/kg = -2.92 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUHU

Communication System: UID 0, LTE RF Band 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.376 \text{ S/m}$; $\epsilon_r = 39.506$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-14-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3334; ConvF(5.21, 5.21, 5.21); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch, Quick Cover Closed
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.111 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.937 W/kg

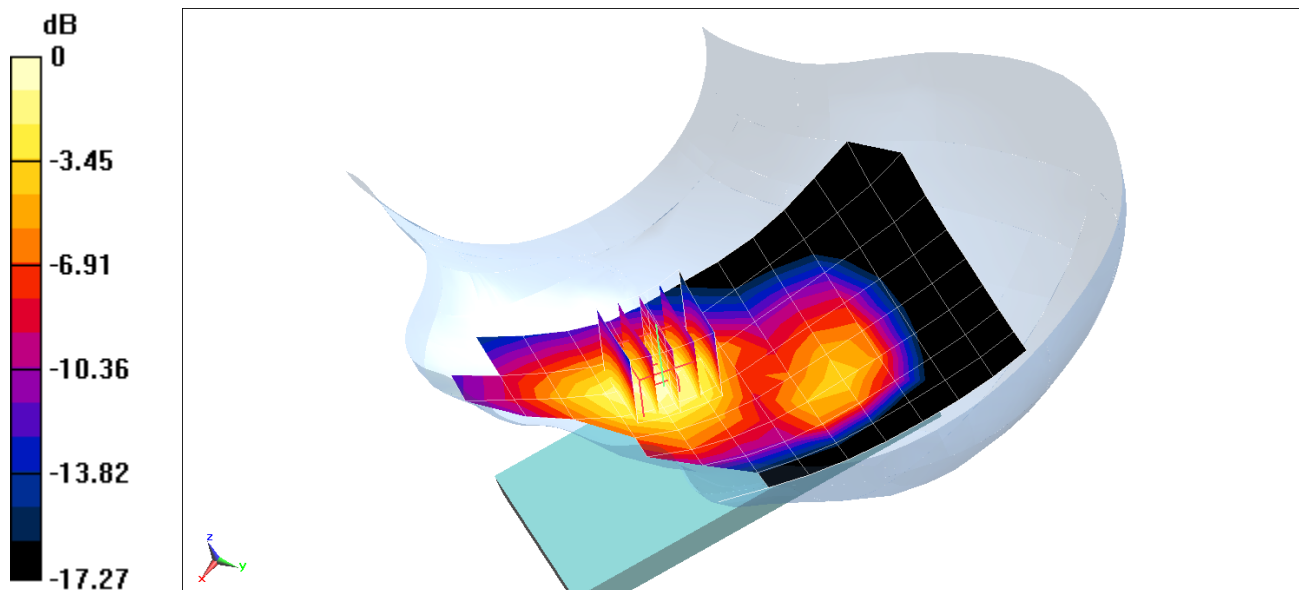

0 dB = 1.12 W/kg = 0.49 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUBN

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.406 \text{ S/m}$; $\epsilon_r = 38.879$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-13-2015; Ambient Temp: 21.9°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(4.85, 4.85, 4.85); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 2 (PCS), Left Head, Cheek, Mid.ch, Quick Cover Open

20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.978 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 1.08 W/kg

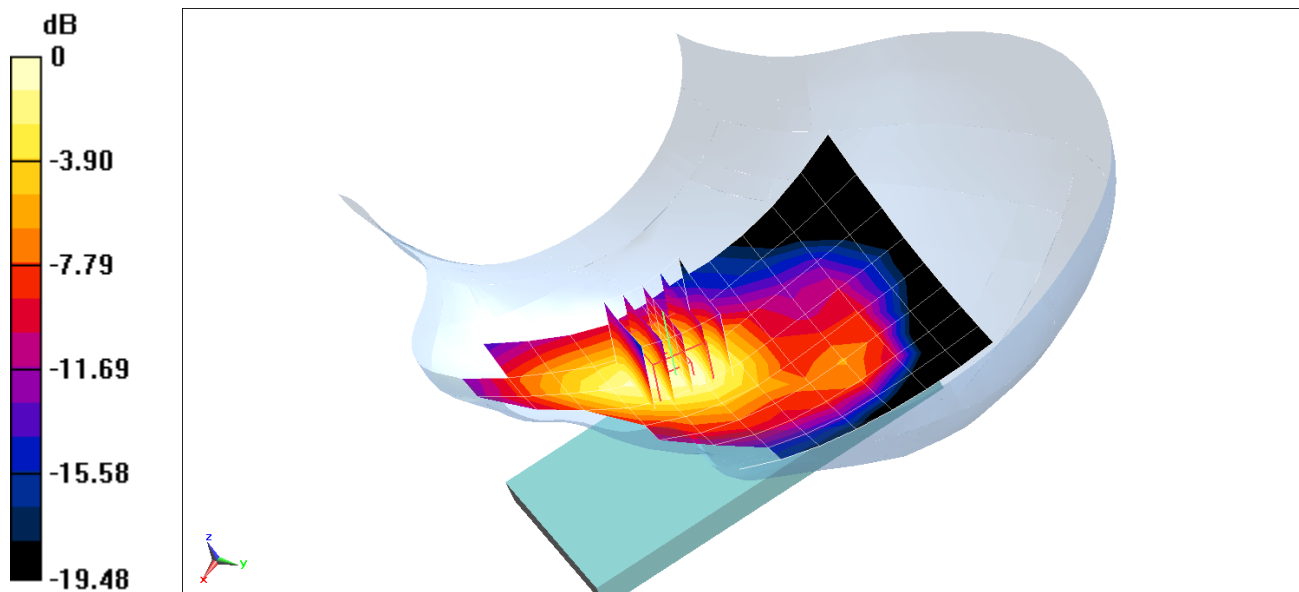

0 dB = 1.28 W/kg = 1.07 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUHU

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2600 Head Medium parameters used (interpolated):

$f = 2535 \text{ MHz}$; $\sigma = 1.915 \text{ S/m}$; $\epsilon_r = 37.814$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-20-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3258; ConvF(4.38, 4.38, 4.38); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 7, Left Head, Cheek, Mid.ch, Standard Cover
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.585 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.500 W/kg

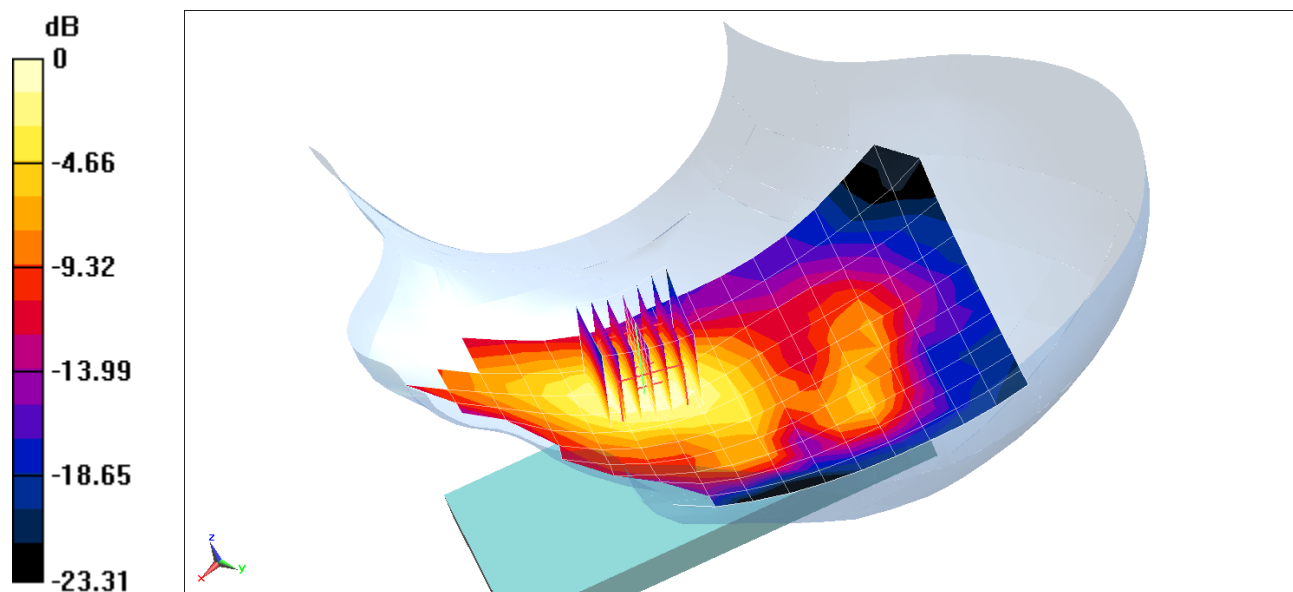

0 dB = 0.613 W/kg = -2.13 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUDS

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.806 \text{ S/m}$; $\epsilon_r = 38.111$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-15-2015; Ambient Temp: 21.1°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Left Head, Tilt, Ch 06, 1 Mbps, Standard Cover


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.455 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.338 W/kg

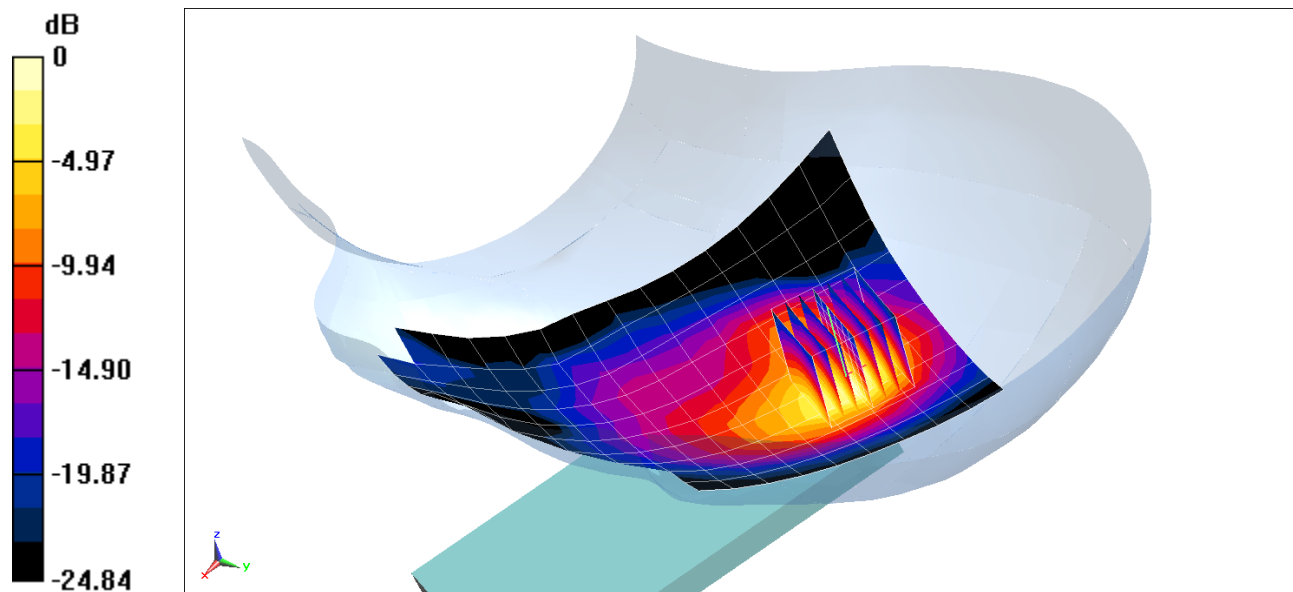

0 dB = 0.428 W/kg = -3.69 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUDS

Communication System: UID 0, IEEE 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5260 \text{ MHz}$; $\sigma = 4.534 \text{ S/m}$; $\epsilon_r = 35.874$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(5.06, 5.06, 5.06); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11a, 5.3 GHz, 20 MHz Bandwidth

Left Head, Cheek, Ch 52, 6 Mbps, Standard Cover


Area Scan (13x6x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 8.774 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.311 W/kg

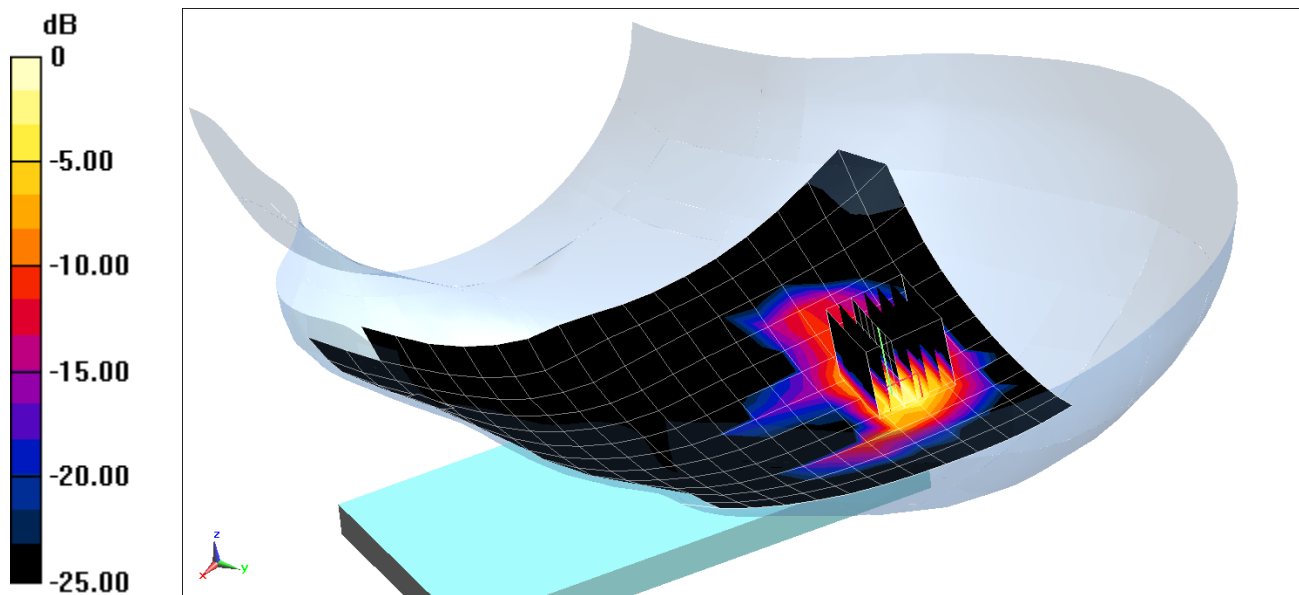

0 dB = 0.874 W/kg = -0.58 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUA8

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 53.677$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.5°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots, Standard Cover


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.264 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.857 W/kg

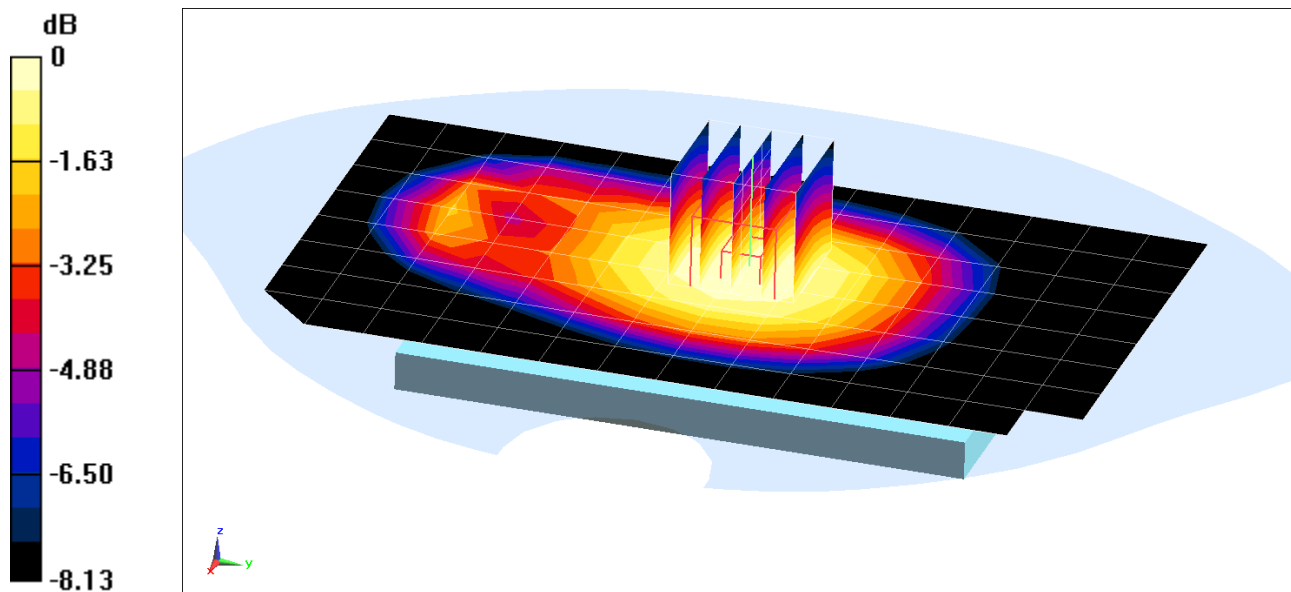

0 dB = 0.934 W/kg = -0.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.997 \text{ S/m}$; $\epsilon_r = 53.677$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.5°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back side, Mid.ch, Standard Cover


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.989 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.648 W/kg

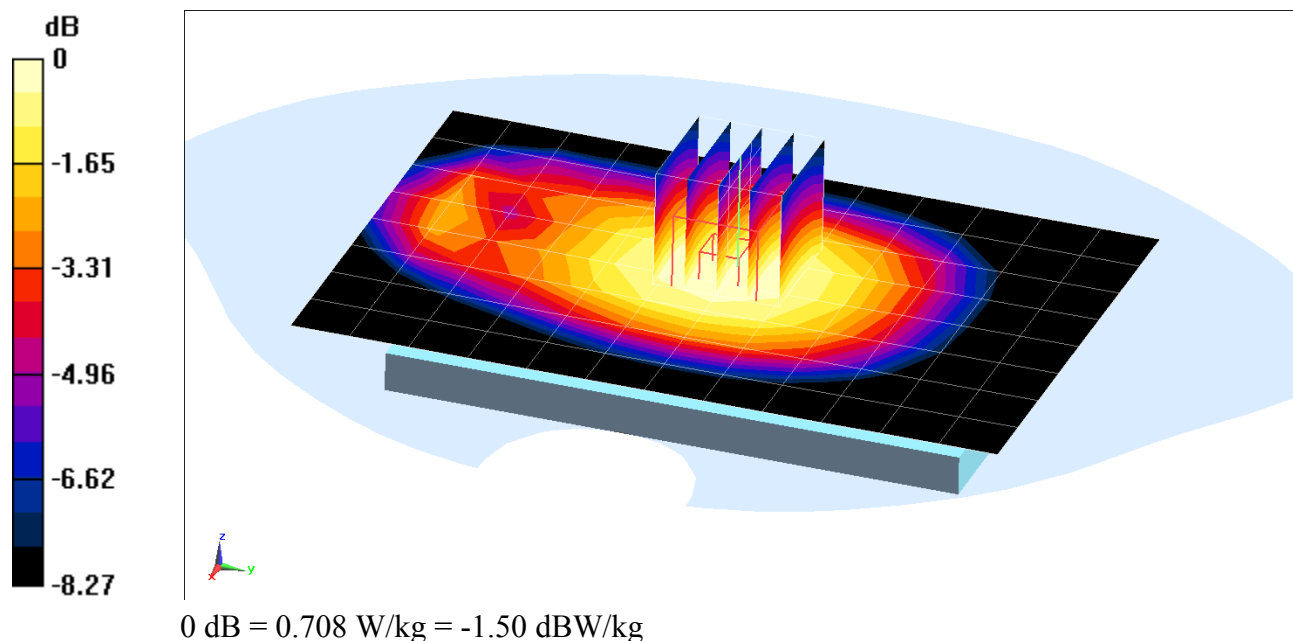

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 52.878$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Body SAR, Back side, Mid.ch, Standard Cover


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.621 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.762 W/kg

SAR(1 g) = 0.522 W/kg

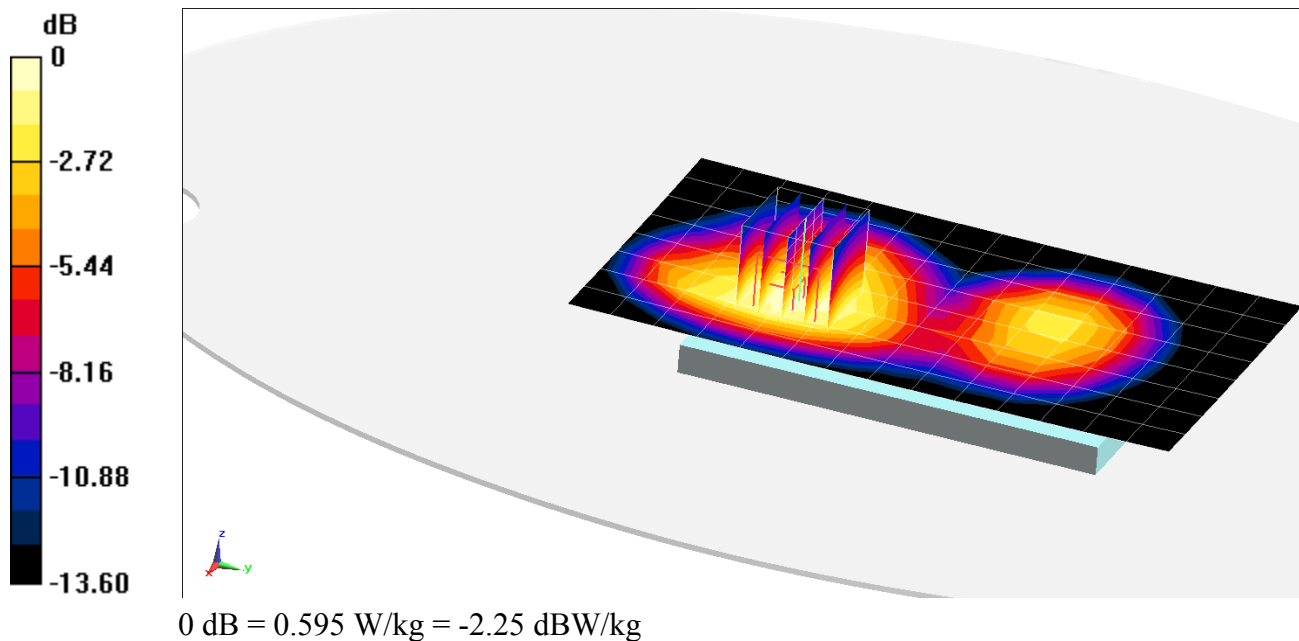

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, UMTS; Frequency: 1752.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.5 \text{ MHz}$; $\sigma = 1.471 \text{ S/m}$; $\epsilon_r = 52.82$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: AWS UMTS, Body SAR, Front side, High.ch, Standard Cover


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.307 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.895 W/kg

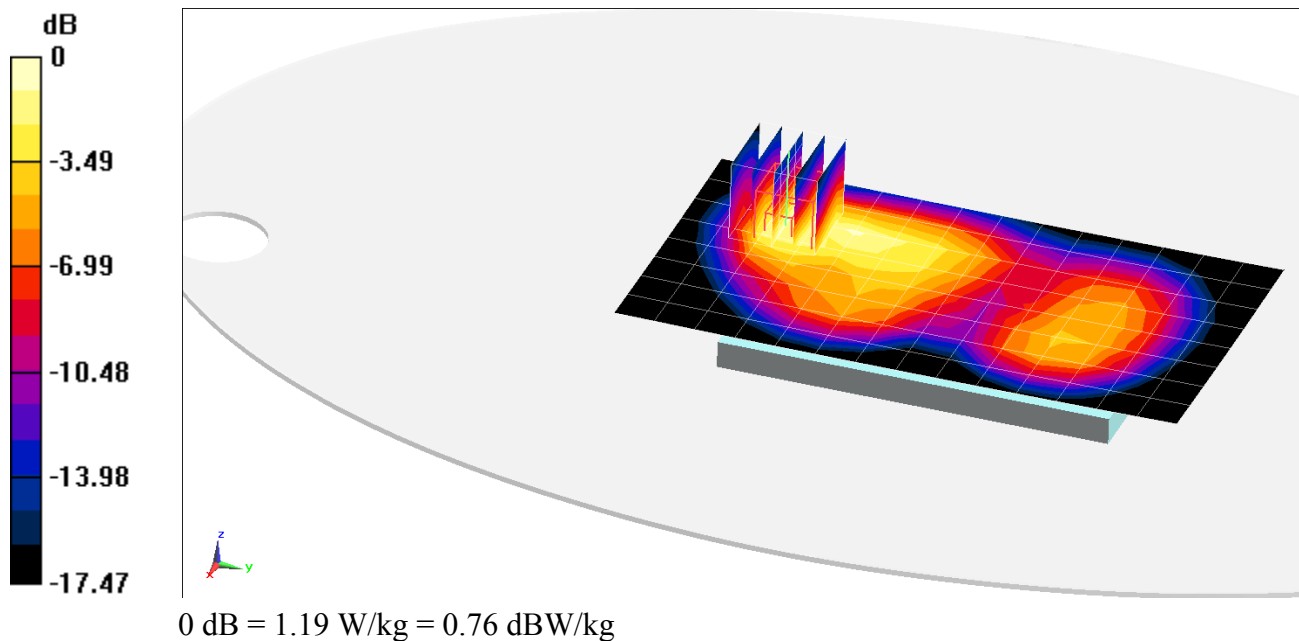

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 52.553$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 3 Tx Slots, Quick Cover Closed


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.325 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = 0.326 W/kg

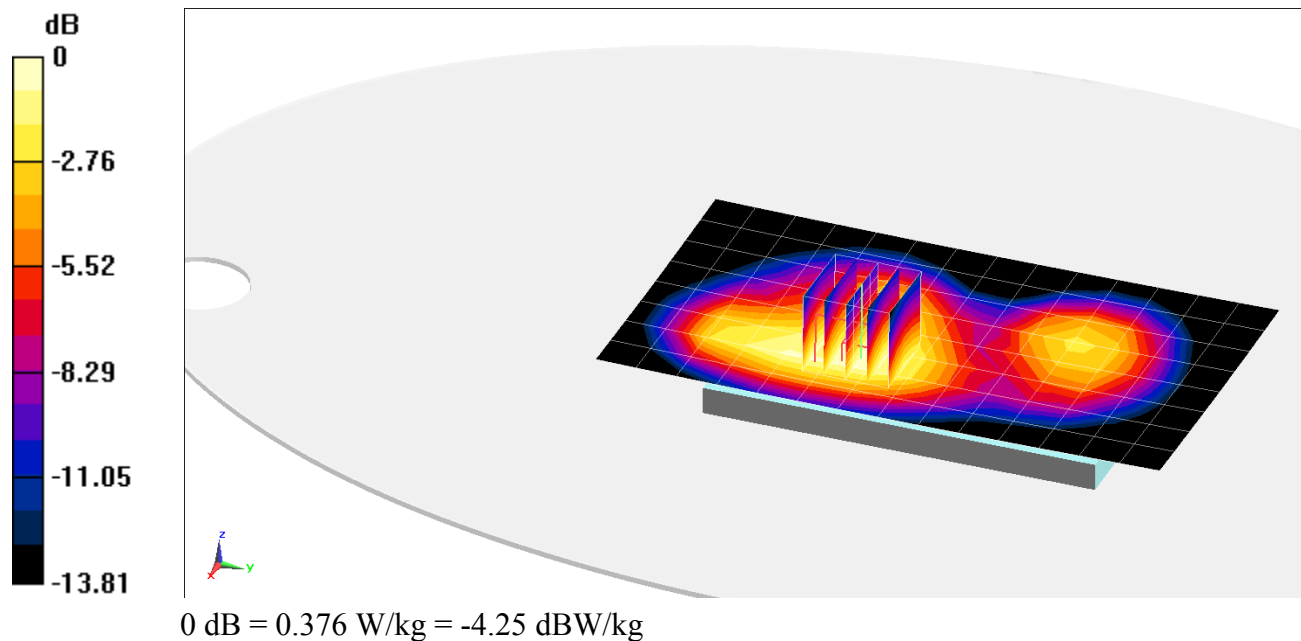

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 52.553$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Body SAR, Front Side, Mid.ch, 3 Tx Slots, Standard Cover


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.250 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.740 W/kg

SAR(1 g) = 0.390 W/kg

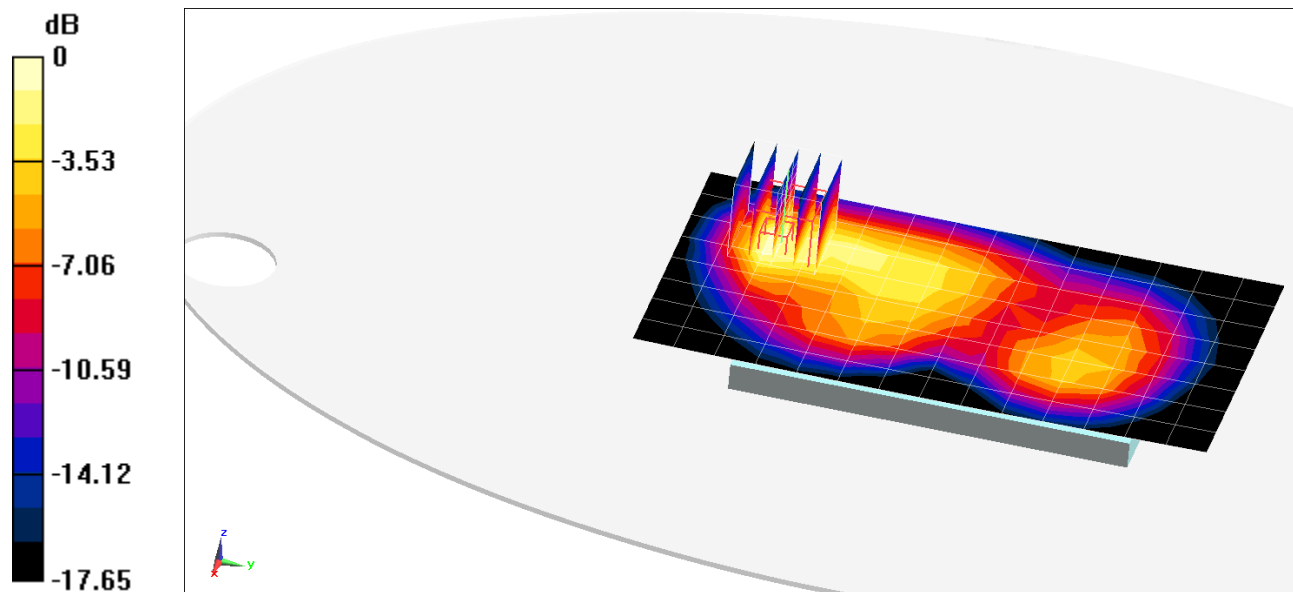

0 dB = 0.491 W/kg = -3.09 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 52.553$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch, Standard Cover


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.295 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.912 W/kg

SAR(1 g) = 0.614 W/kg

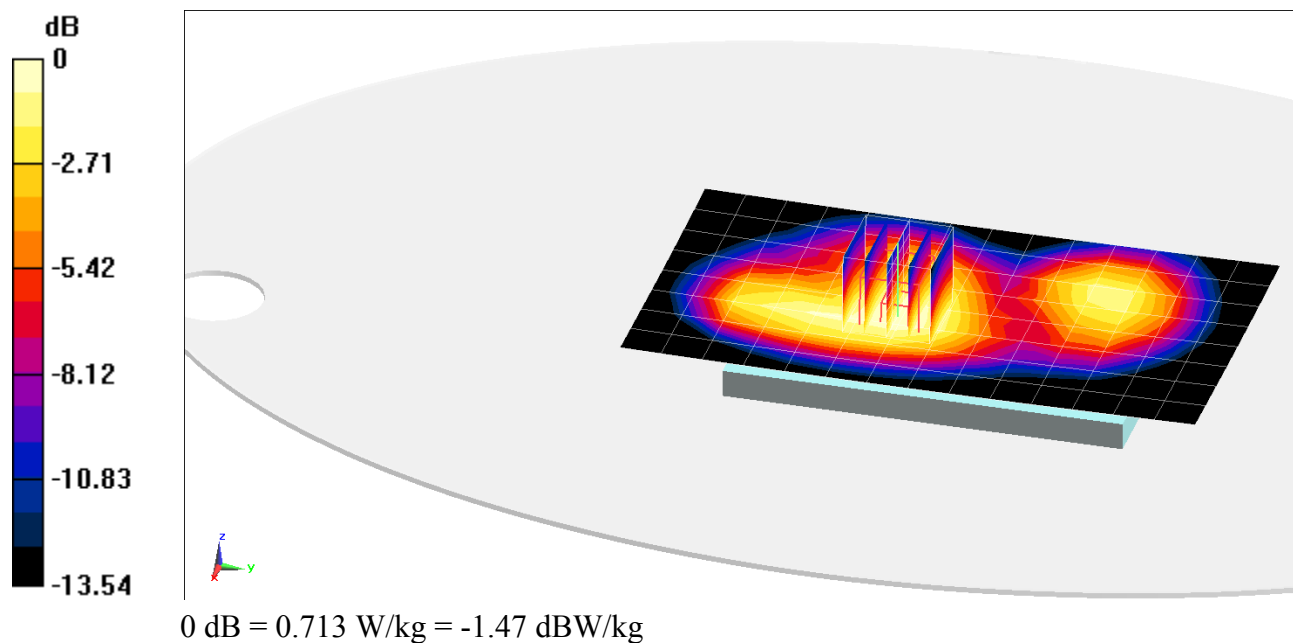

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUC9

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 52.553$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Front side, Mid.ch, Standard Cover


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.684 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.888 W/kg

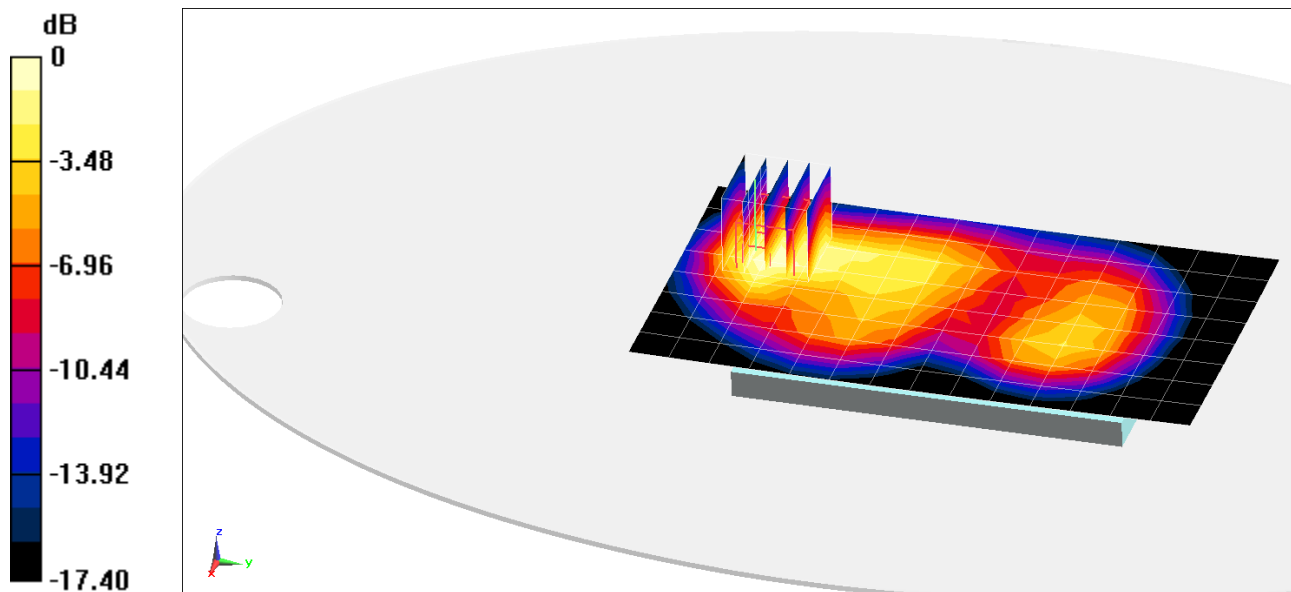

0 dB = 1.09 W/kg = 0.37 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUBN

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 55.067$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 12, Body SAR, Back side, Mid.ch, Standard Cover

10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.314 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.365 W/kg

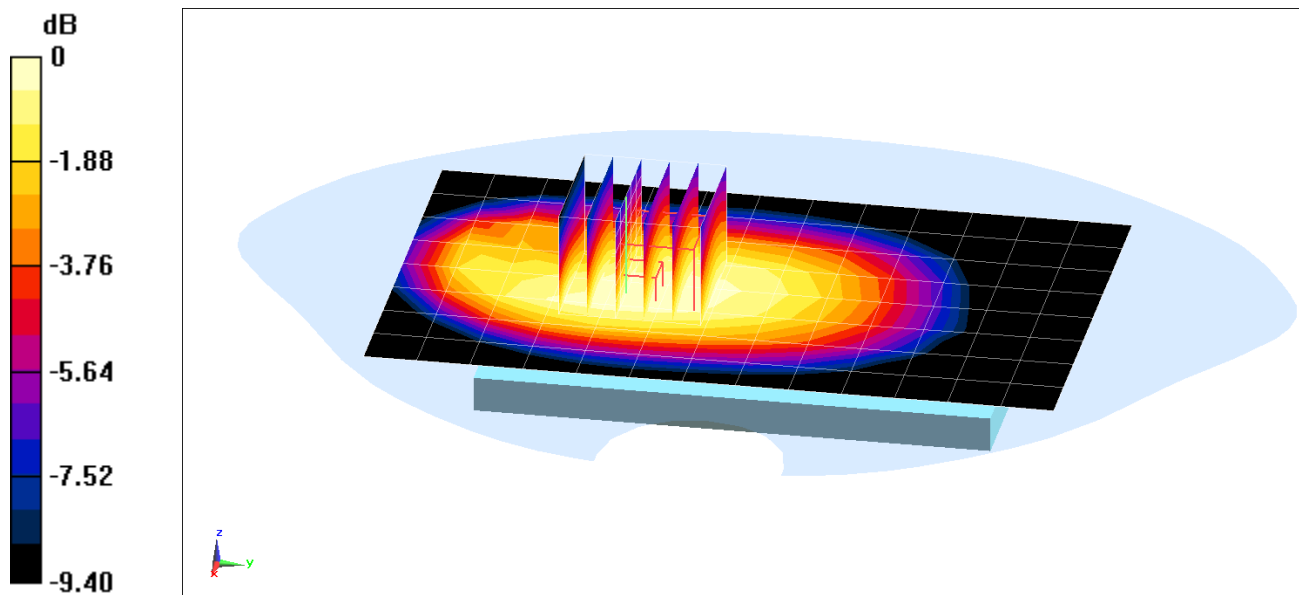

0 dB = 0.399 W/kg = -3.99 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUBN

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 55.067$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 12, Body SAR, Front side, Mid.ch, Standard Cover
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.800 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.464 W/kg

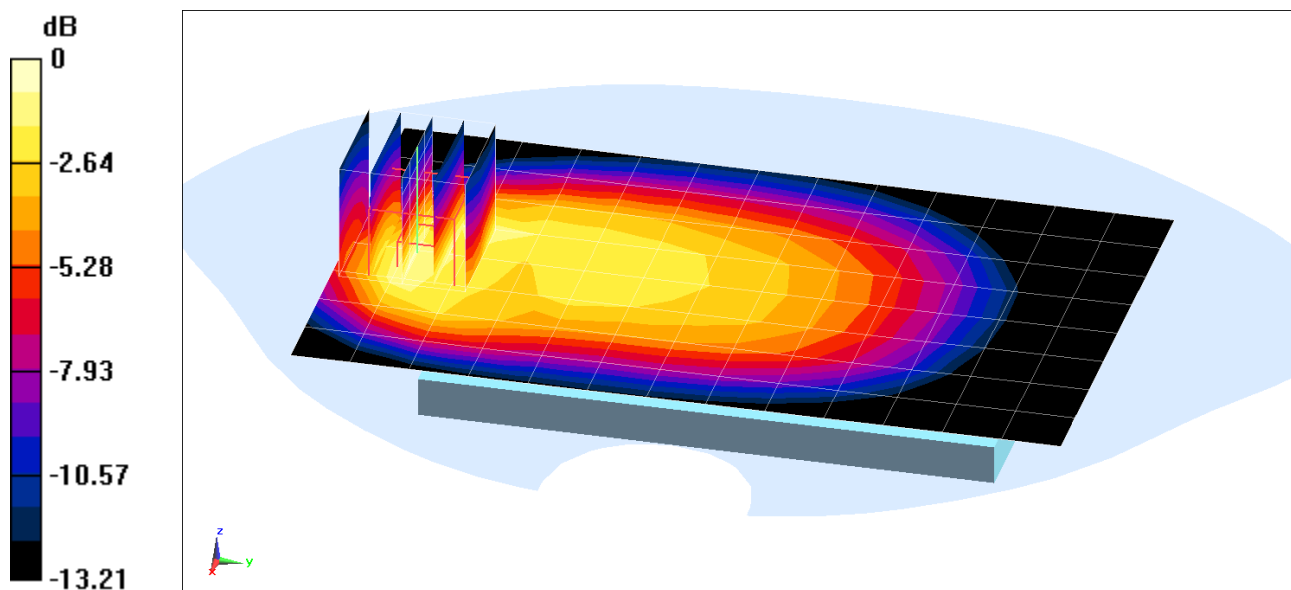

0 dB = 0.550 W/kg = -2.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUBN

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.998 \text{ S/m}$; $\epsilon_r = 53.902$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2015; Ambient Temp: 23.6°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch, Standard Cover
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.529 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.654 W/kg

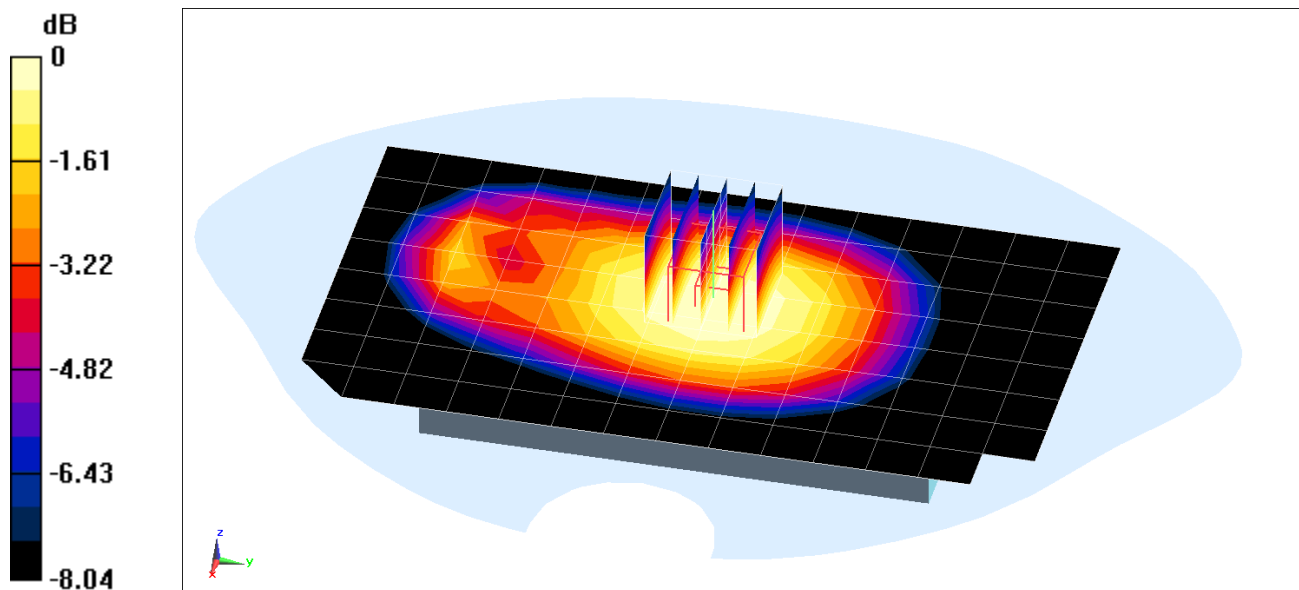

0 dB = 0.717 W/kg = -1.44 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUHU

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 52.878$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch, Quick Cover Closed
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.393 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.840 W/kg

SAR(1 g) = 0.571 W/kg

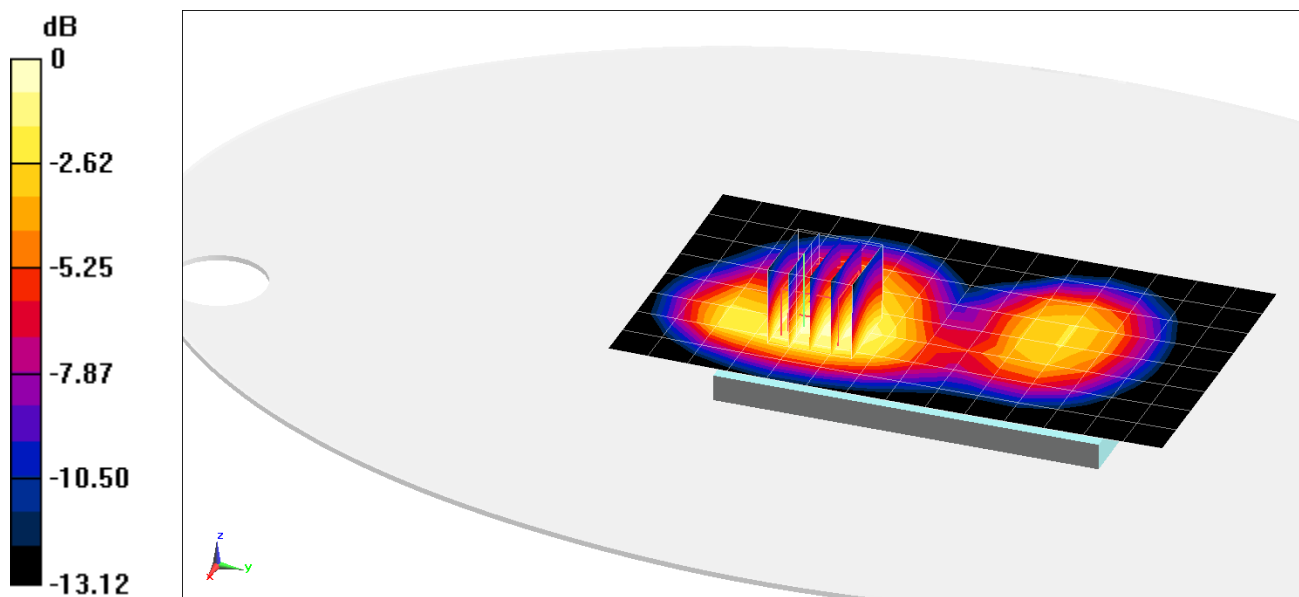

0 dB = 0.664 W/kg = -1.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUHU

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 52.878$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 4 (AWS), Body SAR, Front side, Mid.ch, Standard Cover
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.765 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.796 W/kg

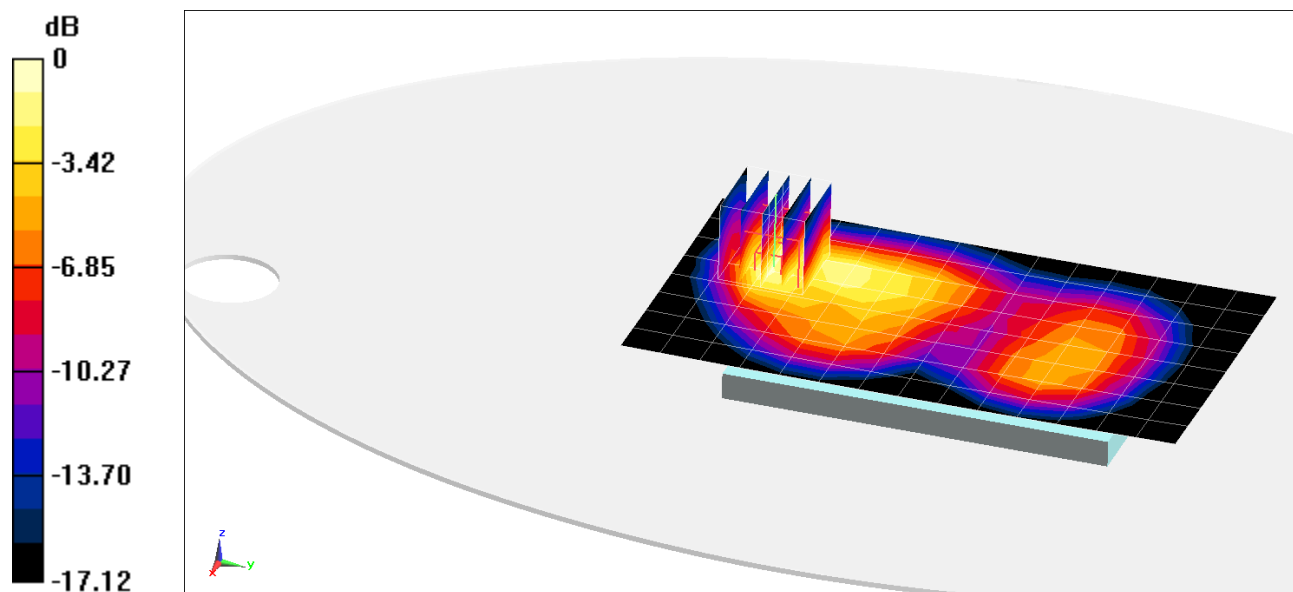

0 dB = 1.06 W/kg = 0.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUBN

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.527 \text{ S/m}$; $\epsilon_r = 52.268$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 2 (PCS), Body SAR, Back Side, High.ch, Standard Cover
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.061 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.562 W/kg

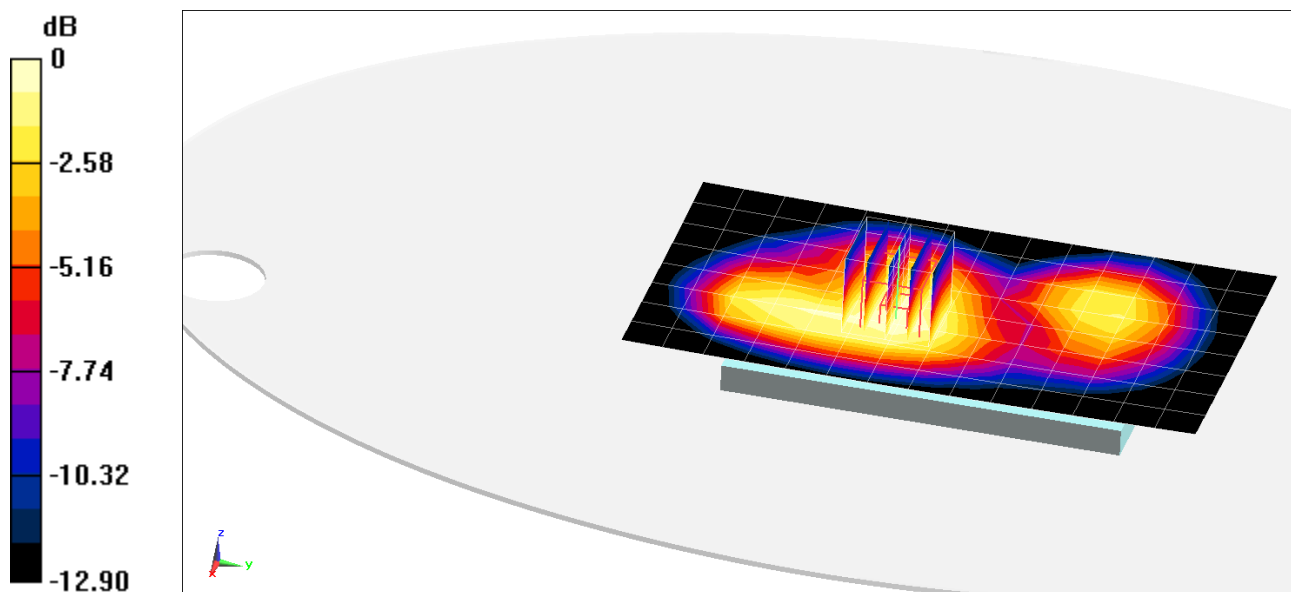

0 dB = 0.651 W/kg = -1.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUBN

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 52.423$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 2 (PCS), Body SAR, Front Side, Low.ch, Standard Cover
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.806 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.946 W/kg

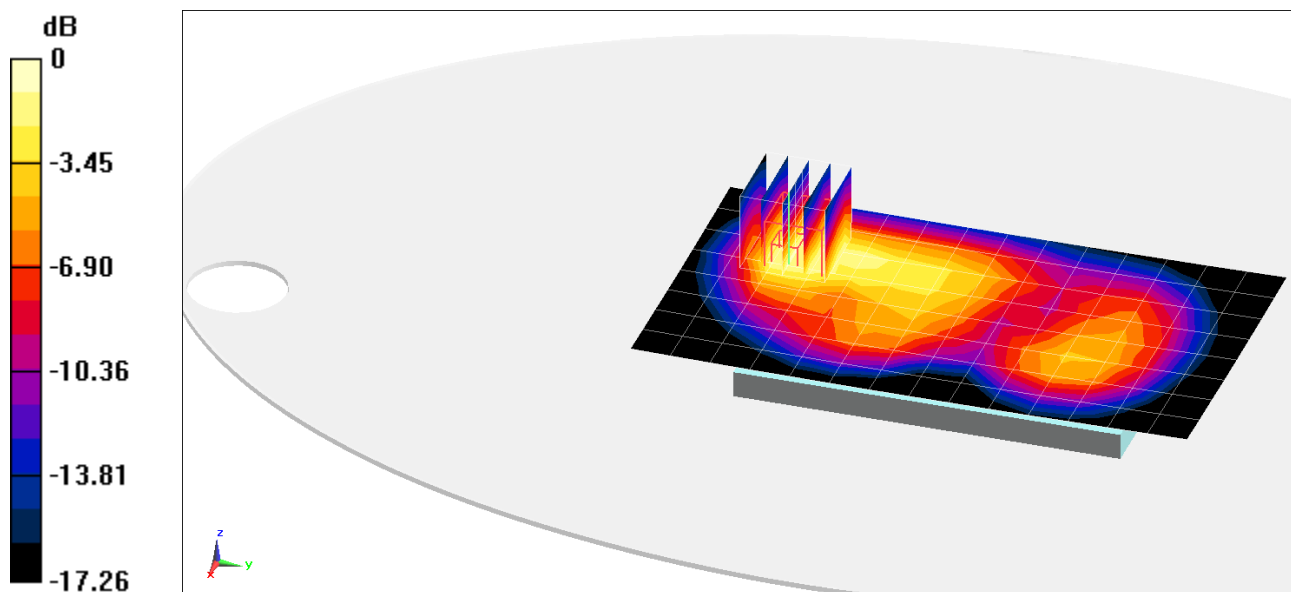

0 dB = 1.18 W/kg = 0.72 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUHU

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2600 Body Medium parameters used (interpolated):

$f = 2535 \text{ MHz}$; $\sigma = 2.163 \text{ S/m}$; $\epsilon_r = 50.465$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.4°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3334; ConvF(4.16, 4.16, 4.16); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 7, Body SAR, Back side, Mid.ch, Quick Cover Closed
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.792 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.404 W/kg

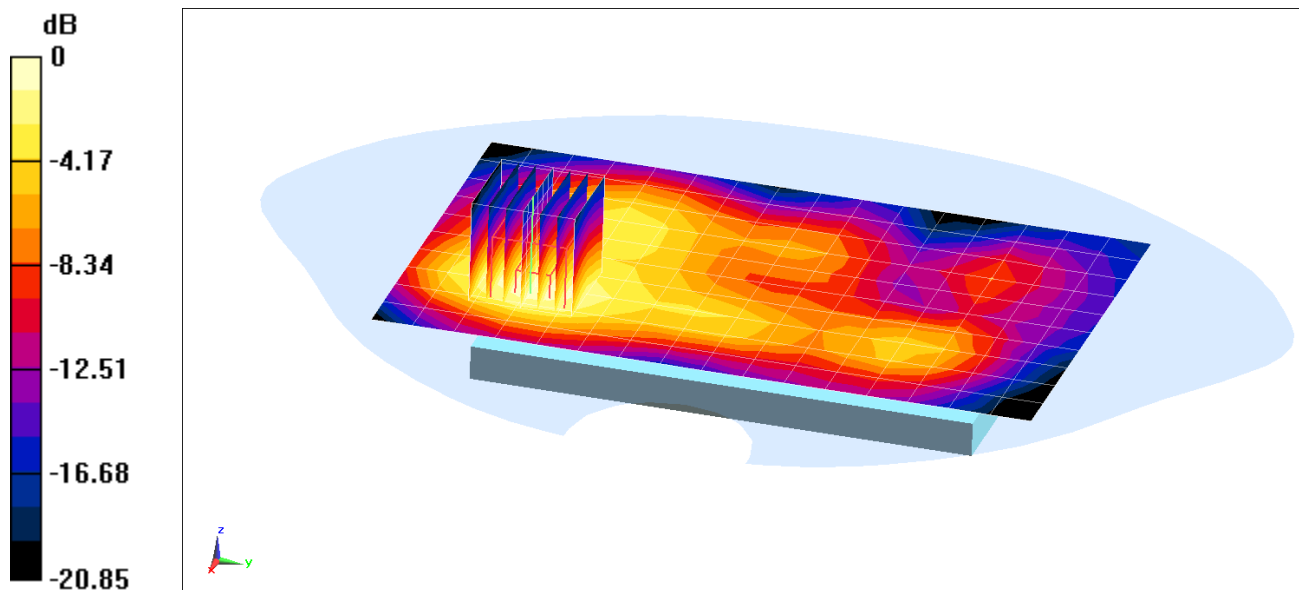

0 dB = 0.499 W/kg = -3.02 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUHU

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2600 Body Medium parameters used (interpolated):

$f = 2535 \text{ MHz}$; $\sigma = 2.163 \text{ S/m}$; $\epsilon_r = 50.465$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.4°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3334; ConvF(4.16, 4.16, 4.16); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: LTE Band 7, Body SAR, Front side, Mid.ch, Standard Cover
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.309 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.873 W/kg

SAR(1 g) = 0.462 W/kg

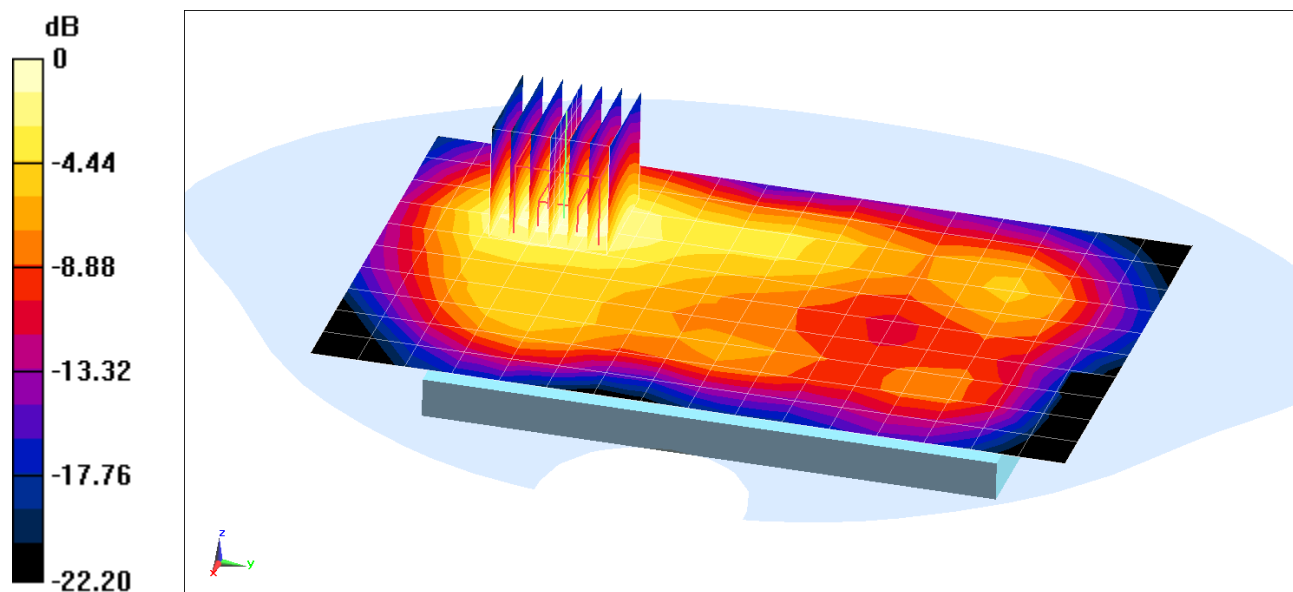

0 dB = 0.577 W/kg = -2.39 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUDS

Communication System: UID 0, IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.024 \text{ S/m}$; $\epsilon_r = 50.82$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.4°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3334; ConvF(4.28, 4.28, 4.28); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 6, 1 Mbps,
Back Side, Quick Cover Closed**


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.077 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.167 W/kg

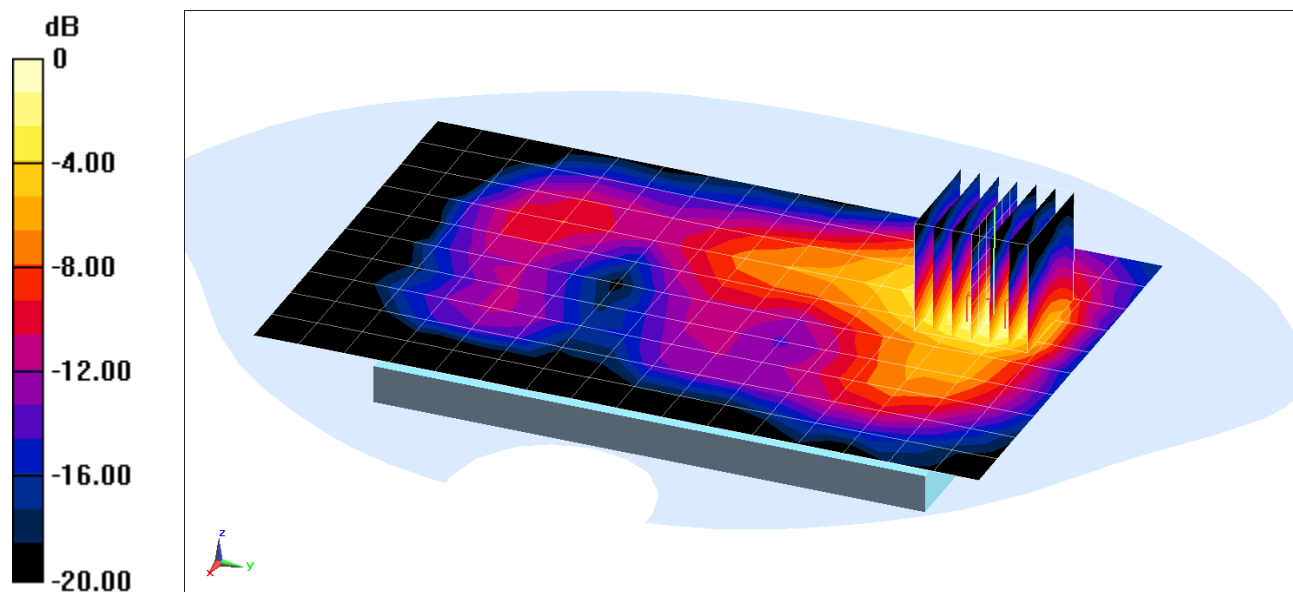

0 dB = 0.218 W/kg = -6.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUDS

Communication System: UID 0, IEEE 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5260 \text{ MHz}$; $\sigma = 5.404 \text{ S/m}$; $\epsilon_r = 47.002$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(4.33, 4.33, 4.33); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, 5.3 GHz, 20 MHz Bandwidth, Body SAR, Ch 52, 6 Mbps,
Back Side, Standard Cover**


Area Scan (13x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 5.878 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.180 W/kg

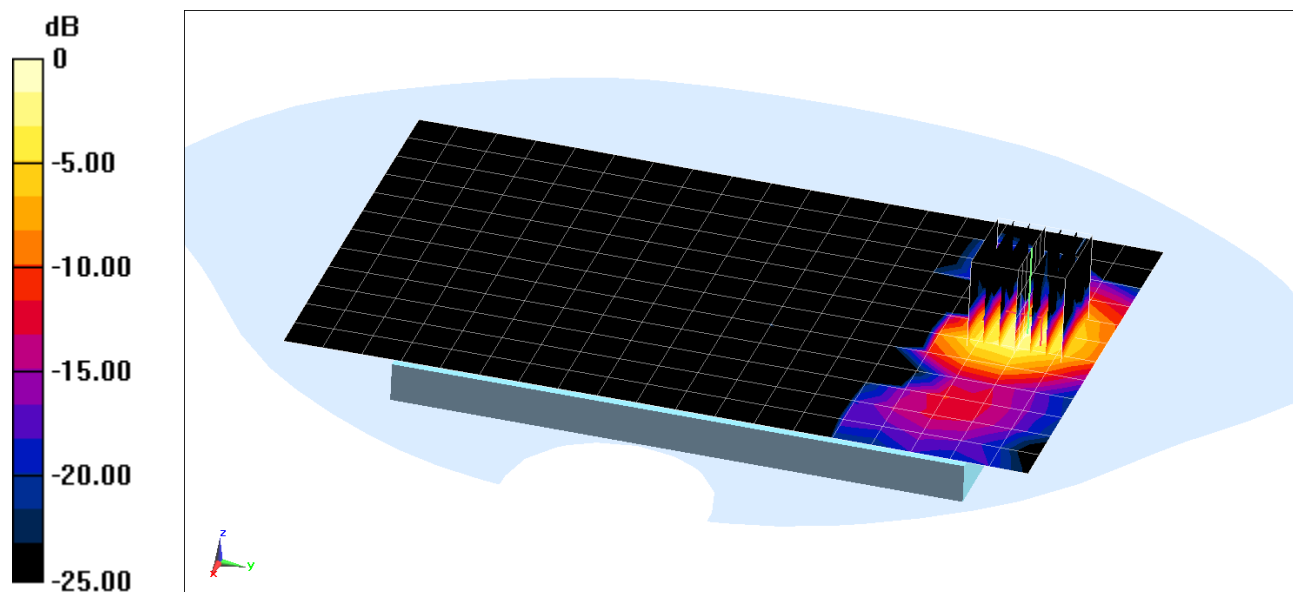

0 dB = 0.427 W/kg = -3.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUDS

Communication System: UID 0, IEEE 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5825 \text{ MHz}$; $\sigma = 6.152 \text{ S/m}$; $\epsilon_r = 46.157$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3914; ConvF(4.01, 4.01, 4.01); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, 5.8 GHz, 20 MHz Bandwidth, Body SAR, Ch 165, 6 Mbps,
Top Edge, Standard Cover**


Area Scan (11x13x1): Measurement grid: $dx=5\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 3.941 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.091 W/kg

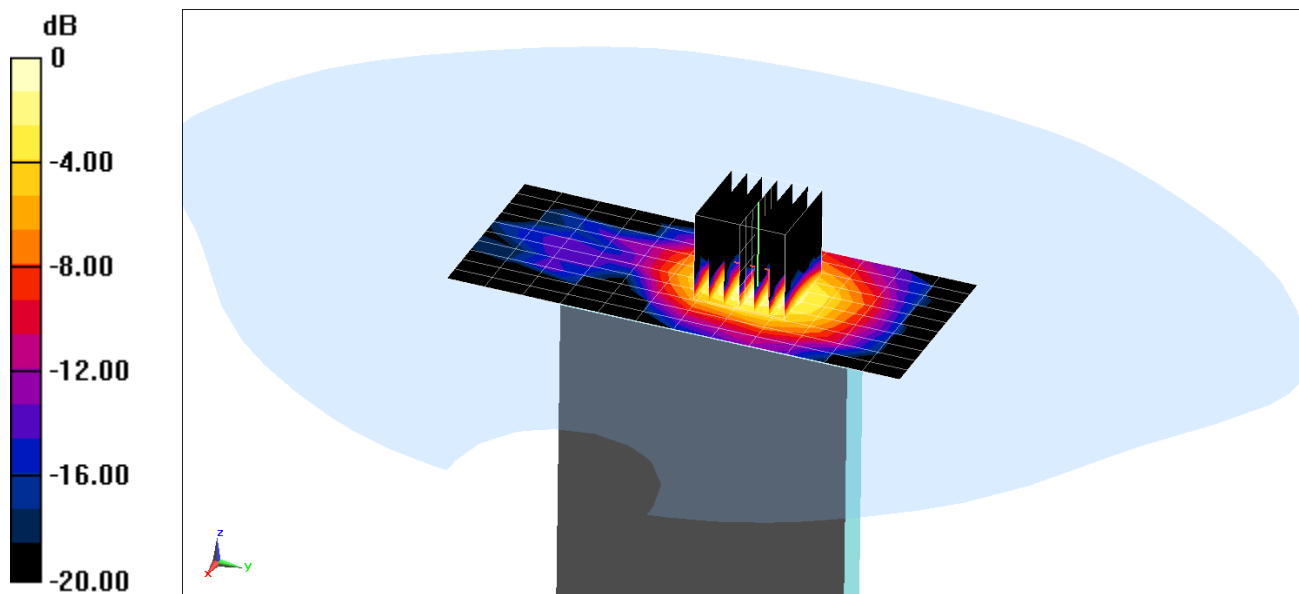

0 dB = 0.243 W/kg = -6.14 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFH811; Type: Portable Handset; Serial: 1VUDS

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5260 \text{ MHz}$; $\sigma = 5.404 \text{ S/m}$; $\epsilon_r = 47.002$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(4.33, 4.33, 4.33); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, 5.3 GHz, 20 MHz Bandwidth, Extremity SAR, Ch 52, 6 Mbps,
Top Edge, Standard Cover**


Area Scan (9x17x1): Measurement grid: $dx=5\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 15.603 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 10.8 W/kg

SAR(10 g) = 0.319 W/kg

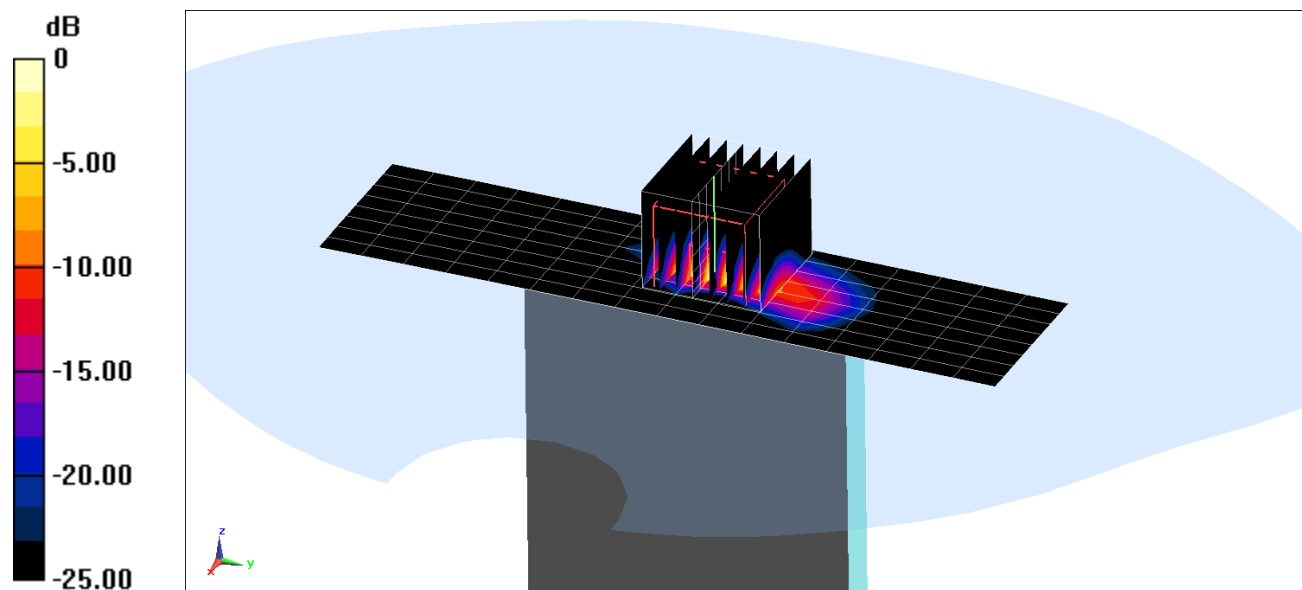

0 dB = 5.84 W/kg = 7.66 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 41.114$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-20-2015; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(6.58, 6.58, 6.58); Calibrated: 1/23/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/14/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.816 W/kg

Deviation(1 g) = -1.45 %

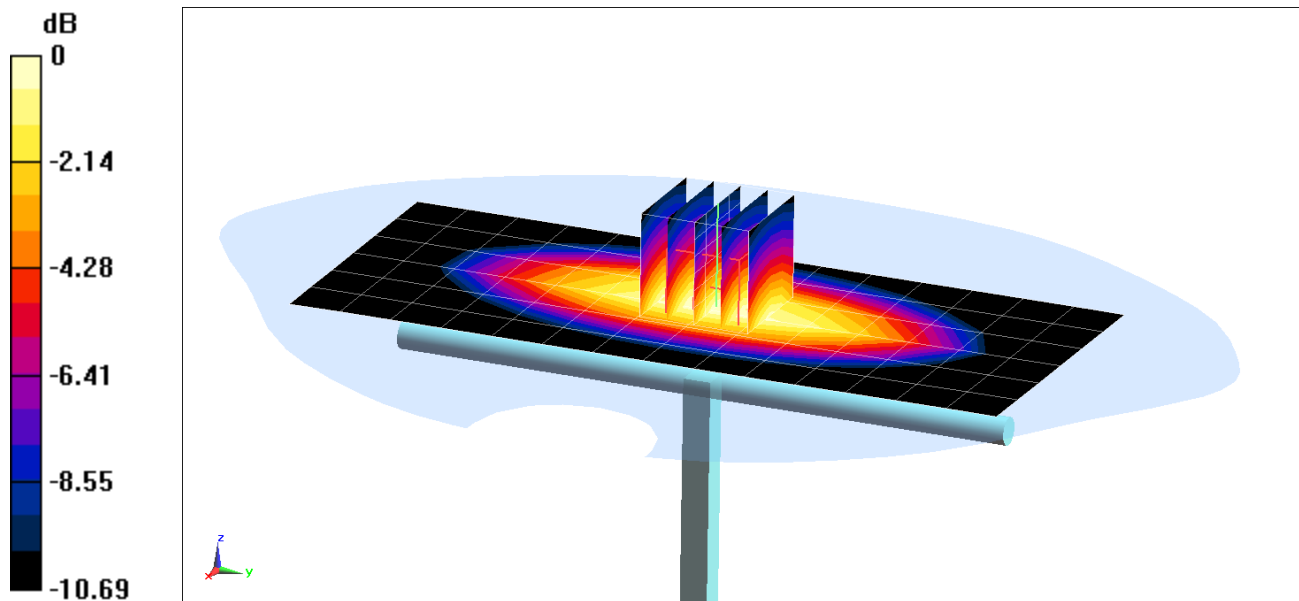

0 dB = 0.960 W/kg = -0.18 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 41.58$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-14-2015; Ambient Temp: 21.3°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3333; ConvF(6.33, 6.33, 6.33); Calibrated: 10/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1408; Calibrated: 10/23/2014

Phantom: Main TWIN SAM; Type: QD000P40CC; Serial: TP-1406

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.986 W/kg

Deviation(1 g) = 6.59%

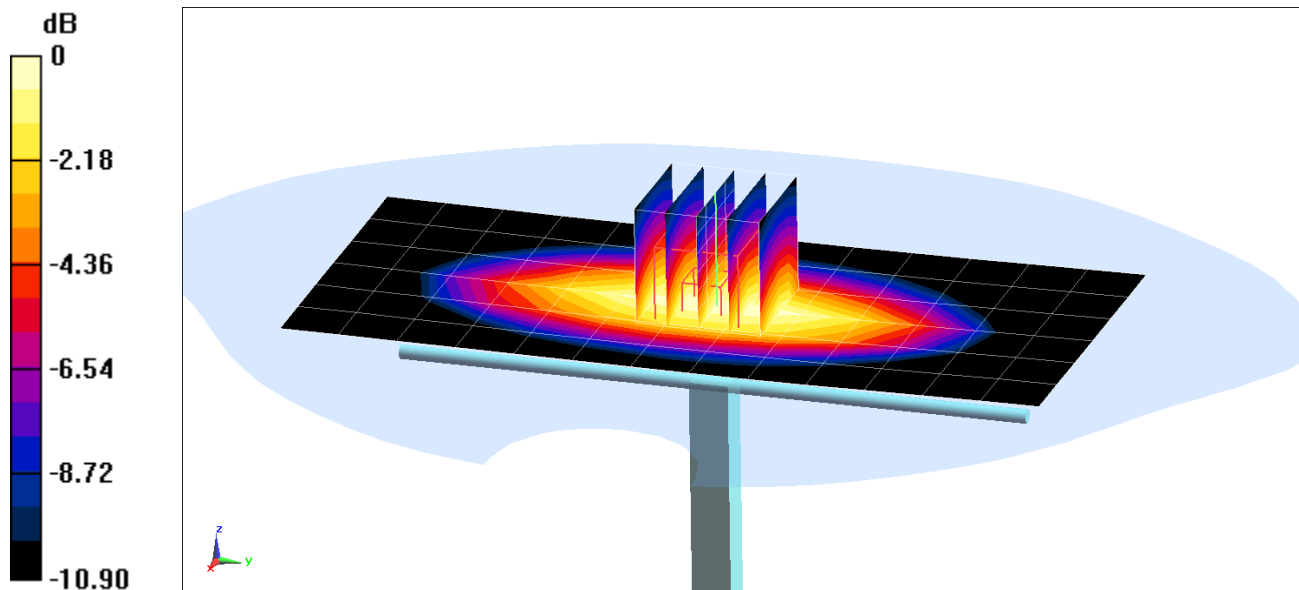

0 dB = 1.16 W/kg = 0.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.393 \text{ S/m}$; $\epsilon_r = 39.443$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-14-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3334; ConvF(5.21, 5.21, 5.21); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 6.92 W/kg

SAR(1 g) = 3.84 W/kg

Deviation(1 g) = 4.07 %

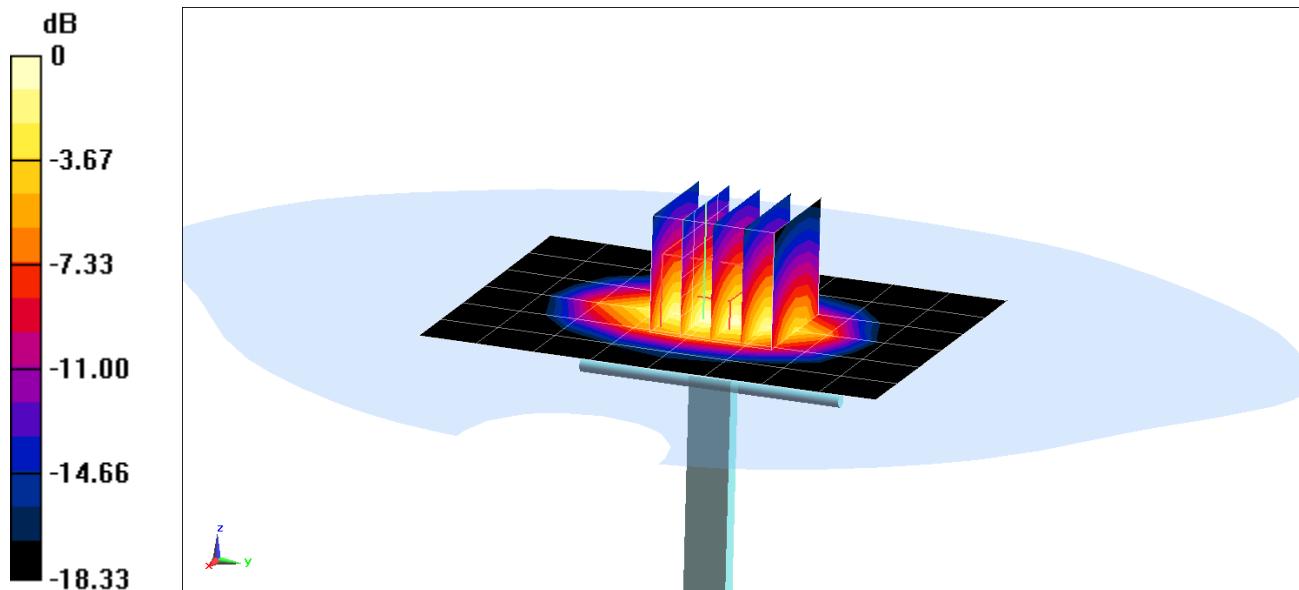

0 dB = 4.80 W/kg = 6.81 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.427 \text{ S/m}$; $\epsilon_r = 38.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 21.9°C; Tissue Temp: 21.8°C

Probe: ES3DV2 - SN3022; ConvF(4.85, 4.85, 4.85); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.78 W/kg

SAR(1 g) = 4.30 W/kg

Deviation(1 g) = 6.97%

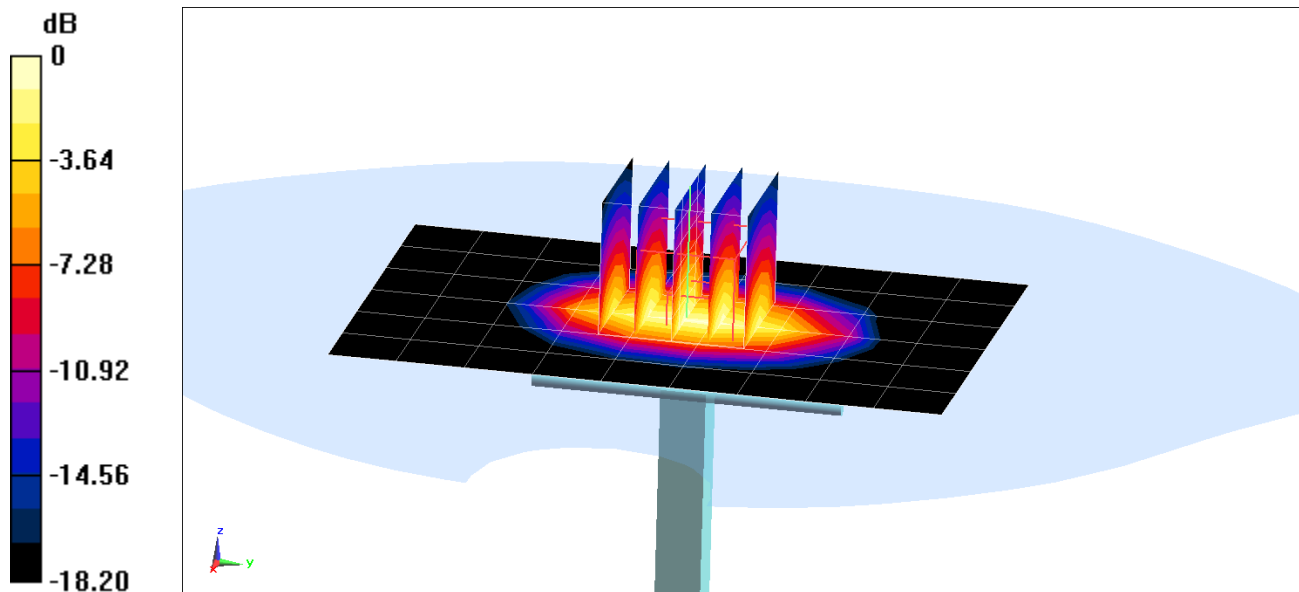

0 dB = 5.39 W/kg = 7.32 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.455 \text{ S/m}$; $\epsilon_r = 41.127$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.1°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(5.17, 5.17, 5.17); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1797

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.45 W/kg

SAR(1 g) = 4.01 W/kg

Deviation(1 g) = -0.25%

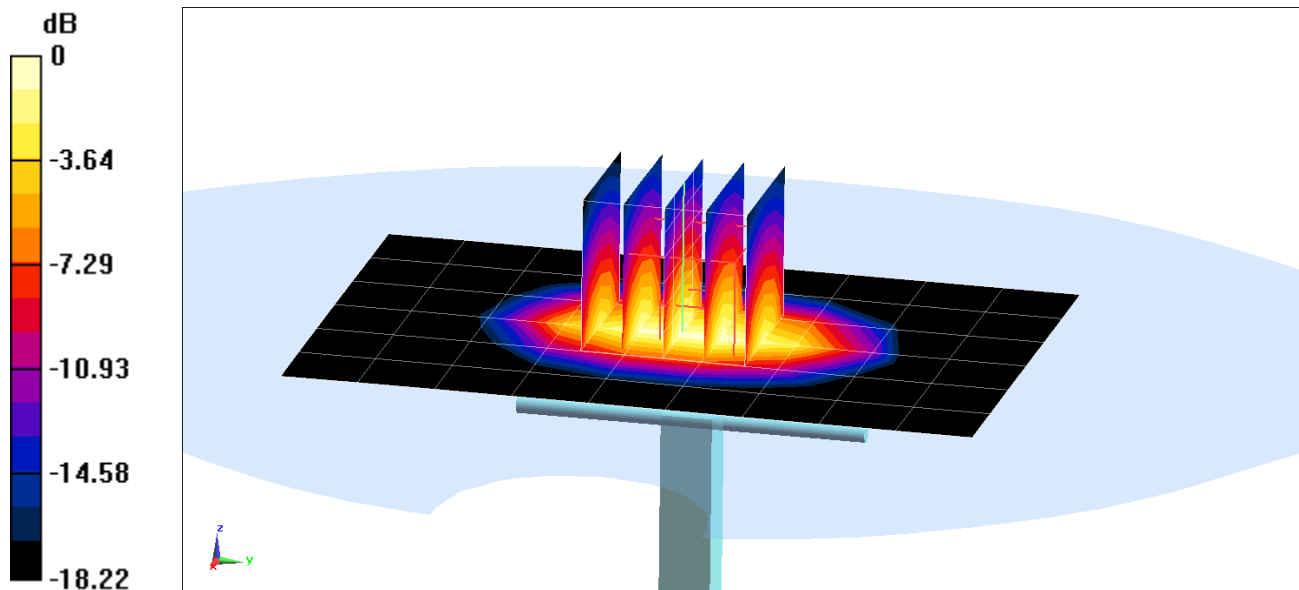

0 dB = 5.10 W/kg = 7.08 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.821 \text{ S/m}$; $\epsilon_r = 38.065$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-15-2015; Ambient Temp: 21.1°C; Tissue Temp: 22.7°C

Probe: ES3DV3 - SN3258; ConvF(4.61, 4.61, 4.61); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.57 W/kg

Deviation(1 g) = 6.91%

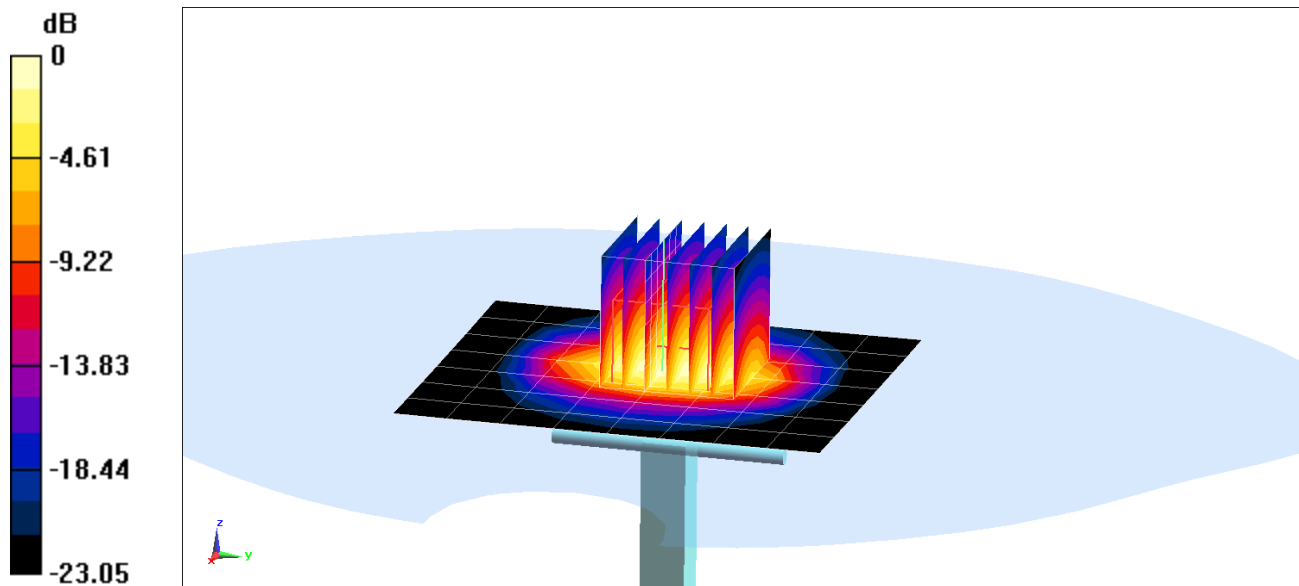

0 dB = 7.27 W/kg = 8.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1071

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Head Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 1.987 \text{ S/m}$; $\epsilon_r = 37.57$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.7°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3258; ConvF(4.38, 4.38, 4.38); Calibrated: 2/27/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/18/2015

Phantom: SAM with CRP v5.0; Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2600 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 13.0 W/kg

SAR(1 g) = 5.99 W/kg

Deviation(1 g) = 4.17%

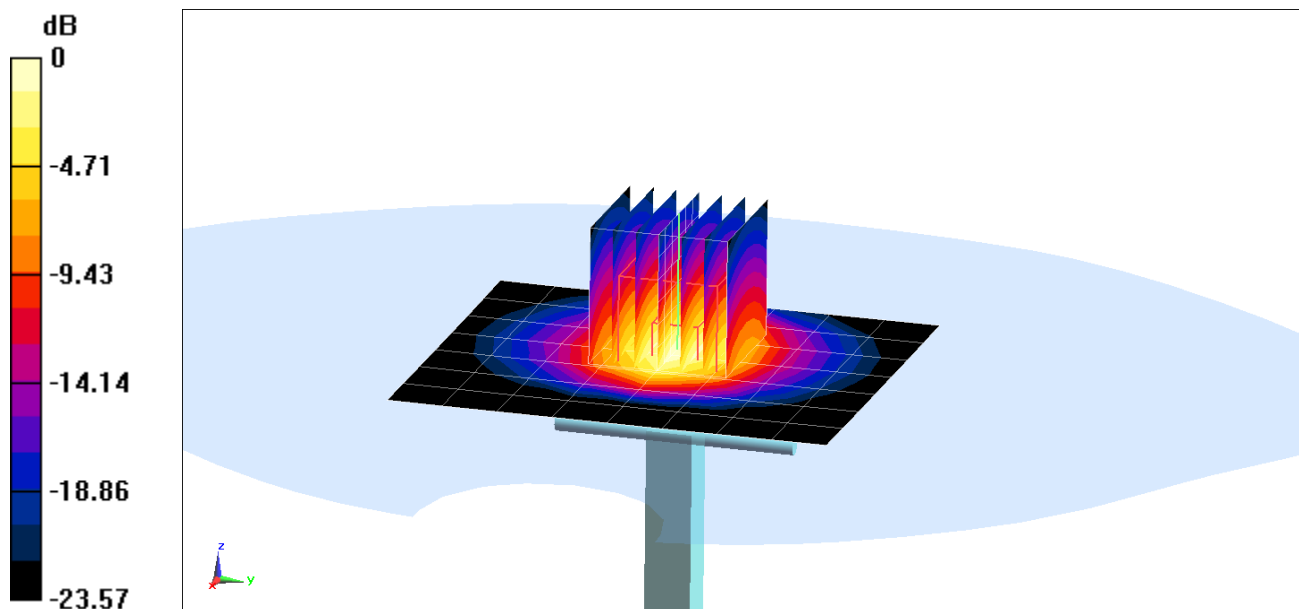

0 dB = 8.02 W/kg = 9.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 4.581 \text{ S/m}$; $\epsilon_r = 35.811$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(5.06, 5.06, 5.06); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5300 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 4.09 W/kg

Deviation(1 g) = -4.66%

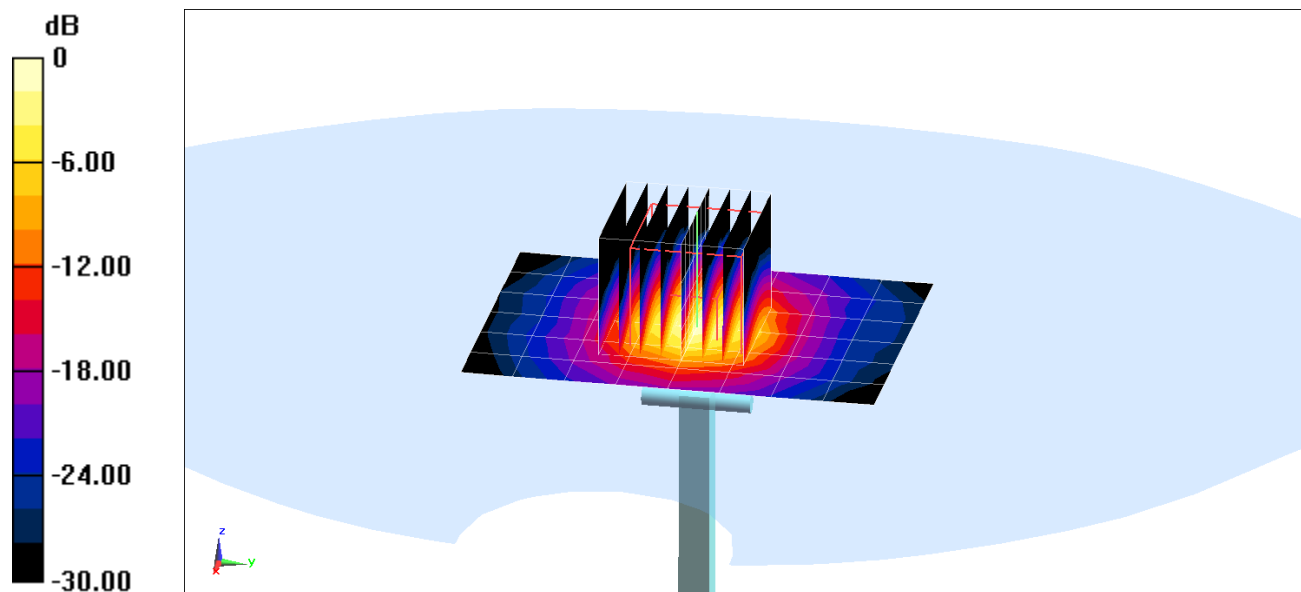

0 dB = 10.5 W/kg = 10.21 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 4.898 \text{ S/m}$; $\epsilon_r = 35.371$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.73, 4.73, 4.73); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5600 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 4.14 W/kg

Deviation(1 g) = -4.72%

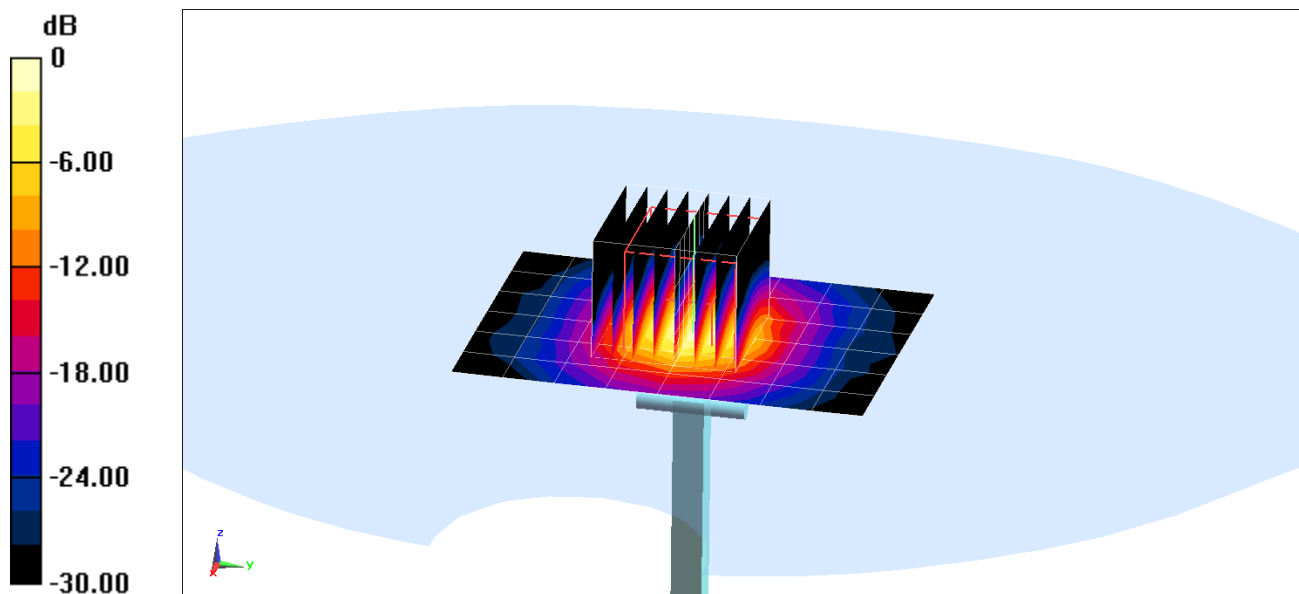

0 dB = 10.8 W/kg = 10.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 5.101 \text{ S/m}$; $\epsilon_r = 35.064$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 22.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(4.67, 4.67, 4.67); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Main ; Type: QD000P40CC; Serial: TP 1114

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5800 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 3.97 W/kg

Deviation(1 g) = -3.52%

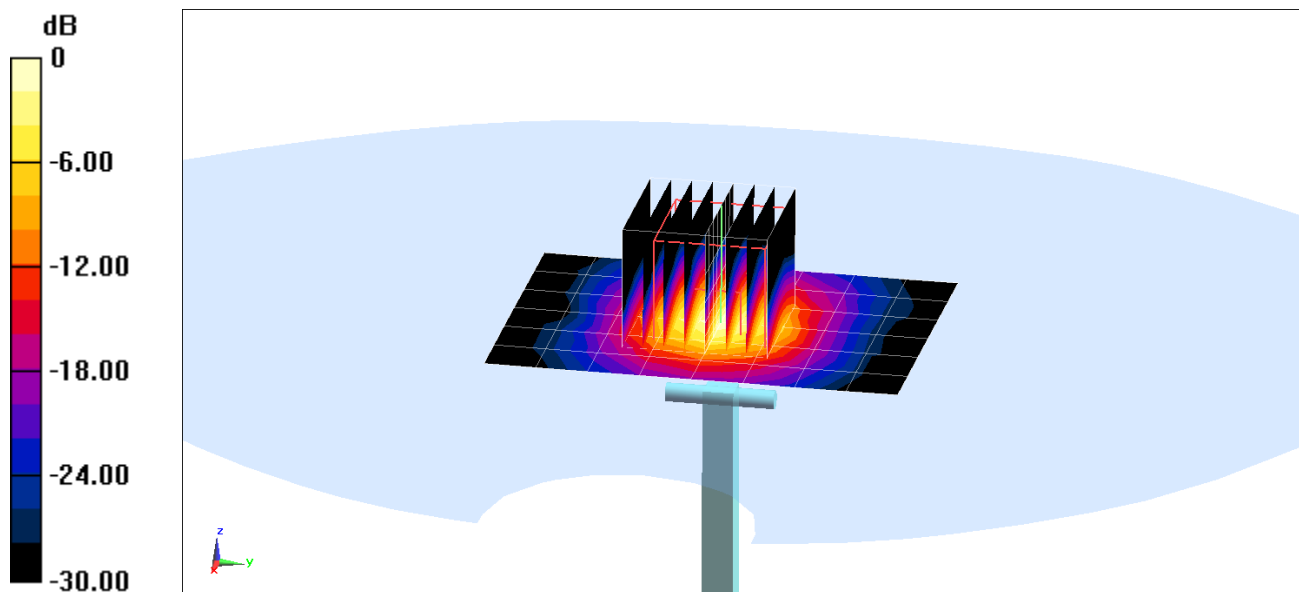

0 dB = 10.6 W/kg = 10.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.971 \text{ S/m}$; $\epsilon_r = 54.601$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-15-2015; Ambient Temp: 22.1°C; Tissue Temp: 21.9°C

Probe: ES3DV3 - SN3332; ConvF(6.24, 6.24, 6.24); Calibrated: 9/18/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/17/2014

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.857 W/kg

Deviation(1 g) = 0.47%

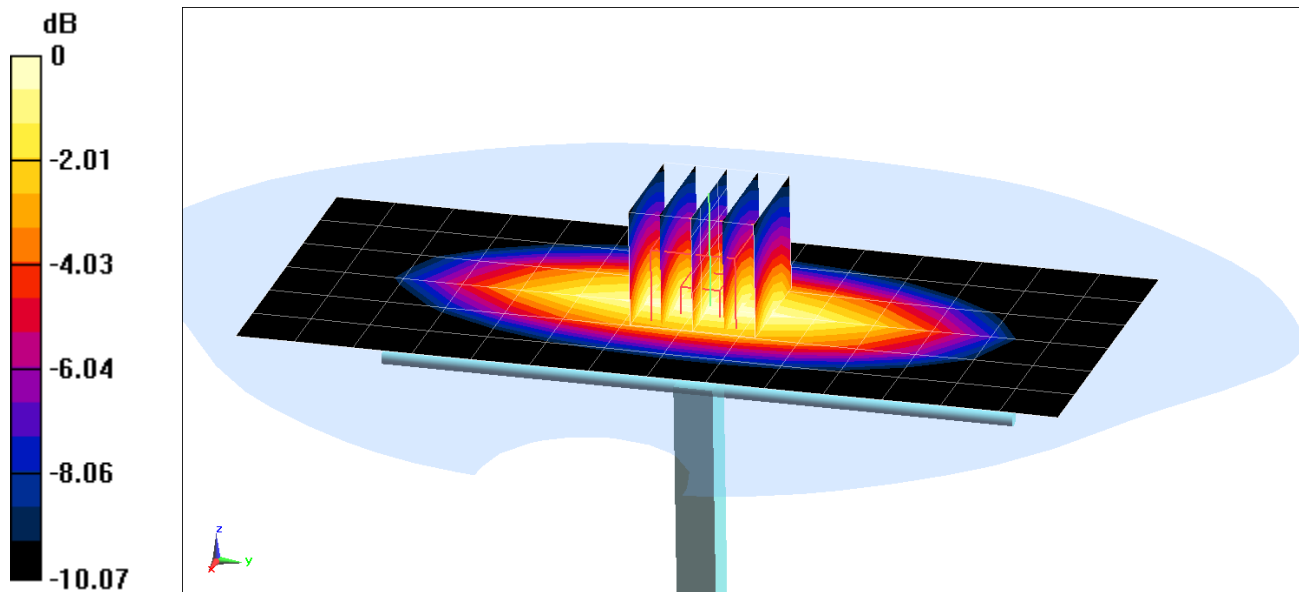

0 dB = 0.996 W/kg = -0.02 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.996 \text{ S/m}$; $\epsilon_r = 53.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-20-2015; Ambient Temp: 22.5°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(6.07, 6.07, 6.07); Calibrated: 3/19/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/13/2015

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.02 W/kg

Deviation(1 g) = 9.09%

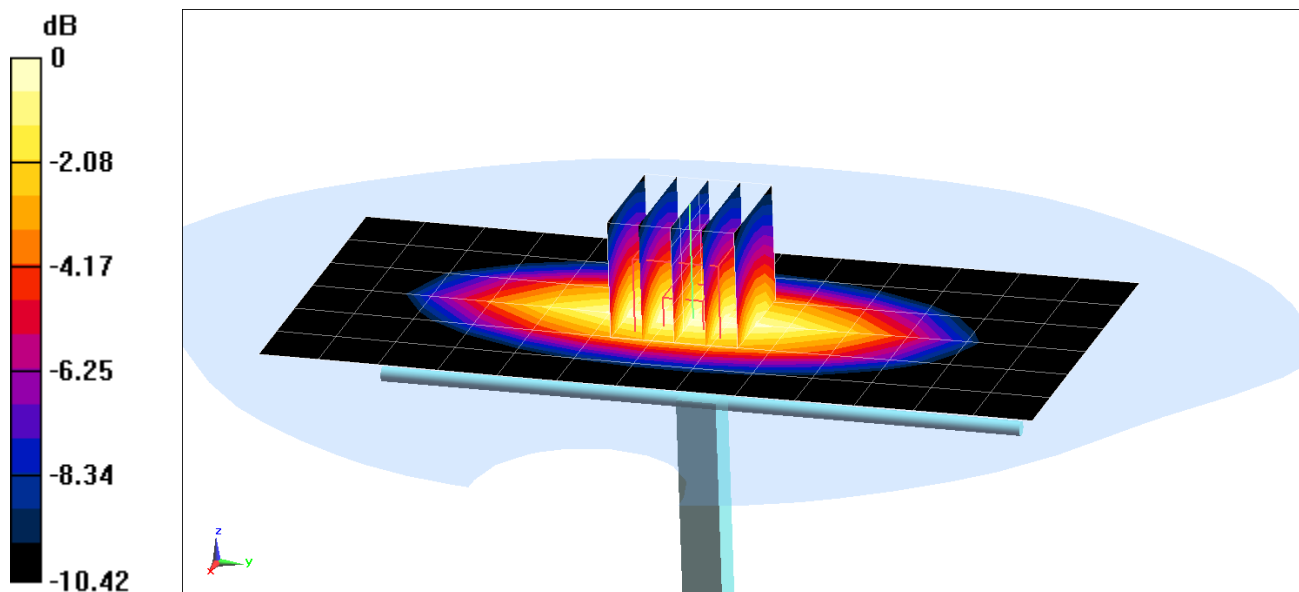

0 dB = 1.19 W/kg = 0.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.468 \text{ S/m}$; $\epsilon_r = 52.838$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.0°C; Tissue Temp: 22.1°C

Probe: ES3DV2 - SN3022; ConvF(4.7, 4.7, 4.7); Calibrated: 8/19/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/12/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1226

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 6.45 W/kg

SAR(1 g) = 3.72 W/kg

Deviation(1 g) = -1.06%

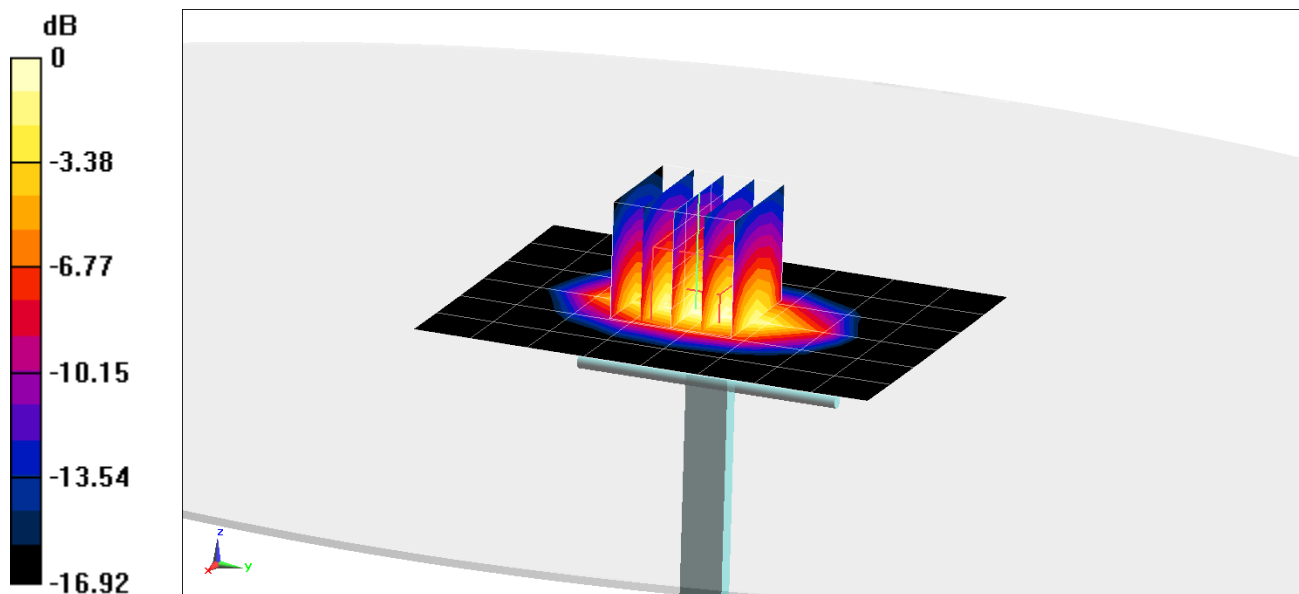

0 dB = 4.58 W/kg = 6.61 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.527 \text{ S/m}$; $\epsilon_r = 52.268$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3288; ConvF(4.82, 4.82, 4.82); Calibrated: 9/24/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1364; Calibrated: 9/18/2014

Phantom: ELI v5.0; Type: QDOVA001BB; Serial: 1229

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.44 W/kg

SAR(1 g) = 4.21 W/kg

Deviation(1 g) = 4.21%

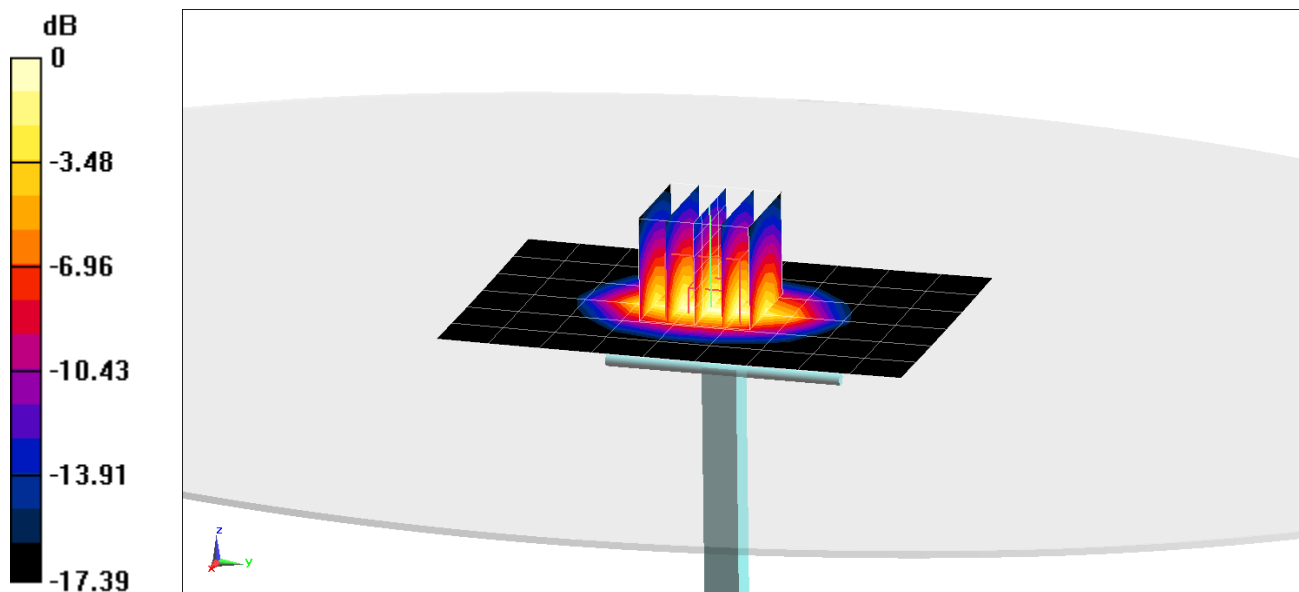

0 dB = 5.33 W/kg = 7.27 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 882

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.041 \text{ S/m}$; $\epsilon_r = 50.778$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.4°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3334; ConvF(4.28, 4.28, 4.28); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 5.44 W/kg

Deviation(1 g) = 7.30%

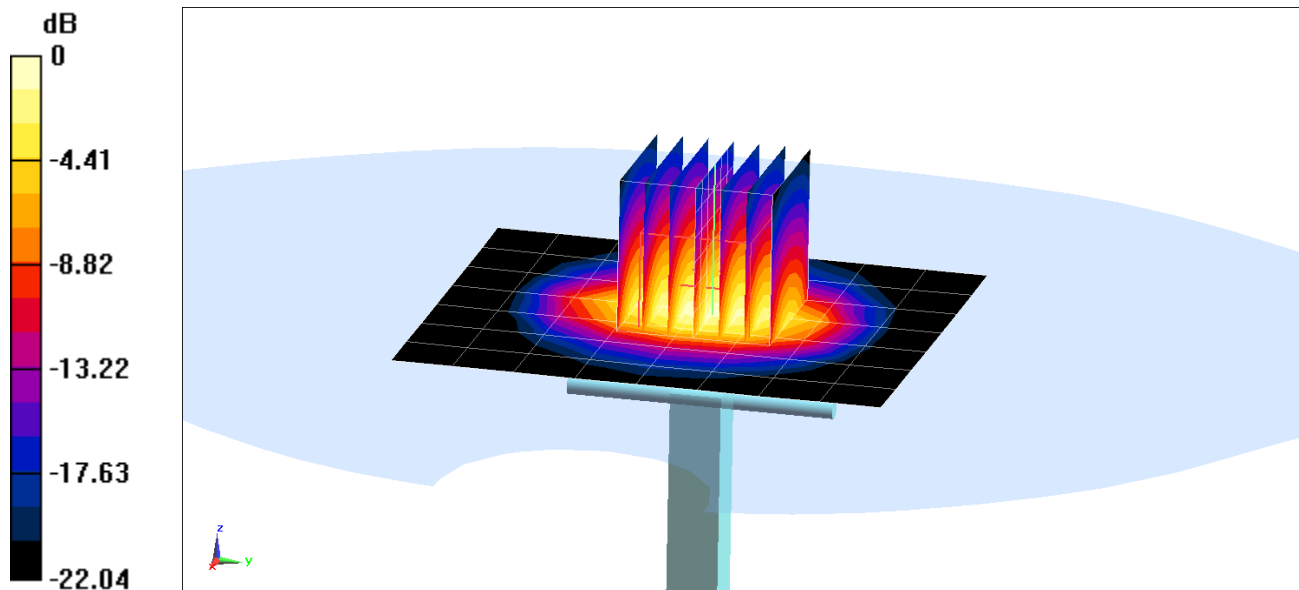

0 dB = 7.18 W/kg = 8.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2600 MHz; Type: D2600V2; Serial: 1071

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2500 Body Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.25 \text{ S/m}$; $\epsilon_r = 50.245$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-20-2015; Ambient Temp: 23.4°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3334; ConvF(4.16, 4.16, 4.16); Calibrated: 12/16/2014;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 12/12/2014

Phantom: Sub Twin Sam v5.0; Type: QD000P40CD; Serial: TP:1626

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2600 MHz System Verification

Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 13.2 W/kg

SAR(1 g) = 6.07 W/kg

Deviation(1 g) = 6.68%

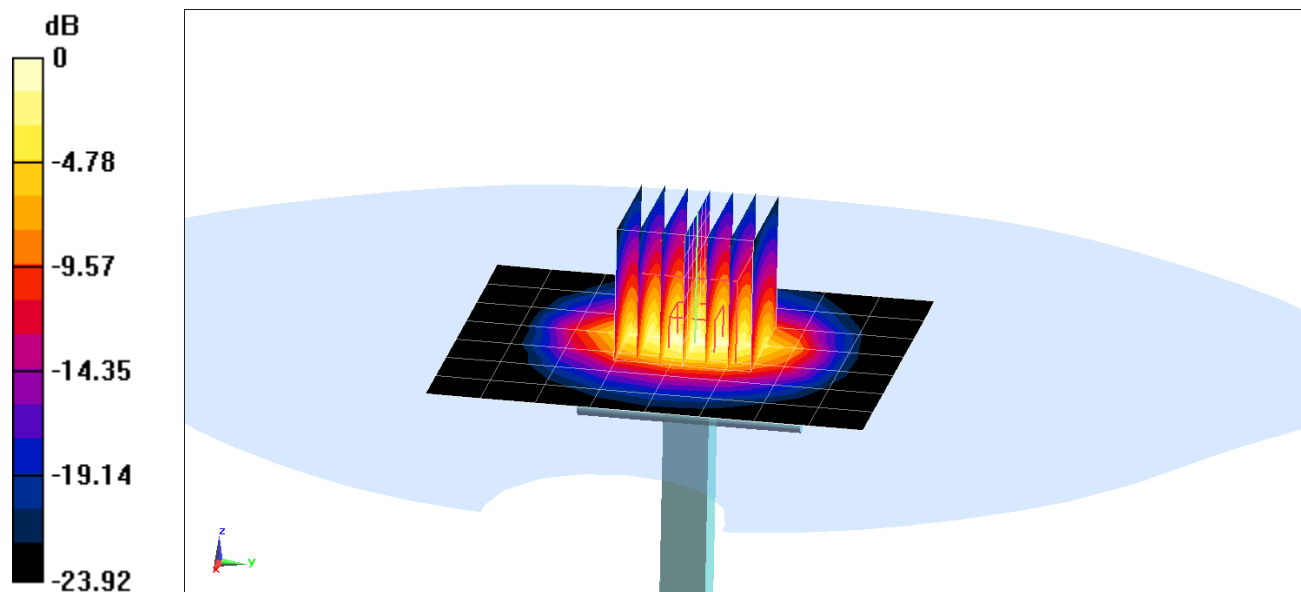

0 dB = 8.06 W/kg = 9.06 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 5300 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 5.464 \text{ S/m}$; $\epsilon_r = 46.965$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(4.33, 4.33, 4.33); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5300 MHz System Verification

Area Scan (7x8x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 3.92 W/kg; SAR(10 g) = 1.08 W/kg

Deviation(1 g) = -1.88%; Deviation(10 g) = -3.14%

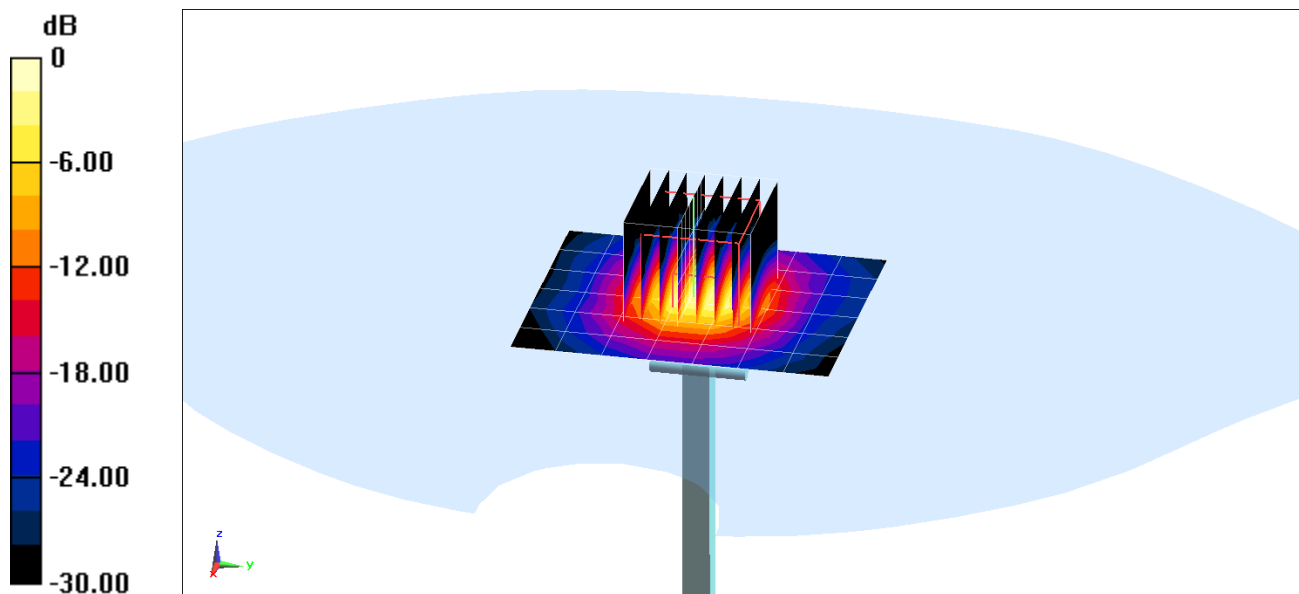

0 dB = 9.18 W/kg = 9.63 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 5600 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.857 \text{ S/m}$; $\epsilon_r = 46.428$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3914; ConvF(3.89, 3.89, 3.89); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5600 MHz System Verification

Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 3.92 W/kg; SAR(10 g) = 1.07 W/kg

Deviation(1 g) = -6.78%; Deviation(10 g) = -8.15 %

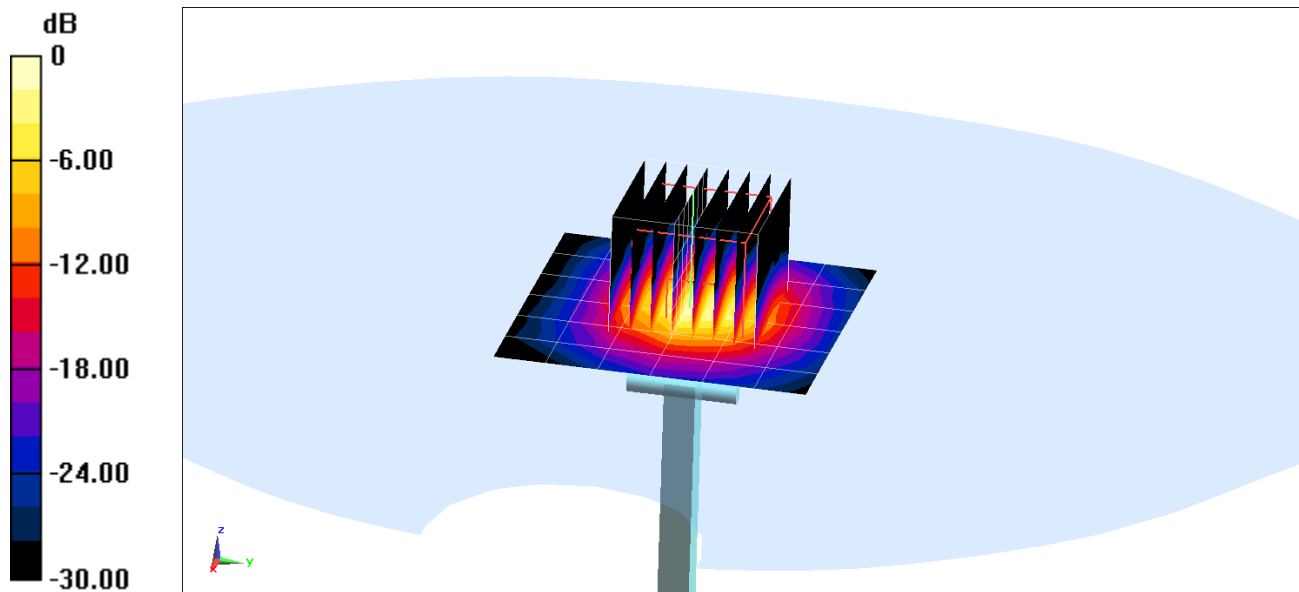

0 dB = 9.53 W/kg = 9.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 5800 MHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 6.122 \text{ S/m}$; $\epsilon_r = 46.189$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-13-2015; Ambient Temp: 24.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3914; ConvF(4.01, 4.01, 4.01); Calibrated: 2/10/2015;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 10/31/2014

Phantom: SAM Sub ; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5800 MHz System Verification

Area Scan (7x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Input Power = 17.0 dBm (50 mW)

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 3.86 W/kg

Deviation(1 g) = -1.03%

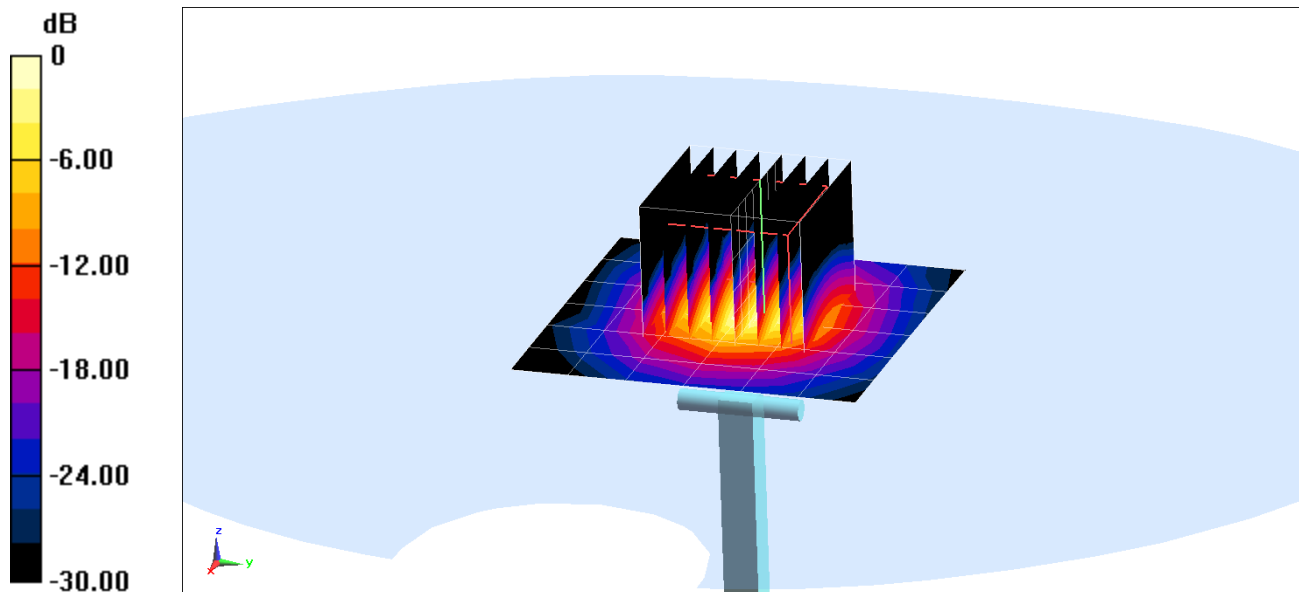

0 dB = 9.32 W/kg = 9.69 dBW/kg

APPENDIX C: PROBE CALIBRATION