


PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 15.407 UNII 802.11a/n/ac

Applicant Name:

LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:

8/9-8/30/2016

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

0Y1608121387.ZNF

FCC ID: ZNFH918

APPLICANT: LG Electronics MobileComm U.S.A

Application Type: Class II Permissive Change

Model(s): LG-H918, LGH918, H918, LG-H910PR, LGH910PR, H910PR

EUT Type: Portable Handset

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part 15.407

Test Procedure(s): KDB 789033 D02 v01r02, KDB 662911 D01 v02r01

Class II Permissive Change: Please see FCC change document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 1 of 102	

TABLE OF CONTENTS


FCC PART 15.407 MEASUREMENT REPORT		3
1.0 INTRODUCTION		4
1.1 Scope		4
1.2 PCTEST Test Location		4
2.0 PRODUCT INFORMATION		5
2.1 Equipment Description		5
2.2 Device Capabilities		5
2.3 Test Configuration		6
2.4 EMI Suppression Device(s)/Modifications		6
3.0 DESCRIPTION OF TESTS		7
3.1 Evaluation Procedure		7
3.2 Radiated Emissions		7
3.3 Environmental Conditions		7
4.0 ANTENNA REQUIREMENTS		8
5.0 MEASUREMENT UNCERTAINTY		9
6.0 TEST EQUIPMENT CALIBRATION DATA		10
7.0 TEST RESULTS		11
7.1 Summary		11
7.2 Radiated Spurious Emission Measurements – Above 1GHz		12
7.7.1 Antenna-1 Radiated Spurious Emission Measurements		15
7.7.2 Antenna-2 Radiated Spurious Emission Measurements		25
7.7.3 Antenna-1 Radiated Band Edge Measurements (20MHz BW)		35
7.7.4 Antenna-1 Radiated Band Edge Measurements (40MHz BW)		42
7.7.5 Antenna-1 Radiated Band Edge Measurements (80MHz BW)		49
7.7.6 Antenna-2 Radiated Band Edge Measurements (20MHz BW)		56
7.7.7 Antenna-2 Radiated Band Edge Measurements (40MHz BW)		63
7.7.8 Antenna-2 Radiated Band Edge Measurements (80MHz BW)		70
7.7.9 MIMO Radiated Band Edge Measurements (20MHz BW)		77
7.7.10 MIMO Radiated Band Edge Measurements (40MHz BW)		84
7.7.11 MIMO Radiated Band Edge Measurements (80MHz BW)		91
7.3 Radiated Spurious Emissions Measurements – Below 1GHz		97
8.0 CONCLUSION		102

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 2 of 102	



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A

APPLICANT ADDRESS: 1000 Sylvan Avenue
Englewood Cliffs, NJ 07632, United States

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

BASE MODEL: LG-H918

FCC ID: ZNFH918

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

Test Device Serial No.: 09445 Production Pre-Production Engineering

DATE(S) OF TEST: 8/9-8/30/2016

TEST REPORT S/N: 0Y1608121387.ZNF

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: ZNFH918	 FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 3 of 102

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

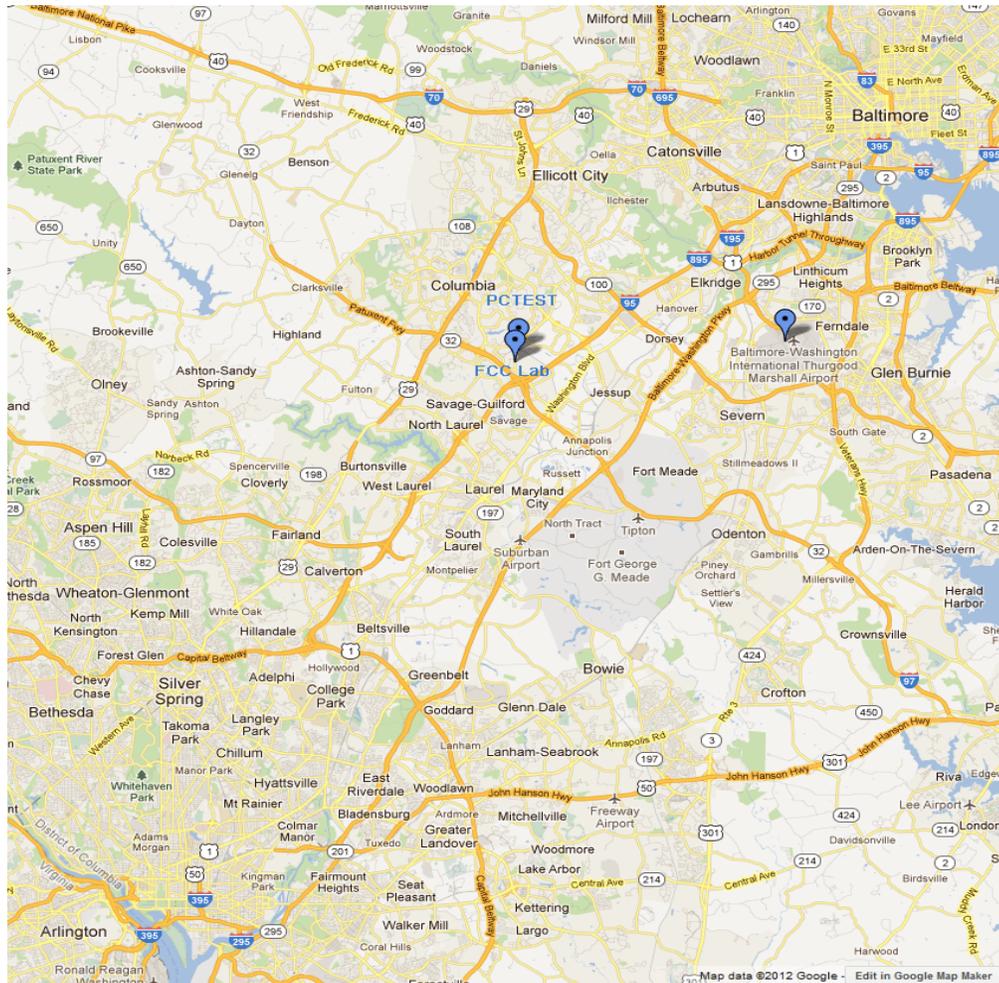


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 4 of 102	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFH918**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, MIMO, Bluetooth (1x, EDR, LE), NFC

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	140	5700	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550		
				:	:		
				134	5670	159	5795

Table 2-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775

Table 2-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset		Page 5 of 102

Notes:

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 v01r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		Primary	Secondary	MIMO
5GHz	a	99.4	99.4	N/A
	n (HT20)	99.3	99.3	99.3
	ac (HT20)	99.3	99.3	99.3
	n (HT40)	99.3	99.3	99.2
	ac (HT40)	99.3	99.3	99.2
	ac (HT80)	98.4	98.4	98.5

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✗	✗	✗	✓	✓
	11n (20MHz)	✓	✗	✓	✓	✓	✓
	11n (40MHz)	✓	✗	✓	✓	✓	✓
	11ac (80MHz)	✓	✗	✓	✓	✓	✓

3. Table 2-4. Frequency / Channel Operations

- ✓ = Support ; ✗ = NOT Support
- SISO** = Single Input Single Output
- SDM** = Spatial Diversity Multiplexing – MIMO function
- CDD** = Cyclic Delay Diversity – 2Tx Function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
 29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325, 351/390, 390/433.3 (ac – 80MHz BW)
 13/14.4, 26.28.9, 39/43.3, 52/57.8, 78/86.7, 104/115.6, 117/130, 130/144.4Mbps (MIMO n/ac – 20MHz)
 156/173Mbps (MIMO ac – 20MHz)
 27/30, 54/60, 81/90, 108/120, 162/180, 216/240, 243,270, 270/300Mbps (MIMO n/ac – 40MHz) 324/360, 360/400Mbps (MIMO ac – 40MHz)
 58.5/65, 117/130, 175.5/195, 234/260, 351/390, 468/520, 526.5/585, 585/650, 702/780, 780/866.7Mbps (MIMO ac – 80MHz)

2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFH918 was tested per the guidance of KDB 789033 D02 v01r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Section 3.2 for radiated emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 6 of 102	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v01r02 were used in the measurement of **LG Portable Handset FCC ID: ZNFH918**.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm. For measurements above 1GHz, a high density expanded polystyrene block is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: ZNFH918	 ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset		Page 7 of 102

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **LG Portable Handset FCC ID: ZNFH918** unit complies with the requirement of §15.203.

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 8 of 102	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 9 of 102	

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	7/11/2016	Annual	7/11/2017	RE1
Agilent	8447D	Broadband Amplifier	6/12/2015	Annual	9/12/2016	1937A03348
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	7/30/2015	Biennial	7/30/2017	121034
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/26/2016	Biennial	4/26/2018	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	7/17/2014	Biennial	7/17/2016	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	7/17/2014	Biennial	10/17/2016	130993
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	4/26/2016	Annual	4/26/2017	251425001
K & L	11SH10-6000/T18000	High Pass Filter	7/11/2016	Annual	7/11/2017	11SH10-6000/T18000-1
PCTEST	-	EMC Switch System	7/11/2016	Annual	7/11/2017	NM1
PCTEST	-	EMC Switch System	7/6/2016	Annual	7/6/2017	NM2
Rhode & Schwarz	TS-PR18	Pre-Amplifier	7/6/2016	Annual	7/6/2017	101622
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	7/11/2016	Annual	7/11/2017	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/16/2016	Annual	5/16/2017	100342
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100037
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/15/2016	Annual	7/15/2017	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	7/27/2016	Annual	7/27/2017	103200
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 10 of 102	

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFH918
 Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)					
15.407(b.1), (2),(3)	Undesirable Emissions	< -27 dBm/MHz EIRP (outside 5150-5350MHz, 5470-5725MHz, 5715-5860MHz) < -17 dBm/MHz EIRP (within 5715-5725MHz and 5850-5860MHz)	RADIATED	PASS	Section 7.2
15.205, 15.407(b.1), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.2, 7.3

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 11 of 102	

7.2 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b.1)(b.6) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r02, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-2 per Section 15.209.

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-2. Radiated Limits

Test Procedures Used

KDB 789033 D02 v01r02 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 12 of 102	

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

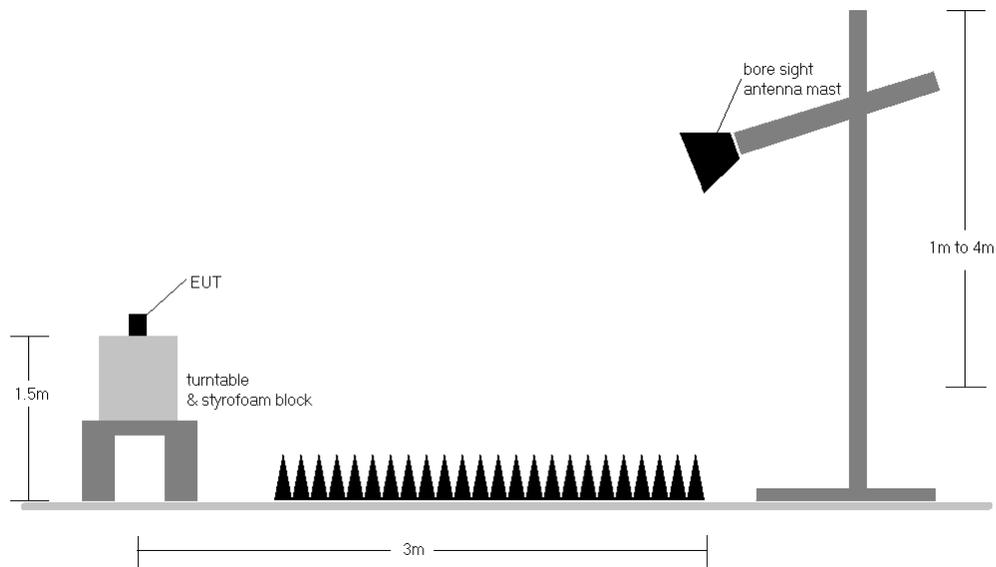


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 D02 v01r02 Section G.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-2.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 13 of 102	

4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.
10. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB_{\mu V/m}]}$ = Analyzer Level $_{[dBm]}$ + 107 + AFCL $_{[dB/m]}$
- AFCL $_{[dB/m]}$ = Antenna Factor $_{[dB/m]}$ + Cable Loss $_{[dB]}$
- Margin $_{[dB]}$ = Field Strength Level $_{[dB_{\mu V/m}]}$ – Limit $_{[dB_{\mu V/m}]}$


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.2 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 14 of 102	


7.7.1 Antenna-1 Radiated Spurious Emission Measurements

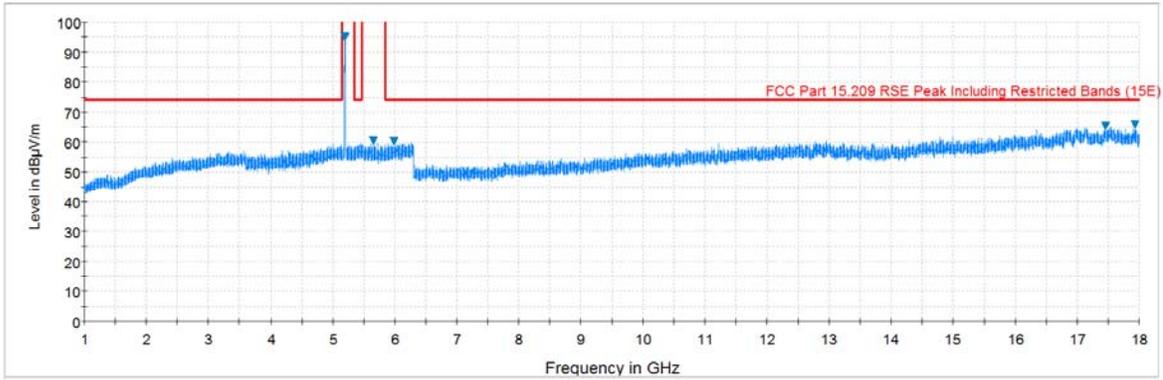

Plot 7-1. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

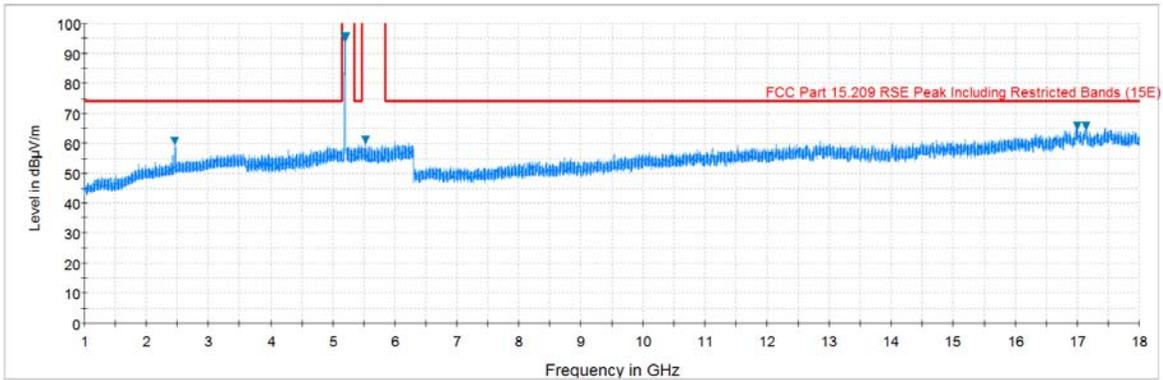


Plot 7-2. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

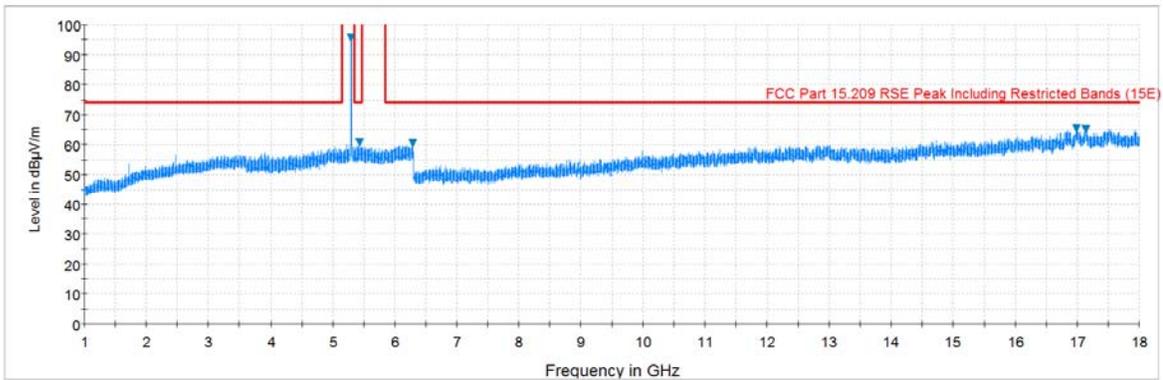


Plot 7-3. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)


FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 15 of 102	

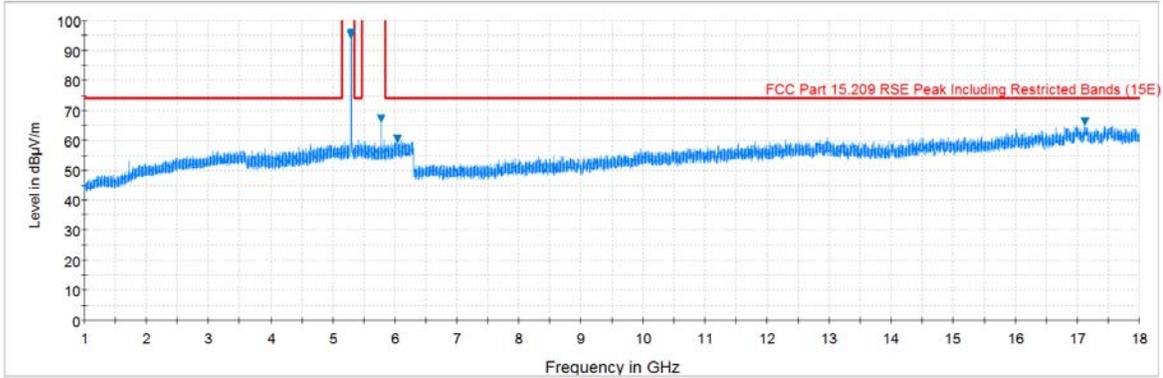

Plot 7-4. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

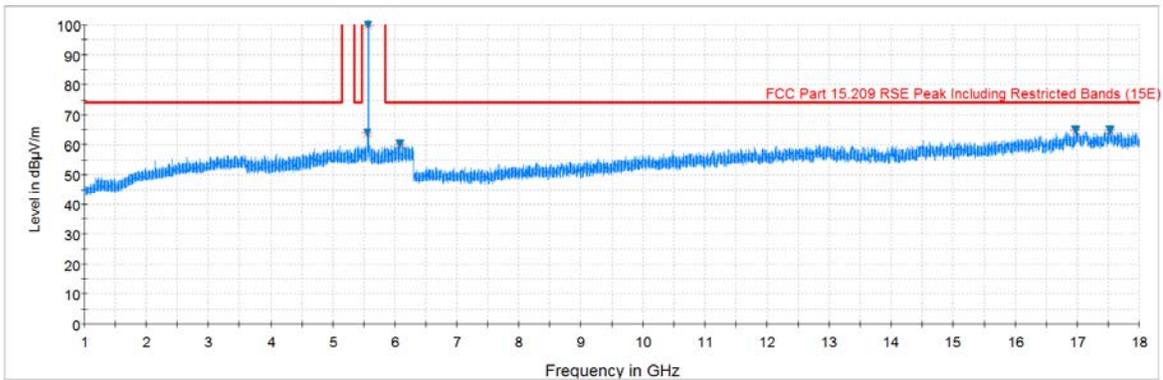


Plot 7-5. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

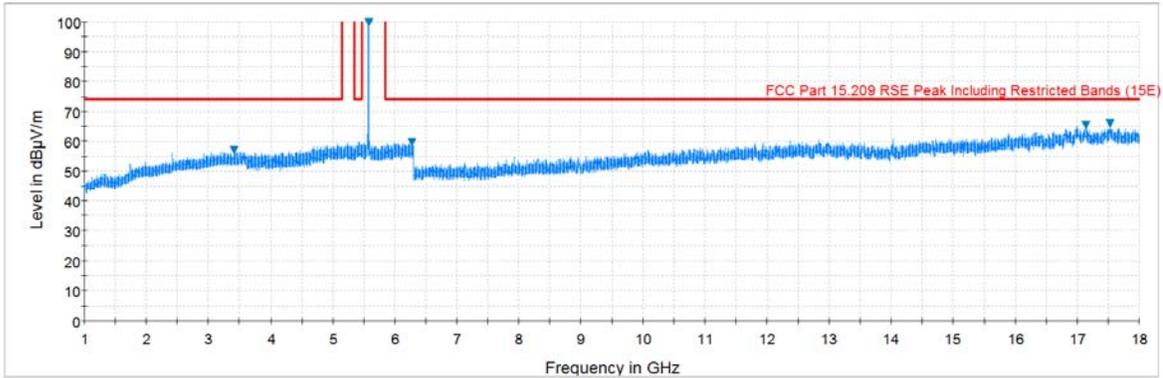


Plot 7-6. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 16 of 102	

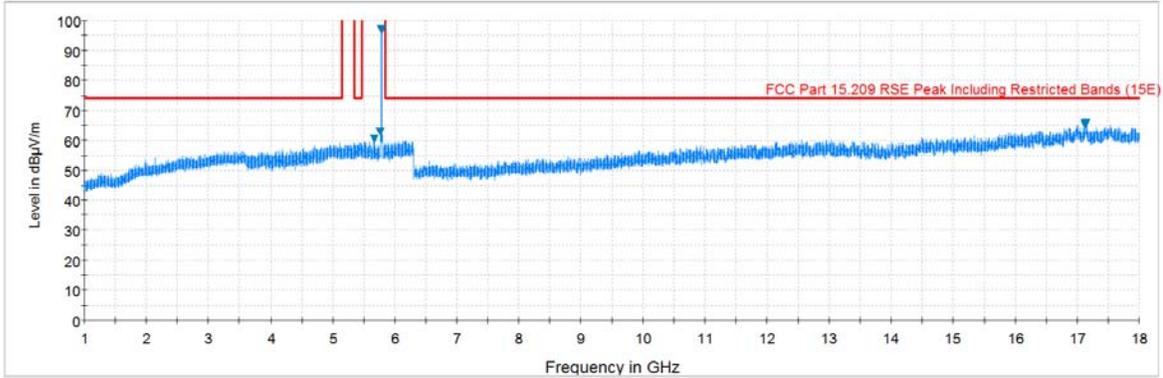

Plot 7-7. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

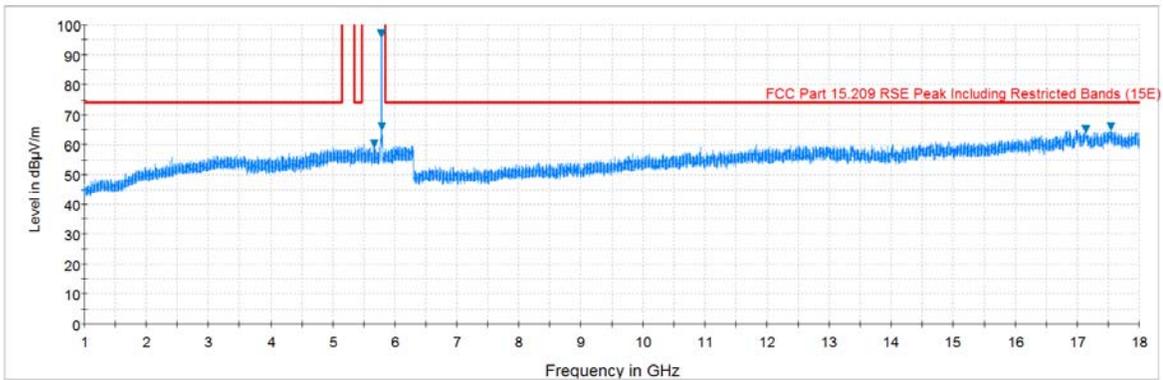


Plot 7-8. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)


FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 17 of 102	

Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

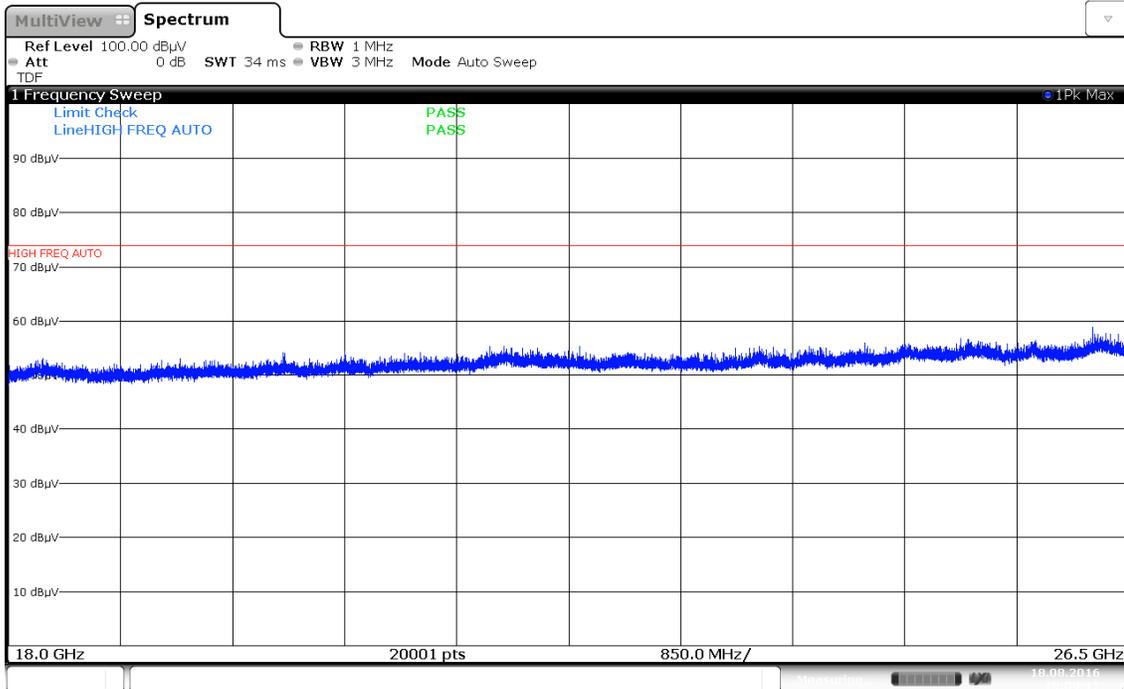

Plot 7-9. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)

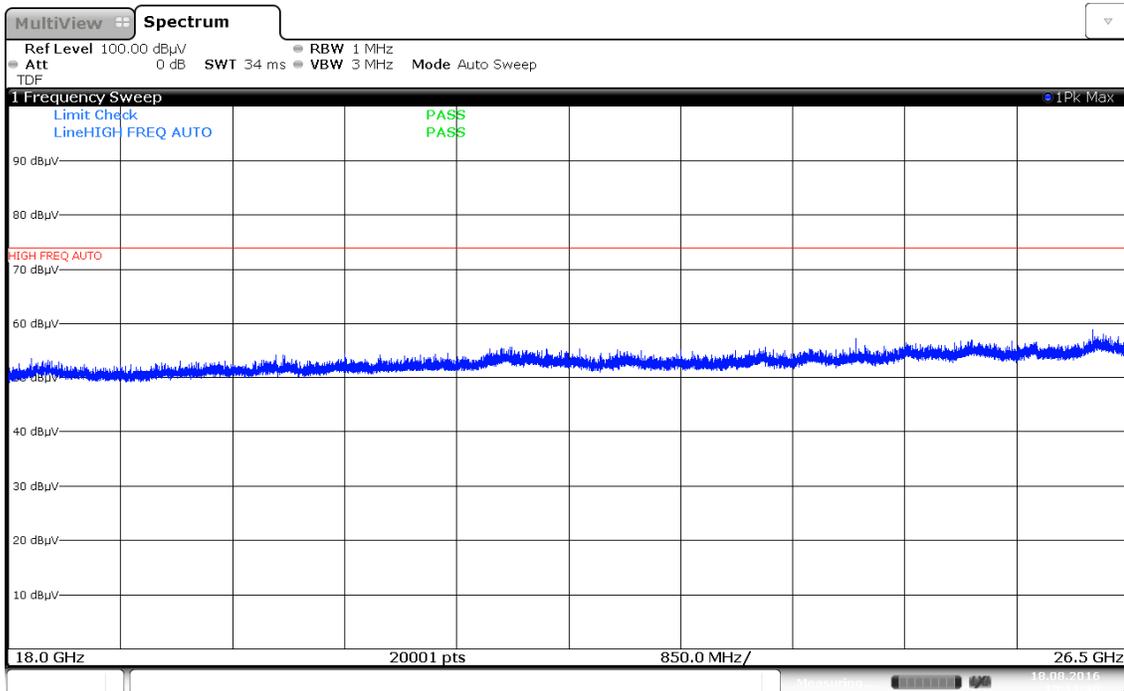

Plot 7-10. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 18 of 102	

Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	H	-	-	-70.19	20.04	0.00	56.85	68.20	-11.35
* 15540.00	Average	H	-	-	-81.15	24.53	0.00	50.38	53.98	-3.60
* 15540.00	Peak	H	-	-	-71.84	24.53	0.00	59.69	73.98	-14.29
* 20720.00	Average	H	-	-	-115.19	48.79	-9.54	31.05	53.98	-22.93
* 20720.00	Peak	H	-	-	-102.19	48.79	-9.54	44.05	73.98	-29.93
25900.00	Peak	H	-	-	-101.31	50.98	-9.54	47.14	68.20	-21.06

Table 7-3. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	H	-	-	-70.19	19.77	0.00	56.58	68.20	-11.62
* 15600.00	Average	H	-	-	-81.15	23.99	0.00	49.84	53.98	-4.14
* 15600.00	Peak	H	-	-	-71.78	23.99	0.00	59.21	73.98	-14.77
* 20800.00	Average	H	-	-	-116.12	48.90	-9.54	30.24	53.98	-23.74
* 20800.00	Peak	H	-	-	-101.52	48.90	-9.54	44.84	73.98	-29.14
26000.00	Peak	H	-	-	-100.89	51.05	-9.54	47.61	68.20	-20.59

Table 7-4. Radiated Measurements

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 19 of 102	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-70.08	21.01	0.00	57.93	68.20	-10.27
* 15720.00	Average	H	-	-	-81.13	24.78	0.00	50.65	53.98	-3.33
* 15720.00	Peak	H	-	-	-71.70	24.78	0.00	60.08	73.98	-13.90
* 20960.00	Average	H	-	-	-114.56	49.09	-9.54	31.99	53.98	-21.99
* 20960.00	Peak	H	-	-	-101.60	49.09	-9.54	44.95	73.98	-29.03
26200.00	Peak	H	-	-	-100.67	51.19	-9.54	47.97	68.20	-20.23

Table 7-5. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-70.92	20.31	0.00	56.39	68.20	-11.81
* 15780.00	Average	H	-	-	-81.21	23.83	0.00	49.62	53.98	-4.36
* 15780.00	Peak	H	-	-	-71.90	23.83	0.00	58.93	73.98	-15.05
* 21040.00	Average	H	-	-	-115.23	49.17	-9.54	31.40	53.98	-22.58
* 21040.00	Peak	H	-	-	-101.57	49.17	-9.54	45.06	73.98	-28.92
26300.00	Peak	H	-	-	-101.51	51.26	-9.54	47.20	68.20	-21.00

Table 7-6. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-71.43	20.15	0.00	55.72	68.20	-12.48
* 15840.00	Average	H	-	-	-81.35	24.00	0.00	49.65	53.98	-4.33
* 15840.00	Peak	H	-	-	-72.33	24.00	0.00	58.67	73.98	-15.31
* 21120.00	Average	H	-	-	-114.54	49.24	-9.54	32.16	53.98	-21.82
* 21120.00	Peak	H	-	-	-101.63	49.24	-9.54	45.07	73.98	-28.91
26400.00	Peak	H	-	-	-101.33	51.33	-9.54	47.46	68.20	-20.74

Table 7-7. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-81.03	20.67	0.00	46.64	53.98	-7.34
* 10640.00	Peak	H	-	-	-70.59	20.67	0.00	57.08	73.98	-16.90
* 15960.00	Average	H	-	-	-82.07	23.80	0.00	48.73	53.98	-5.25
* 15960.00	Peak	H	-	-	-71.47	23.80	0.00	59.33	73.98	-14.65
* 21280.00	Average	H	-	-	-114.57	49.36	-9.54	32.25	53.98	-21.73
* 21280.00	Peak	H	-	-	-101.68	49.36	-9.54	45.14	73.98	-28.84
26600.00	Peak	H	-	-	-103.77	47.61	-9.54	41.30	68.20	-26.90

Table 7-8. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-77.23	20.30	0.00	50.07	53.98	-3.90
* 11000.00	Peak	H	-	-	-67.39	20.30	0.00	59.91	73.98	-14.06
16500.00	Peak	H	-	-	-66.66	23.48	0.00	63.82	68.20	-4.38
22000.00	Peak	H	-	-	-101.68	49.39	-9.54	45.17	68.20	-23.03
27500.00	Peak	H	-	-	-104.30	51.49	-9.54	44.65	68.20	-23.55

Table 7-9. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-77.30	20.41	0.00	50.11	53.98	-3.87
* 11160.00	Peak	H	-	-	-67.38	20.41	0.00	60.03	73.98	-13.95
16740.00	Peak	H	-	-	-66.60	23.49	0.00	63.89	68.20	-4.31
* 22320.00	Average	H	-	-	-113.70	49.84	-9.54	33.59	53.98	-20.39
* 22320.00	Peak	H	-	-	-102.22	49.84	-9.54	45.07	73.98	-28.91
27900.00	Peak	H	-	-	-104.97	51.57	-9.54	44.06	68.20	-24.14

Table 7-10. Radiated Measurements

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 22 of 102	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11400.00	Average	H	-	-	-77.30	20.62	0.00	50.32	53.98	-3.66
* 11400.00	Peak	H	-	-	-67.32	20.62	0.00	60.30	73.98	-13.68
17100.00	Peak	H	-	-	-66.63	23.92	0.00	64.29	68.20	-3.91
* 22800.00	Average	H	-	-	-114.12	50.02	-9.54	33.36	53.98	-20.62
* 22800.00	Peak	H	-	-	-101.83	50.02	-9.54	45.65	73.98	-28.33
28500.00	Peak	H	-	-	-104.99	51.42	-9.54	43.89	68.20	-24.31

Table 7-11. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-77.25	20.30	0.00	50.05	53.98	-3.93
* 11490.00	Peak	H	-	-	-65.07	20.30	0.00	62.23	73.98	-11.75
17235.00	Peak	H	-	-	-65.84	23.60	0.00	64.76	68.20	-3.44
* 22980.00	Average	H	-	-	-114.85	50.04	-9.54	32.64	53.98	-21.34
* 22980.00	Peak	H	-	-	-102.32	50.04	-9.54	45.17	73.98	-28.81
28725.00	Peak	H	-	-	-104.75	51.38	-9.54	44.09	68.20	-24.11

Table 7-12. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-77.33	20.72	0.00	50.39	53.98	-3.59
* 11570.00	Peak	H	-	-	-65.04	20.72	0.00	62.68	73.98	-11.30
17355.00	Peak	H	-	-	-65.79	23.68	0.00	64.89	68.20	-3.31
23140.00	Peak	H	-	-	-101.59	50.11	-9.54	45.98	68.20	-22.22
28925.00	Peak	H	-	-	-105.33	51.41	-9.54	43.54	68.20	-24.66

Table 7-13. Radiated Measurements


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-77.30	21.20	0.00	50.90	53.98	-3.08
* 11650.00	Peak	H	-	-	-65.09	21.20	0.00	63.11	73.98	-10.87
17475.00	Peak	H	-	-	-65.79	23.55	0.00	64.76	68.20	-3.44
23300.00	Peak	H	-	-	-101.53	50.13	-9.54	46.06	68.20	-22.14
29125.00	Peak	H	-	-	-105.36	51.43	-9.54	43.53	68.20	-24.67


Table 7-14. Radiated Measurements

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 24 of 102	


7.7.2 Antenna-2 Radiated Spurious Emission Measurements

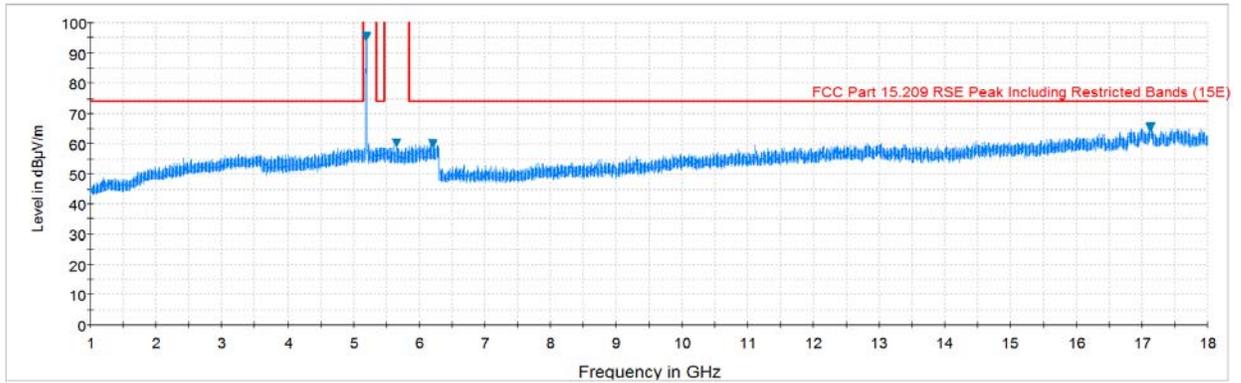

Plot 7-11. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

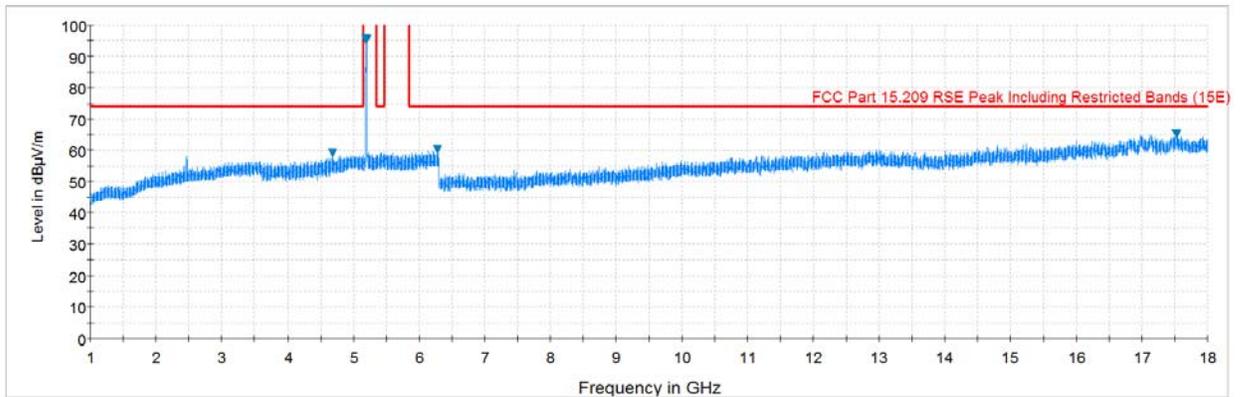


Plot 7-12. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

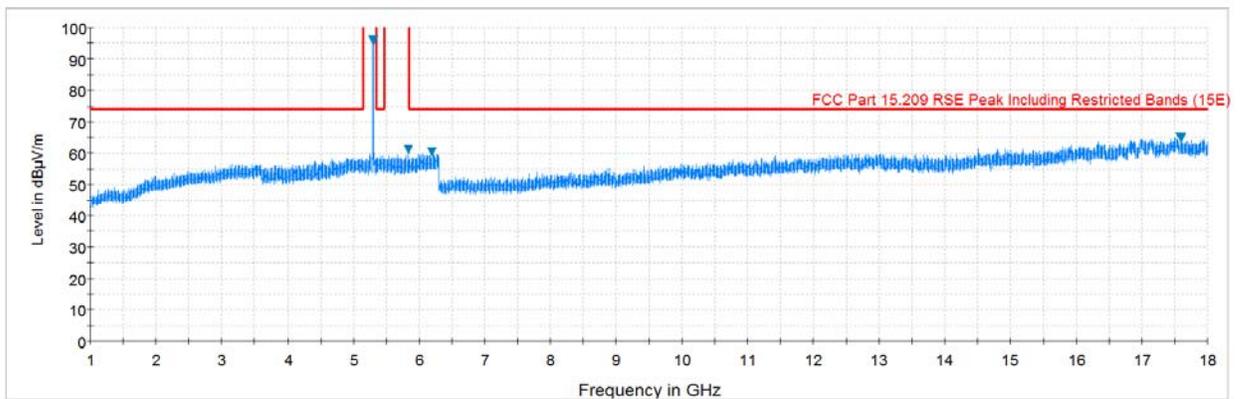


Plot 7-13. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)


FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 25 of 102	

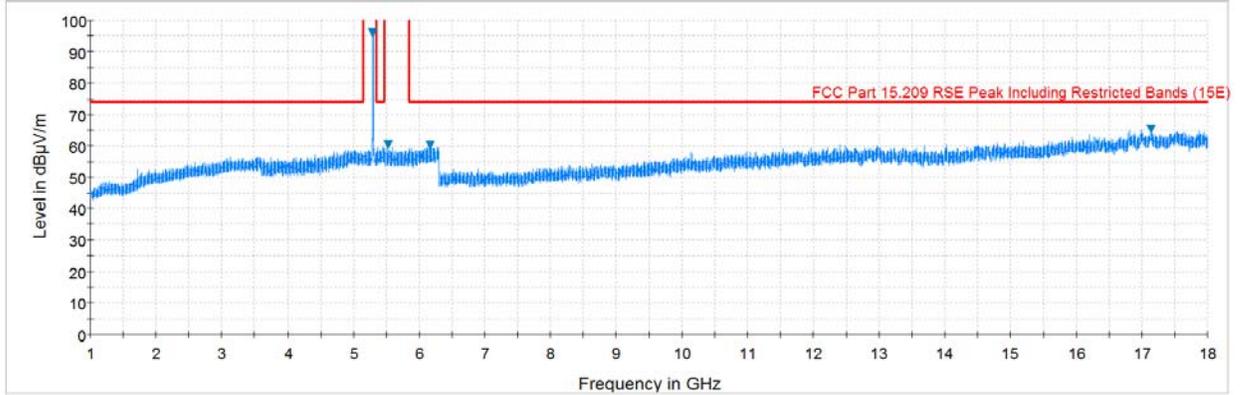

Plot 7-14. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

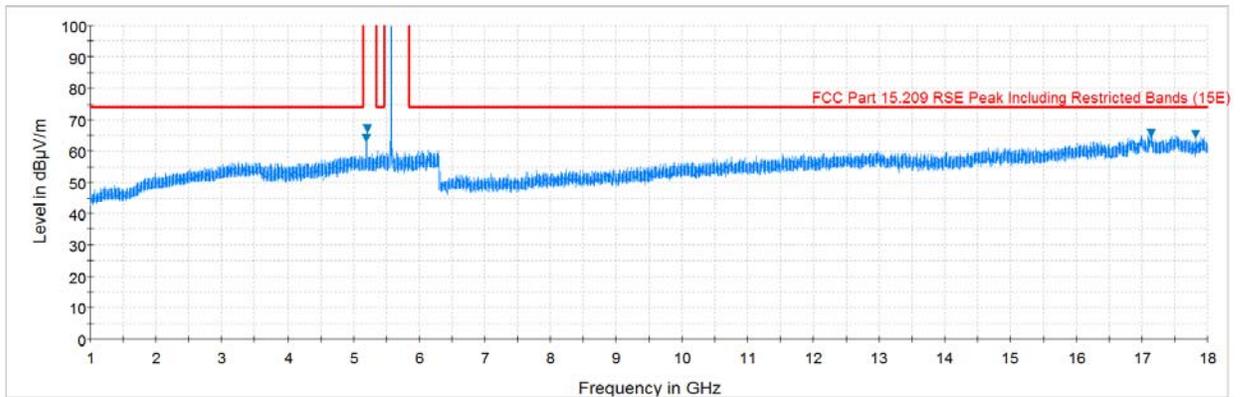


Plot 7-15. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

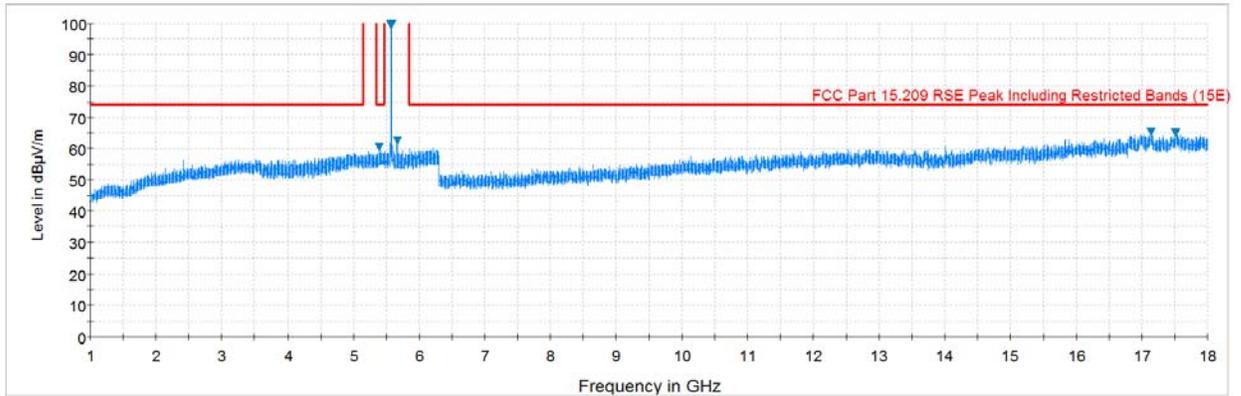


Plot 7-16. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 26 of 102	

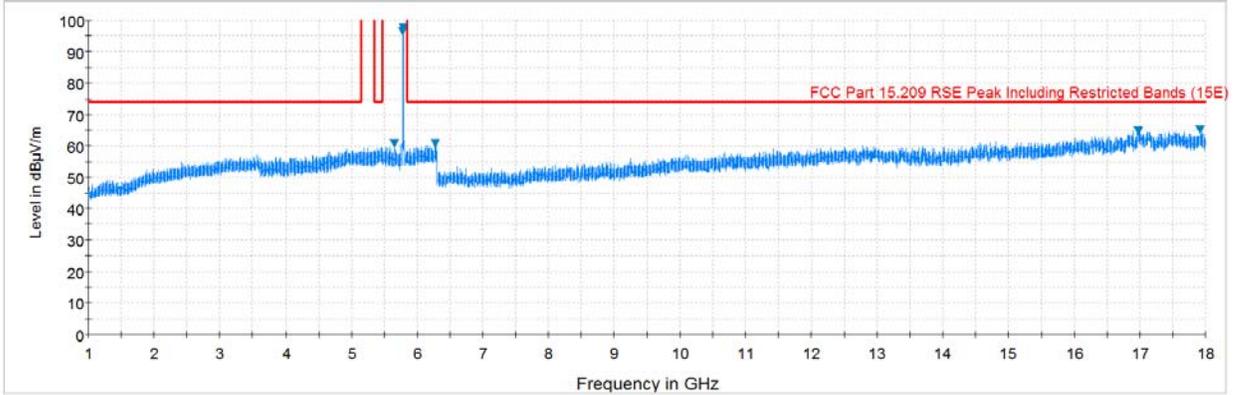

Plot 7-17. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

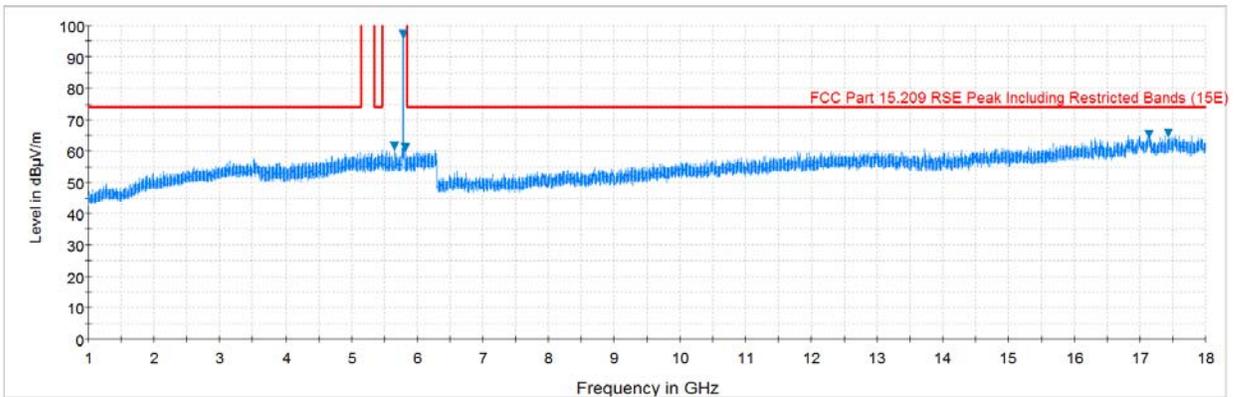


Plot 7-18. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 27 of 102	


Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209

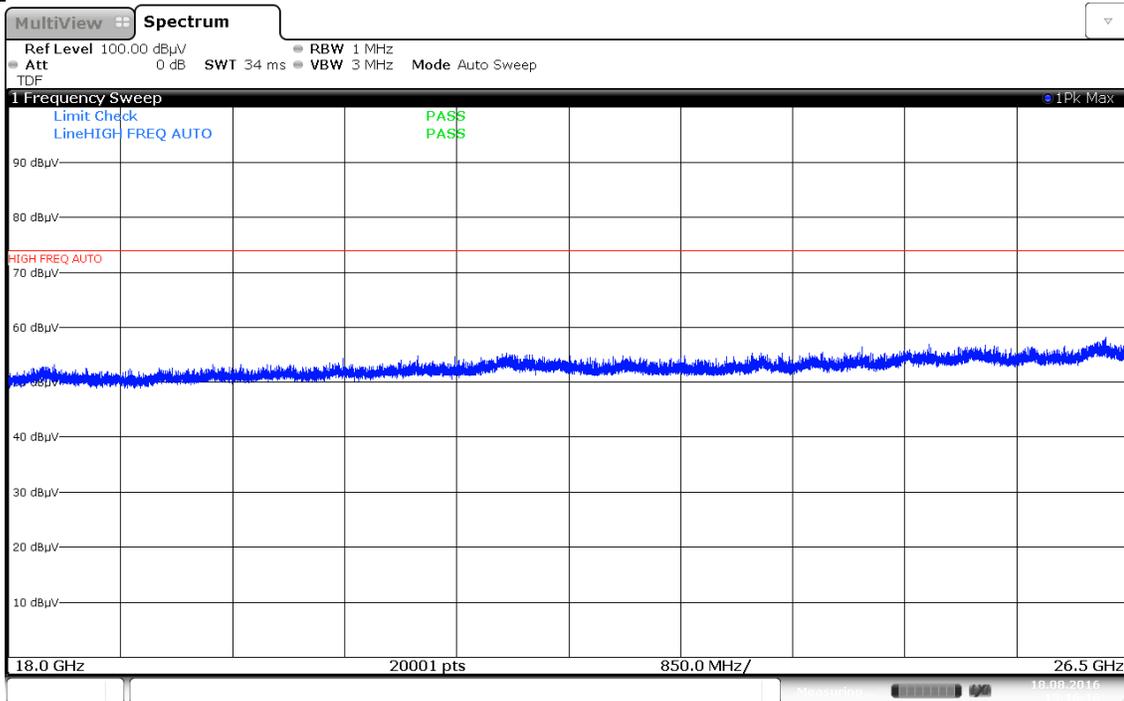

19:16:16 18.08.2016

Plot 7-19. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)

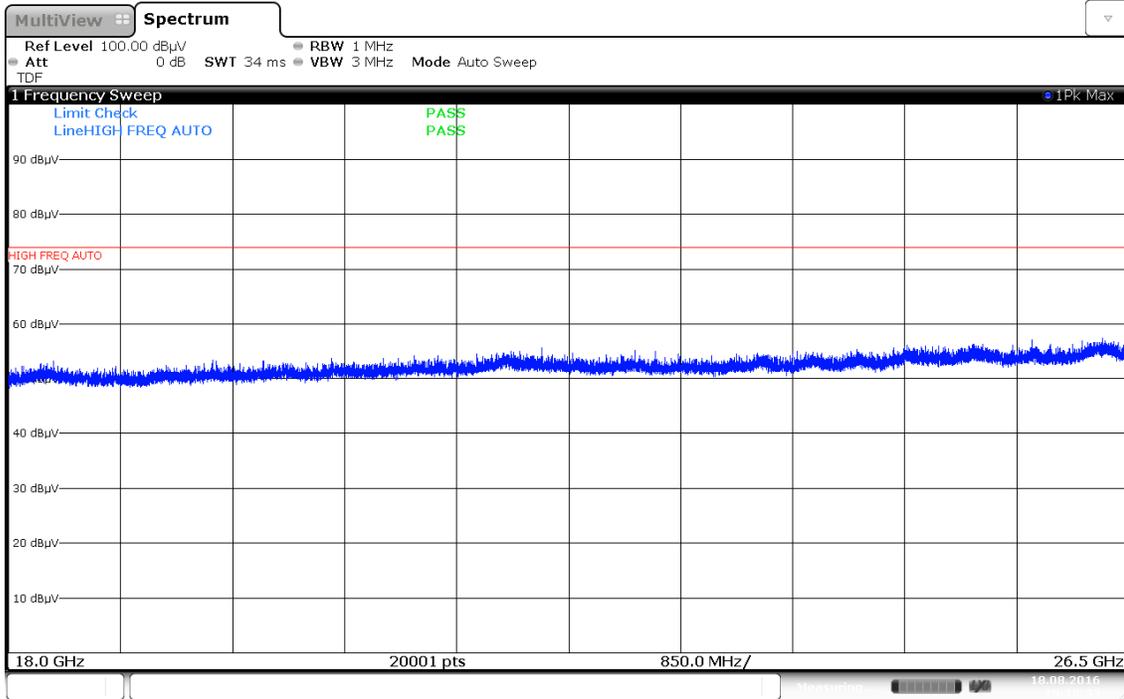

19:18:33 18.08.2016

Plot 7-20. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 28 of 102	

Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	H	-	-	-70.15	20.04	0.00	56.89	68.20	-11.31
* 15540.00	Average	H	-	-	-81.20	24.53	0.00	50.33	53.98	-3.65
* 15540.00	Peak	H	-	-	-72.54	24.53	0.00	58.99	73.98	-14.99
* 20720.00	Average	H	-	-	-116.21	48.79	-9.54	30.03	53.98	-23.95
* 20720.00	Peak	H	-	-	-101.79	48.79	-9.54	44.45	73.98	-29.53
25900.00	Peak	H	-	-	-102.06	50.98	-9.54	46.39	68.20	-21.81

Table 7-15. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	H	-	-	-69.10	19.77	0.00	57.67	68.20	-10.53
* 15600.00	Average	H	-	-	-80.53	23.99	0.00	50.46	53.98	-3.52
* 15600.00	Peak	H	-	-	-72.31	23.99	0.00	58.68	73.98	-15.30
* 20800.00	Average	H	-	-	-114.82	48.90	-9.54	31.54	53.98	-22.44
* 20800.00	Peak	H	-	-	-101.52	48.90	-9.54	44.84	73.98	-29.14
26000.00	Peak	H	-	-	-100.88	51.05	-9.54	47.62	68.20	-20.58

Table 7-16. Radiated Measurements

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 29 of 102	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	H	-	-	-69.16	21.01	0.00	58.85	68.20	-9.35
* 15720.00	Average	H	-	-	-81.20	24.78	0.00	50.58	53.98	-3.40
* 15720.00	Peak	H	-	-	-72.04	24.78	0.00	59.74	73.98	-14.24
* 20960.00	Average	H	-	-	-115.46	49.09	-9.54	31.09	53.98	-22.89
* 20960.00	Peak	H	-	-	-102.19	49.09	-9.54	44.36	73.98	-29.62
26200.00	Peak	H	-	-	-98.59	51.19	-9.54	50.05	68.20	-18.15

Table 7-17. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	H	-	-	-69.47	20.31	0.00	57.84	68.20	-10.36
* 15780.00	Average	H	-	-	-80.90	23.83	0.00	49.93	53.98	-4.05
* 15780.00	Peak	H	-	-	-71.30	23.83	0.00	59.53	73.98	-14.45
* 21040.00	Average	H	-	-	-114.87	49.17	-9.54	31.76	53.98	-22.22
* 21040.00	Peak	H	-	-	-101.60	49.17	-9.54	45.03	73.98	-28.95
26300.00	Peak	H	-	-	-101.51	51.26	-9.54	47.20	68.20	-21.00

Table 7-18. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	H	-	-	-70.58	20.15	0.00	56.57	68.20	-11.63
* 15840.00	Average	H	-	-	-80.84	24.00	0.00	50.16	53.98	-3.82
* 15840.00	Peak	H	-	-	-72.24	24.00	0.00	58.76	73.98	-15.22
* 21120.00	Average	H	-	-	-115.13	49.24	-9.54	31.57	53.98	-22.41
* 21120.00	Peak	H	-	-	-101.56	49.24	-9.54	45.14	73.98	-28.84
26400.00	Peak	H	-	-	-101.26	51.33	-9.54	47.53	68.20	-20.67

Table 7-19. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	H	-	-	-80.80	20.67	0.00	46.87	53.98	-7.11
* 10640.00	Peak	H	-	-	-70.60	20.67	0.00	57.07	73.98	-16.91
* 15960.00	Average	H	-	-	-81.82	23.80	0.00	48.98	53.98	-5.00
* 15960.00	Peak	H	-	-	-71.20	23.80	0.00	59.60	73.98	-14.38
* 21280.00	Average	H	-	-	-115.12	49.36	-9.54	31.70	53.98	-22.28
* 21280.00	Peak	H	-	-	-101.52	49.36	-9.54	45.30	73.98	-28.68
26600.00	Peak	H	-	-	-103.14	51.34	-9.54	45.65	68.20	-22.55

Table 7-20. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	H	-	-	-77.33	20.30	0.00	49.97	53.98	-4.00
* 11000.00	Peak	H	-	-	-67.42	20.30	0.00	59.88	73.98	-14.09
16500.00	Peak	H	-	-	-66.69	23.48	0.00	63.79	68.20	-4.41
22000.00	Peak	H	-	-	-100.75	49.39	-9.54	46.10	68.20	-22.10
27500.00	Peak	H	-	-	-104.27	51.49	-9.54	44.68	68.20	-23.52

Table 7-21. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5580MHz
 Channel: 116

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	H	-	-	-77.52	20.41	0.00	49.89	53.98	-4.09
* 11160.00	Peak	H	-	-	-66.45	20.41	0.00	60.96	73.98	-13.02
16740.00	Peak	H	-	-	-67.69	23.48	0.00	62.79	68.20	-5.41
* 22320.00	Average	H	-	-	-114.63	49.84	-9.54	32.66	53.98	-21.32
* 22320.00	Peak	H	-	-	-100.64	49.84	-9.54	46.65	73.98	-27.33
27900.00	Peak	H	-	-	-104.71	51.57	-9.54	44.32	68.20	-23.88

Table 7-22. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	Average	H	-	-	-77.47	20.62	0.00	50.15	53.98	-3.83
* 11400.00	Peak	H	-	-	-65.86	20.62	0.00	61.76	73.98	-12.22
17100.00	Peak	H	-	-	-66.67	23.92	0.00	64.25	68.20	-3.95
* 22800.00	Average	H	-	-	-114.57	50.02	-9.54	32.91	53.98	-21.07
* 22800.00	Peak	H	-	-	-101.55	50.02	-9.54	45.93	73.98	-28.05
28500.00	Peak	H	-	-	-105.01	51.42	-9.54	43.87	68.20	-24.33

Table 7-23. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	H	-	-	-76.64	20.30	0.00	50.66	53.98	-3.32
* 11490.00	Peak	H	-	-	-64.70	20.30	0.00	62.60	73.98	-11.38
17235.00	Peak	H	-	-	-67.01	23.60	0.00	63.59	68.20	-4.61
* 22980.00	Average	H	-	-	-114.77	50.04	-9.54	32.72	53.98	-21.26
* 22980.00	Peak	H	-	-	-101.79	50.04	-9.54	45.70	73.98	-28.28
28725.00	Peak	H	-	-	-105.04	51.38	-9.54	43.80	68.20	-24.40

Table 7-24. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	H	-	-	-77.26	20.72	0.00	50.46	53.98	-3.52
* 11570.00	Peak	H	-	-	-65.66	20.72	0.00	62.06	73.98	-11.92
17355.00	Peak	H	-	-	-67.45	23.68	0.00	63.23	68.20	-4.97
23140.00	Peak	H	-	-	-100.64	50.11	-9.54	46.93	68.20	-21.27
28925.00	Peak	H	-	-	-105.12	51.41	-9.54	43.75	68.20	-24.45

Table 7-25. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	H	-	-	-76.69	20.20	0.00	50.51	53.98	-3.47
* 11650.00	Peak	H	-	-	-65.59	20.20	0.00	61.61	73.98	-12.37
17475.00	Peak	H	-	-	-66.95	23.55	0.00	63.60	68.20	-4.60
23300.00	Peak	H	-	-	-101.53	50.13	-9.54	46.06	68.20	-22.14
29125.00	Peak	H	-	-	-105.52	51.43	-9.54	43.37	68.20	-24.83

Table 7-26. Radiated Measurements

7.7.3 Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

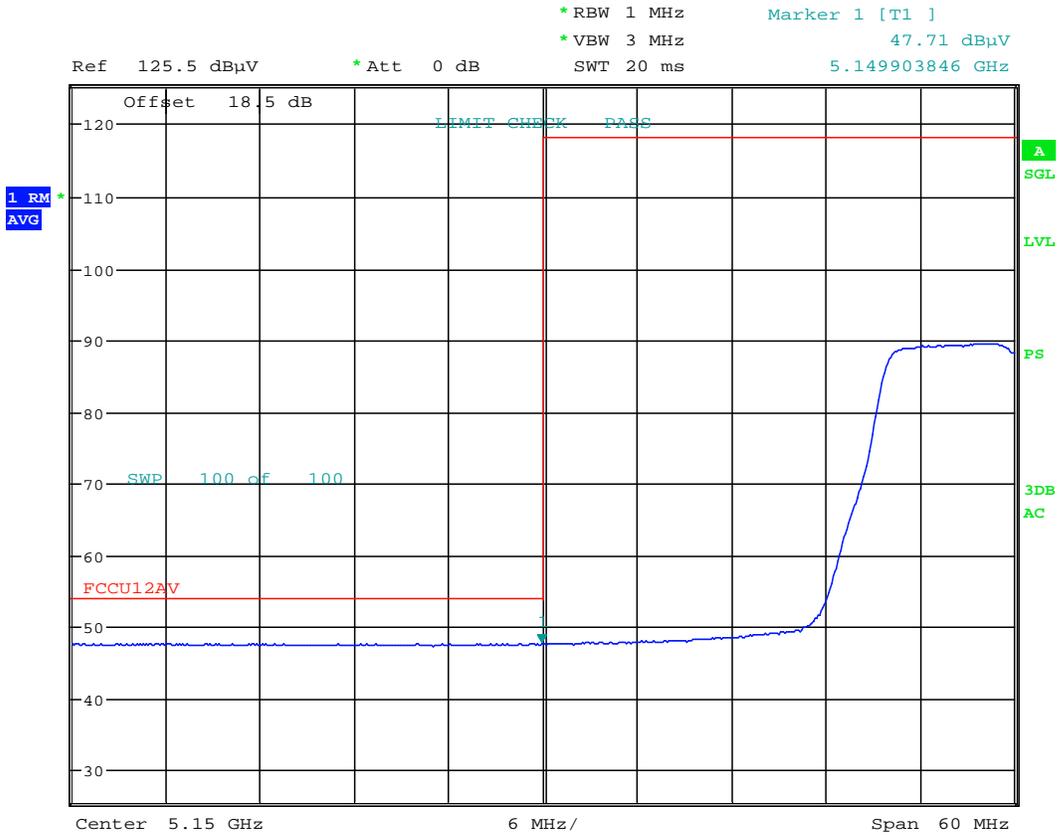


Date: 15.AUG.2016 12:32:20

Plot 7-21. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 35 of 102	

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

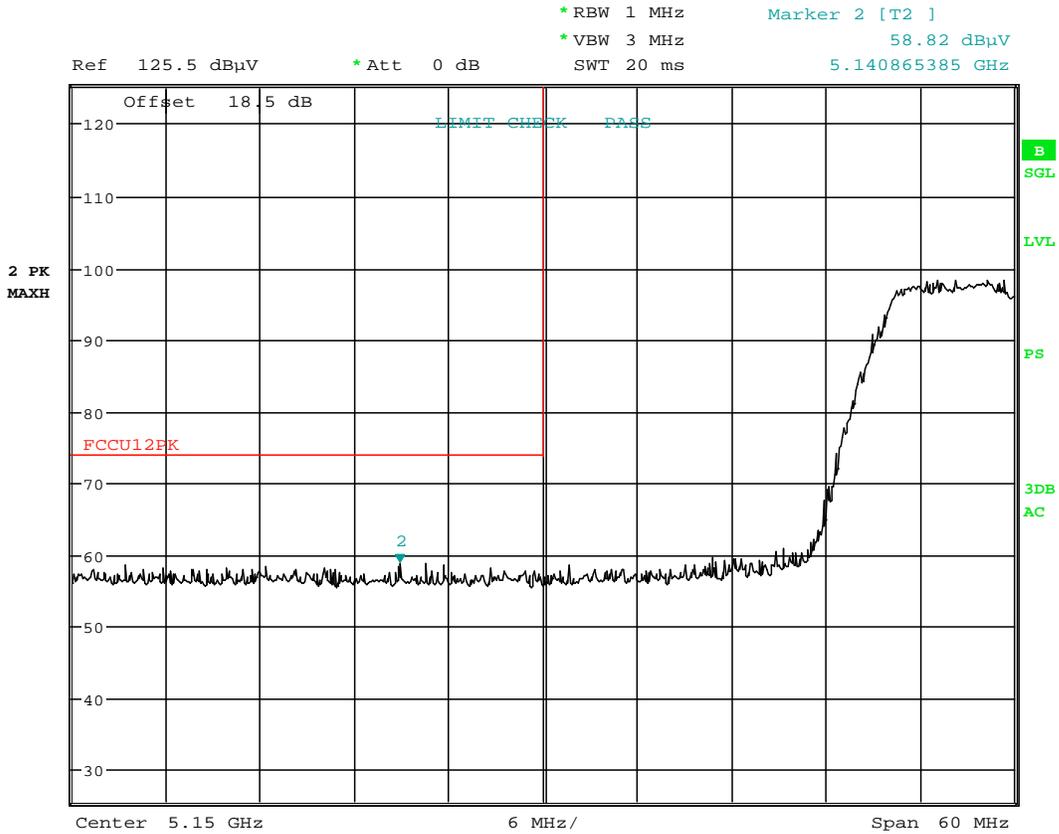


Date: 15.AUG.2016 12:32:36

Plot 7-22. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 36 of 102	

Antenna-1 Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

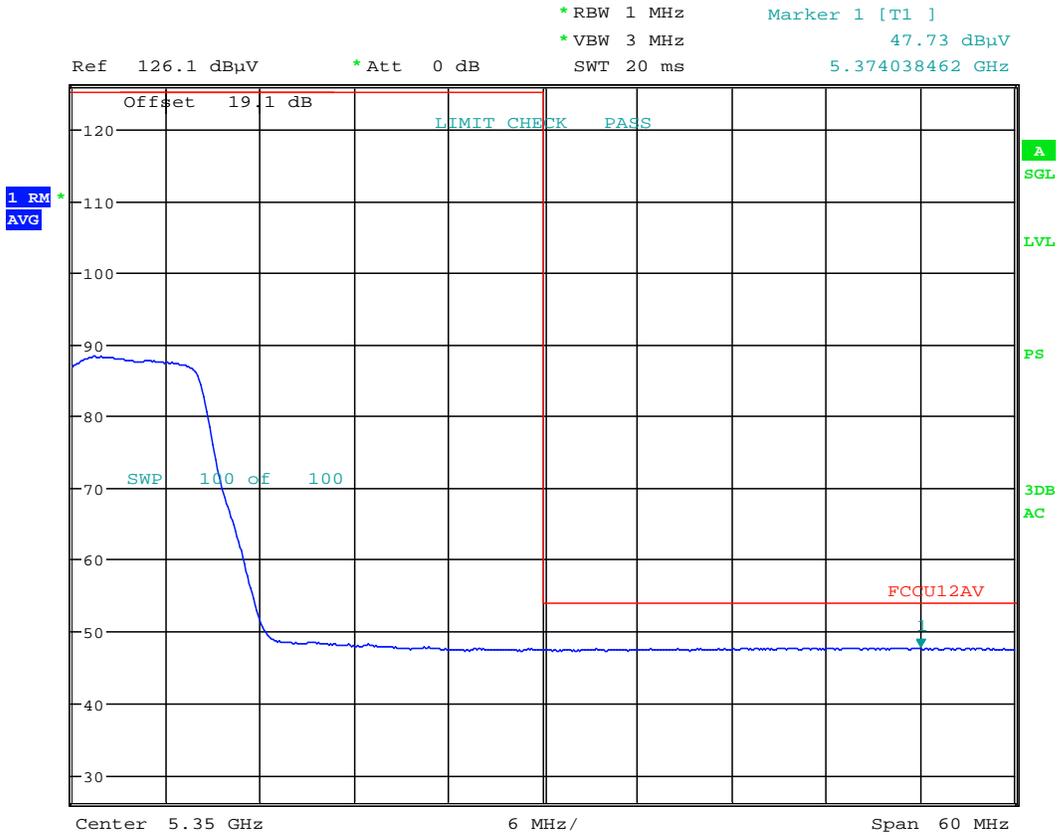


Date: 15.AUG.2016 12:41:02

Plot 7-23. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 37 of 102	

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

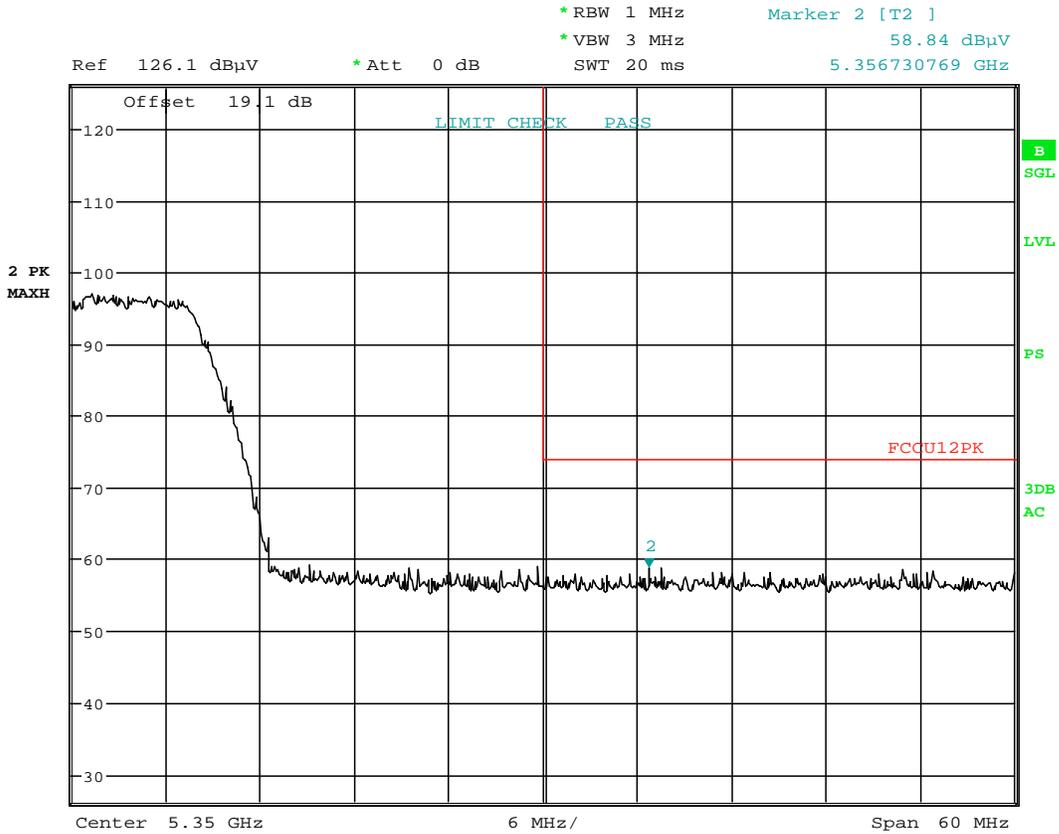

Date: 15.AUG.2016 12:41:14

Plot 7-24. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 38 of 102	

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

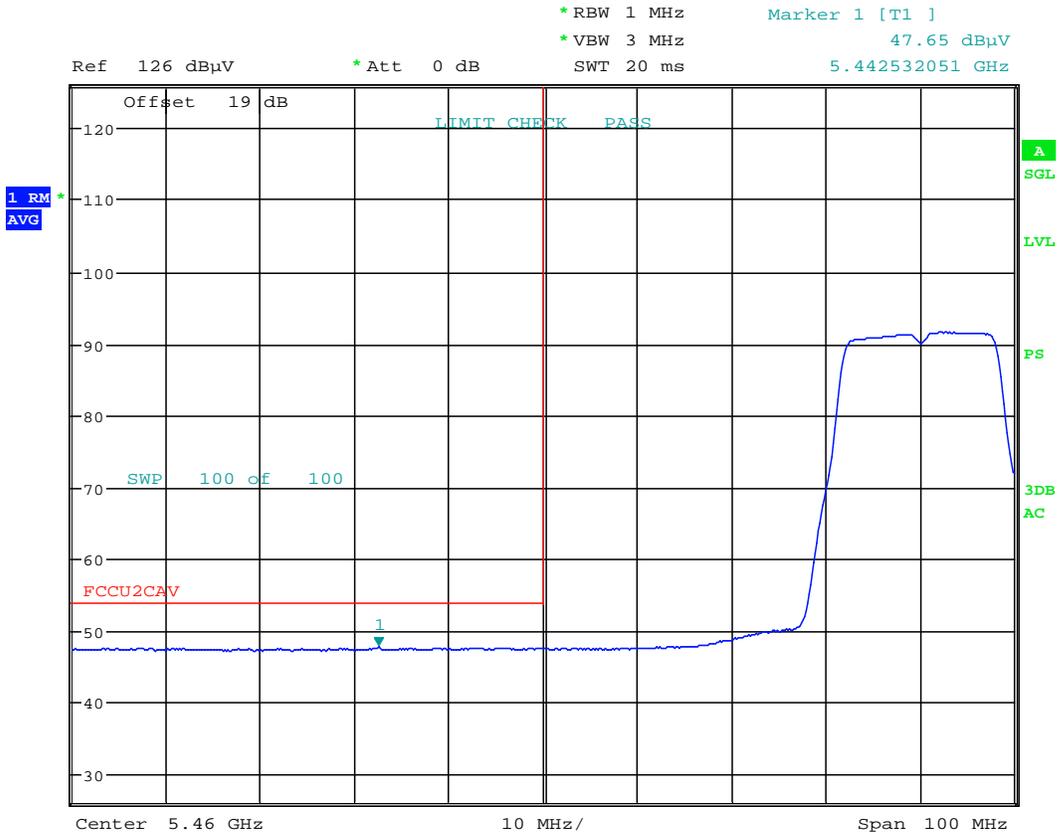


Date: 15.AUG.2016 12:56:19

Plot 7-25. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset		Page 39 of 102

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

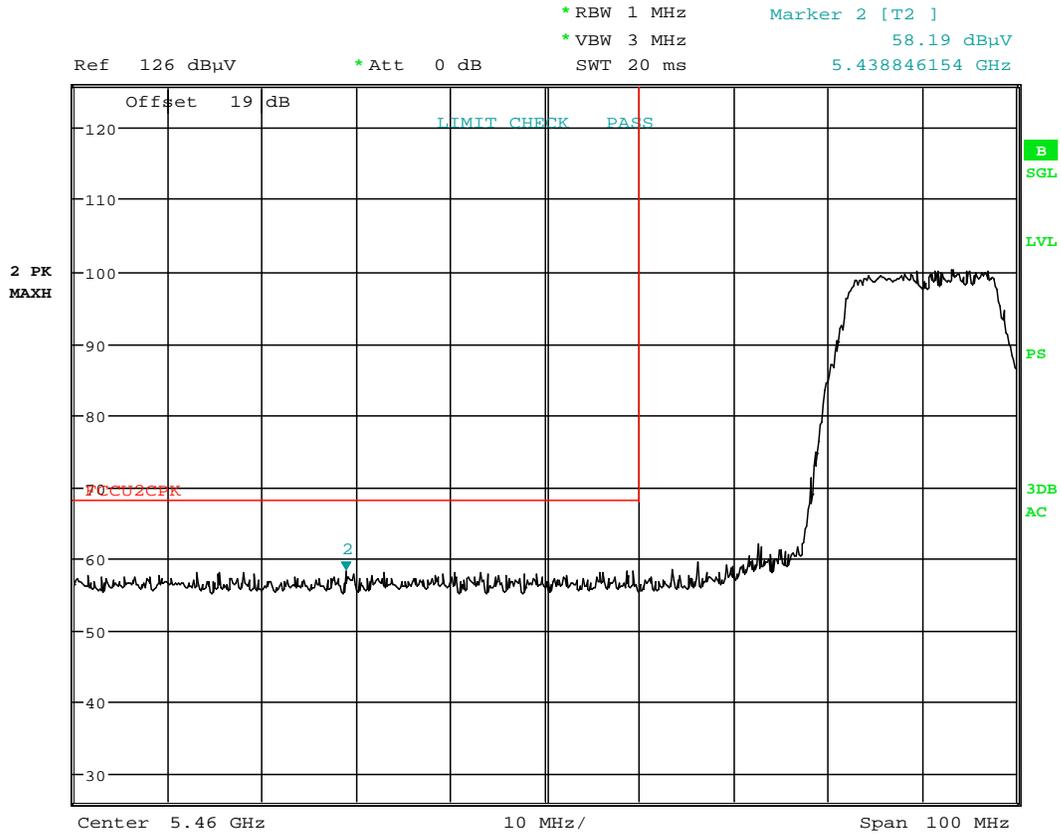


Date: 15.AUG.2016 12:56:30

Plot 7-26. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 40 of 102	

Antenna-1 Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

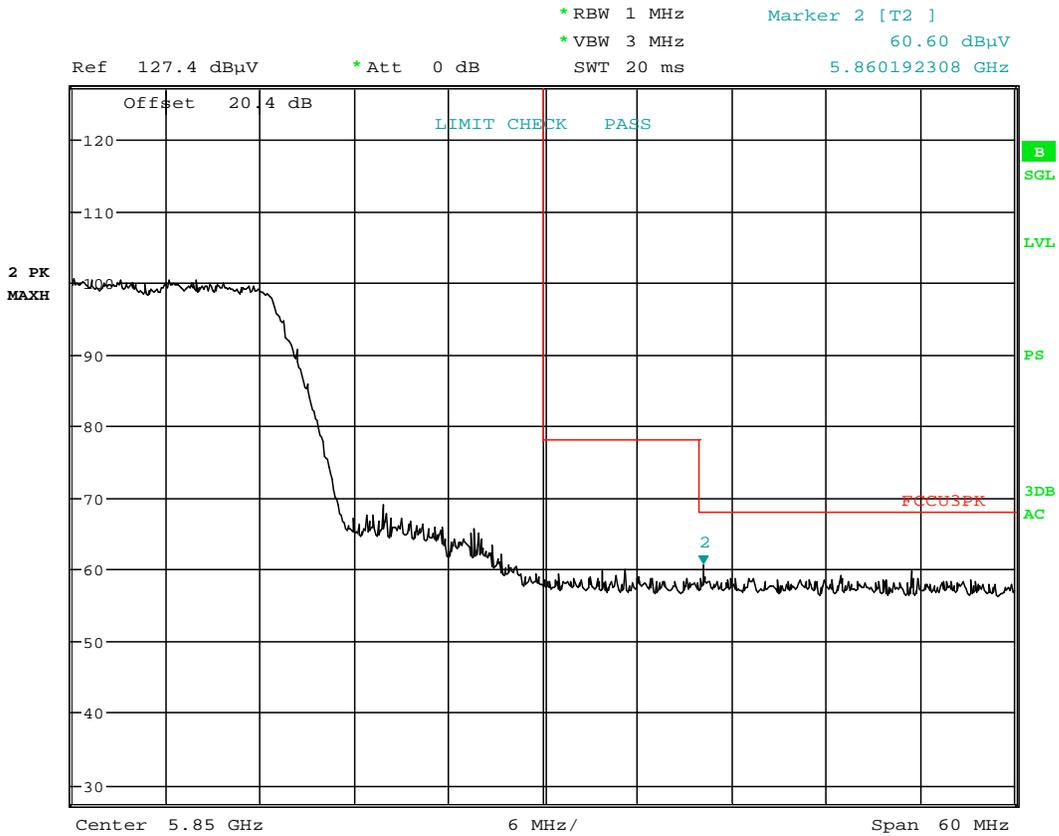


Date: 15.AUG.2016 13:05:22

Plot 7-27. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 41 of 102	

7.7.4 Antenna-1 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

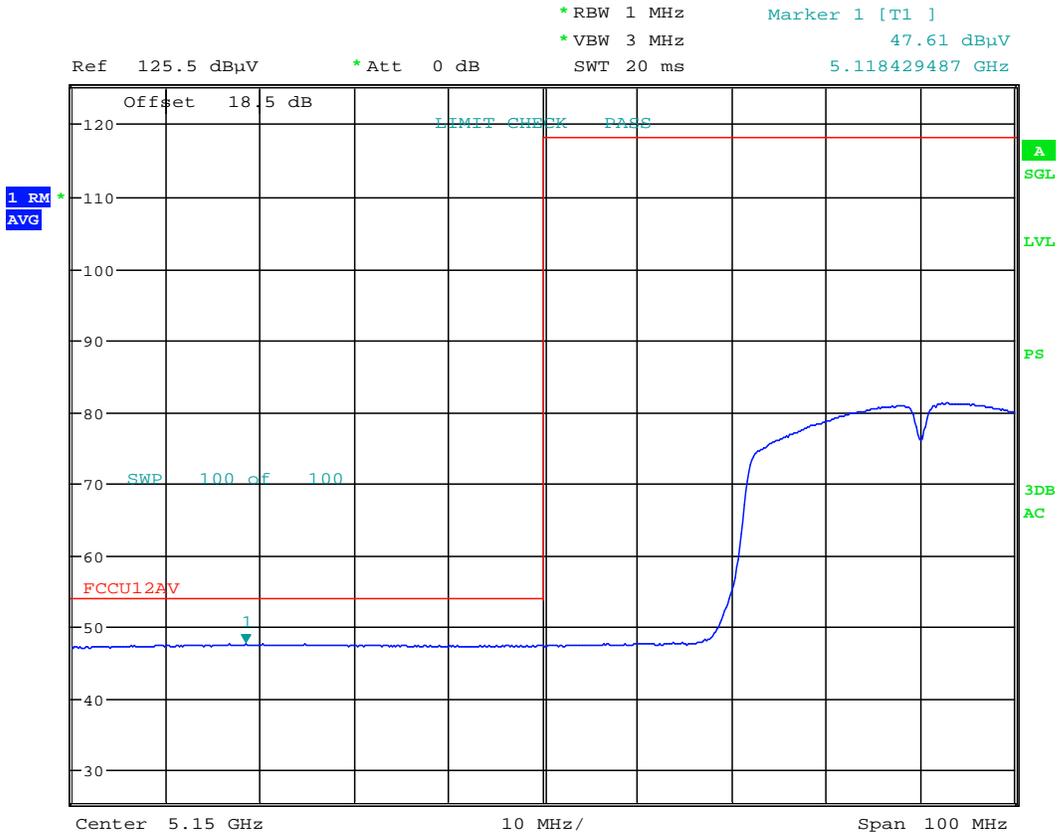


Date: 15.AUG.2016 12:34:53

Plot 7-28. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 42 of 102	

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

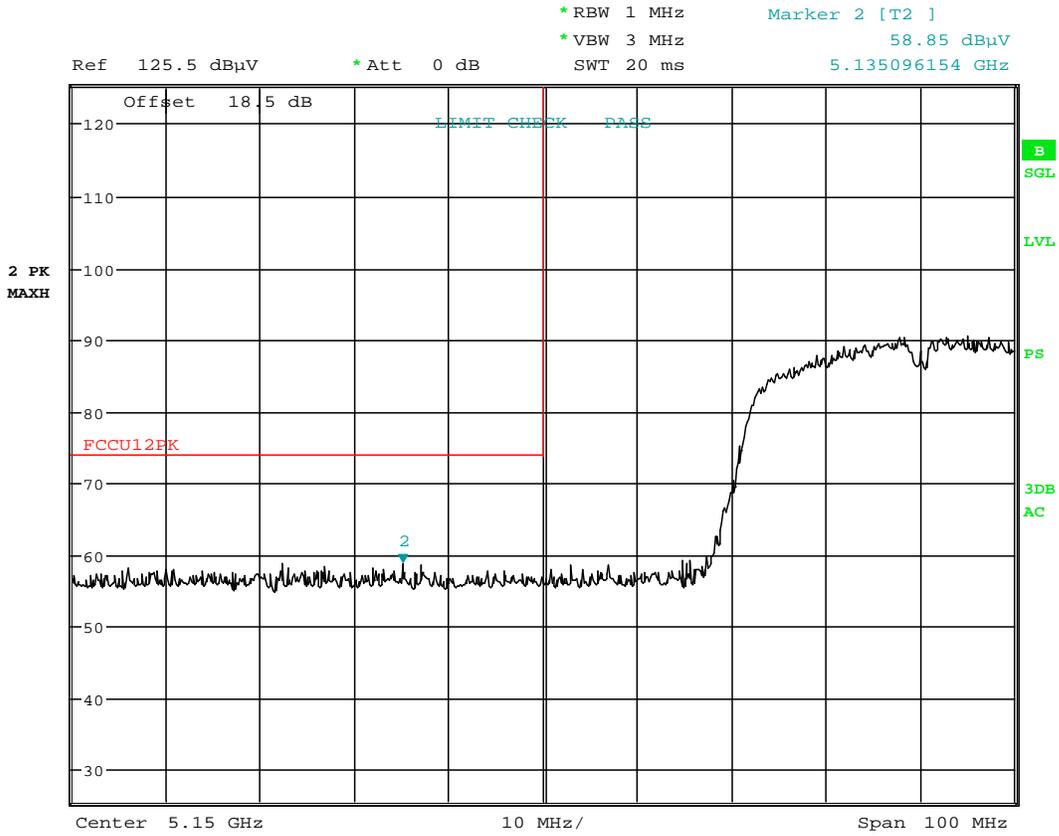

Date: 15.AUG.2016 12:35:05

Plot 7-29. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 43 of 102	

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

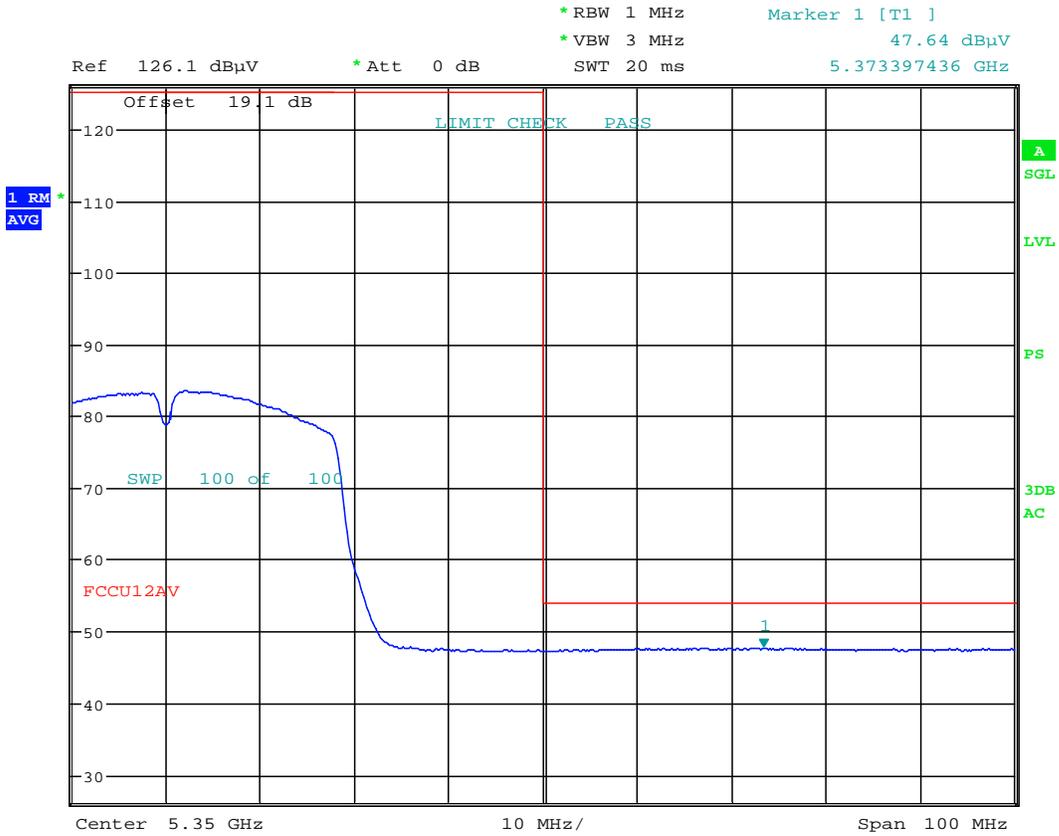


Date: 15.AUG.2016 12:47:57

Plot 7-30. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 44 of 102	

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

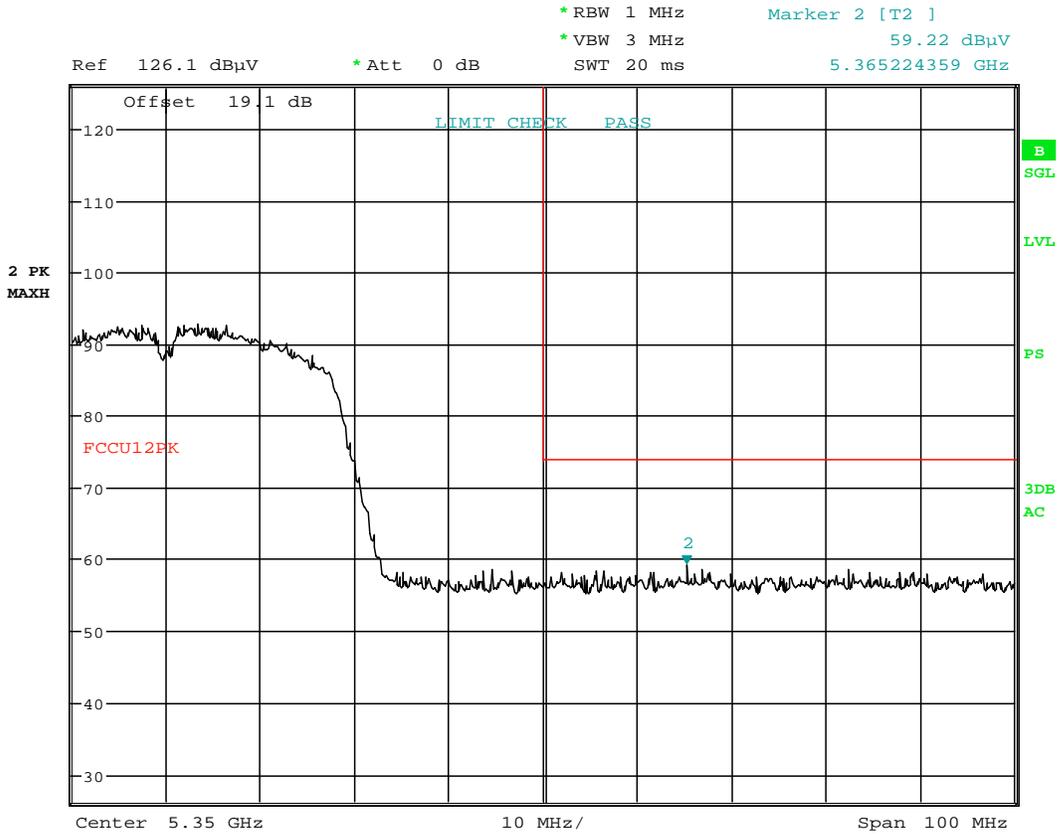


Date: 15.AUG.2016 12:48:11

Plot 7-31. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 45 of 102	

Antenna-1 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

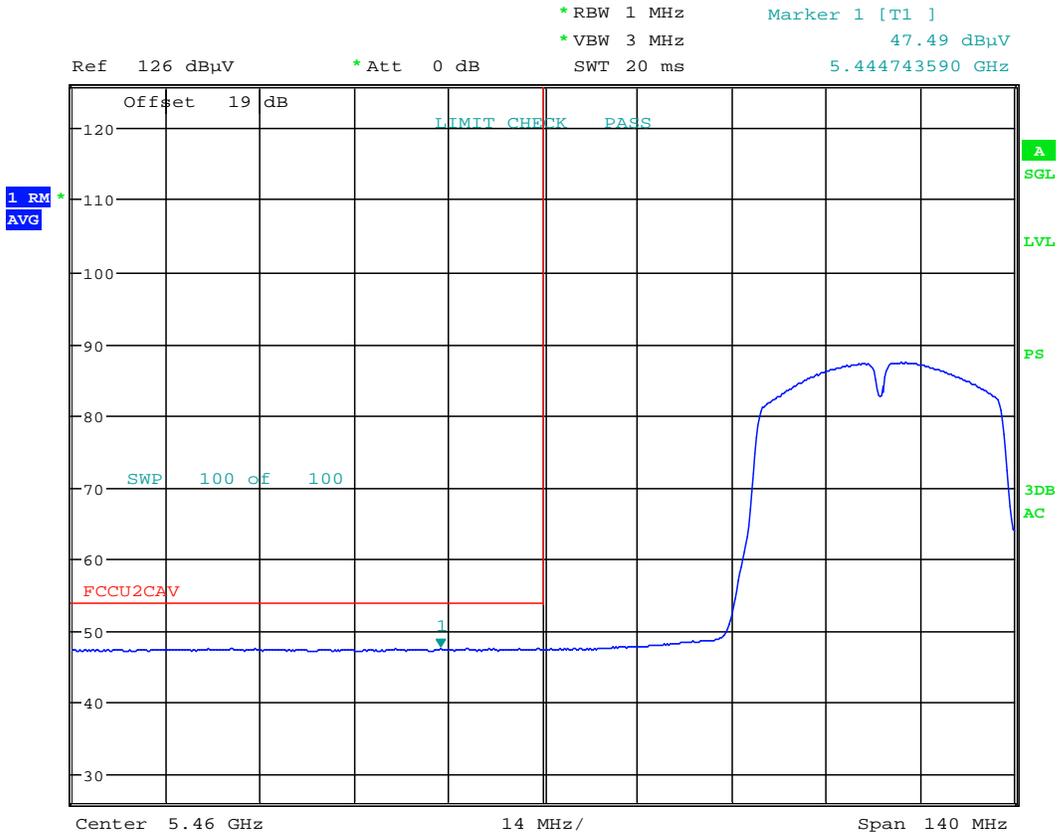


Date: 15.AUG.2016 12:58:11

Plot 7-32. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 46 of 102	

Antenna-1 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

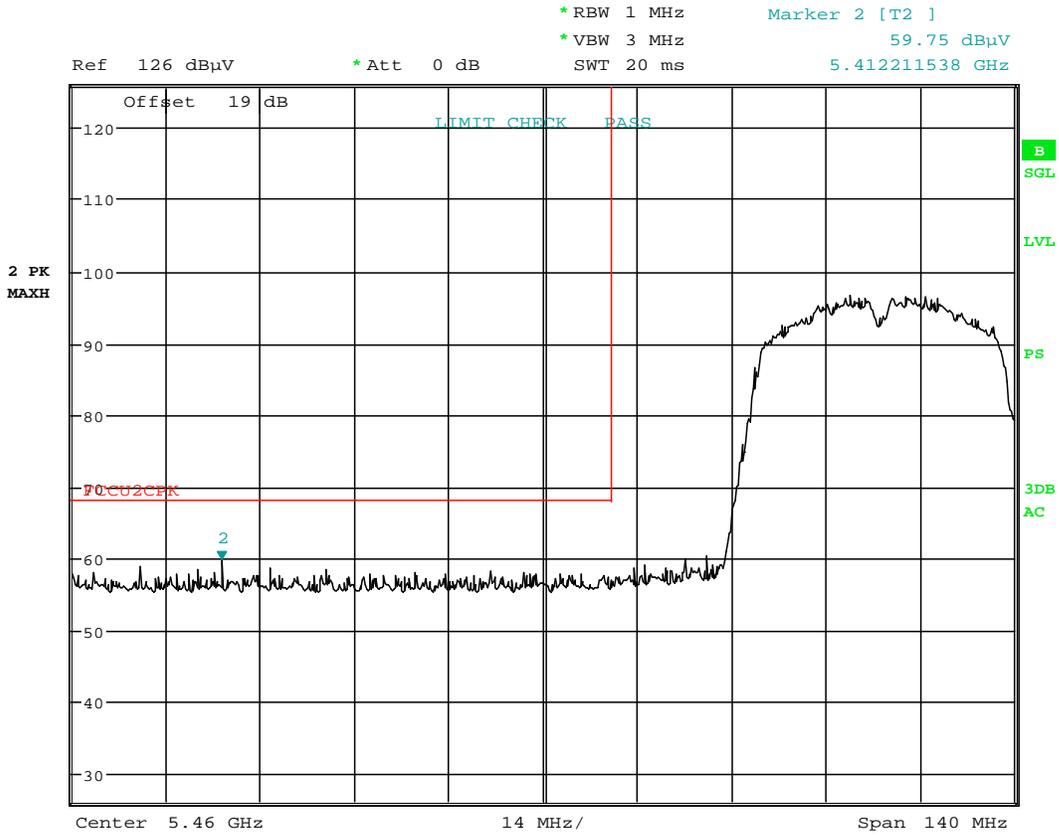


Date: 15.AUG.2016 12:58:24

Plot 7-33. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 47 of 102	

Antenna-1 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

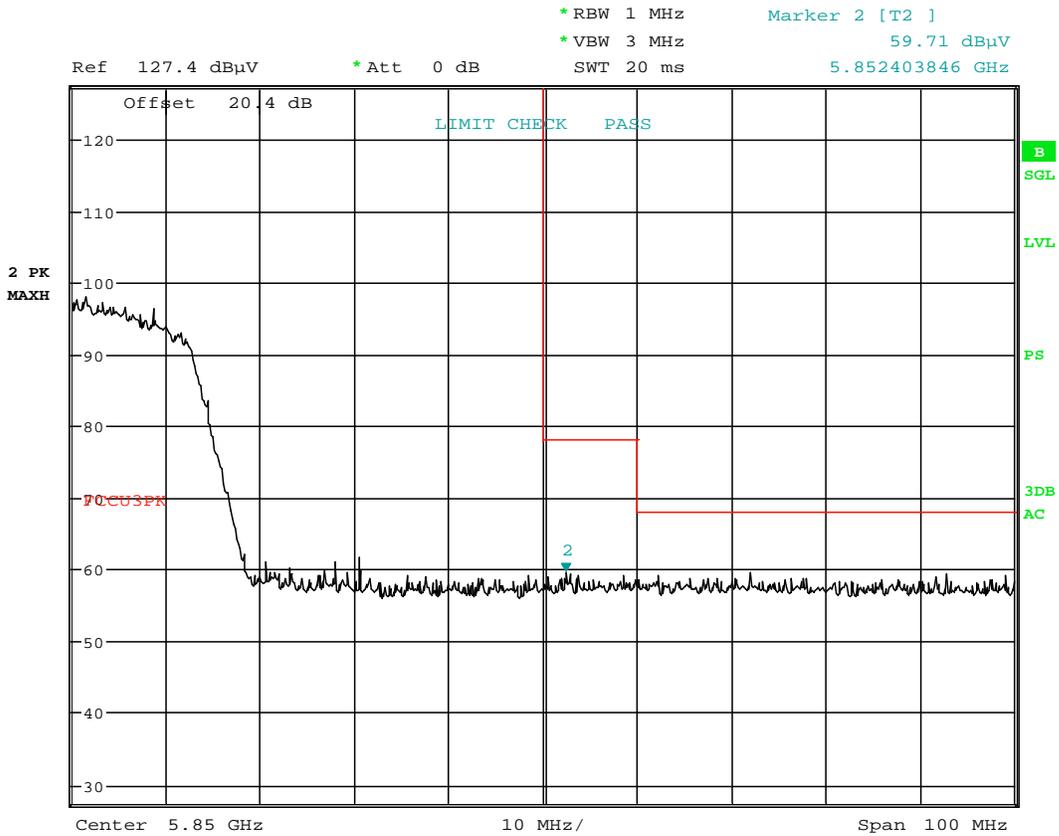

Date: 15.AUG.2016 13:07:01

Plot 7-34. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset		Page 48 of 102

7.7.5 Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

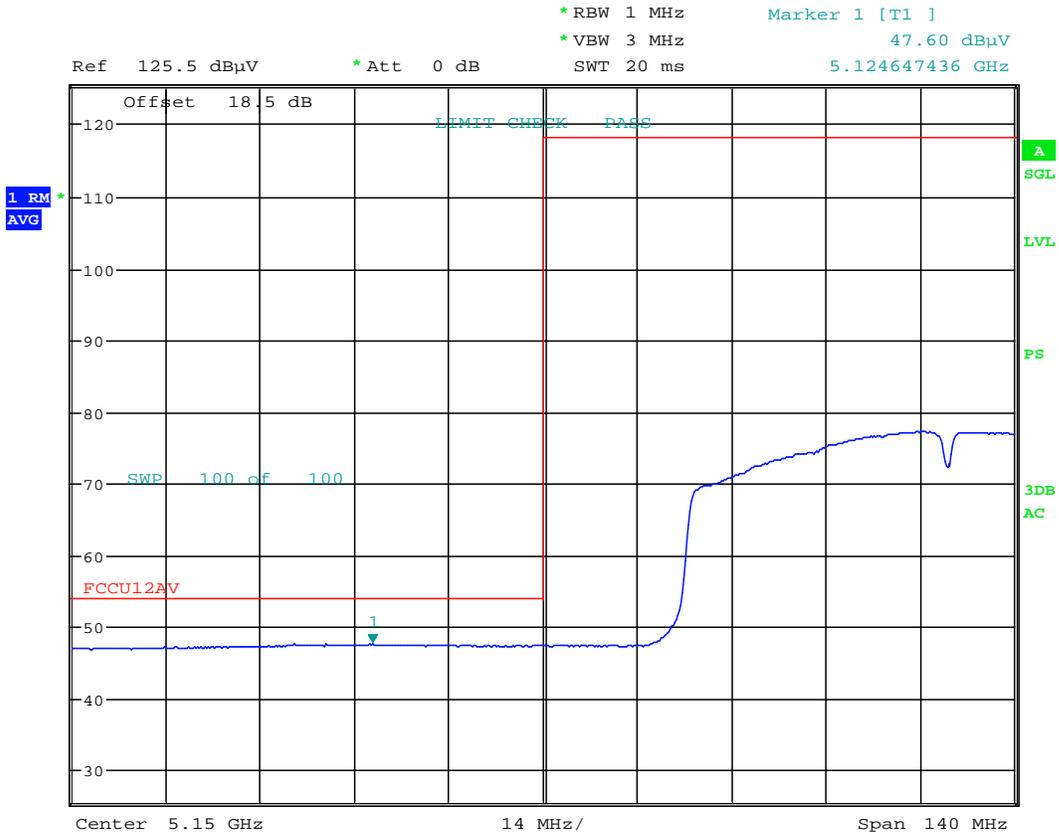


Date: 15.AUG.2016 12:36:25

Plot 7-35. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 49 of 102	

Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

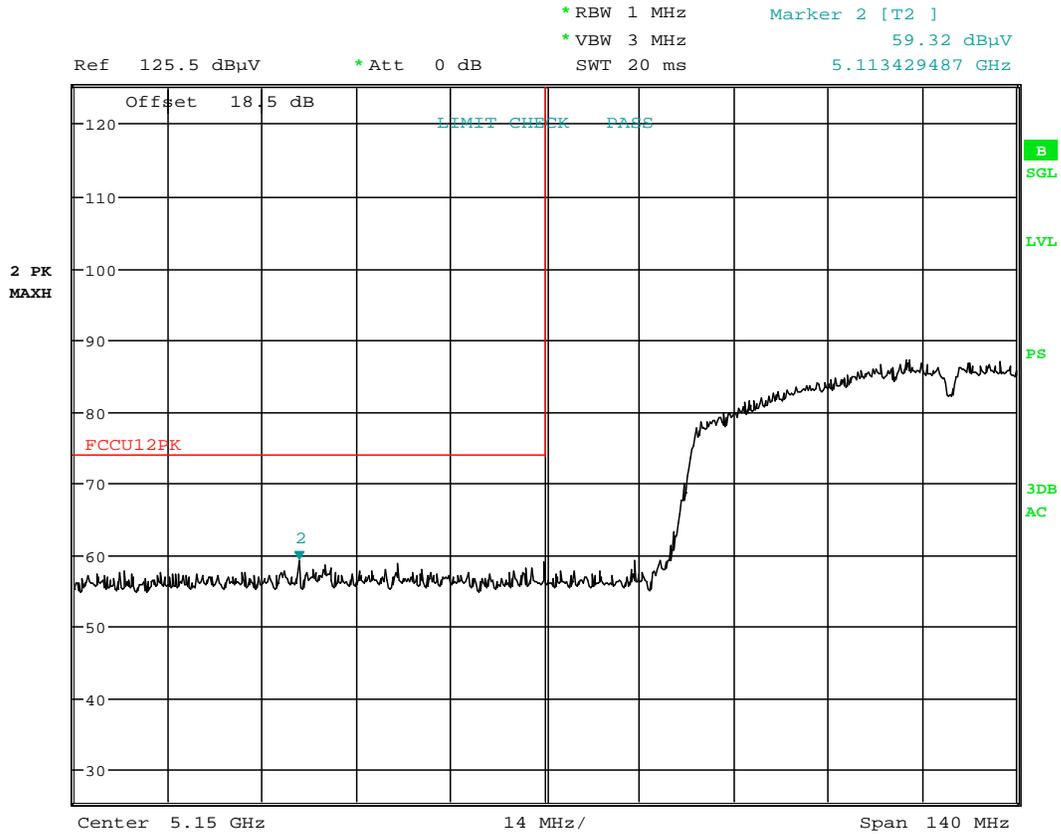

Date: 15.AUG.2016 12:36:50

Plot 7-36. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 50 of 102	

Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

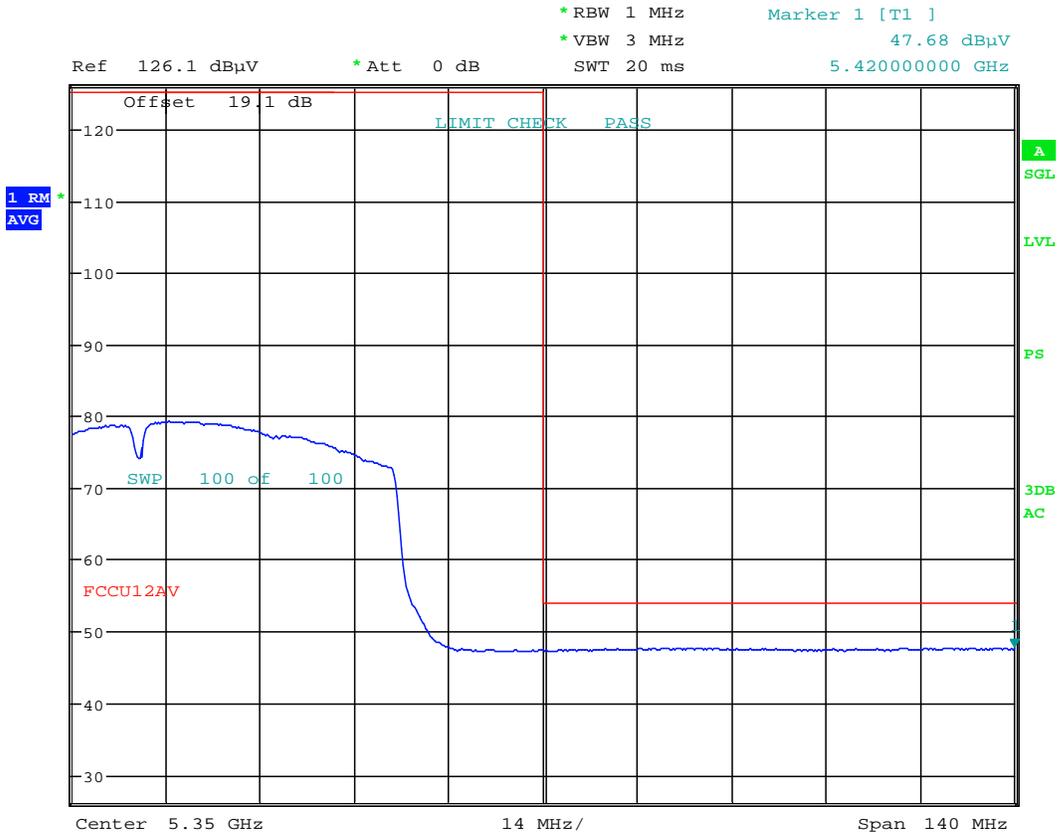


Date: 15.AUG.2016 12:49:20

Plot 7-37. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset		Page 51 of 102

Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

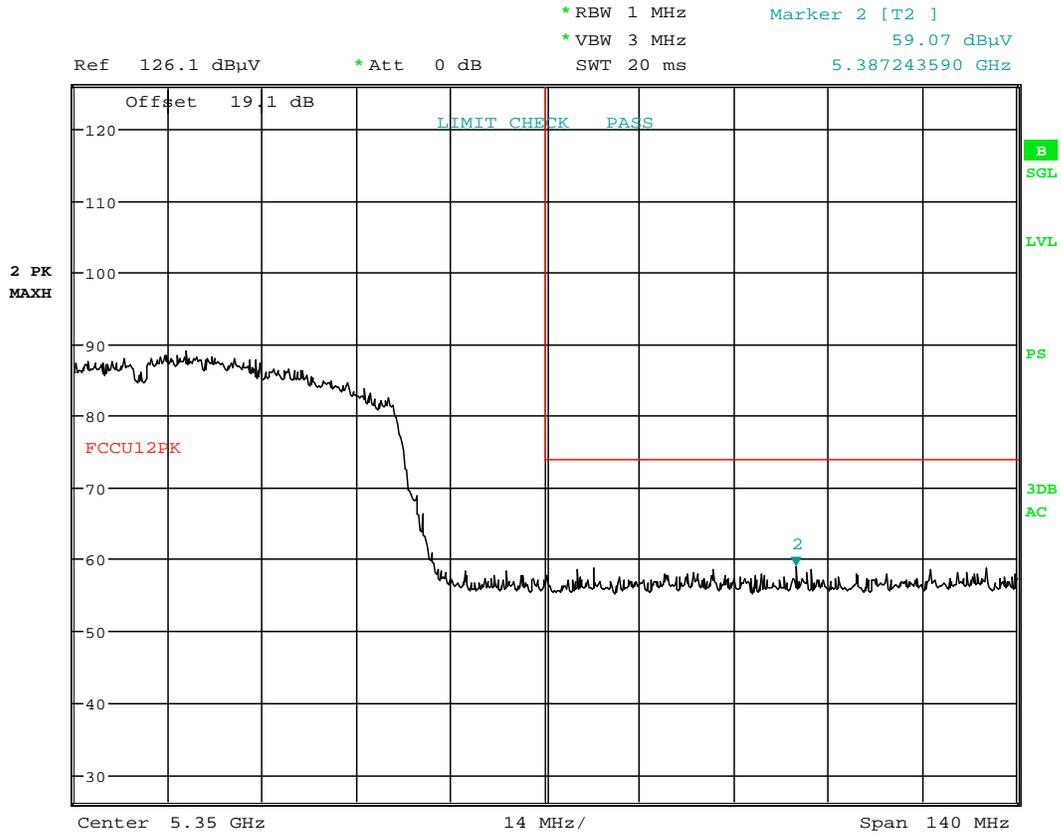


Date: 15.AUG.2016 12:49:31

Plot 7-38. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 52 of 102	

Antenna-1 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

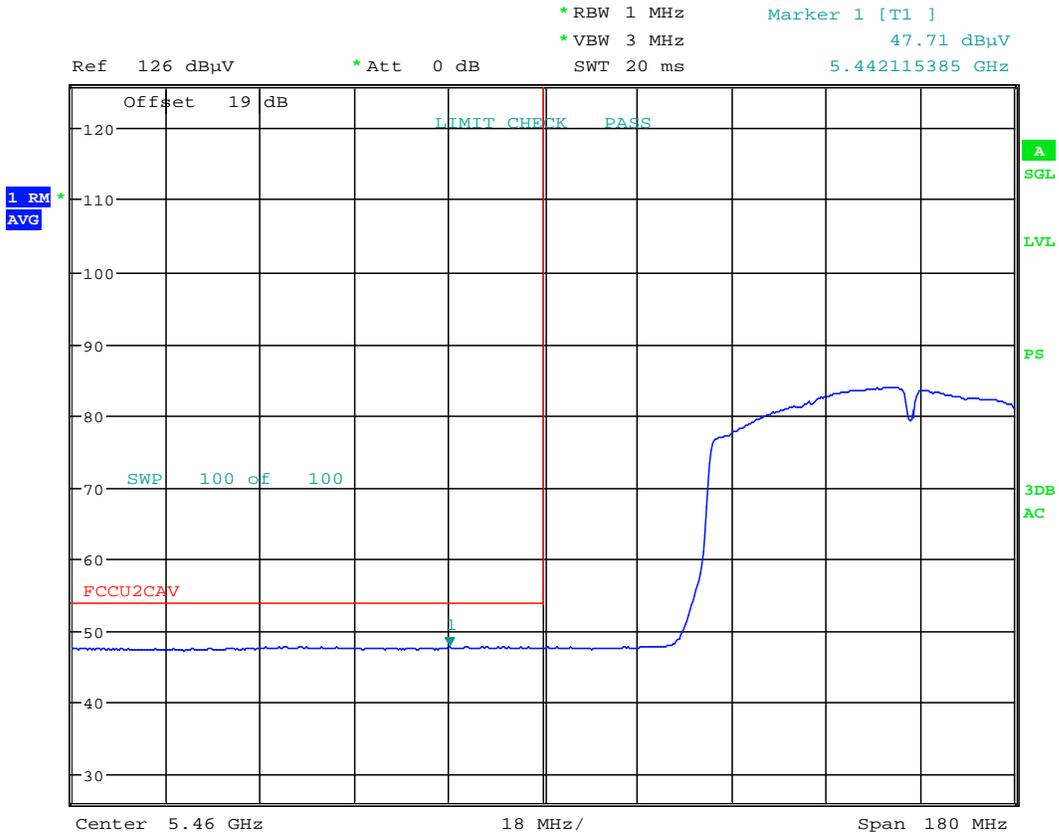


Date: 15.AUG.2016 13:00:06

Plot 7-39. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 53 of 102	

Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

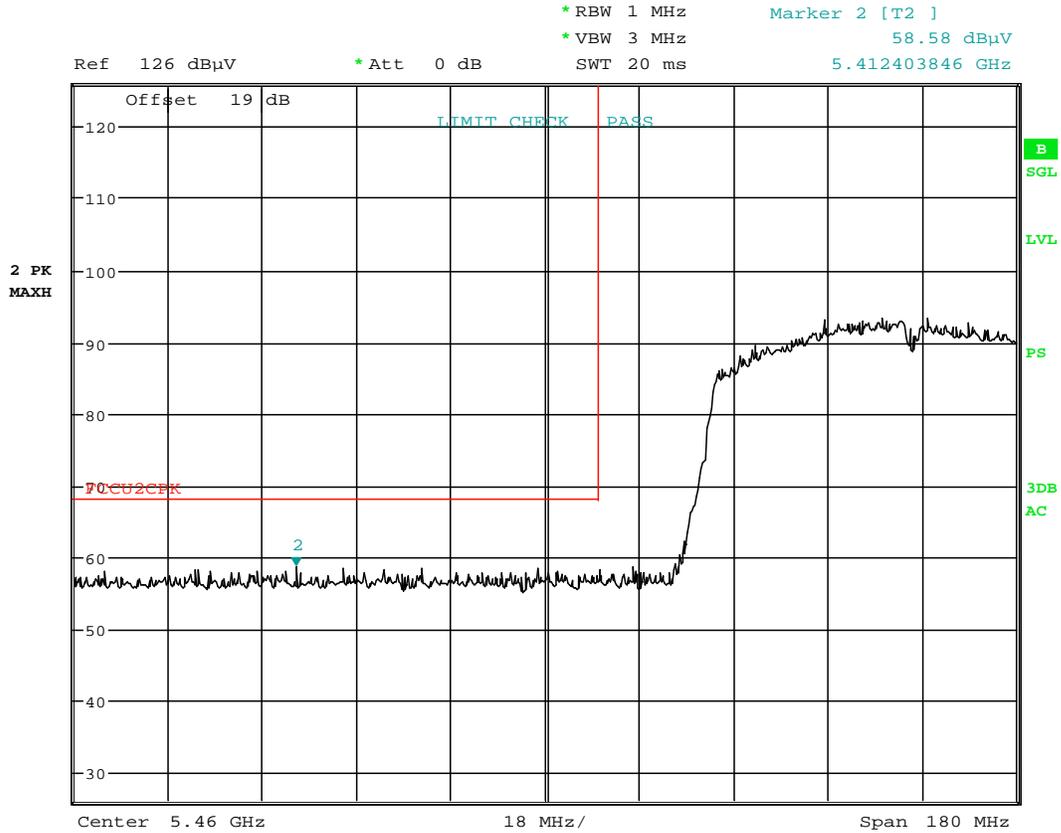


Date: 15.AUG.2016 13:00:18

Plot 7-40. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 54 of 102	

Antenna-1 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

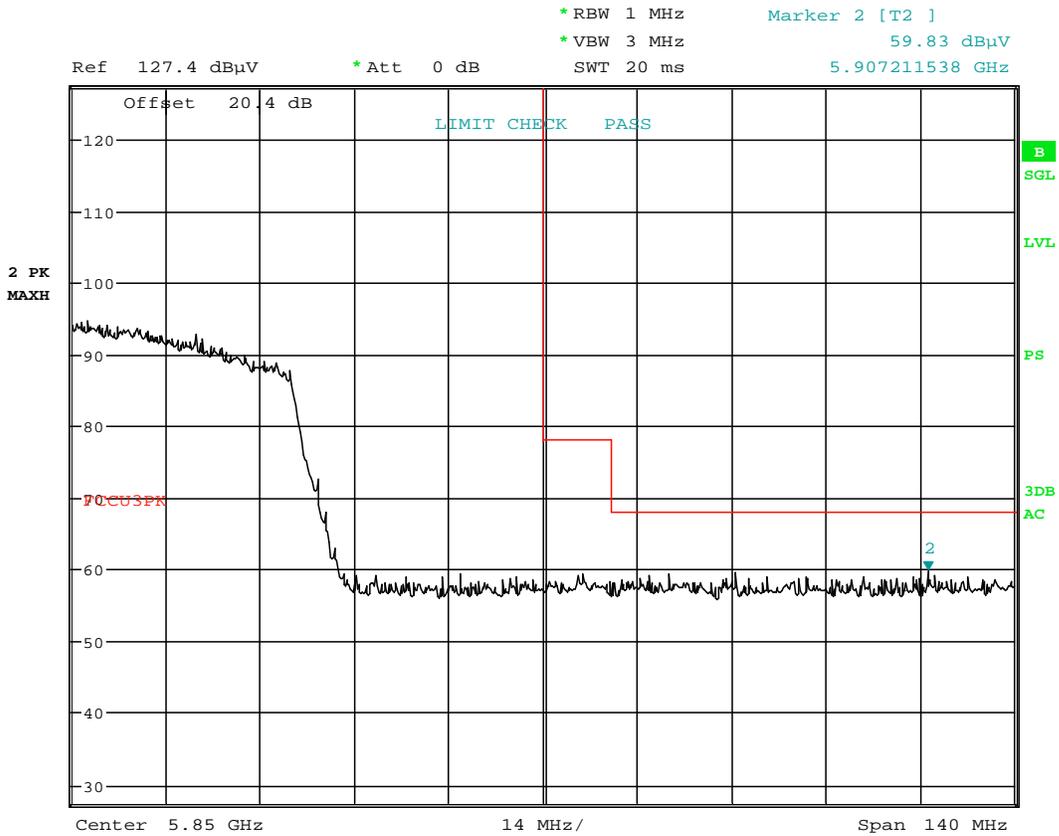


Date: 15.AUG.2016 13:09:05

Plot 7-41. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 55 of 102	

7.7.6 Antenna-2 Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

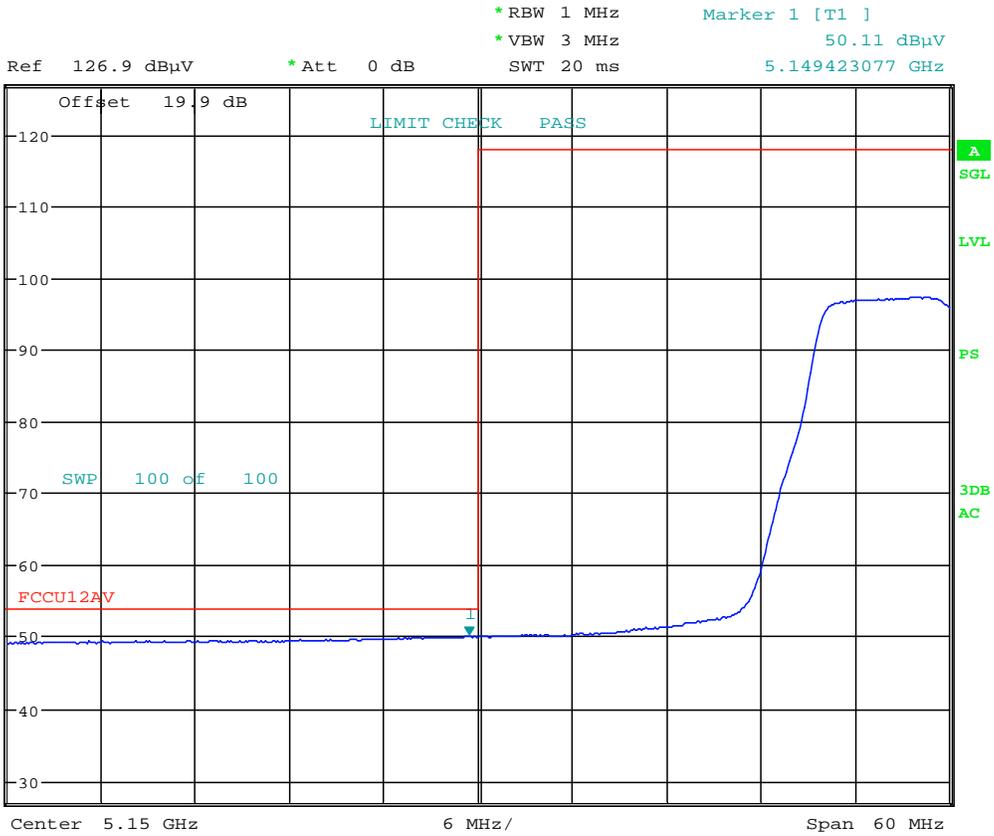


Date: 16.AUG.2016 07:47:54

Plot 7-42. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 56 of 102	

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

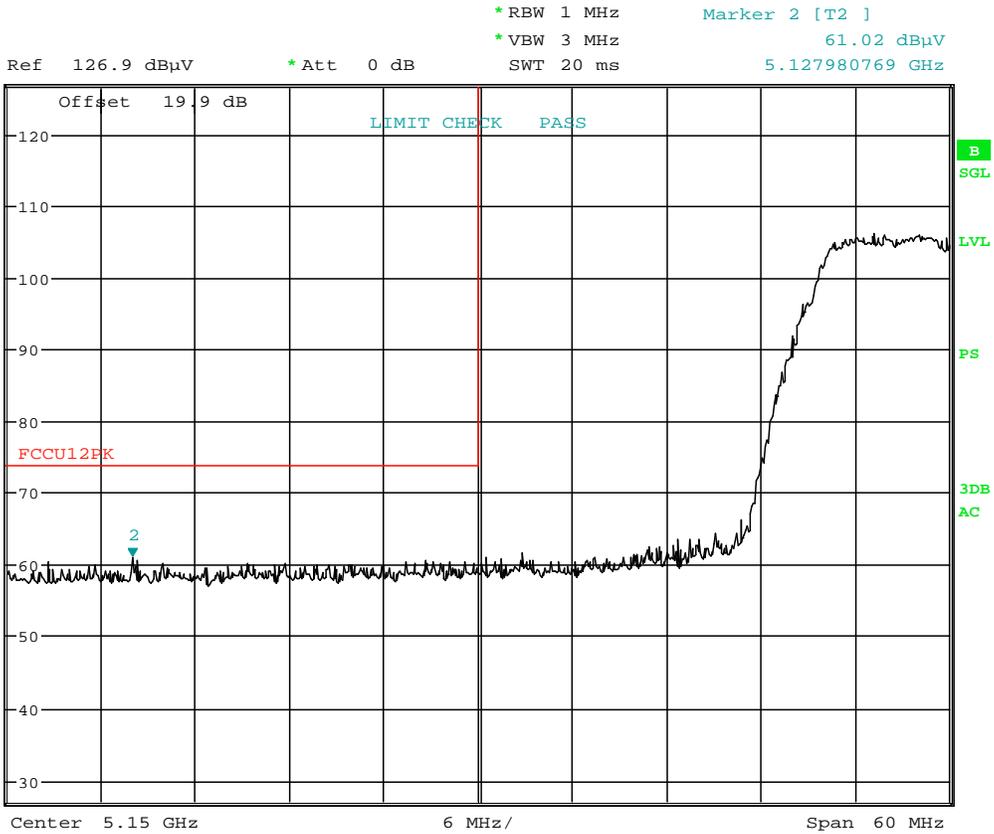

Date: 16.AUG.2016 07:48:06

Plot 7-43. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 57 of 102	

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

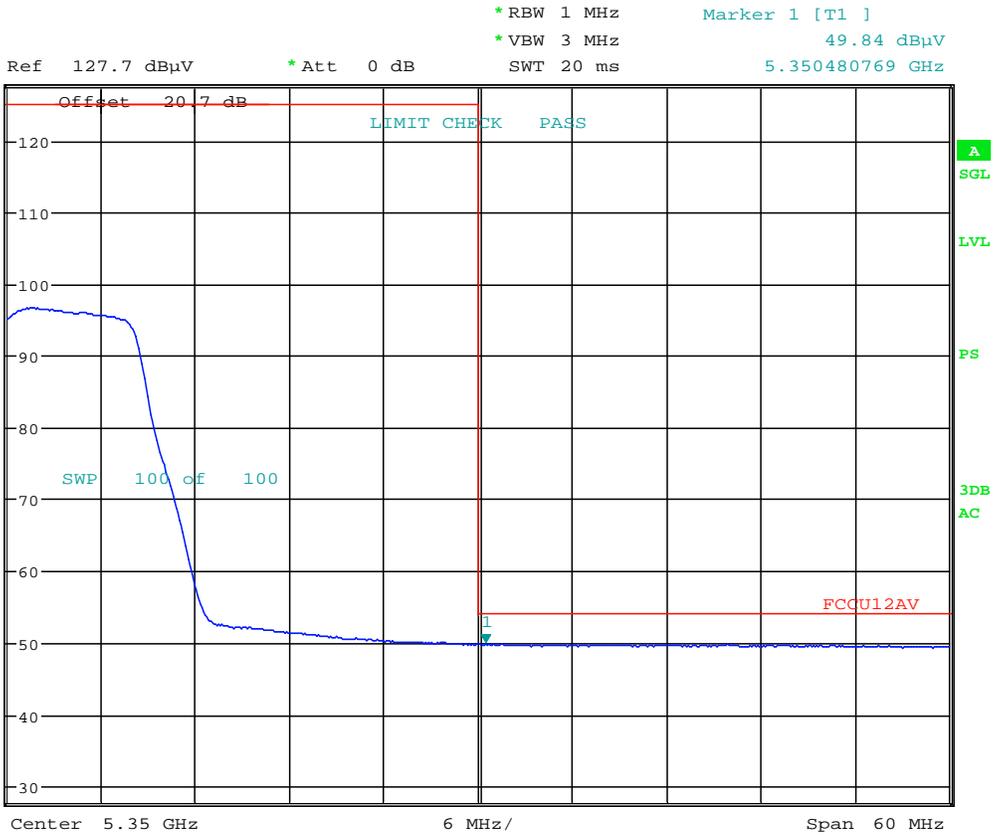


Date: 16.AUG.2016 07:57:06

Plot 7-44. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 58 of 102	

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

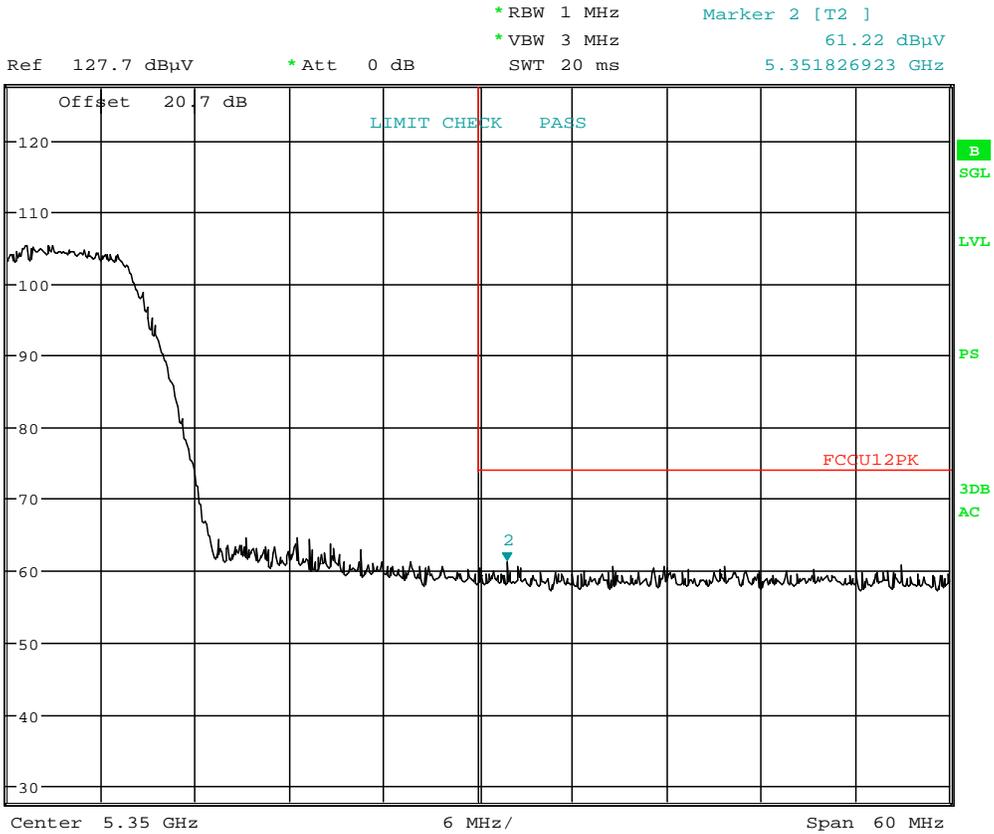


Date: 16.AUG.2016 07:57:16

Plot 7-45. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 59 of 102	

Antenna-2 Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

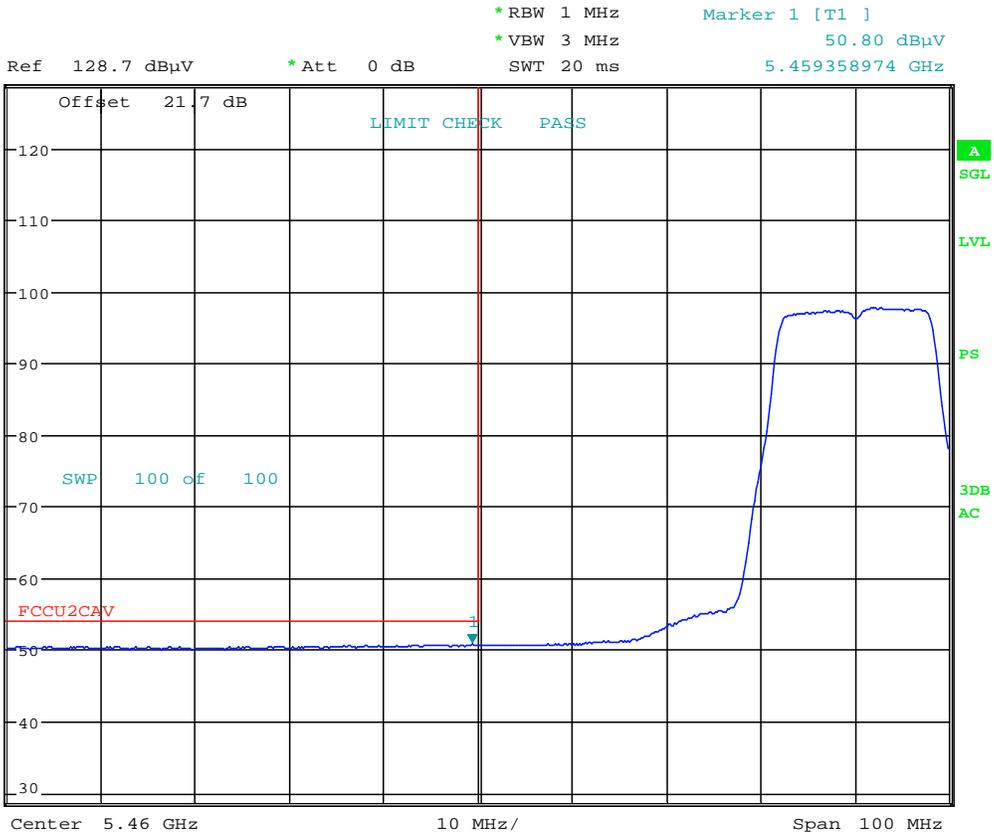


Date: 16.AUG.2016 08:04:51

Plot 7-46. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 60 of 102	

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

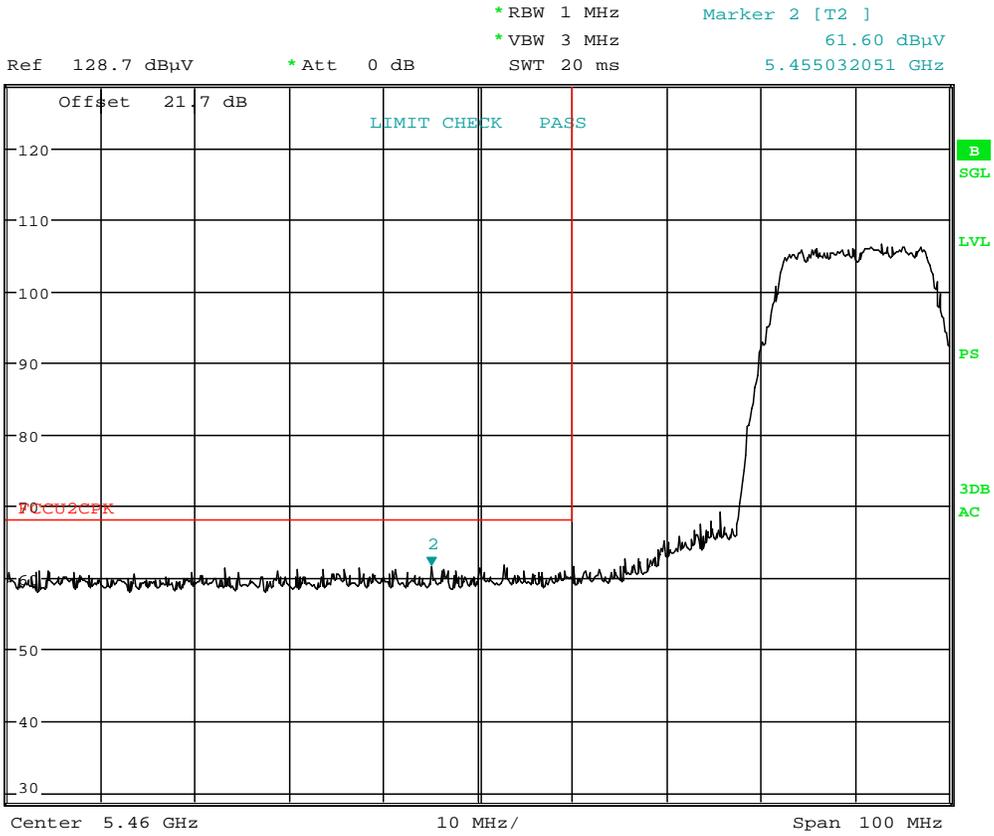


Date: 16.AUG.2016 08:05:03

Plot 7-47. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 61 of 102	

Antenna-2 Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

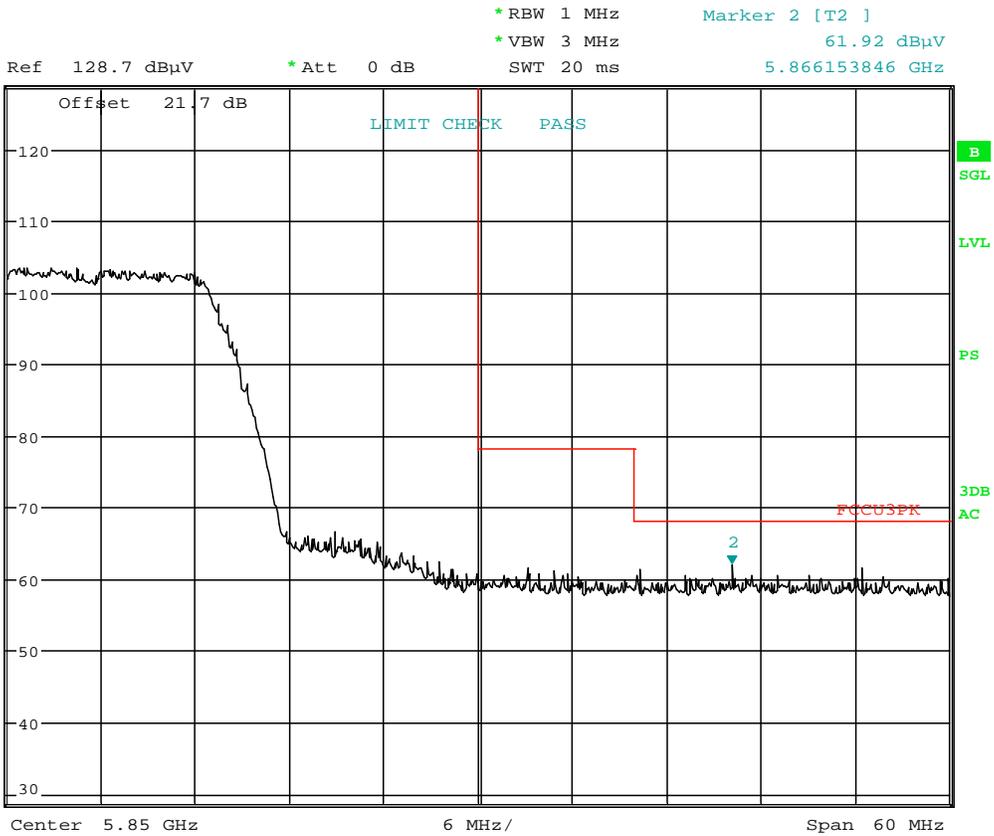


Date: 16.AUG.2016 08:17:38

Plot 7-48. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 62 of 102	

7.7.7 Antenna-2 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

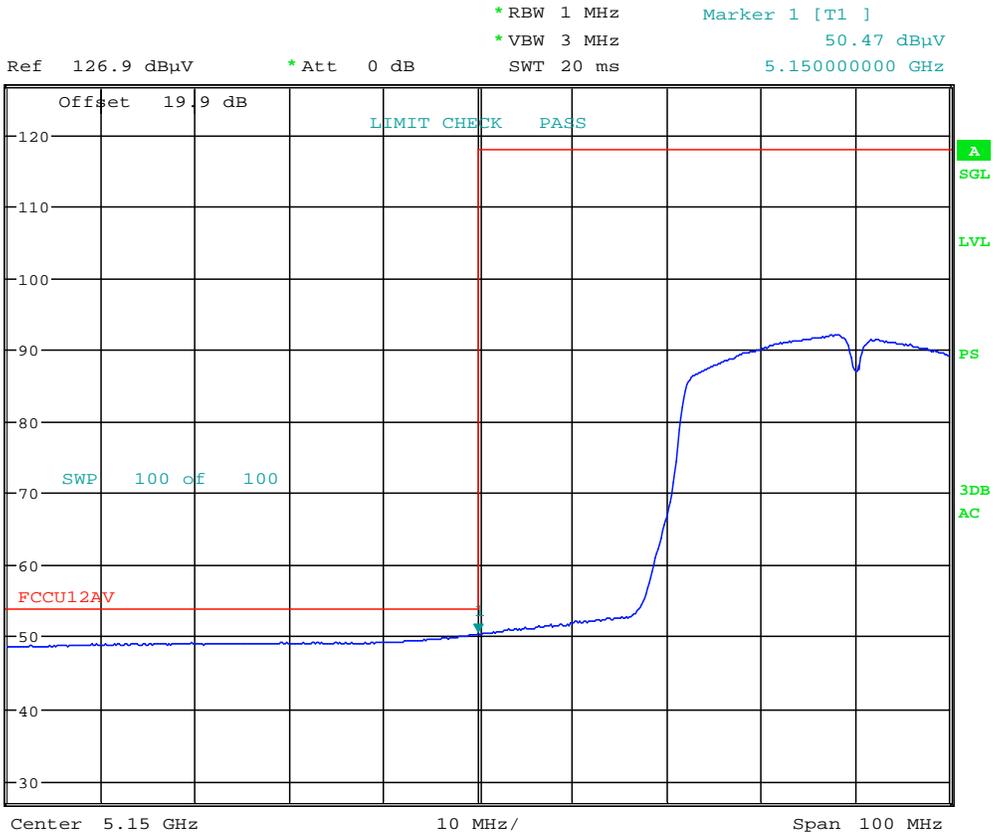


Date: 16.AUG.2016 07:50:47

Plot 7-49. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 63 of 102	

Antenna-2 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

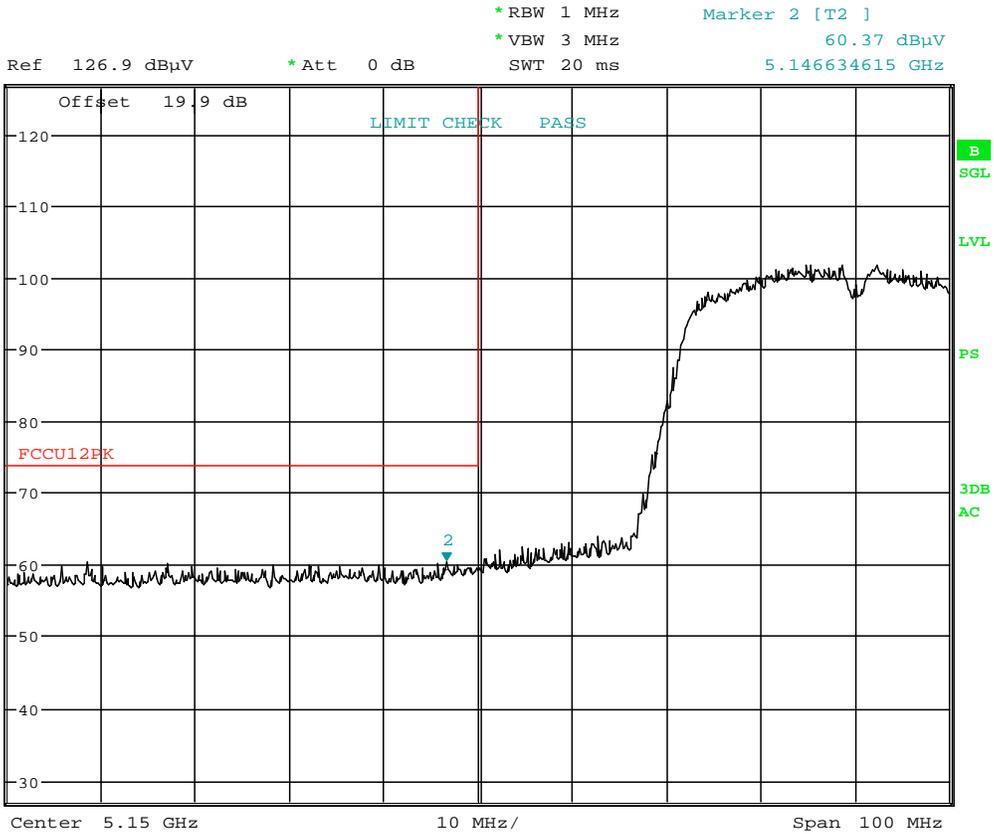


Date: 16.AUG.2016 07:51:05

Plot 7-50. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 64 of 102	

Antenna-2 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

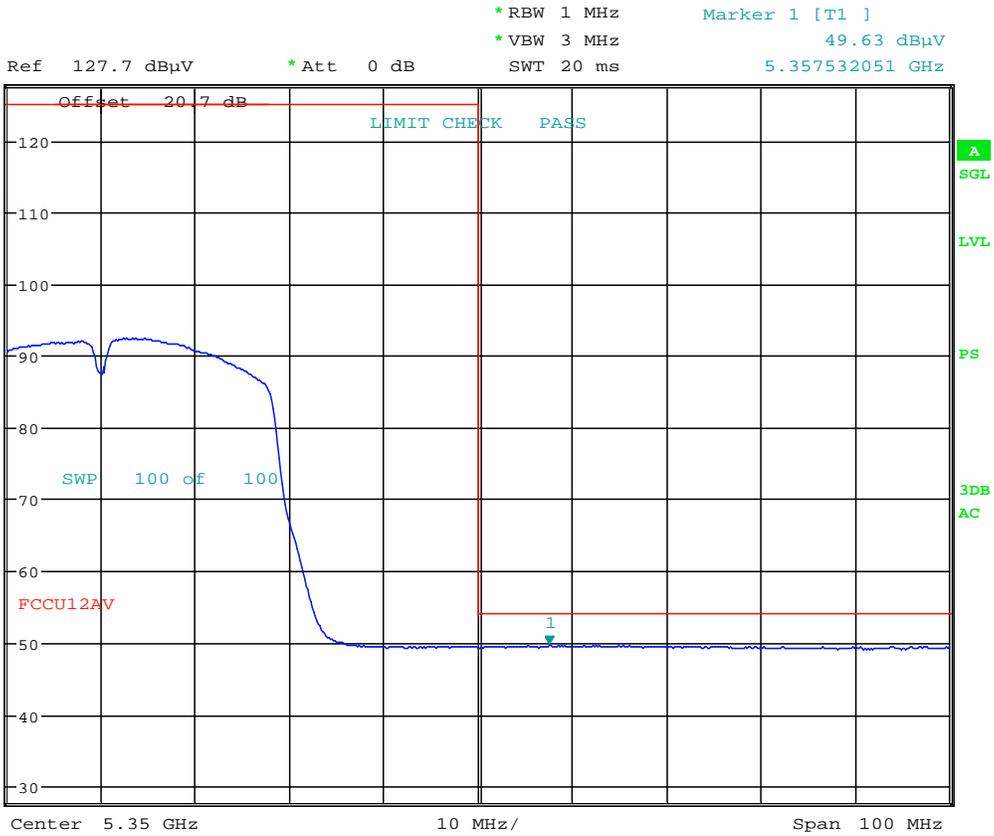


Date: 16.AUG.2016 07:58:27

Plot 7-51. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 65 of 102	

Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

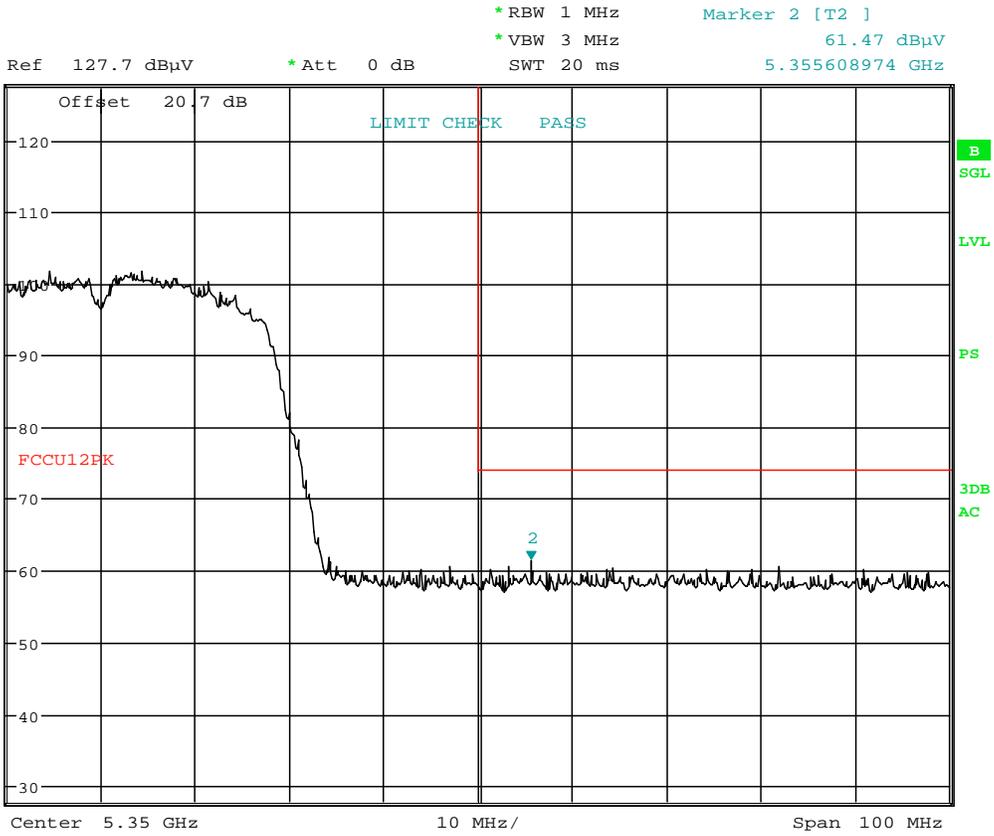


Date: 16.AUG.2016 07:58:38

Plot 7-52. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 66 of 102	

Antenna-2 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

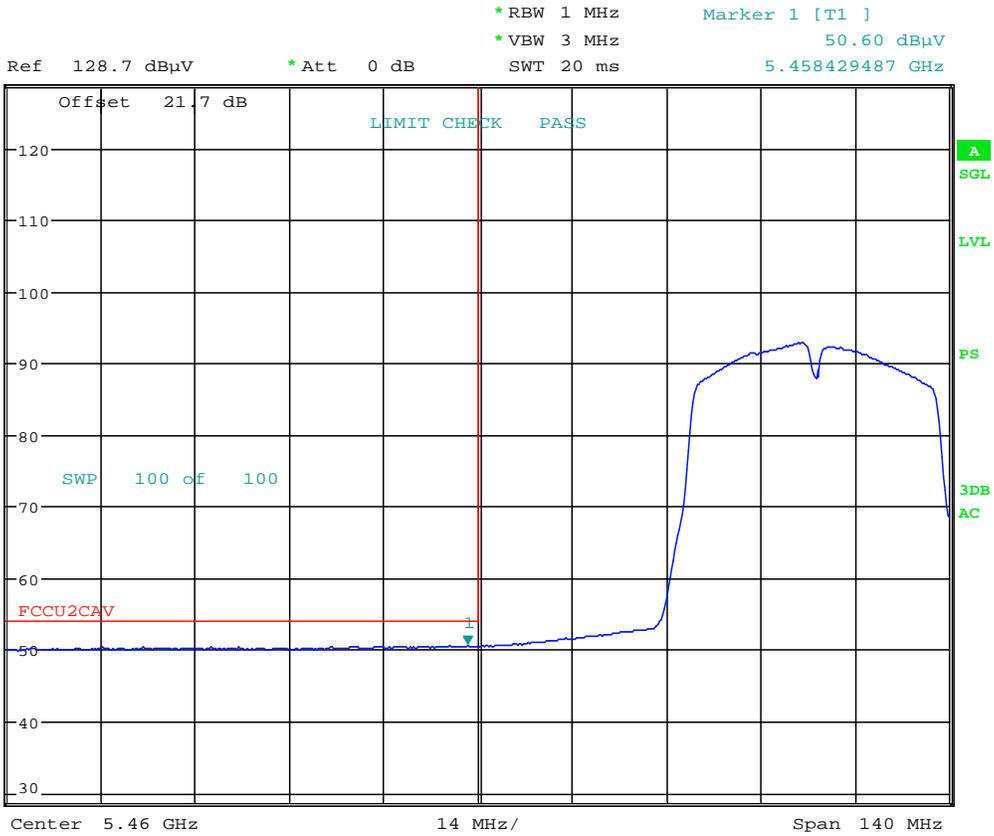


Date: 16.AUG.2016 08:07:46

Plot 7-53. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 67 of 102	

Antenna-2 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

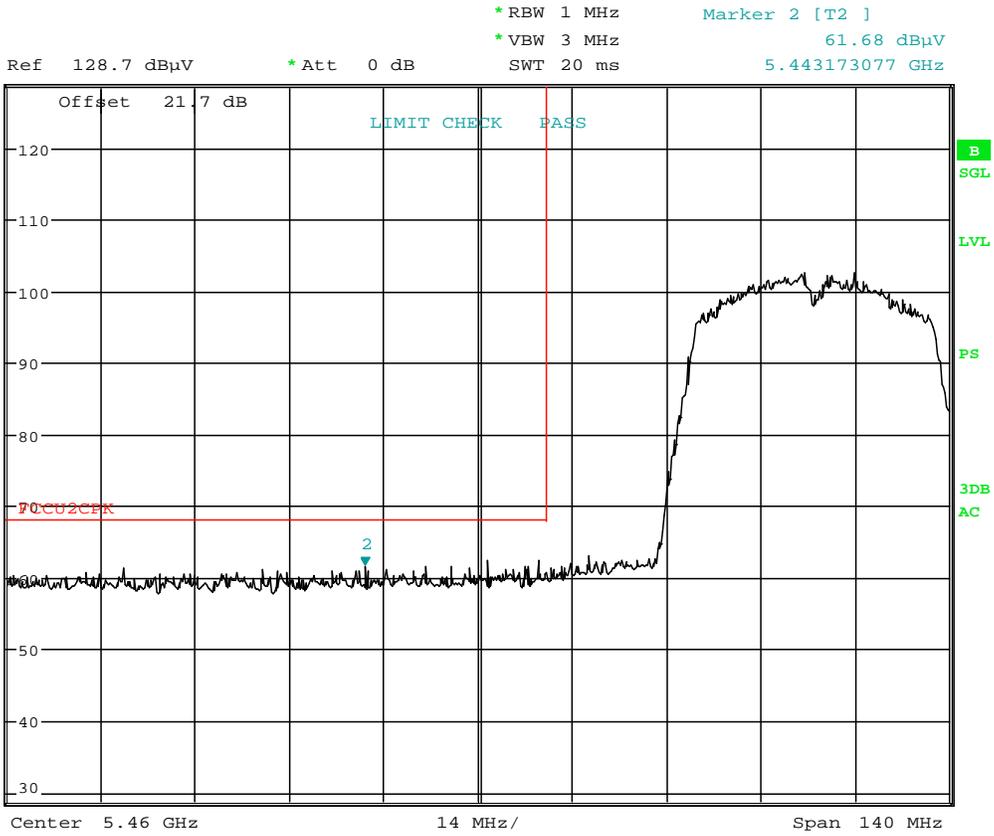


Date: 16.AUG.2016 08:07:56

Plot 7-54. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 68 of 102	

Antenna-2 Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

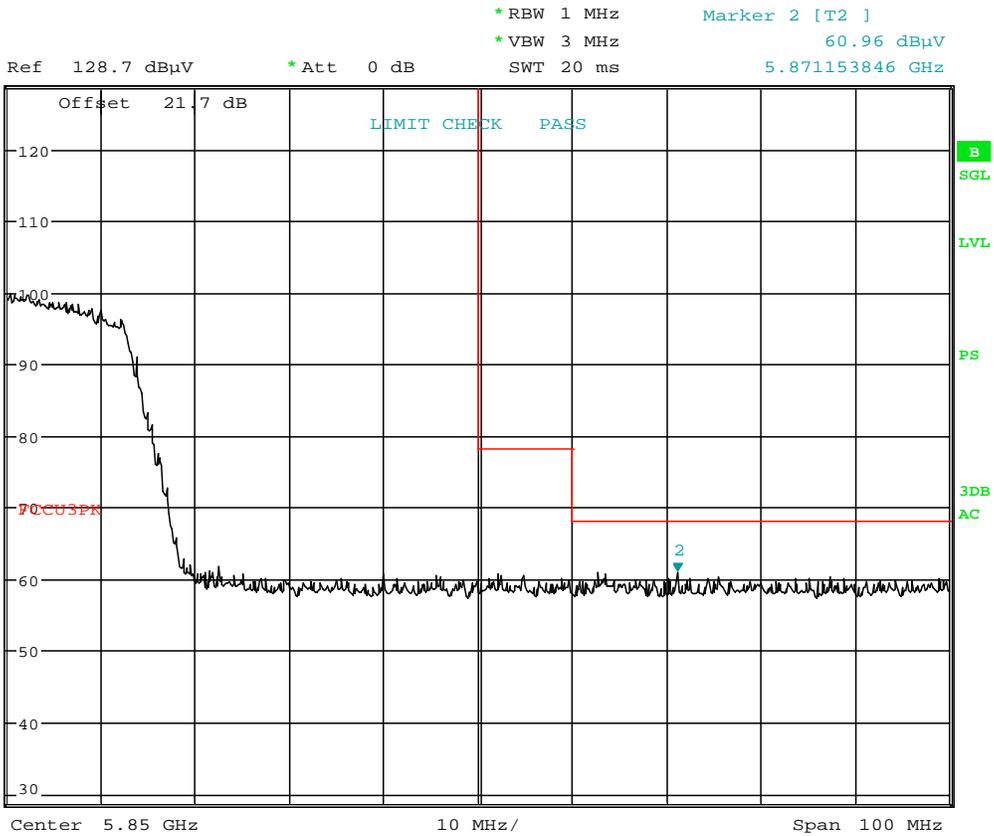


Date: 16.AUG.2016 08:19:00

Plot 7-55. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 69 of 102	

7.7.8 Antenna-2 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42

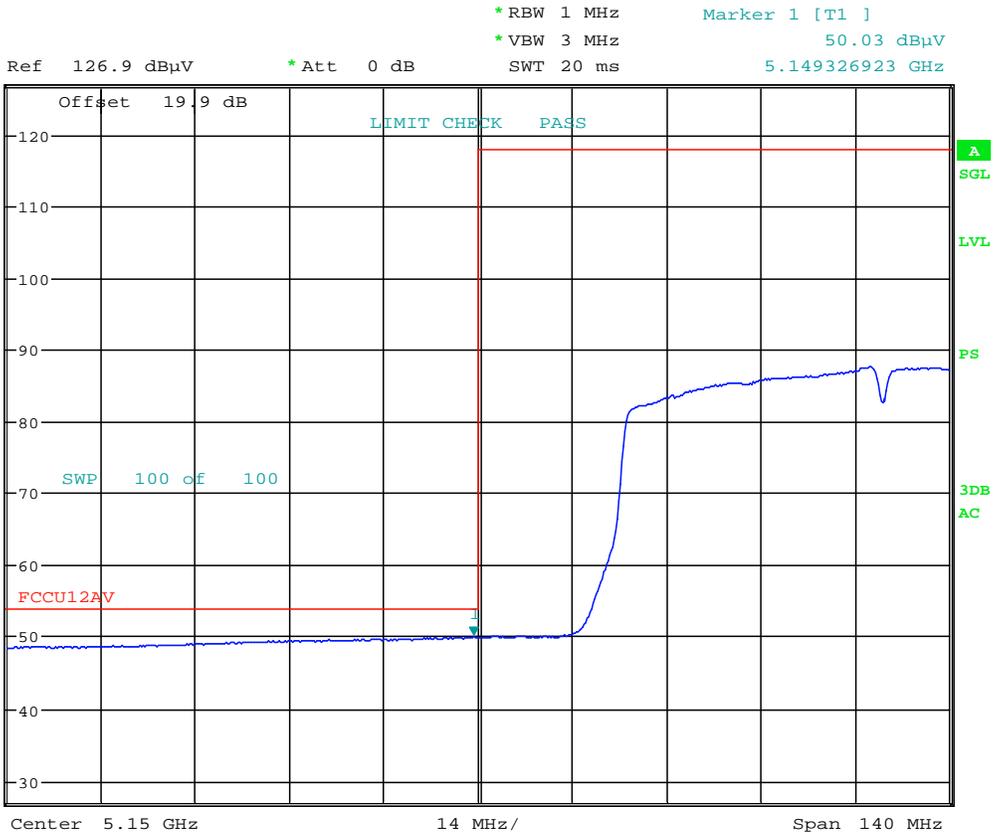


Date: 16.AUG.2016 07:52:23

Plot 7-56. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 70 of 102	

Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

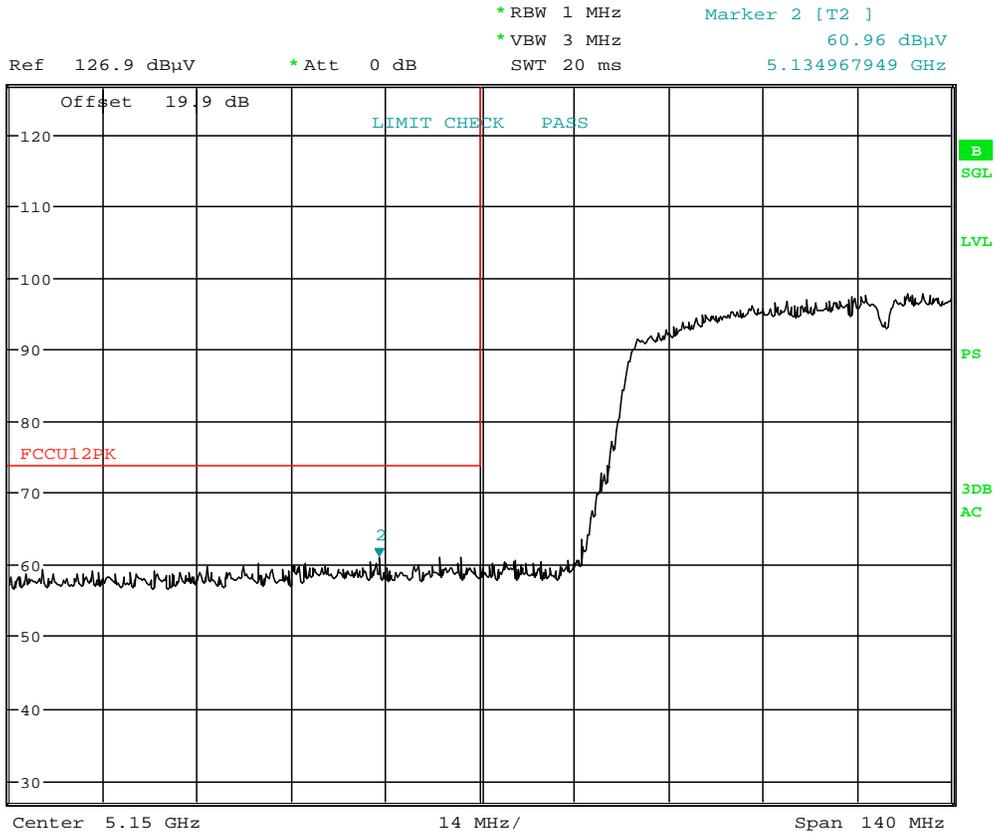


Date: 16.AUG.2016 07:52:35

Plot 7-57. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 71 of 102	

Antenna-2 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

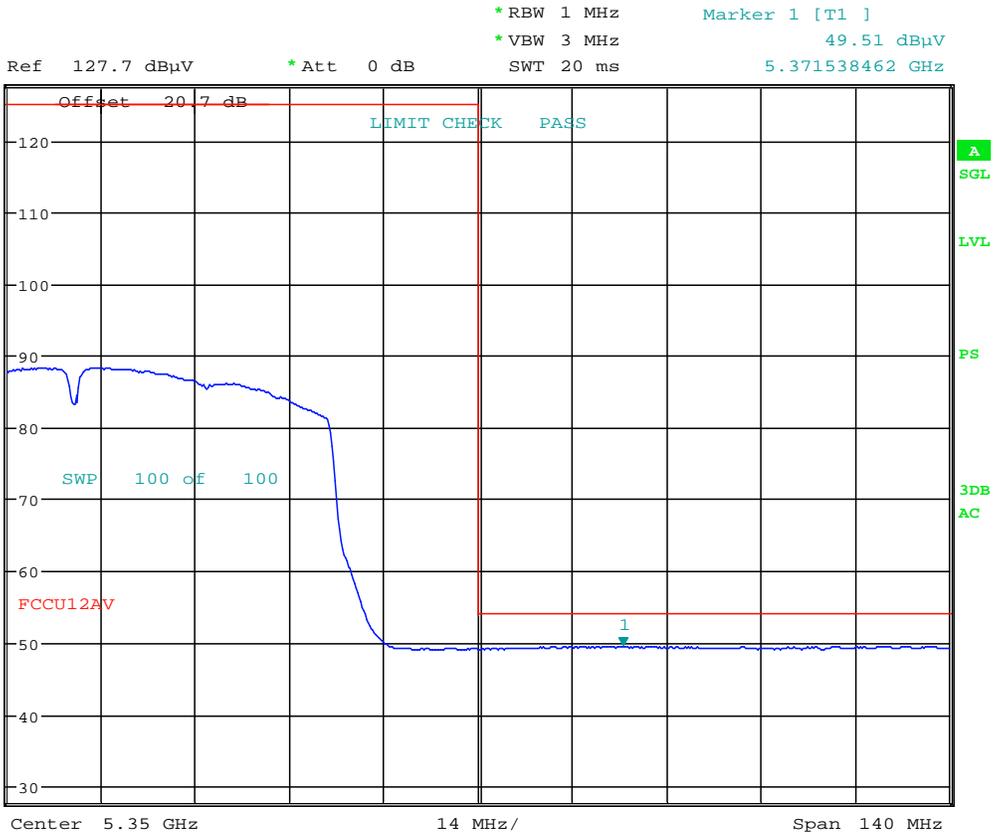


Date: 16.AUG.2016 08:00:19

Plot 7-58. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 72 of 102	

Antenna-2 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

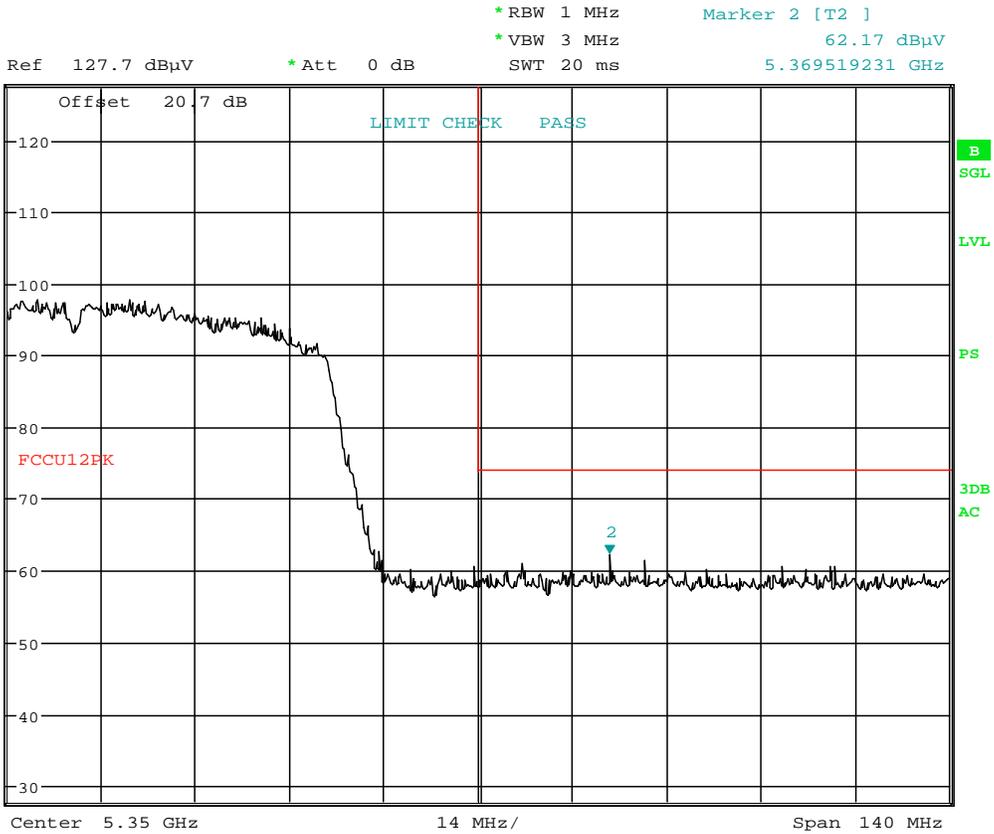

Date: 16.AUG.2016 08:00:30

Plot 7-59. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 73 of 102	

Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

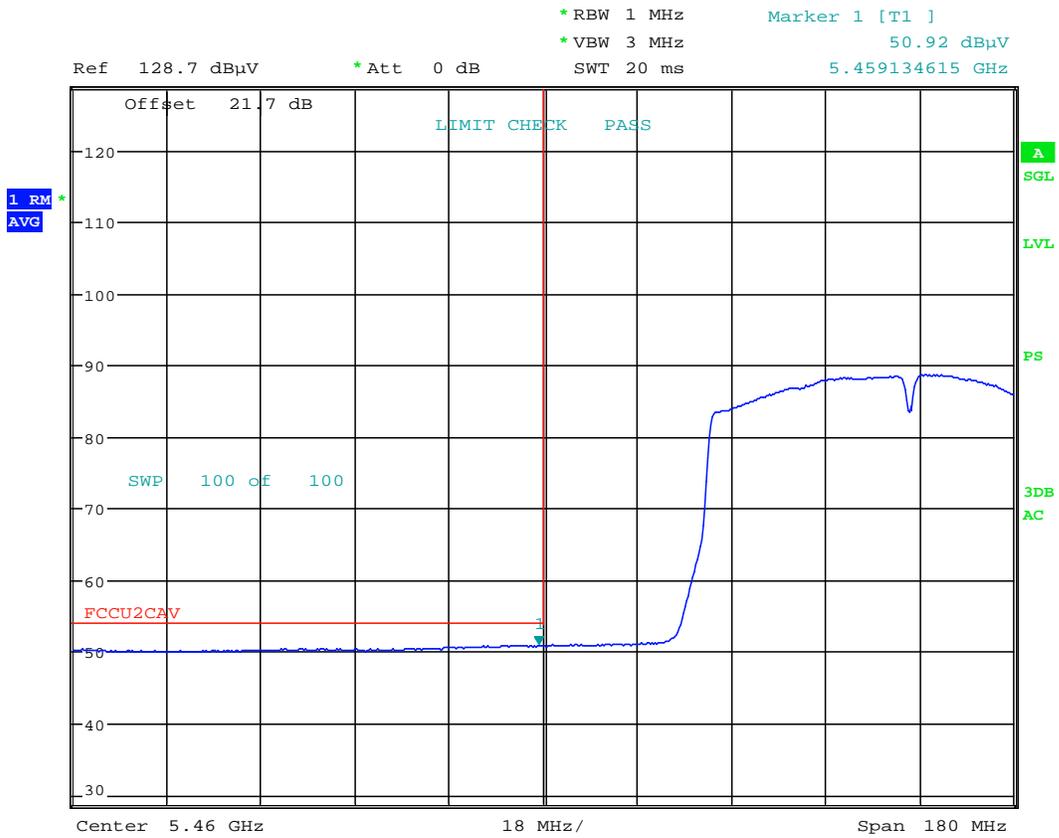


Date: 31.AUG.2016 20:41:40

Plot 7-60. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 74 of 102	

Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

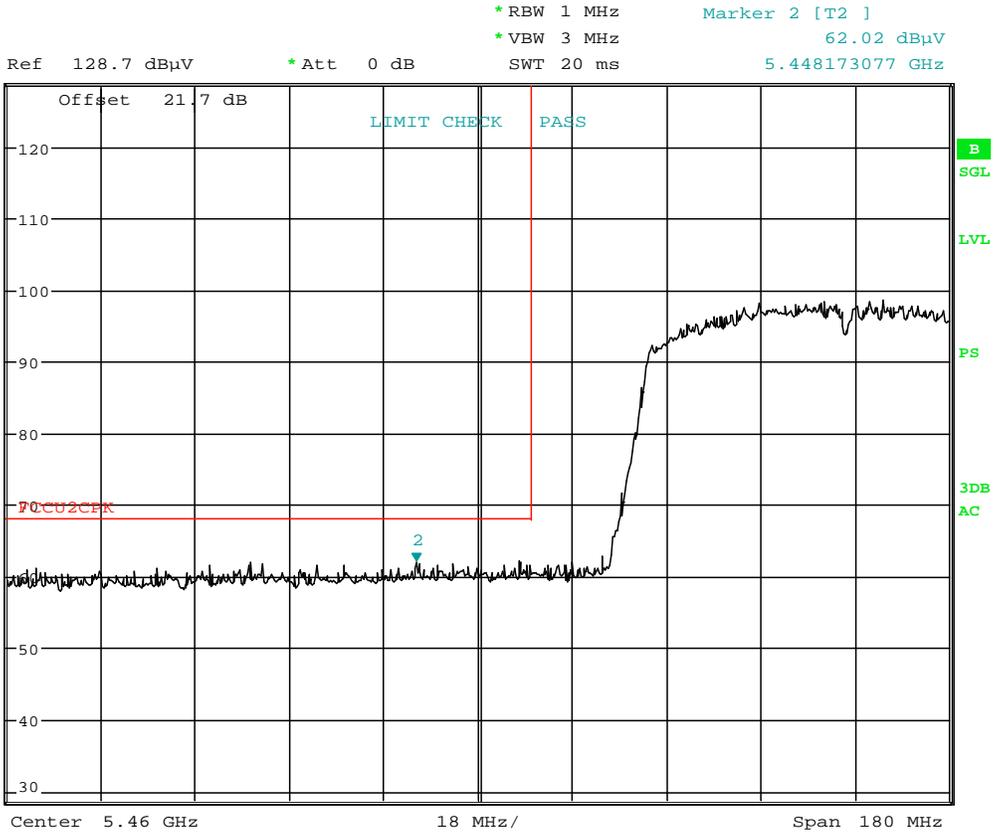


Date: 16.AUG.2016 08:10:04

Plot 7-61. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 75 of 102	

Antenna-2 Radiated Band Edge Measurements (80MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

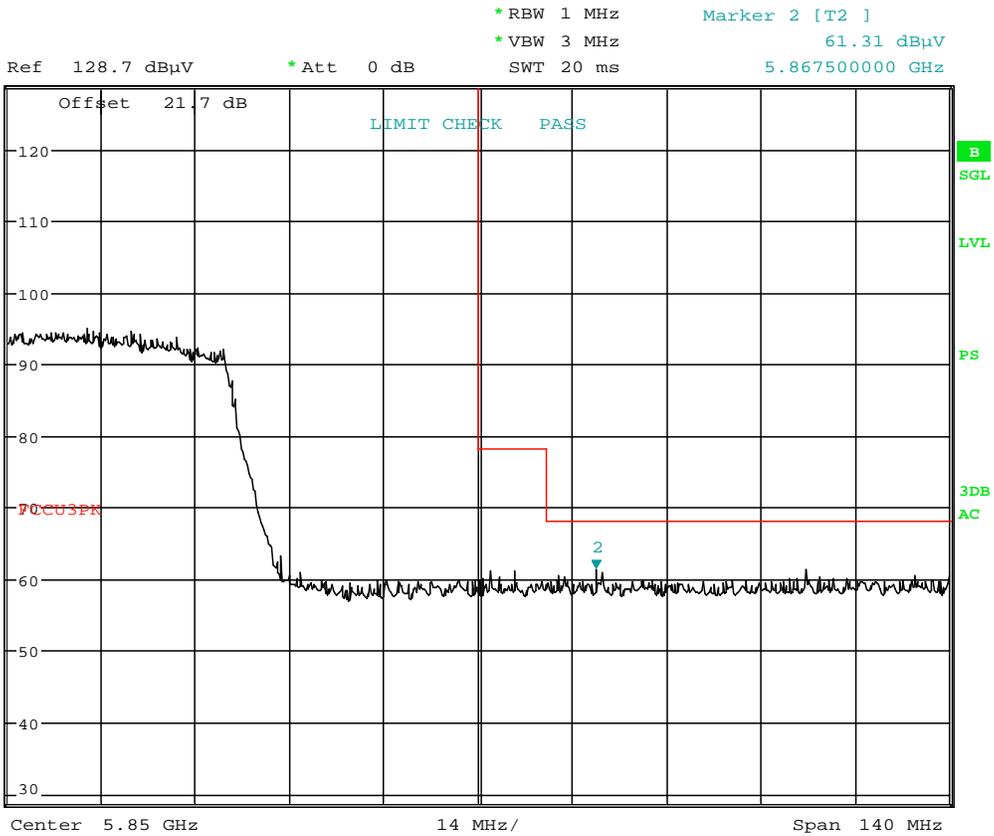


Date: 16.AUG.2016 08:20:05

Plot 7-62. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 76 of 102	

7.7.9 MIMO Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

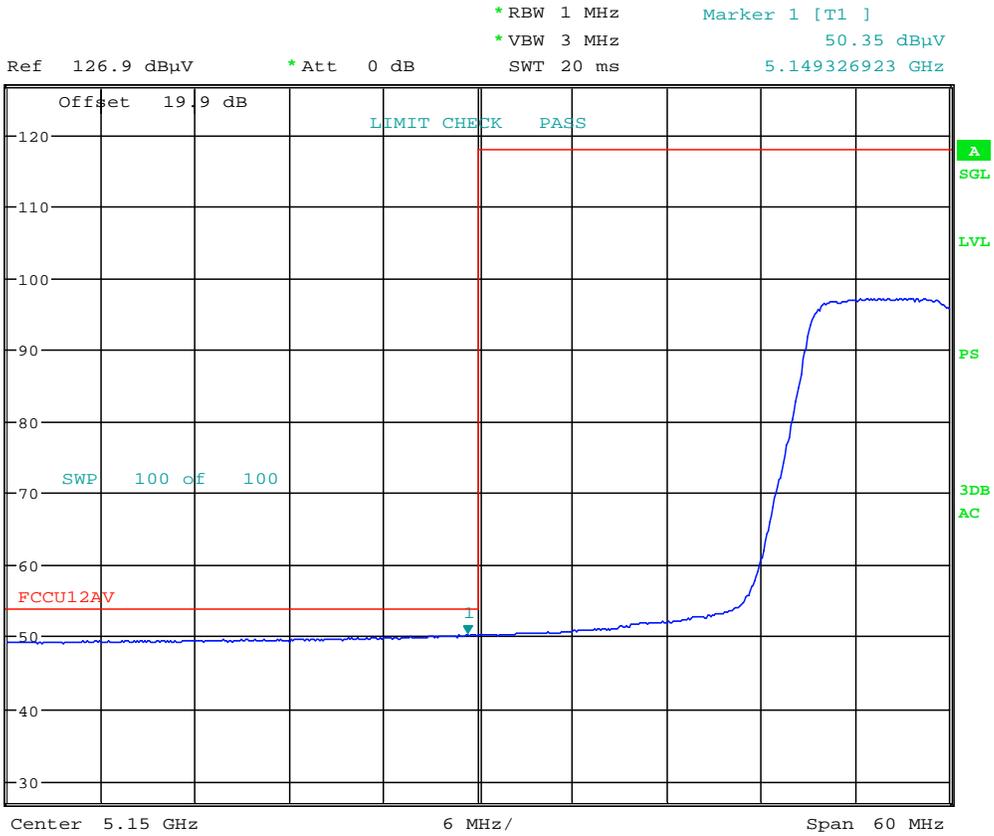


Date: 16.AUG.2016 08:45:37

Plot 7-63. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 77 of 102	

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

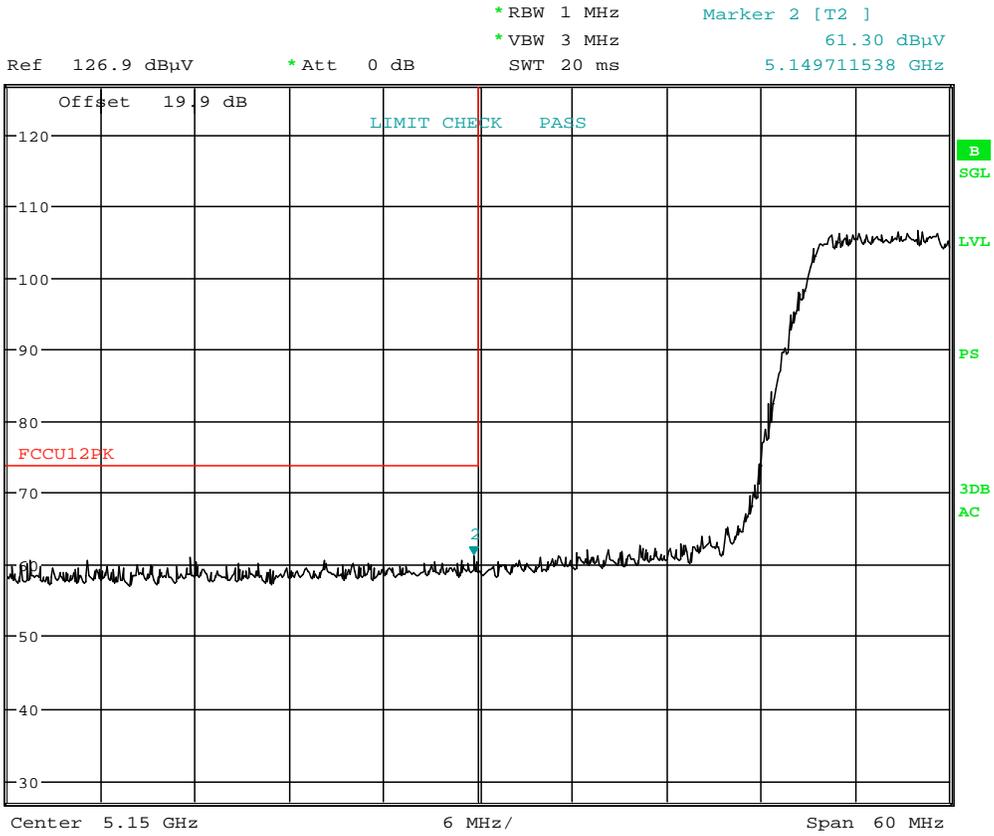

Date: 16.AUG.2016 08:45:47

Plot 7-64. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 78 of 102	

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

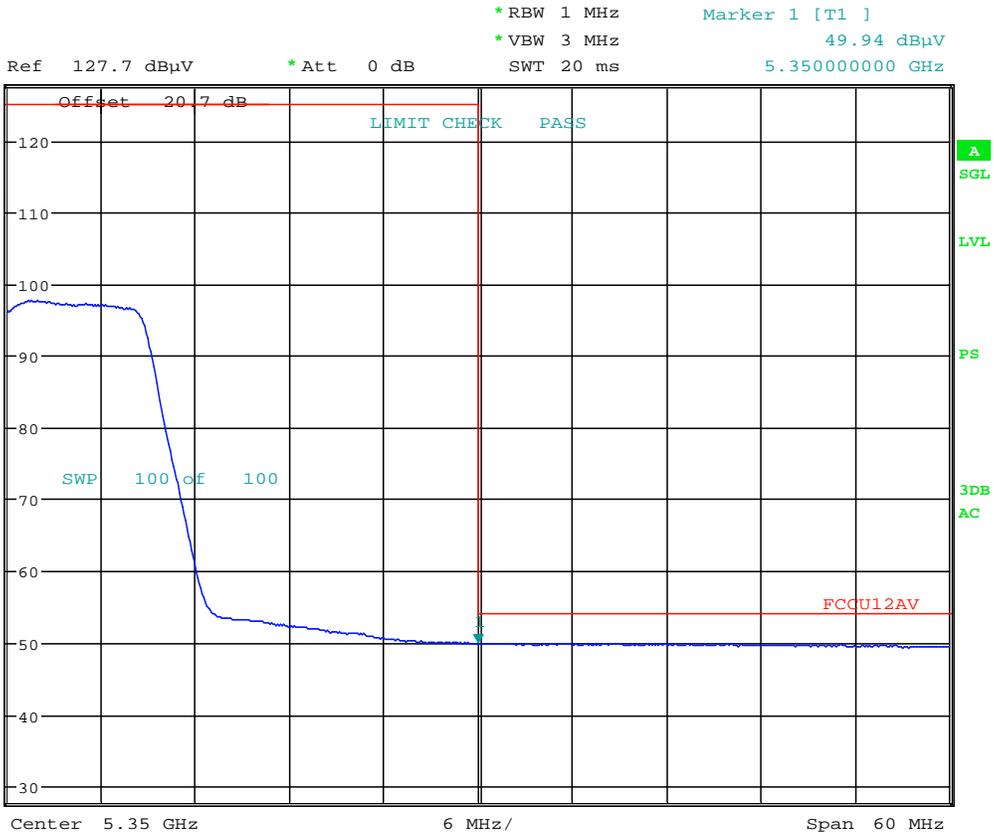


Date: 16.AUG.2016 08:52:57

Plot 7-65. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 79 of 102	

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

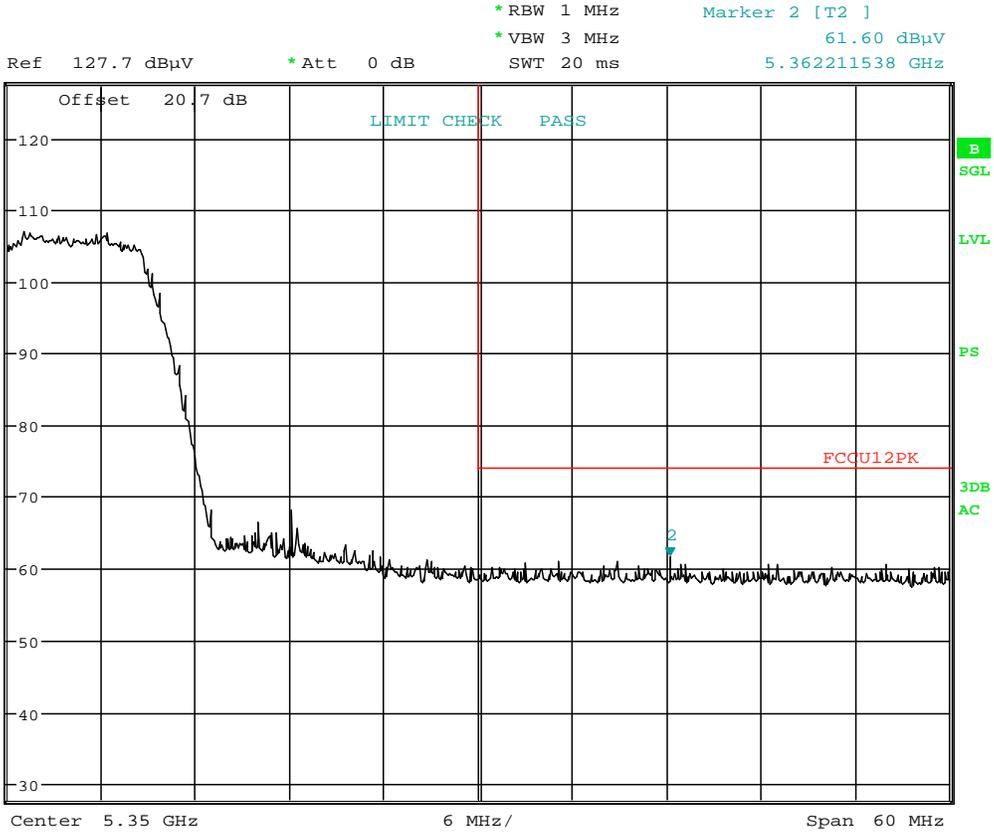


Date: 16.AUG.2016 08:53:14

Plot 7-66. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 80 of 102	

MIMO Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

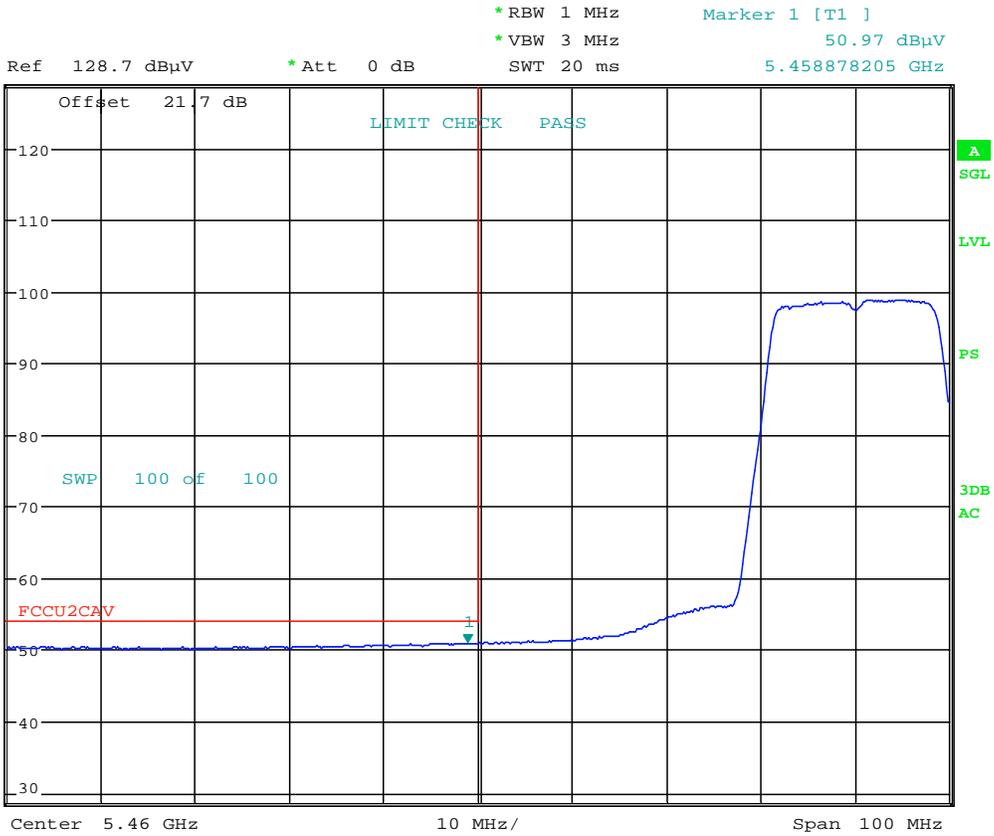


Date: 16.AUG.2016 09:00:26

Plot 7-67. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 81 of 102	

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

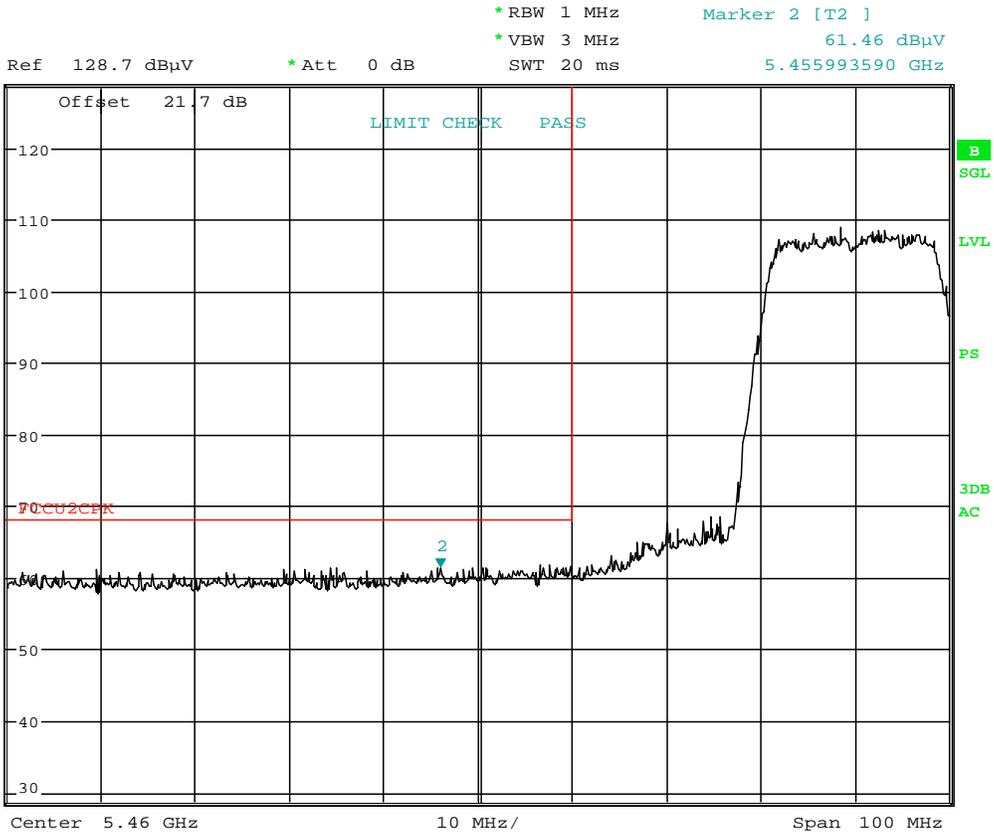

Date: 16.AUG.2016 09:00:36

Plot 7-68. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 82 of 102	

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5825MHz

Channel: 165

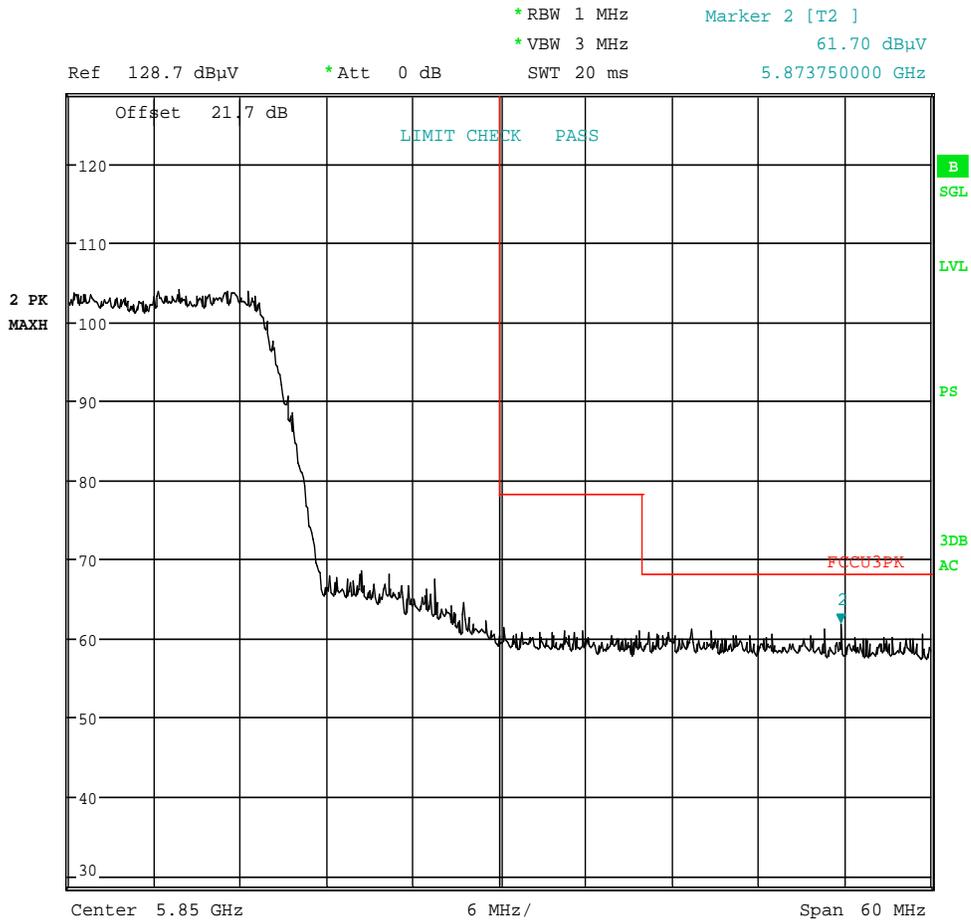


Date: 30.AUG.2016 22:33:19

Plot 7-69. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset		Page 83 of 102

7.7.10 MIMO Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38

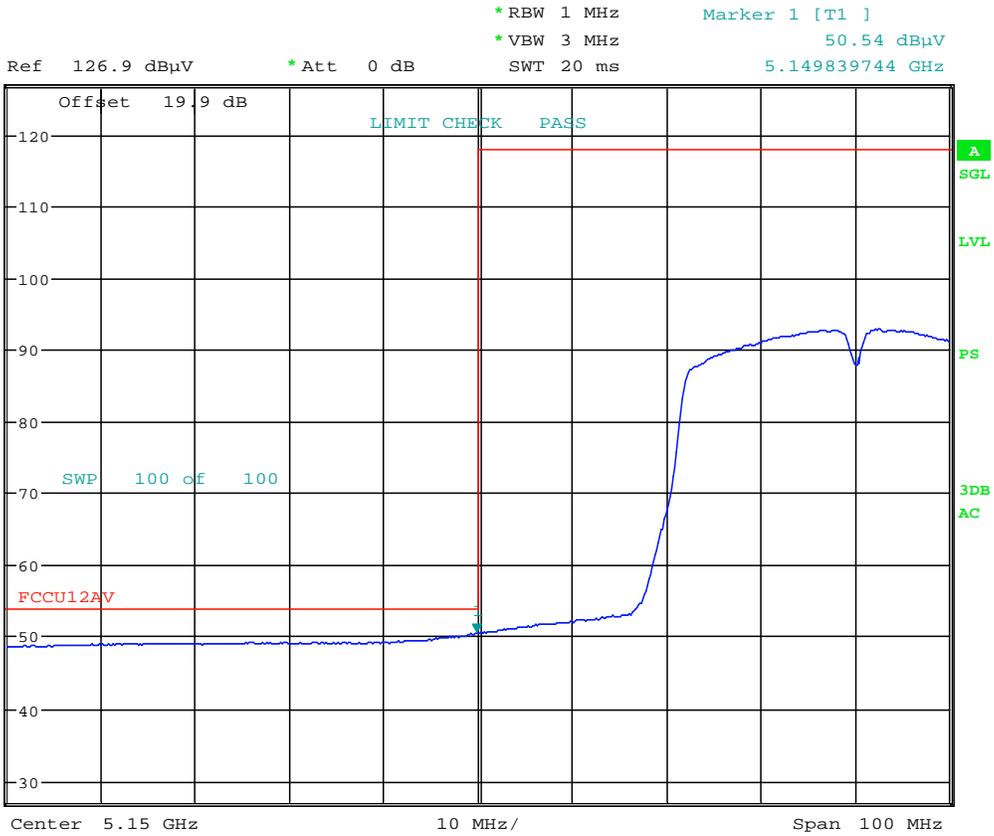


Date: 16.AUG.2016 08:46:55

Plot 7-70. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 84 of 102	

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

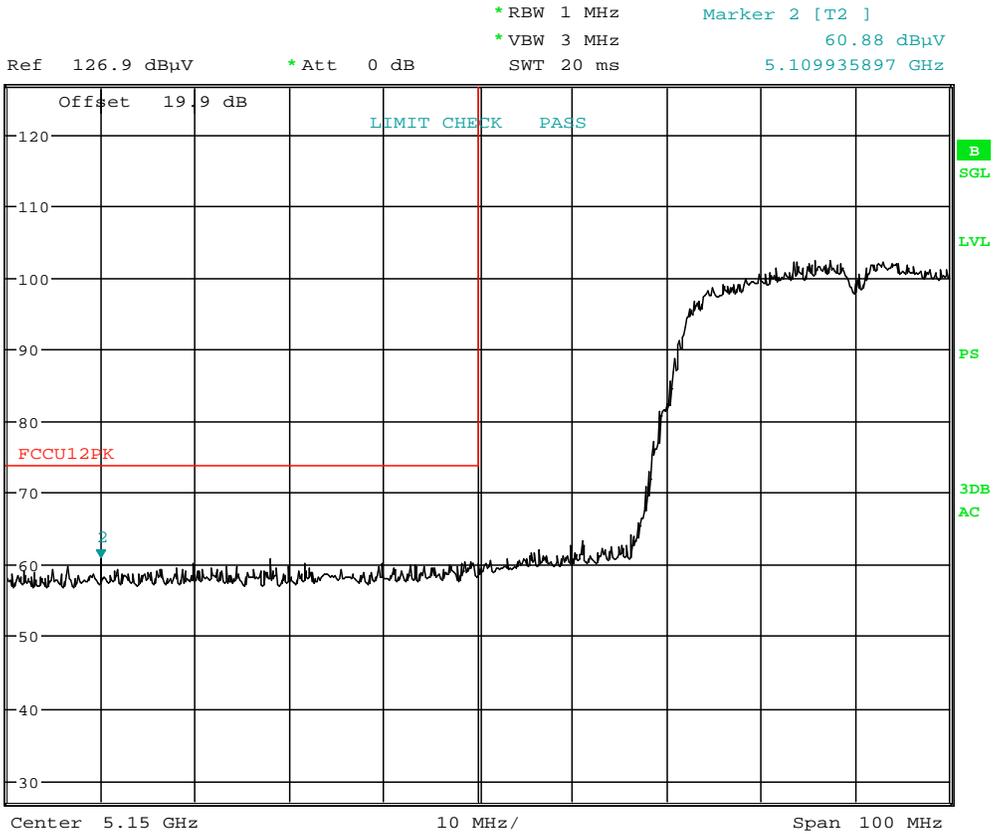


Date: 16.AUG.2016 08:47:08

Plot 7-71. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 85 of 102	

MIMO Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

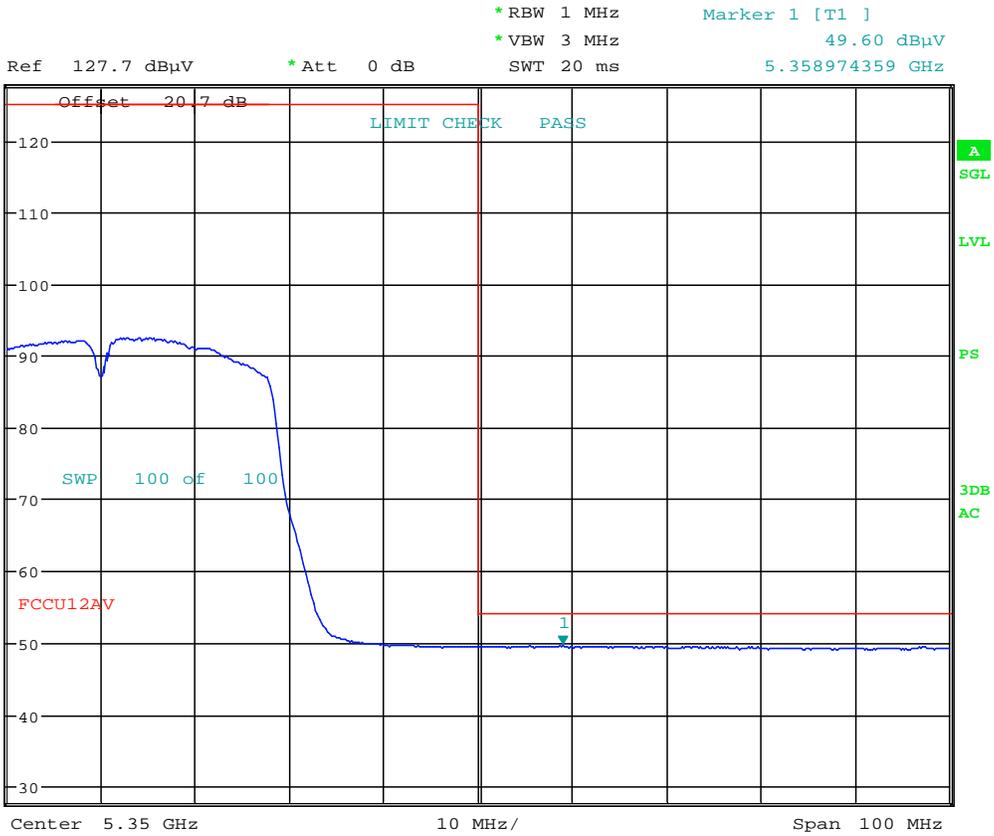


Date: 16.AUG.2016 08:54:40

Plot 7-72. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 86 of 102	

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

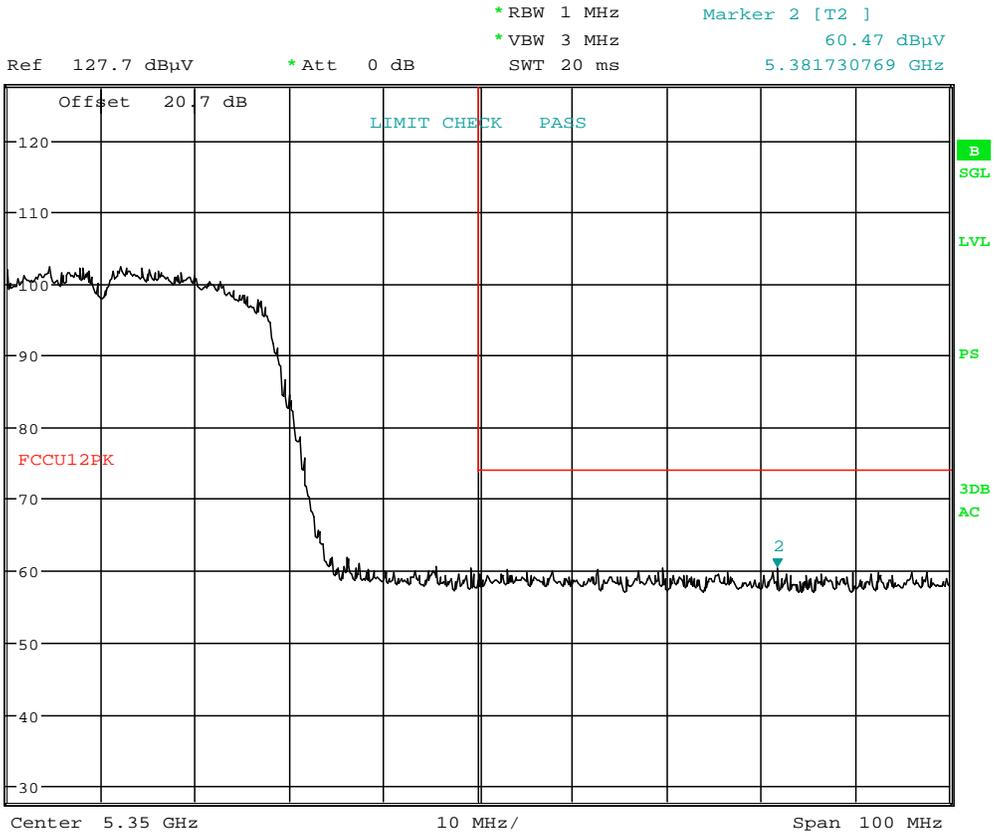


Date: 16.AUG.2016 08:54:53

Plot 7-73. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 87 of 102	

MIMO Radiated Band Edge Measurements (40MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

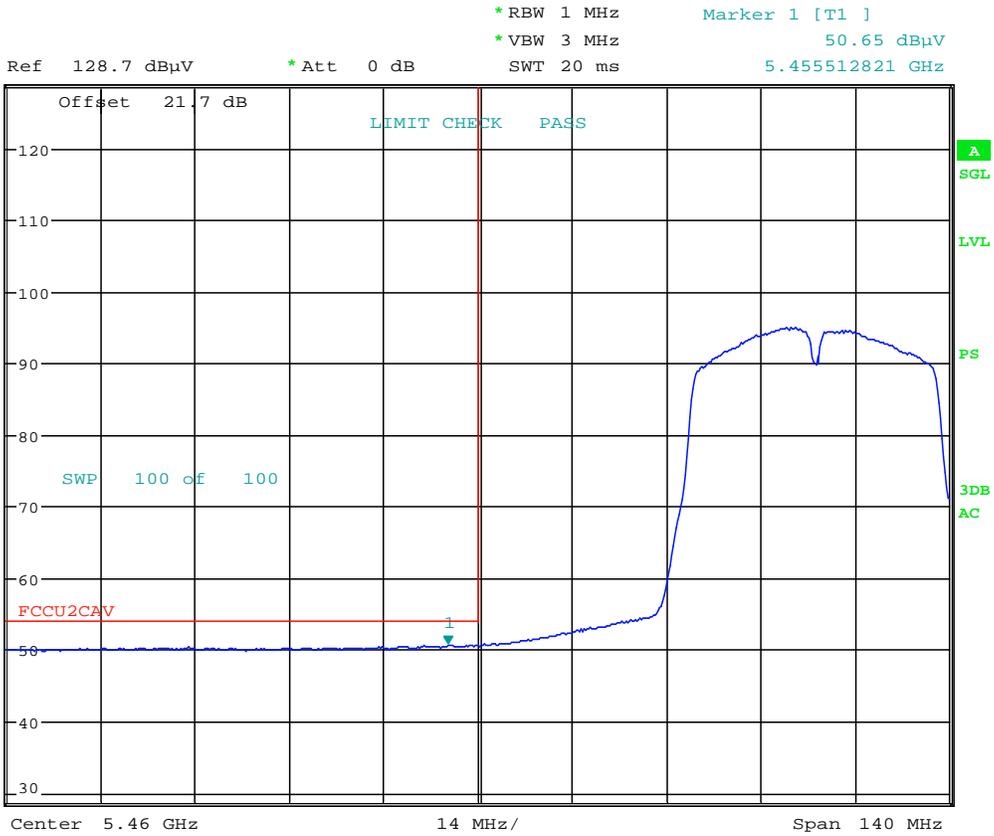


Date: 16.AUG.2016 09:01:42

Plot 7-74. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 88 of 102	

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

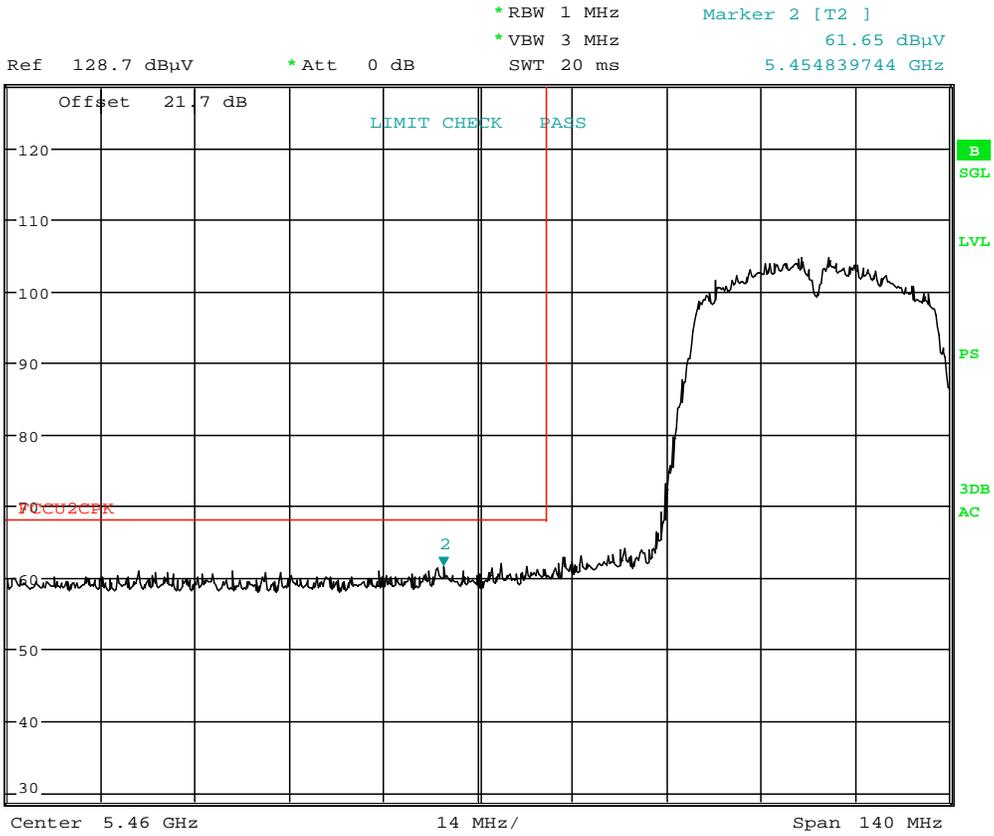

Date: 16.AUG.2016 09:01:54

Plot 7-75. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 89 of 102	

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5795MHz

Channel: 159

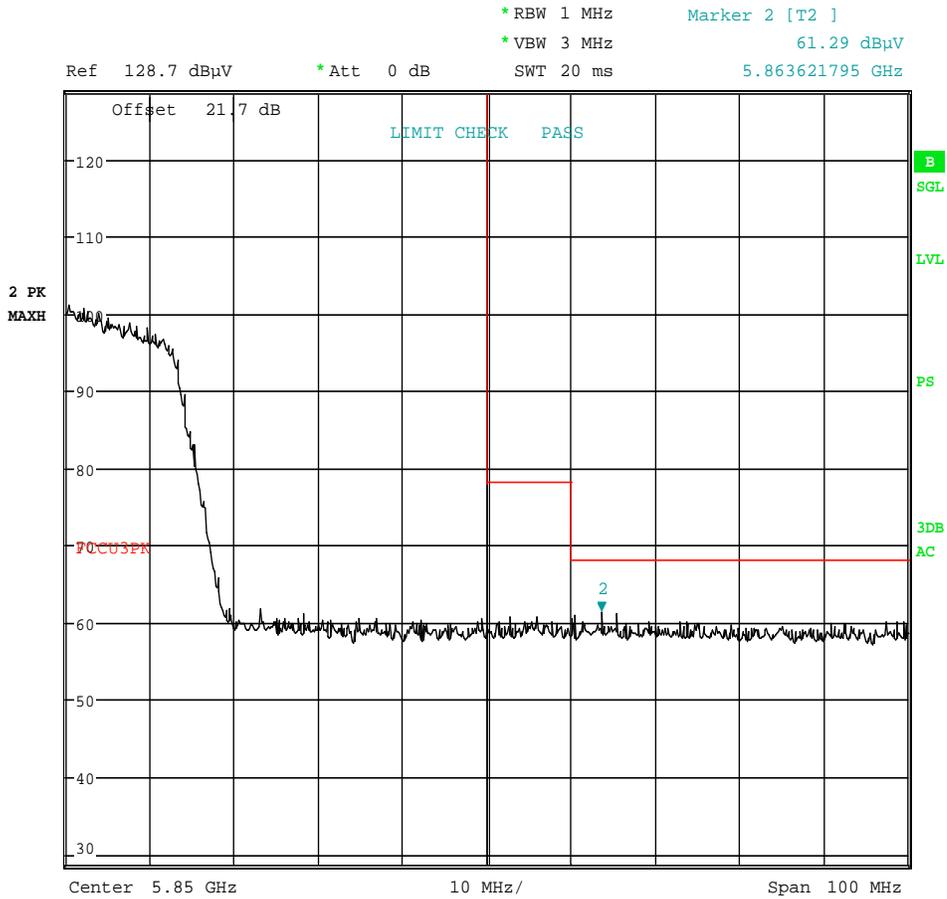


Date: 30.AUG.2016 22:34:39

Plot 7-76. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 90 of 102	

7.7.11 MIMO Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42

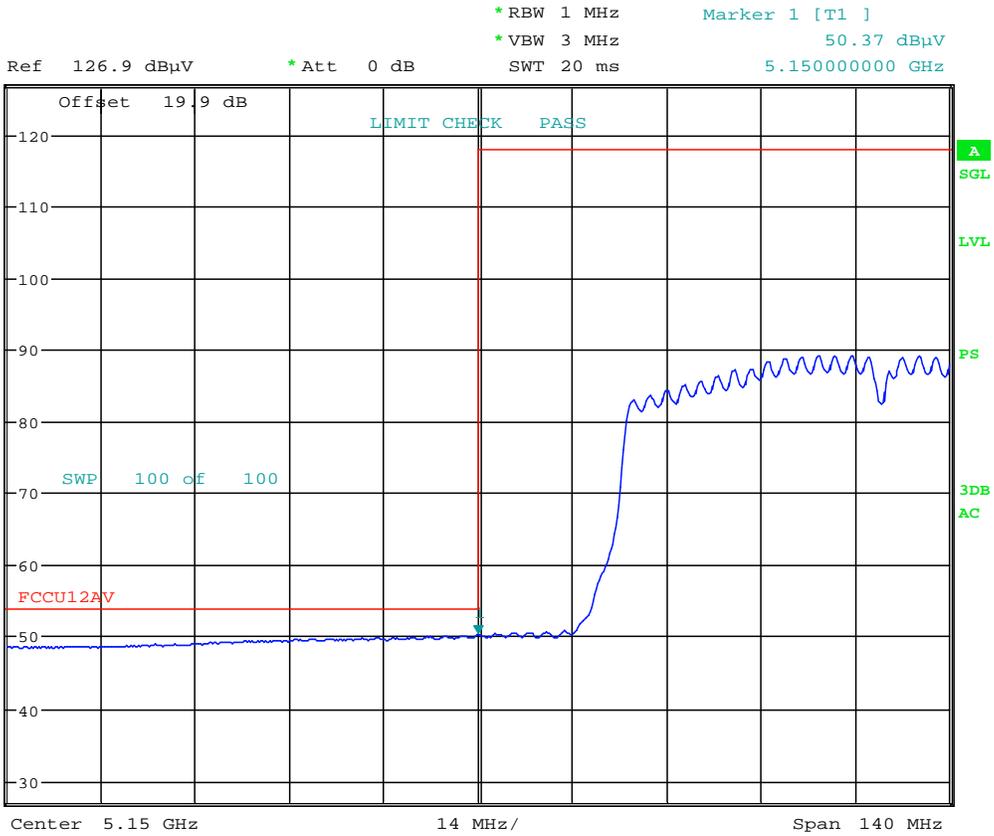


Date: 16.AUG.2016 08:48:38

Plot 7-77. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 91 of 102	

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

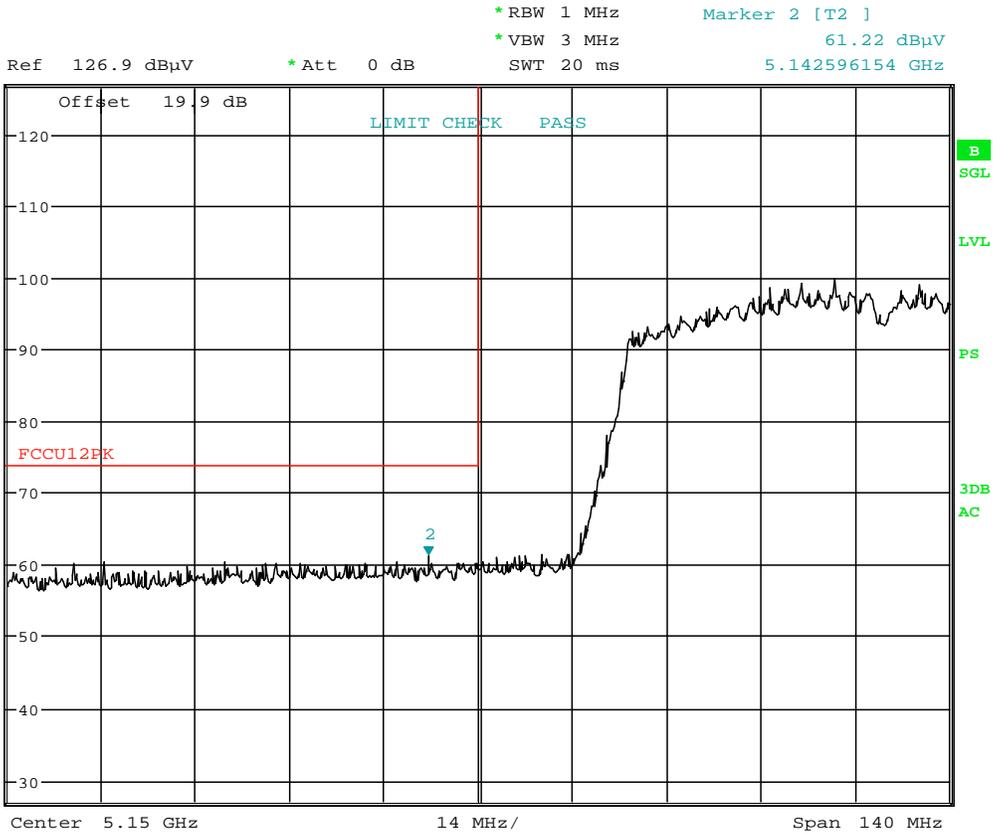

Date: 16.AUG.2016 08:48:53

Plot 7-78. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 92 of 102	

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

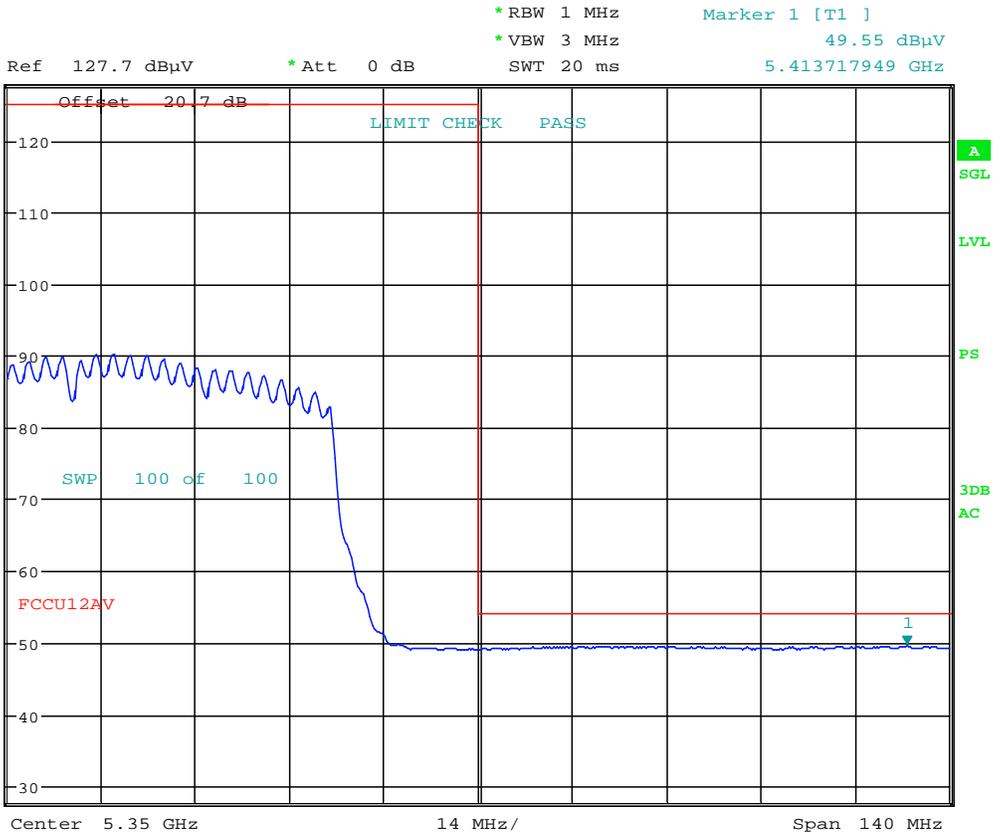


Date: 16.AUG.2016 08:55:59

Plot 7-79. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset		Page 93 of 102

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

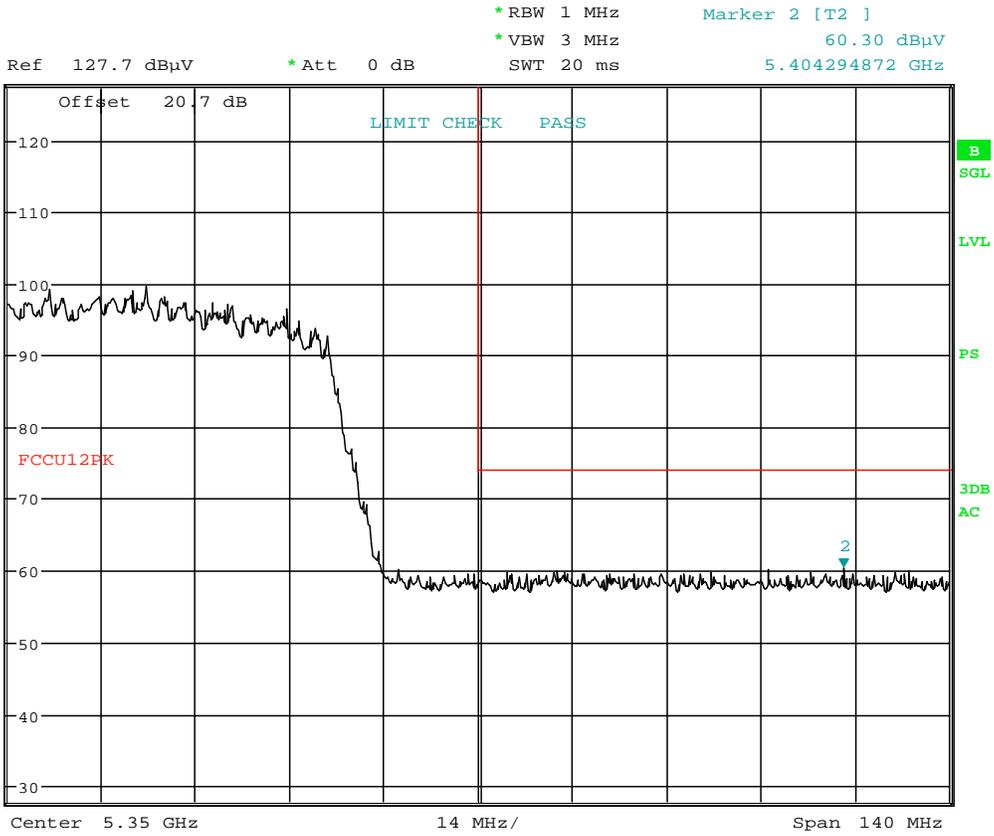

Date: 16.AUG.2016 08:56:11

Plot 7-80. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFH918	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 94 of 102	

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209



Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

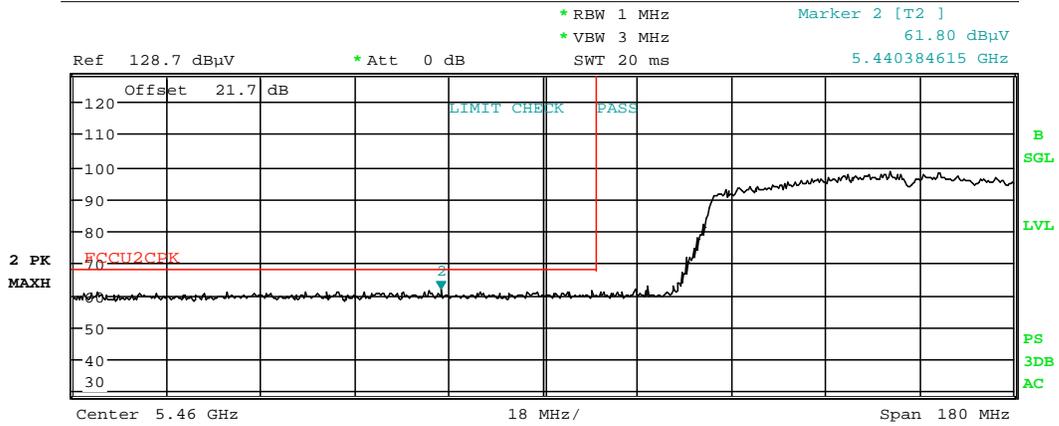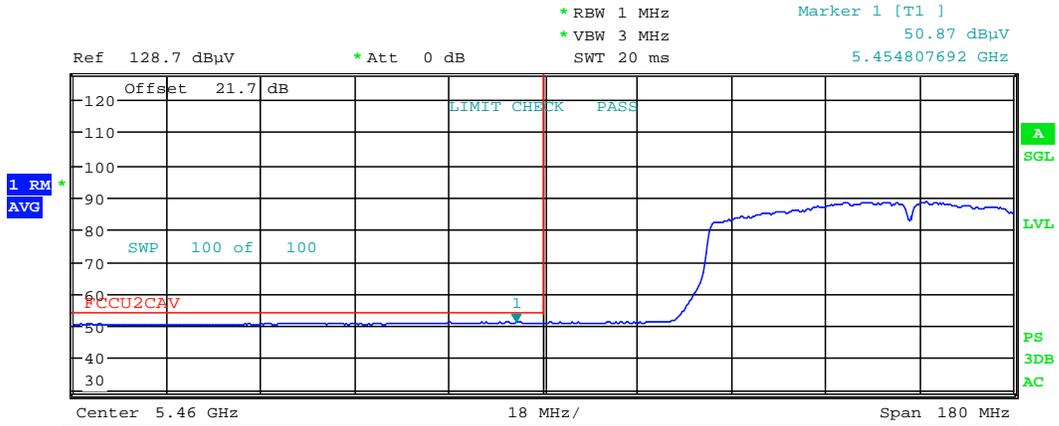

Date: 26.AUG.2016 16:49:14


Plot 7-81. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset		Page 95 of 102

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

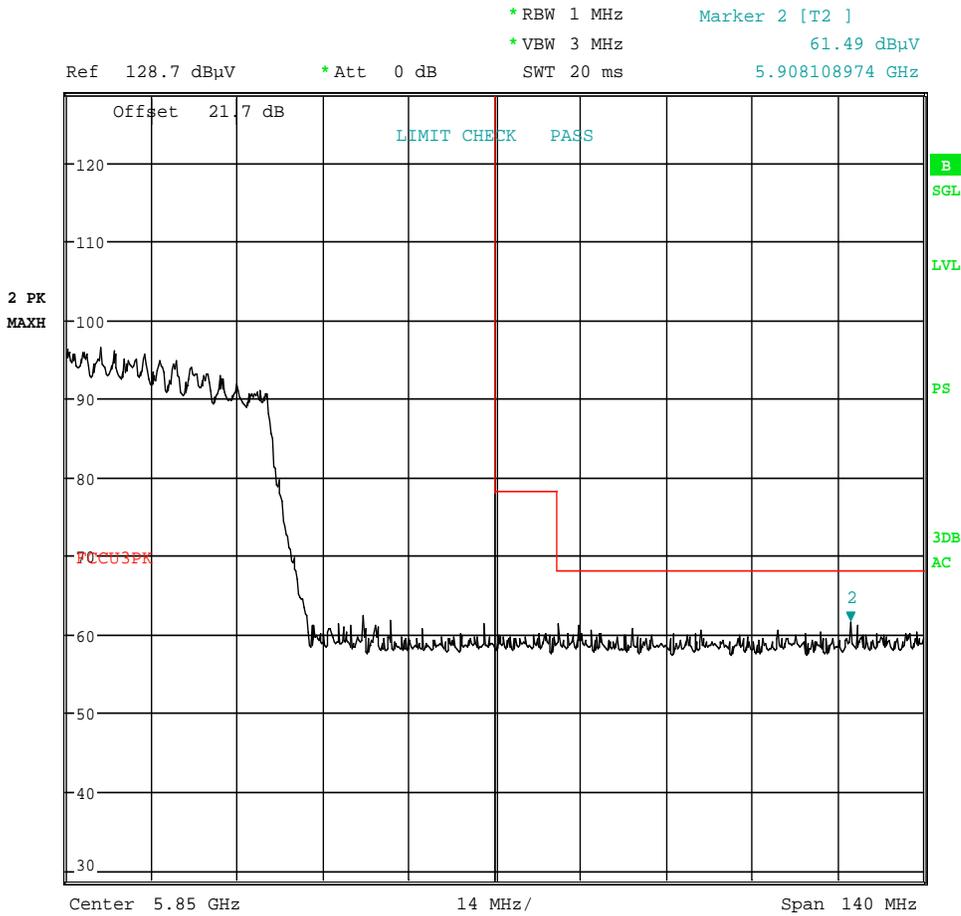

Date: 30.AUG.2016 22:35:43

Plot 7-82. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset		Page 96 of 102

7.3 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-27 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-27. Radiated Limits

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 97 of 102	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

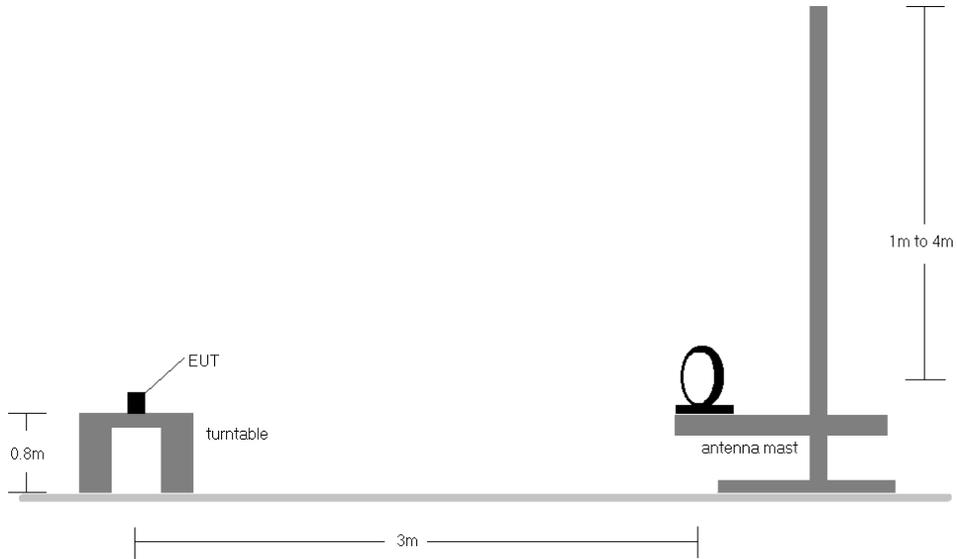


Figure 7-2. Radiated Test Setup < 30MHz

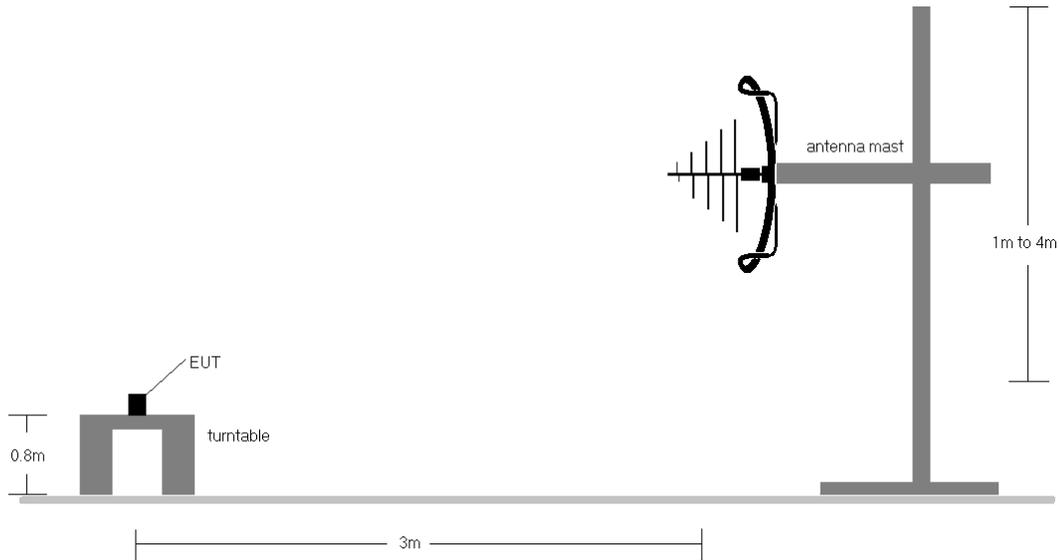


Figure 7-3. Radiated Test Setup < 1GHz

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-27.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.


FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 98 of 102	

4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 99 of 102	

Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

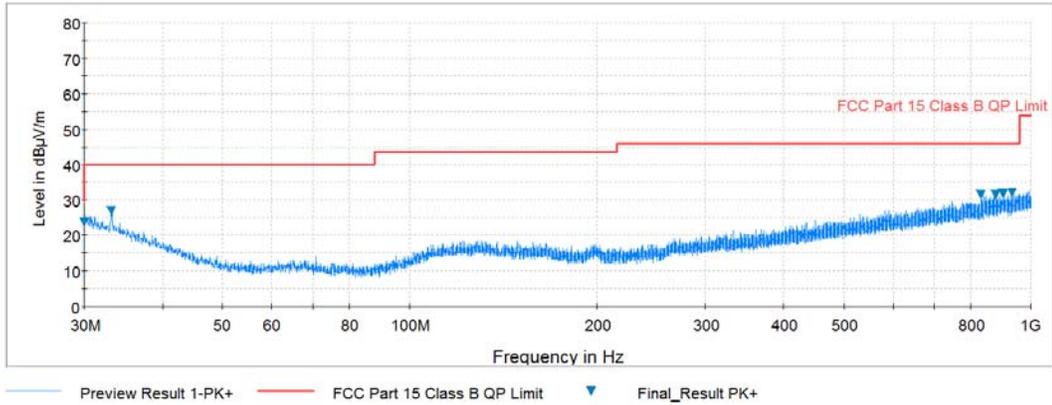

Plot 7-83. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

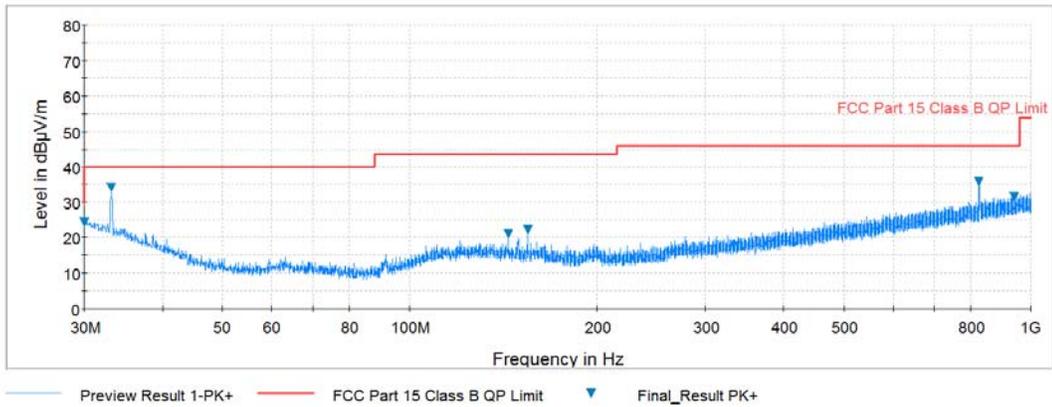


Plot 7-84. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)


FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 100 of 102	

Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

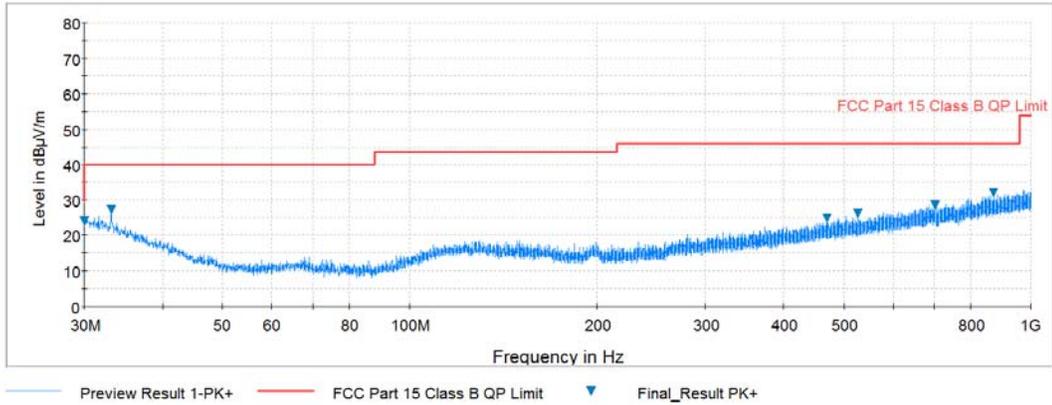

Plot 7-85. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

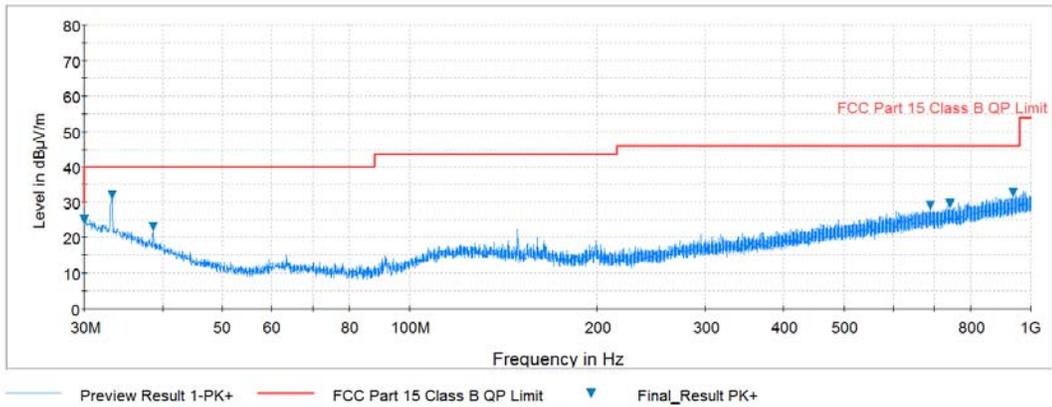

Plot 7-86. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 101 of 102	

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFH918** is in compliance with Part 15E of the FCC Rules.

FCC ID: ZNFH918		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1608121387.ZNF	Test Dates: 8/9-8/30/2016	EUT Type: Portable Handset	Page 102 of 102	