

HAC-RF Emission

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/14/2015;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1257; Calibrated: 9/16/2015
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7331)

Dipole E-Field measurement 835MHz/835 MHz/Hearing Aid Compatibility Test at 15mm distance (41x361x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 134.2 V/m; Power Drift = -0.08 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 114.7 V/m

Near-field category: **M4 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M4 108.1 V/m	Grid 2 M4 111.4 V/m	Grid 3 M4 110.6 V/m
Grid 4 M4 64.87 V/m	Grid 5 M4 68.13 V/m	Grid 6 M4 68.13 V/m
Grid 7 M4 107.6 V/m	Grid 8 M4 114.5 V/m	Grid 9 M4 114.7 V/m

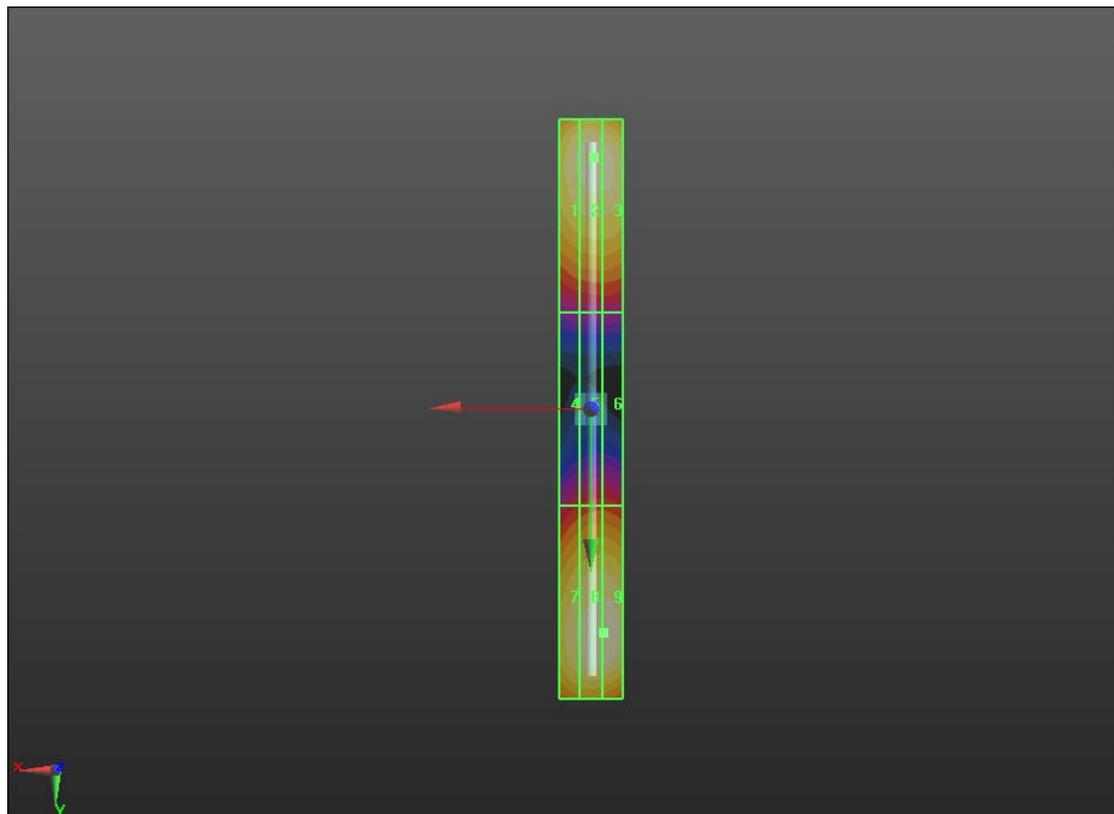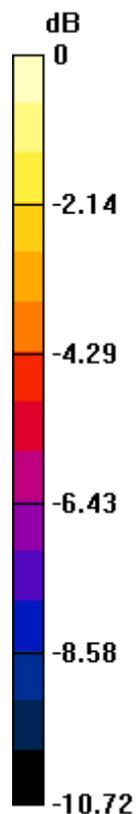

0 dB = 114.7 V/m = 41.19 dBV/m

HAC-RF Emission

Communication System: UID 0, CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 5/14/2015;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1257; Calibrated: 9/16/2015
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7331)

Dipole E-Field Measurement 1880MHz/1880 MHz/Hearing Aid Compatibility Test at 15mm distance (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 142.8 V/m; Power Drift = -0.02 dB



PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 94.53 V/m

Near-field category: **M3 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M3 81.31 V/m	Grid 2 M3 83.60 V/m	Grid 3 M3 83.15 V/m
Grid 4 M3 71.89 V/m	Grid 5 M3 74.34 V/m	Grid 6 M3 74.20 V/m
Grid 7 M3 92.43 V/m	Grid 8 M3 94.53 V/m	Grid 9 M3 93.56 V/m

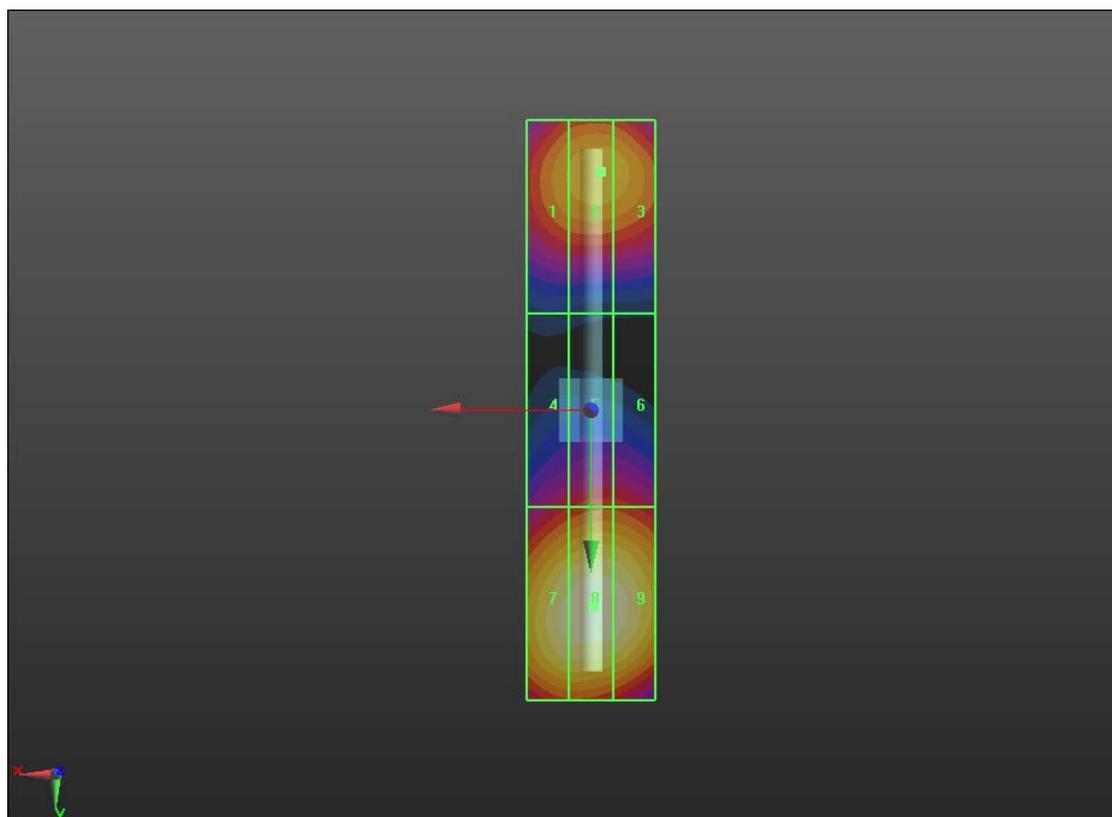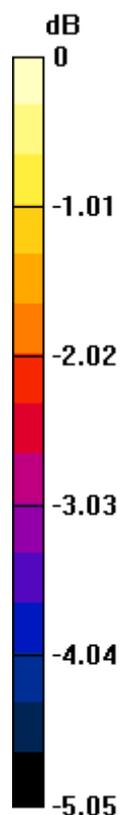

0 dB = 94.53 V/m = 39.51 dBV/m