



SAR EVALUATION REPORT

Applicant Name:

LG Electronics U.S.A., Inc.
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:

11/04/19 - 11/19/19

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

1M1910250170-01-R2.ZNF

FCC ID:

ZNFL555DL

APPLICANT:

LG ELECTRONICS U.S.A., INC.

DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model:

LG L555DL

Additional Model(s):

LG-L555DL, LM-K500UM, LM-K500QM, LM-K500QM5, LM-K500QM6, LGL555DL, LMK500UM, LMK500QM, LMK500QM5, LMK500QM6, L555DL, K500UM, K500QM, K500QM5, K500QM6

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body Worn (W/kg)	1g Holster (W/kg)	10g Phantom (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.42	1.11	1.11	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.26	0.38	0.38	N/A
PCE	UMTS 850	824.40 - 848.60 MHz	0.29	0.22	0.22	N/A
PCE	UMTS 1755	1712.4 - 1752.6 MHz	0.34	0.70	0.70	2.67
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.53	1.09	1.09	2.56
PCE	CDMA/EVDO BCD (BSS)	817.50 - 823.10 MHz	0.36	0.77	0.73	N/A
PCE	CDMA/EVDO BCD (SCH)	824.70 - 848.31 MHz	0.49	0.69	0.87	N/A
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.66	1.08	0.94	2.43
PCE	LTE Band 71	665.5 - 695.5 MHz	0.15	0.25	0.27	N/A
PCE	LTE Band 12	699.7 - 715.3 MHz	0.24	0.40	0.49	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	0.29	0.54	0.54	N/A
PCE	LTE Band 28 (Cell)	814.7 - 848.3 MHz	0.39	0.62	0.82	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.41	0.85	0.88	2.71
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.44	0.96	0.96	2.50
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 41	2496.5 - 2687.5 MHz	< 0.1	0.67	0.96	N/A
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.88	0.91	0.92	N/A
NI	U-NI-1	5180 - 5240 MHz	N/A	N/A	0.69	N/A
NI	U-NI-2A	5260 - 5320 MHz	0.51	0.52	N/A	1.51
NI	U-NI-2C	5500 - 5720 MHz	0.69	0.34	N/A	1.02
NI	U-NI-3	5740 - 5825 MHz	0.74	0.39	0.65	N/A
DSS/DTS	Bluetooth	2402 - 2480 MHz	< 0.1	< 0.1	< 0.1	N/A
Simultaneous SAR per KDB 690783 D01v01R03:			1.49	1.52	1.59	3.93

Note: This revised Test Report (S/N: 1M1910250170-01-R2.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 1 of 119

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	12
3	INTRODUCTION	13
4	DOSIMETRIC ASSESSMENT	14
5	DEFINITION OF REFERENCE POINTS	15
6	TEST CONFIGURATION POSITIONS	16
7	RF EXPOSURE LIMITS	20
8	FCC MEASUREMENT PROCEDURES.....	21
9	RF CONDUCTED POWERS	28
10	SYSTEM VERIFICATION.....	64
11	SAR DATA SUMMARY	69
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	91
13	SAR MEASUREMENT VARIABILITY	107
14	ADDITIONAL TESTING PER FCC GUIDANCE	109
15	EQUIPMENT LIST	115
16	MEASUREMENT UNCERTAINTIES.....	116
17	CONCLUSION	117
18	REFERENCES	118
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: SAR TISSUE SPECIFICATIONS		
APPENDIX D: SAR SYSTEM VALIDATION		
APPENDIX E: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX F: DOWNLINK LTE CA RF CONDUCTED POWERS		
APPENDIX G: POWER REDUCTION VERIFICATION		
APPENDIX H: PROBE AND DIPOLE CALIBRATION CERTIFICATES		

FCC ID: ZNFL555DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 2 of 119	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 823.10 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
LTE Band 71	Voice/Data	665.5 - 695.5 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device uses a power reduction mechanism for SAR compliance. The power reduction mechanism is activated when the device is used in close proximity to the user's body. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: ZNFL555DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 3 of 119	

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Output Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	34.0	34.0	32.7	30.7	28.7	26.7	25.7	23.7	22.7
	Nominal	33.5	33.5	32.2	30.2	28.2	26.2	25.2	23.2	22.2
GSM/GPRS/EDGE 1900	Maximum	31.0	31.0	29.7	27.7	25.7	26.7	25.7	23.7	22.7
	Nominal	30.5	30.5	29.2	27.2	25.2	26.2	25.2	23.2	22.2

Mode / Band		3GPP WCDMA (dBm)	3GPP HSDPA (dBm)				3GPP HSUPA (dBm)				
		RMC/AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5
UMTS Band 5 (850 MHz)	Maximum	25.2	24.2	24.2	23.7	23.7	22.2	22.2	23.2	21.7	23.2
	Nominal	24.7	23.7	23.7	23.2	23.2	21.7	21.7	22.7	21.2	22.7
UMTS Band 4 (1750 MHz)	Maximum	25.0	24.0	24.0	23.5	23.5	22.0	22.0	23.0	21.5	23.0
	Nominal	24.5	23.5	23.5	23.0	23.0	21.5	21.5	22.5	21.0	22.5
UMTS Band 2 (1900 MHz)	Maximum	25.0	24.0	24.0	23.5	23.5	22.0	22.0	23.0	21.5	23.0
	Nominal	24.5	23.5	23.5	23.0	23.0	21.5	21.5	22.5	21.0	22.5

Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (§90S)	Maximum	25.2
	Nominal	24.7
CDMA/EVDO BC0 (§22H)	Maximum	25.2
	Nominal	24.7
PCS CDMA/EVDO	Maximum	25.0
	Nominal	24.5

FCC ID: ZNFL555DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 4 of 119	

Mode / Band		Modulated Average (dBm)
LTE Band 71	Maximum	25.2
	Nominal	24.7
LTE Band 12	Maximum	25.2
	Nominal	24.7
LTE Band 13	Maximum	25.2
	Nominal	24.7
LTE Band 26 (Cell)	Maximum	25.2
	Nominal	24.7
LTE Band 5 (Cell)	Maximum	25.2
	Nominal	24.7
LTE Band 66 (AWS)	Maximum	25.0
	Nominal	24.5
LTE Band 4 (AWS)	Maximum	25.0
	Nominal	24.5
LTE Band 25 (PCS)	Maximum	25.0
	Nominal	24.5
LTE Band 2 (PCS)	Maximum	25.0
	Nominal	24.5
LTE Band 41 (PC3)	Maximum	25.0
	Nominal	24.5
LTE Band 41 (PC2)	Maximum	26.7
	Nominal	26.2

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 5 of 119

Mode / Band		Modulated Average (dBm)		
Channel		1 - 2	3 - 9	10 - 11
IEEE 802.11b (2.4 GHz)	Maximum	22.0		
	Nominal	21.0		
IEEE 802.11g (2.4 GHz)	Maximum	18.5	21.0	18.0
	Nominal	17.5	20.0	17.0
IEEE 802.11n (2.4 GHz)	Maximum	17.5	20.0	17.0
	Nominal	16.5	19.0	16.0

Mode / Band		Modulated Average (dBm)	
Bluetooth	Maximum	10.0	
	Nominal	9.0	
Bluetooth LE	Maximum	5.0	
	Nominal	4.0	

Mode / Band		Modulated Average (dBm)																																			
		20 MHz Bandwidth																40 MHz Bandwidth														80 MHz Bandwidth					
Channel		36	40	44-48	52	56	60	64	100	104-144	144	149-153	157	161	165	38	46	54	62	102	110	118	126	134	142	151	159	42	58	106	122	138	155				
IEEE 802.11a (5 GHz)	Maximum	18.0	20.0	20.0	20.0	20.0	20.0	18.0	18.0	20.0	20.0	20.0	20.0	20.0	18.0																						
	Nominal	17.0	19.0	19.0	19.0	19.0	19.0	17.0	17.0	19.0	19.0	19.0	19.0	19.0	17.0																						
IEEE 802.11n (5 GHz)	Maximum	17.0	19.0	19.0	19.0	19.0	19.0	17.0	17.0	19.0	19.0	19.0	19.0	19.0	17.0	16.0	18.0	18.0	16.0	16.0	18.0	18.0	18.0	18.0	18.0	18.0	16.0										
	Nominal	16.0	18.0	18.0	18.0	18.0	18.0	16.0	16.0	18.0	18.0	18.0	18.0	18.0	16.0	15.0	17.0	17.0	15.0	15.0	17.0	17.0	17.0	17.0	17.0	17.0	15.0										
IEEE 802.11ac (5 GHz)	Maximum	17.0	19.0	19.0	19.0	19.0	19.0	17.0	17.0	19.0	19.0	19.0	19.0	19.0	17.0	16.0	18.0	18.0	16.0	16.0	18.0	18.0	18.0	18.0	18.0	18.0	16.0	15.0	15.0	15.0	15.0	15.0	15.0				
	Nominal	16.0	18.0	18.0	18.0	18.0	18.0	16.0	16.0	18.0	18.0	18.0	18.0	18.0	16.0	15.0	17.0	17.0	15.0	15.0	17.0	17.0	17.0	17.0	17.0	17.0	15.0	14.0	14.0	14.0	14.0	14.0	14.0				

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 6 of 119

1.3.1 Reduced Output Power

Mode / Band		3GPP WCDMA (dBm)	3GPP HSDPA (dBm)				3GPP HSUPA (dBm)				
		RMC/AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5
UMTS Band 4 (1750 MHz)	Maximum	23.5	23.5	23.5	23.0	23.0	22.0	21.5	22.5	21.0	22.5
	Nominal	23.0	23.0	23.0	22.5	22.5	21.5	21.0	22.0	20.5	22.0
UMTS Band 2 (1900 MHz)	Maximum	24.0	24.0	24.0	23.5	23.5	22.0	22.0	23.0	21.5	23.0
	Nominal	23.5	23.5	23.5	23.0	23.0	21.5	21.5	22.5	21.0	22.5

Mode / Band		Modulated Average (dBm)
PCS CDMA/EVDO	Maximum	24.0
	Nominal	23.5

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	23.5
	Nominal	23.0
LTE Band 4 (AWS)	Maximum	23.5
	Nominal	23.0
LTE Band 25 (PCS)	Maximum	24.0
	Nominal	23.5
LTE Band 2 (PCS)	Maximum	24.0
	Nominal	23.5

Mode / Band		Modulated Average (dBm)		
Channel		1 - 2	3 - 9	10 - 11
IEEE 802.11b (2.4 GHz)	Maximum	19.0		
	Nominal	18.0		
IEEE 802.11g (2.4 GHz)	Maximum	18.5	19.0	18.0
	Nominal	17.5	18.0	17.0
IEEE 802.11n (2.4 GHz)	Maximum	17.5	19.0	17.0
	Nominal	16.5	18.0	16.0

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 7 of 119

Mode / Band		Modulated Average (dBm)																																			
		20 MHz Bandwidth															40 MHz Bandwidth														80 MHz Bandwidth						
Channel		36	40	44-48	52	56	60	64	100	104-140	144	149-153	157	161	165	38	46	54	62	102	110	118	126	134	142	151	159	42	58	106	122	138	155				
IEEE 802.11a (5 GHz)	Maximum	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0																						
	Nominal	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0																						
IEEE 802.11n (5 GHz)	Maximum	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0			
	Nominal	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0			
IEEE 802.11ac (5 GHz)	Maximum	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0		
	Nominal	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0	15.0		

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix E. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Yes	Yes	No	Yes	No	Yes
EVDO BC10 (§90S)	Yes	Yes	No	Yes	Yes	Yes
EVDO BC0 (§22H)	Yes	Yes	No	Yes	Yes	Yes
PCS EVDO	Yes	Yes	No	Yes	No	Yes
LTE Band 71	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	No	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	No	Yes
LTE Band 41	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN	Yes	Yes	Yes	No	No	Yes
Bluetooth	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-2A and U-NII-2C operations are disabled.

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 8 of 119

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	1x CDMA voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
2	1x CDMA voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
3	1x CDMA voice + 2.4 GHz Bluetooth	Yes [^]	Yes	N/A	Yes	[^] Bluetooth Tethering is considered
4	1x CDMA voice + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes [^]	Yes	N/A	Yes	[^] Bluetooth Tethering is considered
5	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
6	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz Bluetooth	Yes [^]	Yes	N/A	Yes	[^] Bluetooth Tethering is considered
8	GSM voice + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes [^]	Yes	N/A	Yes	[^] Bluetooth Tethering is considered
9	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
10	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
11	UMTS + 2.4 GHz Bluetooth	Yes [^]	Yes	Yes [^]	Yes	[^] Bluetooth Tethering is considered
12	UMTS + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes [^]	Yes	Yes [^]	Yes	[^] Bluetooth Tethering is considered
13	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
14	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
15	LTE + 2.4 GHz Bluetooth	Yes [^]	Yes	Yes [^]	Yes	[^] Bluetooth Tethering is considered
16	LTE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes [^]	Yes	Yes [^]	Yes	[^] Bluetooth Tethering is considered
17	CDMA/EVDO data + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
18	CDMA/EVDO data + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
19	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes [^] *	Yes*	Yes [^]	Yes	* Pre-installed VOIP applications are considered [^] Bluetooth Tethering is considered
20	CDMA/EVDO data + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes [^] *	Yes*	Yes [^]	Yes	* Pre-installed VOIP applications are considered [^] Bluetooth Tethering is considered
21	GPRS/EDGE + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
22	GPRS/EDGE + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
23	GPRS/EDGE + 2.4 GHz Bluetooth	Yes [^] *	Yes*	Yes [^]	Yes	* Pre-installed VOIP applications are considered [^] Bluetooth Tethering is considered
24	GPRS/EDGE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes [^] *	Yes*	Yes [^]	Yes	* Pre-installed VOIP applications are considered [^] Bluetooth Tethering is considered

- 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. There are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-1 and U-NII-3 by S/W, U-NII2A and U-NII2C were not evaluated for wireless router conditions.
- This device supports VOLTE.
- This device supports VoWIFI.
- This device supports Bluetooth Tethering.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 9 of 119

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4 GHz WIFI, U-NII-1, and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) TDWR channels are supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WLAN, U-NII-1 WLAN, U-NII-3 WLAN, and Bluetooth operations since wireless router 1g SAR was < 1.2 W/kg.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. The downlink carrier aggregation exclusion analysis can be found in Appendix F.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Phablet SAR was not evaluated for licensed technologies since wireless router 1g SAR was < 1.2 W/kg for these modes.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 14.1).

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 10 of 119

This device supports LTE Carrier Aggregation (CA) for LTE Band 41 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE Band 41 Power Class 2/3)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID: ZNFL555DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 11 of 119	

2

LTE INFORMATION

LTE Information					
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 71 (665.5 - 695.5 MHz)				
	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 71: 5 MHz	665.5 (133147)		680.5 (133297)	695.5 (133447)	
LTE Band 71: 10 MHz	668 (133172)		680.5 (133297)	693 (133422)	
LTE Band 71: 15 MHz	670.5 (133197)		680.5 (133297)	690.5 (133397)	
LTE Band 71: 20 MHz	673 (133222)		680.5 (133297)	688 (133372)	
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)	715.3 (23173)	
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)	714.5 (23165)	
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)	713.5 (23155)	
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)	711 (23130)	
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)	784.5 (23255)	
LTE Band 13: 10 MHz	N/A		782 (23230)	N/A	
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)	848.3 (27033)	
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)	847.5 (27025)	
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)	846.5 (27015)	
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)	844 (26990)	
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)	841.5 (26965)	
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)	848.3 (20643)	
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)	847.5 (20635)	
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)	846.5 (20625)	
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)	844 (20600)	
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)	1779.3 (132665)	
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)	1778.5 (132657)	
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)	1777.5 (132647)	
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)	1775 (132622)	
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)	1772.5 (132597)	
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)	1770 (132572)	
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)	1754.3 (20393)	
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)	1753.5 (20385)	
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)	1752.5 (20375)	
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)	1750 (20350)	
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)	1747.5 (20325)	
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)	1745 (20300)	
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)	1914.3 (26683)	
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)	1913.5 (26675)	
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)	1912.5 (26665)	
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)	1910 (26640)	
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)	1907.5 (26615)	
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)	1905 (26590)	
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)	1909.3 (19193)	
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)	1908.5 (19185)	
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)	1907.5 (19175)	
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)	1905 (19150)	
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)	1902.5 (19125)	
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)	1900 (19100)	
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	DL UE Cat 7, UL UE Cat 13				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 11. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 11 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WiFi Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: ZNFL555DL		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 12 of 119	

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 13 of 119

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 			Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 14 of 119

5 DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

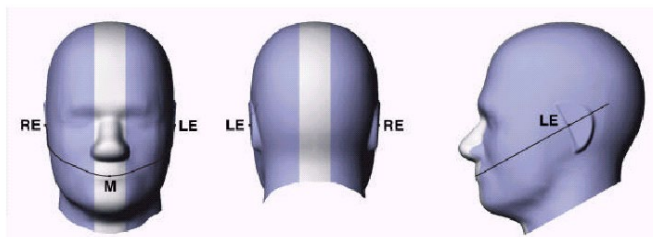


Figure 5-2
Front, back and side view of SAM Twin Phantom

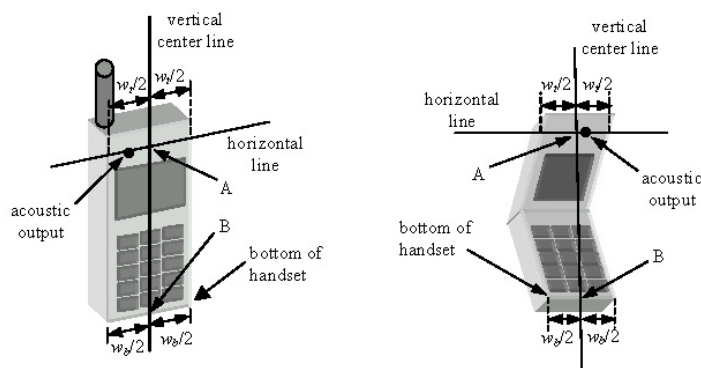


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 15 of 119

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

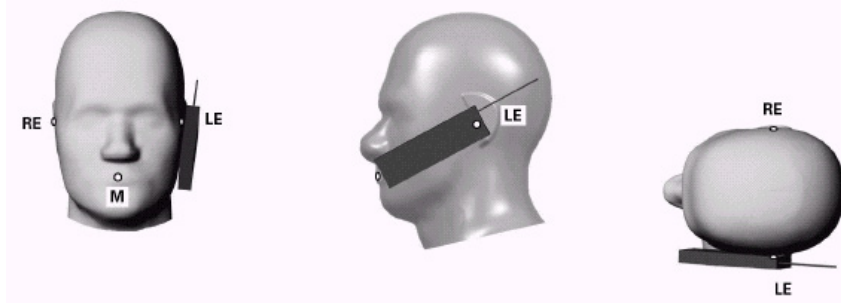


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 16 of 119

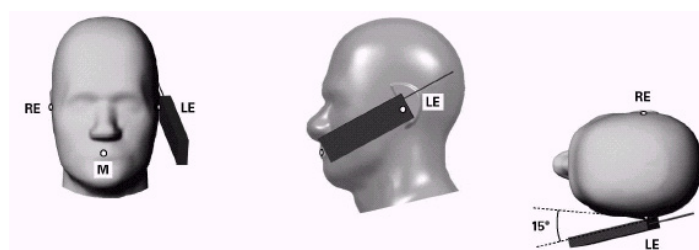


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

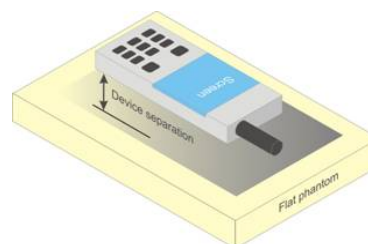


Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 17 of 119

contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.8 Phablet Configurations

For smart phones with a display diagonal dimension $> 150 \text{ mm}$ or an overall diagonal dimension $> 160 \text{ mm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 18 of 119

should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 19 of 119

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 20 of 119

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 21 of 119

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH₀ and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH₀ data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

Table 8-1
Parameters for Max. Power for RC1

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Table 8-2
Parameters for Max. Power for RC3

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

8.4.3 Body-worn SAR Measurements

SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH_n), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH_n), with FCH at full rate and SCH₀ enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with EVDO capabilities, the 3G SAR test reduction procedure is applied to EVDO Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 22 of 119

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

8.5 SAR Measurement Conditions for UMTS

8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s". Results for all applicable physical channel configurations (DPCCH, DPDCH_n and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 23 of 119

8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6

FCC ID: ZNFL555DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 24 of 119

and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.7.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 25 of 119

band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 26 of 119

The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 27 of 119

9 RF CONDUCTED POWERS

9.1 CDMA Conducted Powers

Table 9-1
Maximum Conducted Power

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	24.74	24.77	24.54	24.51	24.20	24.21
Cellular	1013	22H	824.7	24.51	24.52	24.51	24.52	24.34	24.37
	384	22H	836.52	24.74	24.73	24.69	24.70	24.48	24.43
	777	22H	848.31	24.63	24.63	24.63	24.63	24.34	24.27
PCS	25	24E	1851.25	24.52	24.51	24.55	24.51	25.00	24.90
	600	24E	1880	24.61	24.59	24.64	24.62	24.95	24.76
	1175	24E	1908.75	24.85	24.74	24.81	24.74	24.93	24.90

Table 9-2
Reduced Conducted Power

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	FCH+SCH	FCH	(RTAP)	(RETAP)
PCS	25	24E	1851.25	23.86	23.85	23.86	23.85	23.99	23.98
	600	24E	1880	23.89	23.91	23.96	23.94	24.00	23.94
	1175	24E	1908.75	24.00	23.99	24.00	23.99	24.00	23.99

Note: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.




Figure 9-1
Power Measurement Setup

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 28 of 119

9.2 GSM Conducted Powers

Table 9-3
Maximum Conducted Power

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	34.00	34.00	32.68	30.62	28.70	26.68	25.70	23.61	22.69
	190	33.91	33.99	32.68	30.58	28.69	26.70	25.68	23.70	22.70
	251	34.00	33.97	32.69	30.62	28.59	26.51	25.60	23.40	22.45
GSM 1900	512	30.97	30.99	29.67	27.70	25.70	26.61	25.65	23.16	22.35
	661	30.99	31.00	29.70	27.68	25.69	26.64	25.53	23.20	22.32
	810	30.98	30.95	29.65	27.57	25.59	26.70	25.55	23.12	22.37

Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	24.97	24.97	26.66	26.36	25.69	17.65	19.68	19.35	19.68
	190	24.88	24.96	26.66	26.32	25.68	17.67	19.66	19.44	19.69
	251	24.97	24.94	26.67	26.36	25.58	17.48	19.58	19.14	19.44
GSM 1900	512	21.94	21.96	23.65	23.44	22.69	17.58	19.63	18.90	19.34
	661	21.96	21.97	23.68	23.42	22.68	17.61	19.51	18.94	19.31
	810	21.95	21.92	23.63	23.31	22.58	17.67	19.53	18.86	19.36

GSM 850	Frame Avg.Targets:	24.47	24.47	26.18	25.94	25.19	17.17	19.18	18.94	19.19
GSM 1900		21.47	21.47	23.18	22.94	22.19	17.17	19.18	18.44	19.19

FCC ID: ZNFL555DL			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset			Page 29 of 119

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 12 (Max 4 Tx uplink slots)
EDGE Multislot class: 12 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



Figure 9-2
Power Measurement Setup

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 30 of 119

9.3 UMTS Conducted Powers

Table 9-4
Maximum Conducted Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	25.13	25.09	25.20	24.90	24.91	24.91	24.91	24.98	24.92	-
99		12.2 kbps AMR	25.09	25.12	25.20	24.99	25.00	24.98	24.93	25.00	24.99	-
6	HSDPA	Subtest 1	24.20	24.19	24.17	23.98	24.00	23.99	23.99	24.00	23.98	0
6		Subtest 2	24.13	24.14	24.20	24.00	23.97	23.98	23.95	23.99	24.00	0
6		Subtest 3	23.70	23.69	23.70	23.50	23.50	23.49	23.43	23.47	23.47	0.5
6		Subtest 4	23.69	23.68	23.69	23.47	23.49	23.50	23.41	23.44	23.46	0.5
6	HSUPA	Subtest 1	22.20	22.18	22.20	22.00	21.99	21.98	21.90	21.93	21.95	0
6		Subtest 2	22.20	22.19	22.20	21.98	21.97	22.00	21.90	21.97	21.94	2
6		Subtest 3	23.20	23.19	23.20	22.95	22.97	22.99	22.91	22.95	22.94	1
6		Subtest 4	21.69	21.68	21.70	21.50	21.49	21.50	21.40	21.45	21.49	2
6		Subtest 5	23.20	23.18	23.20	23.00	22.97	23.00	22.95	22.93	22.94	0

Table 9-5
Reduced Conducted Power

	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.37	23.40	23.41	23.85	23.92	23.98	-
99		12.2 kbps AMR	23.38	23.40	23.39	23.83	23.91	23.99	-
6	HSDPA	Subtest 1	23.36	23.32	23.40	23.80	23.85	23.88	0
6		Subtest 2	23.35	23.33	23.37	23.77	23.82	23.81	0
6		Subtest 3	22.84	22.83	22.85	23.30	23.37	23.32	0.5
6		Subtest 4	22.83	22.84	22.85	23.26	23.26	23.32	0.5
6	HSUPA	Subtest 1	21.81	21.84	21.86	21.72	21.80	21.80	0
6		Subtest 2	21.32	21.32	21.38	21.75	21.78	21.80	1
6		Subtest 3	22.32	22.35	22.38	22.77	22.77	22.80	2
6		Subtest 4	20.79	20.82	20.88	21.24	21.30	21.30	1
6		Subtest 5	22.30	22.34	22.36	22.74	22.75	22.80	0

This device does not support DC-HSDPA.



Figure 9-3
Power Measurement Setup

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 31 of 119

9.4 LTE Conducted Powers

9.4.1 LTE Band 71

Table 9-6
LTE Band 71 Conducted Powers - 20 MHz Bandwidth

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.95	0	0
	1	50	24.90		0
	1	99	24.67		0
	50	0	24.11	0-1	1
	50	25	24.06		1
	50	50	24.05		1
	100	0	24.08		1
16QAM	1	0	23.84	0-1	1
	1	50	24.04		1
	1	99	23.80		1
	50	0	23.11	0-2	2
	50	25	23.06		2
	50	50	23.07		2
	100	0	23.07		2
64QAM	1	0	23.08	0-2	2
	1	50	23.19		2
	1	99	22.90		2
	50	0	22.12	0-3	3
	50	25	22.08		3
	50	50	22.04		3
	100	0	22.11		3

Note: LTE Band 71 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 32 of 119

Table 9-7
LTE Band 71 Conducted Powers - 15 MHz Bandwidth

LTE Band 71 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.93	0	0
	1	36	24.94		0
	1	74	24.78		0
	36	0	24.05	0-1	1
	36	18	24.07		1
	36	37	24.03		1
	75	0	24.06		1
16QAM	1	0	24.16	0-1	1
	1	36	24.17		1
	1	74	24.06		1
	36	0	23.06	0-2	2
	36	18	23.05		2
	36	37	23.03		2
	75	0	23.06		2
64QAM	1	0	23.07	0-2	2
	1	36	23.19		2
	1	74	23.01		2
	36	0	22.08	0-3	3
	36	18	22.06		3
	36	37	22.07		3
	75	0	22.13		3

Note: LTE Band 71 at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 33 of 119	

Table 9-8
LTE Band 71 Conducted Powers - 10 MHz Bandwidth

LTE Band 71 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133172 (668.0 MHz)	133297 (680.5 MHz)	133422 (693.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.95	24.95	24.85	0	0
	1	25	24.94	24.93	24.92		0
	1	49	24.88	24.85	24.78		0
	25	0	23.94	24.05	24.04	0-1	1
	25	12	24.07	24.06	23.98		1
	25	25	24.18	24.09	23.93		1
16QAM	50	0	24.11	24.09	24.04	0-1	1
	1	0	24.06	24.19	24.11		1
	1	25	24.20	24.16	24.14		1
	1	49	24.16	24.08	24.07	0-2	1
	25	0	22.90	23.08	23.06		2
	25	12	23.03	23.05	23.02		2
64QAM	25	25	23.16	23.09	22.95	0-2	2
	50	0	23.09	23.09	23.02		2
	1	0	23.00	23.20	23.11		0-2
	1	25	23.20	23.20	23.16	2	
	1	49	23.14	23.20	23.02	2	
	25	0	21.93	22.09	22.08	0-3	3
25	12	22.07	22.08	22.01	3		
25	25	22.20	22.12	21.96	3		
	50	0	22.12	22.11	22.05		3

Table 9-9
LTE Band 71 Conducted Powers - 5 MHz Bandwidth

LTE Band 71 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133147 (665.5 MHz)	133297 (680.5 MHz)	133447 (695.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.83	24.85	24.74	0	0
	1	12	24.94	24.92	24.85		0
	1	24	24.82	24.80	24.74		0
	12	0	23.96	24.00	24.00	0-1	1
	12	6	24.09	24.11	24.02		1
	12	13	24.15	24.03	23.91		1
16QAM	25	0	24.11	24.02	23.97	0-1	1
	1	0	23.93	24.14	24.00		1
	1	12	24.20	24.20	24.20		1
	1	24	23.97	24.09	24.00	0-2	1
	12	0	22.93	23.00	23.02		2
	12	6	23.06	23.11	23.04		2
64QAM	12	13	23.15	23.02	22.97	0-2	2
	25	0	23.06	23.02	22.96		2
	1	0	22.92	23.06	23.00		0-2
	1	12	23.20	23.02	23.20	2	
	1	24	22.99	23.00	23.20	0-3	
	12	0	22.00	22.05	22.03		3
12	6	22.10	22.11	22.05	3		
12	13	22.17	22.05	21.98	3		
	25	0	22.09	22.04	21.97		3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 34 of 119	

9.4.2

LTE Band 12

Table 9-10
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.09	0	0
	1	25	25.13		0
	1	49	25.05		0
	25	0	24.16	0-1	1
	25	12	24.20		1
	25	25	24.18		1
	50	0	24.15		1
16QAM	1	0	23.97	0-1	1
	1	25	24.10		1
	1	49	24.06		1
	25	0	23.10	0-2	2
	25	12	23.16		2
	25	25	23.14		2
	50	0	23.12		2
64QAM	1	0	23.19	0-2	2
	1	25	23.17		2
	1	49	23.10		2
	25	0	22.10	0-3	3
	25	12	22.17		3
	25	25	22.14		3
	50	0	22.12		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 35 of 119

Table 9-11
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.95	24.92	24.92	0	0
	1	12	25.12	25.10	25.11		0
	1	24	24.90	24.88	24.87		0
	12	0	24.15	24.14	24.17	0-1	1
	12	6	24.19	24.17	24.17		1
	12	13	24.09	24.14	24.09		1
	25	0	24.16	24.17	24.14		1
16QAM	1	0	24.11	24.15	24.16	0-1	1
	1	12	24.20	24.20	24.20		1
	1	24	24.07	24.08	24.05		1
	12	0	23.10	23.12	23.10	0-2	2
	12	6	23.14	23.13	23.15		2
	12	13	23.05	23.10	23.03		2
	25	0	23.12	23.10	23.11		2
64QAM	1	0	23.11	23.10	23.10	0-2	2
	1	12	23.20	23.20	23.20		2
	1	24	23.09	23.07	23.00		2
	12	0	22.15	22.13	22.17	0-3	3
	12	6	22.19	22.18	22.16		3
	12	13	22.10	22.15	22.07		3
	25	0	22.11	22.12	22.15		3

Table 9-12
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.00	25.00	25.00	0	0
	1	7	25.13	25.12	25.13		0
	1	14	25.00	24.98	24.98		0
	8	0	24.11	24.11	24.14	0-1	1
	8	4	24.16	24.14	24.15		1
	8	7	24.08	24.10	24.11		1
	15	0	24.14	24.15	24.20		1
16QAM	1	0	24.20	24.20	24.15	0-1	1
	1	7	24.20	24.20	24.20		1
	1	14	24.20	24.20	24.09		1
	8	0	23.09	23.13	23.14	0-2	2
	8	4	23.11	23.11	23.10		2
	8	7	23.00	23.10	23.05		2
	15	0	23.06	23.08	23.08		2
64QAM	1	0	23.18	23.16	23.18	0-2	2
	1	7	23.16	23.20	23.20		2
	1	14	23.20	23.14	23.12		2
	8	0	22.13	22.13	22.14	0-3	3
	8	4	22.15	22.16	22.16		3
	8	7	22.12	22.12	22.11		3
	15	0	22.10	22.10	22.10		3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 36 of 119	

Table 9-13
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.94	24.96	24.95	0	0
	1	2	25.10	25.10	25.07		0
	1	5	24.95	24.95	24.91		0
	3	0	25.09	25.09	25.07		0
	3	2	25.10	25.04	25.10		0
	3	3	25.08	25.08	25.05		0
	6	0	24.20	24.18	24.18	0-1	1
16QAM	1	0	24.13	24.08	24.18	0-1	1
	1	2	24.20	24.20	24.17		1
	1	5	24.14	24.06	23.95		1
	3	0	24.11	24.12	24.07		1
	3	2	24.16	24.16	23.99		1
	3	3	24.10	24.11	23.97		1
	6	0	23.17	23.18	23.14	0-2	2
64QAM	1	0	23.16	23.10	23.15	0-2	2
	1	2	23.20	23.20	23.18		2
	1	5	23.10	23.10	23.06		2
	3	0	23.17	23.13	23.11		2
	3	2	23.15	23.15	23.13		2
	3	3	23.17	23.16	23.09		2
	6	0	22.12	22.14	22.08	0-3	3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 37 of 119

9.4.3

LTE Band 13

Table 9-14
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.12	0	0
	1	25	25.20		0
	1	49	25.13		0
	25	0	24.17	0-1	1
	25	12	24.19		1
	25	25	24.05		1
	50	0	24.02		1
16QAM	1	0	23.79	0-1	1
	1	25	24.00		1
	1	49	23.97		1
	25	0	23.00	0-2	2
	25	12	23.10		2
	25	25	23.07		2
	50	0	23.05		2
64QAM	1	0	23.19	0-2	2
	1	25	23.14		2
	1	49	23.09		2
	25	0	22.18	0-3	3
	25	12	22.18		3
	25	25	22.15		3
	50	0	22.04		3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 38 of 119

Table 9-15
LTE Band 13 Conducted Powers - 5 MHz Bandwidth

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.97	0	0
	1	12	25.20		0
	1	24	24.98		0
	12	0	24.08	0-1	1
	12	6	24.16		1
	12	13	24.14		1
	25	0	24.14		1
16QAM	1	0	24.10	0-1	1
	1	12	24.20		1
	1	24	24.18		1
	12	0	23.10	0-2	2
	12	6	23.20		2
	12	13	23.19		2
	25	0	23.15		2
64QAM	1	0	23.15	0-2	2
	1	12	23.20		2
	1	24	23.20		2
	12	0	22.17	0-3	3
	12	6	22.20		3
	12	13	22.20		3
	25	0	22.18		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 39 of 119

9.4.4

LTE Band 26 (Cell)

Table 9-16
LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.03	0	0
	1	36	25.10		0
	1	74	25.00		0
	36	0	24.19	0-1	1
	36	18	24.15		1
	36	37	24.13		1
	75	0	24.18		1
16QAM	1	0	24.02	0-1	1
	1	36	24.14		1
	1	74	24.05		1
	36	0	23.19	0-2	2
	36	18	23.20		2
	36	37	23.16		2
	75	0	23.13		2
64QAM	1	0	23.14	0-2	2
	1	36	23.20		2
	1	74	23.18		2
	36	0	22.16	0-3	3
	36	18	22.14		3
	36	37	22.10		3
	75	0	22.11		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 40 of 119

Table 9-17
LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.90	24.94	24.95	0	0
	1	25	25.03	25.06	25.06		0
	1	49	24.89	24.88	24.93		0
	25	0	24.05	24.05	24.20	0-1	1
	25	12	24.05	24.08	24.17		1
	25	25	24.06	24.03	24.00		1
	50	0	24.07	24.11	24.11		1
16QAM	1	0	24.13	24.13	24.16	0-1	1
	1	25	23.89	24.20	24.20		1
	1	49	24.10	24.10	24.08		1
	25	0	23.11	23.18	23.15	0-2	2
	25	12	23.10	23.15	23.20		2
	25	25	23.03	23.16	23.20		2
	50	0	23.10	23.15	23.11		2
64QAM	1	0	23.13	23.20	23.20	0-2	2
	1	25	23.20	23.20	23.20		2
	1	49	23.17	23.10	23.10		2
	25	0	22.00	22.09	22.20	0-3	3
	25	12	22.05	22.12	22.12		3
	25	25	22.00	22.02	22.00		3
	50	0	22.03	22.09	22.13		3

Table 9-18
LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.79	24.87	24.86	0	0
	1	12	25.09	25.10	25.09		0
	1	24	24.81	24.82	24.82		0
	12	0	23.97	24.07	24.08	0-1	1
	12	6	24.02	24.06	24.08		1
	12	13	23.97	24.00	23.95		1
	25	0	24.00	24.04	24.04		1
16QAM	1	0	24.00	24.08	24.10	0-1	1
	1	12	24.20	24.20	24.20		1
	1	24	24.00	24.05	24.00		1
	12	0	23.03	23.12	23.10	0-2	2
	12	6	23.03	23.15	23.10		2
	12	13	23.05	23.07	23.00		2
	25	0	23.00	23.11	23.03		2
64QAM	1	0	23.08	23.13	23.10	0-2	2
	1	12	23.20	23.20	23.16		2
	1	24	23.00	23.06	23.00		2
	12	0	21.91	22.00	22.05	0-3	3
	12	6	22.00	22.04	22.06		3
	12	13	21.96	21.97	21.92		3
	25	0	21.93	22.00	21.96		3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 41 of 119	

Table 9-19
LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.84	24.93	24.89	0	0
	1	7	25.00	25.09	25.06		0
	1	14	24.88	24.93	24.90		0
	8	0	23.93	23.95	23.97	0-1	1
	8	4	23.96	24.02	24.02		1
	8	7	24.00	24.00	23.97		1
	15	0	23.97	24.02	24.02		1
16QAM	1	0	24.06	24.16	24.03	0-1	1
	1	7	24.19	24.20	24.17		1
	1	14	24.00	24.16	24.08		1
	8	0	23.00	23.00	23.04	0-2	2
	8	4	23.05	23.14	23.06		2
	8	7	23.00	23.09	23.00		2
	15	0	22.97	23.00	23.00		2
64QAM	1	0	23.08	23.16	23.00	0-2	2
	1	7	23.19	23.20	23.20		2
	1	14	23.00	23.15	23.07		2
	8	0	21.92	22.00	22.00	0-3	3
	8	4	22.08	22.01	22.00		3
	8	7	21.90	21.97	21.90		3
	15	0	21.91	21.97	22.00		3

Table 9-20
LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.81	24.83	24.82	0	0
	1	2	24.92	24.98	25.00		0
	1	5	24.77	24.79	24.82		0
	3	0	24.92	24.95	24.96		0
	3	2	24.94	25.00	25.00		0
	3	3	24.84	24.97	24.98		0
	6	0	23.99	24.00	24.05	0-1	1
16QAM	1	0	23.91	24.04	23.98	0-1	1
	1	2	24.00	24.15	24.13		1
	1	5	24.01	24.05	23.90		1
	3	0	23.93	24.00	24.00		1
	3	2	23.97	24.00	24.00		1
	3	3	23.94	24.00	23.96		1
	6	0	23.05	23.11	23.06	0-2	2
64QAM	1	0	23.06	23.10	23.04	0-2	2
	1	2	23.17	23.18	23.11		2
	1	5	22.99	23.09	23.00		2
	3	0	23.05	23.17	23.03		2
	3	2	23.00	23.12	23.00		2
	3	3	23.03	23.11	23.04		2
	6	0	21.89	21.94	21.96	0-3	3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 42 of 119	

9.4.5

LTE Band 66 (AWS)

Table 9-21
LTE Band 66 (AWS) Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.65	24.66	24.61	0	0
	1	50	24.89	24.84	24.85		0
	1	99	24.64	24.61	24.64		0
	50	0	23.88	24.00	23.90	0-1	1
	50	25	23.93	23.96	23.92		1
	50	50	23.99	23.89	23.77		1
	100	0	23.99	23.96	23.89		1
16QAM	1	0	23.60	23.53	23.64	0-1	1
	1	50	23.91	23.84	23.73		1
	1	99	23.70	23.70	23.59		1
	50	0	22.83	22.94	22.88	0-2	2
	50	25	22.87	22.91	22.86		2
	50	50	22.96	22.96	22.71		2
	100	0	22.87	22.85	22.86		2
64QAM	1	0	22.82	22.78	22.50	0-2	2
	1	50	22.97	22.87	22.89		2
	1	99	22.87	22.77	22.76		2
	50	0	21.84	21.94	21.84	0-3	3
	50	25	21.93	21.93	21.87		3
	50	50	21.98	21.87	21.71		3
	100	0	21.89	21.87	21.78		3

Table 9-22
LTE Band 66 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.62	24.61	24.70	0	0
	1	36	24.60	24.72	24.79		0
	1	74	24.50	24.54	24.65		0
	36	0	23.85	23.96	23.93	0-1	1
	36	18	23.79	23.91	23.91		1
	36	37	23.84	23.88	23.83		1
	75	0	23.80	23.90	23.88		1
16QAM	1	0	24.00	23.95	23.95	0-1	1
	1	36	23.99	24.00	24.00		1
	1	74	23.94	23.99	23.91		1
	36	0	22.80	22.86	22.88	0-2	2
	36	18	22.76	22.83	22.84		2
	36	37	22.80	22.79	22.80		2
	75	0	22.77	22.84	22.79		2
64QAM	1	0	22.89	22.85	22.79	0-2	2
	1	36	22.93	22.97	22.88		2
	1	74	23.00	22.88	22.77		2
	36	0	21.84	21.80	21.86	0-3	3
	36	18	21.87	21.88	21.80		3
	36	37	21.92	21.81	21.77		3
	75	0	21.84	21.83	21.77		3

FCC ID: ZNFL555DL			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset			Page 43 of 119

Table 9-23
LTE Band 66 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.63	24.67	24.68	0	0
	1	25	24.73	24.83	24.85		0
	1	49	24.55	24.60	24.66		0
	25	0	23.73	23.80	23.82	0-1	1
	25	12	23.74	23.80	23.80		1
	25	25	23.73	23.70	23.77		1
16QAM	50	0	23.75	23.78	23.80	0-1	1
	1	0	23.80	24.00	23.80		1
	1	25	23.95	24.00	23.98		1
	1	49	23.83	24.00	23.78	0-2	1
	25	0	22.78	22.88	22.85		2
	25	12	22.77	22.82	22.84		2
64QAM	25	25	22.80	22.79	22.81	0-2	2
	50	0	22.79	22.82	22.82		2
	1	0	22.95	22.88	22.80	0-2	2
	1	25	23.00	23.00	23.00		2
	1	49	22.95	22.87	22.80	0-3	2
	25	0	21.88	21.88	21.82		3
25	12	22.00	21.87	21.80	3		
25	25	21.91	21.81	21.77	3		
	50	0	21.91	21.86	21.82		3

Table 9-24
LTE Band 66 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.63	24.63	24.51	0	0
	1	12	24.82	24.68	24.81		0
	1	24	24.56	24.64	24.56		0
	12	0	23.67	23.76	23.80	0-1	1
	12	6	23.72	23.80	23.82		1
	12	13	23.68	23.71	23.78		1
16QAM	25	0	23.66	23.74	23.75	0-1	1
	1	0	23.90	23.82	23.73		1
	1	12	24.00	23.95	24.00		1
	1	24	23.88	23.81	23.73	0-2	1
	12	0	22.61	22.71	22.78		2
	12	6	22.68	22.78	22.79		2
64QAM	12	13	22.64	22.72	22.72	0-2	2
	25	0	22.65	22.74	22.76		2
	1	0	22.66	22.83	22.72		0-2
	1	12	23.00	23.00	22.95	2	
	1	24	22.83	22.83	22.67	0-3	
	12	0	21.95	21.85	21.79		3
12	6	21.92	21.90	21.81	3		
12	13	21.78	21.80	21.76	3		
	25	0	21.86	21.85	21.77		

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 44 of 119	

Table 9-25
LTE Band 66 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.68	24.70	24.71	0	0
	1	7	24.78	24.79	24.87		0
	1	14	24.61	24.67	24.70		0
	8	0	23.75	23.76	23.79	0-1	1
	8	4	23.80	23.80	23.81		1
	8	7	23.72	23.77	23.80		1
16QAM	15	0	23.70	23.72	23.76	0-1	1
	1	0	23.85	24.00	23.83		1
	1	7	23.98	24.00	23.96		1
	1	14	23.77	23.90	23.80	0-2	1
	8	0	22.75	22.84	22.73		2
	8	4	22.77	22.83	22.76		2
64QAM	8	7	22.67	22.82	22.70	0-2	2
	15	0	22.71	22.80	22.77		2
	1	0	22.92	22.92	22.92		0-2
	1	7	22.97	22.97	23.00	2	
	1	14	22.96	22.96	22.80	2	
	8	0	21.92	21.87	21.79	0-3	3
8	4	21.77	21.90	21.79	3		
8	7	21.88	21.84	21.76	3		
	15	0	21.86	21.81	21.74		3

Table 9-26
LTE Band 66 (AWS) Maximum Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.69	24.63	24.82	0	0
	1	2	24.82	24.76	24.84		0
	1	5	24.67	24.65	24.85		0
	3	0	24.74	24.80	24.81		0
	3	2	24.80	24.87	24.84		0
	3	3	24.76	24.81	24.78		0
	6	0	23.85	23.86	23.89	0-1	1
16QAM	1	0	23.75	23.86	23.65	0-1	1
	1	2	23.90	24.00	23.74		1
	1	5	23.80	23.88	23.65		1
	3	0	23.75	23.74	23.80		1
	3	2	23.79	23.74	23.86		1
	3	3	23.77	23.69	23.84	1	
64QAM	6	0	22.88	22.85	23.00	0-2	2
	1	0	22.96	22.88	22.86	0-2	2
	1	2	22.98	22.95	22.92		2
	1	5	22.98	23.00	22.86		2
	3	0	23.00	23.00	22.82		2
	3	2	22.93	22.95	22.85		2
	3	3	22.95	22.99	22.81	2	
	6	0	21.96	21.86	21.77	0-3	3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 45 of 119

Table 9-27
LTE Band 66 (AWS) Reduced Conducted Powers -20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.24	23.25	23.24	0	0
	1	50	23.45	23.47	23.42		0
	1	99	23.28	23.22	23.18		0
	50	0	23.38	23.48	23.49	0-1	0
	50	25	23.43	23.50	23.43		0
	50	50	23.49	23.41	23.29		0
	100	0	23.45	23.46	23.37		0
16QAM	1	0	23.45	23.46	23.48	0-1	0
	1	50	23.49	23.47	23.41		0
	1	99	23.48	23.50	23.44		0
	50	0	22.90	23.00	22.98	0-2	0.5
	50	25	22.96	22.98	22.92		0.5
	50	50	23.00	22.92	22.78		0.5
	100	0	22.95	22.96	22.85		0.5
64QAM	1	0	22.91	22.94	22.93	0-2	0.5
	1	50	23.00	22.97	22.97		0.5
	1	99	22.96	22.95	22.85		0.5
	50	0	21.88	21.98	21.97	0-3	1.5
	50	25	21.89	21.97	21.91		1.5
	50	50	21.99	21.94	21.79		1.5
	100	0	21.94	21.95	21.84		1.5

Table 9-28
LTE Band 66 (AWS) Reduced Conducted Powers -15 MHz Bandwidth

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.23	23.21	23.13	0	0
	1	36	23.29	23.26	23.19		0
	1	74	23.20	23.17	23.10		0
	36	0	23.32	23.38	23.34	0-1	0
	36	18	23.34	23.35	23.36		0
	36	37	23.39	23.31	23.27		0
16QAM	75	0	23.33	23.33	23.29	0-1	0
	1	0	23.37	23.34	23.30		0
	1	36	23.50	23.50	23.40		0
	1	74	23.40	23.41	23.10	0-2	0
	36	0	22.82	22.86	22.81		0.5
	36	18	22.82	22.84	22.75		0.5
64QAM	36	37	22.86	22.81	22.74	0-2	0.5
	75	0	22.83	22.84	22.75		0.5
	1	0	22.90	22.87	22.78		0-2
	1	36	23.00	23.00	22.80	0.5	
	1	74	22.86	22.84	22.75	0.5	
	64QAM	36	0	21.82	21.88	21.85	0-3
36		18	21.87	21.85	21.80	1.5	
36		37	21.90	21.84	21.77	1.5	
75		0	21.84	21.84	21.77	1.5	

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 46 of 119	

Table 9-29
LTE Band 66 (AWS) Reduced Conducted Powers -10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.26	23.20	23.16	0	0
	1	25	23.41	23.36	23.29		0
	1	49	23.24	23.21	23.00		0
	25	0	23.35	23.37	23.34	0-1	0
	25	12	23.35	23.35	23.26		0
	25	25	23.37	23.30	23.24		0
50	0	23.34	23.37	23.30	0		
16QAM	1	0	23.46	23.45	23.34	0-1	0
	1	25	23.49	23.50	23.50		0
	1	49	23.45	23.44	23.38		0
	25	0	22.85	22.88	22.80	0-2	0.5
	25	12	22.88	22.85	22.78		0.5
	25	25	22.89	22.82	22.71		0.5
50	0	22.89	22.85	22.77	0.5		
64QAM	1	0	22.76	22.86	22.79	0-2	0.5
	1	25	23.00	23.00	22.90		0.5
	1	49	22.99	22.90	22.81		0.5
	25	0	21.87	21.90	21.83	0-3	1.5
	25	12	21.87	21.86	21.78		1.5
	25	25	21.89	21.82	21.77		1.5
50	0	21.89	21.87	21.78	1.5		

Table 9-30
LTE Band 66 (AWS) Reduced Conducted Powers -5 MHz Bandwidth

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.18	23.15	23.00	0	0
	1	12	23.42	23.46	23.35		0
	1	24	23.15	23.15	23.06		0
	12	0	23.29	23.30	23.23	0-1	0
	12	6	23.35	23.34	23.26		0
	12	13	23.29	23.27	23.20		0
	25	0	23.32	23.30	23.23		0
16QAM	1	0	23.44	23.33	23.30	0-1	0
	1	12	23.50	23.45	23.47		0
	1	24	23.44	23.35	23.20		0
	12	0	22.80	22.84	22.73	0-2	0.5
	12	6	22.88	22.87	22.77		0.5
	12	13	22.83	22.80	22.71		0.5
	25	0	22.82	22.82	22.72		0.5
64QAM	1	0	22.85	22.88	22.72	0-2	0.5
	1	12	23.00	23.00	22.74		0.5
	1	24	22.83	22.80	22.77		0.5
	12	0	21.84	21.85	21.81	0-3	1.5
	12	6	21.90	21.80	21.76		1.5
	12	13	21.80	21.82	21.76		1.5
	25	0	21.83	21.82	21.80		1.5

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 47 of 119	

Table 9-31
LTE Band 66 (AWS) Reduced Conducted Powers -3 MHz Bandwidth

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.28	23.23	23.17	0	0
	1	7	23.45	23.41	23.33		0
	1	14	23.26	23.24	23.16		0
	8	0	23.28	23.35	23.20	0-1	0
	8	4	23.30	23.35	23.22		0
	8	7	23.28	23.25	23.18		0
16QAM	15	0	23.31	23.30	23.22	0-1	0
	1	0	23.43	23.48	23.39		0
	1	7	23.50	23.45	23.50		0
	1	14	23.46	23.44	23.35	0-2	0
	8	0	22.83	22.83	22.75		0.5
	8	4	22.86	22.84	22.76		0.5
64QAM	8	7	22.84	22.83	22.83	0-2	0.5
	15	0	22.80	22.78	22.70		0.5
	1	0	22.95	22.92	22.84	0-2	0.5
	1	7	23.00	23.00	22.96		0.5
	1	14	22.92	22.96	22.82		0.5
	8	0	21.90	21.89	21.80	0-3	1.5
8	4	21.93	21.89	21.74	1.5		
8	7	21.87	21.86	21.91	1.5		
	15	0	21.82	21.82	21.71	1.5	

Table 9-32
LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.27	23.32	23.16	0	0
	1	2	23.44	23.43	23.30		0
	1	5	23.29	23.25	23.14		0
	3	0	23.38	23.32	23.17		0
	3	2	23.43	23.35	23.29		0
	3	3	23.38	23.34	23.25		0
	6	0	23.42	23.34	23.28	0-1	0
16QAM	1	0	23.44	23.46	23.43	0-1	0
	1	2	23.50	23.48	23.50		0
	1	5	23.45	23.50	23.35		0
	3	0	23.50	23.40	23.33		0
	3	2	23.50	23.44	23.33		0
	3	3	23.41	23.47	23.30	0	
6	0	22.97	22.93	22.83	0-2	0.5	
64QAM	1	0	22.94	22.93	22.84	0-2	0.5
	1	2	23.00	23.00	22.97		0.5
	1	5	22.92	22.93	22.78		0.5
	3	0	22.97	22.93	22.82		0.5
	3	2	23.00	22.96	22.98		0.5
	3	3	22.94	22.98	22.87		0.5
	6	0	21.93	21.88	21.78	0-3	1.5

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 48 of 119	

9.4.6

LTE Band 25 (PCS)

Table 9-33
LTE Band 25 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.70	24.69	24.65	0	0
	1	50	24.96	24.94	24.90		0
	1	99	24.72	24.67	24.65		0
	50	0	23.83	23.97	23.93	0-1	1
	50	25	23.95	23.96	23.91		1
	50	50	23.93	23.86	23.78		1
	100	0	23.86	23.81	23.85		1
16QAM	1	0	24.00	23.72	23.89	0-1	1
	1	50	23.98	23.99	24.00		1
	1	99	23.94	23.88	23.85		1
	50	0	22.86	23.00	22.97	0-2	2
	50	25	22.99	23.00	22.98		2
	50	50	22.99	22.91	22.76		2
	100	0	22.90	22.99	22.89		2
64QAM	1	0	22.97	22.87	22.96	0-2	2
	1	50	23.00	22.87	22.97		2
	1	99	23.00	22.89	22.83		2
	50	0	21.88	21.97	21.93	0-3	3
	50	25	21.99	22.00	21.96		3
	50	50	21.99	21.88	21.81		3
	100	0	21.91	21.94	21.91		3

Table 9-34
LTE Band 25 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.60	24.46	24.63	0	0
	1	36	24.61	24.53	24.73		0
	1	74	24.49	24.49	24.78		0
	36	0	23.68	23.73	23.82	0-1	1
	36	18	23.68	23.70	23.83		1
	36	37	23.71	23.70	23.79		1
	75	0	23.70	23.70	23.79		1
16QAM	1	0	24.00	23.57	23.83	0-1	1
	1	36	24.00	23.63	23.94		1
	1	74	23.94	23.56	23.84		1
	36	0	22.70	22.70	22.87	0-2	2
	36	18	22.70	22.70	22.85		2
	36	37	22.70	22.69	22.77		2
	75	0	22.72	22.71	22.75		2
64QAM	1	0	23.00	23.00	22.94	0-2	2
	1	36	23.00	23.00	23.00		2
	1	74	22.91	23.00	22.95		2
	36	0	21.96	21.99	22.00	0-3	3
	36	18	22.00	22.00	22.00		3
	36	37	22.00	22.00	21.96		3
	75	0	21.96	21.98	21.96		3

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 49 of 119

Table 9-35
LTE Band 25 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.58	24.50	24.53	0	0
	1	25	24.72	24.74	24.77		0
	1	49	24.47	24.50	24.65		0
	25	0	23.54	23.56	23.75	0-1	1
	25	12	23.55	23.61	23.72		1
	25	25	23.59	23.57	23.60		1
	50	0	23.58	23.57	23.65	1	
16QAM	1	0	24.00	23.63	23.78	0-1	1
	1	25	24.00	23.81	23.91		1
	1	49	23.95	23.60	23.72		1
	25	0	22.71	22.67	22.85	0-2	2
	25	12	22.71	22.70	22.80		2
	25	25	22.71	22.66	22.67		2
	50	0	22.72	22.64	22.76	2	
64QAM	1	0	23.00	23.00	23.00	0-2	2
	1	25	23.00	23.00	22.99		2
	1	49	23.00	23.00	22.89		2
	25	0	21.95	21.90	21.97	0-3	3
	25	12	22.00	22.00	22.00		3
	25	25	21.99	21.98	21.93		3
	50	0	21.95	22.00	22.00	3	

Table 9-36
LTE Band 25 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.40	24.47	24.65	0	0
	1	12	24.67	24.64	24.84		0
	1	24	24.38	24.36	24.71		0
	12	0	23.51	23.52	23.71	0-1	1
	12	6	23.58	23.58	23.75		1
	12	13	23.51	23.55	23.58		1
	25	0	23.54	23.54	23.64		1
16QAM	1	0	23.60	23.65	23.84	0-1	1
	1	12	23.80	23.82	23.90		1
	1	24	23.53	23.54	23.86		1
	12	0	22.59	22.59	22.70	0-2	2
	12	6	22.62	22.62	22.73		2
	12	13	22.58	22.56	22.61		2
	25	0	22.62	22.62	22.60		2
64QAM	1	0	22.95	22.98	22.93	0-2	2
	1	12	23.00	23.00	23.00		2
	1	24	22.95	22.93	22.87		2
	12	0	21.97	21.97	21.96	0-3	3
	12	6	22.00	22.00	22.00		3
	12	13	22.00	21.95	21.89		3
	25	0	21.99	21.97	21.90		3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 50 of 119	

Table 9-37
LTE Band 25 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.60	24.47	24.68	0	0
	1	7	24.70	24.63	24.84		0
	1	14	24.52	24.49	24.77		0
	8	0	23.56	23.58	23.75	0-1	1
	8	4	23.62	23.59	23.78		1
	8	7	23.58	23.54	23.72		1
	15	0	23.55	23.53	23.71	1	
16QAM	1	0	23.72	23.70	24.00	0-1	1
	1	7	23.77	23.84	24.00		1
	1	14	23.62	23.68	23.94		1
	8	0	22.58	22.61	22.83	0-2	2
	8	4	22.61	22.63	22.83		2
	8	7	22.59	22.60	22.80		2
	15	0	22.62	22.60	22.75	2	
64QAM	1	0	23.00	23.00	23.00	0-2	2
	1	7	23.00	23.00	23.00		2
	1	14	23.00	23.00	22.91		2
	8	0	22.00	21.99	22.00	0-3	3
	8	4	22.00	21.96	21.98		3
	8	7	22.00	22.00	21.95		3
	15	0	22.00	21.97	21.94	3	

Table 9-38
LTE Band 25 (PCS) Maximum Conducted Powers -1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.64	24.47	24.61	0	0
	1	2	24.80	24.62	24.81		0
	1	5	24.66	24.50	24.67		0
	3	0	24.75	24.58	24.71		0
	3	2	24.74	24.65	24.79		0
	3	3	24.68	24.59	24.73		0
	6	0	23.65	23.60	23.90	0-1	1
16QAM	1	0	23.49	23.59	23.74	0-1	1
	1	2	23.61	23.70	23.84		1
	1	5	23.49	23.55	23.73		1
	3	0	23.70	23.56	23.50		1
	3	2	23.73	23.61	23.51		1
	3	3	23.70	23.59	23.51		1
	6	0	22.83	22.68	22.79	0-2	2
64QAM	1	0	22.97	23.00	23.00	0-2	2
	1	2	22.98	23.00	22.99		2
	1	5	22.94	23.00	22.95		2
	3	0	23.00	23.00	23.00		2
	3	2	23.00	22.99	22.94		2
	3	3	22.98	22.95	22.98		2
	6	0	21.99	21.92	21.98	0-3	3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 51 of 119

Table 9-39
LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.71	23.73	23.68	0	0
	1	50	23.92	23.95	23.72		0
	1	99	23.73	23.70	23.66		0
	50	0	23.83	23.97	23.92	0-1	0
	50	25	23.95	23.96	23.94		0
	50	50	23.94	23.89	23.80		0
	100	0	23.87	23.94	23.86		0
16QAM	1	0	23.96	23.91	23.94	0-1	0
	1	50	23.99	23.85	23.91		0
	1	99	23.96	23.88	23.80		0
	50	0	22.91	22.99	22.98	0-2	1
	50	25	22.99	23.00	22.98		1
	50	50	22.78	22.94	22.84		1
	100	0	22.92	22.96	22.74		1
64QAM	1	0	22.95	22.97	22.70	0-2	1
	1	50	22.94	22.94	22.80		1
	1	99	22.97	22.93	22.50		1
	50	0	21.90	21.99	21.98	0-3	2
	50	25	21.99	21.96	22.00		2
	50	50	22.00	21.94	21.84		2
	100	0	21.90	21.97	21.75		2

Table 9-40
LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.95	23.80	23.67	0	0
	1	36	24.00	23.82	23.80		0
	1	74	23.88	23.72	23.70		0
	36	0	24.00	23.92	23.83	0-1	0
	36	18	24.00	23.94	23.90		0
	36	37	24.00	23.90	23.82		0
	75	0	23.95	23.92	23.85		0
16QAM	1	0	24.00	23.80	23.82	0-1	0
	1	36	24.00	23.90	23.89		0
	1	74	23.95	23.82	23.72		0
	36	0	22.97	22.95	22.94	0-2	1
	36	18	23.00	23.00	22.95		1
	36	37	23.00	22.94	23.00		1
	75	0	22.99	22.96	23.00		1
64QAM	1	0	23.00	22.96	22.99	0-2	1
	1	36	23.00	23.00	23.00		1
	1	74	23.00	22.97	23.00		1
	36	0	21.95	22.00	22.00	0-3	2
	36	18	21.97	22.00	22.00		2
	36	37	21.99	21.98	21.95		2
	75	0	21.94	21.97	21.95		2

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 52 of 119	

Table 9-41
LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.91	23.79	23.68	0	0
	1	25	23.72	23.90	23.72		0
	1	49	23.93	23.74	23.66		0
	25	0	23.84	23.92	23.92	0-1	0
	25	12	23.95	23.94	23.94		0
	25	25	23.84	23.92	23.80		0
	50	0	23.90	23.92	23.86	0	
16QAM	1	0	23.94	23.94	23.94	0-1	0
	1	25	23.98	23.86	23.91		0
	1	49	23.94	23.84	23.80		0
	25	0	22.89	22.98	22.98	0-2	1
	25	12	22.95	22.99	22.98		1
	25	25	22.88	22.95	22.84		1
	50	0	23.00	22.96	22.74	1	
64QAM	1	0	22.99	22.97	22.70	0-2	1
	1	25	22.90	22.92	22.80		1
	1	49	22.95	22.91	22.50		1
	25	0	21.89	22.00	21.98	0-3	2
	25	12	21.84	21.98	22.00		2
	25	25	21.98	21.92	21.84		2
	50	0	21.92	21.95	21.75	2	

Table 9-42
LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.89	23.76	23.74	0	0
	1	12	23.95	23.84	23.79		0
	1	24	23.90	23.75	23.75		0
	12	0	23.89	23.94	23.84	0-1	0
	12	6	23.95	23.92	23.95		0
	12	13	23.99	23.95	23.89		0
	25	0	23.95	23.99	23.84		0
16QAM	1	0	23.90	23.82	23.87	0-1	0
	1	12	24.00	23.95	23.84		0
	1	24	23.99	23.94	23.84		0
	12	0	22.97	22.96	22.95	0-2	1
	12	6	22.98	22.99	22.95		1
	12	13	22.94	22.95	22.95		1
	25	0	22.92	22.98	22.94		1
64QAM	1	0	22.91	22.91	22.92	0-2	1
	1	12	22.89	22.99	22.99		1
	1	24	22.87	22.98	22.94		1
	12	0	21.94	21.94	21.99	0-3	2
	12	6	21.98	21.98	22.00		2
	12	13	21.89	21.91	22.00		2
	25	0	21.95	21.96	22.00		2

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 53 of 119	

Table 9-43
LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.94	23.84	23.70	0	0
	1	7	23.80	23.95	23.80		0
	1	14	23.89	23.84	23.70		0
	8	0	23.87	23.92	23.88	0-1	0
	8	4	23.96	24.00	23.90		0
	8	7	23.82	23.99	23.82		0
	15	0	23.88	23.94	23.87		0
16QAM	1	0	23.96	23.92	23.92	0-1	0
	1	7	23.99	23.90	23.90		0
	1	14	24.00	23.90	23.84		0
	8	0	22.90	22.84	22.95	0-2	1
	8	4	22.94	22.91	22.97		1
	8	7	22.82	22.94	22.78		1
	15	0	23.00	22.90	22.78		1
64QAM	1	0	22.91	22.89	22.72	0-2	1
	1	7	22.84	22.95	22.85		1
	1	14	22.99	22.92	22.69		1
	8	0	21.84	22.00	21.99	0-3	2
	8	4	21.86	22.00	22.00		2
	8	7	21.95	21.94	21.94		2
	15	0	21.96	21.95	21.85		2

Table 9-44
LTE Band 25 (PCS) Reduced Conducted Powers – 1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.99	23.88	23.68	0	0
	1	2	23.89	23.94	23.79		0
	1	5	23.92	23.90	23.85		0
	3	0	23.92	23.91	23.88		0
	3	2	23.94	23.95	23.92		0
	3	3	23.88	23.98	23.87		0
	6	0	23.90	23.95	23.88	0-1	0
16QAM	1	0	23.95	23.99	23.92	0-1	0
	1	2	24.00	23.92	23.94		0
	1	5	24.00	23.94	23.87		0
	3	0	23.95	23.96	23.95		0
	3	2	23.94	23.91	23.96		0
	3	3	23.99	23.94	23.86		0
	6	0	22.92	22.92	22.88	0-2	1
64QAM	1	0	22.94	22.94	22.84	0-2	1
	1	2	22.90	22.96	22.69		1
	1	5	22.92	22.96	22.74		1
	3	0	22.94	23.00	22.85		1
	3	2	22.96	23.00	22.86		1
	3	3	22.95	22.94	22.99		1
	6	0	21.96	22.00	21.87	0-3	2

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 54 of 119	

9.4.7

LTE Band 41

Table 9-45
LTE Band 41 PC3 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.70	24.62	24.65	24.55	24.72	0	0
	1	50	24.75	24.71	24.72	24.74	24.74		0
	1	99	24.65	24.60	24.48	24.52	24.61		0
	50	0	23.80	23.69	23.72	23.67	23.84	0-1	1
	50	25	23.88	23.78	23.77	23.69	23.83		1
	50	50	23.82	23.78	23.69	23.65	23.77		1
	100	0	23.86	23.75	23.72	23.78	23.80		1
16QAM	1	0	23.88	23.71	23.75	23.66	23.81	0-1	1
	1	50	23.89	24.00	23.92	23.88	23.98		1
	1	99	23.73	23.71	23.60	23.67	23.74		1
	50	0	22.90	22.82	22.84	22.83	22.84	0-2	2
	50	25	22.90	22.85	22.83	22.74	22.90		2
	50	50	22.88	22.87	22.80	22.72	22.85		2
	100	0	22.77	22.81	22.80	22.80	22.88		2
64QAM	1	0	22.50	22.31	22.41	22.32	22.41	0-2	2
	1	50	22.65	22.57	22.41	22.52	22.58		2
	1	99	22.30	22.35	22.61	22.21	22.35		2
	50	0	21.88	21.79	21.80	21.78	21.90	0-3	3
	50	25	21.89	21.81	21.83	21.79	21.88		3
	50	50	21.90	21.80	21.74	21.74	21.89		3
	100	0	21.83	21.79	21.79	21.75	21.80		3

Table 9-46
LTE Band 41 PC3 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	24.65	24.62	24.58	24.55	24.59	0	0	
	1	36	24.68	24.71	24.67	24.63	24.63		0-1	0
	1	74	24.51	24.64	24.46	24.48	24.46			0
	36	0	23.70	23.70	23.70	23.68	23.68	1		
	36	18	23.73	23.74	23.63	23.67	23.64	1		
	36	37	23.68	23.82	23.64	23.67	23.64	1		
	75	0	23.66	23.68	23.61	23.65	23.62	1		
16QAM	1	0	23.73	23.67	23.74	23.68	23.66	0-1	1	
	1	36	23.74	23.86	23.72	23.76	23.71		0-2	1
	1	74	23.60	23.80	23.58	23.58	23.58			1
	36	0	22.70	22.73	22.72	22.66	22.71	2		
	36	18	22.74	22.80	22.73	22.65	22.67	2		
	36	37	22.69	22.78	22.64	22.72	22.62	2		
	75	0	22.73	22.76	22.68	22.71	22.62	2		
64QAM	1	0	22.34	22.32	22.37	22.26	22.27	0-2	2	
	1	36	22.40	22.47	22.36	22.35	22.36		0-3	2
	1	74	22.22	22.39	22.16	22.22	22.17			2
	36	0	21.69	21.73	21.64	21.66	21.68	3		
	36	18	21.69	21.79	21.66	21.66	21.68	3		
	36	37	21.62	21.75	21.60	21.62	21.61	3		
	75	0	21.76	21.78	21.68	21.70	21.67	3		

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 55 of 119

Table 9-47
LTE Band 41 PC3 Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.70	24.75	24.70	24.63	24.60	0	0
	1	25	24.50	24.75	24.61	24.56	24.55		0
	1	49	24.67	24.74	24.53	24.58	24.58		0
	25	0	23.74	23.78	23.70	23.80	23.72	0-1	1
	25	12	23.80	23.78	23.68	23.69	23.58		1
	25	25	23.74	23.86	23.68	23.63	23.67		1
16QAM	50	0	23.75	23.83	23.67	23.65	23.70	0-1	1
	1	0	23.80	23.80	23.73	23.68	23.72		1
	1	25	23.67	23.74	23.68	23.67	23.63		1
	1	49	23.70	23.86	23.66	23.68	23.62	0-2	1
	25	0	22.67	22.73	22.63	22.68	22.70		2
	25	12	22.66	22.77	22.63	22.64	22.62		2
64QAM	25	25	22.66	22.79	22.63	22.58	22.55	0-2	2
	50	0	22.77	22.87	22.76	22.76	22.72		2
	1	0	22.40	22.43	22.40	22.33	22.32	0-2	2
	1	25	22.32	22.42	22.28	22.30	22.29		2
	1	49	22.31	22.46	22.21	22.28	22.26	0-3	2
	25	0	21.76	21.80	21.75	21.75	21.82		3
25	12	21.74	21.86	21.75	21.70	21.75	3		
64QAM	25	25	21.74	21.83	21.71	21.72	21.74	0-3	3
	50	0	21.75	21.81	21.75	21.75	21.76		3

Table 9-48
LTE Band 41 PC3 Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.68	24.73	24.74	24.73	24.71	0	0
	1	12	24.70	24.67	24.69	24.71	24.75		0
	1	24	24.75	24.69	24.72	24.72	24.67		0
	12	0	23.86	23.92	23.90	23.86	23.85	0-1	1
	12	6	23.93	24.00	23.89	23.90	23.87		1
	12	13	23.86	24.00	23.86	23.84	23.86		1
	25	0	23.87	23.88	23.82	23.80	23.79		1
16QAM	1	0	23.90	23.90	23.87	23.82	23.78	0-1	1
	1	12	24.00	24.00	23.99	24.00	23.97		1
	1	24	23.84	23.98	23.81	23.89	23.80		1
	12	0	22.89	22.93	22.84	22.85	22.84	0-2	2
	12	6	22.92	23.00	22.93	22.92	22.85		2
	12	13	22.85	22.96	22.86	22.84	22.83		2
	25	0	22.82	22.89	22.78	22.77	22.80		2
64QAM	1	0	22.51	22.53	22.49	22.48	22.43	0-2	2
	1	12	22.66	22.77	22.61	22.65	22.65		2
	1	24	22.45	22.60	22.40	22.47	22.42		2
	12	0	21.90	21.95	21.87	21.85	21.85	0-3	3
	12	6	21.93	21.96	21.92	21.91	21.91		3
	12	13	21.85	21.95	21.86	21.84	21.84		3
	25	0	21.92	21.97	21.88	21.87	21.85		3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 56 of 119	

Table 9-49
LTE Band 41 PC2 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.60	26.31	26.36	26.41	26.39	0	0
	1	50	26.70	26.58	26.51	26.51	26.59		0
	1	99	26.46	26.34	26.21	26.27	26.32		0
	50	0	25.66	25.53	25.54	25.57	25.53	0-1	1
	50	25	25.70	25.64	25.54	25.49	25.54		1
	50	50	25.67	25.59	25.53	25.49	25.49		1
	100	0	25.65	25.59	25.58	25.60	25.56		1
16QAM	1	0	25.62	25.35	25.55	25.45	25.57	0-1	1
	1	50	25.68	25.64	25.70	25.64	25.70		1
	1	99	25.35	25.42	25.44	25.43	25.46		1
	50	0	24.45	24.33	24.48	24.43	24.57	0-2	2
	50	25	24.50	24.40	24.51	24.45	24.54		2
	50	50	24.45	24.44	24.41	24.40	24.48		2
	100	0	24.46	24.39	24.47	24.47	24.53		2
64QAM	1	0	24.39	24.16	24.35	24.23	24.34	0-2	2
	1	50	24.50	24.43	24.51	24.43	24.30		2
	1	99	24.16	24.21	24.23	24.19	24.24		2
	50	0	23.42	23.32	23.49	23.42	23.55	0-3	3
	50	25	23.49	23.42	23.50	23.46	23.54		3
	50	50	23.43	23.41	23.44	23.38	23.46		3
	100	0	23.44	23.37	23.45	23.43	23.52		3

Table 9-50
LTE Band 41 PC2 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.40	26.36	26.38	26.27	26.29	0	0
	1	36	26.42	26.54	26.21	26.38	26.34		0
	1	74	26.27	26.46	26.56	26.27	26.26		0
	36	0	25.50	25.57	25.50	25.48	25.43	0-1	1
	36	18	25.56	25.61	25.47	25.49	25.36		1
	36	37	25.53	25.61	25.47	25.50	25.38		1
	75	0	25.50	25.57	25.47	25.47	25.37		1
16QAM	1	0	25.70	25.70	25.70	25.60	25.57	0-1	1
	1	36	25.70	25.70	25.70	25.68	25.65		1
	1	74	25.68	25.70	25.53	25.60	25.50		1
	36	0	24.52	24.53	24.46	24.47	24.48	0-2	2
	36	18	24.54	24.62	24.50	24.47	24.50		2
	36	37	24.51	24.63	24.45	24.47	24.42		2
	75	0	24.52	24.60	24.49	24.49	24.44		2
64QAM	1	0	24.45	24.40	24.44	24.32	24.32	0-2	2
	1	36	24.49	24.60	24.47	24.42	24.40		2
	1	74	24.64	24.50	24.28	24.32	24.27		2
	36	0	23.50	23.55	23.50	23.46	23.47	0-3	3
	36	18	23.54	23.65	23.50	23.45	23.47		3
	36	37	23.49	23.65	23.45	23.48	23.41		3
	75	0	23.52	23.59	23.50	23.49	23.47		3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 57 of 119

Table 9-51
LTE Band 41 PC2 Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.45	26.47	26.40	26.36	26.38	0	0
	1	25	26.46	26.66	26.47	26.47	26.47		0
	1	49	26.35	26.53	26.30	26.33	26.33		0
	25	0	25.50	25.61	25.52	25.50	25.44	0-1	1
	25	12	25.48	25.65	25.50	25.50	25.38		1
	25	25	25.54	25.70	25.50	25.47	25.41		1
	50	0	25.56	25.67	25.45	25.54	25.42		1
16QAM	1	0	25.68	25.70	25.70	25.66	25.64	0-1	1
	1	25	25.70	25.70	25.70	25.70	25.70		1
	1	49	25.67	25.70	25.60	25.65	25.57		1
	25	0	24.52	24.58	24.50	24.48	24.50	0-2	2
	25	12	24.54	24.61	24.48	24.46	24.48		2
	25	25	24.51	24.64	24.52	24.45	24.43		2
64QAM	50	0	24.62	24.68	24.58	24.56	24.54	0-2	2
	1	0	24.52	24.55	24.51	24.41	24.44		2
	1	25	24.60	24.70	24.52	24.51	24.52	0-3	2
	1	49	24.44	24.59	24.30	24.39	24.40		2
	25	0	23.66	23.70	23.67	23.61	23.64		3
	25	12	23.68	23.63	23.62	23.61	23.62		3
	25	25	23.66	23.66	23.62	23.58	23.56		3
50	0	23.62	23.70	23.58	23.59	23.56	3		

Table 9-52
LTE Band 41 PC2 Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.40	26.47	26.34	26.32	26.29	0	0
	1	12	26.48	26.59	26.38	26.43	26.40		0
	1	24	26.34	26.47	26.28	26.35	26.27		0
	12	0	25.53	25.59	25.47	25.47	25.38	0-1	1
	12	6	25.57	25.64	25.50	25.51	25.40		1
	12	13	25.54	25.65	25.46	25.46	25.31		1
16QAM	25	0	25.53	25.59	25.46	25.46	25.38	0-1	1
	1	0	25.70	25.68	25.68	25.63	25.56		1
	1	12	25.70	25.70	25.70	25.67	25.67		1
	1	24	25.69	25.70	25.63	25.63	25.55	0-2	1
	12	0	24.57	24.64	24.51	24.50	24.51		2
	12	6	24.61	24.67	24.52	24.55	24.53		2
64QAM	12	13	24.57	24.69	24.50	24.50	24.49	0-2	2
	25	0	24.50	24.59	24.43	24.43	24.42		2
	1	0	24.44	24.51	24.41	24.38	24.38	0-2	2
	1	12	24.53	24.62	24.45	24.46	24.45		2
	1	24	24.42	24.54	24.36	24.38	24.35	0-3	2
	12	0	23.60	23.64	23.52	23.52	23.45		3
12	6	23.67	23.70	23.56	23.58	23.56	3		
64QAM	12	13	23.59	23.69	23.54	23.53	23.52	0-3	3
	25	0	23.63	23.68	23.57	23.56	23.56		3

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 58 of 119	

9.4.8 LTE Uplink Carrier Aggregation Conducted Powers

Table 9-53
LTE Uplink Carrier Aggregation Conducted Powers

PCC								SCC							Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	39750	2506.0	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	24.80	24.65
PCC								SCC							Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41 PC2	20	39750	2506.0	QPSK	1	99	LTE B41 PC2	20	39948	2525.8	QPSK	1	0	26.39	26.46

Notes:

1. This device supports uplink carrier aggregation for LTE CA_41C with a maximum of two 20 MHz component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.



Figure 9-4
Power Measurement Setup

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 59 of 119

9.5 WLAN Conducted Powers

Table 9-54
2.4 GHz WLAN Maximum Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	21.44	17.56	16.51
2437	6	21.46	20.40	19.33
2462	11	21.62	17.75	16.66

Table 9-55
5 GHz WLAN Maximum Average RF Power

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
		Average	Average	Average
5180	36	17.33	16.84	16.41
5200	40	19.24	18.28	18.54
5220	44	19.54	18.46	18.21
5240	48	19.51	18.42	18.37
5260	52	19.36	18.39	18.35
5280	56	19.34	18.27	18.21
5300	60	19.31	18.25	18.18
5320	64	17.48	16.41	16.46
5500	100	17.54	16.87	16.85
5520	104	19.76	18.82	18.72
5600	120	19.74	18.56	18.44
5620	124	19.59	18.45	18.60
5720	144	19.70	18.38	18.14
5745	149	19.26	18.22	18.25
5785	157	19.33	18.35	18.46
5805	161	19.26	18.39	18.02
5825	165	17.61	16.90	16.91

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 60 of 119

Table 9-56
2.4 GHz WLAN Reduced Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	18.72	17.56	16.51
2437	6	18.64	18.53	18.48
2462	11	18.84	17.75	16.66

Table 9-57
5 GHz WLAN Reduced Average RF Power

5GHz (40MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11n	802.11ac
		Average	Average
5190	38	15.22	15.83
5230	46	15.04	15.07
5270	54	15.12	15.26
5310	62	15.46	15.47
5510	102	15.49	15.56
5590	118	15.43	15.37
5630	126	15.56	15.58
5710	142	15.47	15.32
5755	151	15.34	15.35
5795	159	15.56	15.43

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.

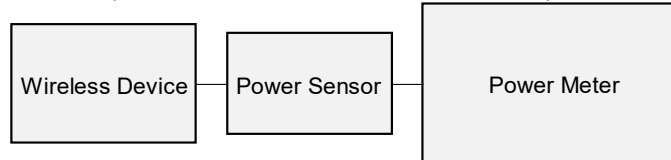


Figure 9-5
Power Measurement Setup

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 61 of 119	

9.6 Bluetooth Conducted Powers

Table 9-58
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	7.28	5.341
2441	1.0	39	9.40	8.718
2480	1.0	78	8.52	7.109
2402	2.0	0	5.23	3.332
2441	2.0	39	6.95	4.952
2480	2.0	78	5.79	3.796
2402	3.0	0	5.34	3.417
2441	3.0	39	7.05	5.067
2480	3.0	78	5.85	3.850

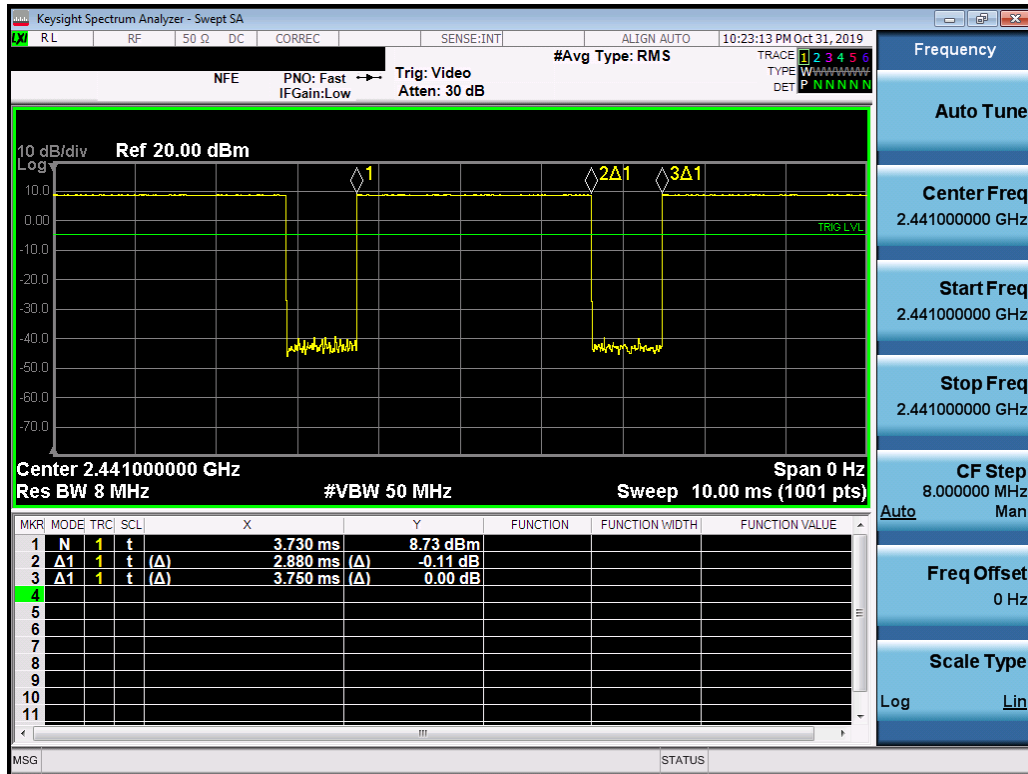


Figure 9-6
Bluetooth Transmission Plot

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 62 of 119

Equation 9-1
Bluetooth Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.88\ ms}{3.75\ ms} * 100\% = 76.8\%$$

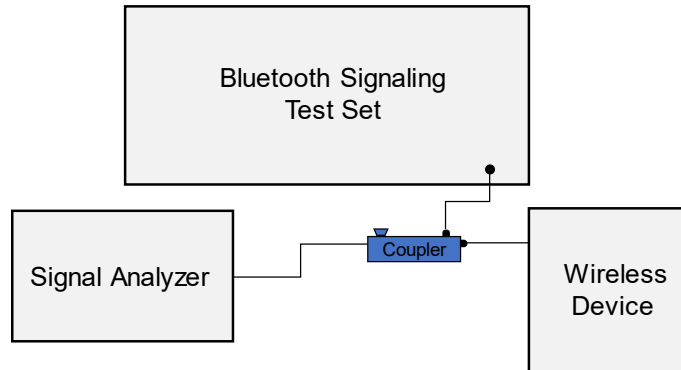


Figure 9-7
Power Measurement Setup

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 63 of 119

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Tissue Properties - Head

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
11/05/2019	750H	19.9	680	0.870	42.593	0.888	42.305	-2.03%	0.68%
			695	0.875	42.594	0.889	42.227	-1.87%	0.77%
			700	0.877	42.541	0.889	42.201	-1.35%	0.81%
			710	0.880	42.512	0.890	42.149	-1.12%	0.86%
			740	0.891	42.430	0.893	41.994	-0.22%	1.04%
			755	0.896	42.386	0.894	41.916	0.22%	1.12%
			770	0.902	42.347	0.895	41.838	0.76%	1.22%
			785	0.908	42.306	0.896	41.760	1.34%	1.31%
11/04/2019	835H	20.8	820	0.890	41.039	0.899	41.578	-1.00%	-1.30%
			835	0.896	41.002	0.900	41.500	-0.44%	-1.20%
			850	0.901	40.957	0.916	41.500	-1.64%	-1.31%
11/04/2019	1750H	21.9	1710	1.355	41.650	1.348	40.142	0.52%	3.76%
			1720	1.367	41.615	1.354	40.126	0.96%	3.71%
			1745	1.396	41.499	1.368	40.087	2.05%	3.52%
			1750	1.401	41.488	1.371	40.079	2.19%	3.52%
			1770	1.420	41.390	1.383	40.047	2.68%	3.35%
			1790	1.441	41.297	1.394	40.016	3.37%	3.20%
11/13/2019	1900H	20.6	1850	1.410	40.374	1.400	40.000	0.71%	0.94%
			1860	1.416	40.353	1.400	40.000	1.14%	0.88%
			1880	1.428	40.323	1.400	40.000	2.00%	0.81%
			1900	1.441	40.308	1.400	40.000	2.93%	0.77%
			1905	1.444	40.305	1.400	40.000	3.14%	0.76%
			1910	1.447	40.303	1.400	40.000	3.36%	0.76%
			1850	1.418	39.757	1.400	40.000	1.29%	-0.61%
			1860	1.423	39.743	1.400	40.000	1.64%	-0.64%
11/19/2019	1900H	21.5	1880	1.435	39.726	1.400	40.000	2.50%	-0.69%
			1900	1.446	39.709	1.400	40.000	3.29%	-0.73%
			1905	1.448	39.706	1.400	40.000	3.43%	-0.73%
			1910	1.451	39.701	1.400	40.000	3.64%	-0.75%
11/04/2019	2450H	20.7	2400	1.776	37.556	1.756	39.289	1.14%	-4.41%
			2450	1.816	37.492	1.800	39.200	0.89%	-4.36%
			2500	1.851	37.398	1.855	39.136	-0.22%	-4.44%
			2510	1.860	37.373	1.866	39.123	-0.32%	-4.47%
			2535	1.883	37.325	1.893	39.092	-0.53%	-4.52%
			2550	1.894	37.311	1.909	39.073	-0.79%	-4.51%
			2560	1.902	37.305	1.920	39.060	-0.94%	-4.49%
			2600	1.930	37.241	1.964	39.009	-1.73%	-4.53%
			2650	1.973	37.115	2.018	38.945	-2.23%	-4.70%
			2680	1.997	37.090	2.051	38.907	-2.63%	-4.67%
			2700	2.011	37.064	2.073	38.882	-2.99%	-4.68%
			2400	1.824	39.072	1.756	39.289	3.87%	-0.55%
11/11/2019	2450H	19.2	2450	1.866	38.982	1.800	39.200	3.67%	-0.56%
			2500	1.905	38.887	1.855	39.136	2.70%	-0.64%
			2400	1.812	38.555	1.756	39.289	3.19%	-1.87%
11/14/2019	2450H	20.3	2450	1.852	38.489	1.800	39.200	2.89%	-1.81%
			2500	1.891	38.407	1.855	39.136	1.94%	-1.86%
			5180	4.516	36.300	4.635	36.009	-2.57%	0.81%
11/19/2019	5250 -5750H	20.3	5190	4.527	36.284	4.645	35.998	-2.54%	0.79%
			5200	4.538	36.267	4.655	35.986	-2.51%	0.78%
			5210	4.545	36.252	4.666	35.975	-2.59%	0.77%
			5220	4.554	36.235	4.676	35.963	-2.61%	0.76%
			5240	4.582	36.185	4.698	35.940	-2.43%	0.68%
			5250	4.595	36.153	4.708	35.929	-2.36%	0.62%
			5260	4.605	36.131	4.717	35.917	-2.37%	0.60%
			5270	4.617	36.121	4.727	35.906	-2.33%	0.60%
			5280	4.629	36.112	4.737	35.894	-2.28%	0.61%
			5290	4.641	36.094	4.748	35.883	-2.25%	0.59%
			5300	4.652	36.070	4.758	35.871	-2.23%	0.55%
			5310	4.664	36.057	4.768	35.860	-2.18%	0.55%
			5320	4.676	36.049	4.778	35.849	-2.13%	0.56%
			5500	4.875	35.728	4.963	35.643	-1.77%	0.24%
			5510	4.885	35.716	4.973	35.632	-1.77%	0.24%
			5520	4.899	35.703	4.983	35.620	-1.69%	0.23%
			5530	4.913	35.685	4.994	35.609	-1.62%	0.21%
			5540	4.925	35.663	5.004	35.597	-1.58%	0.19%
			5550	4.935	35.651	5.014	35.586	-1.58%	0.18%
			5560	4.947	35.636	5.024	35.574	-1.53%	0.17%
			5580	4.974	35.584	5.045	35.551	-1.41%	0.09%
			5600	4.997	35.554	5.065	35.529	-1.34%	0.07%
			5610	5.008	35.545	5.076	35.518	-1.34%	0.08%
			5620	5.021	35.532	5.086	35.506	-1.28%	0.07%
			5640	5.047	35.492	5.106	35.483	-1.16%	0.03%
			5660	5.069	35.461	5.127	35.460	-1.13%	0.00%
			5670	5.083	35.443	5.137	35.449	-1.05%	-0.02%
			5680	5.099	35.422	5.147	35.437	-0.93%	-0.04%
			5690	5.113	35.398	5.158	35.426	-0.87%	-0.08%
			5700	5.124	35.377	5.168	35.414	-0.85%	-0.10%
			5710	5.134	35.361	5.178	35.403	-0.85%	-0.12%
			5720	5.145	35.340	5.188	35.391	-0.83%	-0.14%
			5745	5.169	35.306	5.214	35.363	-0.86%	-0.16%
			5750	5.174	35.298	5.219	35.357	-0.86%	-0.17%
			5755	5.181	35.292	5.224	35.351	-0.82%	-0.17%
			5765	5.196	35.279	5.234	35.340	-0.73%	-0.17%
			5775	5.212	35.259	5.245	35.329	-0.63%	-0.20%
			5785	5.224	35.233	5.255	35.317	-0.59%	-0.24%
			5785	5.234	35.209	5.265	35.305	-0.59%	-0.27%
			5800	5.240	35.201	5.270	35.300	-0.57%	-0.28%
			5805	5.246	35.191	5.275	35.294	-0.55%	-0.29%
			5825	5.272	35.150	5.296	35.271	-0.45%	-0.34%

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 64 of 119

Table 10-2
Measured Tissue Properties – Body-1

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
11/04/2019	750B	19.0	680	0.911	58.384	0.958	55.804	-4.91%	4.62%
			695	0.924	58.244	0.959	55.745	-3.65%	4.48%
			700	0.929	58.197	0.959	55.726	-3.13%	4.43%
			710	0.939	58.107	0.960	55.687	-2.19%	4.35%
			740	0.967	57.841	0.963	55.570	0.42%	4.09%
			755	0.980	57.701	0.964	55.512	1.66%	3.94%
			770	0.994	57.559	0.965	55.453	3.01%	3.80%
11/06/2019	835B	20.1	785	1.008	57.416	0.966	55.395	4.35%	3.65%
			820	0.942	54.683	0.969	55.258	-2.79%	-1.04%
			835	0.958	54.531	0.970	55.200	-1.24%	-1.21%
11/04/2019	1750B	20.6	850	0.974	54.381	0.988	55.154	-1.42%	-1.40%
			1710	1.439	52.375	1.463	53.537	-1.64%	-2.17%
			1720	1.451	52.339	1.469	53.511	-1.23%	-2.19%
			1745	1.479	52.249	1.485	53.445	-0.40%	-2.24%
			1750	1.484	52.230	1.488	53.432	-0.27%	-2.25%
			1770	1.506	52.148	1.501	53.379	0.33%	-2.31%
			1790	1.528	52.065	1.514	53.326	0.92%	-2.36%
11/06/2019	1750B	21.8	1710	1.437	52.404	1.463	53.537	-1.78%	-2.12%
			1750	1.484	52.283	1.488	53.432	-0.27%	-2.15%
			1790	1.528	52.139	1.514	53.326	0.92%	-2.23%
11/04/2019	1900B	24.1	1850	1.500	52.377	1.520	53.300	-1.32%	-1.73%
			1860	1.510	52.344	1.520	53.300	-0.66%	-1.79%
			1880	1.533	52.283	1.520	53.300	0.86%	-1.91%
			1900	1.556	52.221	1.520	53.300	2.37%	-2.02%
			1905	1.562	52.205	1.520	53.300	2.76%	-2.05%
			1910	1.567	52.189	1.520	53.300	3.09%	-2.08%
11/06/2019	1900B	24.2	1850	1.513	51.350	1.520	53.300	-0.46%	-3.66%
			1860	1.524	51.313	1.520	53.300	0.26%	-3.73%
			1880	1.546	51.245	1.520	53.300	1.71%	-3.86%
			1900	1.569	51.174	1.520	53.300	3.22%	-3.99%
			1905	1.575	51.157	1.520	53.300	3.62%	-4.02%
			1910	1.580	51.136	1.520	53.300	3.95%	-4.06%
11/11/2019	1900B	23.7	1850	1.511	51.927	1.520	53.300	-0.59%	-2.58%
			1860	1.522	51.895	1.520	53.300	0.13%	-2.64%
			1880	1.543	51.835	1.520	53.300	1.51%	-2.75%
			1900	1.565	51.780	1.520	53.300	2.96%	-2.85%
			1905	1.570	51.764	1.520	53.300	3.29%	-2.88%
11/18/2019	1900B	22.9	1910	1.576	51.746	1.520	53.300	3.68%	-2.92%
			1850	1.508	51.200	1.520	53.300	-0.79%	-3.94%
			1860	1.519	51.172	1.520	53.300	-0.07%	-3.99%
			1880	1.542	51.116	1.520	53.300	1.45%	-4.10%
			1900	1.564	51.052	1.520	53.300	2.89%	-4.22%
11/07/2019	2450B	23.7	1905	1.570	51.033	1.520	53.300	3.29%	-4.25%
			1910	1.575	51.014	1.520	53.300	3.62%	-4.29%
			2400	1.964	51.799	1.902	52.767	3.26%	-1.83%
			2450	2.023	51.662	1.950	52.700	3.74%	-1.97%
			2500	2.081	51.510	2.021	52.636	2.97%	-2.14%
11/11/2019	2450B	23.2	2400	1.985	51.609	1.902	52.767	4.36%	-2.19%
			2450	2.046	51.458	1.950	52.700	4.92%	-2.36%
			2500	2.104	51.297	2.021	52.636	4.11%	-2.54%
			2510	2.115	51.264	2.035	52.623	3.93%	-2.58%
			2535	2.146	51.187	2.071	52.592	3.62%	-2.67%
			2550	2.165	51.145	2.092	52.573	3.49%	-2.72%
			2560	2.177	51.119	2.106	52.560	3.37%	-2.74%
			2600	2.223	50.998	2.163	52.509	2.77%	-2.88%
			2650	2.283	50.844	2.234	52.445	2.19%	-3.05%
			2680	2.320	50.756	2.277	52.407	1.89%	-3.15%
			2700	2.344	50.699	2.305	52.382	1.69%	-3.21%
11/18/2019	2450B	22.0	2400	1.963	52.505	1.902	52.767	3.21%	-0.50%
			2450	2.006	52.405	1.950	52.700	2.87%	-0.56%
			2500	2.051	52.344	2.021	52.636	1.48%	-0.55%
			2550	2.095	52.267	2.092	52.573	0.14%	-0.58%

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 65 of 119	

Table 10-3
Measured Tissue Properties – Body-2

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
11/12/2019	5250 -5750B	22.7	5180	5.184	48.069	5.276	49.041	-1.74%	-1.98%
			5190	5.203	48.063	5.288	49.028	-1.61%	-1.97%
			5200	5.220	48.070	5.299	49.014	-1.49%	-1.93%
			5210	5.237	48.081	5.311	49.001	-1.39%	-1.88%
			5220	5.254	48.094	5.323	48.987	-1.30%	-1.82%
			5240	5.280	48.054	5.346	48.960	-1.23%	-1.85%
			5250	5.281	48.029	5.358	48.947	-1.44%	-1.88%
			5260	5.281	48.005	5.369	48.933	-1.64%	-1.90%
			5270	5.287	47.974	5.381	48.919	-1.75%	-1.93%
			5280	5.296	47.937	5.393	48.906	-1.80%	-1.98%
			5290	5.310	47.902	5.404	48.892	-1.74%	-2.02%
			5300	5.327	47.897	5.416	48.879	-1.64%	-2.01%
			5310	5.349	47.904	5.428	48.865	-1.46%	-1.97%
			5320	5.376	47.912	5.439	48.851	-1.16%	-1.92%
			5500	5.585	47.675	5.650	48.607	-1.15%	-1.92%
			5510	5.590	47.650	5.661	48.594	-1.25%	-1.94%
			5520	5.604	47.624	5.673	48.580	-1.22%	-1.97%
			5530	5.621	47.597	5.685	48.566	-1.13%	-2.00%
			5540	5.637	47.583	5.696	48.553	-1.04%	-2.00%
			5550	5.656	47.578	5.708	48.539	-0.91%	-1.98%
			5560	5.681	47.569	5.720	48.526	-0.68%	-1.97%
			5580	5.721	47.546	5.743	48.499	-0.38%	-1.96%
			5600	5.741	47.578	5.766	48.471	-0.43%	-1.84%
			5610	5.752	47.572	5.778	48.458	-0.45%	-1.83%
			5620	5.757	47.539	5.790	48.444	-0.57%	-1.87%
			5640	5.767	47.468	5.813	48.417	-0.79%	-1.96%
			5660	5.802	47.409	5.837	48.390	-0.60%	-2.03%
			5670	5.821	47.376	5.848	48.376	-0.46%	-2.07%
			5680	5.842	47.362	5.860	48.363	-0.31%	-2.07%
			5690	5.867	47.376	5.872	48.349	-0.09%	-2.01%
			5700	5.892	47.388	5.883	48.336	0.15%	-1.96%
			5710	5.906	47.391	5.895	48.322	0.19%	-1.93%
			5720	5.912	47.386	5.907	48.309	0.08%	-1.91%
			5745	5.920	47.334	5.936	48.275	-0.27%	-1.95%
			5750	5.923	47.313	5.942	48.268	-0.32%	-1.98%
			5755	5.926	47.292	5.947	48.261	-0.35%	-2.01%
			5765	5.933	47.249	5.959	48.248	-0.44%	-2.07%
			5775	5.944	47.215	5.971	48.234	-0.45%	-2.11%
			5785	5.962	47.191	5.982	48.220	-0.33%	-2.13%
			5795	5.987	47.175	5.994	48.207	-0.12%	-2.14%
			5800	6.002	47.166	6.000	48.200	0.03%	-2.15%
			5805	6.015	47.163	6.006	48.193	0.15%	-2.14%
			5825	6.058	47.184	6.029	48.166	0.48%	-2.04%
11/19/2019	5250 -5750B	20.9	5180	5.422	49.184	5.276	49.041	2.77%	0.29%
			5190	5.434	49.176	5.288	49.028	2.76%	0.30%
			5200	5.444	49.162	5.299	49.014	2.74%	0.30%
			5210	5.453	49.148	5.311	49.001	2.67%	0.30%
			5220	5.465	49.129	5.323	48.987	2.67%	0.29%
			5240	5.502	49.072	5.346	48.960	2.92%	0.23%
			5250	5.516	49.045	5.358	48.947	2.95%	0.20%
			5260	5.528	49.025	5.369	48.933	2.96%	0.19%
			5270	5.543	49.013	5.381	48.919	3.01%	0.19%
			5280	5.561	48.993	5.393	48.906	3.12%	0.18%
			5290	5.576	48.976	5.404	48.892	3.18%	0.17%
			5300	5.588	48.976	5.416	48.879	3.18%	0.20%
			5310	5.597	48.965	5.428	48.865	3.11%	0.20%
			5320	5.605	48.946	5.439	48.851	3.05%	0.19%
			5500	5.857	48.622	5.650	48.607	3.66%	0.03%
			5510	5.871	48.609	5.661	48.594	3.71%	0.03%
			5520	5.885	48.604	5.673	48.580	3.74%	0.05%
			5530	5.895	48.594	5.685	48.566	3.69%	0.06%
			5540	5.905	48.581	5.696	48.553	3.67%	0.06%
			5550	5.917	48.571	5.708	48.539	3.66%	0.07%
			5560	5.932	48.552	5.720	48.526	3.71%	0.05%
			5580	5.962	48.516	5.743	48.499	3.81%	0.04%
			5600	5.996	48.481	5.766	48.471	3.99%	0.02%
			5610	6.012	48.456	5.778	48.458	4.05%	0.00%
			5620	6.024	48.439	5.790	48.444	4.04%	-0.01%
			5640	6.051	48.404	5.813	48.417	4.09%	-0.03%
			5660	6.080	48.365	5.837	48.390	4.16%	-0.05%
			5670	6.091	48.347	5.848	48.376	4.16%	-0.06%
			5680	6.105	48.325	5.860	48.363	4.18%	-0.07%
			5690	6.118	48.309	5.872	48.349	4.19%	-0.08%
			5700	6.136	48.297	5.883	48.336	4.30%	-0.08%
			5710	6.155	48.277	5.895	48.322	4.41%	-0.09%
			5720	6.170	48.268	5.907	48.309	4.45%	-0.08%
			5745	6.202	48.242	5.936	48.275	4.48%	-0.07%
			5750	6.209	48.231	5.942	48.268	4.49%	-0.08%
			5755	6.217	48.222	5.947	48.261	4.54%	-0.08%
			5765	6.234	48.205	5.959	48.248	4.61%	-0.09%
			5775	6.248	48.197	5.971	48.234	4.64%	-0.08%
			5785	6.264	48.174	5.982	48.220	4.71%	-0.10%
			5795	6.278	48.150	5.994	48.207	4.74%	-0.12%
			5800	6.284	48.142	6.000	48.200	4.73%	-0.12%
			5805	6.291	48.136	6.006	48.193	4.75%	-0.12%
			5825	6.318	48.108	6.029	48.166	4.79%	-0.12%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 66 of 119	

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix D.

Table 10-4
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
P	750	HEAD	11/05/2019	19.9	19.8	0.200	1054	7551	1.670	8.290	8.350	0.72%
P	835	HEAD	11/04/2019	21.4	18.9	0.200	4d047	7551	1.950	9.420	9.750	3.50%
D	1750	HEAD	11/04/2019	22.0	21.3	0.100	1008	3914	3.900	36.200	39.000	7.73%
P	1900	HEAD	11/13/2019	22.0	20.6	0.100	5d148	7551	4.170	39.100	41.700	6.65%
P	1900	HEAD	11/18/2019	22.8	21.5	0.100	5d080	7551	4.250	39.800	42.500	6.78%
E	2450	HEAD	11/04/2019	22.3	20.7	0.100	797	7417	5.120	52.700	51.200	-2.85%
E	2450	HEAD	11/11/2019	21.3	19.2	0.100	981	7417	5.290	52.300	52.900	1.15%
E	2450	HEAD	11/14/2019	23.6	20.3	0.100	981	7417	5.360	52.300	53.600	2.49%
E	2600	HEAD	11/04/2019	22.3	20.7	0.100	1004	7417	5.870	55.900	58.700	5.01%
H	5250	HEAD	11/18/2019	20.4	20.3	0.050	1191	7406	3.750	80.800	75.000	-7.18%
H	5600	HEAD	11/18/2019	20.4	20.3	0.050	1191	7406	3.910	82.700	78.200	-5.44%
H	5750	HEAD	11/18/2019	20.4	20.3	0.050	1191	7406	3.790	80.200	75.800	-5.49%
L	750	BODY	11/04/2019	18.0	19.5	0.200	1161	7410	1.720	8.430	8.600	2.02%
I	835	BODY	11/06/2019	23.7	20.1	0.200	4d133	7357	2.080	9.750	10.400	6.67%
G	1750	BODY	11/04/2019	21.8	20.9	0.100	1148	7409	3.820	37.700	38.200	1.33%
J	1900	BODY	11/04/2019	22.3	22.2	0.100	5d148	7488	4.190	39.100	41.900	7.16%
J	1900	BODY	11/06/2019	22.7	22.4	0.100	5d148	7488	4.130	39.100	41.300	5.63%
D	1900	BODY	11/18/2019	22.4	21.3	0.100	5d149	3914	4.240	39.400	42.400	7.61%
K	2450	BODY	11/07/2019	22.9	21.9	0.100	797	7547	4.870	51.100	48.700	-4.70%
K	2450	BODY	11/11/2019	22.9	22.3	0.100	797	7547	5.120	51.100	51.200	0.20%
L	2450	BODY	11/18/2019	23.0	21.0	0.100	719	7410	5.410	50.800	54.100	6.50%
K	2600	BODY	11/11/2019	22.9	22.3	0.100	1004	7547	5.230	54.800	52.300	-4.56%
G	5250	BODY	11/12/2019	22.7	21.9	0.050	1237	7409	3.520	75.600	70.400	-6.88%
G	5600	BODY	11/12/2019	22.7	21.9	0.050	1237	7409	3.680	78.500	73.600	-6.24%
G	5750	BODY	11/12/2019	22.7	21.9	0.050	1237	7409	3.560	75.900	71.200	-6.19%
G	5250	BODY	11/19/2019	23.0	22.7	0.050	1237	7409	3.570	75.600	71.400	-5.56%
G	5600	BODY	11/19/2019	23.0	22.7	0.050	1237	7409	3.900	78.500	78.000	-0.64%
G	5750	BODY	11/19/2019	23.0	22.7	0.050	1237	7409	3.710	75.900	74.200	-2.24%

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 67 of 119

Table 10-5
System Verification Results – 10g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
G	1750	BODY	11/06/2019	22.3	20.8	0.100	1148	7409	2.100	19.800	21.000	6.06%
J	1900	BODY	11/11/2019	21.5	22.3	0.100	5d080	7488	2.100	20.600	21.000	1.94%
G	5250	BODY	11/12/2019	22.7	21.9	0.050	1237	7409	0.985	21.200	19.700	-7.08%
G	5600	BODY	11/12/2019	22.7	21.9	0.050	1237	7409	1.030	22.000	20.600	-6.36%
G	5750	BODY	11/12/2019	22.7	21.9	0.050	1237	7409	0.981	21.200	19.620	-7.45%

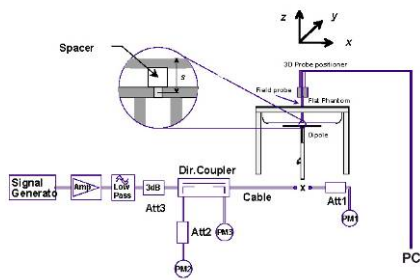


Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: ZNFL555DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 68 of 119	

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

Table 11-1
GSM 850 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	34.0	33.91	0.02	Right	Cheek	20179	1	1:8.3	0.323	1.021	0.330	
836.60	190	GSM 850	GSM	34.0	33.91	0.09	Right	Tilt	20179	1	1:8.3	0.152	1.021	0.155	
836.60	190	GSM 850	GSM	34.0	33.91	-0.13	Left	Cheek	20179	1	1:8.3	0.231	1.021	0.236	
836.60	190	GSM 850	GSM	34.0	33.91	0.01	Left	Tilt	20179	1	1:8.3	0.167	1.021	0.171	
836.60	190	GSM 850	GPRS	30.7	30.58	0.02	Right	Cheek	20179	3	1:2.76	0.412	1.028	0.424	A1
836.60	190	GSM 850	GPRS	30.7	30.58	0.00	Right	Tilt	20179	3	1:2.76	0.190	1.028	0.195	
836.60	190	GSM 850	GPRS	30.7	30.58	-0.08	Left	Cheek	20179	3	1:2.76	0.305	1.028	0.314	
836.60	190	GSM 850	GPRS	30.7	30.58	-0.01	Left	Tilt	20179	3	1:2.76	0.227	1.028	0.233	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-2
GSM 1900 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	31.0	30.99	0.01	Right	Cheek	20187	1	1:8.3	0.140	1.002	0.140	
1880.00	661	GSM 1900	GSM	31.0	30.99	0.03	Right	Tilt	20187	1	1:8.3	0.125	1.002	0.125	
1880.00	661	GSM 1900	GSM	31.0	30.99	-0.11	Left	Cheek	20187	1	1:8.3	0.214	1.002	0.214	
1880.00	661	GSM 1900	GSM	31.0	30.99	-0.18	Left	Tilt	20187	1	1:8.3	0.110	1.002	0.110	
1880.00	661	GSM 1900	GPRS	27.7	27.68	-0.01	Right	Cheek	20187	3	1:2.76	0.146	1.005	0.147	
1880.00	661	GSM 1900	GPRS	27.7	27.68	0.00	Right	Tilt	20187	3	1:2.76	0.131	1.005	0.132	
1880.00	661	GSM 1900	GPRS	27.7	27.68	-0.07	Left	Cheek	20187	3	1:2.76	0.262	1.005	0.263	A2
1880.00	661	GSM 1900	GPRS	27.7	27.68	-0.02	Left	Tilt	20187	3	1:2.76	0.124	1.005	0.125	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 69 of 119

Table 11-3
UMTS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.2	25.09	-0.01	Right	Cheek	20187	1:1	0.287	1.026	0.294	A3
836.60	4183	UMTS 850	RMC	25.2	25.09	0.05	Right	Tilt	20187	1:1	0.116	1.026	0.119	
836.60	4183	UMTS 850	RMC	25.2	25.09	0.07	Left	Cheek	20187	1:1	0.239	1.026	0.245	
836.60	4183	UMTS 850	RMC	25.2	25.09	-0.04	Left	Tilt	20187	1:1	0.125	1.026	0.128	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-4
UMTS 1750 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	25.0	24.91	0.04	Right	Cheek	20187	1:1	0.176	1.021	0.180	
1732.40	1412	UMTS 1750	RMC	25.0	24.91	-0.01	Right	Tilt	20187	1:1	0.170	1.021	0.174	
1732.40	1412	UMTS 1750	RMC	25.0	24.91	0.15	Left	Cheek	20187	1:1	0.328	1.021	0.335	A4
1732.40	1412	UMTS 1750	RMC	25.0	24.91	0.07	Left	Tilt	20187	1:1	0.194	1.021	0.198	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-5
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	25.0	24.98	-0.06	Right	Cheek	20187	1:1	0.312	1.005	0.314	
1880.00	9400	UMTS 1900	RMC	25.0	24.98	0.19	Right	Tilt	20187	1:1	0.196	1.005	0.197	
1880.00	9400	UMTS 1900	RMC	25.0	24.98	0.00	Left	Cheek	20187	1:1	0.524	1.005	0.527	A5
1880.00	9400	UMTS 1900	RMC	25.0	24.98	0.14	Left	Tilt	20187	1:1	0.213	1.005	0.214	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 70 of 119	

Table 11-6
CDMA BC10 (§90S) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.2	24.77	0.03	Right	Cheek	20179	1:1	0.323	1.104	0.357	A6
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.2	24.77	0.14	Right	Tilt	20179	1:1	0.131	1.104	0.145	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.2	24.77	-0.02	Left	Cheek	20179	1:1	0.247	1.104	0.273	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.2	24.77	-0.17	Left	Tilt	20179	1:1	0.140	1.104	0.155	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.2	24.21	0.07	Right	Cheek	20179	1:1	0.215	1.256	0.270	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.2	24.21	0.07	Right	Tilt	20179	1:1	0.094	1.256	0.118	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.2	24.21	-0.07	Left	Cheek	20179	1:1	0.170	1.256	0.214	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.2	24.21	0.13	Left	Tilt	20179	1:1	0.097	1.256	0.122	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-7
CDMA BC0 (§22H) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.2	24.73	0.03	Right	Cheek	20179	1:1	0.438	1.114	0.488	A7
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.2	24.73	0.04	Right	Tilt	20179	1:1	0.230	1.114	0.256	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.2	24.73	0.04	Left	Cheek	20179	1:1	0.325	1.114	0.362	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.2	24.73	0.13	Left	Tilt	20179	1:1	0.157	1.114	0.175	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.2	24.43	-0.13	Right	Cheek	20179	1:1	0.336	1.194	0.401	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.2	24.43	0.00	Right	Tilt	20179	1:1	0.143	1.194	0.171	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.2	24.43	0.12	Left	Cheek	20179	1:1	0.235	1.194	0.281	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.2	24.43	-0.08	Left	Tilt	20179	1:1	0.118	1.194	0.141	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 71 of 119	

Table 11-8
PCS CDMA Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	25.0	24.59	0.10	Right	Cheek	20187	1:1	0.307	1.099	0.337	
1880.00	600	PCS CDMA	RC3 / SO55	25.0	24.59	-0.06	Right	Tilt	20187	1:1	0.211	1.099	0.232	
1851.25	25	PCS CDMA	RC3 / SO55	25.0	24.51	0.08	Left	Cheek	20187	1:1	0.590	1.119	0.660	A8
1880.00	600	PCS CDMA	RC3 / SO55	25.0	24.59	0.06	Left	Cheek	20187	1:1	0.562	1.099	0.618	
1908.75	1175	PCS CDMA	RC3 / SO55	25.0	24.74	0.02	Left	Cheek	20187	1:1	0.581	1.062	0.617	
1880.00	600	PCS CDMA	RC3 / SO55	25.0	24.59	0.13	Left	Tilt	20187	1:1	0.246	1.099	0.270	
1880.00	600	PCS CDMA	EVDO Rev. A	25.0	24.76	-0.03	Right	Cheek	20187	1:1	0.350	1.057	0.370	
1880.00	600	PCS CDMA	EVDO Rev. A	25.0	24.76	0.12	Right	Tilt	20187	1:1	0.203	1.057	0.215	
1880.00	600	PCS CDMA	EVDO Rev. A	25.0	24.76	-0.08	Left	Cheek	20187	1:1	0.503	1.057	0.532	
1880.00	600	PCS CDMA	EVDO Rev. A	25.0	24.76	0.12	Left	Tilt	20187	1:1	0.209	1.057	0.221	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-9
LTE Band 71 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	0.02	0	Right	Cheek	QPSK	1	0	20195	1:1	0.143	1.059	0.151	A9
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	0.03	1	Right	Cheek	QPSK	50	0	20195	1:1	0.117	1.021	0.119	
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	-0.15	0	Right	Tilt	QPSK	1	0	20195	1:1	0.057	1.059	0.060	
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	0.21	1	Right	Tilt	QPSK	50	0	20195	1:1	0.045	1.021	0.046	
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	0.07	0	Left	Cheek	QPSK	1	0	20195	1:1	0.117	1.059	0.124	
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	0.02	1	Left	Cheek	QPSK	50	0	20195	1:1	0.098	1.021	0.100	
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	-0.12	0	Left	Tilt	QPSK	1	0	20195	1:1	0.051	1.059	0.054	
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	0.05	1	Left	Tilt	QPSK	50	0	20195	1:1	0.044	1.021	0.045	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 72 of 119	

Table 11-10
LTE Band 12 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	-0.07	0	Right	Cheek	QPSK	1	25	20195	1:1	0.231	1.016	0.235	A10
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	0.00	1	Right	Cheek	QPSK	25	12	20195	1:1	0.165	1.000	0.165	
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	0.05	0	Right	Tilt	QPSK	1	25	20195	1:1	0.081	1.016	0.082	
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	0.19	1	Right	Tilt	QPSK	25	12	20195	1:1	0.060	1.000	0.060	
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	0.02	0	Left	Cheek	QPSK	1	25	20195	1:1	0.171	1.016	0.174	
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	0.05	1	Left	Cheek	QPSK	25	12	20195	1:1	0.135	1.000	0.135	
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	-0.03	0	Left	Tilt	QPSK	1	25	20195	1:1	0.095	1.016	0.097	
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	0.05	1	Left	Tilt	QPSK	25	12	20195	1:1	0.076	1.000	0.076	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-11
LTE Band 13 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
																(W/kg)		(W/kg)	
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	0.12	0	Right	Cheek	QPSK	1	25	20195	1:1	0.286	1.000	0.286	A11
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	0.09	1	Right	Cheek	QPSK	25	12	20195	1:1	0.256	1.002	0.257	
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	-0.01	0	Right	Tilt	QPSK	1	25	20195	1:1	0.141	1.000	0.141	
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	0.09	1	Right	Tilt	QPSK	25	12	20195	1:1	0.116	1.002	0.116	
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	-0.09	0	Left	Cheek	QPSK	1	25	20195	1:1	0.250	1.000	0.250	
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	0.15	1	Left	Cheek	QPSK	25	12	20195	1:1	0.215	1.002	0.215	
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	0.01	0	Left	Tilt	QPSK	1	25	20195	1:1	0.125	1.000	0.125	
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	-0.11	1	Left	Tilt	QPSK	25	12	20195	1:1	0.100	1.002	0.100	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-12
LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	0.08	0	Right	Cheek	QPSK	1	36	20203	1:1	0.377	1.023	0.386	A12
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	0.05	1	Right	Cheek	QPSK	36	0	20203	1:1	0.306	1.002	0.307	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	0.14	0	Right	Tilt	QPSK	1	36	20203	1:1	0.167	1.023	0.171	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	0.04	1	Right	Tilt	QPSK	36	0	20203	1:1	0.133	1.002	0.133	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	-0.08	0	Left	Cheek	QPSK	1	36	20203	1:1	0.303	1.023	0.310	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	0.05	1	Left	Cheek	QPSK	36	0	20203	1:1	0.252	1.002	0.253	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	0.21	0	Left	Tilt	QPSK	1	36	20203	1:1	0.146	1.023	0.149	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	0.02	1	Left	Tilt	QPSK	36	0	20203	1:1	0.113	1.002	0.113	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 73 of 119	

Table 11-13
LTE Band 66 (AWS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	0.10	0	Right	Cheek	QPSK	1	50	20203	1:1	0.214	1.026	0.220	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.0	24.00	0.01	1	Right	Cheek	QPSK	50	0	20203	1:1	0.194	1.000	0.194	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	0.01	0	Right	Tilt	QPSK	1	50	20203	1:1	0.221	1.026	0.227	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.0	24.00	0.06	1	Right	Tilt	QPSK	50	0	20203	1:1	0.177	1.000	0.177	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	0.08	0	Left	Cheek	QPSK	1	50	20203	1:1	0.397	1.026	0.407	A13
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.0	24.00	0.05	1	Left	Cheek	QPSK	50	0	20203	1:1	0.331	1.000	0.331	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	0.04	0	Left	Tilt	QPSK	1	50	20203	1:1	0.249	1.026	0.255	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.0	24.00	-0.01	1	Left	Tilt	QPSK	50	0	20203	1:1	0.216	1.000	0.216	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-14
LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	0.08	0	Right	Cheek	QPSK	1	50	20195	1:1	0.264	1.009	0.266	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.0	23.97	0.00	1	Right	Cheek	QPSK	50	0	20195	1:1	0.209	1.007	0.210	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.07	0	Right	Tilt	QPSK	1	50	20195	1:1	0.191	1.009	0.193	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.0	23.97	0.05	1	Right	Tilt	QPSK	50	0	20195	1:1	0.136	1.007	0.137	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.10	0	Left	Cheek	QPSK	1	50	20195	1:1	0.431	1.009	0.435	A14
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.0	23.97	0.06	1	Left	Cheek	QPSK	50	0	20195	1:1	0.326	1.007	0.328	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	0.16	0	Left	Tilt	QPSK	1	50	20195	1:1	0.209	1.009	0.211	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.0	23.97	0.15	1	Left	Tilt	QPSK	50	0	20195	1:1	0.172	1.007	0.173	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 74 of 119	

Table 11-15
LTE Band 41 Head SAR

MEASUREMENT RESULTS																					
1 CC Uplink 2 CC Uplink, Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	0.12	0	Right	Cheek	QPSK	1	50	20203	1:1.58	0.022	1.059	0.023	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.65	0.16	0	Right	Cheek	QPSK	1	99	20203	1:1.58	0.013	1.084	0.014	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	0.14	1	Right	Cheek	QPSK	50	25	20203	1:1.58	0.016	1.028	0.016	
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	26.7	26.70	0.17	0	Right	Cheek	QPSK	1	50	20203	1:2.31	0.025	1.000	0.025	A15
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	26.7	26.46	0.12	0	Right	Cheek	QPSK	1	99	20203	1:2.31	0.013	1.057	0.014	
2 CC Uplink - Power Class 3	PCC	2506.00	39750	Low	LTE Band 41	20	25.0	24.80	0.15	0	Right	Cheek	QPSK	1	99	20203	1:1.58	0.014	1.047	0.015	
	SCC	2525.80	39948	Low											0						
2 CC Uplink - Power Class 2	PCC	2506.00	39750	Low	LTE Band 41	20	26.7	26.39	-0.12	0	Right	Cheek	QPSK	1	99	20203	1:2.31	0.013	1.074	0.014	
	SCC	2525.80	39948	Low											0						
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	0.17	0	Right	Tilt	QPSK	1	50	20203	1:1.58	0.013	1.059	0.014	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	0.12	1	Right	Tilt	QPSK	50	25	20203	1:1.58	0.009	1.028	0.009	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	0.16	0	Left	Cheek	QPSK	1	50	20203	1:1.58	0.017	1.059	0.018	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	0.13	1	Left	Cheek	QPSK	50	25	20203	1:1.58	0.010	1.028	0.010	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	0.14	0	Left	Tilt	QPSK	1	50	20203	1:1.58	0.007	1.059	0.007	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	0.12	1	Left	Tilt	QPSK	50	25	20203	1:1.58	0.004	1.028	0.004	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-16
DTS Head SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	19.0	18.72	0.12	Right	Cheek	20211	1	99.1	1.021	0.747	1.067	1.009	0.804	
2437	6	802.11b	DSSS	22	19.0	18.64	-0.02	Right	Cheek	20211	1	99.1	1.111	0.757	1.086	1.009	0.830	
2462	11	802.11b	DSSS	22	19.0	18.84	-0.04	Right	Cheek	20211	1	99.1	1.119	0.780	1.038	1.009	0.817	A16
2462	11	802.11b	DSSS	22	19.0	18.84	0.13	Right	Tilt	20211	1	99.1	0.692	0.492	1.038	1.009	0.515	
2462	11	802.11b	DSSS	22	19.0	18.84	0.09	Left	Cheek	20211	1	99.1	0.406	-	1.038	1.009	-	
2462	11	802.11b	DSSS	22	19.0	18.84	0.18	Left	Tilt	20211	1	99.1	0.363	-	1.038	1.009	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 75 of 119	

**Table 11-17
NII Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5310	62	802.11n	OFDM	40	16.0	15.46	-0.12	Right	Cheek	20211	13.5	88.0	0.766	0.354	1.132	1.136	0.455	
5310	62	802.11n	OFDM	40	16.0	15.46	0.09	Right	Tilt	20211	13.5	88.0	0.765	0.399	1.132	1.136	0.513	
5310	62	802.11n	OFDM	40	16.0	15.46	0.11	Left	Cheek	20211	13.5	88.0	0.513	-	1.132	1.136	-	
5310	62	802.11n	OFDM	40	16.0	15.46	0.16	Left	Tilt	20211	13.5	88.0	0.613	-	1.132	1.136	-	
5630	126	802.11n	OFDM	40	16.0	15.56	0.15	Right	Cheek	20211	13.5	88.0	1.095	0.512	1.107	1.136	0.644	
5630	126	802.11n	OFDM	40	16.0	15.56	0.19	Right	Tilt	20211	13.5	88.0	1.015	0.523	1.107	1.136	0.658	
5630	126	802.11n	OFDM	40	16.0	15.56	-0.16	Left	Cheek	20211	13.5	88.0	0.668	-	1.107	1.136	-	
5630	126	802.11n	OFDM	40	16.0	15.56	-0.08	Left	Tilt	20211	13.5	88.0	0.749	-	1.107	1.136	-	
5795	159	802.11n	OFDM	40	16.0	15.56	0.17	Right	Cheek	20211	13.5	88.0	1.128	0.575	1.107	1.136	0.723	
5755	151	802.11n	OFDM	40	16.0	15.34	0.17	Right	Tilt	20211	13.5	88.0	1.087	0.561	1.164	1.136	0.561	
5795	159	802.11n	OFDM	40	16.0	15.56	0.16	Right	Tilt	20211	13.5	88.0	1.119	0.590	1.107	1.136	0.742	A17
5795	159	802.11n	OFDM	40	16.0	15.56	-0.18	Left	Cheek	20211	13.5	88.0	0.821	-	1.107	1.136	-	
5795	159	802.11n	OFDM	40	16.0	15.56	-0.06	Left	Tilt	20211	13.5	88.0	0.907	-	1.107	1.136	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Head 1.6 W/kg (mW/g) averaged over 1 gram										
Spatial Peak Uncontrolled Exposure/General Population																		

**Table 11-18
DSS Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441.00	39	Bluetooth	FHSS	10.0	9.40	-0.20	Right	Cheek	20211	1	76.8	0.050	1.148	1.302	0.075	A18
2441.00	39	Bluetooth	FHSS	10.0	9.40	0.14	Right	Tilt	20211	1	76.8	0.040	1.148	1.302	0.060	
2441.00	39	Bluetooth	FHSS	10.0	9.40	0.18	Left	Cheek	20211	1	76.8	0.018	1.148	1.302	0.027	
2441.00	39	Bluetooth	FHSS	10.0	9.40	-0.02	Left	Tilt	20211	1	76.8	0.014	1.148	1.302	0.021	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 76 of 119

11.2 Standalone Body-Worn SAR Data

Table 11-19
GSM/UMTS/CDMA Body-Worn SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	GSM 850	GSM	34.0	34.00	-0.02	10 mm	20187	1	1:8.3	back	0.641	1.000	0.641	
836.60	190	GSM 850	GSM	34.0	33.91	-0.02	10 mm	20187	1	1:8.3	back	0.716	1.021	0.731	
848.80	251	GSM 850	GSM	34.0	34.00	-0.01	10 mm	20187	1	1:8.3	back	0.948	1.000	0.948	
824.20	128	GSM 850	GPRS	30.7	30.62	-0.02	10 mm	20187	3	1:2.76	back	0.756	1.019	0.770	
836.60	190	GSM 850	GPRS	30.7	30.58	0.01	10 mm	20187	3	1:2.76	back	0.919	1.028	0.945	
848.80	251	GSM 850	GPRS	30.7	30.62	-0.05	10 mm	20187	3	1:2.76	back	1.090	1.019	1.111	A19
848.80	251	GSM 850	GPRS	30.7	30.62	-0.05	10 mm	20187	3	1:2.76	back	1.090	1.019	1.111	
1880.00	661	GSM 1900	GSM	31.0	30.99	0.01	10 mm	20179	1	1:8.3	back	0.333	1.002	0.334	
1880.00	661	GSM 1900	GPRS	27.7	27.68	-0.01	10 mm	20179	3	1:2.76	back	0.379	1.005	0.381	A20
826.40	4132	UMTS 850	RMC	25.2	25.13	0.02	10 mm	20187	N/A	1:1	back	0.667	1.016	0.678	
836.60	4183	UMTS 850	RMC	25.2	25.09	0.01	10 mm	20187	N/A	1:1	back	0.703	1.026	0.721	A21
846.60	4233	UMTS 850	RMC	25.2	25.20	0.00	10 mm	20187	N/A	1:1	back	0.690	1.000	0.690	
1712.40	1312	UMTS 1750	RMC	25.0	24.90	-0.03	10 mm	20187	N/A	1:1	back	0.636	1.023	0.651	
1732.40	1412	UMTS 1750	RMC	25.0	24.91	-0.01	10 mm	20187	N/A	1:1	back	0.669	1.021	0.683	
1752.60	1513	UMTS 1750	RMC	25.0	24.91	0.01	10 mm	20187	N/A	1:1	back	0.690	1.021	0.704	A22
1852.40	9262	UMTS 1900	RMC	25.0	24.91	0.02	10 mm	20187	N/A	1:1	back	1.060	1.021	1.082	
1880.00	9400	UMTS 1900	RMC	25.0	24.98	0.01	10 mm	20187	N/A	1:1	back	1.080	1.005	1.085	A23
1907.60	9538	UMTS 1900	RMC	25.0	24.92	-0.01	10 mm	20187	N/A	1:1	back	0.986	1.019	1.005	
1880.00	9400	UMTS 1900	RMC	25.0	24.98	-0.01	10 mm	20187	N/A	1:1	back	1.050	1.005	1.055	
820.10	564	CDMA BC10 (\$90S)	TDSO / SO32	25.2	24.51	0.00	10 mm	20187	N/A	1:1	back	0.658	1.172	0.771	A24
824.70	1013	CDMA BC0 (\$22H)	TDSO / SO32	25.2	24.52	0.00	10 mm	20187	N/A	1:1	back	0.553	1.169	0.646	
836.52	384	CDMA BC0 (\$22H)	TDSO / SO32	25.2	24.70	0.02	10 mm	20187	N/A	1:1	back	0.611	1.122	0.686	A26
848.31	777	CDMA BC0 (\$22H)	TDSO / SO32	25.2	24.63	0.10	10 mm	20187	N/A	1:1	back	0.600	1.140	0.684	
1851.25	25	PCS CDMA	TDSO / SO32	25.0	24.51	0.05	10 mm	20179	N/A	1:1	back	0.966	1.119	1.081	A28
1880.00	600	PCS CDMA	TDSO / SO32	25.0	24.62	-0.02	10 mm	20179	N/A	1:1	back	0.944	1.091	1.030	
1908.75	1175	PCS CDMA	TDSO / SO32	25.0	24.74	0.02	10 mm	20179	N/A	1:1	back	0.912	1.062	0.969	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body								
Spatial Peak							1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population							averaged over 1 gram								

Note: Blue entries represent variability measurements.

FCC ID: ZNFL555DL			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset			Page 77 of 119

Table 11-20
LTE Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	-0.14	0	20203	QPSK	1	0	10 mm	back	1:1	0.232	1.059	0.246	A30
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	-0.13	1	20203	QPSK	50	0	10 mm	back	1:1	0.194	1.021	0.198	
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	-0.02	0	20203	QPSK	1	25	10 mm	back	1:1	0.395	1.016	0.401	A32
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	-0.02	1	20203	QPSK	25	12	10 mm	back	1:1	0.295	1.000	0.295	
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	0.01	0	20203	QPSK	1	25	10 mm	back	1:1	0.538	1.000	0.538	A33
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	0.05	1	20203	QPSK	25	12	10 mm	back	1:1	0.480	1.002	0.481	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	-0.02	0	20195	QPSK	1	36	10 mm	back	1:1	0.805	1.023	0.824	A34
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	0.01	1	20195	QPSK	36	0	10 mm	back	1:1	0.649	1.002	0.650	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.18	0.00	1	20195	QPSK	75	0	10 mm	back	1:1	0.649	1.005	0.652	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	-0.12	0	20195	QPSK	1	50	10 mm	back	1:1	0.820	1.026	0.841	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.0	24.84	0.02	0	20195	QPSK	1	50	10 mm	back	1:1	0.807	1.038	0.838	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.0	24.85	-0.05	0	20195	QPSK	1	50	10 mm	back	1:1	0.824	1.035	0.853	A35
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.0	24.00	0.01	1	20195	QPSK	50	0	10 mm	back	1:1	0.614	1.000	0.614	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.0	23.99	0.03	1	20195	QPSK	100	0	10 mm	back	1:1	0.612	1.002	0.613	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.01	0	20195	QPSK	1	50	10 mm	back	1:1	0.954	1.009	0.963	A37
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.0	24.94	0.00	0	20195	QPSK	1	50	10 mm	back	1:1	0.921	1.014	0.934	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.0	24.90	-0.02	0	20195	QPSK	1	50	10 mm	back	1:1	0.851	1.023	0.871	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.0	23.97	0.00	1	20195	QPSK	50	0	10 mm	back	1:1	0.770	1.007	0.775	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.0	23.86	0.00	1	20195	QPSK	100	0	10 mm	back	1:1	0.772	1.033	0.797	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-21
LTE Band 41 Body-Worn SAR

MEASUREMENT RESULTS																					
1 CC Uplink 2 CC Uplink, Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	0.03	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.583	1.059	0.617	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.65	0.06	0	20203	QPSK	1	99	10 mm	back	1:1.58	0.552	1.084	0.598	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.0	24.71	0.05	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.534	1.069	0.571	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	24.72	0.14	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.431	1.067	0.460	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.0	24.74	0.20	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.391	1.062	0.415	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	25.0	24.74	0.17	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.435	1.062	0.462	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	0.02	1	20203	QPSK	50	25	10 mm	back	1:1.58	0.461	1.028	0.474	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.86	-0.04	1	20203	QPSK	100	0	10 mm	back	1:1.58	0.443	1.033	0.458	
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	26.7	26.70	-0.03	0	20203	QPSK	1	50	10 mm	back	1:2.31	0.669	1.000	0.669	A38
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	26.7	26.46	-0.17	0	20203	QPSK	1	99	10 mm	back	1:2.31	0.565	1.057	0.597	
2 CC Uplink - Power Class 3	PCC	2506.00	39750	Low	LTE Band 41	20	25.0	24.80	-0.08	0	20203	QPSK	1	99	10 mm	back	1:1.58	0.592	1.047	0.620	
	SCC	2525.80	39948	Low										0							
2 CC Uplink - Power Class 2	PCC	2506.00	39750	Low	LTE Band 41	20	26.7	26.39	-0.15	0	20203	QPSK	1	99	10 mm	back	1:2.31	0.532	1.074	0.571	
	SCC	2525.80	39948	Low										0							
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 78 of 119	

**Table 11-22
DTS Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	22.0	21.62	0.15	10 mm	20245	1	back	99.1	0.418	0.278	1.091	1.009	0.306	A40
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-23
NII Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	20.0	19.36	-0.14	10 mm	20211	6	back	96.9	0.971	0.456	1.159	1.032	0.545	A42
5520	104	802.11a	OFDM	20	20.0	19.76	0.07	10 mm	20211	6	back	96.9	0.659	0.308	1.057	1.032	0.336	
5785	157	802.11a	OFDM	20	20.0	19.33	0.19	10 mm	20211	6	back	96.9	0.747	0.324	1.167	1.032	0.390	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-24
DSS Body-Worn SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	10.0	9.40	0.12	10 mm	20211	1	back	76.8	0.009	1.148	1.302	0.013	A44
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 79 of 119

11.3 Standalone Hotspot SAR Data

Table 11-25
GPRS/UMTS/CDMA Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	GSM 850	GPRS	30.7	30.62	-0.02	10 mm	20187	3	1:2.76	back	0.756	1.019	0.770	A19
836.60	190	GSM 850	GPRS	30.7	30.58	0.01	10 mm	20187	3	1:2.76	back	0.919	1.028	0.945	
848.80	251	GSM 850	GPRS	30.7	30.62	-0.05	10 mm	20187	3	1:2.76	back	1.090	1.019	1.111	
836.60	190	GSM 850	GPRS	30.7	30.58	0.01	10 mm	20187	3	1:2.76	front	0.588	1.028	0.604	
836.60	190	GSM 850	GPRS	30.7	30.58	-0.01	10 mm	20187	3	1:2.76	bottom	0.739	1.028	0.760	
836.60	190	GSM 850	GPRS	30.7	30.58	0.01	10 mm	20187	3	1:2.76	right	0.501	1.028	0.515	
836.60	190	GSM 850	GPRS	30.7	30.58	-0.03	10 mm	20187	3	1:2.76	left	0.181	1.028	0.186	A20
848.80	251	GSM 850	GPRS	30.7	30.62	-0.05	10 mm	20187	3	1:2.76	back	1.090	1.019	1.111	
1880.00	661	GSM 1900	GPRS	27.7	27.68	-0.01	10 mm	20179	3	1:2.76	back	0.379	1.005	0.381	
1880.00	661	GSM 1900	GPRS	27.7	27.68	-0.06	10 mm	20179	3	1:2.76	front	0.318	1.005	0.320	
1880.00	661	GSM 1900	GPRS	27.7	27.68	0.04	10 mm	20179	3	1:2.76	bottom	0.194	1.005	0.195	
1880.00	661	GSM 1900	GPRS	27.7	27.68	-0.04	10 mm	20179	3	1:2.76	left	0.312	1.005	0.314	
826.40	4132	UMTS 850	RMC	25.2	25.13	0.02	10 mm	20187	N/A	1:1	back	0.667	1.016	0.678	A21
836.60	4183	UMTS 850	RMC	25.2	25.09	0.01	10 mm	20187	N/A	1:1	back	0.703	1.026	0.721	
846.60	4233	UMTS 850	RMC	25.2	25.20	0.00	10 mm	20187	N/A	1:1	back	0.690	1.000	0.690	
836.60	4183	UMTS 850	RMC	25.2	25.09	0.01	10 mm	20187	N/A	1:1	front	0.513	1.026	0.526	
836.60	4183	UMTS 850	RMC	25.2	25.09	-0.02	10 mm	20187	N/A	1:1	bottom	0.446	1.026	0.458	
836.60	4183	UMTS 850	RMC	25.2	25.09	0.02	10 mm	20187	N/A	1:1	right	0.403	1.026	0.413	
836.60	4183	UMTS 850	RMC	25.2	25.09	0.04	10 mm	20187	N/A	1:1	left	0.134	1.026	0.137	A22
1712.40	1312	UMTS 1750	RMC	25.0	24.90	-0.03	10 mm	20187	N/A	1:1	back	0.636	1.023	0.651	
1732.40	1412	UMTS 1750	RMC	25.0	24.91	-0.01	10 mm	20187	N/A	1:1	back	0.669	1.021	0.683	
1752.60	1513	UMTS 1750	RMC	25.0	24.91	0.01	10 mm	20187	N/A	1:1	back	0.690	1.021	0.704	
1732.40	1412	UMTS 1750	RMC	25.0	24.91	-0.02	10 mm	20187	N/A	1:1	front	0.625	1.021	0.638	
1732.40	1412	UMTS 1750	RMC	25.0	24.91	-0.05	10 mm	20187	N/A	1:1	bottom	0.625	1.021	0.638	
1732.40	1412	UMTS 1750	RMC	25.0	24.91	0.06	10 mm	20187	N/A	1:1	left	0.629	1.021	0.642	A23
1852.40	9262	UMTS 1900	RMC	25.0	24.91	0.02	10 mm	20187	N/A	1:1	back	1.060	1.021	1.062	
1880.00	9400	UMTS 1900	RMC	25.0	24.98	0.01	10 mm	20187	N/A	1:1	back	1.080	1.005	1.085	
1907.60	9538	UMTS 1900	RMC	25.0	24.92	-0.01	10 mm	20187	N/A	1:1	back	0.986	1.019	1.005	
1852.40	9262	UMTS 1900	RMC	25.0	24.91	-0.01	10 mm	20187	N/A	1:1	front	0.820	1.021	0.837	
1880.00	9400	UMTS 1900	RMC	25.0	24.98	-0.04	10 mm	20187	N/A	1:1	front	0.833	1.005	0.837	
1907.60	9538	UMTS 1900	RMC	25.0	24.92	-0.04	10 mm	20187	N/A	1:1	front	0.780	1.019	0.795	A24
1880.00	9400	UMTS 1900	RMC	25.0	24.98	0.03	10 mm	20187	N/A	1:1	bottom	0.560	1.005	0.563	
1880.00	9400	UMTS 1900	RMC	25.0	24.98	0.06	10 mm	20187	N/A	1:1	left	0.721	1.005	0.725	
1880.00	9400	UMTS 1900	RMC	25.0	24.98	-0.01	10 mm	20187	N/A	1:1	back	1.050	1.005	1.055	
820.10	564	CDMA BC10 (S90S)	EVDO Rev. 0	25.2	24.20	-0.13	10 mm	20187	N/A	1:1	back	0.580	1.259	0.730	
820.10	564	CDMA BC10 (S90S)	EVDO Rev. 0	25.2	24.20	0.01	10 mm	20187	N/A	1:1	front	0.382	1.259	0.481	
820.10	564	CDMA BC10 (S90S)	EVDO Rev. 0	25.2	24.20	-0.03	10 mm	20187	N/A	1:1	bottom	0.390	1.259	0.491	A25
820.10	564	CDMA BC10 (S90S)	EVDO Rev. 0	25.2	24.20	0.01	10 mm	20187	N/A	1:1	right	0.346	1.259	0.436	
820.10	564	CDMA BC10 (S90S)	EVDO Rev. 0	25.2	24.20	0.00	10 mm	20187	N/A	1:1	left	0.109	1.259	0.137	
824.70	1013	CDMA BC0 (S22H)	EVDO Rev. 0	25.2	24.34	0.01	10 mm	20187	N/A	1:1	back	0.614	1.219	0.748	
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.2	24.48	-0.01	10 mm	20187	N/A	1:1	back	0.733	1.180	0.865	
848.31	777	CDMA BC0 (S22H)	EVDO Rev. 0	25.2	24.34	0.00	10 mm	20187	N/A	1:1	back	0.635	1.219	0.774	
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.2	24.48	0.04	10 mm	20187	N/A	1:1	front	0.480	1.180	0.566	A27
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.2	24.48	-0.03	10 mm	20187	N/A	1:1	bottom	0.461	1.180	0.544	
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.2	24.48	0.01	10 mm	20187	N/A	1:1	right	0.410	1.180	0.484	
836.52	384	CDMA BC0 (S22H)	EVDO Rev. 0	25.2	24.48	0.03	10 mm	20187	N/A	1:1	left	0.142	1.180	0.168	
1851.25	25	PCS CDMA	EVDO Rev. 0	25.0	25.00	-0.01	10 mm	20179	N/A	1:1	back	0.943	1.000	0.943	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.95	0.01	10 mm	20179	N/A	1:1	back	0.896	1.012	0.907	
1908.75	1175	PCS CDMA	EVDO Rev. 0	25.0	24.93	0.02	10 mm	20179	N/A	1:1	back	0.873	1.016	0.887	A29
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.95	-0.01	10 mm	20179	N/A	1:1	front	0.736	1.012	0.745	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.95	0.09	10 mm	20179	N/A	1:1	bottom	0.436	1.012	0.441	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.95	0.02	10 mm	20179	N/A	1:1	left	0.651	1.012	0.659	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body								
Spatial Peak							1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population							averaged over 1 gram								

Note: Blue entries represent variability measurements.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 80 of 119

Table 11-26
LTE Band 71 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	-0.14	0	20203	QPSK	1	0	10 mm	back	1:1	0.232	1.059	0.246	
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	-0.13	1	20203	QPSK	50	0	10 mm	back	1:1	0.194	1.021	0.198	
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	0.05	0	20203	QPSK	1	0	10 mm	front	1:1	0.166	1.059	0.176	
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	-0.01	1	20203	QPSK	50	0	10 mm	front	1:1	0.133	1.021	0.136	
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	-0.05	0	20203	QPSK	1	0	10 mm	bottom	1:1	0.120	1.059	0.127	
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	-0.08	1	20203	QPSK	50	0	10 mm	bottom	1:1	0.103	1.021	0.105	
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	-0.06	0	20203	QPSK	1	0	10 mm	right	1:1	0.250	1.059	0.265	A31
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	-0.03	1	20203	QPSK	50	0	10 mm	right	1:1	0.207	1.021	0.211	
680.50	133297	Mid	LTE Band 71	20	25.2	24.95	-0.04	0	20203	QPSK	1	0	10 mm	left	1:1	0.122	1.059	0.129	
680.50	133297	Mid	LTE Band 71	20	24.2	24.11	0.02	1	20203	QPSK	50	0	10 mm	left	1:1	0.103	1.021	0.105	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-27
LTE Band 12 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	-0.02	0	20203	QPSK	1	25	10 mm	back	1:1	0.395	1.016	0.401	A32
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	-0.02	1	20203	QPSK	25	12	10 mm	back	1:1	0.295	1.000	0.295	
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	-0.04	0	20203	QPSK	1	25	10 mm	front	1:1	0.230	1.016	0.234	
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	0.00	1	20203	QPSK	25	12	10 mm	front	1:1	0.172	1.000	0.172	
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	-0.12	0	20203	QPSK	1	25	10 mm	bottom	1:1	0.242	1.016	0.246	
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	-0.04	1	20203	QPSK	25	12	10 mm	bottom	1:1	0.180	1.000	0.180	
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	0.06	0	20203	QPSK	1	25	10 mm	right	1:1	0.370	1.016	0.376	
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	0.06	1	20203	QPSK	25	12	10 mm	right	1:1	0.289	1.000	0.289	
707.50	23095	Mid	LTE Band 12	10	25.2	25.13	-0.05	0	20203	QPSK	1	25	10 mm	left	1:1	0.172	1.016	0.175	
707.50	23095	Mid	LTE Band 12	10	24.2	24.20	0.11	1	20203	QPSK	25	12	10 mm	left	1:1	0.129	1.000	0.129	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 81 of 119

Table 11-28
LTE Band 13 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	0.01	0	20203	QPSK	1	25	10 mm	back	1:1	0.538	1.000	0.538	A33
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	0.05	1	20203	QPSK	25	12	10 mm	back	1:1	0.480	1.002	0.481	
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	-0.02	0	20203	QPSK	1	25	10 mm	front	1:1	0.340	1.000	0.340	
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	0.01	1	20203	QPSK	25	12	10 mm	front	1:1	0.314	1.002	0.315	
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	-0.07	0	20203	QPSK	1	25	10 mm	bottom	1:1	0.342	1.000	0.342	
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	-0.06	1	20203	QPSK	25	12	10 mm	bottom	1:1	0.304	1.002	0.305	
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	-0.03	0	20203	QPSK	1	25	10 mm	right	1:1	0.418	1.000	0.418	
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	-0.03	1	20203	QPSK	25	12	10 mm	right	1:1	0.379	1.002	0.380	
782.00	23230	Mid	LTE Band 13	10	25.2	25.20	-0.09	0	20203	QPSK	1	25	10 mm	left	1:1	0.255	1.000	0.255	
782.00	23230	Mid	LTE Band 13	10	24.2	24.19	-0.01	1	20203	QPSK	25	12	10 mm	left	1:1	0.210	1.002	0.210	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-29
LTE Band 26 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	-0.02	0	20195	QPSK	1	36	10 mm	back	1:1	0.805	1.023	0.824	A34
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	0.01	1	20195	QPSK	36	0	10 mm	back	1:1	0.649	1.002	0.650	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.18	0.00	1	20195	QPSK	75	0	10 mm	back	1:1	0.649	1.005	0.652	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	0.00	0	20195	QPSK	1	36	10 mm	front	1:1	0.576	1.023	0.589	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	0.03	1	20195	QPSK	36	0	10 mm	front	1:1	0.461	1.002	0.462	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	-0.02	0	20195	QPSK	1	36	10 mm	bottom	1:1	0.531	1.023	0.543	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	-0.01	1	20195	QPSK	36	0	10 mm	bottom	1:1	0.433	1.002	0.434	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	0.01	0	20195	QPSK	1	36	10 mm	right	1:1	0.473	1.023	0.484	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	0.00	1	20195	QPSK	36	0	10 mm	right	1:1	0.378	1.002	0.379	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	25.10	0.11	0	20195	QPSK	1	36	10 mm	left	1:1	0.155	1.023	0.159	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	24.19	0.05	1	20195	QPSK	36	0	10 mm	left	1:1	0.117	1.002	0.117	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 82 of 119	

Table 11-30
LTE Band 66 (AWS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	-0.12	0	20195	QPSK	1	50	10 mm	back	1:1	0.820	1.026	0.841	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.0	24.84	0.02	0	20195	QPSK	1	50	10 mm	back	1:1	0.807	1.038	0.838	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.0	24.85	-0.05	0	20195	QPSK	1	50	10 mm	back	1:1	0.824	1.035	0.853	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.0	24.00	0.01	1	20195	QPSK	50	0	10 mm	back	1:1	0.614	1.000	0.614	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.0	23.99	0.03	1	20195	QPSK	100	0	10 mm	back	1:1	0.612	1.002	0.613	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	-0.12	0	20195	QPSK	1	50	10 mm	front	1:1	0.716	1.026	0.735	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.0	24.00	0.06	1	20195	QPSK	50	0	10 mm	front	1:1	0.492	1.000	0.492	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	0.00	0	20195	QPSK	1	50	10 mm	bottom	1:1	0.659	1.026	0.676	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.0	24.00	0.04	1	20195	QPSK	50	0	10 mm	bottom	1:1	0.570	1.000	0.570	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	-0.16	0	20195	QPSK	1	50	10 mm	left	1:1	0.800	1.026	0.821	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.0	24.84	-0.13	0	20195	QPSK	1	50	10 mm	left	1:1	0.851	1.038	0.883	A36
1770.00	132572	High	LTE Band 66 (AWS)	20	25.0	24.85	-0.09	0	20195	QPSK	1	50	10 mm	left	1:1	0.782	1.035	0.809	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.0	24.00	-0.10	1	20195	QPSK	50	0	10 mm	left	1:1	0.639	1.000	0.639	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.0	23.99	0.02	1	20195	QPSK	100	0	10 mm	left	1:1	0.591	1.002	0.592	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.0	24.84	-0.14	0	20195	QPSK	1	50	10 mm	left	1:1	0.832	1.038	0.864	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Note: Blue entry represents variability measurement.

Table 11-31
LTE Band 25 (PCS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.01	0	20195	QPSK	1	50	10 mm	back	1:1	0.954	1.009	0.963	A37
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.0	24.94	0.00	0	20195	QPSK	1	50	10 mm	back	1:1	0.921	1.014	0.934	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.0	24.90	-0.02	0	20195	QPSK	1	50	10 mm	back	1:1	0.851	1.023	0.871	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.0	23.97	0.00	1	20195	QPSK	50	0	10 mm	back	1:1	0.770	1.007	0.775	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.0	23.86	0.00	1	20195	QPSK	100	0	10 mm	back	1:1	0.772	1.033	0.797	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.03	0	20195	QPSK	1	50	10 mm	front	1:1	0.788	1.009	0.795	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.0	23.97	-0.09	1	20195	QPSK	50	0	10 mm	front	1:1	0.608	1.007	0.612	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.05	0	20195	QPSK	1	50	10 mm	bottom	1:1	0.550	1.009	0.555	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.0	23.97	-0.09	1	20195	QPSK	50	0	10 mm	bottom	1:1	0.350	1.007	0.352	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.05	0	20195	QPSK	1	50	10 mm	left	1:1	0.743	1.009	0.750	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.0	23.97	0.01	1	20195	QPSK	50	0	10 mm	left	1:1	0.556	1.007	0.560	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 83 of 119	

**Table 11-32
LTE Band 41 Hotspot SAR**

MEASUREMENT RESULTS																					
1 CC Uplink / 2 CC Uplink, Power Class	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	0.03	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.583	1.059	0.617	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.65	0.06	0	20203	QPSK	1	99	10 mm	back	1:1.58	0.552	1.084	0.598	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.0	24.71	0.05	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.534	1.069	0.571	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	24.72	0.14	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.431	1.067	0.460	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.0	24.74	0.20	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.391	1.062	0.415	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	25.0	24.74	0.17	0	20203	QPSK	1	50	10 mm	back	1:1.58	0.435	1.062	0.462	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	0.02	1	20203	QPSK	50	25	10 mm	back	1:1.58	0.461	1.028	0.474	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.86	-0.04	1	20203	QPSK	100	0	10 mm	back	1:1.58	0.443	1.033	0.458	
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	26.7	26.70	-0.03	0	20203	QPSK	1	50	10 mm	back	1:2.31	0.669	1.000	0.669	
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	26.7	26.46	-0.17	0	20203	QPSK	1	99	10 mm	back	1:2.31	0.565	1.057	0.597	
2 CC Uplink - Power Class 3	PCC	2506.00	39750	Low	LTE Band 41	20	25.0	24.80	-0.08	0	20203	QPSK	1	99	10 mm	back	1:1.58	0.592	1.047	0.620	
	SCC	2525.80	39948	Low										0							
2 CC Uplink - Power Class 2	PCC	2506.00	39750	Low	LTE Band 41	20	26.7	26.39	-0.15	0	20203	QPSK	1	99	10 mm	back	1:2.31	0.532	1.074	0.571	
	SCC	2525.80	39948	Low										0							
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	-0.11	0	20203	QPSK	1	50	10 mm	front	1:1.58	0.394	1.059	0.417	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	0.10	1	20203	QPSK	50	25	10 mm	front	1:1.58	0.314	1.028	0.323	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	-0.20	0	20203	QPSK	1	50	10 mm	bottom	1:1.58	0.831	1.059	0.880	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.65	-0.04	0	20203	QPSK	1	99	10 mm	bottom	1:1.58	0.812	1.084	0.880	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.0	24.71	-0.17	0	20203	QPSK	1	50	10 mm	bottom	1:1.58	0.770	1.069	0.823	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	24.72	-0.15	0	20203	QPSK	1	50	10 mm	bottom	1:1.58	0.634	1.067	0.676	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.0	24.74	-0.14	0	20203	QPSK	1	50	10 mm	bottom	1:1.58	0.606	1.062	0.644	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	25.0	24.74	-0.10	0	20203	QPSK	1	50	10 mm	bottom	1:1.58	0.658	1.062	0.699	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	-0.15	1	20203	QPSK	50	25	10 mm	bottom	1:1.58	0.642	1.028	0.660	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.0	23.78	-0.11	1	20203	QPSK	50	25	10 mm	bottom	1:1.58	0.595	1.052	0.626	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	23.77	-0.12	1	20203	QPSK	50	25	10 mm	bottom	1:1.58	0.510	1.054	0.538	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.0	23.69	-0.12	1	20203	QPSK	50	25	10 mm	bottom	1:1.58	0.473	1.074	0.508	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	24.0	23.84	-0.06	1	20203	QPSK	50	0	10 mm	bottom	1:1.58	0.496	1.038	0.515	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.86	-0.16	1	20203	QPSK	100	0	10 mm	bottom	1:1.58	0.632	1.033	0.653	
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	26.7	26.70	-0.18	0	20203	QPSK	1	50	10 mm	bottom	1:2.31	0.978	1.000	0.978	A39
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	26.7	26.46	0.17	0	20203	QPSK	1	99	10 mm	bottom	1:2.31	0.795	1.057	0.840	
2 CC Uplink - Power Class 3	PCC	2506.00	39750	Low	LTE Band 41	20	25.0	24.80	0.12	0	20203	QPSK	1	99	10 mm	bottom	1:1.58	0.810	1.047	0.848	
	SCC	2525.80	39948	Low										0							
2 CC Uplink - Power Class 2	PCC	2506.00	39750	Low	LTE Band 41	20	26.7	26.39	0.17	0	20203	QPSK	1	99	10 mm	bottom	1:2.31	0.790	1.074	0.848	
	SCC	2525.80	39948	Low										0							
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	0.18	0	20203	QPSK	1	50	10 mm	right	1:1.58	0.065	1.059	0.069	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	0.10	1	20203	QPSK	50	25	10 mm	right	1:1.58	0.050	1.028	0.051	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.0	24.75	0.14	0	20203	QPSK	1	50	10 mm	left	1:1.58	0.019	1.059	0.020	
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	23.88	0.00	1	20203	QPSK	50	25	10 mm	left	1:1.58	0.015	1.028	0.015	
1 CC Uplink - Power Class 2	N/A	2506.00	39750	Low	LTE Band 41	20	26.7	26.70	-0.11	0	20203	QPSK	1	50	10 mm	bottom	1:2.31	0.928	1.000	0.928	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body											
Spatial Peak										1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population										averaged over 1 gram											

Note: Blue entry represents variability measurement.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 84 of 119

**Table 11-33
WLAN Hotspot SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	22.0	21.62	0.15	10 mm	20245	1	back	99.1	0.418	-	1.091	1.009	-	
2462	11	802.11b	DSSS	22	22.0	21.62	0.13	10 mm	20245	1	front	99.1	0.327	-	1.091	1.009	-	
2462	11	802.11b	DSSS	22	22.0	21.62	0.13	10 mm	20245	1	top	99.1	0.339	-	1.091	1.009	-	
2462	11	802.11b	DSSS	22	22.0	21.62	0.11	10 mm	20245	1	left	99.1	0.431	0.294	1.091	1.009	0.324	A41
5220	44	802.11a	OFDM	20	20.0	19.54	-0.17	10 mm	20211	6	back	96.9	1.009	0.458	1.112	1.032	0.526	
5220	44	802.11a	OFDM	20	20.0	19.54	0.12	10 mm	20211	6	front	96.9	0.508	0.213	1.112	1.032	0.244	
5220	44	802.11a	OFDM	20	20.0	19.54	-0.03	10 mm	20211	6	top	96.9	1.070	0.576	1.112	1.032	0.661	
5220	44	802.11a	OFDM	20	20.0	19.54	0.05	10 mm	20211	6	left	96.9	0.257	0.122	1.112	1.032	0.140	
5785	157	802.11a	OFDM	20	20.0	19.33	0.19	10 mm	20211	6	back	96.9	0.747	0.324	1.167	1.032	0.390	
5785	157	802.11a	OFDM	20	20.0	19.33	0.15	10 mm	20211	6	front	96.9	0.601	0.280	1.167	1.032	0.337	
5745	149	802.11a	OFDM	20	20.0	19.26	-0.14	10 mm	20211	6	top	96.9	1.327	0.575	1.186	1.032	0.704	
5785	157	802.11a	OFDM	20	20.0	19.33	0.07	10 mm	20211	6	top	96.9	1.312	0.614	1.167	1.032	0.739	
5805	161	802.11a	OFDM	20	20.0	19.26	-0.16	10 mm	20211	6	top	96.9	1.039	0.693	1.186	1.032	0.848	A43
5785	157	802.11a	OFDM	20	20.0	19.33	0.13	10 mm	20211	6	left	96.9	0.427	0.191	1.167	1.032	0.230	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body										
Spatial Peak								1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 1 gram										

**Table 11-34
DSS Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	10.0	9.40	0.12	10 mm	20211	1	back	76.8	0.009	1.148	1.302	0.013	A44
2441	39	Bluetooth	FHSS	10.0	9.40	0.18	10 mm	20211	1	front	76.8	0.008	1.148	1.302	0.012	
2441	39	Bluetooth	FHSS	10.0	9.40	-0.15	10 mm	20211	1	top	76.8	0.007	1.148	1.302	0.010	
2441	39	Bluetooth	FHSS	10.0	9.40	-0.10	10 mm	20211	1	left	76.8	0.009	1.148	1.302	0.013	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body								
Spatial Peak								1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population								averaged over 1 gram								

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 85 of 119

11.4 Standalone Phablet SAR Data

Table 11-35
UMTS/CDMA Phablet SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.										(W/kg)		(W/kg)		
1732.40	1412	UMTS 1750	RMC	25.0	24.91	0.04	4 mm	20187	1:1	back	1.140	1.021	1.164		
1732.40	1412	UMTS 1750	RMC	25.0	24.91	0.04	3 mm	20187	1:1	front	1.490	1.021	1.521		
1732.40	1412	UMTS 1750	RMC	25.0	24.91	-0.16	4 mm	20187	1:1	bottom	0.846	1.021	0.864		
1732.40	1412	UMTS 1750	RMC	25.0	24.91	0.05	3 mm	20187	1:1	left	1.250	1.021	1.276		
1712.40	1312	UMTS 1750	RMC	23.5	23.37	0.09	0 mm	20187	1:1	back	2.450	1.030	2.524		
1732.40	1412	UMTS 1750	RMC	23.5	23.40	0.08	0 mm	20187	1:1	back	2.490	1.023	2.547		
1752.60	1513	UMTS 1750	RMC	23.5	23.41	0.09	0 mm	20187	1:1	back	2.610	1.021	2.665		A45
1712.40	1312	UMTS 1750	RMC	23.5	23.37	0.02	0 mm	20187	1:1	front	2.380	1.030	2.451		
1732.40	1412	UMTS 1750	RMC	23.5	23.40	0.01	0 mm	20187	1:1	front	2.390	1.023	2.445		
1752.60	1513	UMTS 1750	RMC	23.5	23.41	0.01	0 mm	20187	1:1	front	2.470	1.021	2.522		
1712.40	1312	UMTS 1750	RMC	23.5	23.37	-0.12	0 mm	20187	1:1	bottom	2.060	1.030	2.122		
1732.40	1412	UMTS 1750	RMC	23.5	23.40	-0.12	0 mm	20187	1:1	bottom	2.060	1.023	2.107		
1752.60	1513	UMTS 1750	RMC	23.5	23.41	-0.17	0 mm	20187	1:1	bottom	2.100	1.021	2.144		
1712.40	1312	UMTS 1750	RMC	23.5	23.37	0.07	0 mm	20187	1:1	left	2.420	1.030	2.493		
1732.40	1412	UMTS 1750	RMC	23.5	23.40	0.07	0 mm	20187	1:1	left	2.480	1.023	2.537		
1752.60	1513	UMTS 1750	RMC	23.5	23.41	0.07	0 mm	20187	1:1	left	2.570	1.021	2.624		
1880.00	9400	UMTS 1900	RMC	25.0	24.98	-0.03	4 mm	20187	1:1	back	1.440	1.005	1.447		
1880.00	9400	UMTS 1900	RMC	25.0	24.98	-0.17	3 mm	20187	1:1	front	1.530	1.005	1.538		
1880.00	9400	UMTS 1900	RMC	25.0	24.98	0.00	4 mm	20187	1:1	bottom	0.723	1.005	0.727		
1880.00	9400	UMTS 1900	RMC	25.0	24.98	-0.01	3 mm	20187	1:1	left	1.170	1.005	1.176		
1852.40	9262	UMTS 1900	RMC	24.0	23.85	0.01	0 mm	20187	1:1	back	2.440	1.035	2.525		
1880.00	9400	UMTS 1900	RMC	24.0	23.92	0.00	0 mm	20187	1:1	back	2.510	1.019	2.558		A46
1907.60	9538	UMTS 1900	RMC	24.0	23.98	-0.01	0 mm	20187	1:1	back	2.330	1.005	2.342		
1852.40	9262	UMTS 1900	RMC	24.0	23.85	-0.16	0 mm	20187	1:1	front	2.450	1.035	2.536		
1880.00	9400	UMTS 1900	RMC	24.0	23.92	-0.17	0 mm	20187	1:1	front	2.260	1.019	2.303		
1907.60	9538	UMTS 1900	RMC	24.0	23.98	-0.18	0 mm	20187	1:1	front	2.050	1.005	2.060		
1880.00	9400	UMTS 1900	RMC	24.0	23.92	-0.03	0 mm	20187	1:1	bottom	1.650	1.019	1.681		
1880.00	9400	UMTS 1900	RMC	24.0	23.92	-0.07	0 mm	20187	1:1	left	1.860	1.019	1.895		
1880.00	9400	UMTS 1900	RMC	24.0	23.92	-0.03	0 mm	20187	1:1	back	2.480	1.019	2.527		
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.95	-0.01	4 mm	20187	1:1	back	1.610	1.012	1.629		
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.95	-0.12	3 mm	20187	1:1	front	1.410	1.012	1.427		
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.95	-0.06	4 mm	20187	1:1	bottom	0.624	1.012	0.631		
1880.00	600	PCS CDMA	EVDO Rev. 0	25.0	24.95	-0.17	3 mm	20187	1:1	left	0.967	1.012	0.979		
1851.25	25	PCS CDMA	EVDO Rev. 0	24.0	23.99	0.01	0 mm	20187	1:1	back	2.420	1.002	2.425		A47
1880.00	600	PCS CDMA	EVDO Rev. 0	24.0	24.00	0.00	0 mm	20187	1:1	back	2.060	1.000	2.060		
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.0	24.00	-0.12	0 mm	20187	1:1	back	1.850	1.000	1.850		
1851.25	25	PCS CDMA	EVDO Rev. 0	24.0	23.99	-0.13	0 mm	20187	1:1	front	2.400	1.002	2.405		
1880.00	600	PCS CDMA	EVDO Rev. 0	24.0	24.00	-0.13	0 mm	20187	1:1	front	2.100	1.000	2.100		
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.0	24.00	-0.10	0 mm	20187	1:1	front	1.930	1.000	1.930		
1880.00	600	PCS CDMA	EVDO Rev. 0	24.0	24.00	-0.06	0 mm	20187	1:1	bottom	1.460	1.000	1.460		
1880.00	600	PCS CDMA	EVDO Rev. 0	24.0	24.00	-0.13	0 mm	20187	1:1	left	1.680	1.000	1.680		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Phablet								
Spatial Peak							4.0 W/kg (mW/g)								
Uncontrolled Exposure/General Population							averaged over 10 grams								

Note: Blue entry represents variability measurement.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 86 of 119	

Table 11-36
LTE Phablet SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) [W/kg]	Scaling Factor	Reported SAR (10g) [W/kg]	Plot #
MHz	Ch.																	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	0.05	0	20195	QPSK	1	50	4 mm	back	1:1	1.400	1.026	1.436
1745.00	132322	Md	LTE Band 66 (AWS)	20	24.0	24.00	0.01	1	20195	QPSK	50	0	4 mm	back	1:1	1.100	1.000	1.100
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	-0.02	0	20195	QPSK	1	50	3 mm	front	1:1	1.720	1.026	1.765
1745.00	132322	Md	LTE Band 66 (AWS)	20	24.0	24.00	-0.02	1	20195	QPSK	50	0	3 mm	front	1:1	1.320	1.000	1.320
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	-0.03	0	20195	QPSK	1	50	4 mm	bottom	1:1	1.100	1.026	1.129
1745.00	132322	Md	LTE Band 66 (AWS)	20	24.0	24.00	-0.07	1	20195	QPSK	50	0	4 mm	bottom	1:1	0.845	1.000	0.845
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.0	24.89	0.00	0	20195	QPSK	1	50	3 mm	left	1:1	1.530	1.026	1.570
1745.00	132322	Md	LTE Band 66 (AWS)	20	24.0	24.00	-0.07	1	20195	QPSK	50	0	3 mm	left	1:1	1.220	1.000	1.220
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	23.45	-0.01	0	20203	QPSK	1	50	0 mm	back	1:1	2.550	1.012	2.581
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.47	-0.01	0	20203	QPSK	1	50	0 mm	back	1:1	2.600	1.007	2.618
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.42	-0.01	0	20203	QPSK	1	50	0 mm	back	1:1	2.660	1.019	2.711
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	23.49	-0.01	0	20203	QPSK	50	50	0 mm	back	1:1	2.630	1.002	2.635
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.50	-0.01	0	20203	QPSK	50	25	0 mm	back	1:1	2.690	1.000	2.690
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.07	0	20203	QPSK	50	0	0 mm	back	1:1	2.700	1.002	2.705
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.46	-0.01	0	20203	QPSK	100	0	0 mm	back	1:1	2.680	1.009	2.704
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	23.45	0.01	0	20203	QPSK	1	50	0 mm	front	1:1	2.250	1.012	2.277
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.47	0.02	0	20203	QPSK	1	50	0 mm	front	1:1	2.290	1.007	2.306
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.42	0.00	0	20203	QPSK	1	50	0 mm	front	1:1	2.370	1.019	2.415
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.5	23.49	0.00	0	20203	QPSK	50	50	0 mm	front	1:1	2.230	1.002	2.234
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.50	0.01	0	20203	QPSK	50	25	0 mm	front	1:1	2.350	1.000	2.350
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.01	0	20203	QPSK	50	0	0 mm	front	1:1	2.400	1.002	2.405
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.46	0.00	0	20203	QPSK	100	0	0 mm	front	1:1	2.340	1.009	2.361
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.47	-0.12	0	20203	QPSK	1	50	0 mm	bottom	1:1	1.920	1.007	1.933
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.50	-0.18	0	20203	QPSK	50	25	0 mm	bottom	1:1	1.890	1.000	1.890
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.47	-0.11	0	20203	QPSK	1	50	0 mm	left	1:1	1.900	1.007	1.913
1745.00	132322	Md	LTE Band 66 (AWS)	20	23.5	23.50	-0.07	0	20203	QPSK	50	25	0 mm	left	1:1	1.950	1.000	1.950
1770.00	132572	High	LTE Band 66 (AWS)	20	23.5	23.49	0.04	0	20203	QPSK	50	0	0 mm	back	1:1	2.530	1.002	2.535
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	0.00	0	20195	QPSK	1	50	4 mm	back	1:1	1.340	1.009	1.352
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.97	0.01	1	20195	QPSK	50	0	4 mm	back	1:1	1.010	1.007	1.017
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.05	0	20195	QPSK	1	50	3 mm	front	1:1	1.080	1.009	1.090
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.97	-0.06	1	20195	QPSK	50	0	3 mm	front	1:1	0.804	1.007	0.810
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.07	0	20195	QPSK	1	50	4 mm	bottom	1:1	0.671	1.009	0.677
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.97	-0.06	1	20195	QPSK	50	0	4 mm	bottom	1:1	0.474	1.007	0.477
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.0	24.96	-0.10	0	20195	QPSK	1	50	3 mm	left	1:1	1.090	1.009	1.100
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.97	-0.07	1	20195	QPSK	50	0	3 mm	left	1:1	0.836	1.007	0.842
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.0	23.92	0.01	0	20195	QPSK	1	50	0 mm	back	1:1	2.420	1.019	2.466
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.95	0.00	0	20195	QPSK	1	50	0 mm	back	1:1	2.210	1.012	2.237
1905.00	26590	High	LTE Band 25 (PCS)	20	24.0	23.72	0.01	0	20195	QPSK	1	50	0 mm	back	1:1	2.090	1.067	2.230
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.0	23.95	-0.01	0	20195	QPSK	50	25	0 mm	back	1:1	2.470	1.012	2.500
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.97	0.00	0	20195	QPSK	50	0	0 mm	back	1:1	2.350	1.007	2.366
1905.00	26590	High	LTE Band 25 (PCS)	20	24.0	23.94	0.01	0	20195	QPSK	50	25	0 mm	back	1:1	2.130	1.014	2.160
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.94	0.00	0	20195	QPSK	100	0	0 mm	back	1:1	2.250	1.014	2.282
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.0	23.92	-0.12	0	20195	QPSK	1	50	0 mm	front	1:1	2.180	1.019	2.221
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.95	-0.14	0	20195	QPSK	1	50	0 mm	front	1:1	1.990	1.012	2.014
1905.00	26590	High	LTE Band 25 (PCS)	20	24.0	23.72	-0.16	0	20195	QPSK	1	50	0 mm	front	1:1	1.790	1.067	1.910
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.0	23.95	-0.12	0	20195	QPSK	50	25	0 mm	front	1:1	2.140	1.012	2.186
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.97	-0.18	0	20195	QPSK	50	0	0 mm	front	1:1	2.120	1.007	2.135
1905.00	26590	High	LTE Band 25 (PCS)	20	24.0	23.94	-0.13	0	20195	QPSK	50	25	0 mm	front	1:1	1.820	1.014	1.845
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.94	-0.11	0	20195	QPSK	100	0	0 mm	front	1:1	1.940	1.014	1.967
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.95	-0.07	0	20195	QPSK	1	50	0 mm	bottom	1:1	1.340	1.012	1.356
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.97	-0.07	0	20195	QPSK	50	0	0 mm	bottom	1:1	1.380	1.007	1.390
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.95	-0.16	0	20195	QPSK	1	50	0 mm	left	1:1	1.630	1.012	1.650
1882.50	26365	Md	LTE Band 25 (PCS)	20	24.0	23.97	-0.13	0	20195	QPSK	50	0	0 mm	left	1:1	1.660	1.007	1.672
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Phablet										
Spatial Peak								4.0 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 10 grams										

Note: Blue entry represents variability measurement.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 87 of 119	

Table 11-37
WLAN Phablet SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5260	52	802.11a	OFDM	20	20.0	19.36	0.09	0 mm	20211	6	back	96.9	11.035	1.260	1.159	1.032	1.507	A50
5280	56	802.11a	OFDM	20	20.0	19.34	0.18	0 mm	20211	6	back	96.9	9.135	1.140	1.164	1.032	1.369	
5300	60	802.11a	OFDM	20	20.0	19.31	-0.16	0 mm	20211	6	back	96.9	8.818	1.130	1.172	1.032	1.367	
5260	52	802.11a	OFDM	20	20.0	19.36	0.12	0 mm	20211	6	front	96.9	3.292	0.503	1.159	1.032	0.602	
5260	52	802.11a	OFDM	20	20.0	19.36	0.12	0 mm	20211	6	top	96.9	9.564	0.972	1.159	1.032	1.163	
5260	52	802.11a	OFDM	20	20.0	19.36	0.17	0 mm	20211	6	left	96.9	2.281	0.259	1.159	1.032	0.310	
5520	104	802.11a	OFDM	20	20.0	19.76	-0.16	0 mm	20211	6	back	96.9	7.202	0.933	1.057	1.032	1.018	
5520	104	802.11a	OFDM	20	20.0	19.76	0.14	0 mm	20211	6	front	96.9	3.016	0.437	1.057	1.032	0.477	
5520	104	802.11a	OFDM	20	20.0	19.76	0.12	0 mm	20211	6	top	96.9	7.936	0.733	1.057	1.032	0.800	
5520	104	802.11a	OFDM	20	20.0	19.76	-0.14	0 mm	20211	6	left	96.9	1.879	0.188	1.057	1.032	0.205	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams										

11.5 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
- Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
- Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.
- This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
- Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2-ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 88 of 119	

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
4. GPRS was additionally evaluated for head and body-worn exposure conditions to address possible VoIP scenarios.

CDMA Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 89 of 119

4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 14 for linearity results.
8. For LTE Band 41, per FCC guidance, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.

WLAN Notes:

1. For held-to-ear, hotspot, and phablet operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.7.6 for more information.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

Bluetooth Notes

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.6 for the time domain plot and calculation for the duty factor of the device.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 90 of 119

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-1
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.424	0.830	1.254
	GSM/GPRS 1900	0.263	0.830	1.093
	UMTS 850	0.294	0.830	1.124
	UMTS 1750	0.335	0.830	1.165
	UMTS 1900	0.527	0.830	1.357
	CDMA/EVDO BC10 (§90S)	0.357	0.830	1.187
	CDMA/EVDO BC0 (§22H)	0.488	0.830	1.318
	PCS CDMA/EVDO	0.660	0.830	1.490
	LTE Band 71	0.151	0.830	0.981
	LTE Band 12	0.235	0.830	1.065
	LTE Band 13	0.286	0.830	1.116
	LTE Band 26 (Cell)	0.386	0.830	1.216
	LTE Band 66 (AWS)	0.407	0.830	1.237
	LTE Band 25 (PCS)	0.435	0.830	1.265
	LTE Band 41	0.025	0.830	0.855

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 91 of 119

Table 12-2
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.424	0.742	1.166
	GSM/GPRS 1900	0.263	0.742	1.005
	UMTS 850	0.294	0.742	1.036
	UMTS 1750	0.335	0.742	1.077
	UMTS 1900	0.527	0.742	1.269
	CDMA/EVDO BC10 (§90S)	0.357	0.742	1.099
	CDMA/EVDO BC0 (§22H)	0.488	0.742	1.230
	PCS CDMA/EVDO	0.660	0.742	1.402
	LTE Band 71	0.151	0.742	0.893
	LTE Band 12	0.235	0.742	0.977
	LTE Band 13	0.286	0.742	1.028
	LTE Band 26 (Cell)	0.386	0.742	1.128
	LTE Band 66 (AWS)	0.407	0.742	1.149
	LTE Band 25 (PCS)	0.435	0.742	1.177
	LTE Band 41	0.025	0.742	0.767

Table 12-3
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.424	0.075	0.499
	GSM/GPRS 1900	0.263	0.075	0.338
	UMTS 850	0.294	0.075	0.369
	UMTS 1750	0.335	0.075	0.410
	UMTS 1900	0.527	0.075	0.602
	CDMA/EVDO BC10 (§90S)	0.357	0.075	0.432
	CDMA/EVDO BC0 (§22H)	0.488	0.075	0.563
	PCS CDMA/EVDO	0.660	0.075	0.735
	LTE Band 71	0.151	0.075	0.226
	LTE Band 12	0.235	0.075	0.310
	LTE Band 13	0.286	0.075	0.361
	LTE Band 26 (Cell)	0.386	0.075	0.461
	LTE Band 66 (AWS)	0.407	0.075	0.482
	LTE Band 25 (PCS)	0.435	0.075	0.510
	LTE Band 41	0.025	0.075	0.100

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 92 of 119	

Table 12-4
Simultaneous Transmission Scenario with 5 GHz WLAN and Bluetooth (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	GSM/GPRS 850	0.424	0.742	0.075	1.241
	GSM/GPRS 1900	0.263	0.742	0.075	1.080
	UMTS 850	0.294	0.742	0.075	1.111
	UMTS 1750	0.335	0.742	0.075	1.152
	UMTS 1900	0.527	0.742	0.075	1.344
	CDMA/EVDO BC10 (§90S)	0.357	0.742	0.075	1.174
	CDMA/EVDO BC0 (§22H)	0.488	0.742	0.075	1.305
	PCS CDMA/EVDO	0.660	0.742	0.075	1.477
	LTE Band 71	0.151	0.742	0.075	0.968
	LTE Band 12	0.235	0.742	0.075	1.052
	LTE Band 13	0.286	0.742	0.075	1.103
	LTE Band 26 (Cell)	0.386	0.742	0.075	1.203
	LTE Band 66 (AWS)	0.407	0.742	0.075	1.224
	LTE Band 25 (PCS)	0.435	0.742	0.075	1.252
	LTE Band 41	0.025	0.742	0.075	0.842

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 93 of 119	

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	1.111	0.306	1.417
	GSM/GPRS 1900	0.381	0.306	0.687
	UMTS 850	0.721	0.306	1.027
	UMTS 1750	0.704	0.306	1.010
	UMTS 1900	1.085	0.306	1.391
	CDMA BC10 (§90S)	0.771	0.306	1.077
	CDMA BC0 (§22H)	0.686	0.306	0.992
	PCS CDMA	1.081	0.306	1.387
	LTE Band 71	0.246	0.306	0.552
	LTE Band 12	0.401	0.306	0.707
	LTE Band 13	0.538	0.306	0.844
	LTE Band 26 (Cell)	0.824	0.306	1.130
	LTE Band 66 (AWS)	0.853	0.306	1.159
	LTE Band 25 (PCS)	0.963	0.306	1.269
	LTE Band 41	0.669	0.306	0.975

Table 12-6
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Body-Worn	GSM/GPRS 850	1.111	0.545	See Note 1	0.01
	GSM/GPRS 1900	0.381	0.545	0.926	N/A
	UMTS 850	0.721	0.545	1.266	N/A
	UMTS 1750	0.704	0.545	1.249	N/A
	UMTS 1900	1.085	0.545	See Note 1	0.01
	CDMA BC10 (§90S)	0.771	0.545	1.316	N/A
	CDMA BC0 (§22H)	0.686	0.545	1.231	N/A
	PCS CDMA	1.081	0.545	See Note 1	0.01
	LTE Band 71	0.246	0.545	0.791	N/A
	LTE Band 12	0.401	0.545	0.946	N/A
	LTE Band 13	0.538	0.545	1.083	N/A
	LTE Band 26 (Cell)	0.824	0.545	1.369	N/A
	LTE Band 66 (AWS)	0.853	0.545	1.398	N/A
	LTE Band 25 (PCS)	0.963	0.545	1.508	N/A
	LTE Band 41	0.669	0.545	1.214	N/A

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 94 of 119

Table 12-7
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	1.111	0.013	1.124
	GSM/GPRS 1900	0.381	0.013	0.394
	UMTS 850	0.721	0.013	0.734
	UMTS 1750	0.704	0.013	0.717
	UMTS 1900	1.085	0.013	1.098
	CDMA BC10 (§90S)	0.771	0.013	0.784
	CDMA BC0 (§22H)	0.686	0.013	0.699
	PCS CDMA	1.081	0.013	1.094
	LTE Band 71	0.246	0.013	0.259
	LTE Band 12	0.401	0.013	0.414
	LTE Band 13	0.538	0.013	0.551
	LTE Band 26 (Cell)	0.824	0.013	0.837
	LTE Band 66 (AWS)	0.853	0.013	0.866
	LTE Band 25 (PCS)	0.963	0.013	0.976
	LTE Band 41	0.669	0.013	0.682

Table 12-8
Simultaneous Transmission Scenario with 5 GHz WLAN and Bluetooth (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR		
		1	2	3	1+2+3	1+2	1+3	2+3
Body-Worn	GSM/GPRS 850	1.111	0.545	0.013	See Note 1	0.01	0.01	0.03
	GSM/GPRS 1900	0.381	0.545	0.013	0.939	N/A	N/A	N/A
	UMTS 850	0.721	0.545	0.013	1.279	N/A	N/A	N/A
	UMTS 1750	0.704	0.545	0.013	1.262	N/A	N/A	N/A
	UMTS 1900	1.085	0.545	0.013	See Note 1	0.01	0.01	0.03
	CDMA BC10 (§90S)	0.771	0.545	0.013	1.329	N/A	N/A	N/A
	CDMA BC0 (§22H)	0.686	0.545	0.013	1.244	N/A	N/A	N/A
	PCS CDMA	1.081	0.545	0.013	See Note 1	0.01	0.01	0.03
	LTE Band 71	0.246	0.545	0.013	0.804	N/A	N/A	N/A
	LTE Band 12	0.401	0.545	0.013	0.959	N/A	N/A	N/A
	LTE Band 13	0.538	0.545	0.013	1.096	N/A	N/A	N/A
	LTE Band 26 (Cell)	0.824	0.545	0.013	1.382	N/A	N/A	N/A
	LTE Band 66 (AWS)	0.853	0.545	0.013	1.411	N/A	N/A	N/A
	LTE Band 25 (PCS)	0.963	0.545	0.013	1.521	N/A	N/A	N/A
	LTE Band 41	0.669	0.545	0.013	1.227	N/A	N/A	N/A

Notes:

- No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 95 of 119

12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

Table 12-9
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	1.111	0.324	1.435
	GPRS 1900	0.381	0.324	0.705
	UMTS 850	0.721	0.324	1.045
	UMTS 1750	0.704	0.324	1.028
	UMTS 1900	1.085	0.324	1.409
	EVDO BC10 (§90S)	0.730	0.324	1.054
	EVDO BC0 (§22H)	0.865	0.324	1.189
	PCS EVDO	0.943	0.324	1.267
	LTE Band 71	0.265	0.324	0.589
	LTE Band 12	0.401	0.324	0.725
	LTE Band 13	0.538	0.324	0.862
	LTE Band 26 (Cell)	0.824	0.324	1.148
	LTE Band 66 (AWS)	0.883	0.324	1.207
	LTE Band 25 (PCS)	0.963	0.324	1.287
	LTE Band 41	0.978	0.324	1.302

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 96 of 119

Table 12-10
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	
		1	2	1+2	
Hotspot SAR	GPRS 850	1.111	0.848	See Table Below	
	GPRS 1900	0.381	0.848	1.229	
	UMTS 850	0.721	0.848	1.569	
	UMTS 1750	0.704	0.848	1.552	
	UMTS 1900	1.085	0.848	See Table Below	
	EVDO BC10 (§90S)	0.730	0.848	1.578	
	EVDO BC0 (§22H)	0.865	0.848	See Table Below	
	PCS EVDO	0.943	0.848	See Table Below	
	LTE Band 71	0.265	0.848	1.113	
	LTE Band 12	0.401	0.848	1.249	
	LTE Band 13	0.538	0.848	1.386	
	LTE Band 26 (Cell)	0.824	0.848	See Table Below	
	LTE Band 66 (AWS)	0.883	0.848	See Table Below	
	LTE Band 25 (PCS)	0.963	0.848	See Table Below	
	LTE Band 41	0.978	0.848	See Table Below	

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Hotspot SAR	Back	1.111	0.526	See Note 1	0.01	Hotspot SAR	Back	1.085	0.526	See Note 1	0.01
	Front	0.604	0.337	0.941	N/A		Front	0.837	0.337	1.174	N/A
	Top	-	0.848	0.848	N/A		Top	-	0.848	0.848	N/A
	Bottom	0.760	-	0.760	N/A		Bottom	0.563	-	0.563	N/A
	Right	0.515	-	0.515	N/A		Right	-	-	0.000	N/A
	Left	0.186	0.230	0.416	N/A		Left	0.725	0.230	0.955	N/A

Simult Tx	Configuration	EVDO BC0 (§22H) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.865	0.526	1.391	Hotspot SAR	Back	0.943	0.526	1.469
	Front	0.566	0.337	0.903		Front	0.745	0.337	1.082
	Top	-	0.848	0.848		Top	-	0.848	0.848
	Bottom	0.544	-	0.544		Bottom	0.441	-	0.441
	Right	0.484	-	0.484		Right	-	-	0.000
	Left	0.168	0.230	0.398		Left	0.659	0.230	0.889

Simult Tx	Configuration	LTE Band 26 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.824	0.526	1.350	Hotspot SAR	Back	0.853	0.526	1.379
	Front	0.589	0.337	0.926		Front	0.735	0.337	1.072
	Top	-	0.848	0.848		Top	-	0.848	0.848
	Bottom	0.543	-	0.543		Bottom	0.676	-	0.676
	Right	0.484	-	0.484		Right	-	-	0.000
	Left	0.159	0.230	0.389		Left	0.883	0.230	1.113

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 97 of 119

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.963	0.526	1.489	Hotspot SAR	Back	0.669	0.526	1.195
	Front	0.795	0.337	1.132		Front	0.417	0.337	0.754
	Top	-	0.848	0.848		Top	-	0.848	0.848
	Bottom	0.555	-	0.555		Bottom	0.978	-	0.978
	Right	-	-	0.000		Right	0.069	-	0.069
	Left	0.750	0.230	0.980		Left	0.020	0.230	0.250

Table 12-11
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	1.111	0.013	1.124
	GPRS 1900	0.381	0.013	0.394
	UMTS 850	0.721	0.013	0.734
	UMTS 1750	0.704	0.013	0.717
	UMTS 1900	1.085	0.013	1.098
	EVDO BC10 (§90S)	0.730	0.013	0.743
	EVDO BC0 (§22H)	0.865	0.013	0.878
	PCS EVDO	0.943	0.013	0.956
	LTE Band 71	0.265	0.013	0.278
	LTE Band 12	0.401	0.013	0.414
	LTE Band 13	0.538	0.013	0.551
	LTE Band 26 (Cell)	0.824	0.013	0.837
	LTE Band 66 (AWS)	0.883	0.013	0.896
	LTE Band 25 (PCS)	0.963	0.013	0.976
	LTE Band 41	0.978	0.013	0.991

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 98 of 119	

Table 12-12
Simultaneous Transmission Scenario with 5GHz WLAN and Bluetooth (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	1.111	0.013	0.848	See Table Below
	GPRS 1900	0.381	0.013	0.848	1.242
	UMTS 850	0.721	0.013	0.848	1.582
	UMTS 1750	0.704	0.013	0.848	1.565
	UMTS 1900	1.085	0.013	0.848	See Table Below
	EVDO BC10 (§90S)	0.730	0.013	0.848	1.591
	EVDO BC0 (§22H)	0.865	0.013	0.848	See Table Below
	PCS EVDO	0.943	0.013	0.848	See Table Below
	LTE Band 71	0.265	0.013	0.848	1.126
	LTE Band 12	0.401	0.013	0.848	1.262
	LTE Band 13	0.538	0.013	0.848	1.399
	LTE Band 26 (Cell)	0.824	0.013	0.848	See Table Below
	LTE Band 66 (AWS)	0.883	0.013	0.848	See Table Below
	LTE Band 25 (PCS)	0.963	0.013	0.848	See Table Below
	LTE Band 41	0.978	0.013	0.848	See Table Below

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR		
		1	2	3	1+2+3	1+2	1+3	2+3
Hotspot SAR	Back	1.111	0.526	0.013	See Note 1	0.01	0.01	0.03
	Front	0.604	0.337	0.012	0.953	N/A	N/A	N/A
	Top	-	0.848	0.010	0.858	N/A	N/A	N/A
	Bottom	0.760	-	-	0.760	N/A	N/A	N/A
	Right	0.515	-	-	0.515	N/A	N/A	N/A
	Left	0.186	0.230	0.013	0.429	N/A	N/A	N/A
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	SPLSR		
		1	2	3	1+2+3	1+2	1+3	2+3
Hotspot SAR	Back	1.085	0.526	0.013	See Note 1	0.01	0.01	0.03
	Front	0.837	0.337	0.012	1.186	N/A	N/A	N/A
	Top	-	0.848	0.010	0.858	N/A	N/A	N/A
	Bottom	0.563	-	-	0.563	N/A	N/A	N/A
	Right	-	-	-	-	N/A	N/A	N/A
	Left	0.725	0.230	0.013	0.968	N/A	N/A	N/A

Simult Tx	Configuration	EVDO BC0 (§22H) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.865	0.526	0.013	1.404	Hotspot SAR	Back	0.943	0.526	0.013	1.482
	Front	0.566	0.337	0.012	0.915		Front	0.745	0.337	0.012	1.094
	Top	-	0.848	0.010	0.858		Top	-	0.848	0.010	0.858
	Bottom	0.544	-	-	0.544		Bottom	0.441	-	-	0.441
	Right	0.484	-	-	0.484		Right	-	-	-	-
	Left	0.168	0.230	0.013	0.411		Left	0.659	0.230	0.013	0.902

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 99 of 119

Simult Tx	Configuration	LTE Band 26 (Cell) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.824	0.526	0.013	1.363	Hotspot SAR	Back	0.853	0.526	0.013	1.392
	Front	0.589	0.337	0.012	0.938		Front	0.735	0.337	0.012	1.084
	Top	-	0.848	0.010	0.858		Top	-	0.848	0.010	0.858
	Bottom	0.543	-	-	0.543		Bottom	0.676	-	-	0.676
	Right	0.484	-	-	0.484		Right	-	-	-	-
	Left	0.159	0.230	0.013	0.402		Left	0.883	0.230	0.013	1.126
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.963	0.526	0.013	1.502	Hotspot SAR	Back	0.669	0.526	0.013	1.208
	Front	0.795	0.337	0.012	1.144		Front	0.417	0.337	0.012	0.766
	Top	-	0.848	0.010	0.858		Top	-	0.848	0.010	0.858
	Bottom	0.555	-	-	0.555		Bottom	0.978	-	-	0.978
	Right	-	-	-	-		Right	0.069	-	-	0.069
	Left	0.750	0.230	0.013	0.993		Left	0.020	0.230	0.013	0.263

Notes:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 100 of 119

12.6 Phablet Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore, no further analysis beyond the tables included in this section was required to determine that possible simultaneous transmission scenarios would not exceed the SAR limit.

For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.

Table 12-13
Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	
		1	2	1+2	
Phablet SAR	UMTS 1750	2.665	1.507	See Table Below	
	UMTS 1900	2.558	1.507	See Table Below	
	PCS EVDO	2.425	1.507	3.932	
	LTE Band 66 (AWS)	2.711	1.507	See Table Below	
	LTE Band 25 (PCS)	2.500	1.507	See Table Below	

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	2.665	1.507	See Note 1	0.06	Phablet SAR	Back	2.558	1.507	See Note 1	0.06
	Front	2.522	0.602	3.124	N/A		Front	2.536	0.602	3.138	N/A
	Top	-	1.163	1.163	N/A		Top	-	1.163	1.163	N/A
	Bottom	2.144	-	2.144	N/A		Bottom	1.681	-	1.681	N/A
	Left	2.624	0.310	2.934	N/A		Left	1.895	0.310	2.205	N/A

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	2.711	1.507	See Note 1	0.06	Phablet SAR	Back	2.500	1.507	See Note 1	0.06
	Front	2.415	0.602	3.017	N/A		Front	2.221	0.602	2.823	N/A
	Top	-	1.163	1.163	N/A		Top	-	1.163	1.163	N/A
	Bottom	1.933	-	1.933	N/A		Bottom	1.390	-	1.390	N/A
	Left	1.950	0.310	2.260	N/A		Left	1.672	0.310	1.982	N/A

Notes:

- No evaluation was performed to determine the aggregate 10g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.10 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 101 of 119

12.7 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g and 4 W/kg for 10g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 for 1g and ≤ 0.10 for 10g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} \text{ (Body-Worn, Hotspot, Phablet)}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

12.7.1 Body-Worn Back Side SPLSR Evaluation and Analysis

Table 12-14
Peak SAR Locations for Body-Worn Back Side


Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
Bluetooth	6.20	69.20	0.013
5 GHz WLAN	-5.00	78.00	0.545
GPRS 850	-25.00	-85.50	1.111
UMTS 1900	-2.50	-63.00	1.085
PCS CDMA	-1.00	-70.50	1.081

Table 12-15
Body-Worn Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	$(a+b)^{1.5}/D_{a-b}$	
5 GHz WLAN	Bluetooth	0.545	0.013	0.558	14.24	0.03	1, 2, 3
GPRS 850	Bluetooth	1.111	0.013	1.124	157.81	0.01	1
GPRS 850	5 GHz WLAN	1.111	0.545	1.656	164.72	0.01	
UMTS 1900	Bluetooth	1.085	0.013	1.098	132.49	0.01	2
UMTS 1900	5 GHz WLAN	1.085	0.545	1.63	141.02	0.01	
PCS CDMA	Bluetooth	1.081	0.013	1.094	139.89	0.01	3
PCS CDMA	5 GHz WLAN	1.081	0.545	1.626	148.55	0.01	

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 102 of 119

Table 12-16
Body-Worn Back Side SAR to Peak Location Separation Ratio Plots

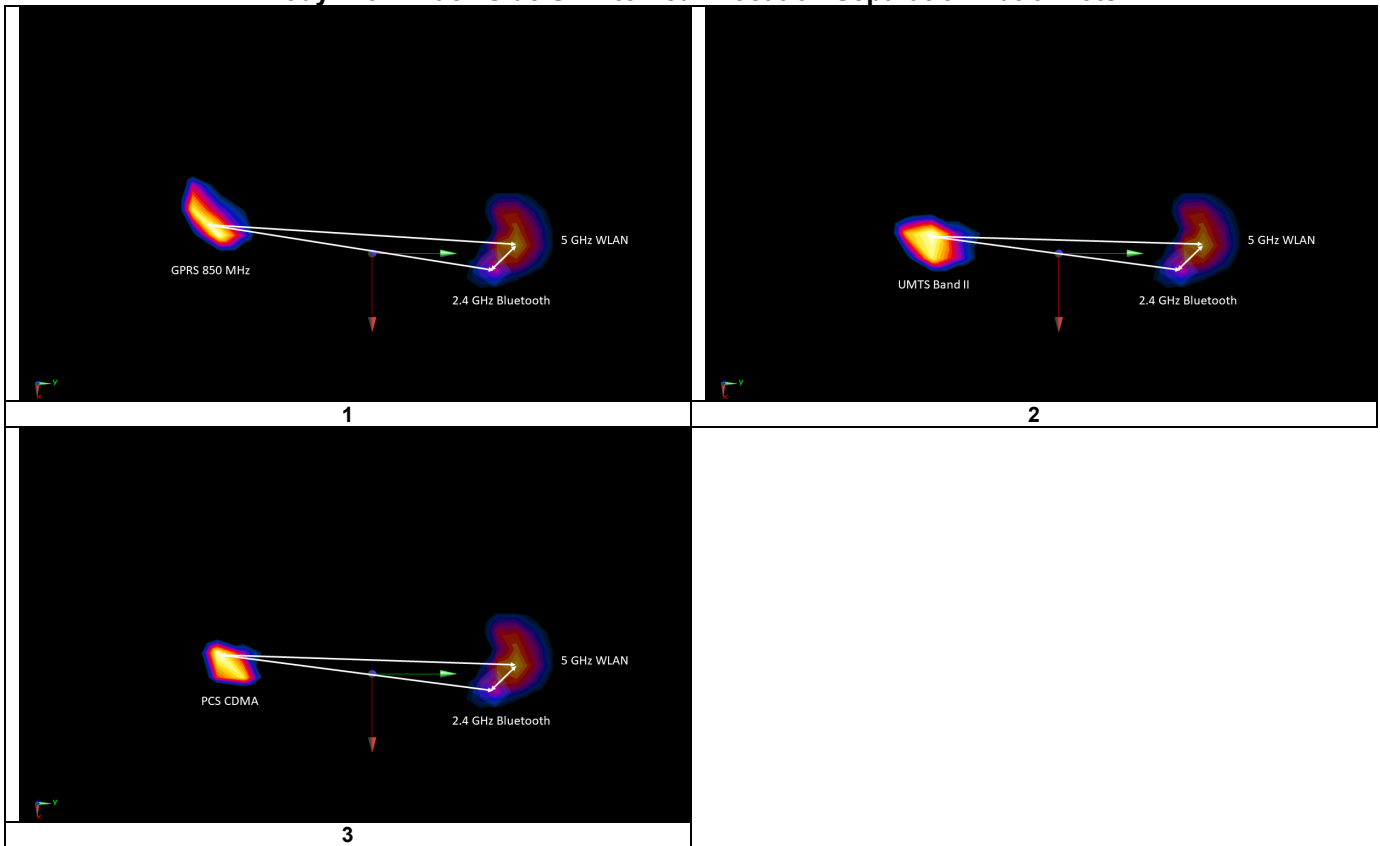

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 103 of 119

12.7.2 Hotspot Back Side SPLSR Evaluation and Analysis


Table 12-17
Peak SAR Locations for Hotspot Back Side

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
Bluetooth	6.20	69.20	0.013
5 GHz WLAN	-5.00	78.00	0.526
GPRS 850	-25.00	-85.50	1.111
UMTS 1900	-2.50	-63.00	1.085

Table 12-18
Hotspot Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	(a+b) ^{1.5} /D _{a-b}	
Bluetooth	5 GHz WLAN	0.013	0.526	0.539	14.24	0.03	1, 2
GPRS 850	5 GHz WLAN	1.111	0.526	1.637	164.72	0.01	1
GPRS 850	Bluetooth	1.111	0.013	1.124	157.81	0.01	
UMTS 1900	5 GHz WLAN	1.085	0.526	1.611	141.02	0.01	2
UMTS 1900	Bluetooth	1.085	0.013	1.098	132.49	0.01	

Table 12-19
Hotspot Back Side SAR to Peak Location Separation Ratio Plots

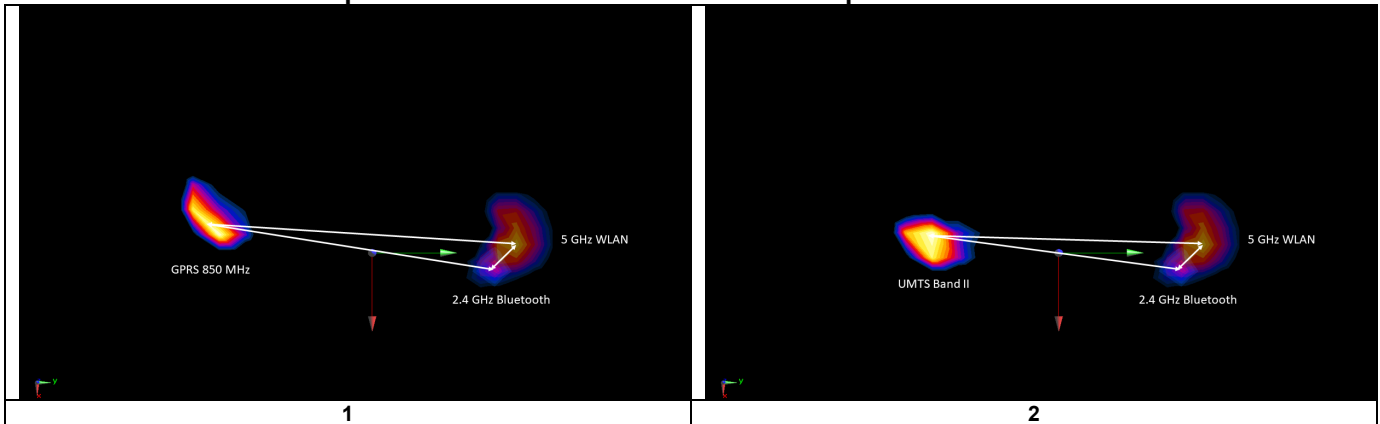

FCC ID: ZNFL555DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 104 of 119

12.7.3 Phablet Back Side SPLSR Evaluation and Analysis


Table 12-20
Peak SAR Locations for Phablet Back Side

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5 GHz WLAN	-5.00	75.00	1.507
UMTS 1750	-1.00	-72.00	2.665
UMTS 1900	-2.50	-61.00	2.558
LTE Band 66 (AWS)	-1.00	-80.00	2.705
LTE Band 25 (PCS)	-1.00	-70.50	2.500

Table 12-21
Phablet Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	$(a+b)^{1.5}/D_{a-b}$	
UMTS 1750	5 GHz WLAN	2.665	1.507	4.172	147.05	0.06	1
UMTS 1900	5 GHz WLAN	2.558	1.507	4.065	136.02	0.06	2
LTE Band 66 (AWS)	5 GHz WLAN	2.705	1.507	4.212	155.05	0.06	3
LTE Band 25 (PCS)	5 GHz WLAN	2.500	1.507	4.007	145.55	0.06	4

Table 12-22
Phablet Back Side SAR to Peak Location Separation Ratio Plots

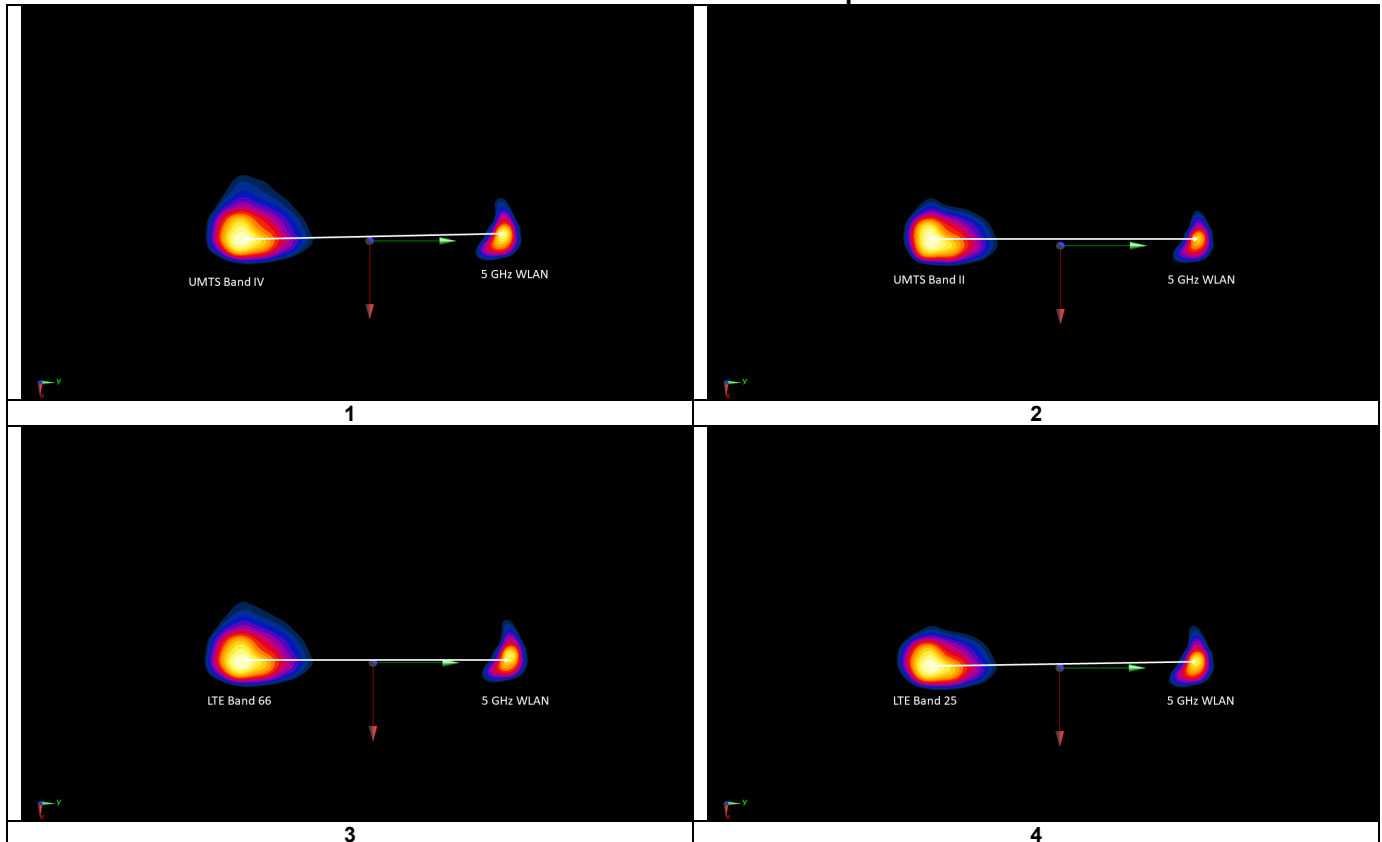

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 105 of 119

12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 106 of 119

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Table 13-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	# of Time Slots	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
835	848.80	251	GSM 850	GPRS	3	back	10 mm	1.090	1.090	1.00	N/A	N/A	N/A	N/A
1750	1745.00	132322	LTE Band 66 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 50 RB Offset	N/A	left	10 mm	0.851	0.832	1.02	N/A	N/A	N/A	N/A
1900	1880.00	9400	UMTS 1900	RMC	N/A	back	10 mm	1.080	1.050	1.03	N/A	N/A	N/A	N/A
2450	2506.00	39750	LTE Band 41 PC2, 20 MHz Bandwidth	QPSK, 1 RB, 50 RB Offset	N/A	bottom	10 mm	0.978	0.928	1.05	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body							
Spatial Peak							1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population							averaged over 1 gram							

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 107 of 119

Table 13-2
Phablet SAR Measurement Variability Results

PHABLET VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1770.00	132572	LTE Band 66 (AWS), 20 MHz Bandwidth	QPSK, 50 RB, 0 RB Offset	back	0 mm	2.700	2.530	1.07	N/A	N/A	N/A	N/A
1900	1880.00	9400	UMTS 1900	RMC	back	0 mm	2.510	2.480	1.01	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Phablet 4.0 W/kg (mW/g) averaged over 10 grams							

13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g and <3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 108 of 119	

14 ADDITIONAL TESTING PER FCC GUIDANCE


14.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes was < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

LTE Band 41 SAR testing with power class 2 at the highest power and available duty factor was additionally performed for the power class 3 configuration with the highest SAR for each exposure condition.

Table 14-1
LTE Band 41 Standalone Head Linearity Data

Mode/Band	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25	26.7
Measured Output Power (dBm)	24.75	26.7
Measured SAR (W/kg)	0.022	0.025
Measured Power (mW)	298.54	467.74
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	188.97	202.53
% deviation from expected linearity		6.03%

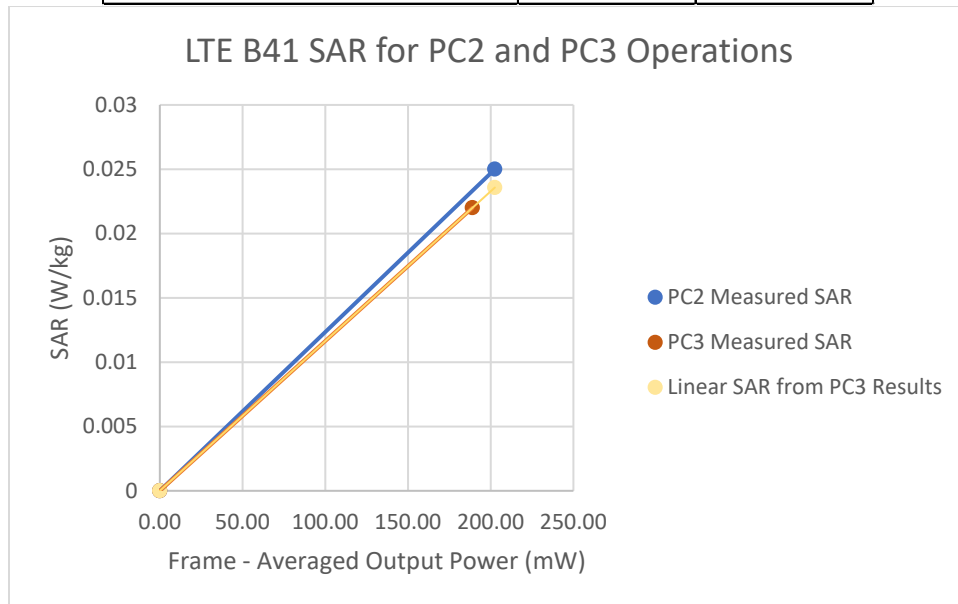

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 109 of 119

Table 14-2
LTE Band 41 ULCA Head Linearity Data

Mode/Band	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25	26.7
Measured Output Power (dBm)	24.8	26.39
Measured SAR (W/kg)	0.0138	0.0129
Measured Power (mW)	302.00	435.51
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	191.16	188.58
% deviation from expected linearity		-5.24%

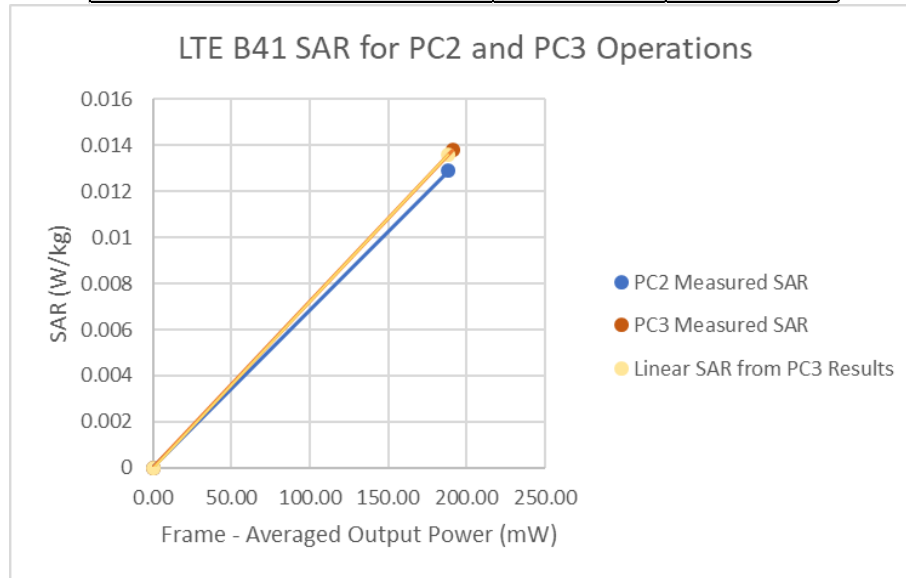


Figure 14-2
LTE Band 41 ULCA Head Linearity

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 110 of 119	

Table 14-3
LTE Band 41 Standalone Body-Worn Linearity Data

Mode/Band	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25	26.7
Measured Output Power (dBm)	24.75	26.7
Measured SAR (W/kg)	0.583	0.669
Measured Power (mW)	298.54	467.74
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	188.97	202.53
% deviation from expected linearity		7.07%

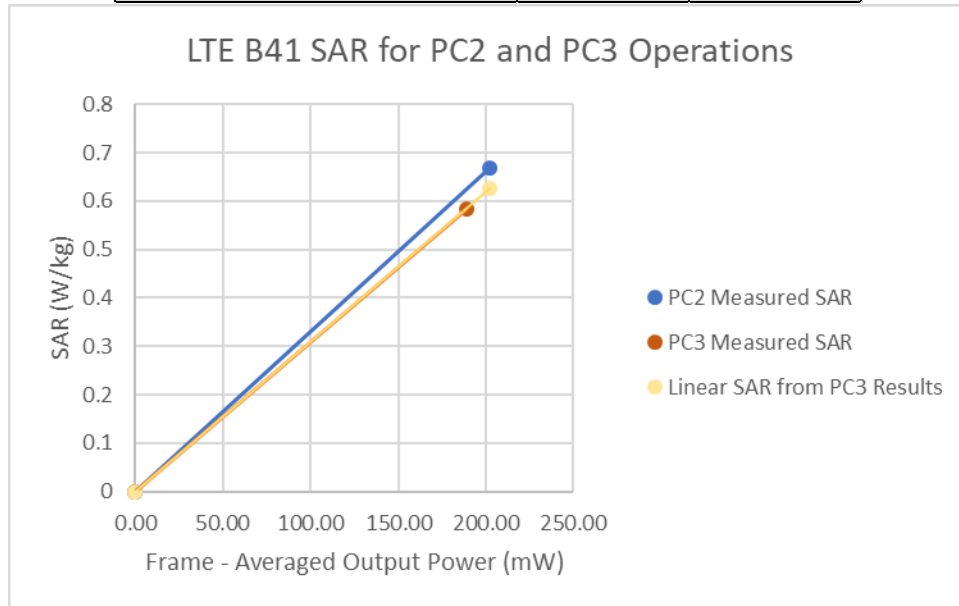


Figure 14-3
LTE Band 41 Standalone Body-Worn Linearity

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 111 of 119

Table 14-4
LTE Band 41 ULCA Body-Worn Linearity Data

Mode/Band	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25	26.7
Measured Output Power (dBm)	24.8	26.39
Measured SAR (W/kg)	0.592	0.532
Measured Power (mW)	302.00	435.51
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	191.16	188.58
% deviation from expected linearity		-8.90%

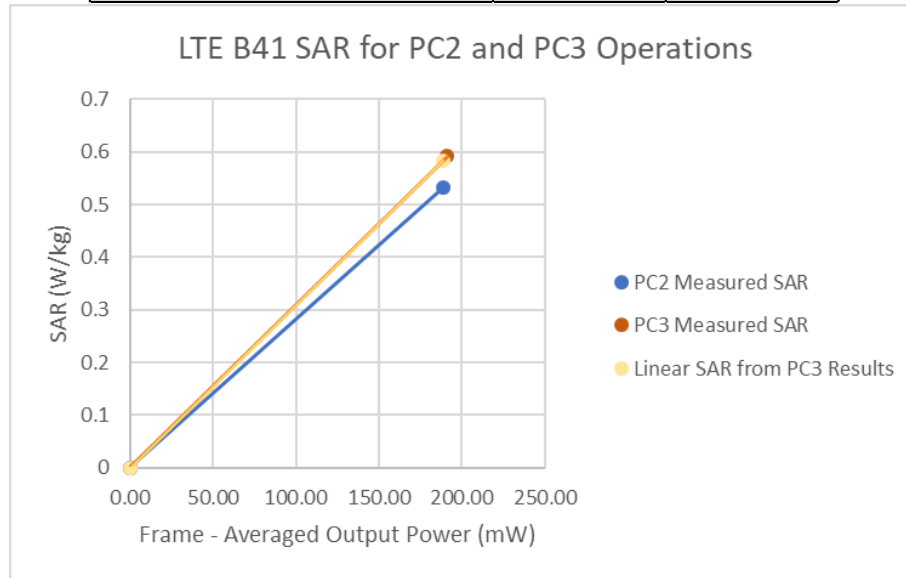


Figure 14-4
LTE Band 41 ULCA Body-Worn Linearity

FCC ID: ZNFL555DL	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 112 of 119	

Table 14-5
LTE Band 41 Standalone Hotspot Linearity Data

Mode/Band	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25	26.7
Measured Output Power (dBm)	24.75	26.7
Measured SAR (W/kg)	0.831	0.978
Measured Power (mW)	298.54	467.74
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	188.97	202.53
% deviation from expected linearity		9.81%

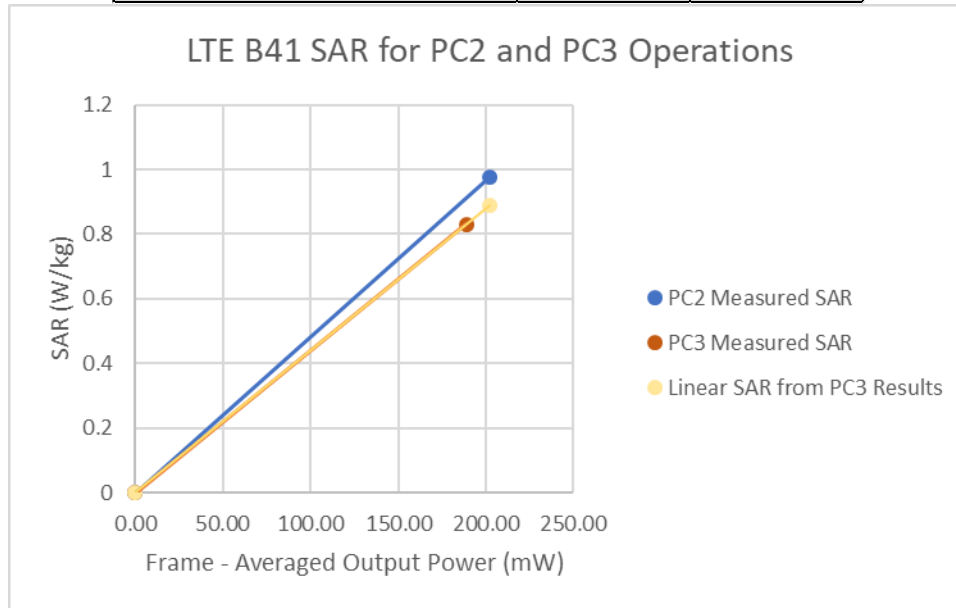


Figure 14-5
LTE Band 41 Standalone Hotspot Linearity

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 113 of 119

Table 14-6
LTE Band 41 ULCA Hotspot Linearity Data

Mode/Band	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25	26.7
Measured Output Power (dBm)	24.8	26.39
Measured SAR (W/kg)	0.81	0.79
Measured Power (mW)	302.00	435.51
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	191.16	188.58
% deviation from expected linearity		-1.13%

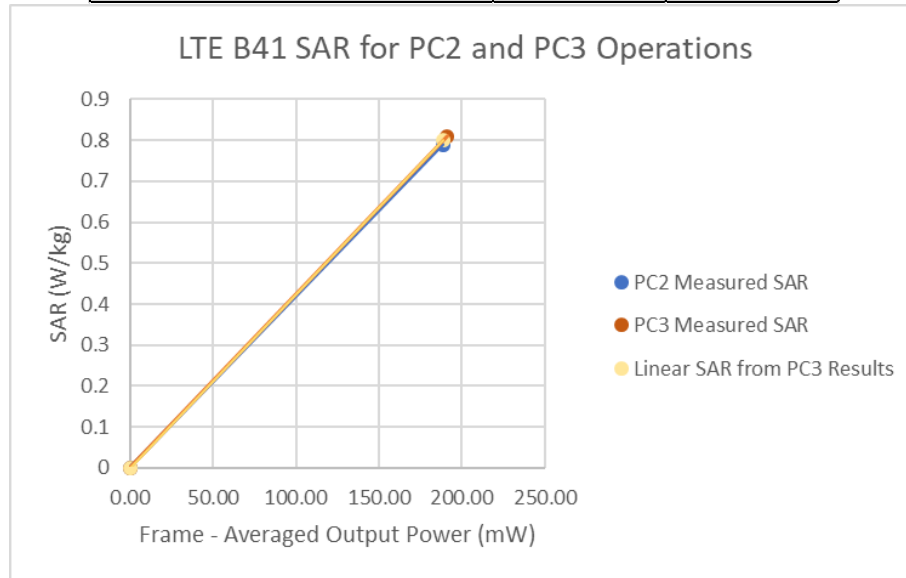


Figure 14-6
LTE Band 41 ULCA Hotspot Linearity

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 114 of 119	

15 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Network Analyzer	3/11/2019	Annual	3/11/2020	US93170122
Agilent	8753ES	S-Parameter Network Analyzer	8/26/2019	Annual	8/26/2020	MY40002670
Agilent	8753ES	S-Parameter Vector Network Analyzer	9/19/2019	Annual	9/19/2020	MY40003841
Agilent	E4438C	ESG Vector Signal Generator	5/22/2019	Annual	5/22/2020	MY45091346
Agilent	E4438C	ESG Vector Signal Generator	5/23/2019	Annual	5/23/2020	MY47270002
Agilent	E4438C	ESG Vector Signal Generator	3/8/2019	Biennial	3/8/2021	MY42082385
Agilent	E4438C	ESG Vector Signal Generator	3/11/2019	Biennial	3/11/2021	MY45090700
Agilent	E5515C	8960 Series 10 Wireless Communications Test Set	12/18/2018	Annual	12/18/2019	GB42230325
Agilent	E5515C	Wireless Communications Test Set	6/26/2019	Annual	6/26/2020	MY50267125
Agilent	E5515C	Wireless Communications Test Set	9/25/2019	Annual	9/25/2020	GB43304278
Agilent	E5515C	Wireless Communications Test Set	2/7/2018	Triennial	2/7/2021	GB43304447
Agilent	N5182A	MIX Vector Signal Generator	7/10/2019	Annual	7/10/2020	MY47420800
Agilent	N9020A	MXA Signal Analyzer	4/20/2019	Annual	4/20/2020	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433974
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433975
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433976
Anritsu	MA24106A	USB Power Sensor	1/31/2019	Annual	1/31/2020	1244524
Anritsu	MA24106A	USB Power Sensor	3/5/2019	Annual	3/5/2020	1344555
Anritsu	MA24106A	USB Power Sensor	4/17/2019	Annual	4/17/2020	1344556
Anritsu	MA24106A	USB Power Sensor	7/15/2019	Annual	7/15/2020	13445613
Anritsu	MA2411B	Pulse Power Sensor	1/6/2019	Annual	1/6/2020	1390018
Anritsu	MA2411B	Pulse Power Sensor	6/11/2019	Annual	6/11/2020	1207364
Anritsu	MA2411B	Pulse Power Sensor	8/8/2019	Annual	8/8/2020	1390008
Anritsu	MT8820C	Radio Communication Analyzer	3/29/2019	Annual	3/29/2020	6201300731
Anritsu	MT8821C	Radio Communication Analyzer	1/25/2019	Annual	1/25/2020	6261895213
Anritsu	MT8821C	Radio Communication Analyzer	3/6/2019	Annual	3/6/2020	6201381794
Anritsu	MT8821C	Radio Communication Analyzer	5/13/2019	Annual	5/13/2020	6201524637
Anritsu	MT8862A	Wireless Connectivity Test Set	8/8/2019	Annual	8/8/2020	6261782395
Anritsu	ML2495A	Power Meter	11/6/2018	Annual	11/20/2019	1039008
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291470
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291455
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291460
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291463
Control Company	4352	Long Stem Thermometer	6/26/2019	Biennial	6/26/2021	192282744
Control Company	4352	Long Stem Thermometer	6/26/2019	Biennial	6/26/2021	192282753
Control Company	4352	Ultra Long Stem Thermometer	11/29/2018	Biennial	11/29/2020	181766801
Control Company	4352	Ultra Long Stem Thermometer	11/29/2018	Biennial	11/29/2020	181766777
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	8503E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	7/2/2019	Annual	7/2/2020	MY53401181
Keysight Technologies	N6705B	DC Power Analyzer	4/27/2019	Biennial	4/27/2021	MY53004059
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	139
MiniCircuits	SLP-3400+	Low Pass Filter	CBT	N/A	CBT	R897950903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Pasternack	NC-100	Torque Wrench	5/23/2018	Biennial	5/23/2020	N/A
Pasternack	PE2208-6	Bi-directional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bi-directional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	8/26/2019	Annual	8/26/2020	100976
Rohde & Schwarz	CMW500	Radio Communication Tester	8/27/2019	Annual	8/27/2020	116743
Rohde & Schwarz	CMW500	Radio Communication Tester	10/4/2019	Annual	10/4/2020	165462
Rohde & Schwarz	ZNLE6	Vector Network Analyzer	10/11/2019	Annual	10/11/2020	101307
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/12/2019	Annual	7/12/2020	145645
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/24/2019	Annual	7/24/2020	151849
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	21053
SPEAG	D750V3	750 MHz SAR Dipole	3/18/2019	Annual	3/18/2020	1054
SPEAG	D750V3	750 MHz SAR Dipole	10/19/2018	Biennial	10/19/2020	1161
SPEAG	D835V2	835 MHz SAR Dipole	3/13/2019	Annual	3/13/2020	40407
SPEAG	D835V2	835 MHz SAR Dipole	10/19/2018	Biennial	10/19/2020	46133
SPEAG	D1750V2	1750 MHz SAR Dipole	5/15/2019	Annual	5/15/2020	1148
SPEAG	D1765V2	1765 MHz SAR Dipole	5/23/2018	Biennial	5/23/2020	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	2/21/2019	Annual	2/21/2020	5814
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Biennial	10/23/2020	56080
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Biennial	10/23/2020	56149
SPEAG	D2450V2	2450 MHz SAR Dipole	8/14/2019	Annual	8/14/2020	719
SPEAG	D2450V2	2450 MHz SAR Dipole	8/16/2018	Biennial	8/16/2020	981
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Triennial	9/11/2020	797
SPEAG	D2600V2	2600 MHz SAR Dipole	4/11/2018	Biennial	4/11/2020	1004
SPEAG	D5GHV2	5 GHz SAR Dipole	8/10/2018	Biennial	8/10/2020	1237
SPEAG	D5GHV2	5 GHz SAR Dipole	9/17/2019	Annual	9/17/2020	1191
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/7/2019	Annual	5/7/2020	1070
SPEAG	DAK-3.5	Dielectric Assessment Kit	10/22/2019	Annual	10/22/2020	1091
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/15/2019	Annual	1/15/2020	1530
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/13/2019	Annual	2/13/2020	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/14/2019	Annual	2/14/2020	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/18/2019	Annual	4/18/2020	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/8/2019	Annual	5/8/2020	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/20/2019	Annual	6/20/2020	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2019	Annual	7/11/2020	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2019	Annual	7/11/2020	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/17/2019	Annual	9/17/2020	1333
SPEAG	EX3DV4	SAR Probe	1/24/2019	Annual	1/24/2020	7488
SPEAG	EX3DV4	SAR Probe	2/19/2019	Annual	2/19/2020	5814
SPEAG	EX3DV4	SAR Probe	2/19/2019	Annual	2/19/2020	7417
SPEAG	EX3DV4	SAR Probe	4/24/2019	Annual	4/24/2020	7357
SPEAG	EX3DV4	SAR Probe	5/16/2019	Annual	5/16/2020	7406
SPEAG	EX3DV4	SAR Probe	6/19/2019	Annual	6/19/2020	7409
SPEAG	EX3DV4	SAR Probe	7/15/2019	Annual	7/15/2020	7547
SPEAG	EX3DV4	SAR Probe	7/16/2019	Annual	7/16/2020	7410
SPEAG	EX3DV4	SAR Probe	9/19/2019	Annual	9/19/2020	7551

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 115 of 119

16 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)						RSS	11.5	11.3
Expanded Uncertainty (95% CONFIDENCE LEVEL)						k=2	23.0	22.6

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 116 of 119

17 CONCLUSION

17.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: ZNFL555DL		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset		Page 117 of 119

18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 118 of 119

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: ZNFL555DL	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1910250170-01-R2.ZNF	Test Dates: 11/04/19 - 11/19/19	DUT Type: Portable Handset	Page 119 of 119

APPENDIX A: SAR TEST PLOTS

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20179

Communication System: UID 0, GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 40.997$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11-04-2019; Ambient Temp: 21.4°C; Tissue Temp: 18.9°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 836.6 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: GPRS 850, Right Head, Cheek, Mid.ch, 3 Tx slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.93 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.412 W/kg

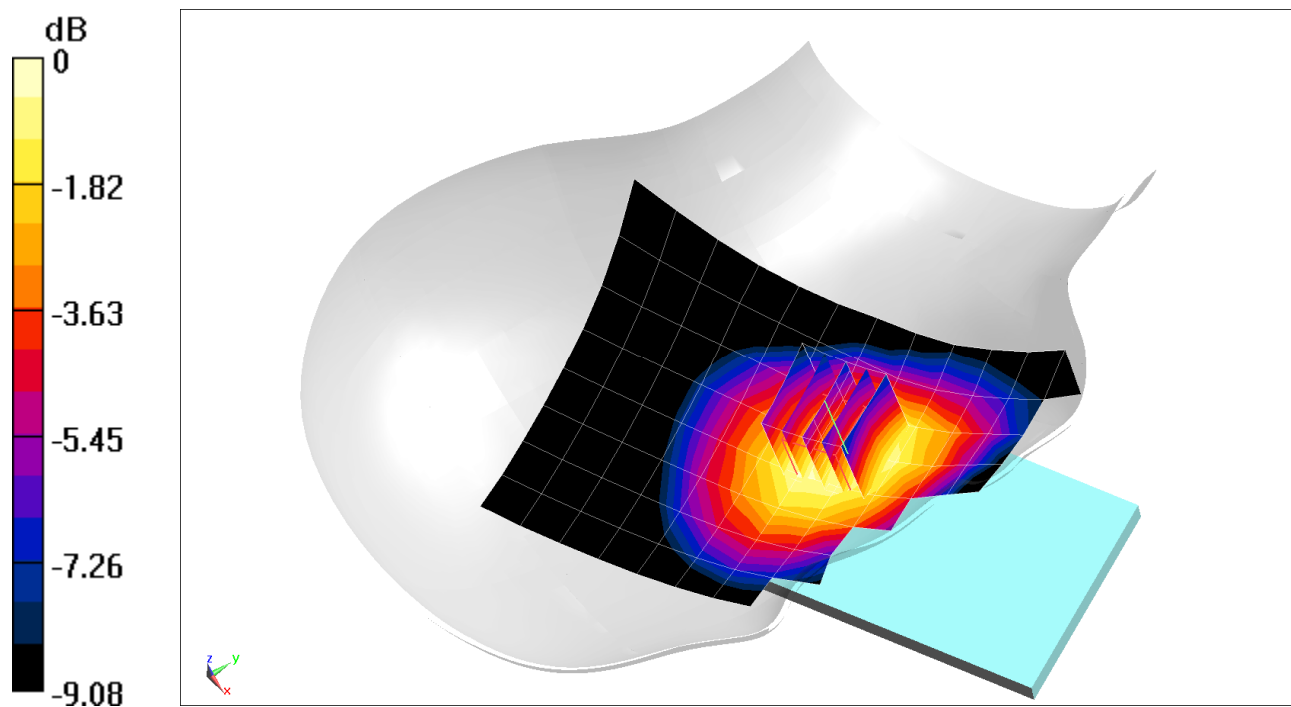

0 dB = 0.488 W/kg = -3.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.428 \text{ S/m}$; $\epsilon_r = 40.323$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-13-2019; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1880 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: GPRS 1900, Left Head, Cheek, Mid.ch, 3 Tx slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.94 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.262 W/kg

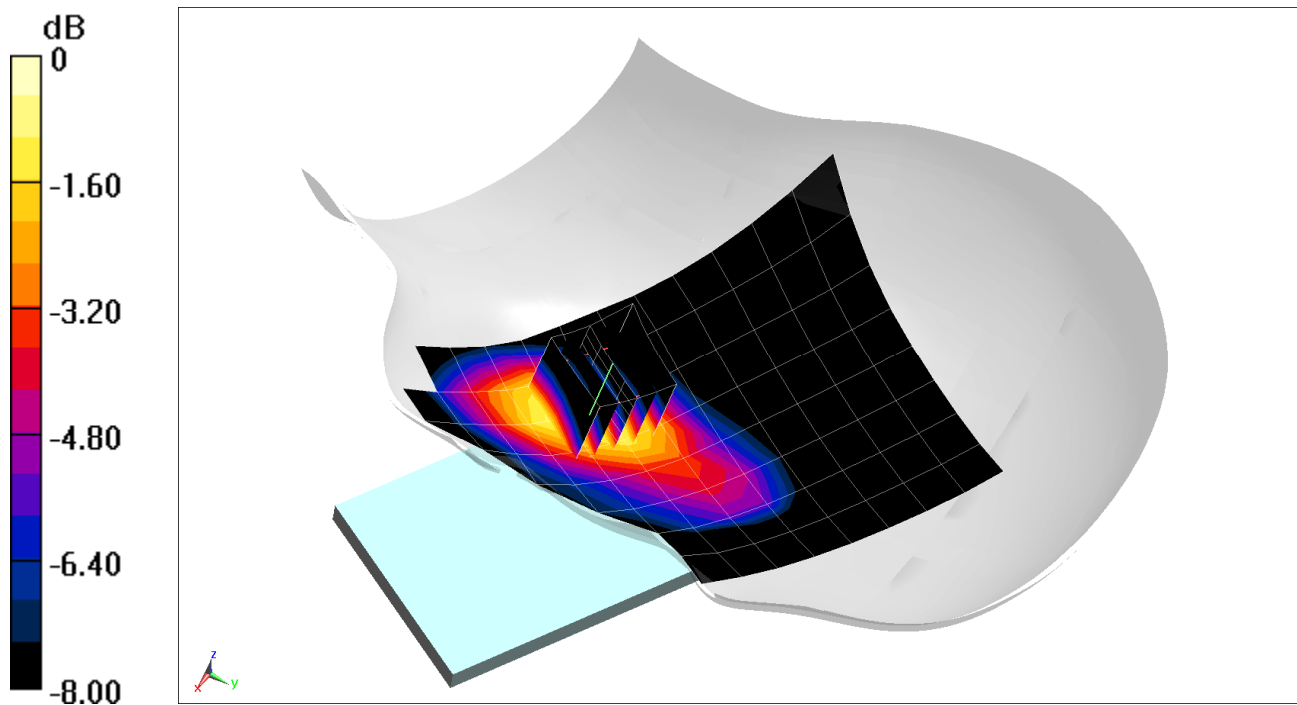

0 dB = 0.351 W/kg = -4.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 40.997$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-04-2019; Ambient Temp: 21.4°C; Tissue Temp: 18.9°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 836.6 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.16 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.287 W/kg

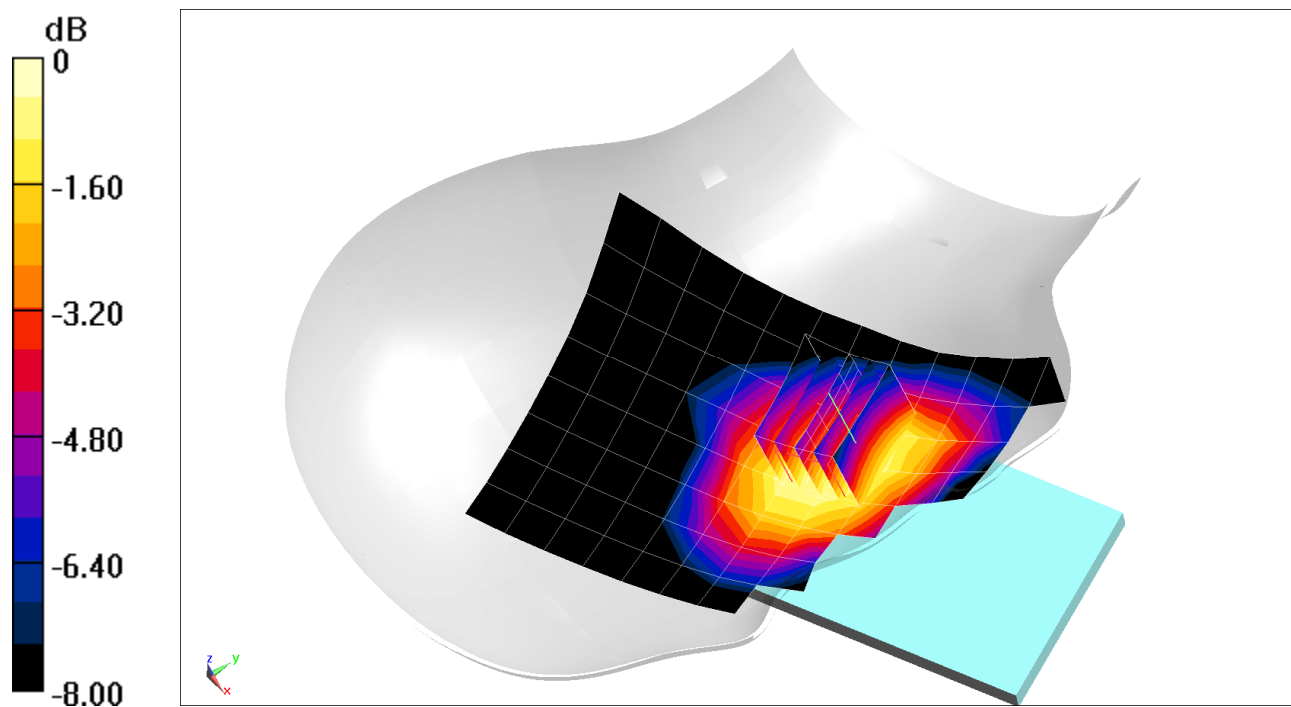

0 dB = 0.335 W/kg = -4.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.381 \text{ S/m}$; $\epsilon_r = 41.558$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-04-2019; Ambient Temp: 22.0°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3914; ConvF(8.16, 8.16, 8.16) @ 1732.4 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Twin-SAM V5.0 Front 30; Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: UMTS 1750, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.41 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.328 W/kg

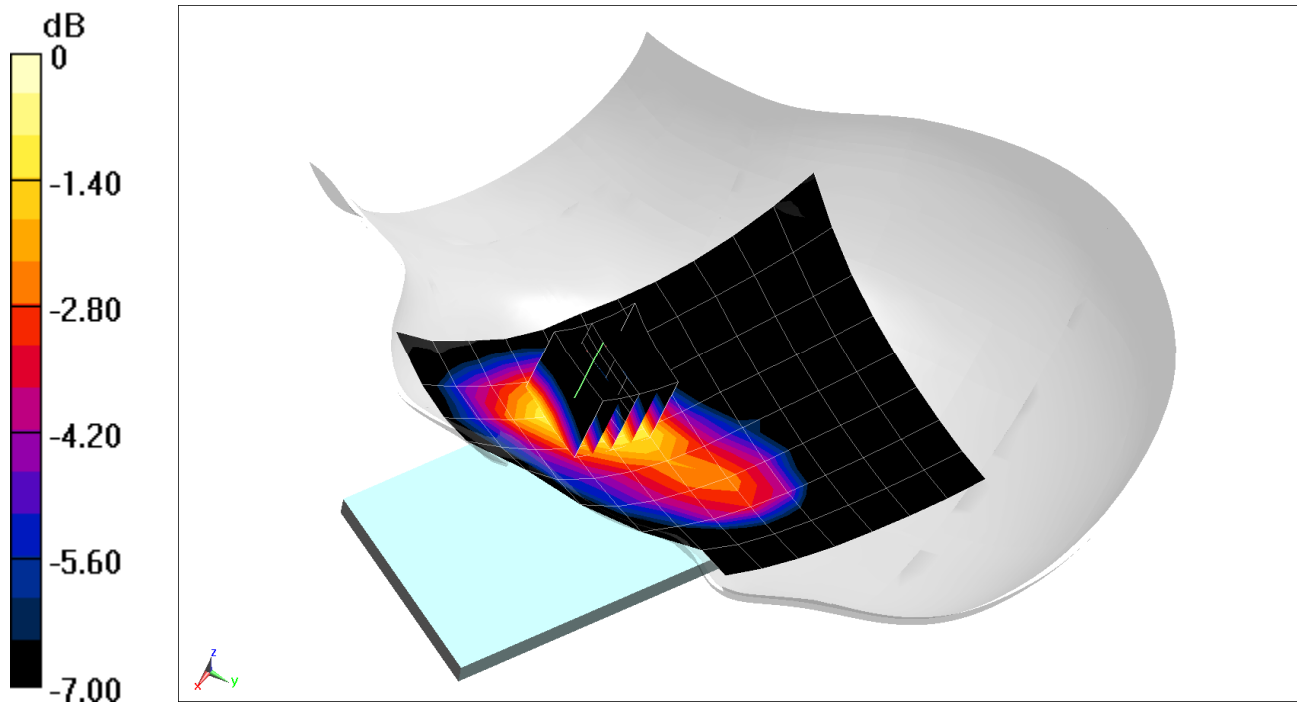

0 dB = 0.424 W/kg = -3.73 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.428 \text{ S/m}$; $\epsilon_r = 40.323$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-13-2019; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1880 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.64 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.823 W/kg

SAR(1 g) = 0.524 W/kg

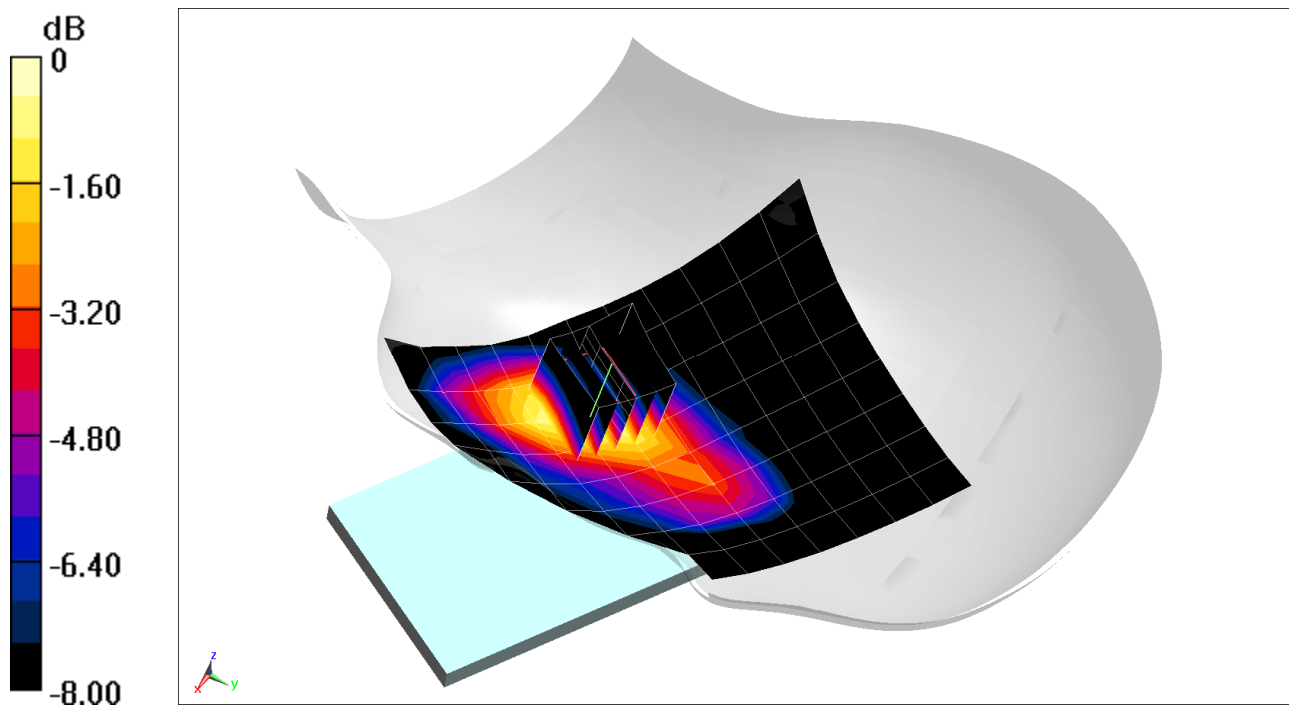

0 dB = 0.687 W/kg = -1.63 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20179

Communication System: UID 0, Cellular CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 820.1$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.039$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11-04-2019; Ambient Temp: 21.4°C; Tissue Temp: 18.9°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 820.1 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: Cell. CDMA, BC 10, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.07 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.323 W/kg

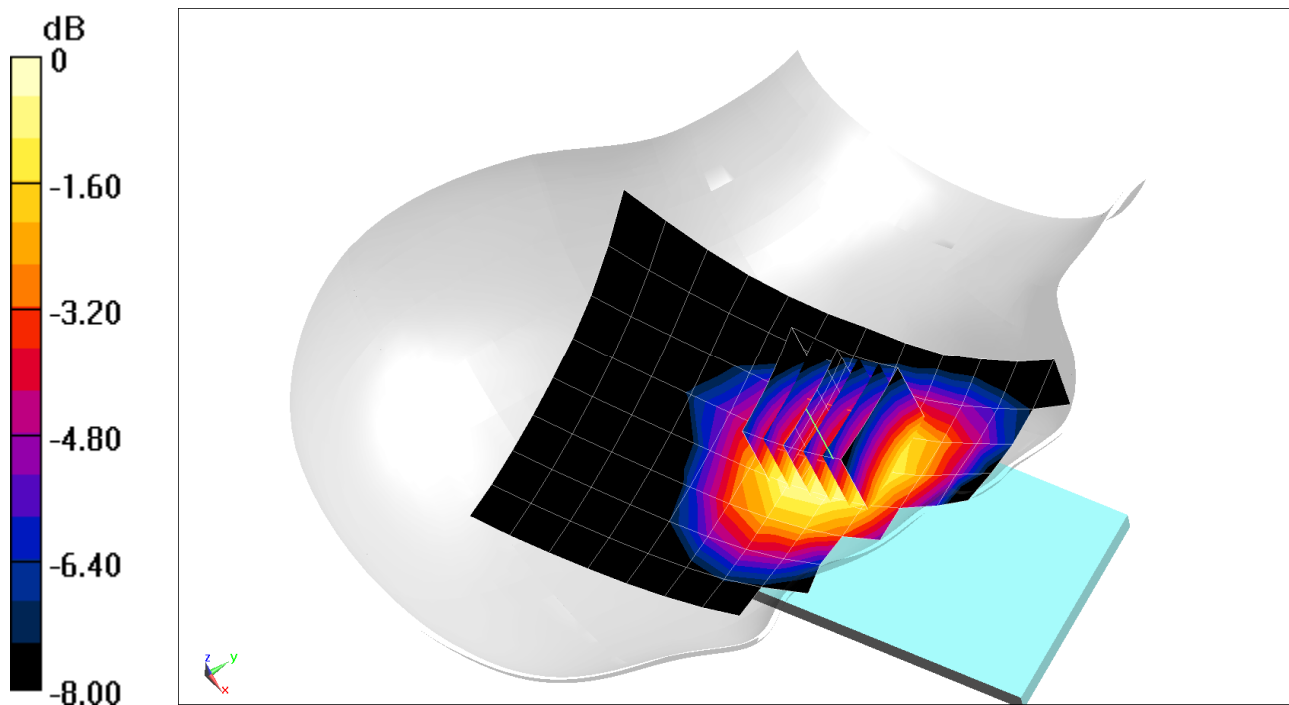

0 dB = 0.384 W/kg = -4.16 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20179

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 40.997$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11-04-2019; Ambient Temp: 21.4°C; Tissue Temp: 18.9°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 836.52 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: Cell. CDMA, BC 0, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.18 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.560 W/kg

SAR(1 g) = 0.438 W/kg

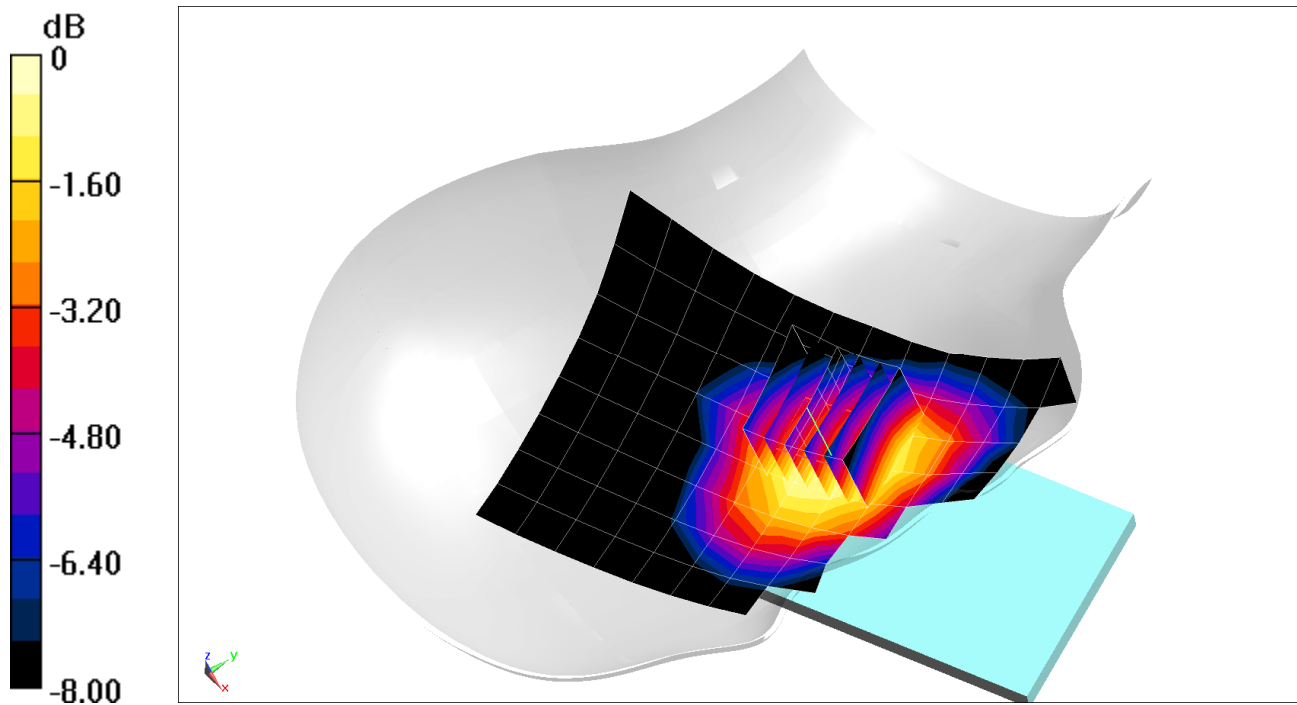

0 dB = 0.516 W/kg = -2.87 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, PCS CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1851.25$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 40.371$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 11-13-2019; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1851.25 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: PCS CDMA, Left Head, Cheek, Low.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.93 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.904 W/kg

SAR(1 g) = 0.590 W/kg

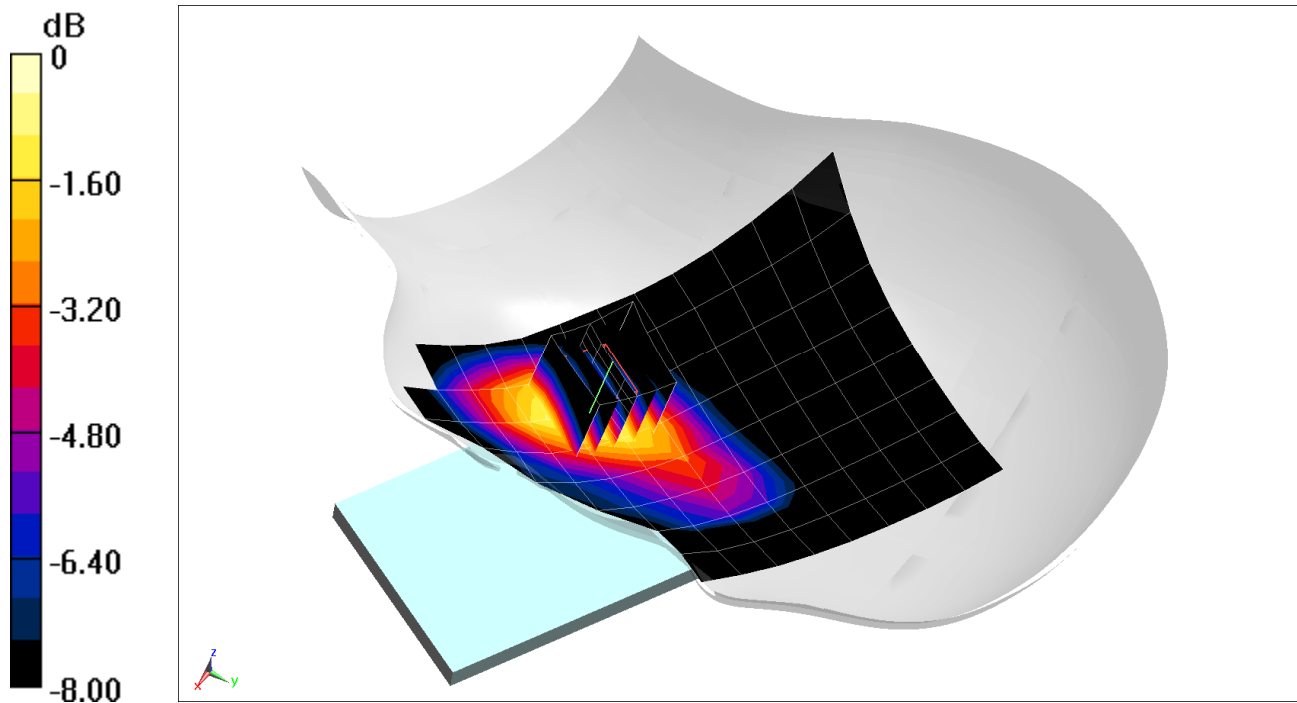

0 dB = 0.778 W/kg = -1.09 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20195

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 700 Head Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 42.592$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-05-2019; Ambient Temp: 19.9°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN7551; ConvF(10.11, 10.11, 10.11) @ 680.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 71, Right Head, Cheek, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.19 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.143 W/kg

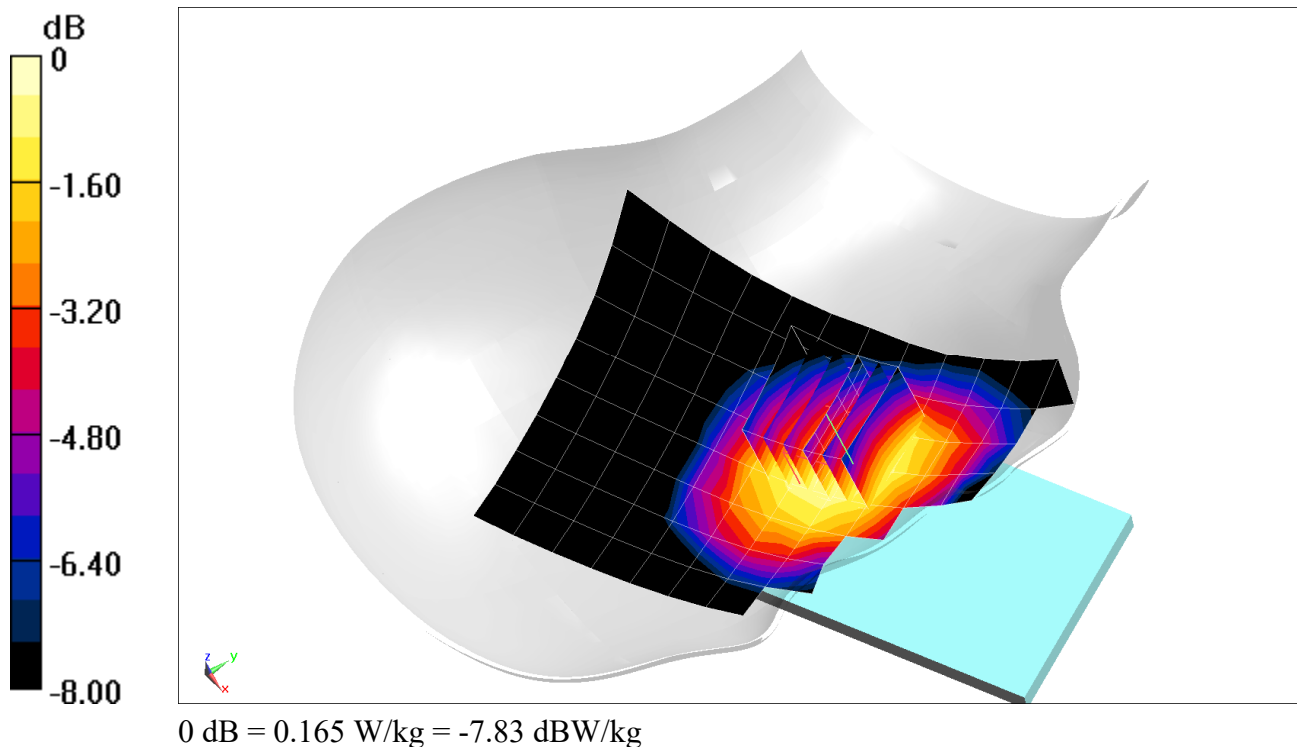

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20195

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 700 Head Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 42.519$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11-05-2019; Ambient Temp: 19.9°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN7551; ConvF(10.11, 10.11, 10.11) @ 707.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 12, Right Head, Cheek, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.84 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.231 W/kg

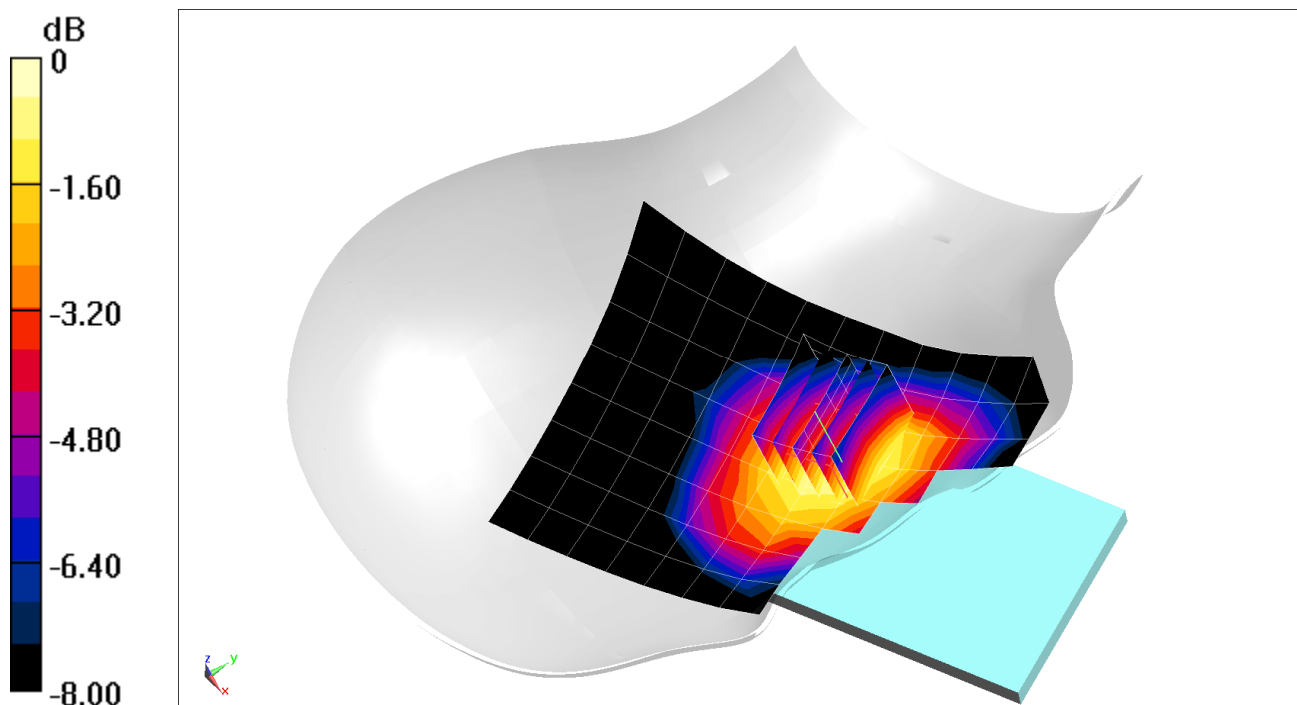

0 dB = 0.269 W/kg = -5.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20195

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 700 Head Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.907 \text{ S/m}$; $\epsilon_r = 42.314$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-05-2019; Ambient Temp: 19.9°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN7551; ConvF(10.11, 10.11, 10.11) @ 782 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.48 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.286 W/kg

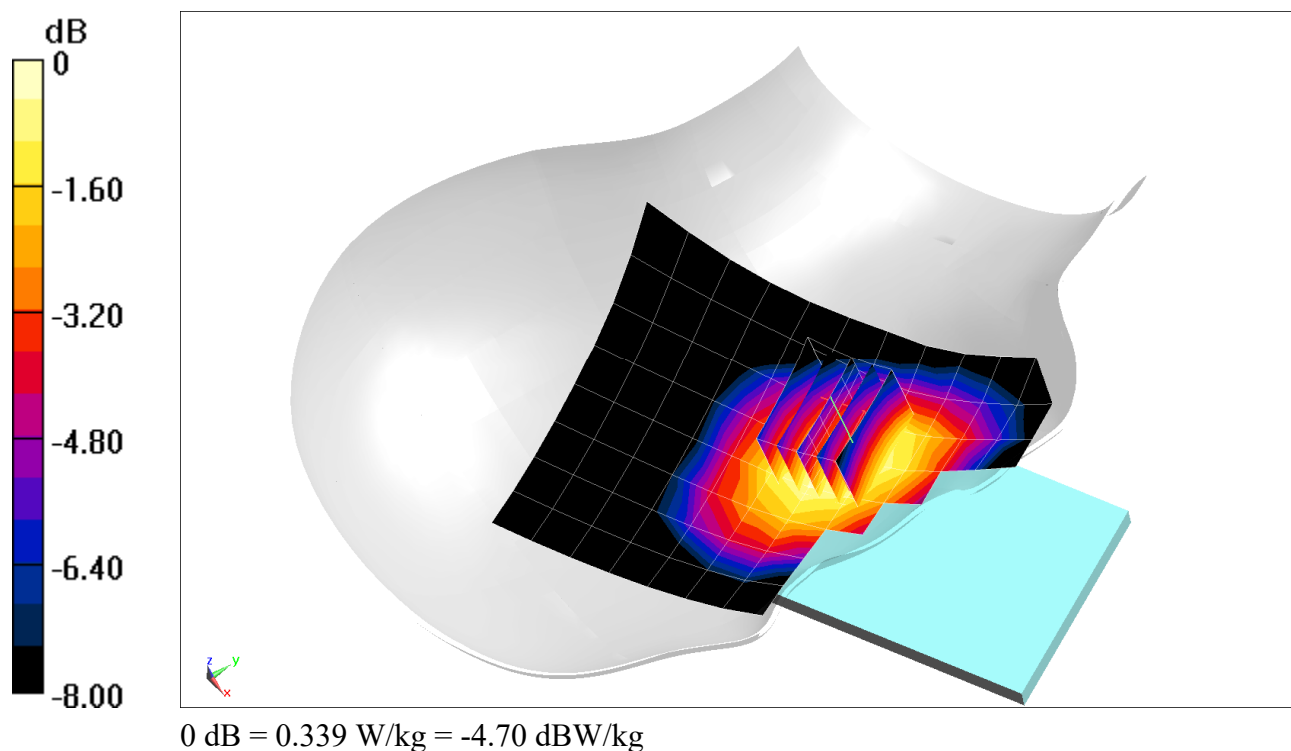

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 41.01$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11-04-2019; Ambient Temp: 21.4°C; Tissue Temp: 18.9°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 831.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 26 (Cell.), Right Head, Cheek, Mid.ch, 15 MHz Bandwidth,
QPSK, 1 RB, 36 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.25 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.377 W/kg

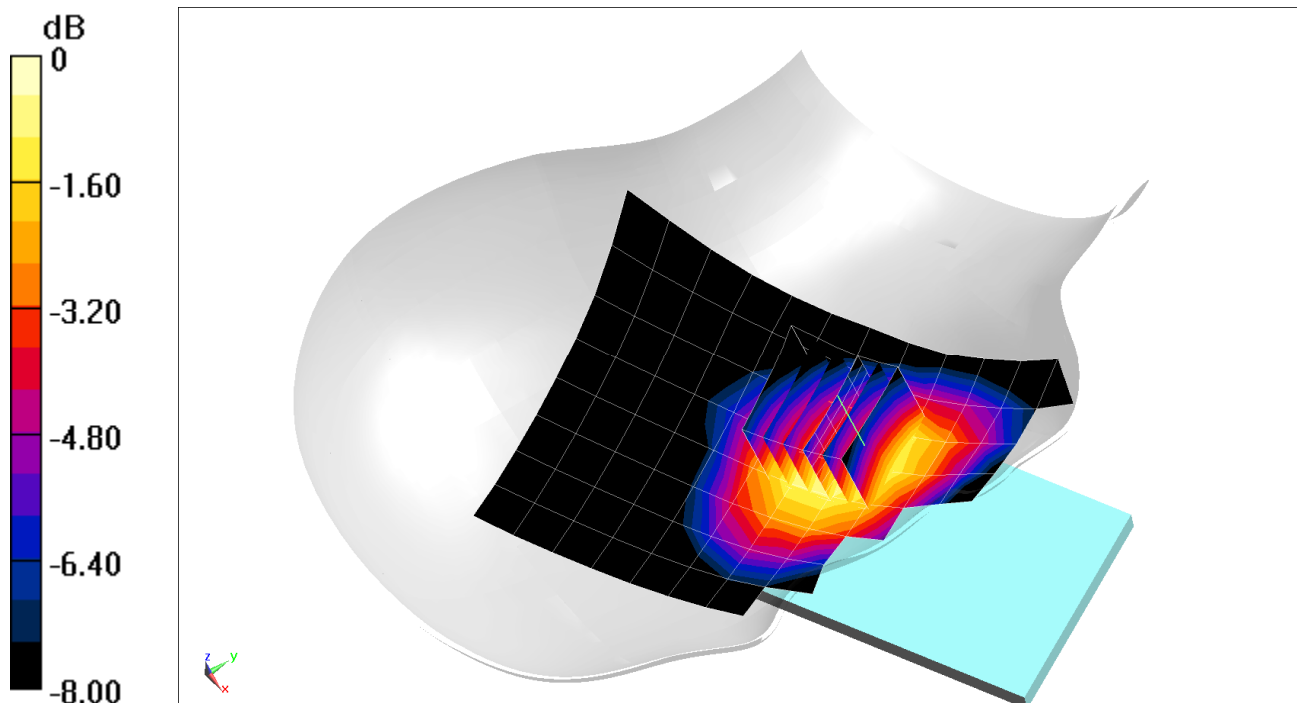

0 dB = 0.452 W/kg = -3.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1720 \text{ MHz}$; $\sigma = 1.367 \text{ S/m}$; $\epsilon_r = 41.615$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-04-2019; Ambient Temp: 22.0°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3914; ConvF(8.16, 8.16, 8.16) @ 1720 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Twin-SAM V5.0 Front 30; Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 66 (AWS), Left Head, Cheek, Low.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.18 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.397 W/kg

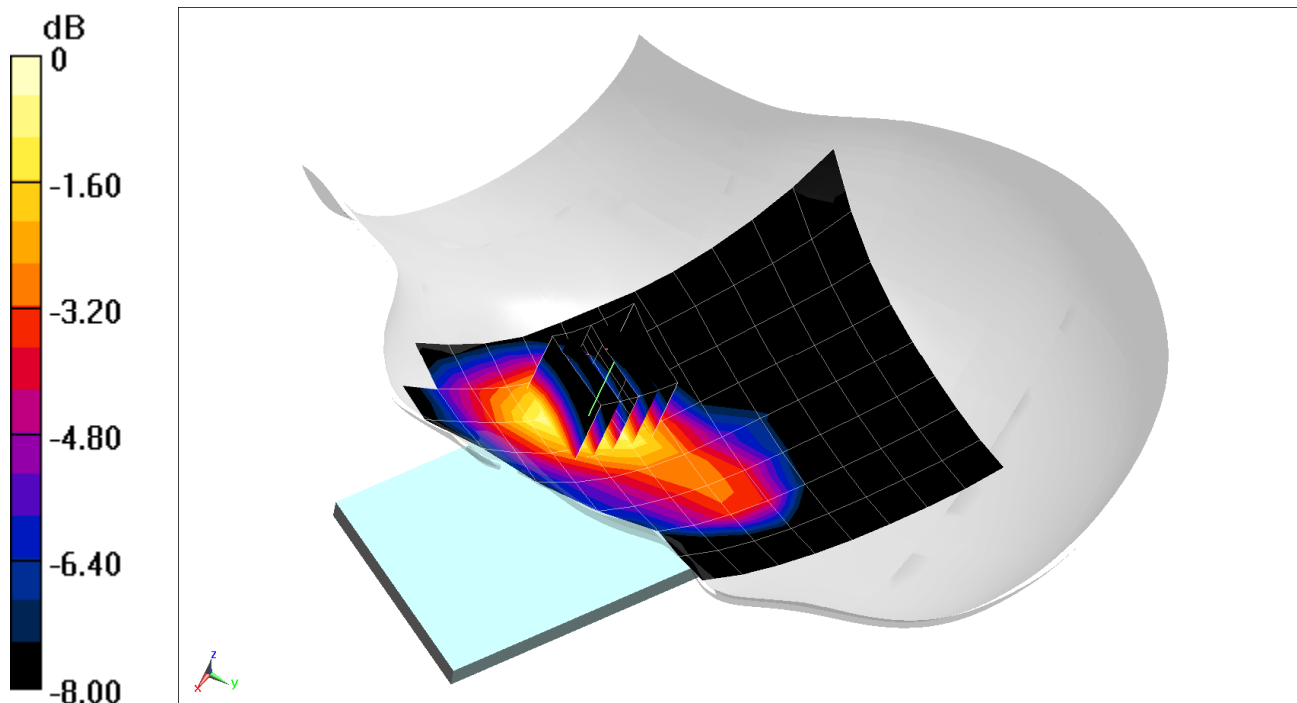

0 dB = 0.516 W/kg = -2.87 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20195

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1860 \text{ MHz}$; $\sigma = 1.423 \text{ S/m}$; $\epsilon_r = 39.743$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 11-18-2019; Ambient Temp: 22.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1860 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, Low.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 50 RB Offset**


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.98 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.431 W/kg

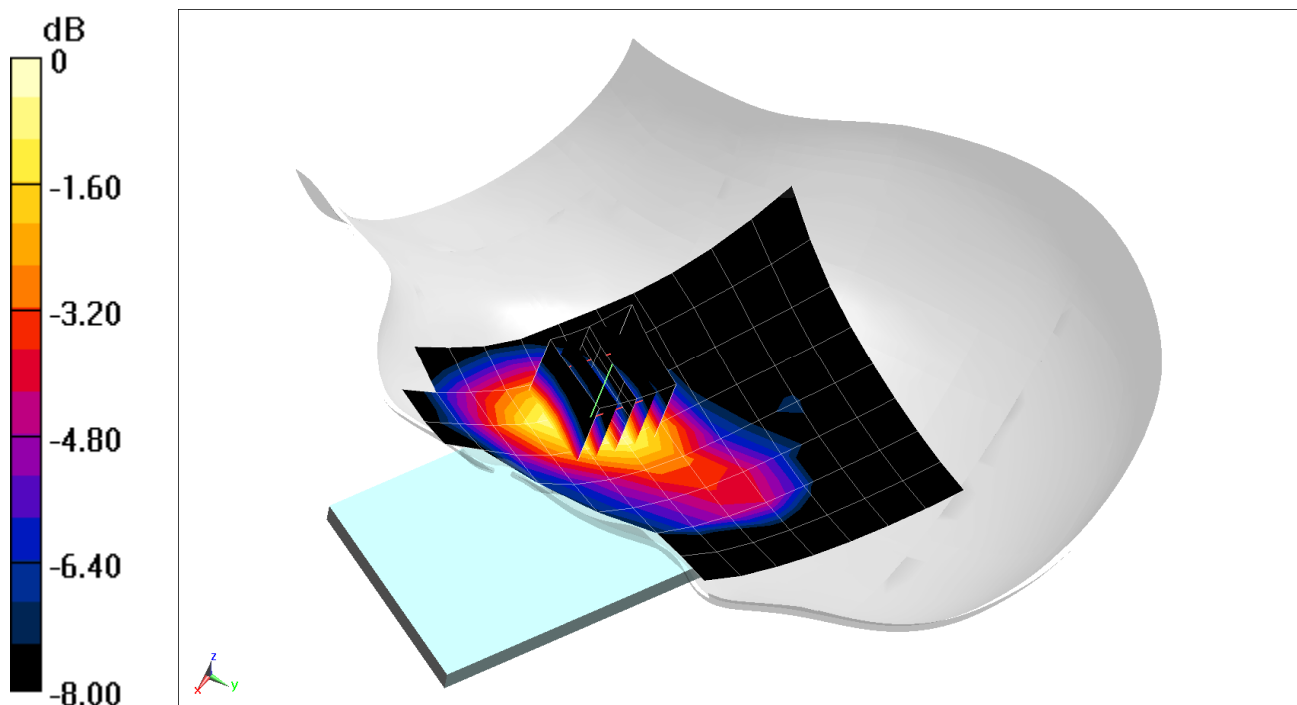

0 dB = 0.578 W/kg = -2.38 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2506 MHz; Duty Cycle: 1:2.31

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2506$ MHz; $\sigma = 1.856$ S/m; $\epsilon_r = 37.383$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 11-04-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7417; ConvF(7.46, 7.46, 7.46) @ 2506 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 41 Power Class 2, Right Head, Cheek, Low.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 50 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.476 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.025 W/kg

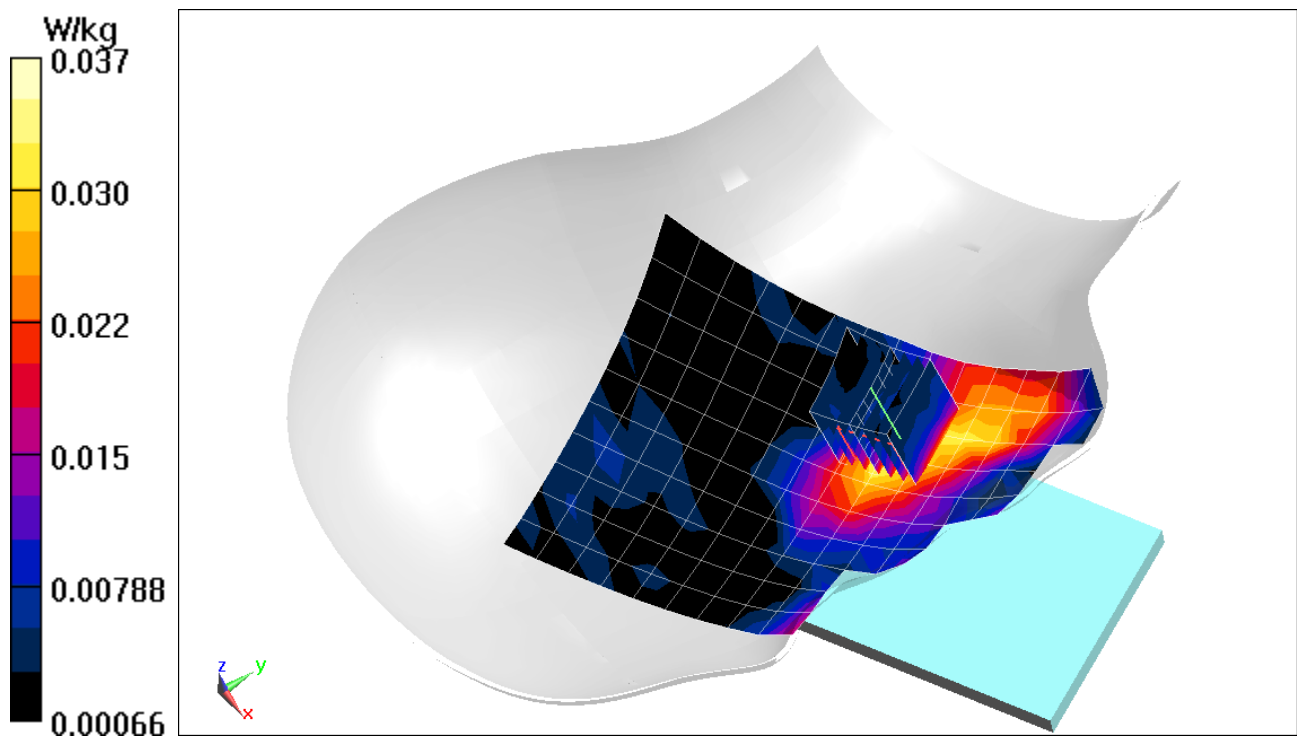

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20211

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 1.875 \text{ S/m}$; $\epsilon_r = 38.959$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-11-2019; Ambient Temp: 21.3°C; Tissue Temp: 19.2°C

Probe: EX3DV4 - SN7417; ConvF(7.46, 7.46, 7.46) @ 2462 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Right Head, Cheek, Ch 11, 1 Mbps


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.036 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.780 W/kg

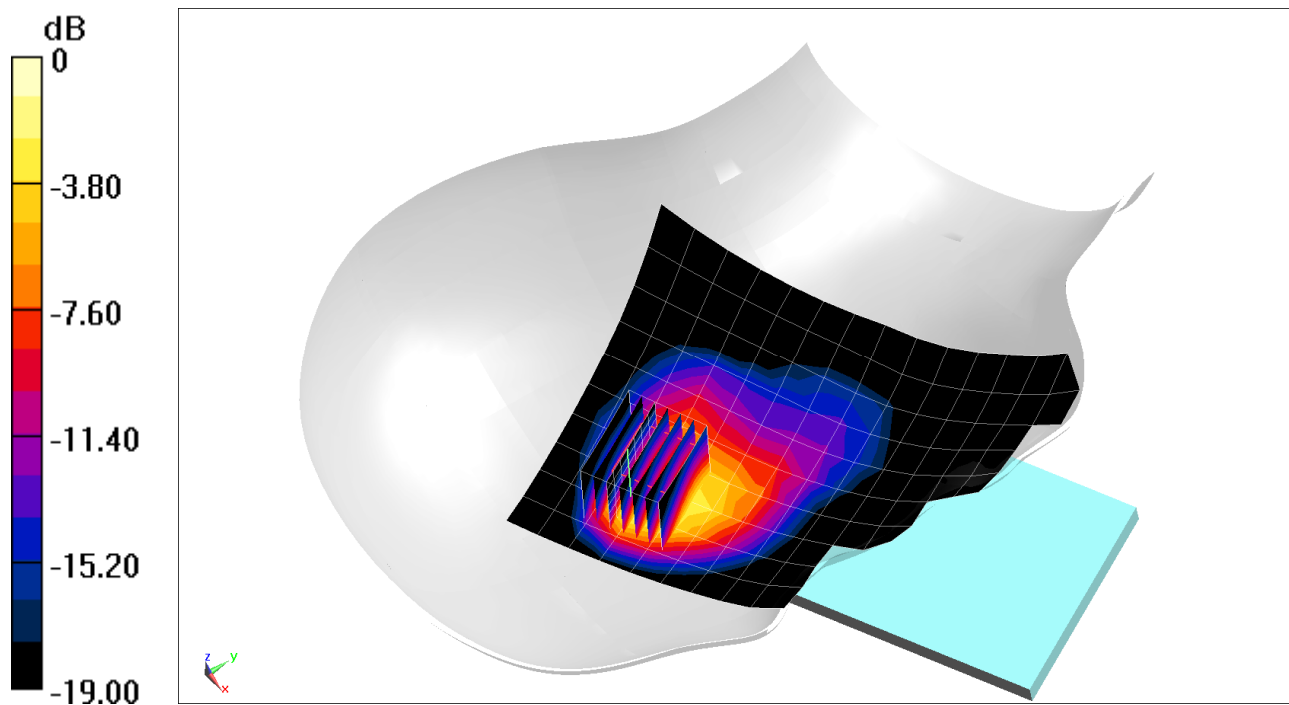

0 dB = 1.22 W/kg = 0.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20211

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5795 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5795 \text{ MHz}$; $\sigma = 5.234 \text{ S/m}$; $\epsilon_r = 35.209$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-18-2019; Ambient Temp: 20.4°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7406; ConvF(5.23, 5.23, 5.23) @ 5795 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: IEEE 802.11n, U-NII-3, 40 MHz Bandwidth, Right Head, Tilt, Ch 159, 13.5 Mbps


Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 3.575 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 0.590 W/kg

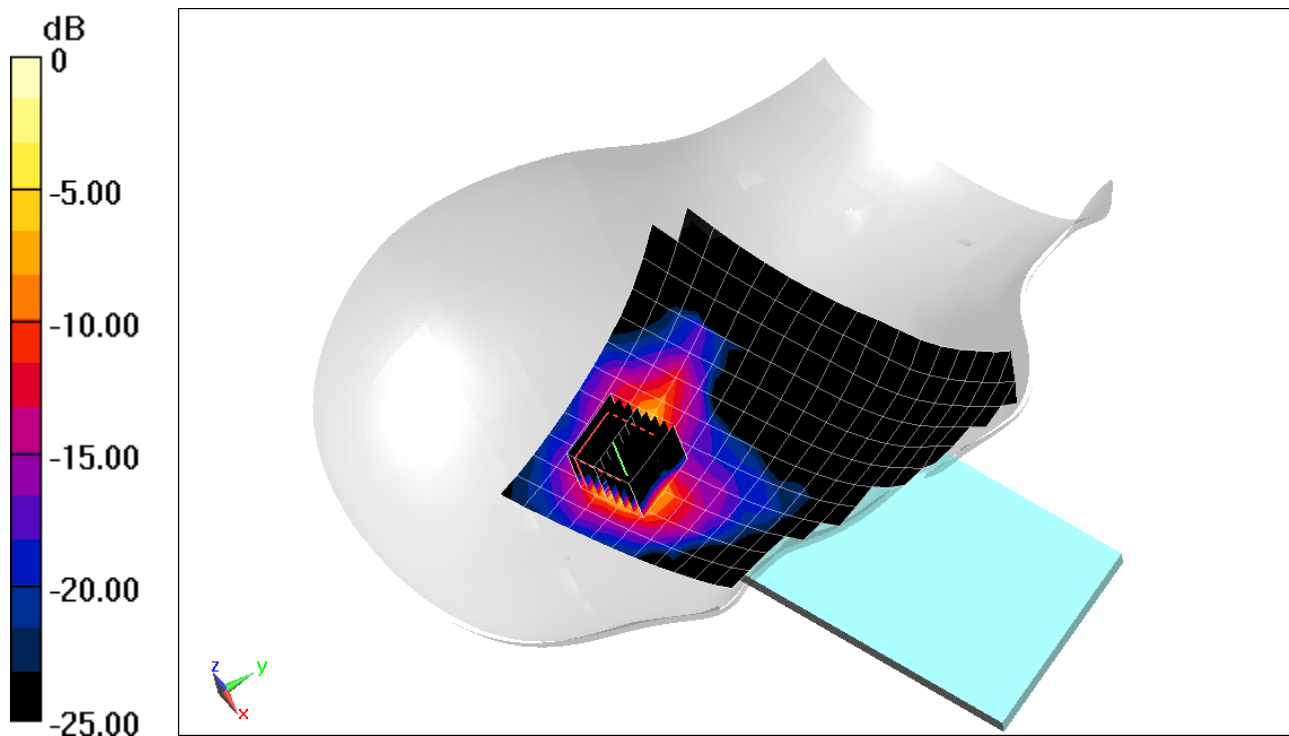

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20211

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: 750-2450 Head Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.845 \text{ S/m}$; $\epsilon_r = 38.501$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 11-14-2019; Ambient Temp: 23.6°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7417; ConvF(7.46, 7.46, 7.46) @ 2441 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: Bluetooth, Right Head, Cheek, Ch 39, 1Mbps


Area Scan (11x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.981 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.050 W/kg

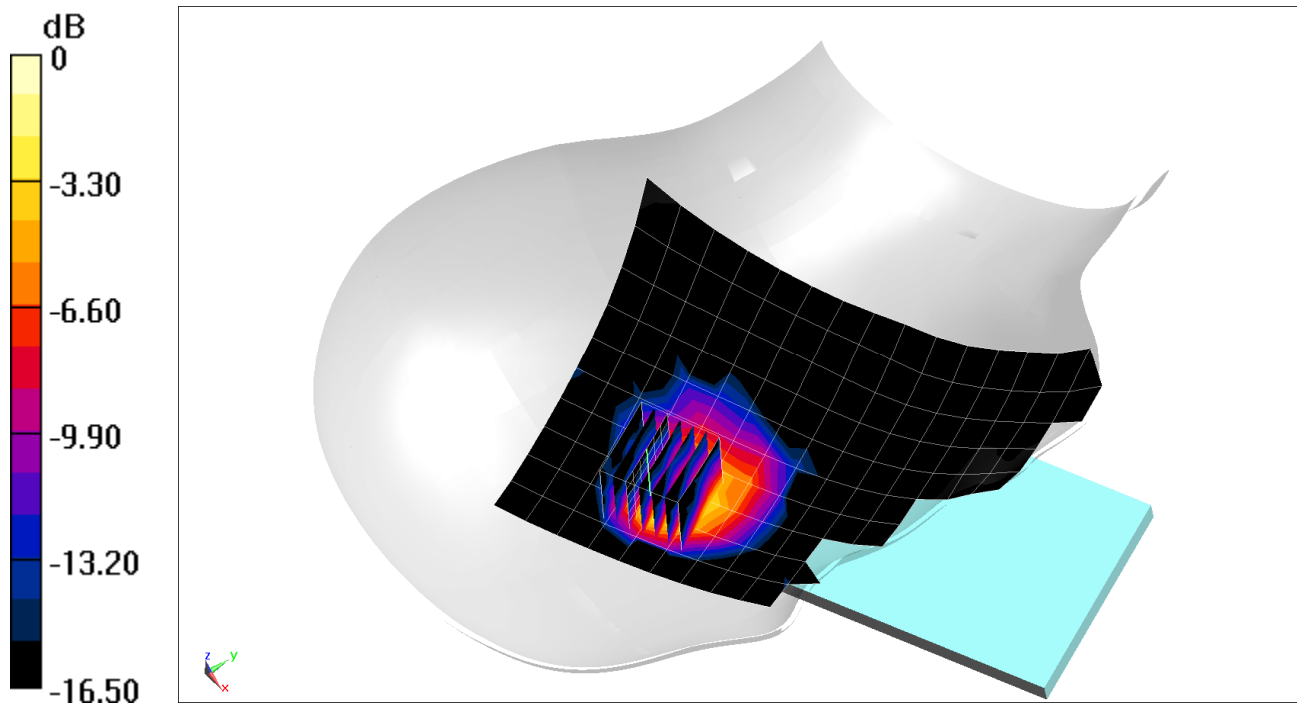

0 dB = 0.0852 W/kg = -10.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, GPRS; 3 Tx slots; Frequency: 848.8 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 848.8 \text{ MHz}$; $\sigma = 0.972 \text{ S/m}$; $\epsilon_r = 54.393$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 23.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7357; ConvF(9.95, 9.95, 9.95) @ 848.8 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Twin-SAM V4.0 (30); Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: GPRS 850, Body SAR, Back side, High.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 35.20 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 1.09 W/kg

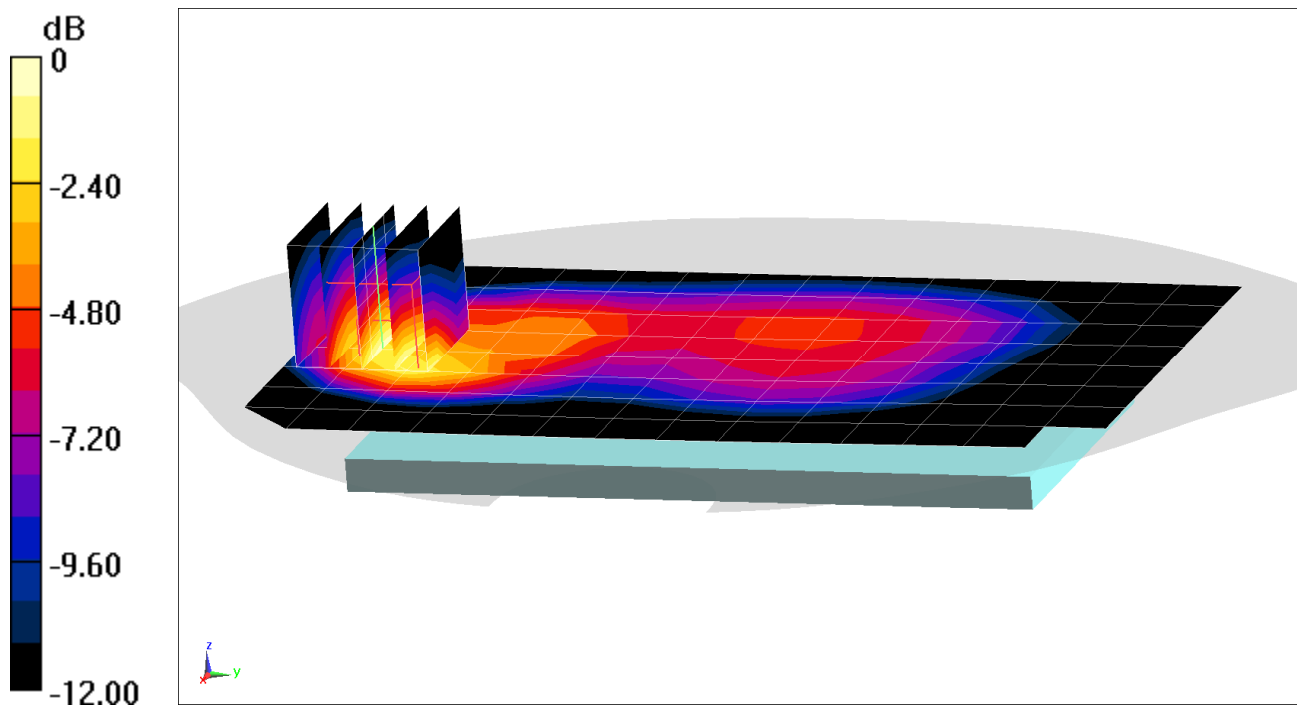

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20179

Communication System: UID 0, GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.546 \text{ S/m}$; $\epsilon_r = 51.245$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 22.7°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1880 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.45 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.379 W/kg

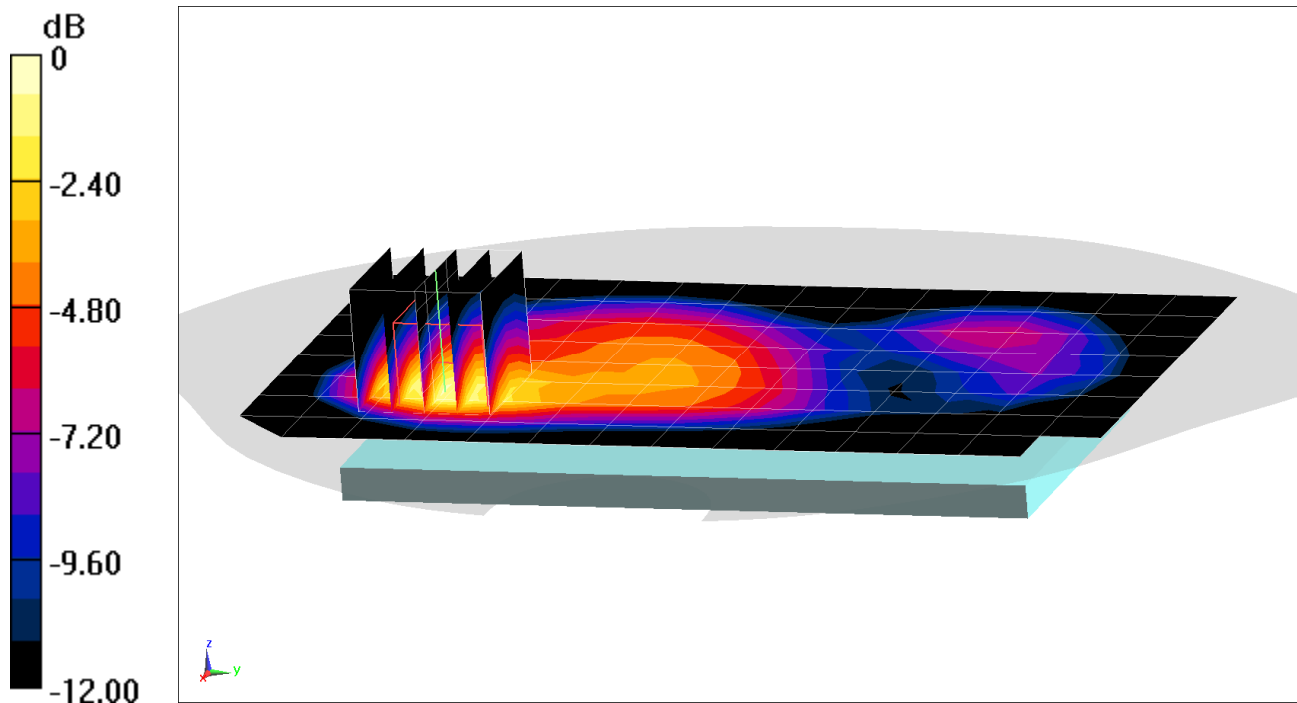

0 dB = 0.576 W/kg = -2.40 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 54.515$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 23.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7357; ConvF(9.95, 9.95, 9.95) @ 836.6 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Twin-SAM V4.0 (30); Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.30 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.703 W/kg

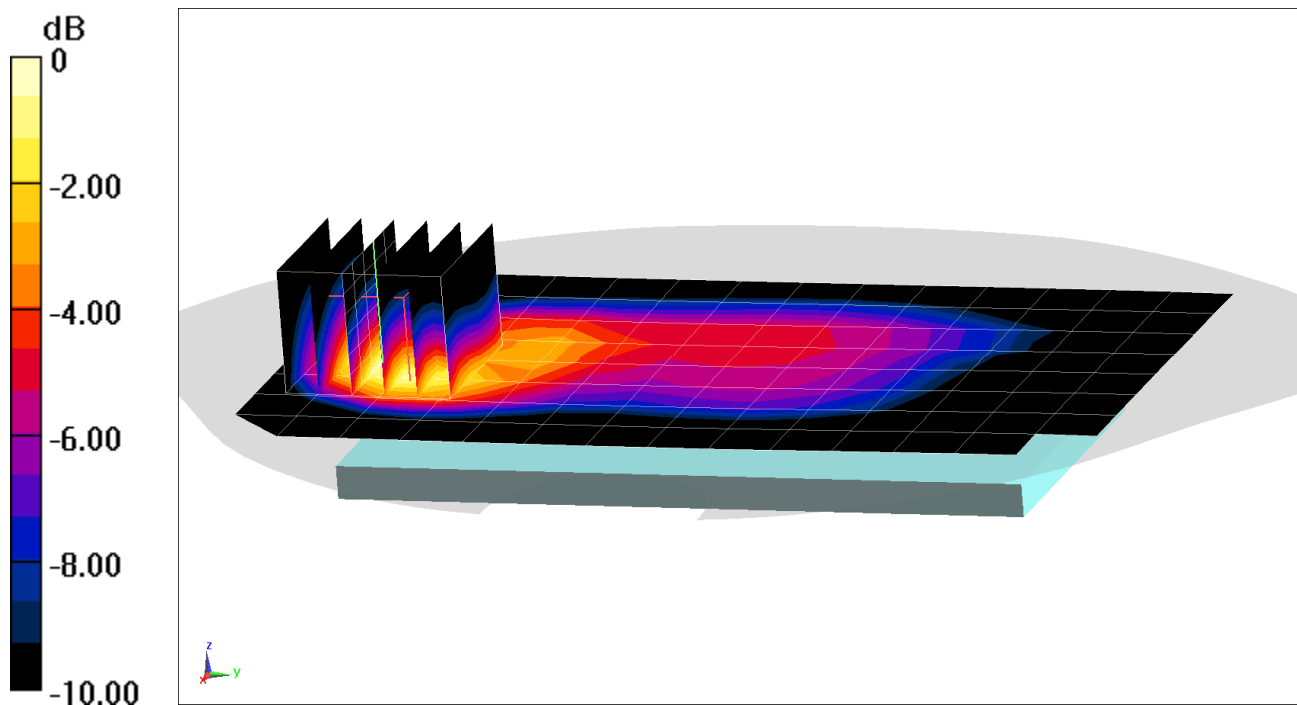

0 dB = 1.06 W/kg = 0.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.6 \text{ MHz}$; $\sigma = 1.487 \text{ S/m}$; $\epsilon_r = 52.219$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 21.8°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.85, 7.85, 7.85) @ 1752.6 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: UMTS 1750, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.47 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.690 W/kg

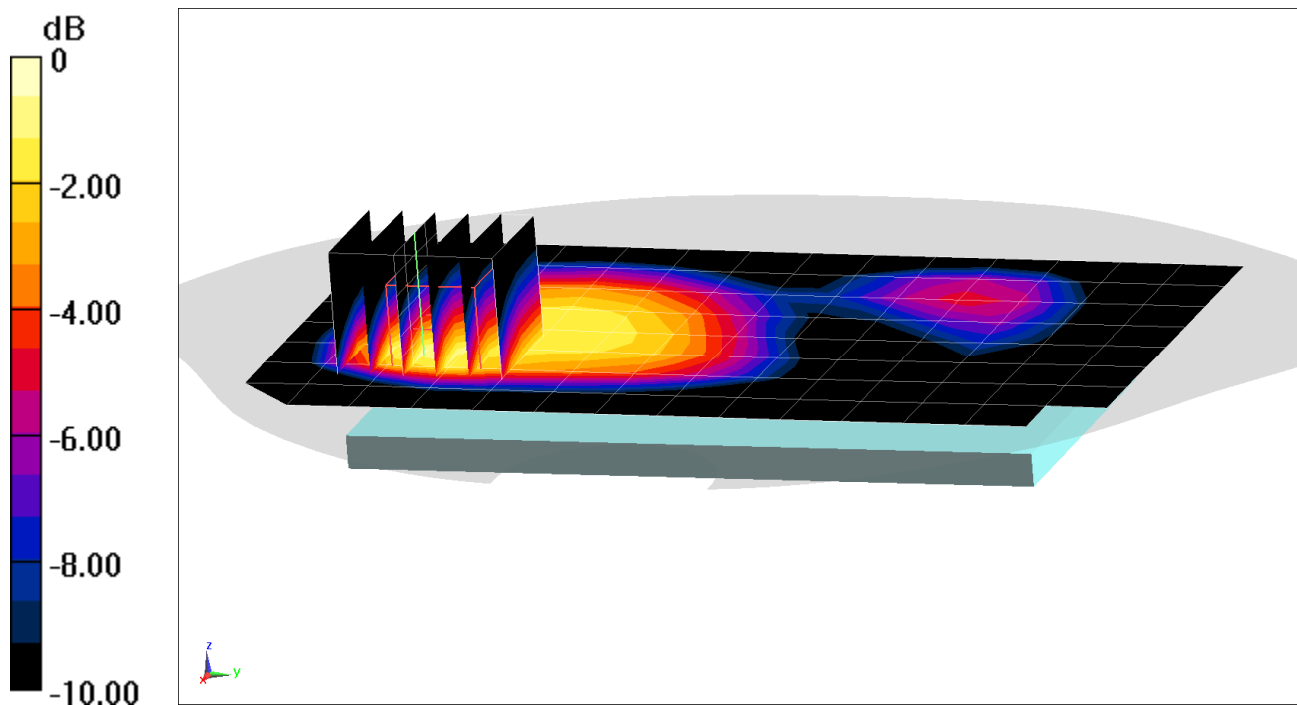

0 dB = 1.04 W/kg = 0.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.533 \text{ S/m}$; $\epsilon_r = 52.283$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1880 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.67 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.08 W/kg

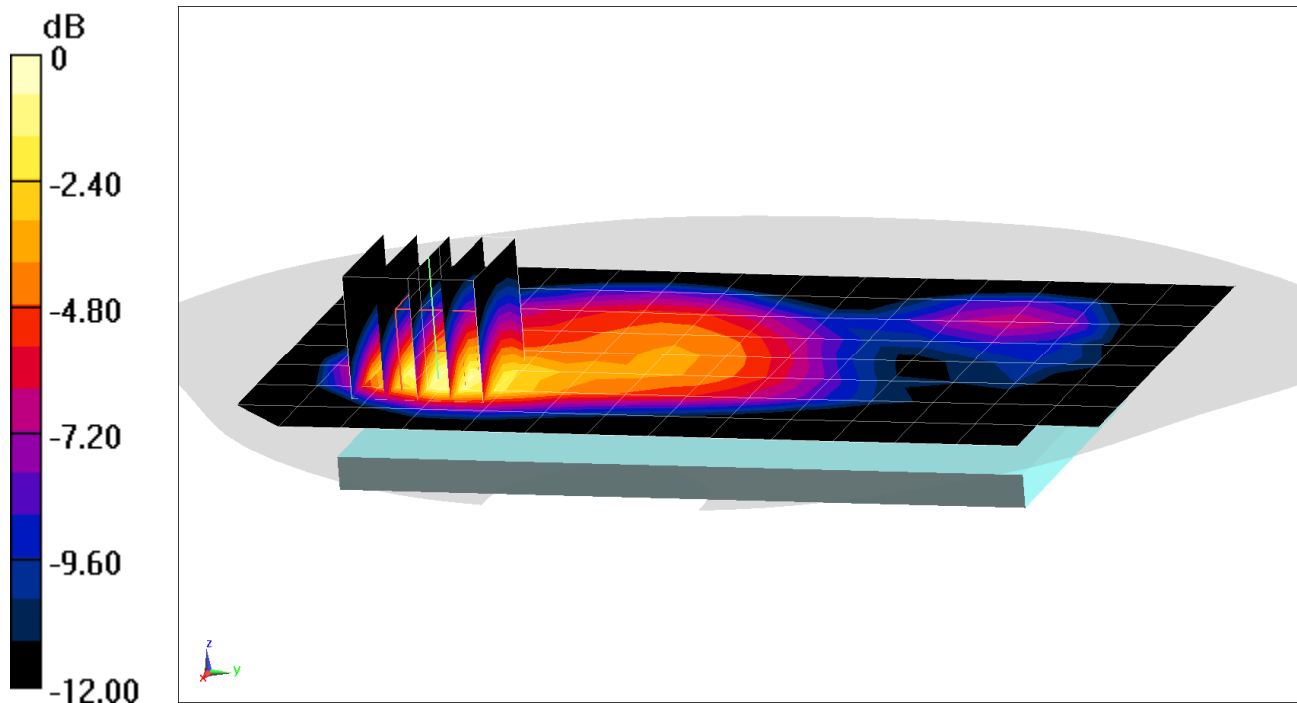

0 dB = 1.62 W/kg = 2.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.942 \text{ S/m}$; $\epsilon_r = 54.682$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 23.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7357; ConvF(9.95, 9.95, 9.95) @ 820.1 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Twin-SAM V4.0 (30); Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: Cell. CDMA BC 10, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.27 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.658 W/kg

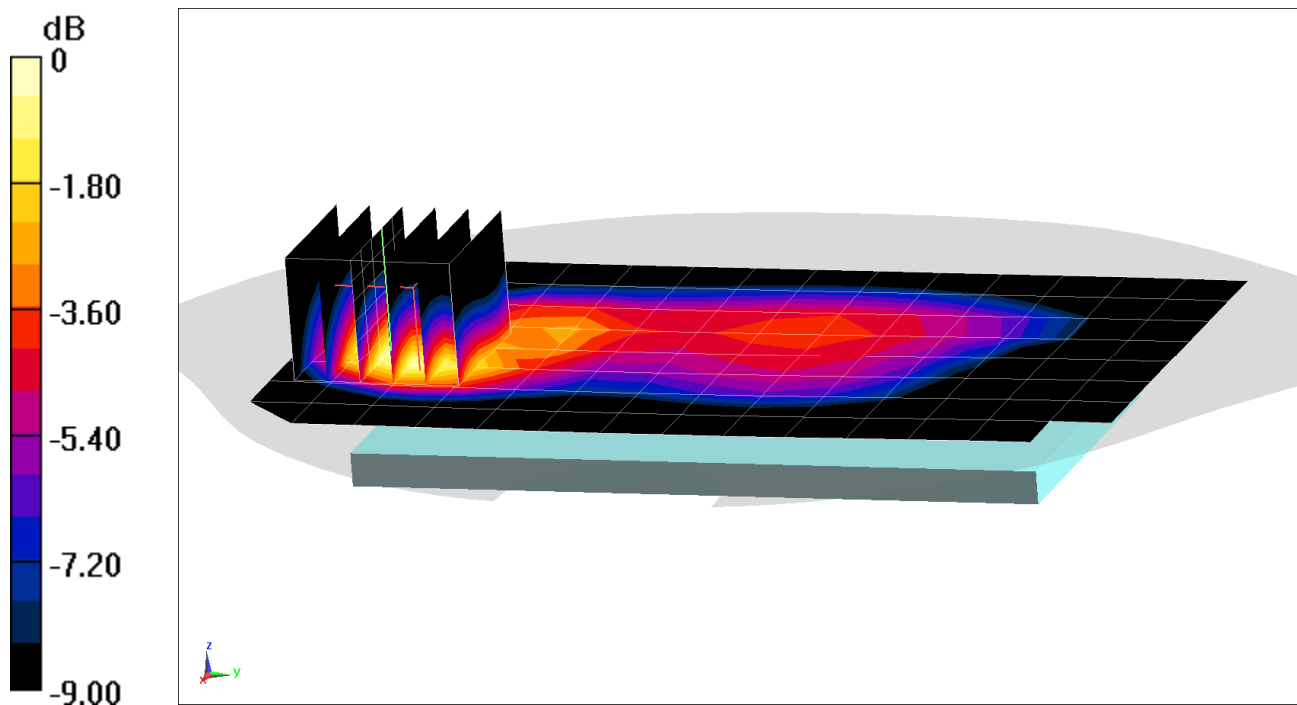

0 dB = 0.977 W/kg = -0.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.942 \text{ S/m}$; $\epsilon_r = 54.682$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 23.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7357; ConvF(9.95, 9.95, 9.95) @ 820.1 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Twin-SAM V4.0 (30); Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: Cell. EVDO BC10, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.77 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.580 W/kg

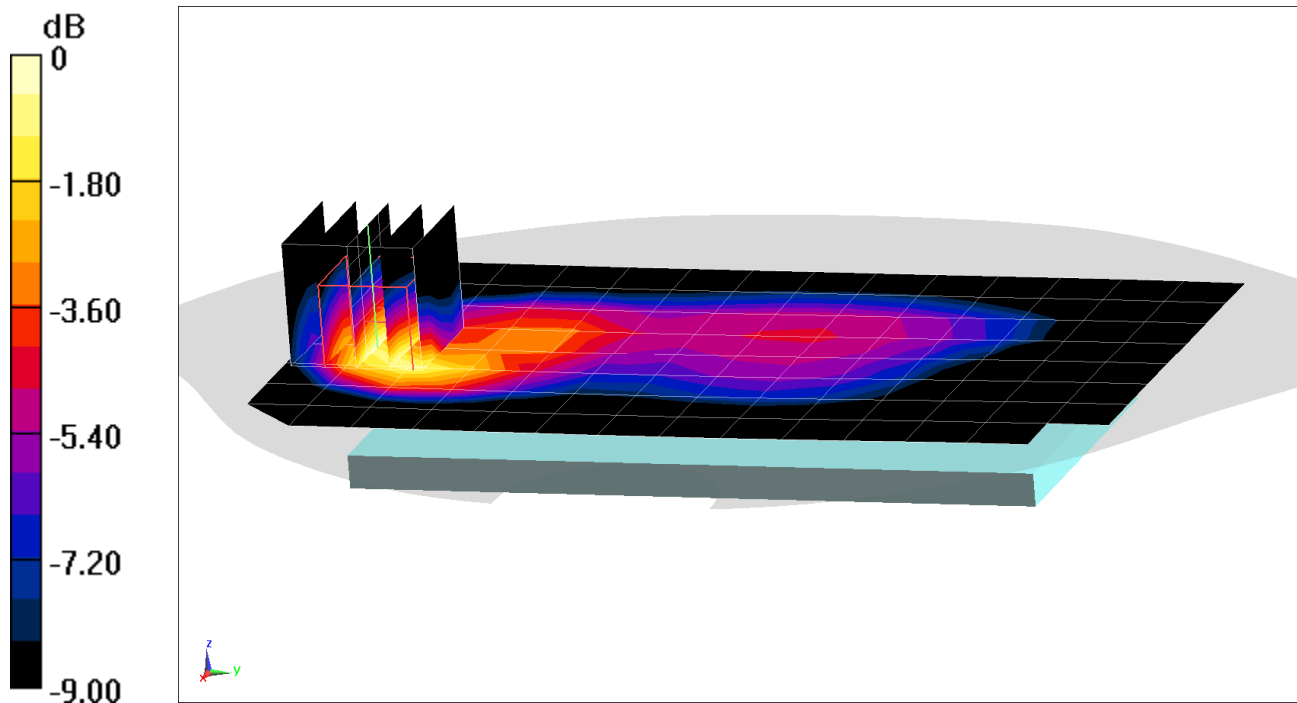

0 dB = 0.847 W/kg = -0.72 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$; $\sigma = 0.959 \text{ S/m}$; $\epsilon_r = 54.516$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 23.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7357; ConvF(9.95, 9.95, 9.95) @ 836.52 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Twin-SAM V4.0 (30); Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: Cell. CDMA, BC 0, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.81 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.611 W/kg

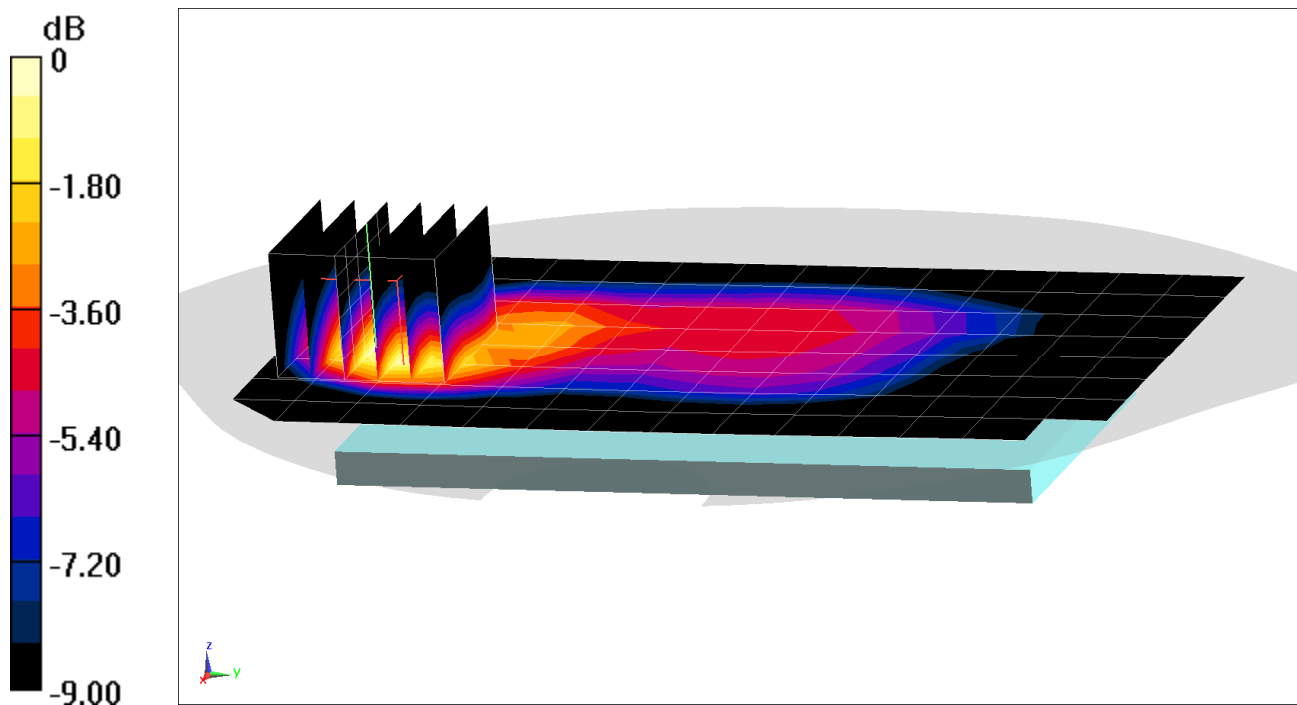

0 dB = 0.909 W/kg = -0.41 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$; $\sigma = 0.959 \text{ S/m}$; $\epsilon_r = 54.516$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 23.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7357; ConvF(9.95, 9.95, 9.95) @ 836.52 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Twin-SAM V4.0 (30); Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: Cell. EVDO, BC 0, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.75 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.733 W/kg

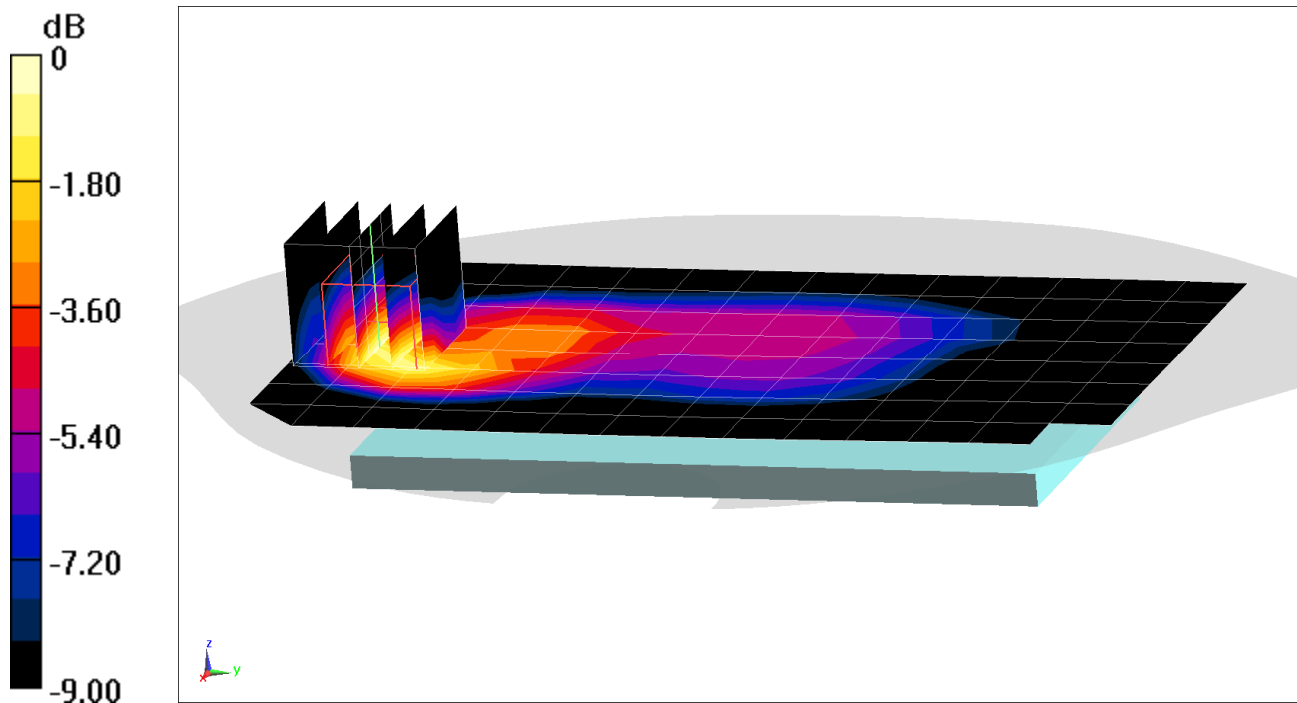

0 dB = 1.08 W/kg = 0.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20179

Communication System: UID 0, CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1851.25 \text{ MHz}$; $\sigma = 1.51 \text{ S/m}$; $\epsilon_r = 51.196$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-18-2019; Ambient Temp: 22.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3914; ConvF(7.6, 7.6, 7.6) @ 1851.25 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Twin-SAM V5.0 Front 30; Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: PCS CDMA, Body SAR, Back side, Low.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.36 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.966 W/kg

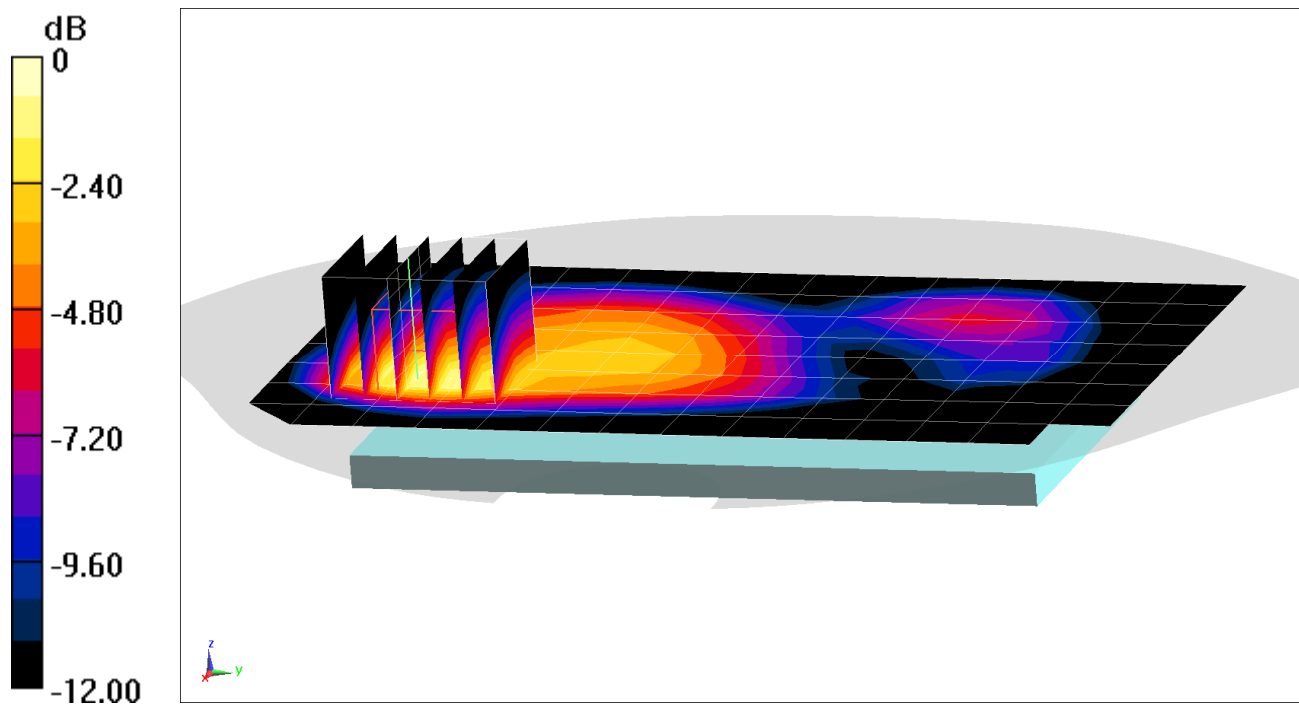

0 dB = 1.45 W/kg = 1.61 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20179

Communication System: UID 0, CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1851.25$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 51.345$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 22.7°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1851.25 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: PCS EVDO, Body SAR, Back side, Low.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.99 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.943 W/kg

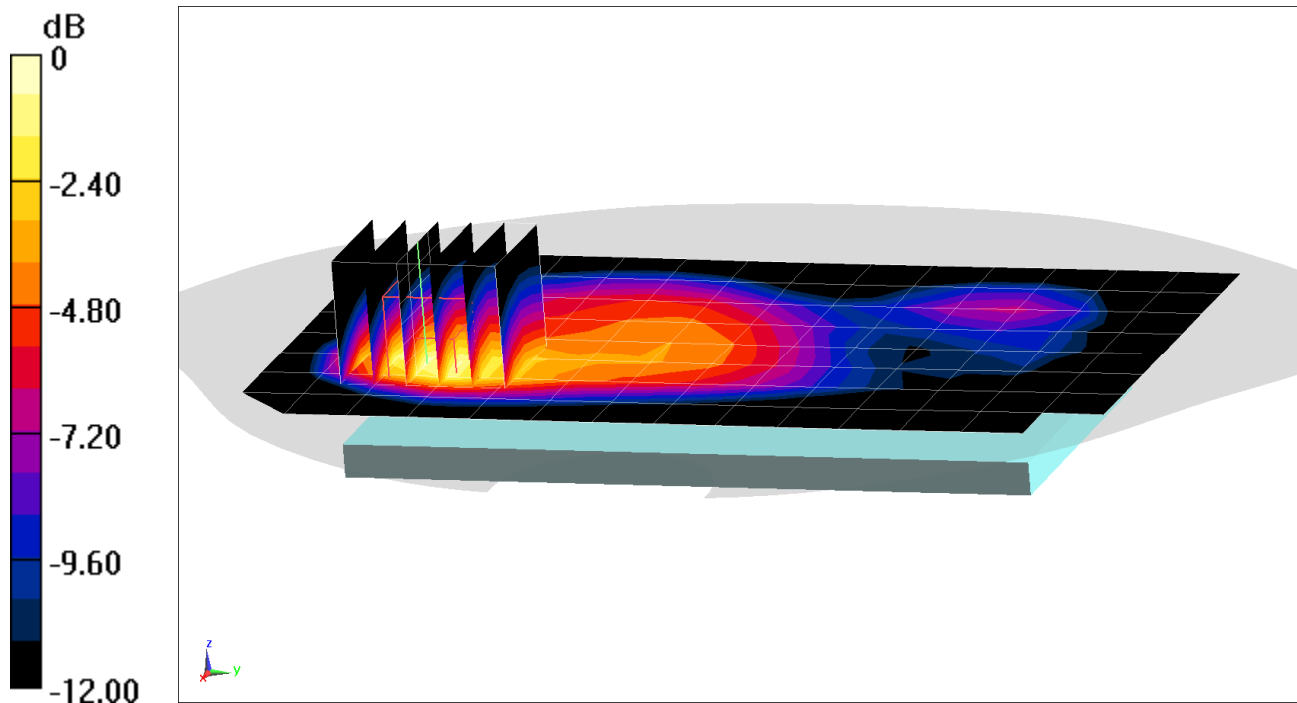

0 dB = 1.41 W/kg = 1.49 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 700 Body Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 58.379$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 18.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.49 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.232 W/kg

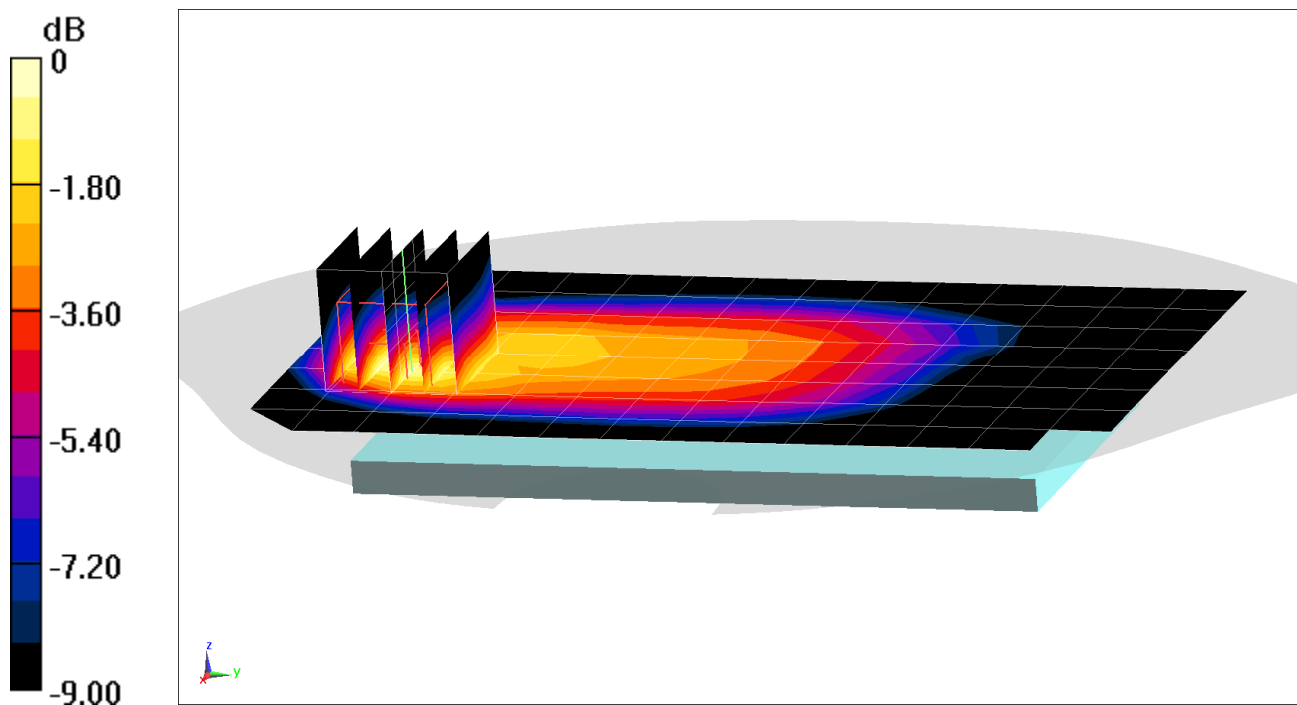

0 dB = 0.343 W/kg = -4.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 700 Body Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 58.379$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 18.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 71, Body SAR, Right Edge, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.48 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.250 W/kg

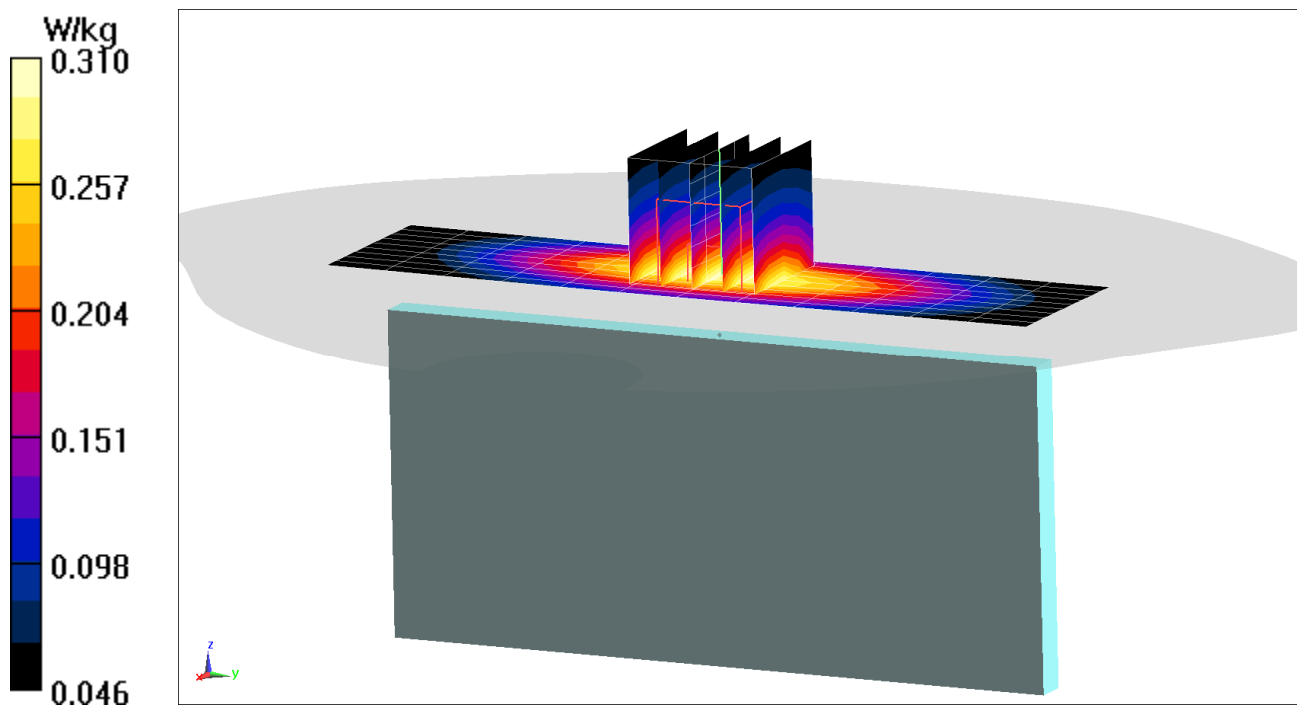

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 700 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 58.129$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 18.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 707.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 25 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.52 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.395 W/kg

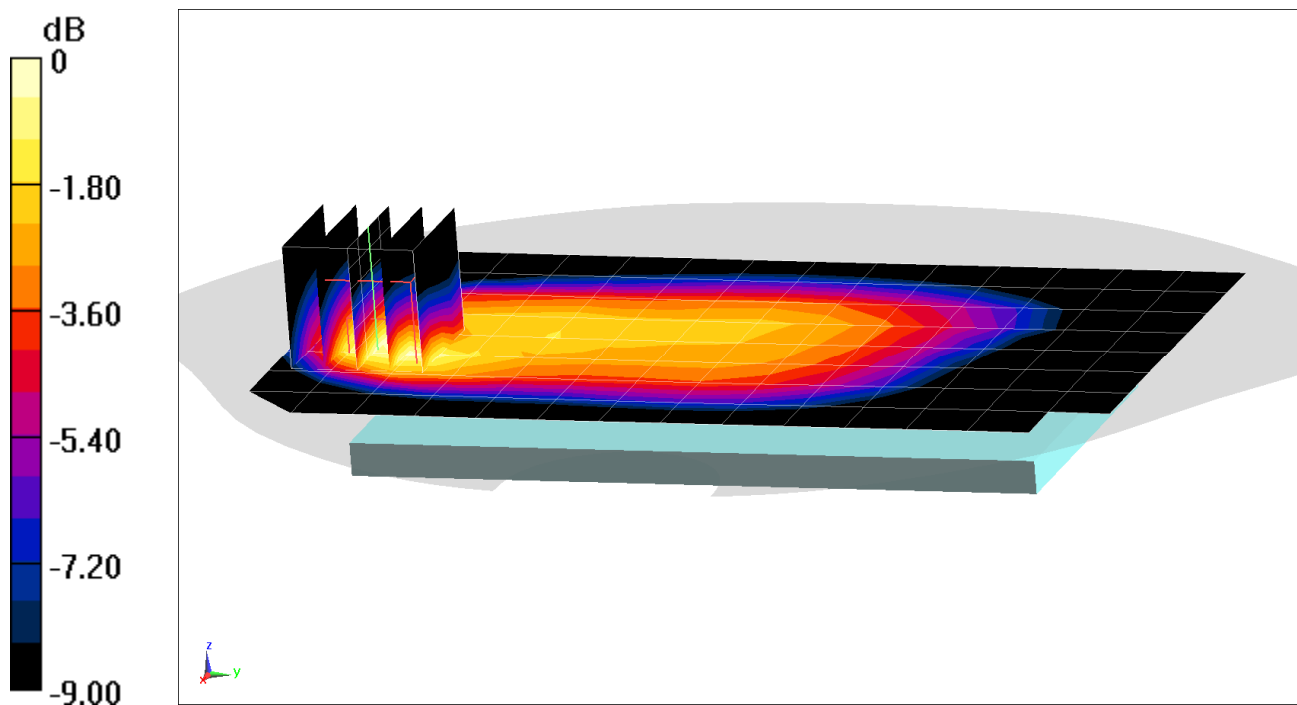

0 dB = 0.586 W/kg = -2.32 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 700 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 1.005 \text{ S/m}$; $\epsilon_r = 57.445$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 18.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 782 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 25 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.18 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.538 W/kg

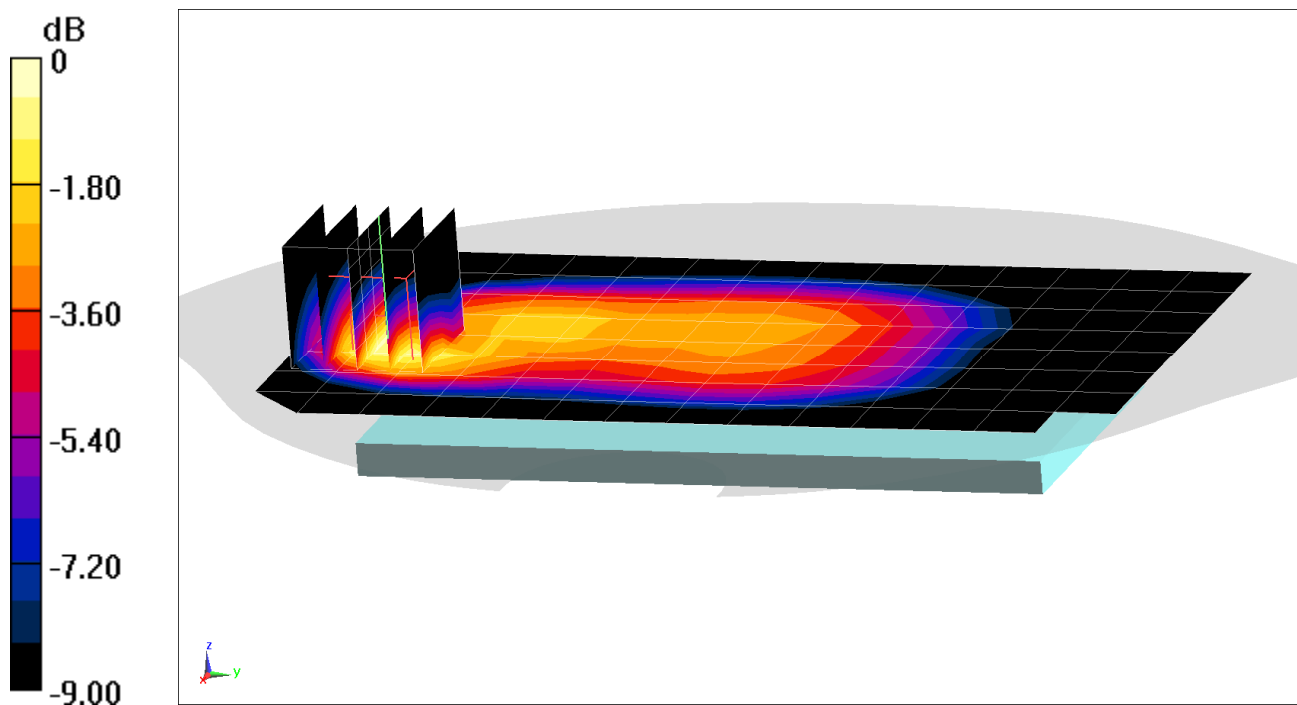

0 dB = 0.805 W/kg = -0.94 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20195

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 0.954 \text{ S/m}$; $\epsilon_r = 54.566$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 23.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7357; ConvF(9.95, 9.95, 9.95) @ 831.5 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Twin-SAM V4.0 (30); Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch, 15 MHz Bandwidth,
QPSK, 1 RB, 36 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.13 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.805 W/kg

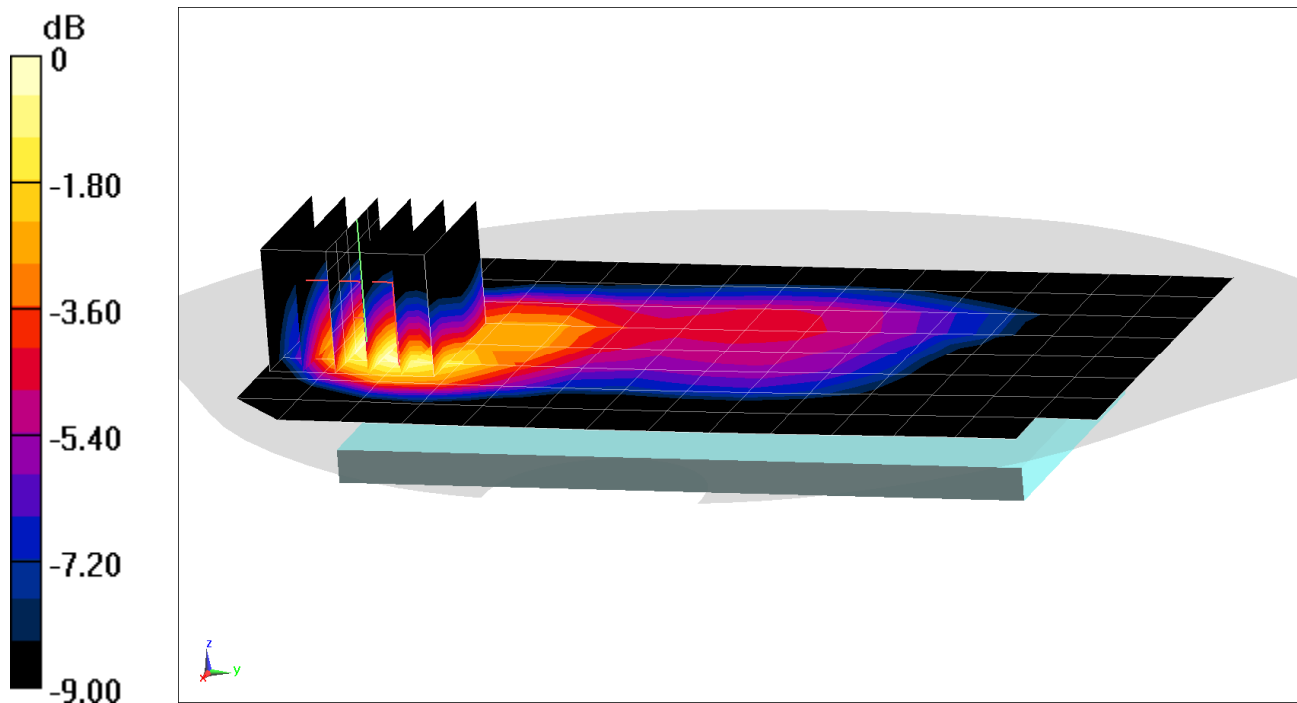

0 dB = 1.16 W/kg = 0.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20195

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1770 \text{ MHz}$; $\sigma = 1.506 \text{ S/m}$; $\epsilon_r = 52.148$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 21.8°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.85, 7.85, 7.85) @ 1770 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, High.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.45 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.824 W/kg

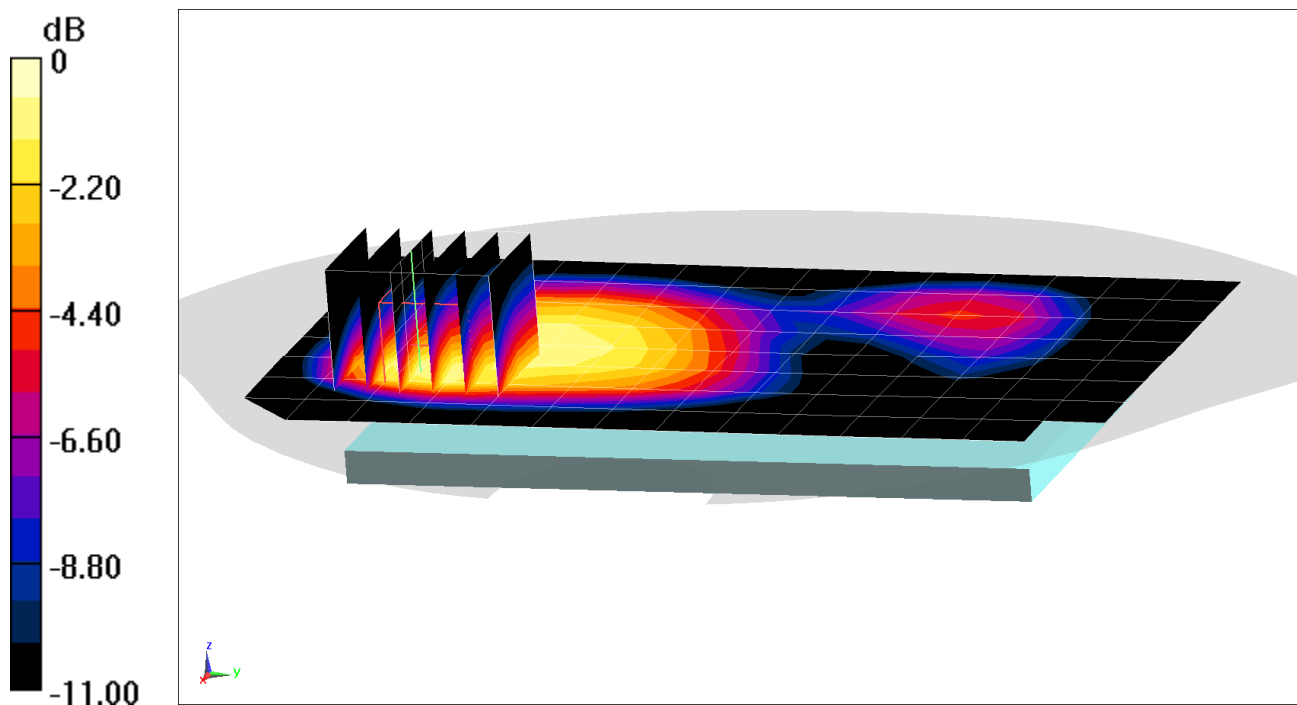

0 dB = 1.25 W/kg = 0.97 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20195

Communication System: UID 0, LTE Band 66 (AWS), Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1745 \text{ MHz}$; $\sigma = 1.479 \text{ S/m}$; $\epsilon_r = 52.249$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 21.8°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.85, 7.85, 7.85) @ 1745 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 66 (AWS), Body SAR, Left Edge, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 50 RB Offset**


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.71 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.851 W/kg

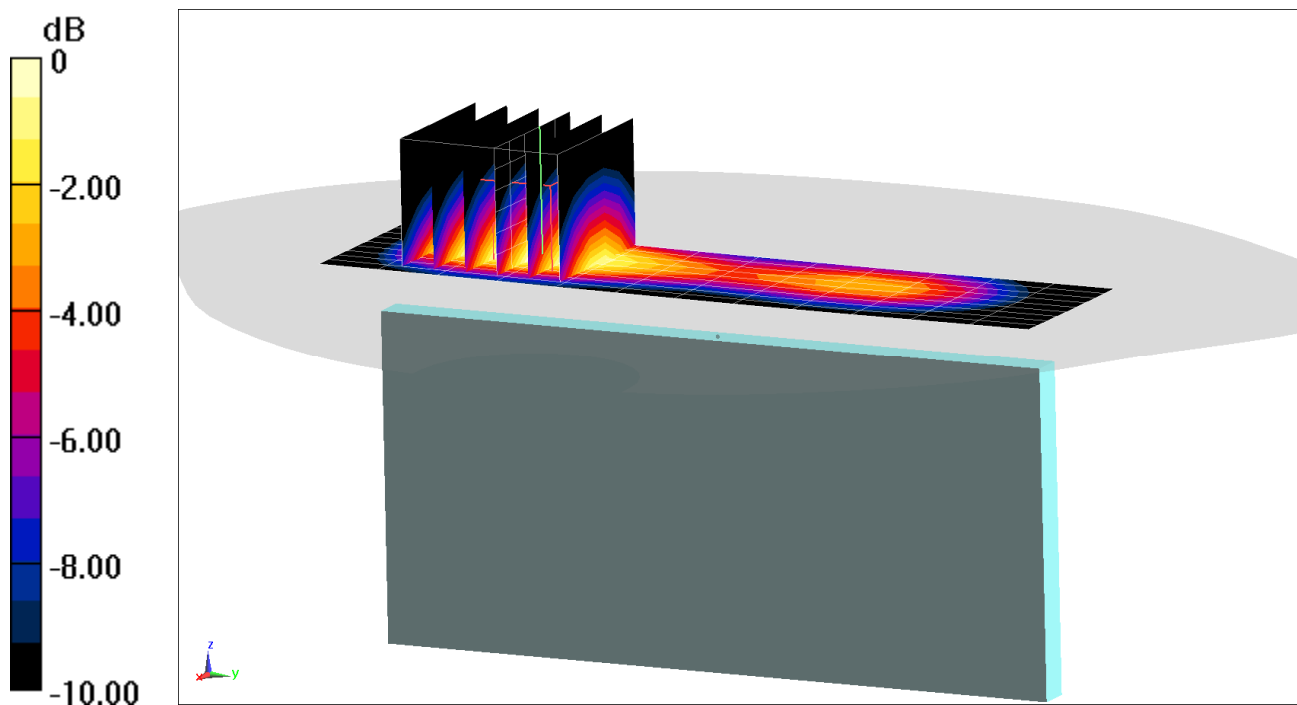

0 dB = 1.17 W/kg = 0.68 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20195

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1860 \text{ MHz}$; $\sigma = 1.524 \text{ S/m}$; $\epsilon_r = 51.313$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0cm

Test Date: 11-06-2019; Ambient Temp: 22.7°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1860 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, Low.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.13 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.954 W/kg

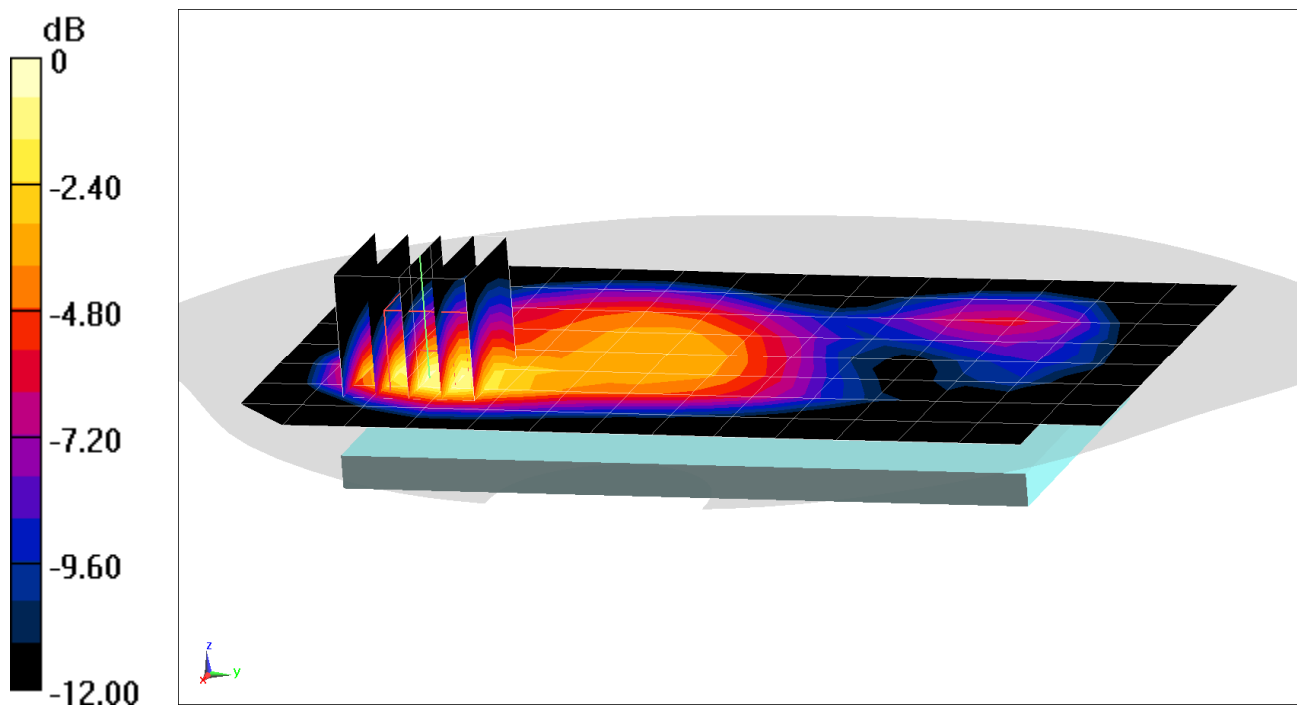

0 dB = 1.44 W/kg = 1.58 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2506 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$; $\sigma = 2.111 \text{ S/m}$; $\epsilon_r = 51.277$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-11-2019; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2506 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 41 Power Class 2, Body SAR, Back side, Low.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 50 RB Offset**


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.35 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.669 W/kg

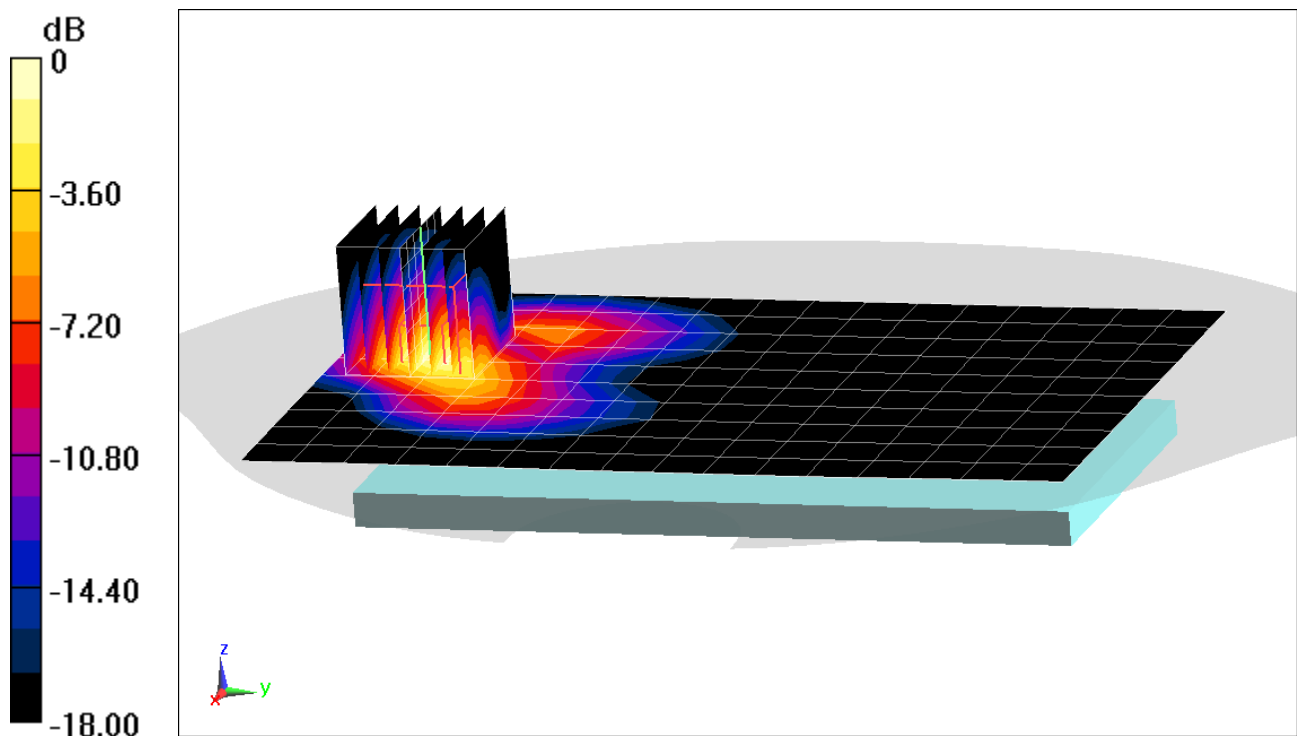

0 dB = 1.13 W/kg = 0.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2506 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$; $\sigma = 2.111 \text{ S/m}$; $\epsilon_r = 51.277$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-11-2019; Ambient Temp: 22.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2506 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: LTE Band 41 Power Class 2, Body SAR, Bottom Edge, Low.ch, 20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset


Area Scan (11x10x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.49 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.978 W/kg

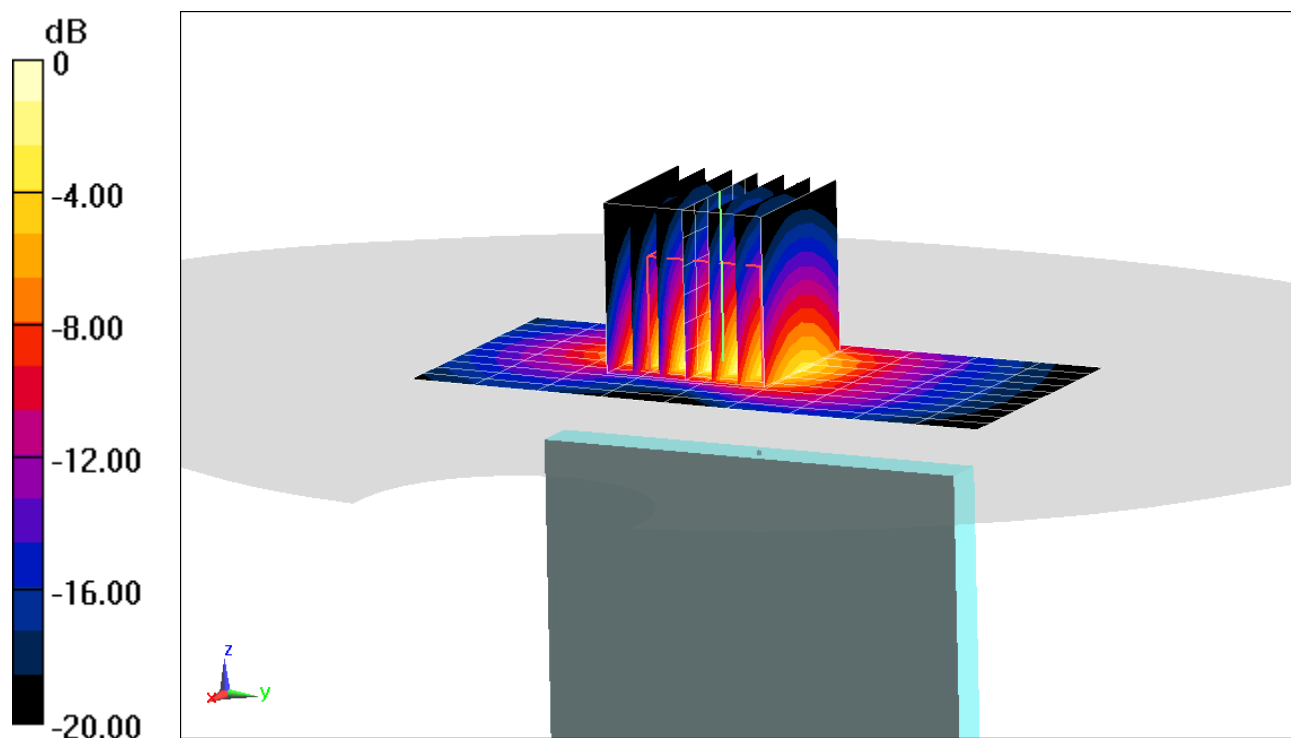

0 dB = 1.70 W/kg = 2.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20245

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 2.037 \text{ S/m}$; $\epsilon_r = 51.625$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-07-2019; Ambient Temp: 22.9°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2462 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 11, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.4960 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.278 W/kg

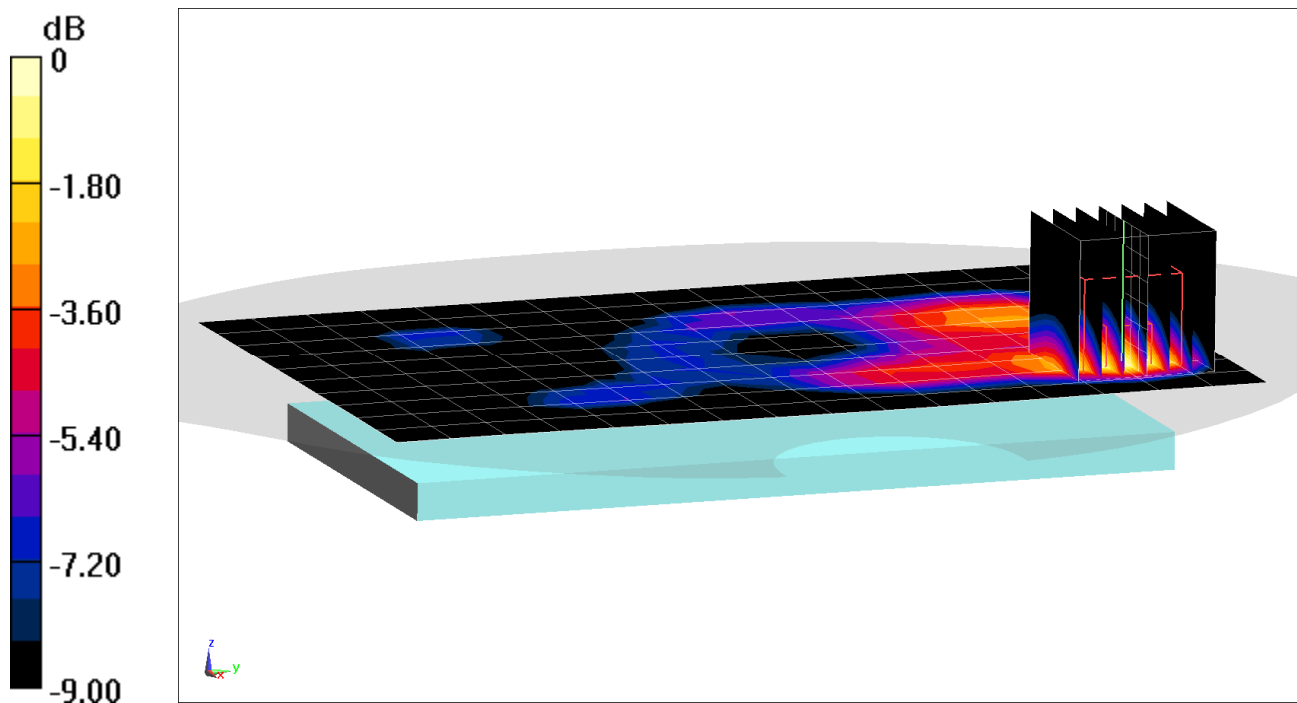

0 dB = 0.457 W/kg = -3.40 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20245

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 2.037 \text{ S/m}$; $\epsilon_r = 51.625$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-07-2019; Ambient Temp: 22.9°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2462 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 11, 1 Mbps, Left Edge


Area Scan (10x17x1): Measurement grid: $dx=5\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.353 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.608 W/kg

SAR(1 g) = 0.294 W/kg

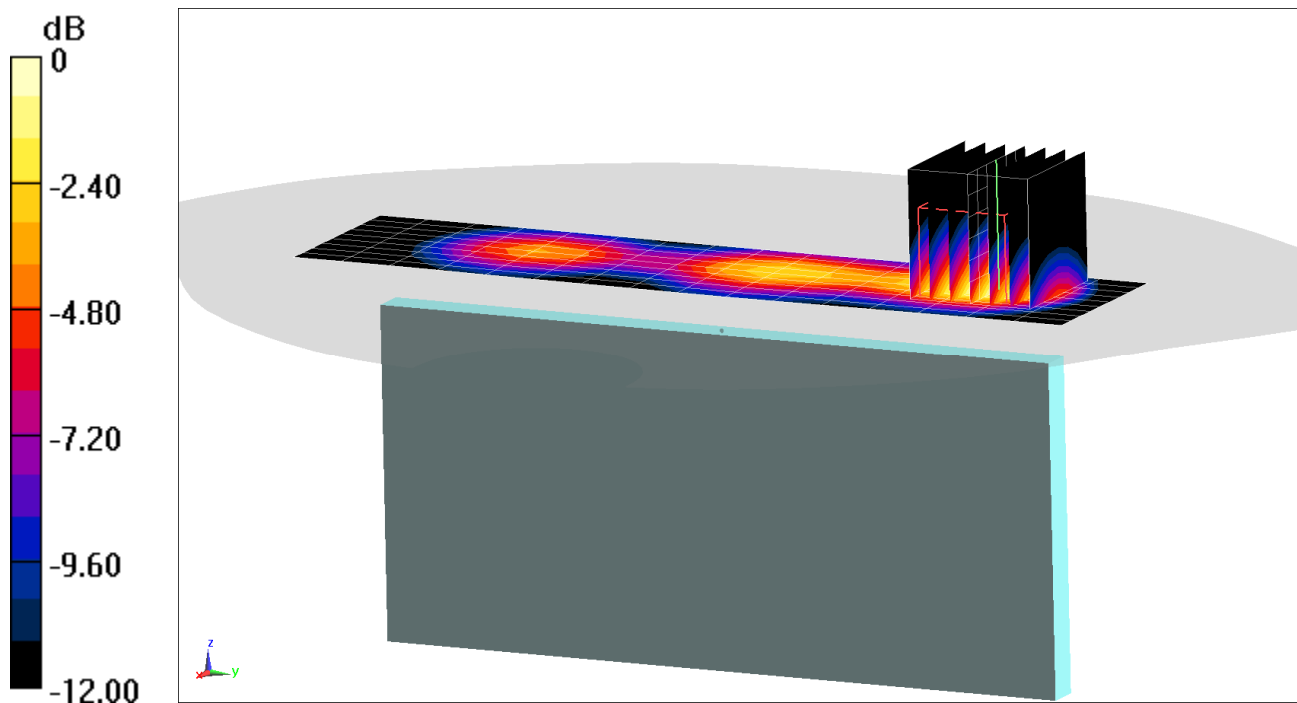

0 dB = 0.484 W/kg = -3.15 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20211

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5260 \text{ MHz}$; $\sigma = 5.281 \text{ S/m}$; $\epsilon_r = 48.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-12-2019; Ambient Temp: 22.7°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7409; ConvF(4.7, 4.7, 4.7) @ 5260 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: IEEE 802.11a, UNII-2A, 20 MHz Bandwidth, Body SAR, Ch 52, 6 Mbps, Back Side


Area Scan (13x23x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 9.905 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.456 W/kg

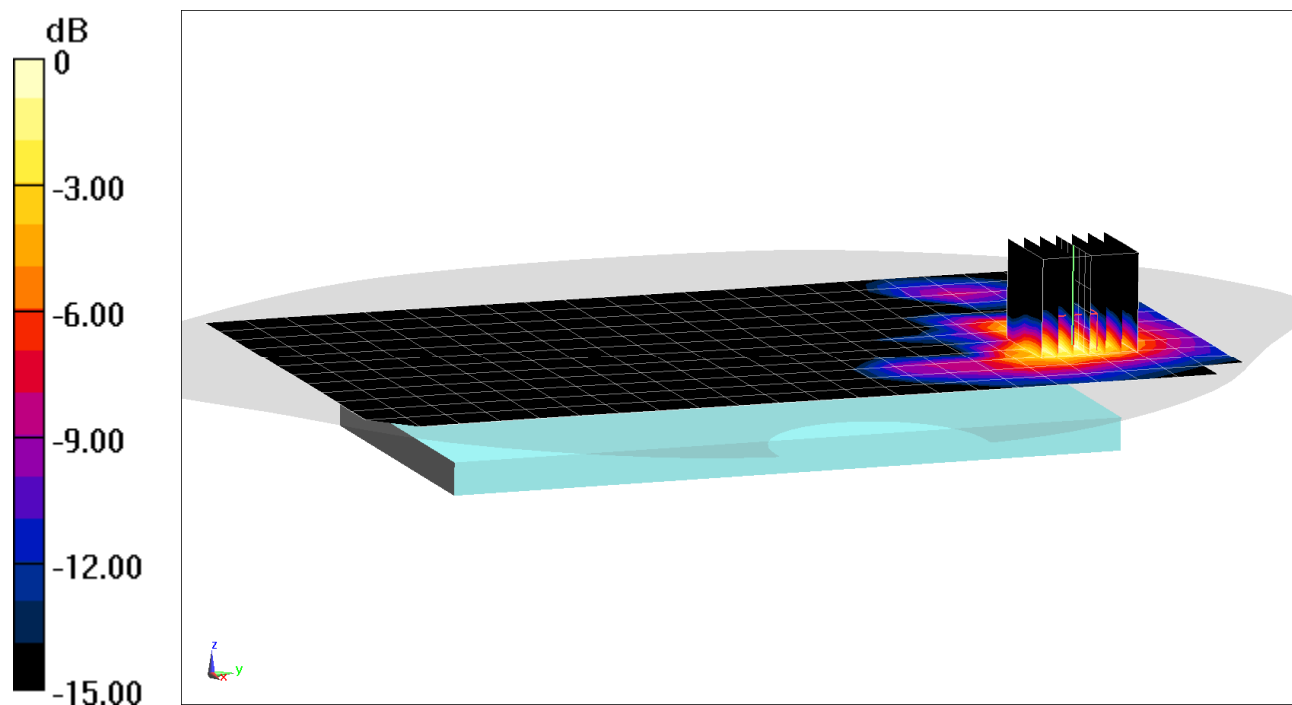

0 dB = 1.04 W/kg = 0.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20211

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5805 \text{ MHz}$; $\sigma = 6.291 \text{ S/m}$; $\epsilon_r = 48.136$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-19-2019; Ambient Temp: 23.0°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(4.23, 4.23, 4.23) @ 5805 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: IEEE 802.11a, U-NII-3, 20 MHz Bandwidth, Body SAR, Ch 161, 6 Mbps, Top Edge


Area Scan (10x13x1): Measurement grid: $dx=5\text{mm}$, $dy=10\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 10.70 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 0.693 W/kg

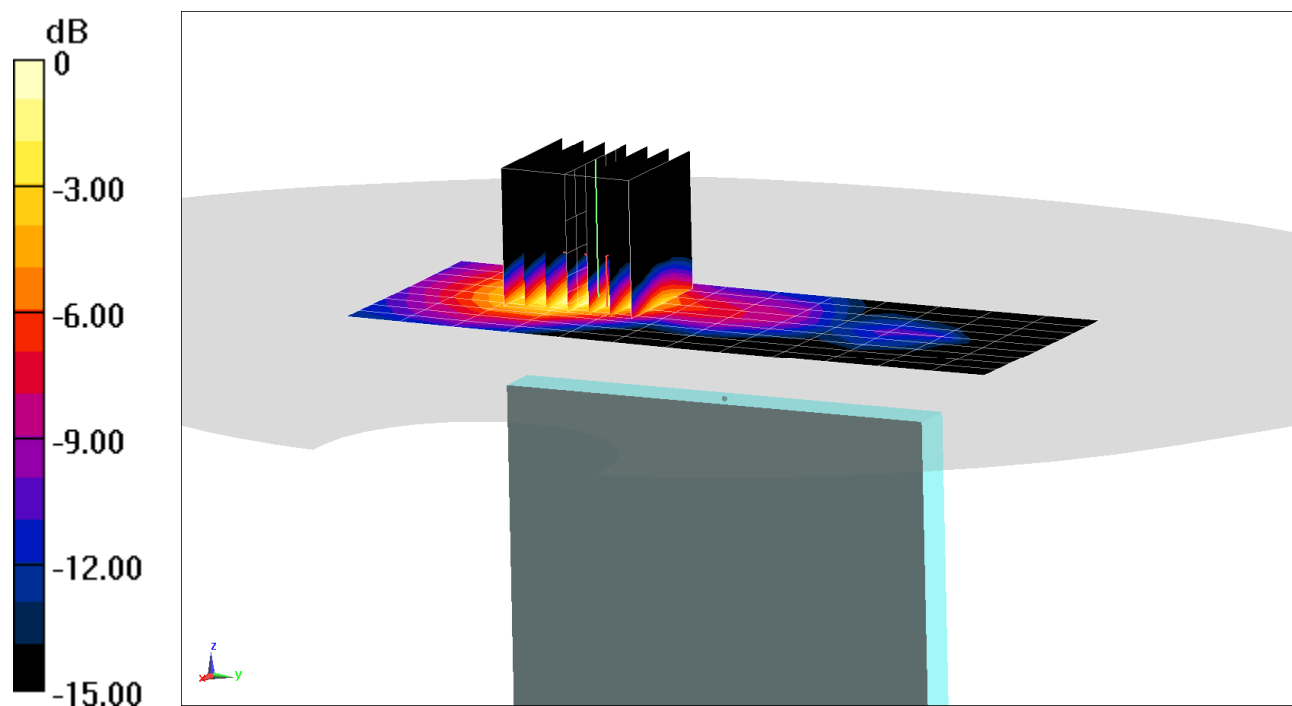

0 dB = 1.68 W/kg = 2.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20211

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.998 \text{ S/m}$; $\epsilon_r = 52.423$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-18-2019; Ambient Temp: 23.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7410; ConvF(7.44, 7.44, 7.44) @ 2441 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.840 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.0088 W/kg

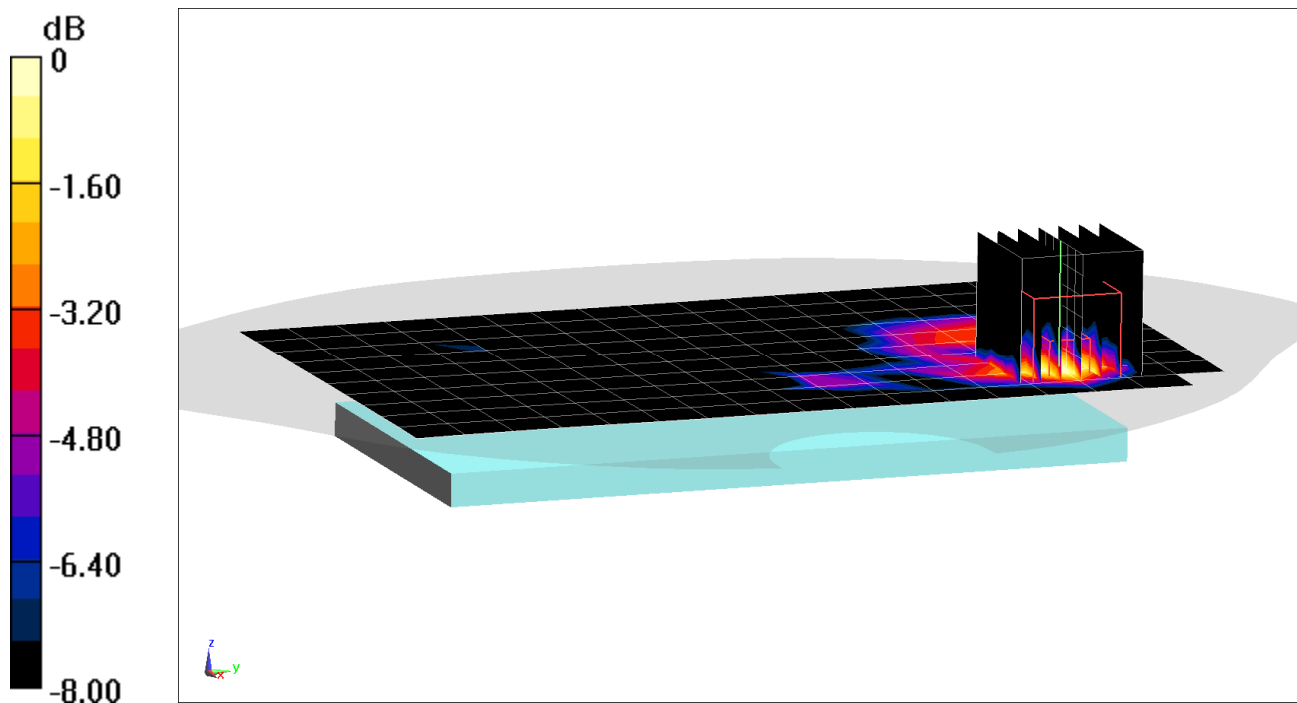

0 dB = 0.0151 W/kg = -18.21 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.6$ MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.274$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 11-06-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7409; ConvF(7.85, 7.85, 7.85) @ 1752.6 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: UMTS 1750, Phablet SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.11 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 13.7 W/kg

SAR(10 g) = 2.61 W/kg

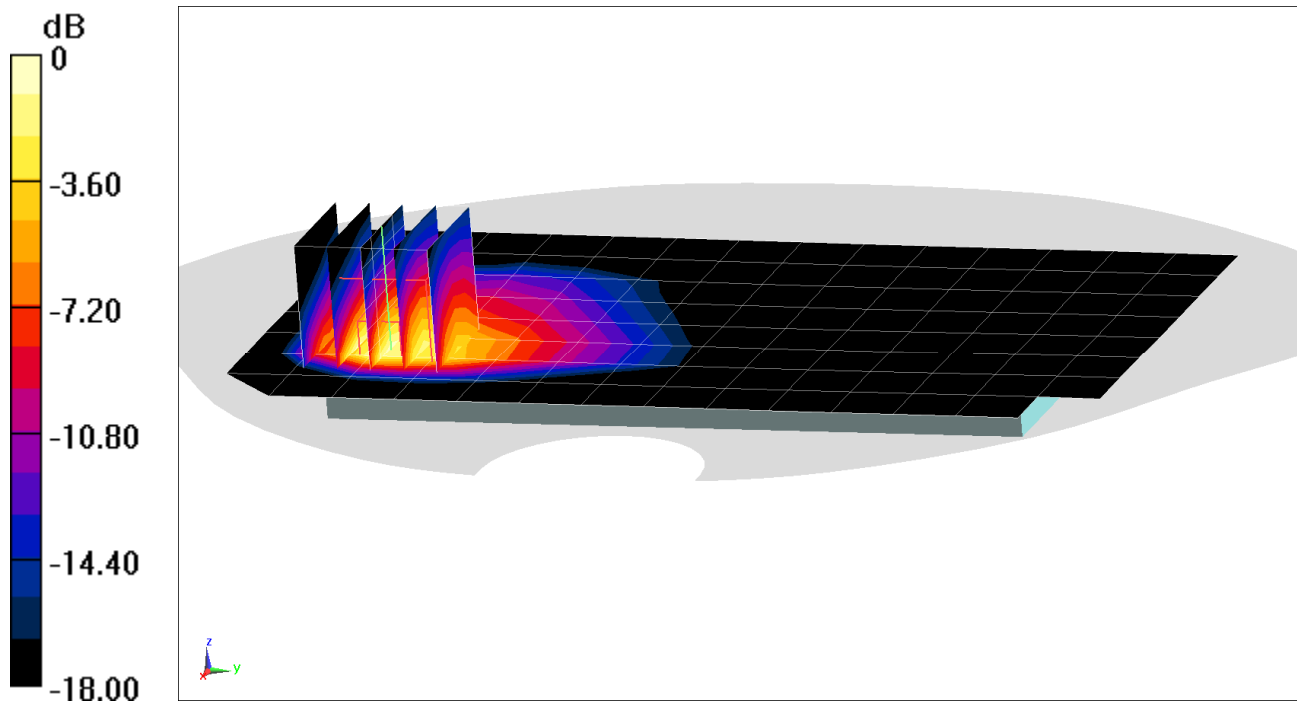

0 dB = 8.45 W/kg = 9.27 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.543 \text{ S/m}$; $\epsilon_r = 51.835$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 11-11-2019; Ambient Temp: 21.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1880 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: UMTS 1900, Phablet SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.63 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 12.9 W/kg

SAR(10 g) = 2.51 W/kg

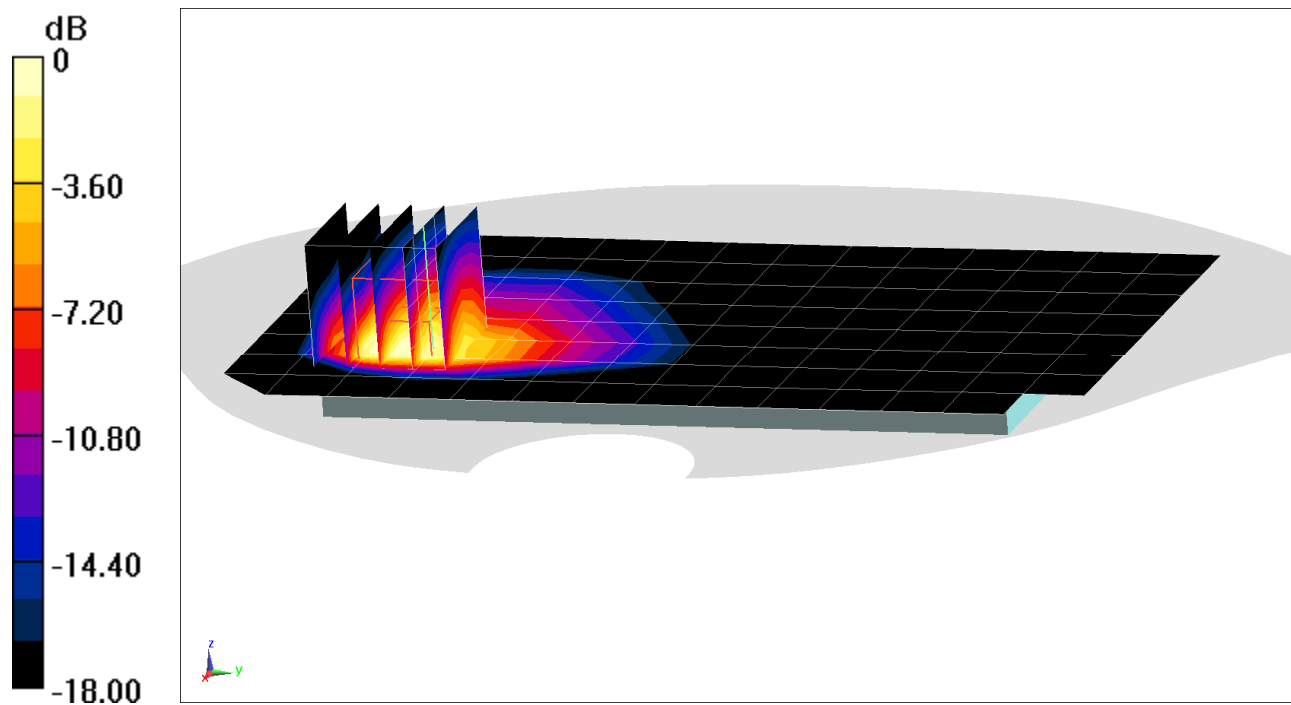

0 dB = 7.80 W/kg = 8.92 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20187

Communication System: UID 0, CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1851.25 \text{ MHz}$; $\sigma = 1.512 \text{ S/m}$; $\epsilon_r = 51.923$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 11-11-2019; Ambient Temp: 21.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1851.25 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: PCS EVDO, Phablet SAR, Back side, Low.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.80 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 11.2 W/kg

SAR(10 g) = 2.42 W/kg

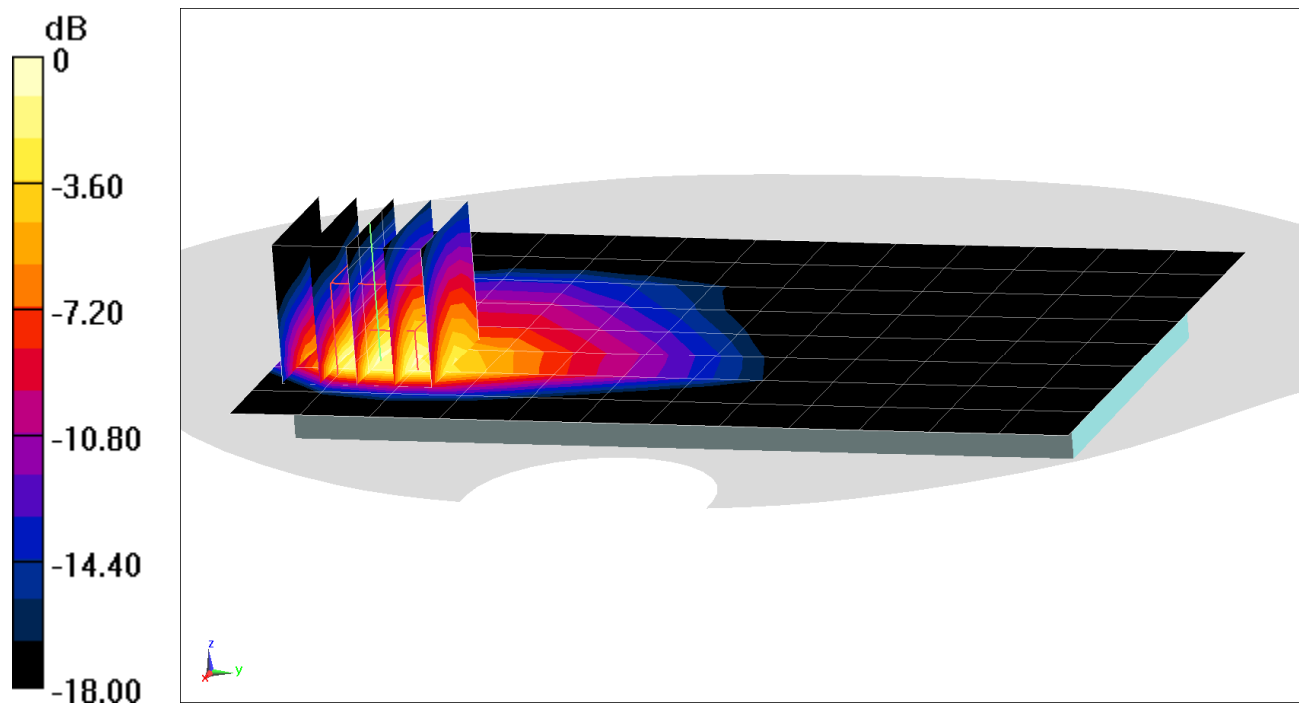

0 dB = 7.44 W/kg = 8.72 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20203

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1770 \text{ MHz}$; $\sigma = 1.506 \text{ S/m}$; $\epsilon_r = 52.211$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 11-06-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7409; ConvF(7.85, 7.85, 7.85) @ 1770 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 66 (AWS), Phablet SAR, Back side, High.ch, 20 MHz Bandwidth,
QPSK, 50 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 62.02 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 15.1 W/kg

SAR(10 g) = 2.7 W/kg

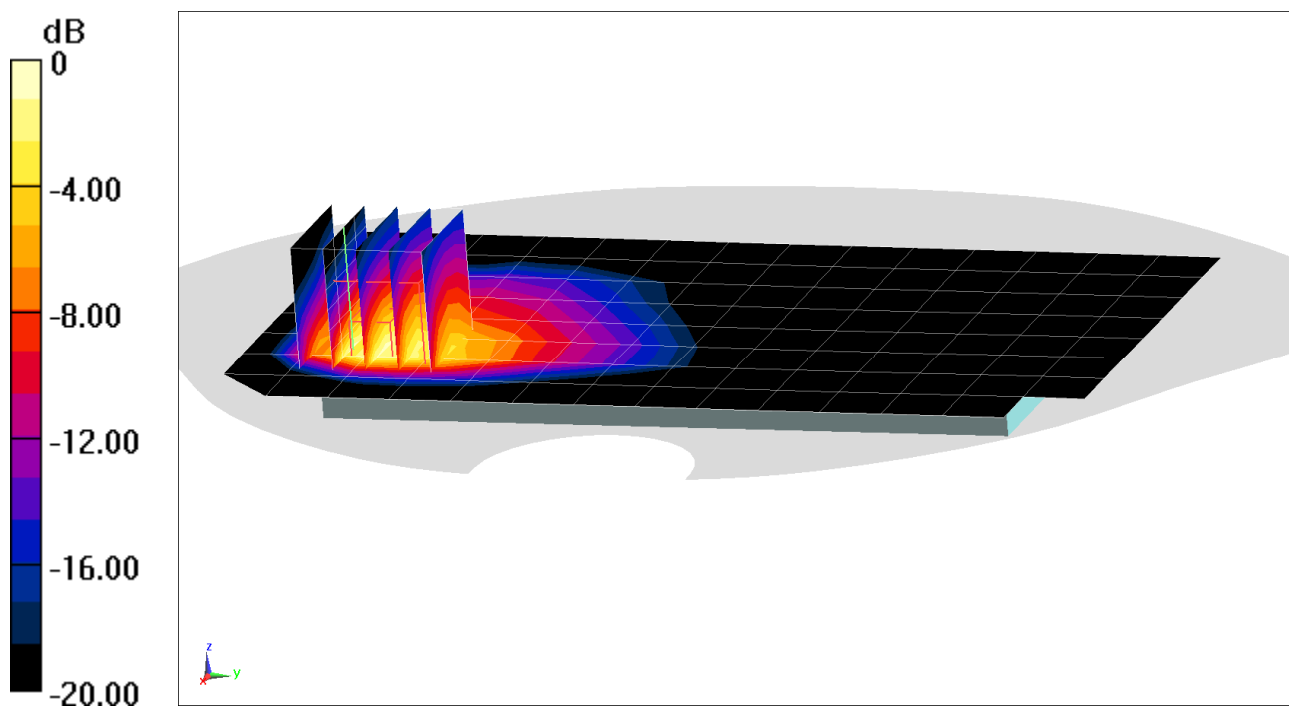

0 dB = 9.03 W/kg = 9.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20195

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1860 \text{ MHz}$; $\sigma = 1.522 \text{ S/m}$; $\epsilon_r = 51.895$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 11-11-2019; Ambient Temp: 21.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1860 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Mode: LTE Band 25 (PCS), Phablet SAR, Back side, Low.ch, 20 MHz Bandwidth,
QPSK, 50 RB, 25 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.69 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 12.3 W/kg

SAR(10 g) = 2.47 W/kg

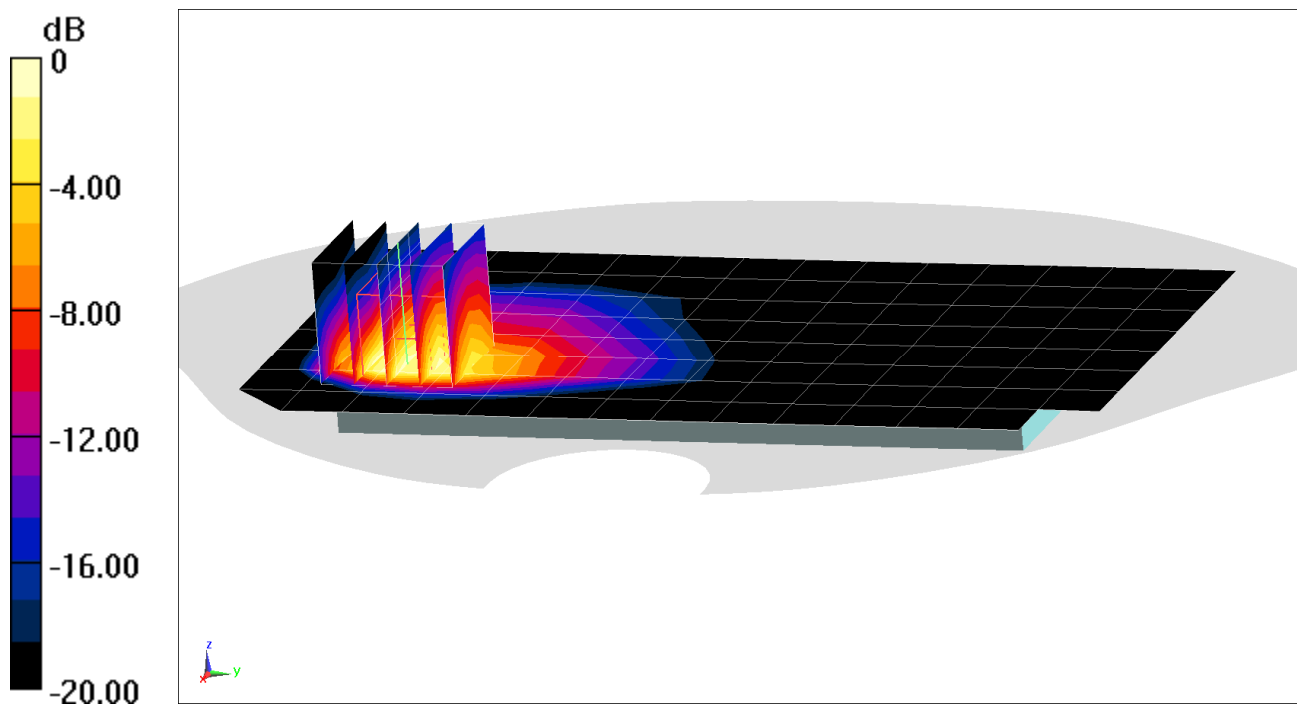

0 dB = 7.71 W/kg = 8.87 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFL555DL; Type: Portable Handset; Serial: 20211

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5260 \text{ MHz}$; $\sigma = 5.281 \text{ S/m}$; $\epsilon_r = 48.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 11-12-2019; Ambient Temp: 22.7°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7409; ConvF(4.7, 4.7, 4.7) @ 5260 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

Mode: IEEE 802.11a, U-NII-2A, 20 MHz Bandwidth, Phablet SAR, Ch 52, 6 Mbps, Back Side


Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$; Graded Ratio: 1.4

Reference Value = 3.574 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 30.0 W/kg

SAR(10 g) = 1.26 W/kg

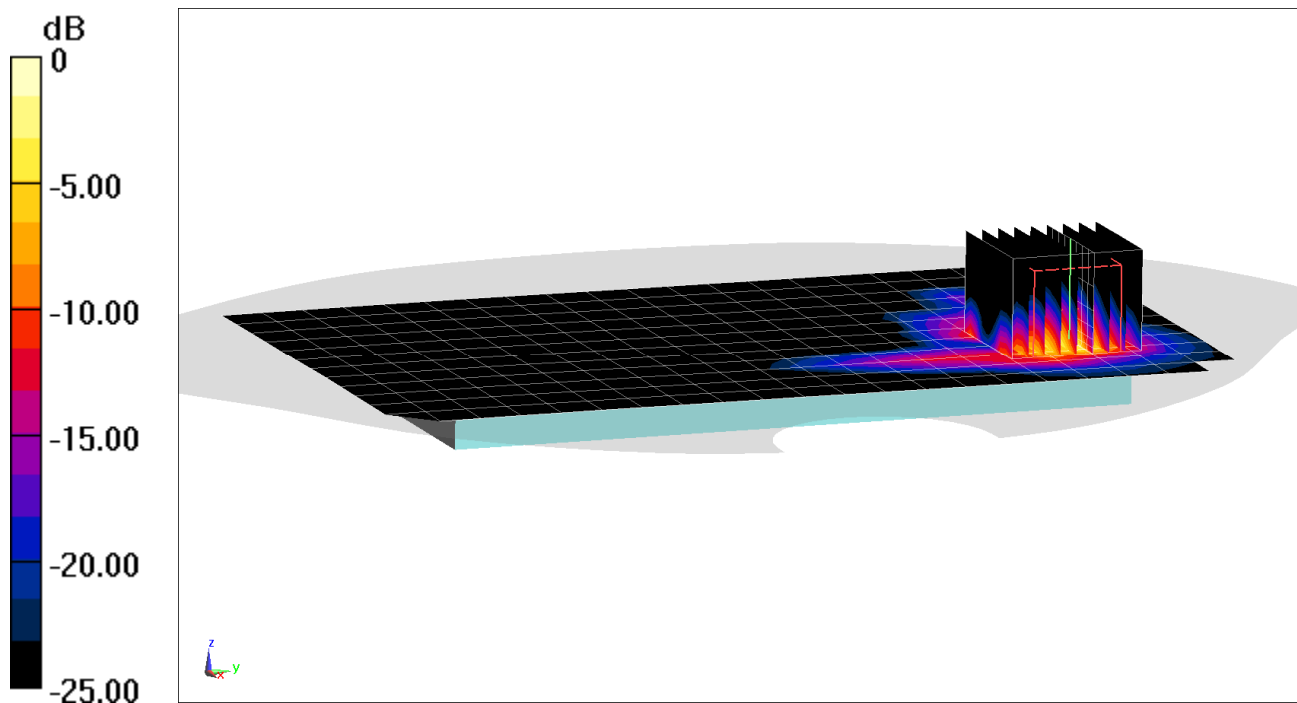

0 dB = 16.1 W/kg = 12.07 dBW/kg

APPENDIX B: SAR DIPOLE VERIFICATION PLOTS

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 700 Head; Medium parameters used:

$f = 750 \text{ MHz}$; $\sigma = 0.894 \text{ S/m}$; $\epsilon_r = 42.401$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-05-2019; Ambient Temp: 19.9°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN7551; ConvF(10.11, 10.11, 10.11) @ 750 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.67 W/kg

Deviation(1 g) = 0.72%

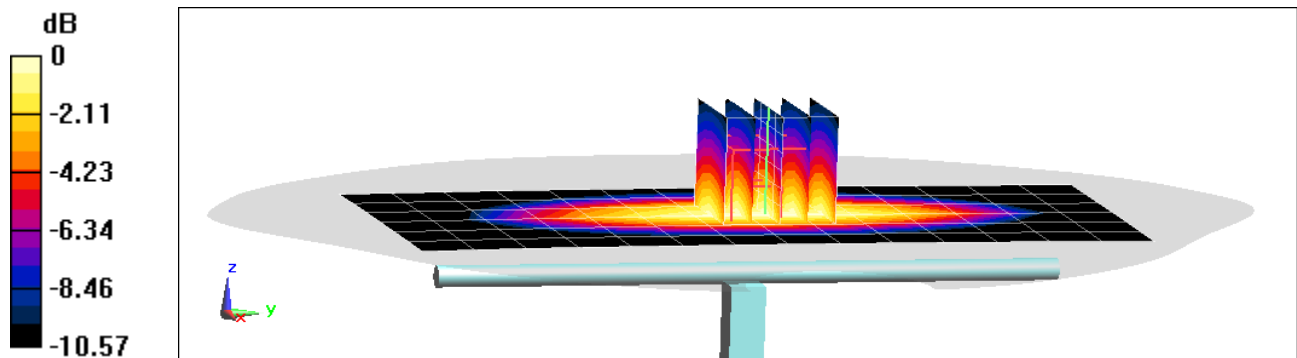

0 dB = 2.22 W/kg = 3.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.896 \text{ S/m}$; $\epsilon_r = 41.002$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-04-2019; Ambient Temp: 21.4°C; Tissue Temp: 18.9°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.93 W/kg

SAR(1 g) = 1.95 W/kg

Deviation(1 g) = 3.50%

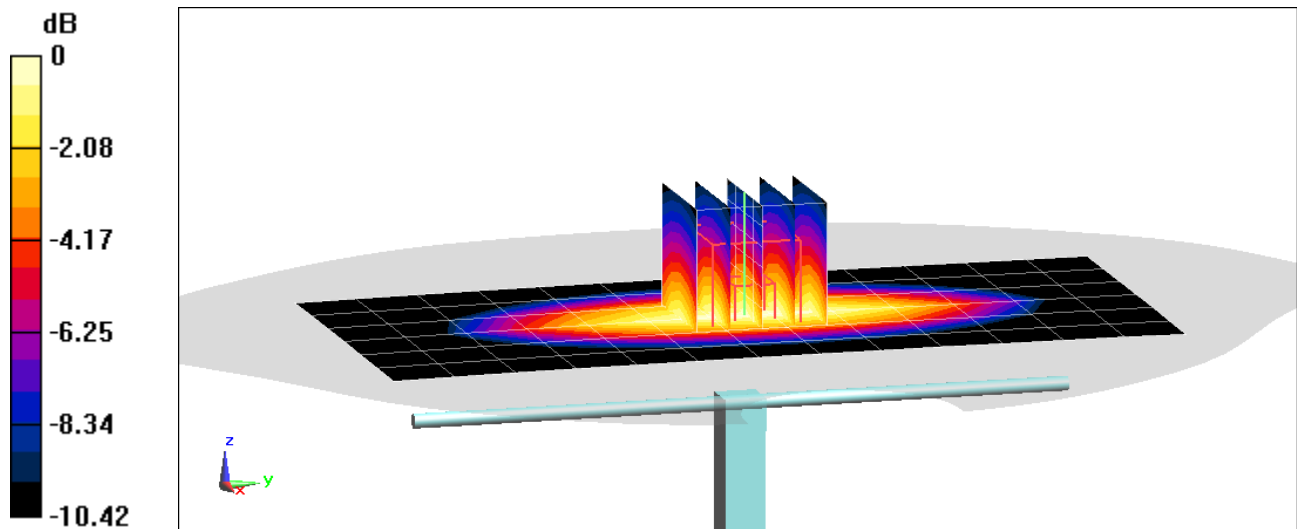

0 dB = 2.61 W/kg = 4.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.401 \text{ S/m}$; $\epsilon_r = 41.488$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 22.0°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3914; ConvF(8.16, 8.16, 8.16) @ 1750 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/14/2019

Phantom: Twin-SAM V5.0 Front 30; Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.41 W/kg

SAR(1 g) = 3.9 W/kg

Deviation(1 g) = 7.73%

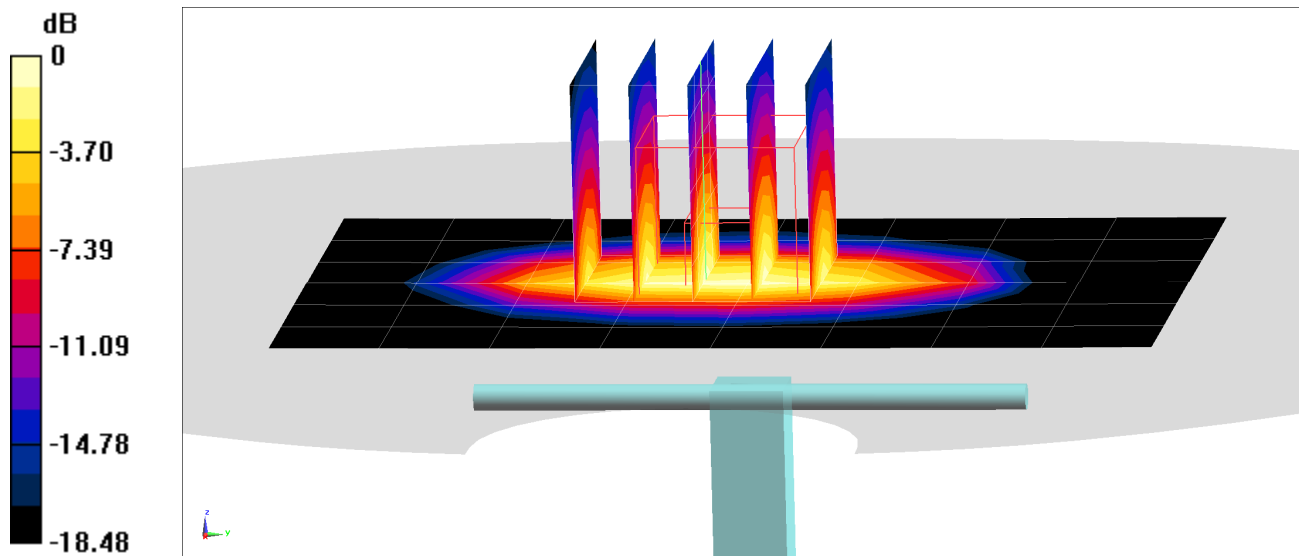

0 dB = 6.08 W/kg = 7.84 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.441 \text{ S/m}$; $\epsilon_r = 40.308$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-13-2019; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1900 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.94 W/kg

SAR(1 g) = 4.17 W/kg

Deviation(1 g) = 6.65%

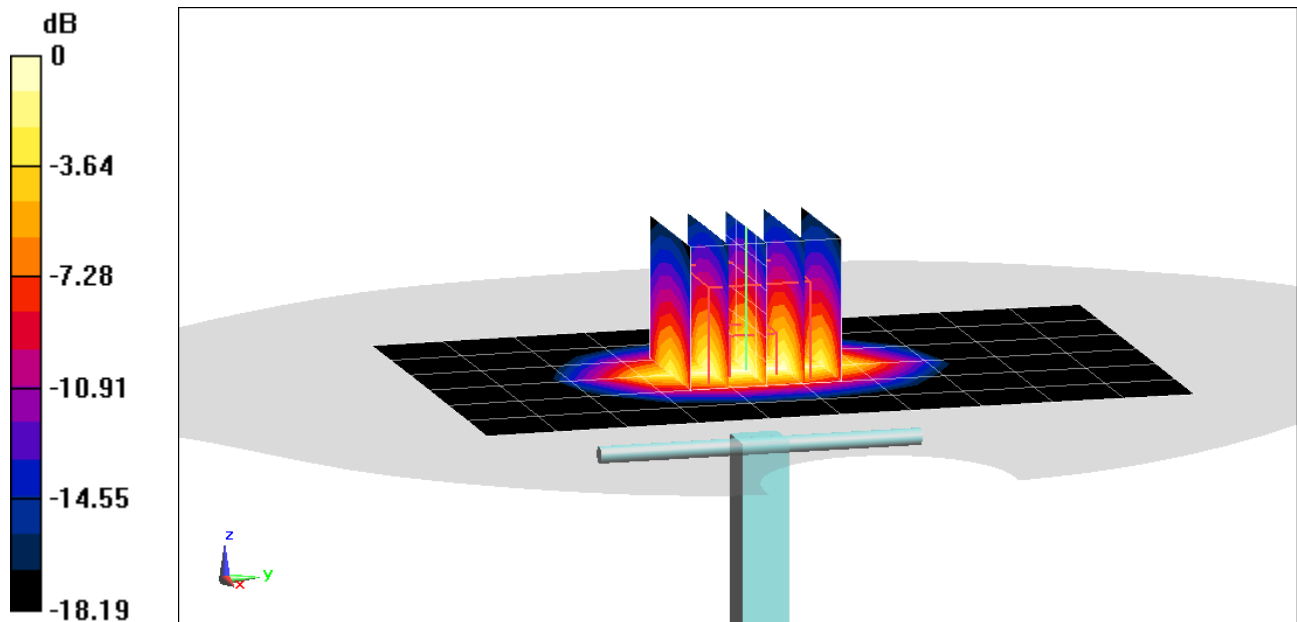

0 dB = 6.61 W/kg = 8.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.446 \text{ S/m}$; $\epsilon_r = 39.709$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-18-2019; Ambient Temp: 22.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7551; ConvF(8.05, 8.05, 8.05) @ 1900 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 8.21 W/kg

SAR(1 g) = 4.25 W/kg

Deviation(1 g) = 6.78%

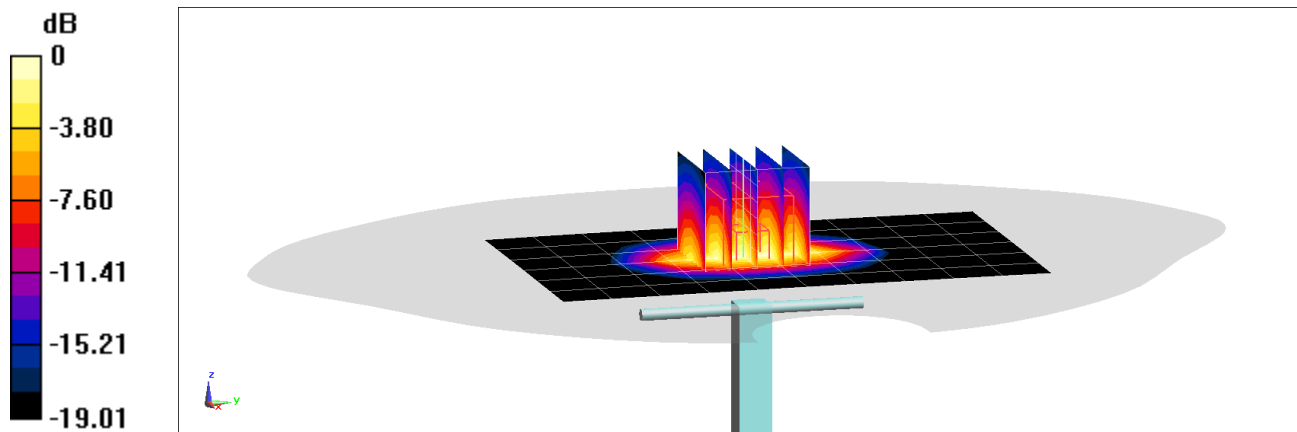

0 dB = 6.75 W/kg = 8.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.816 \text{ S/m}$; $\epsilon_r = 37.492$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7417; ConvF(7.46, 7.46, 7.46) @ 2450 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.12 W/kg

Deviation(1 g) = -2.85%

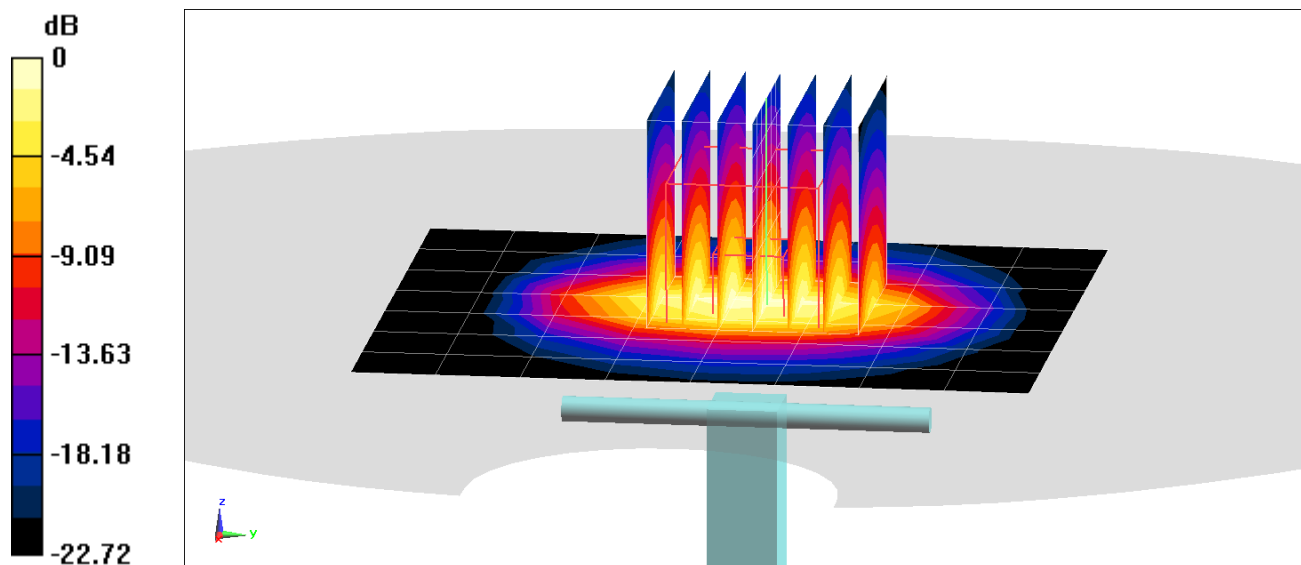

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.866 \text{ S/m}$; $\epsilon_r = 38.982$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-11-2019; Ambient Temp: 21.3°C; Tissue Temp: 19.2°C

Probe: EX3DV4 - SN7417; ConvF(7.46, 7.46, 7.46) @ 2450 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.29 W/kg

Deviation(1 g) = 1.15%

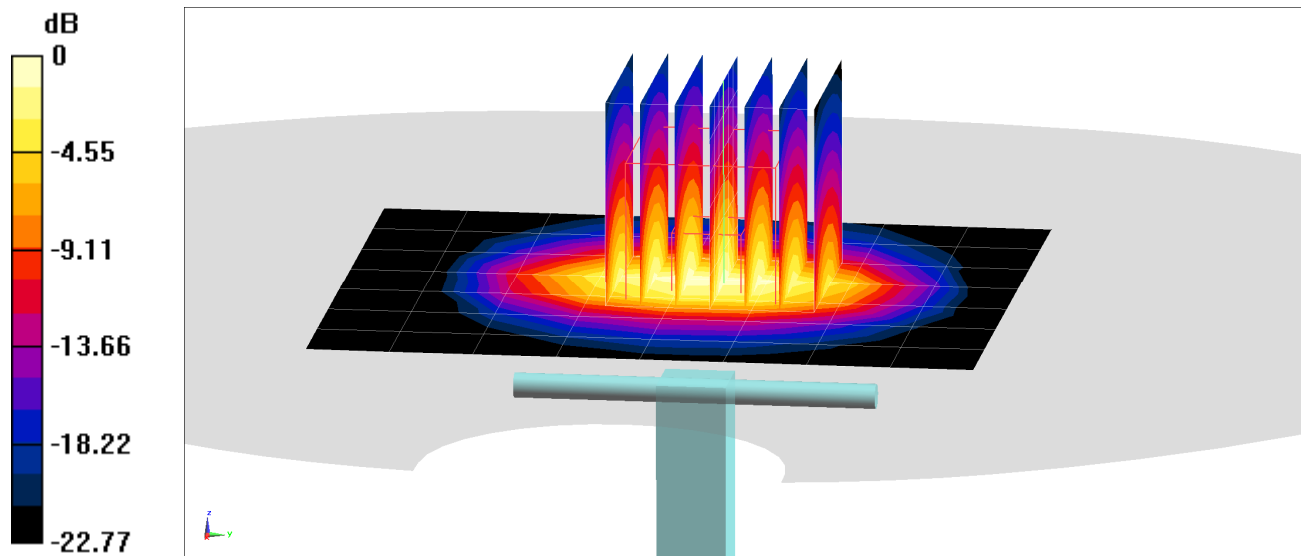

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.852 \text{ S/m}$; $\epsilon_r = 38.489$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-14-2019; Ambient Temp: 23.6°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7417; ConvF(7.46, 7.46, 7.46) @ 2450 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.36 W/kg

Deviation(1 g) = 2.49%

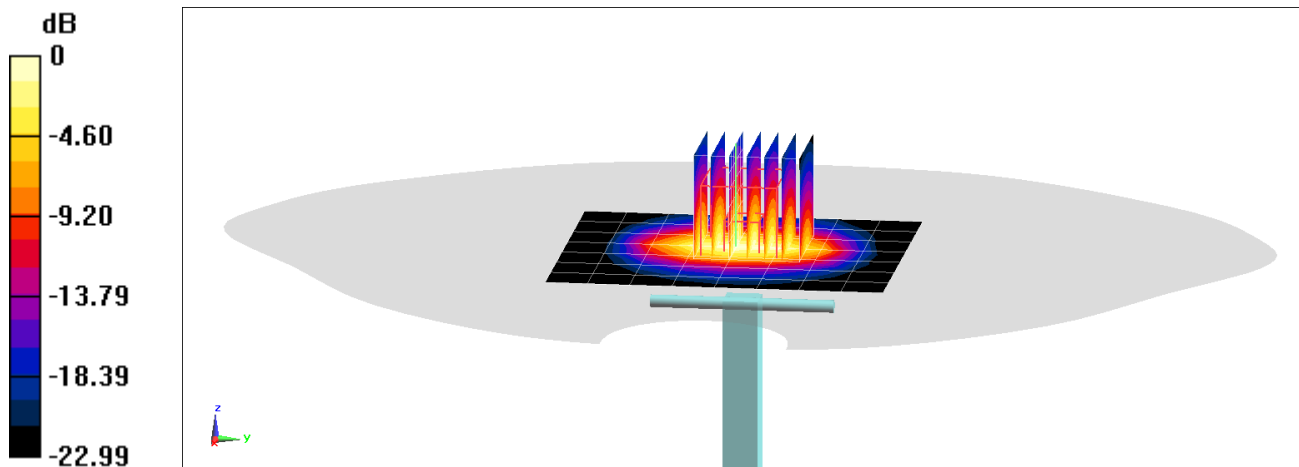

0 dB = 9.01 W/kg = 9.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 1.93 \text{ S/m}$; $\epsilon_r = 37.241$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7417; ConvF(7.17, 7.17, 7.17) @ 2600 MHz; Calibrated: 2/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/13/2019

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 5.87 W/kg

Deviation(1 g) = 5.01%

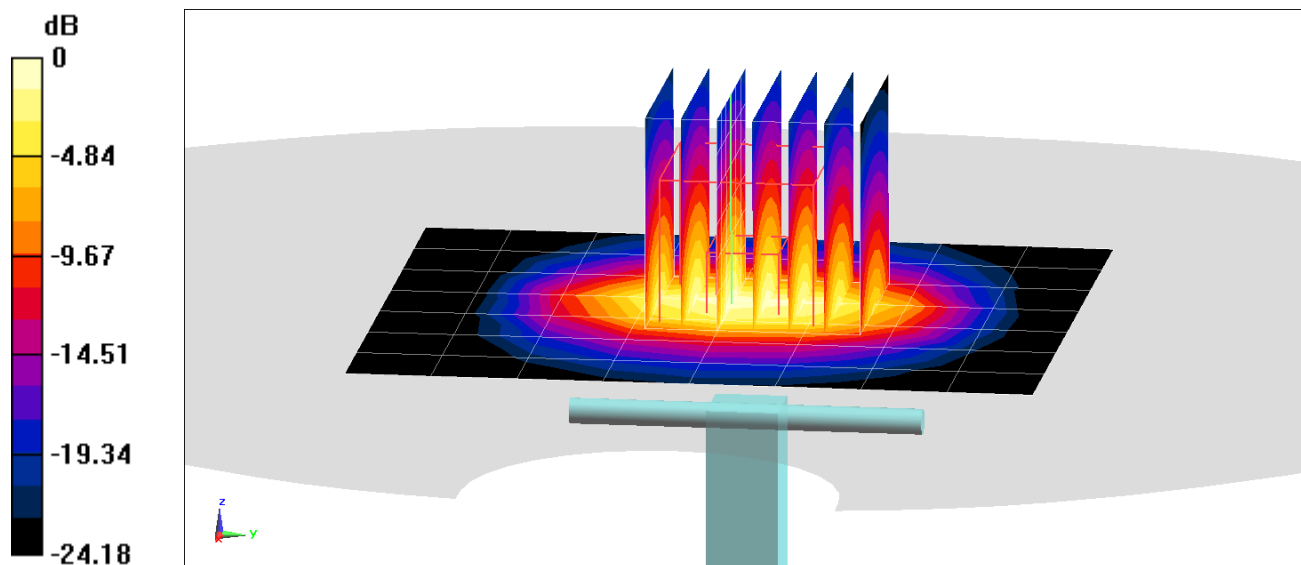

0 dB = 10.0 W/kg = 10.00 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5250 \text{ MHz}$; $\sigma = 4.595 \text{ S/m}$; $\epsilon_r = 36.153$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-18-2019; Ambient Temp: 20.4°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7406; ConvF(5.54, 5.54, 5.54) @ 5250 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.1 W/kg

SAR(1 g) = 3.75 W/kg

Deviation(1 g) = -7.18%

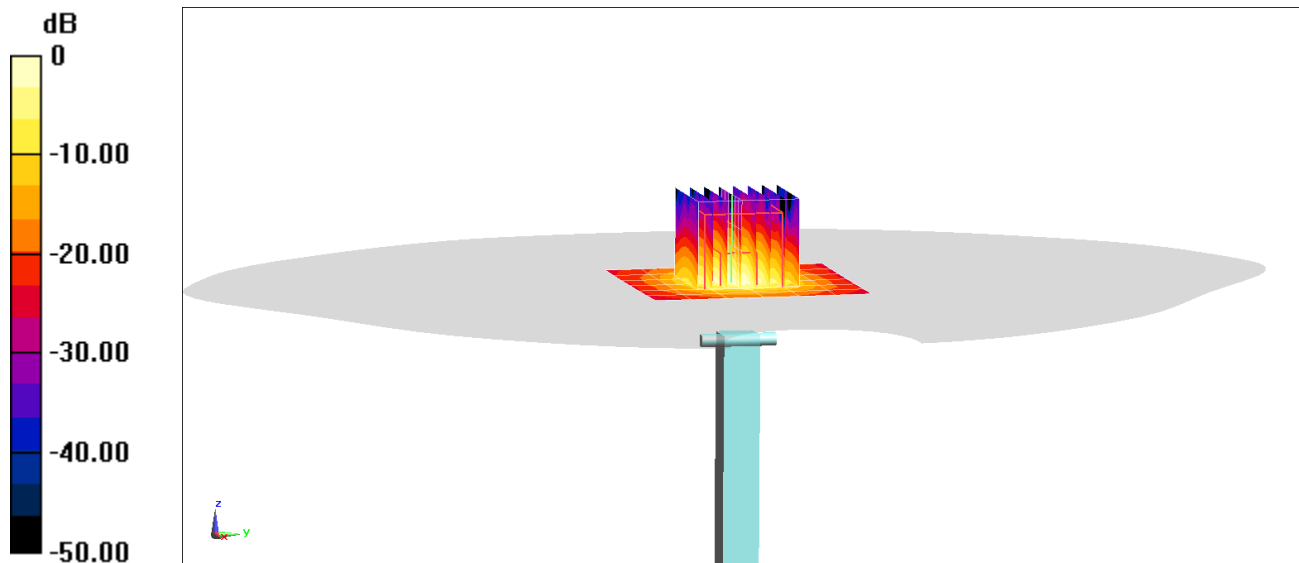

0 dB = 9.21 W/kg = 9.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 4.997 \text{ S/m}$; $\epsilon_r = 35.554$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-18-2019; Ambient Temp: 20.4°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7406; ConvF(4.94, 4.94, 4.94) @ 5600 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

5600 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 3.91 W/kg

Deviation(1 g) = -5.44%

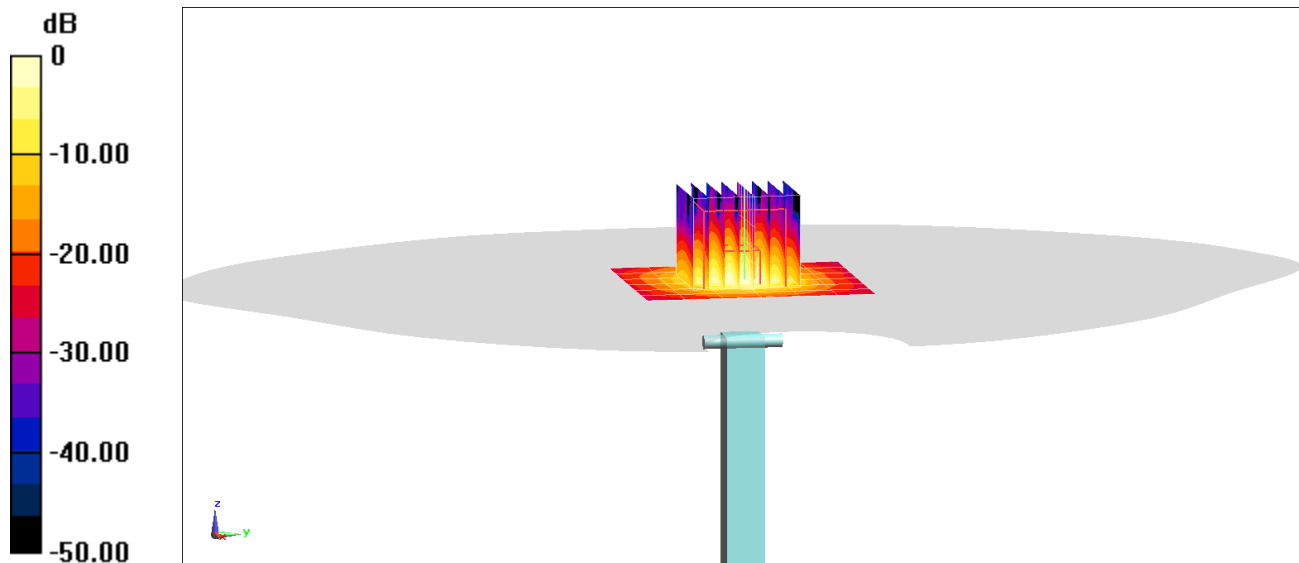

0 dB = 9.52 W/kg = 9.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5750 \text{ MHz}$; $\sigma = 5.174 \text{ S/m}$; $\epsilon_r = 35.298$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-18-2019; Ambient Temp: 20.4°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7406; ConvF(5.23, 5.23, 5.23) @ 5750 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 3.79 W/kg

Deviation(1 g) = -5.49%

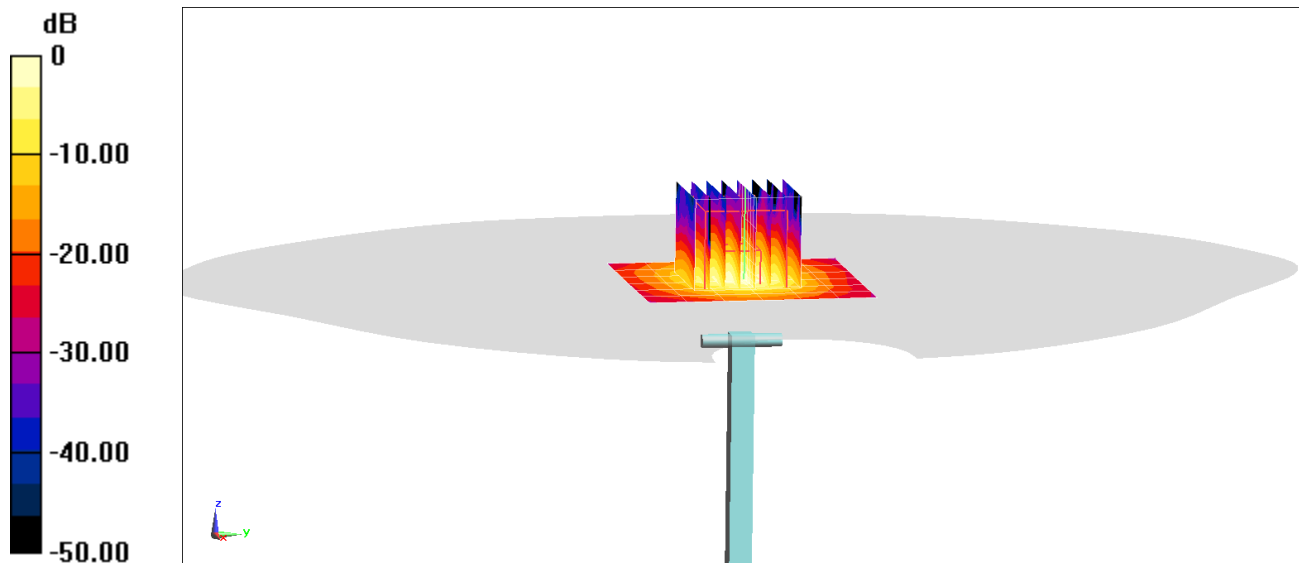

0 dB = 9.38 W/kg = 9.72 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 700 Body Medium parameters used:

$f = 750 \text{ MHz}$; $\sigma = 0.976 \text{ S/m}$; $\epsilon_r = 57.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-04-2019; Ambient Temp: 18.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 1.72 W/kg

Deviation(1 g) = 2.02%

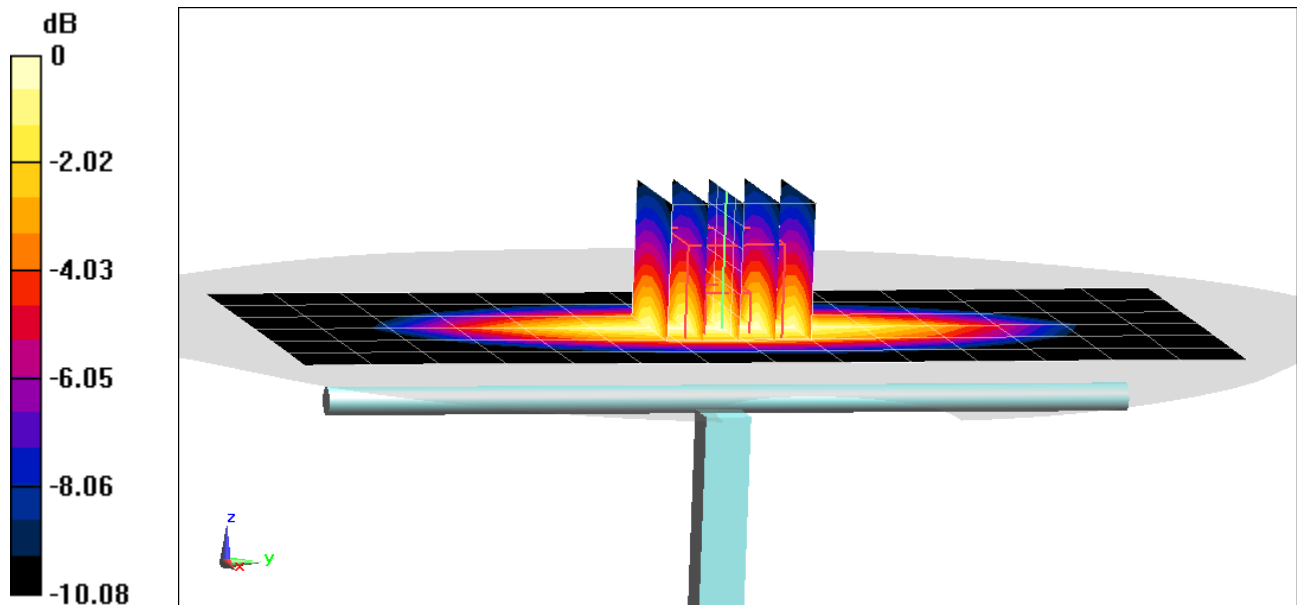

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.958 \text{ S/m}$; $\epsilon_r = 54.531$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 11-06-2019; Ambient Temp: 23.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7357; ConvF(9.95, 9.95, 9.95) @ 835 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Twin-SAM V4.0 (30); Type: QD 000 P40 CC; Serial: 1167

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 2.08 W/kg

Deviation(1 g) = 6.67%

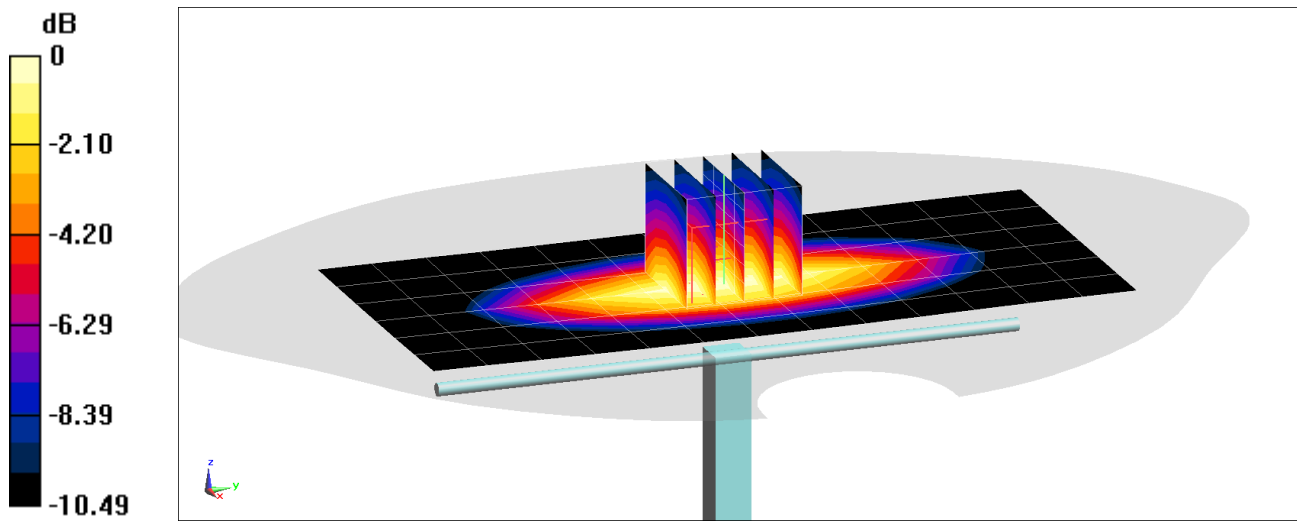

0 dB = 2.82 W/kg = 4.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.484 \text{ S/m}$; $\epsilon_r = 52.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 21.8°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.85, 7.85, 7.85) @ 1750 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.26 W/kg

SAR(1 g) = 3.82 W/kg

Deviation(1 g) = 1.33%

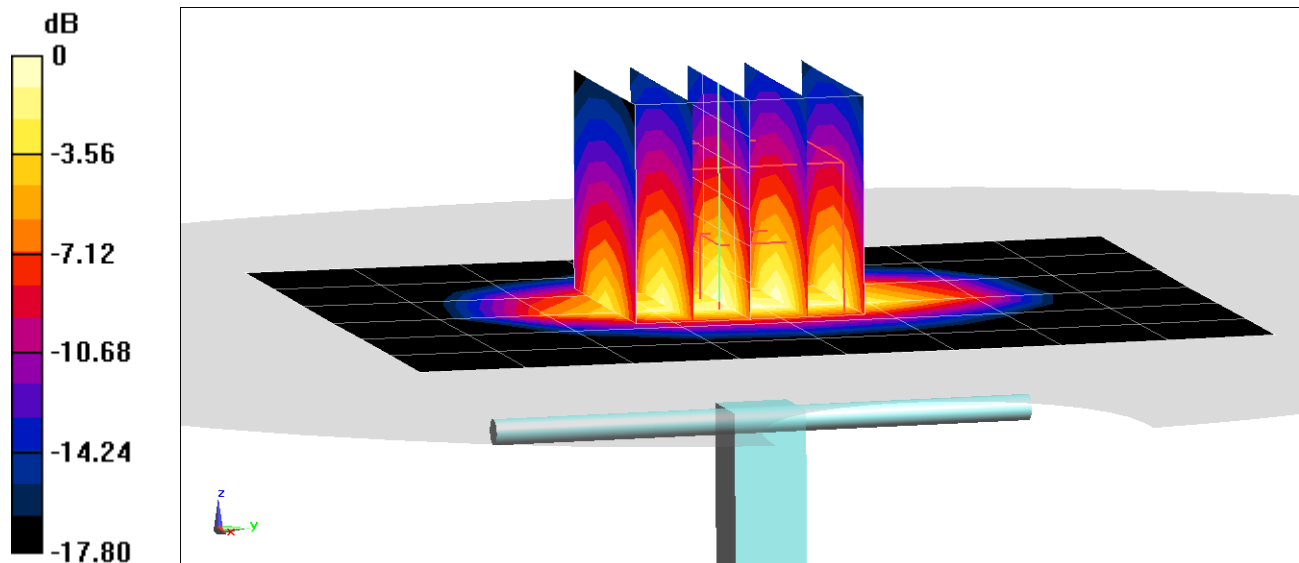

0 dB = 5.91 W/kg = 7.72 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.484 \text{ S/m}$; $\epsilon_r = 52.283$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 22.3°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7409; ConvF(7.85, 7.85, 7.85) @ 1750 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.73 W/kg

SAR(10 g) = 2.1 W/kg

Deviation(10 g) = 6.06%

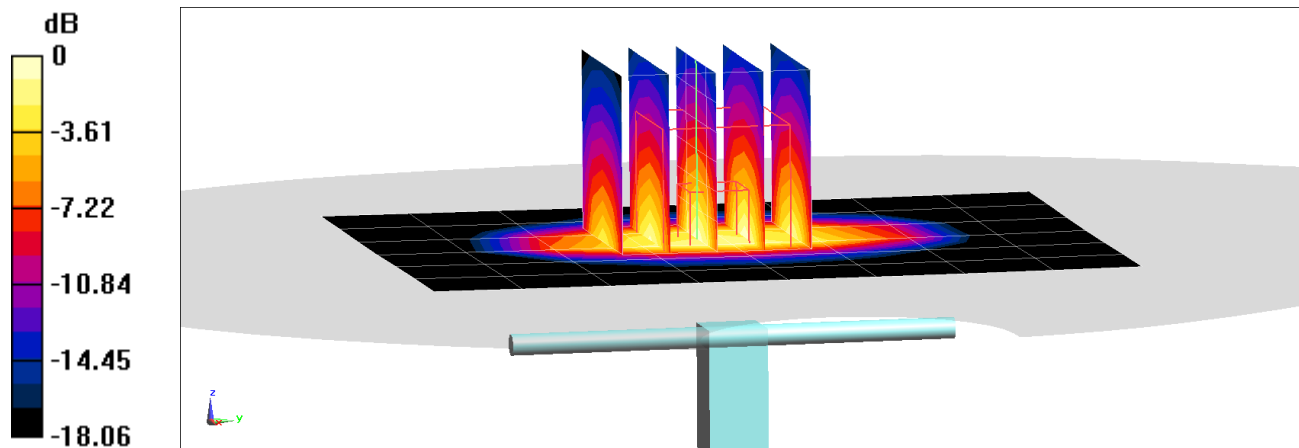

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.556 \text{ S/m}$; $\epsilon_r = 52.221$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-04-2019; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1900 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7470)

1900 MHz System Verification at 20.0 dBm (100 mW)



Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.70 W/kg

SAR(1 g) = 4.19 W/kg

Deviation(1 g) = 7.16%

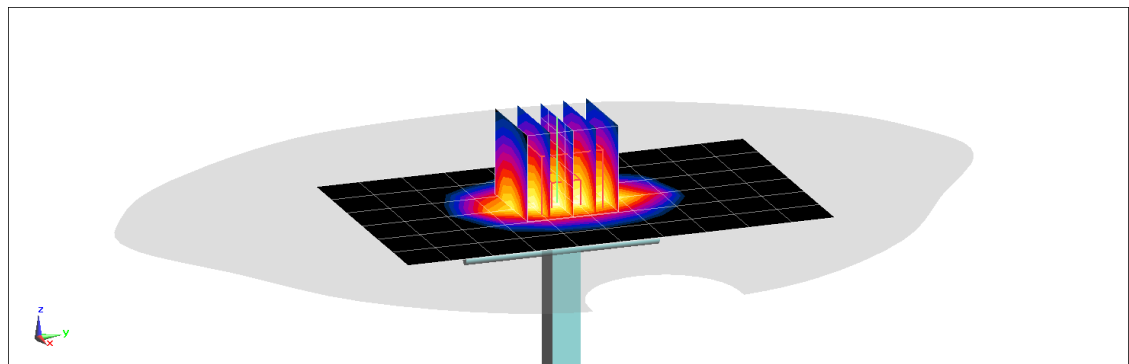

0 dB = 6.43 W/kg = 8.08 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$; $\sigma = 1.569 \text{ S/m}$; $\epsilon_r = 51.174$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11-06-2019; Ambient Temp: 22.7°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7488; ConvF(8.37, 8.37, 8.37) @ 1900 MHz; Calibrated: 1/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/15/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.81 W/kg

SAR(1 g) = 4.13 W/kg

Deviation(1 g) = 5.63%

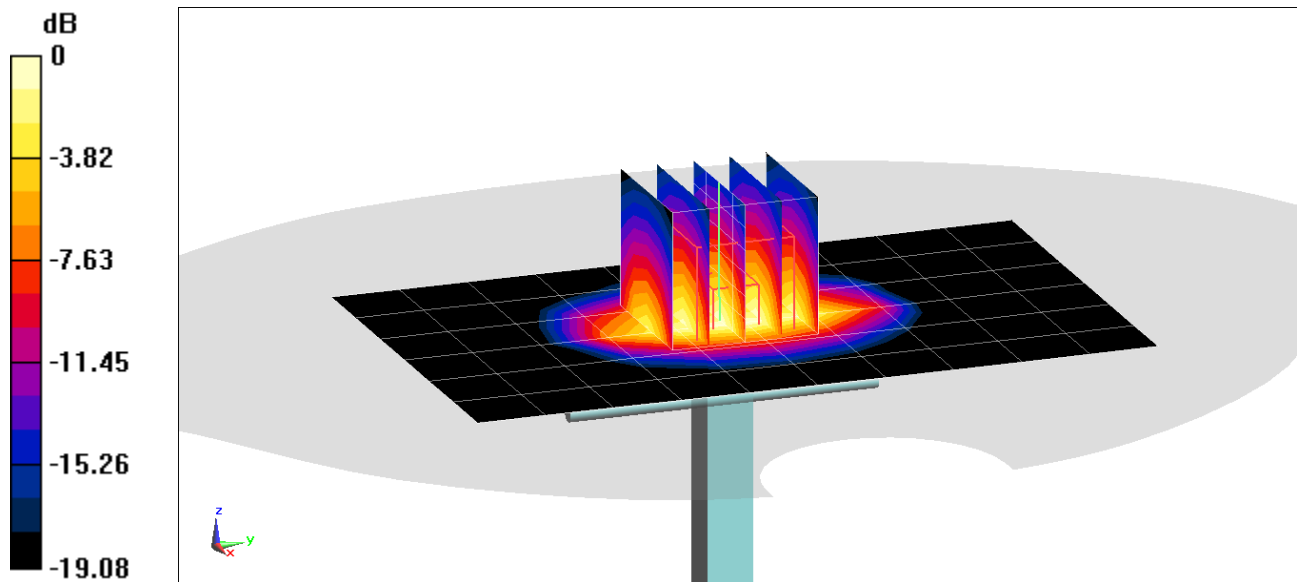

0 dB = 6.53 W/kg = 8.15 dBW/kg