

EMI CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Receipt: February 25, 2015**Date of Issue: March 17, 2015****Test Report No. HCT-E-1503-F026****HCT FRN: 0005866421****FCC ID:****ZNFLS770**

Rule Part(s) / Standard(s): FCC CFR 47 PART 15 Subpart B Class B
FCC Classification: JBP (Part 15 B – Class B Computing Device Peripheral)
EUT Type: CDMA, LTE smart phone with Bluetooth and WLAN
Model Name: LG-LS770
Additional Model Name: LGLS770, LS770
Test Port: USB / Earphone Port
Date of Test: February 25, 2015 - March 13, 2015

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Kyoung-Hee Yoon
Test Engineer
EMC Team
Certification Division

Reviewed By

Jin-Pyo Hong
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCT-E-1503-F026	March 17, 2015	Initial Release



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Test Facility	5
1.4 Tested System Details.....	6
1.5 Cable Description	7
1.6 Noise Suppression Parts on Cable. (I/O Cable)	7
2. DESCRIPTION OF TEST	8
3. PRELIMINARY TEST	11
3.1 Conducted Emission Test	11
3. 2 Radiated Emission Test	11
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	12
4.1 Conducted Emission Test	12
4.2 Radiated Emission Test	26
5. LIST OF TEST EQUIPMENT	30
6. CONCLUSION	31

ATTACHMENT: TEST SETUP PHOTOGRAPHS



1. GENERAL INFORMATION

1.1 Description of EUT

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**
Its basic purpose is used for communications.

Model	LG-LS770
Additional Model	LGLS770, LS770
FCC ID	ZNFLS770
EUT Type	CDMA, LTE smart phone with Bluetooth and WLAN
TX Frequency	824.70 MHz to 848.31 MHz (CDMA BC0) 1 851.25 MHz to 1 908.75 MHz (CDMA BC1) 817.90 MHz to 823.10 MHz (CDMA BC10) 1 850.7 MHz to 1 909.3 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 699 MHz to 716 MHz (LTE B12) 1 850 MHz to 1 915 MHz (LTE B25) 814 MHz to 849 MHz (LTE B26) 2 496 MHz to 2 690 MHz (LTE B41)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA BC0) 1 931.25 MHz to 1 988.75 MHz (CDMA BC1) 862.00 MHz to 894.00 MHz (CDMA BC10) 1 930.00 MHz to 1 990.00 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 729 MHz to 746 MHz (LTE B12) 1 925 MHz to 1 990 MHz (LTE B25) 859 MHz to 894 MHz (LTE B26) 2 496 MHz to 2 690 MHz (LTE B41)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.



1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2003.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3 m)	90661 (February 28, 2014)
Radiated Field strength measurement facility (10 m)	90661 (February 28, 2014)



1.4 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	LG-LS770	LG	ZNFLS770	Notebook PC, Earphone
USB cable	EAD62572501	CRESYN	-	EUT, Notebook PC
Earphone	SGEY0007612	CRESYN	-	EUT
Standard case	-	-	-	EUT
Quick case	CFV-120	YOUNG KWANG	-	EUT
Notebook PC	ProBook6560b	HP	DoC	EUT, Notebook PC adaptor
Notebook PC adaptor	PPP009D	Delta Electronics (Jiangsu) LTD	-	Notebook PC
Gateway	MV440	Axesstel	PH7MV440	Notebook PC, Adaptor
Serial mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
Adaptor	DA-60M12	Yang Ming Industrial	-	Gateway
RJ45 cable	-	-	-	Notebook PC, Gateway
Micro SD card	16 GB	Samsung	-	EUT



1.5 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.0
	Earphone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.6 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End



2. DESCRIPTION OF TEST

2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 7

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth (kHz)	Quasi-Peak (dB(μ V))	Average (dB(μ V))
0.15 to 0.5	9	66 to 56*	56 to 46*
0.5 to 5	9	56	46
5 to 30	9	60	50

**Decreases with the logarithm of the frequency.*



2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 8

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a shield room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. The antenna height scans apply for both horizontal and vertical polarizations, except that for vertical polarization, the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the lowest antenna element clears the site reference ground plane by at least 25 cm. (below 1 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak (dB($\mu\text{V}/\text{m}$))
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak (dB $\mu\text{V}/\text{m}$)	Average (dB($\mu\text{V}/\text{m}$))
Above 1 000	3	74	54

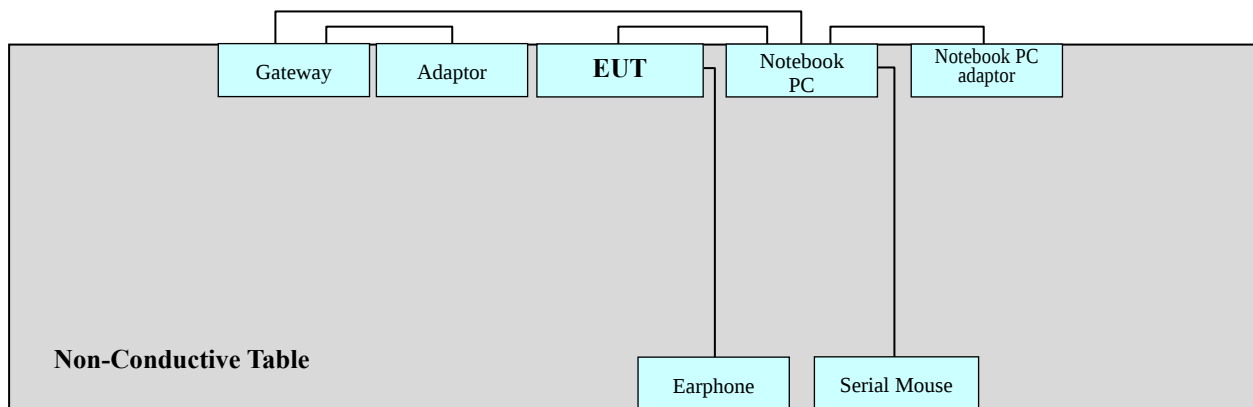


2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2.3 Configuration of Tested System



Power Line: 120 VAC, 60 Hz



3. PRELIMINARY TEST

3.1 Conducted Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

3. 2 Radiated Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode



4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

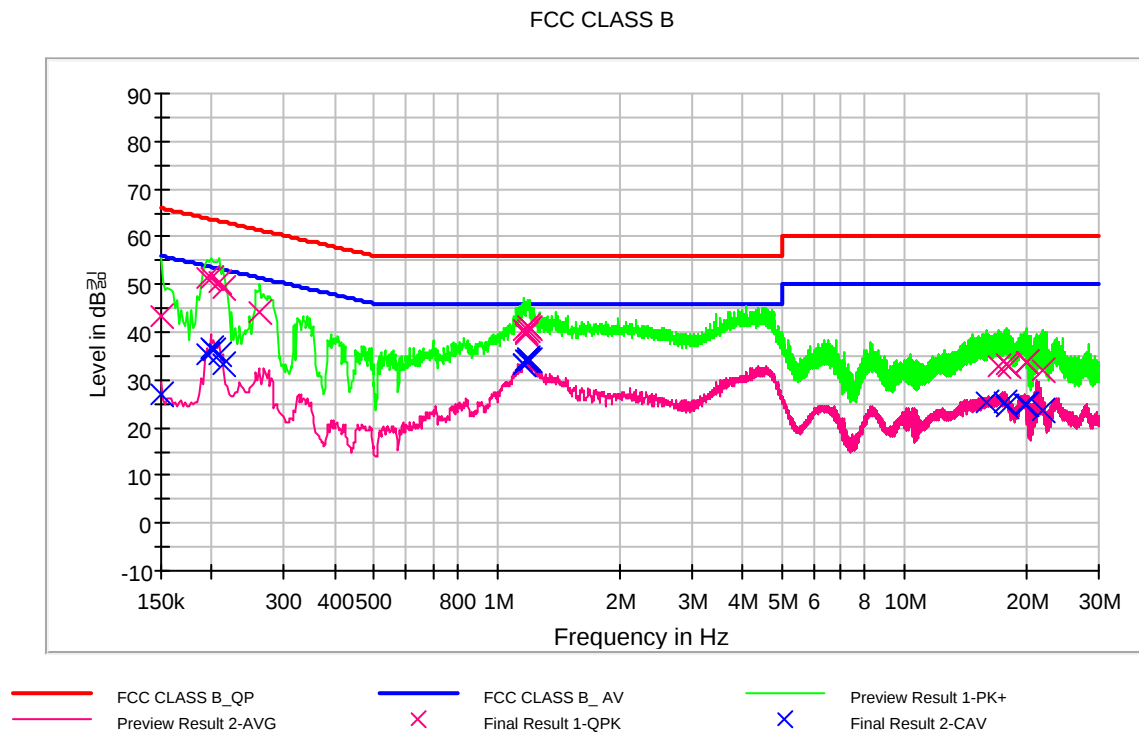
4.1 Conducted Emission Test

The test results of conducted emission at mains ports provide the following information:

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
EUT Case Type	Standard Case
Kind of Test Site	Shielded Room
Temperature	23.5 °C
Relative Humidity	26.3 %
Test Date	March 13, 2015

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

**Figure 1: Spectral Diagrams, Conducted Emission, AC Mains (0.15 - 30)MHz, Line (L1)**



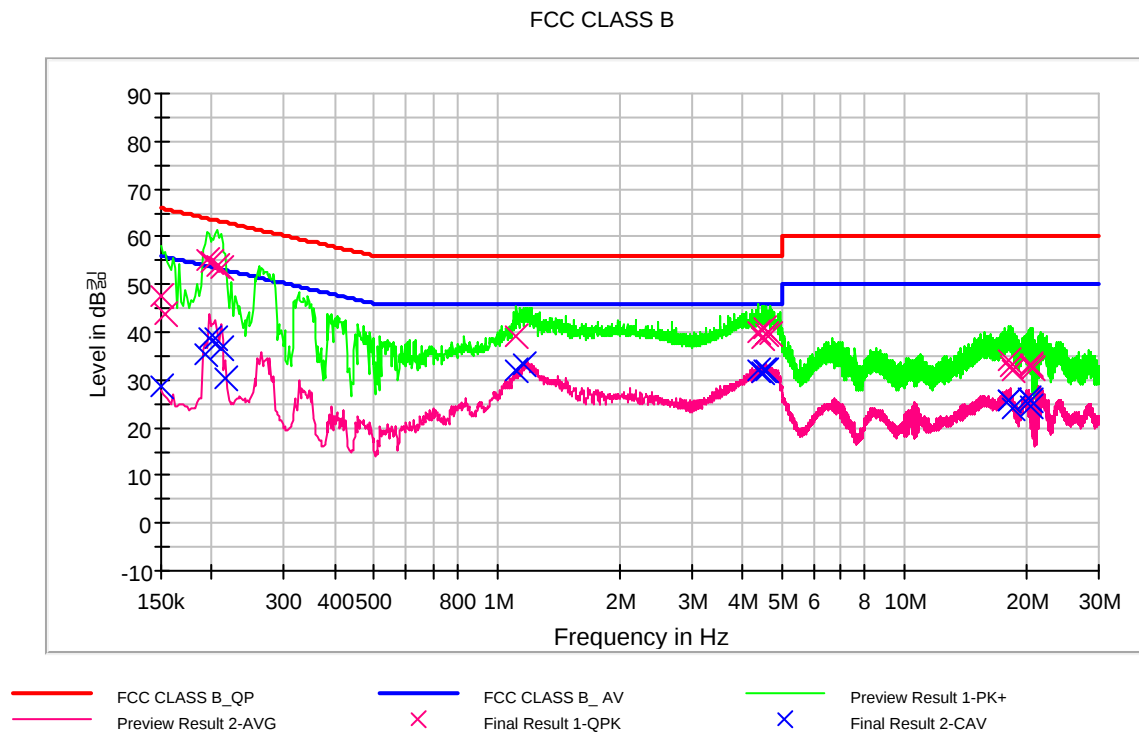
QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	43.6	9.000	L1	9.6	22.4	66.0
0.194000	51.5	9.000	L1	9.6	12.4	63.9
0.198000	51.3	9.000	L1	9.6	12.4	63.7
0.208000	50.3	9.000	L1	9.7	13.0	63.3
0.212000	49.3	9.000	L1	9.7	13.8	63.1
0.262000	44.3	9.000	L1	9.7	17.1	61.4
1.164000	40.3	9.000	L1	9.7	15.7	56.0
1.174000	40.0	9.000	L1	9.7	16.0	56.0
1.180000	39.7	9.000	L1	9.7	16.3	56.0
1.186000	41.1	9.000	L1	9.7	14.9	56.0
1.194000	40.4	9.000	L1	9.7	15.6	56.0
1.202000	40.8	9.000	L1	9.7	15.2	56.0
17.062000	32.7	9.000	L1	10.2	27.3	60.0
17.910000	33.2	9.000	L1	10.3	26.8	60.0
17.982000	32.8	9.000	L1	10.3	27.2	60.0
19.902000	33.7	9.000	L1	10.3	26.3	60.0
19.912000	33.6	9.000	L1	10.3	26.4	60.0
21.804000	31.9	9.000	L1	10.4	28.1	60.0



CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	27.0	9.000	L1	9.6	29.0	56.0
0.194000	35.3	9.000	L1	9.6	18.6	53.9
0.198000	36.6	9.000	L1	9.6	17.1	53.7
0.202000	36.3	9.000	L1	9.7	17.2	53.5
0.208000	35.4	9.000	L1	9.7	17.9	53.3
0.212000	33.2	9.000	L1	9.7	19.9	53.1
1.164000	33.3	9.000	L1	9.7	12.8	46.0
1.168000	33.2	9.000	L1	9.7	12.8	46.0
1.182000	34.0	9.000	L1	9.7	12.0	46.0
1.188000	34.6	9.000	L1	9.7	11.4	46.0
1.192000	34.2	9.000	L1	9.7	11.8	46.0
1.202000	34.0	9.000	L1	9.7	12.0	46.0
15.930000	25.3	9.000	L1	10.2	24.7	50.0
17.714000	25.3	9.000	L1	10.3	24.7	50.0
17.910000	24.6	9.000	L1	10.3	25.4	50.0
19.754000	25.0	9.000	L1	10.3	25.0	50.0
19.902000	24.7	9.000	L1	10.3	25.3	50.0
21.800000	23.7	9.000	L1	10.4	26.3	50.0

**Figure 2: Spectral Diagrams, Conducted Emission, AC Mains (0.15 - 30)MHz, Line (N)**



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	47.4	9.000	N	9.6	18.6	66.0
0.154000	43.6	9.000	N	9.6	22.2	65.8
0.194000	55.1	9.000	N	9.6	8.8	63.9
0.200000	54.7	9.000	N	9.6	8.9	63.6
0.206000	53.8	9.000	N	9.6	9.6	63.4
0.210000	53.5	9.000	N	9.6	9.7	63.2
1.118000	39.2	9.000	N	9.7	16.8	56.0
4.392000	40.0	9.000	N	9.9	16.0	56.0
4.466000	38.9	9.000	N	9.9	17.1	56.0
4.532000	40.7	9.000	N	9.9	15.3	56.0
4.556000	39.6	9.000	N	9.9	16.4	56.0
4.676000	39.5	9.000	N	9.9	16.5	56.0
18.062000	34.2	9.000	N	10.3	25.8	60.0
18.206000	32.9	9.000	N	10.3	27.1	60.0
18.420000	32.1	9.000	N	10.3	27.9	60.0
20.334000	33.3	9.000	N	10.3	26.7	60.0
20.398000	33.0	9.000	N	10.3	27.0	60.0
20.542000	32.4	9.000	N	10.3	27.6	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	28.6	9.000	N	9.6	27.4	56.0
0.192000	35.3	9.000	N	9.6	18.6	53.9
0.196000	38.6	9.000	N	9.6	15.2	53.8
0.204000	38.9	9.000	N	9.6	14.5	53.4
0.210000	36.7	9.000	N	9.6	16.5	53.2
0.216000	30.3	9.000	N	9.6	22.7	53.0
1.118000	31.9	9.000	N	9.7	14.1	46.0
1.160000	33.2	9.000	N	9.7	12.8	46.0
4.394000	31.9	9.000	N	9.9	14.1	46.0
4.466000	31.8	9.000	N	9.9	14.2	46.0
4.532000	32.1	9.000	N	9.9	13.9	46.0
4.556000	32.0	9.000	N	9.9	14.0	46.0
18.030000	25.8	9.000	N	10.3	24.2	50.0
18.034000	25.6	9.000	N	10.3	24.4	50.0
18.384000	24.2	9.000	N	10.3	25.8	50.0
20.120000	26.2	9.000	N	10.3	23.8	50.0
20.334000	25.6	9.000	N	10.3	24.4	50.0
20.398000	24.5	9.000	N	10.3	25.5	50.0

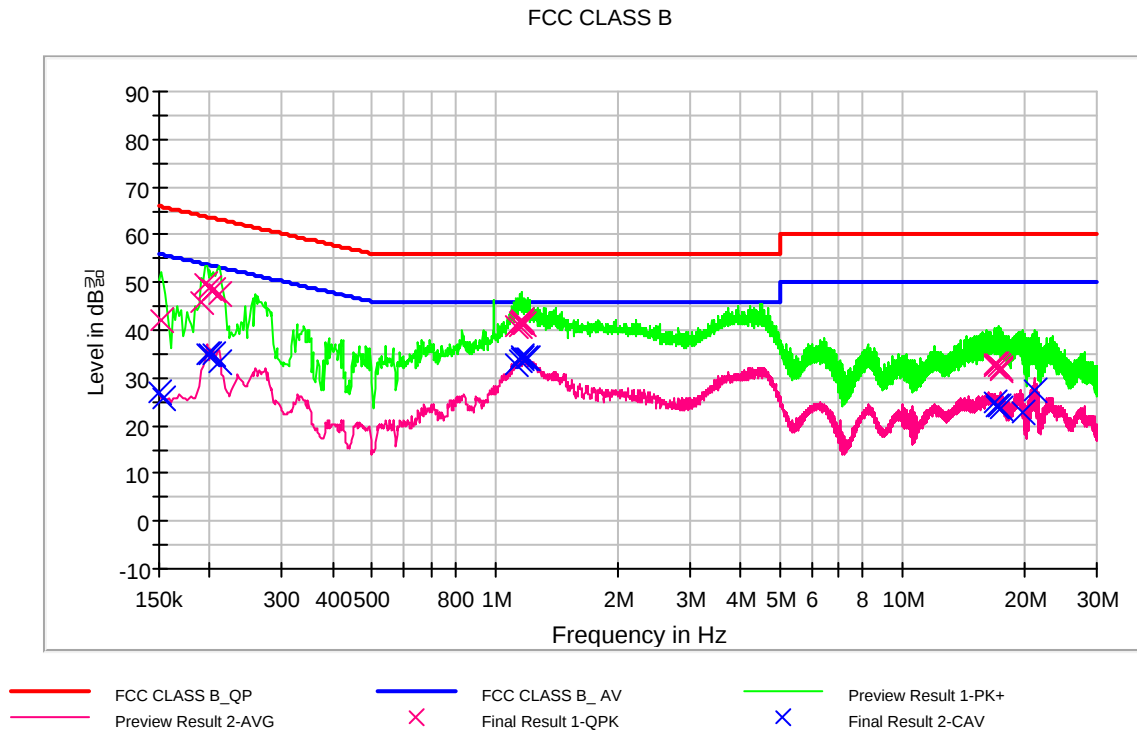


The test results of conducted emission at mains ports provide the following information:

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
EUT Case Type	Quick Case
Kind of Test Site	Shielded Room
Temperature	23.5 °C
Relative Humidity	26.3 %
Test Date	March 13, 2015

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

**Figure 3: Spectral Diagrams, Conducted Emission, AC Mains (0.15 - 30)MHz, Line (L1)**



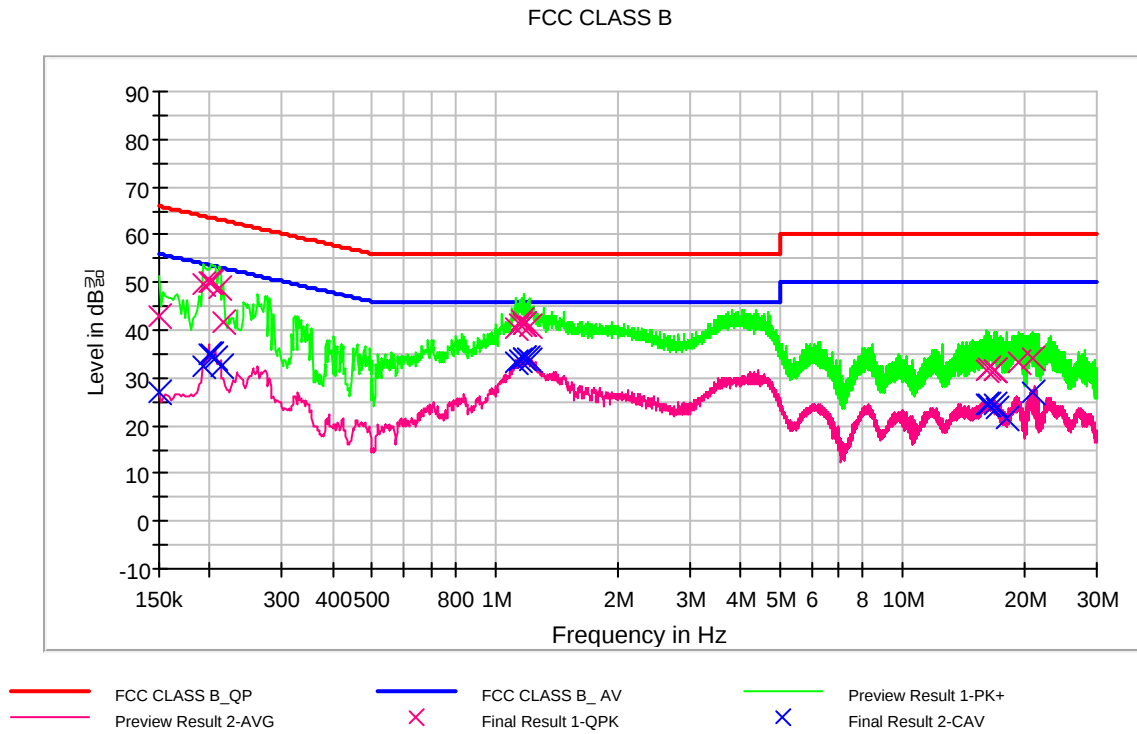
QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	42.0	9.000	L1	9.6	23.9	65.9
0.190000	46.0	9.000	L1	9.6	18.0	64.0
0.194000	49.5	9.000	L1	9.6	14.4	63.9
0.200000	48.9	9.000	L1	9.7	14.7	63.6
0.204000	48.5	9.000	L1	9.7	14.9	63.4
0.210000	47.5	9.000	L1	9.7	15.7	63.2
1.130000	40.9	9.000	L1	9.7	15.1	56.0
1.148000	41.0	9.000	L1	9.7	15.0	56.0
1.156000	41.6	9.000	L1	9.7	14.4	56.0
1.164000	41.9	9.000	L1	9.7	14.1	56.0
1.168000	41.8	9.000	L1	9.7	14.2	56.0
1.184000	41.3	9.000	L1	9.7	14.7	56.0
16.766000	32.9	9.000	L1	10.2	27.1	60.0
16.836000	32.6	9.000	L1	10.2	27.4	60.0
16.980000	32.9	9.000	L1	10.2	27.1	60.0
17.192000	32.6	9.000	L1	10.2	27.4	60.0
17.406000	31.7	9.000	L1	10.2	28.3	60.0
17.476000	32.0	9.000	L1	10.3	28.0	60.0



CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	26.9	9.000	L1	9.6	29.1	56.0
0.154000	25.7	9.000	L1	9.6	30.1	55.8
0.196000	34.9	9.000	L1	9.6	18.9	53.8
0.200000	35.1	9.000	L1	9.7	18.5	53.6
0.204000	34.8	9.000	L1	9.7	18.6	53.4
0.210000	33.4	9.000	L1	9.7	19.8	53.2
1.128000	33.0	9.000	L1	9.7	13.0	46.0
1.156000	33.8	9.000	L1	9.7	12.2	46.0
1.164000	34.5	9.000	L1	9.7	11.5	46.0
1.168000	34.2	9.000	L1	9.7	11.8	46.0
1.186000	34.3	9.000	L1	9.7	11.7	46.0
1.200000	34.2	9.000	L1	9.7	11.8	46.0
16.766000	25.0	9.000	L1	10.2	25.0	50.0
17.120000	24.0	9.000	L1	10.2	26.0	50.0
17.192000	23.9	9.000	L1	10.2	26.1	50.0
17.406000	23.6	9.000	L1	10.2	26.4	50.0
19.668000	22.8	9.000	L1	10.3	27.2	50.0
21.220000	27.5	9.000	L1	10.3	22.5	50.0

**Figure 4: Spectral Diagrams, Conducted Emission, AC Mains (0.15 - 30)MHz, Line (N)**



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	42.8	9.000	N	9.6	23.2	66.0
0.192000	49.5	9.000	N	9.6	14.4	63.9
0.198000	50.2	9.000	N	9.6	13.5	63.7
0.202000	50.0	9.000	N	9.6	13.5	63.5
0.210000	48.7	9.000	N	9.6	14.5	63.2
0.216000	41.8	9.000	N	9.6	21.2	63.0
1.128000	40.6	9.000	N	9.7	15.4	56.0
1.156000	41.4	9.000	N	9.7	14.6	56.0
1.162000	42.1	9.000	N	9.7	13.9	56.0
1.178000	41.3	9.000	N	9.7	14.7	56.0
1.184000	41.2	9.000	N	9.7	14.8	56.0
1.212000	40.8	9.000	N	9.7	15.2	56.0
16.128000	31.5	9.000	N	10.2	28.5	60.0
16.342000	31.9	9.000	N	10.2	28.1	60.0
16.766000	31.6	9.000	N	10.2	28.4	60.0
16.904000	31.7	9.000	N	10.2	28.3	60.0
19.236000	33.4	9.000	N	10.3	26.6	60.0
20.934000	34.2	9.000	N	10.3	25.8	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	27.0	9.000	N	9.6	29.0	56.0
0.192000	32.5	9.000	N	9.6	21.4	53.9
0.198000	34.9	9.000	N	9.6	18.8	53.7
0.202000	34.8	9.000	N	9.6	18.7	53.5
0.206000	34.3	9.000	N	9.6	19.1	53.4
0.212000	32.6	9.000	N	9.6	20.5	53.1
1.126000	33.1	9.000	N	9.7	12.9	46.0
1.156000	33.8	9.000	N	9.7	12.2	46.0
1.178000	34.3	9.000	N	9.7	11.7	46.0
1.184000	34.1	9.000	N	9.7	11.9	46.0
1.198000	34.0	9.000	N	9.7	12.0	46.0
1.212000	33.8	9.000	N	9.7	12.2	46.0
16.128000	24.6	9.000	N	10.2	25.4	50.0
16.342000	24.5	9.000	N	10.2	25.5	50.0
16.766000	24.3	9.000	N	10.2	25.7	50.0
16.976000	23.8	9.000	N	10.2	26.2	50.0
17.964000	21.6	9.000	N	10.3	28.4	50.0
20.934000	27.1	9.000	N	10.3	22.9	50.0



4.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
EUT Case Type	Standard Case
Kind of Test Site	3 m semi anechoic chamber
Temperature	20.4 °C
Relative Humidity	28.4 %
Test Date	February 25, 2015

Frequency (MHz)	Quasi Peak (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
133.346052	29.3	100.0	V	61.0	16.4	14.2	43.5
265.570421	34.4	116.0	H	295.0	16.8	11.6	46.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
EUT Case Type	Quick Case
Kind of Test Site	3 m semi anechoic chamber
Temperature	20.4 °C
Relative Humidity	28.4 %
Test Date	February 25, 2015

Frequency (MHz)	Quasi Peak (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
133.346052	31.0	100.0	V	127.0	16.4	12.5	43.5
266.554309	32.9	193.0	H	116.0	16.9	13.1	46.0



-For Measurement Above 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	1.2 GHz
Testing Frequency Range	1 GHz to 6 GHz
Operation Mode	Data Communication mode
EUT Case Type	Standard Case
Kind of Test Site	3 m semi anechoic chamber
Temperature	21.0 °C
Relative Humidity	29.5 %
Test Date	February 26, 2015

Frequency (MHz)	Peak (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1333.016032	49.6	100.0	V	14.0	-9.3	24.4	74.0
1995.340681	56.2	100.0	V	25.0	-7.8	17.8	74.0
2655.360721	49.8	100.0	V	29.0	-4.9	24.2	74.0

Frequency (MHz)	CAverage (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1333.016032	31.4	100.0	V	14.0	-9.3	22.6	54.0
1995.340681	38.7	100.0	V	25.0	-7.8	15.3	54.0
2655.360721	33.7	100.0	V	29.0	-4.9	20.3	54.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	1.2 GHz
Testing Frequency Range	1 GHz to 6 GHz
Operation Mode	Data Communication mode
EUT Case Type	Quick Case
Kind of Test Site	3 m semi anechoic chamber
Temperature	21.0 °C
Relative Humidity	29.5 %
Test Date	February 26, 2015

Frequency (MHz)	Peak (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
1333.116233	50.1	100.0	V	0.0	-9.3	23.9	74.0
1994.839679	55.3	100.0	V	28.0	-7.8	18.7	74.0
2656.763527	50.3	100.0	V	28.0	-4.8	23.7	74.0

Frequency (MHz)	CAverage (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBuV/m)
1333.116233	31.3	100.0	V	0.0	-9.3	22.7	54.0
1994.839679	37.8	100.0	V	28.0	-7.8	16.2	54.0
2656.763527	33.9	100.0	V	28.0	-4.8	20.1	54.0



5. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>CAL Date</u>
<u>Conducted Emission</u>					
☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	01.13.2015
☒ LISN	EMCO	3816/2SH	9706-1070	1 year	04.07. 2014
☒ LISN	Rohde & Schwarz	ENV216	100073	1 year	01.13.2015
☒ Software	Rohde & Schwarz	EMC32	-	-	-
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.07. 2014
☒ Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	11.17. 2014
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
☒ Turn Table	EMCO	1060-2M	-	N/A	-
☒ Turn Table controller	EMCO	2090	9702-1224	N/A	-
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.18.2014
☐ Trilog Antenna	Schwarzbeck	VULB9168	185	2 year	04.16. 2013
☐ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
☒ Software	Rohde & Schwarz	EMC32	-	-	-
-For measurement above 1 GHz					
☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.07. 2014
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
☒ Turn Table	EMCO	1060-2M	-	N/A	-
☒ Turn Table controller	EMCO	2090	9702-1224	N/A	-
☐ Power Amplifier	CERNEX	CBLU1183540	21691	1 year	07.11.2014
☒ Power Amplifier	CERNEX	CBLU5183530	24348	1 year	06.11. 2014
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	10.07.2014
☐ Horn Antenna	Schwarzbeck	BBHA 9120D	1151	2 year	07.05.2013
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.18. 2014
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
☐ Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170124	2 year	10.30. 2013
☐ Power Amplifier	CERNEX	CBL18265035	22966	1 year	07.23. 2014
☐ Power Amplifier	CERNEX	CBL26405040	19660	1 year	04.04. 2014
☒ Software	Rohde & Schwarz	EMC32	-	-	-



6. CONCLUSION

The data collected shows that the **EUT Type: CDMA, LTE smart phone with Bluetooth and WLAN, FCC ID: ZNFLS770, Model: LG-LS770** complies with §15.107 and §15.109 of the FCC rules.