



# HCT CO., LTD.

## CERTIFICATE OF COMPLIANCE FCC Class II Permissive Change

**Applicant Name:**  
LG Electronics MobileComm U.S.A., Inc.

**Date of Issue:**  
February 17, 2012

**Address:**  
10101 Old Grove Road, San Diego, CA 92131

**Location:**  
HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,  
Icheon-si, Kyunggi-Do, Korea

**Test Report No.:** HCTR1202FR10

**HCT FRN:** 0005866421

**FCC ID:** ZNFMS840

**APPLICANT:** LG Electronics MobileComm U.S.A., Inc.

**FCC Model(s):** MS840

**Additional FCC Model(s):** LG-MS840, LGMS840

**EUT Type:** Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN

**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)

**FCC Rule Part(s):** §2 , § 24 , §27

**Tx Frequency:** 1715.0 MHz – 1750.0 MHz (AWS), 1855.0 MHz – 1905.0 MHz (PCS)


**Max. RF Output Power:**  
Band 4, 10 MHz : 0.342 W ERP (QPSK) (25.34 dBm)  
0.387 W ERP (16-QAM) (25.88 dBm)


Band 2, 10 MHz : 0.668 W EIRP (QPSK) (28.25 dBm)  
0.741 W EIRP (16-QAM) (28.70 dBm)

**Emission Designator(s):**  
Band 4, 10 MHz : 8M95G7D (QPSK) / 8M91W7D (16-QAM)  
Band 2, 10 MHz : 8M93G7D (QPSK) / 8M98W7D (16-QAM)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

  
**Report prepared by**  
**: Hyo Sun Kwak**  
**Test engineer of RF Team**

  
**Approved by**  
**: Sang Jun Lee**  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1202FR10	February 17, 2012	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....		4
2. INTRODUCTION .....		5
2.1. EUT DESCRIPTION.....		5
2.2. MEASURING INSTRUMENT CALIBRATION.....		5
2.3. TEST FACILITY .....		5
3. DESCRIPTION OF TESTS .....		6
3.1 EFFECTIVE RADIATED POWER/EQUIVALENT ISOTROPIC RADIATED POWER.....		6
3.2 OCCUPIED BANDWIDTH. ....		7
3.3 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz).....		8
3.4 AWS – MOBILE FREQUENCY BLOCKS .....		8
3.5 CELLULAR – MOBILE FREQUENCY BLOCKS .....		8
3.6 PEAK-AVERAGE RATIO. ....		9
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		9
3.8 RADIATED SPURIOUS AND HARMONIC EMISSIONS .....		10
3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....		11
4. LIST OF TEST EQUIPMENT .....		12
5. SUMMARY OF TEST RESULTS .....		13
6. SAMPLE CALCULATION .....		14
7. TEST DATA .....		15
7.1 CONDUCTED OUTPUT POWER .....		15
7.2 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT .....		17
7.3 RADIATED SPURIOUS EMISSIONS.....		21
7.3.1 RADIATED SPURIOUS EMISSIONS (Band 4) .....		21
7.3.2 RADIATED SPURIOUS EMISSIONS (Band 2) .....		22
7.4 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....		23
7.4.1 FREQUENCY STABILITY (Band 4) .....		23
7.4.2 FREQUENCY STABILITY (Band 2) .....		24
7.5 PEAK-TO-AVERAGE RATIO .....		25
8. TEST PLOTS.....		26

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840



# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

**Applicant Name:** LG Electronics MobileComm U.S.A., Inc.

**Address:** 10101 Old Grove Road, San Diego, CA 92131

**Application Type:** FCC Class II Permissive Change

**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)

**FCC Rule Part(s):** §2 , § 24 , §27

**EUT Type:** Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN

**FCC Model(s):** MS840

**Additional FCC Model(s):** LG-MS840, LGMS840

**Tx Frequency:** 1715.0 MHz – 1750.0 MHz (AWS), 1855.0 MHz – 1905.0 MHz (PCS)

**Max. RF Output Power:** Band 4, 10 MHz : 0.342 W ERP (QPSK) (25.34 dBm)  
0.387 W ERP (16-QAM) (25.88 dBm)  
Band 2, 10 MHz : 0.668 W EIRP (QPSK) (28.25 dBm)  
0.741 W EIRP (16-QAM) (28.70 dBm)

**Emission Designator(s):** Band 4, 10 MHz : 8M95G7D (QPSK) / 8M91W7D (16-QAM)  
Band 2, 10 MHz : 8M93G7D (QPSK) / 8M98W7D (16-QAM)

**Antenna Specification:** Manufacturer: LS Mtron Co. Ltd.  
Antenna type: INTERNAL Antenna  
Peak Gain: -0.58 dBi

**Date(s) of Tests:** February 14, 2012 ~ February 17, 2012

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840



## 2. INTRODUCTION

### 2.1. EUT DESCRIPTION

The MS840 Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN consists of Cellular CDMA, PCS CDMA, AWS, and EVDO Rev0, A.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY


The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

### 3. DESCRIPTION OF TESTS

#### 3.1 EFFECTIVE RADIATED POWER/EQUIVALENT ISOTROPIC RADIATED POWER

##### Test Set-up

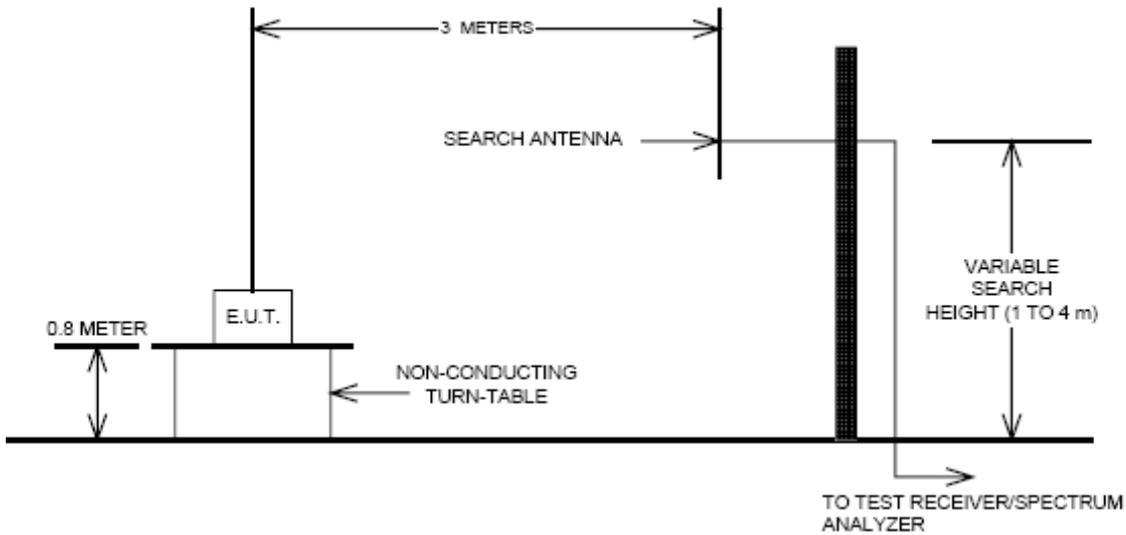

##### Test Procedure

Radiated emission measurements were performed at an SAC(Semi-Anechoic Chamber)


The equipment under test is placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. A styrofoam turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

### 3.2 OCCUPIED BANDWIDTH.

#### Test set-up

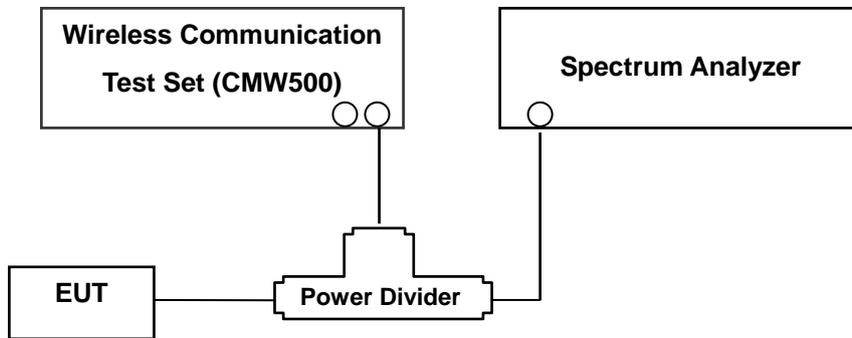

(Configuration of conducted Emission measurement)  
Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840


### 3.3 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz)

§27.5(c)

Three paired channel blocks of 12 MHz each are available for assignment as follows : Block A: 698 – 704 MHz and 728 – 734 MHz ; Block B : 704 – 710 MHz and 734 – 740 MHz ; and Block C : 710 – 716 MHz and 740 – 746 MHz. Two unpaired channel blocks of 6 MHz each are available for assignment as follows : Block D : 716 – 722 MHz ; and Block E : 722- 728 MHz.


### 3.4 AWS – MOBILE FREQUENCY BLOCKS

§27.5(h)

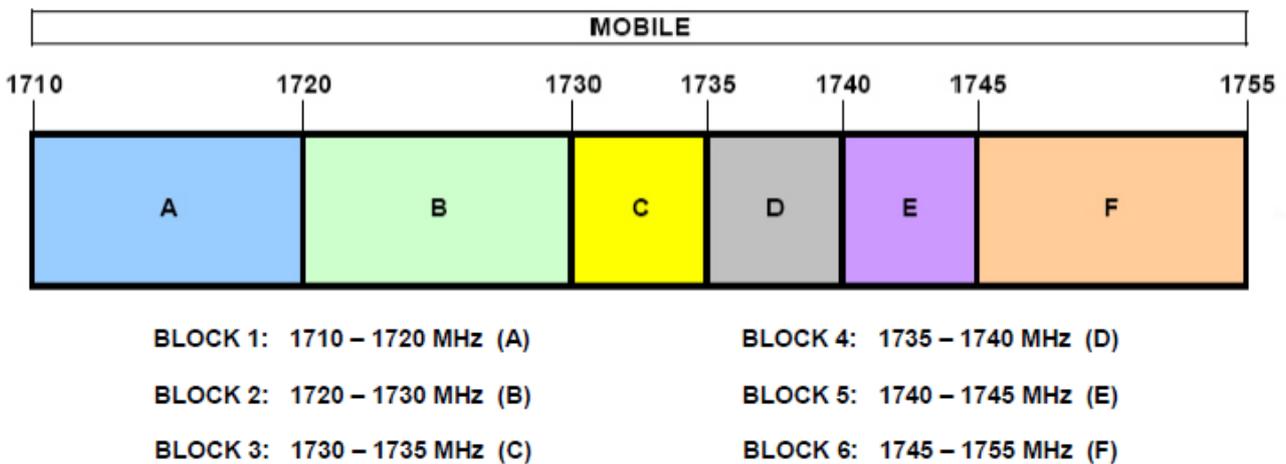

### 3.5 CELLULAR – MOBILE FREQUENCY BLOCKS

§22.917(a)

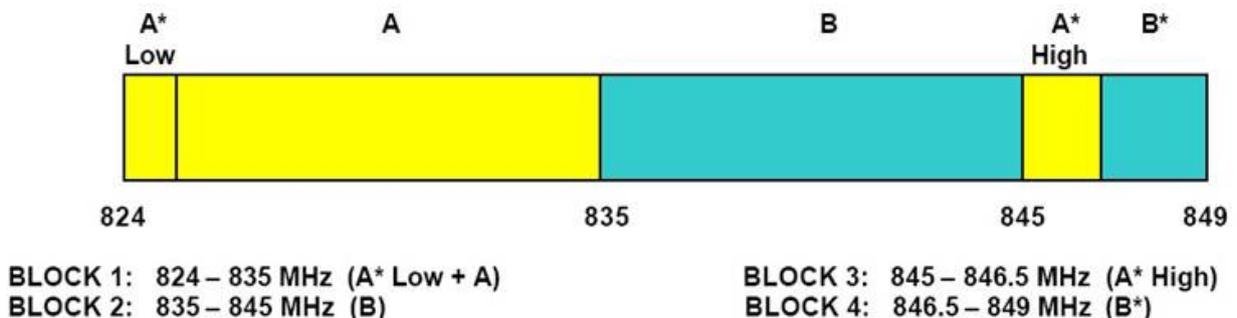



### 3.6 PEAK-AVERAGE RATIO.

§27.50(d)(5)

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### 3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.


The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 30 MHz to 26.5 GHz. A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

### 3.8 RADIATED SPURIOUS AND HARMONIC EMISSIONS

#### Test Set-up

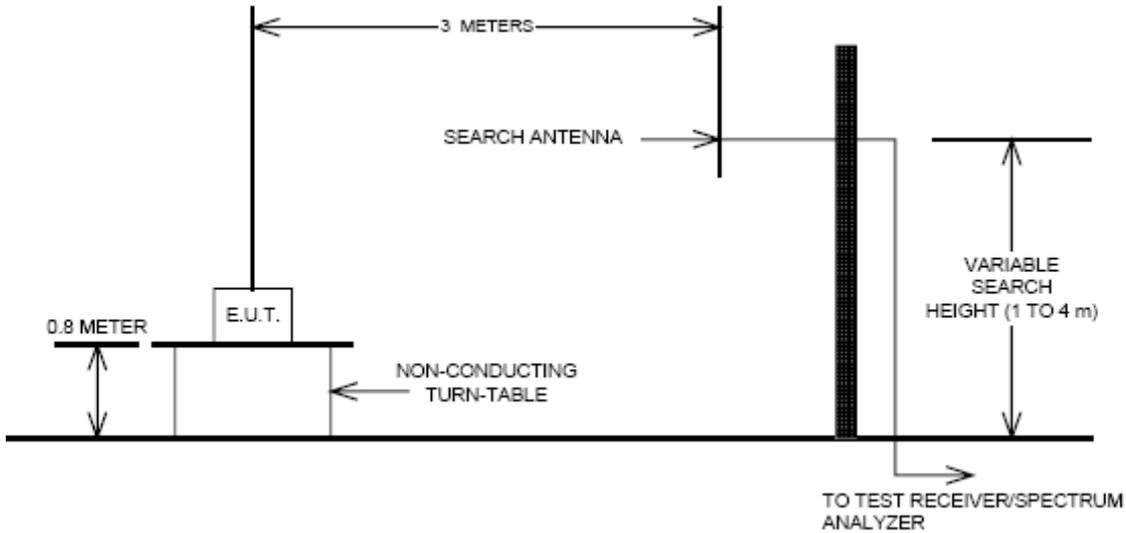

The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The SAC(Semi-Anechoic Chamber) meets requirements in ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable styrofoam platform mounted at three from the antenna mast.

- 1) The unit mounted on a styrofoam turntable 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10<sup>th</sup> harmonic of the fundamental frequency.

#### Test Procedure


The equipment under test is placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. A styrofoam turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

### 3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

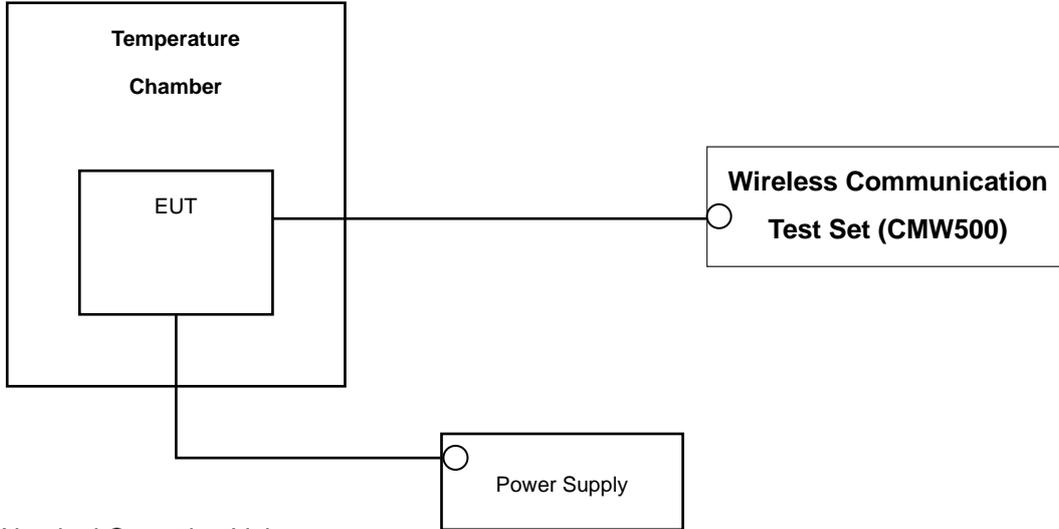

\* Nominal Operating Voltage

#### Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.

#### Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**NOTE: The EUT is tested down to the battery endpoint.**

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
R&S	N9020A	MY51110020	Annual	09/23/2012
Agilent	E9327A/ Power Sensor	MY4442009	Annual	05/02/2012
R&S	CMW500/ Base Station	1201.0002K50_10395	Annual	04/20/2012
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/24/2012
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	05/02/2012
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	05/02/2012
Agilent	11636B/ Power Divider	11377	Annual	11/07/2012
Digital	EP-3010/ Power Supply	3110117	Annual	11/07/2012
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	05/03/2012
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	05/03/2012
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	Annual	11/07/2012
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	04/13/2012
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	05/02/2012
WEINSCHL	ATTENUATOR	BR0592	Annual	11/07/2012
REOHDE&SCHWARZ	FSP30/Spectrum Analyzer	839117/011	Annual	03/23/2012
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/10/2013

## 5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 24.238(a) 27.53(h)(1)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 24.238(a) 27.53(h)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all-of-band emissions		PASS
24.232(d),27.50(d)(5)	Peak-Average Ratio	$< 13 \text{ dB}$		PASS
2.1046	Conducted Output Power	N/A		PASS
2.1055, 24.235 27.54	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$		PASS
24.232(c)	Equivalent Isotropic Radiated Power (PCS)	$< 2 \text{ Watts max. EIRP}$	RADIATED	PASS
27.50(d)(2)	Equivalent Isotropic Radiated Power (AWS)	$< 1 \text{ Watts max. EIRP}$		
2.1053,24.238(a) 27.53(h)	Undesirable Out-of-Band Emissions	$< 43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS

## 6. SAMPLE CALCULATION

### A. EIRP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
LTE	20000	1715.0	-17.90	15.53	9.98	2.69	H	0.19	22.82

**EIRP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**EIRP**).

## B. Emission Designator

### QPSK Modulation

**Emission Designator = 8M95G7D**

LTE BW = 8.95 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Amplitude/Angle Modulated

### 16QAM Modulation

**Emission Designator = 8M94W7D**

LTE BW = 8.94 MHz

D = Amplitude/Angle Modulated

7 = Quantized/Digital Info


W = Combination (Audio/Data)

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

## 7. TEST DATA

### 7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

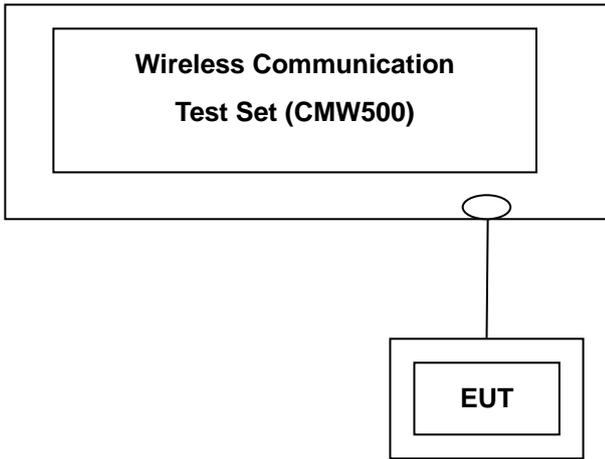

Test Result

Band	Frequency(Mhz)	Channel	Resource Block Size	Resource Block Offset	Peak Power [dBm]	
					QPSK	16-QAM
LTE	1715.0	20000	1	0	27.53	28.41
			1	49	27.58	28.44
			25	13	28.52	29.19
			50	0	29.12	29.70

LTE Conducted Peak Output Powers (10 MHz Band 4 LTE – Low Channel)

Band	Frequency(Mhz)	Channel	Resource Block Size	Resource Block Offset	Peak Power [dBm]	
					QPSK	16-QAM
LTE	1732.5	20175	1	0	27.32	28.36
			1	49	27.24	28.24
			25	13	28.16	28.81
			50	0	28.88	29.60

LTE Conducted Peak Output Powers (10 MHz Band 4 LTE – Mid Channel)

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

Band	Frequency(Mhz)	Channel	Resource Block Size	Resource Block Offset	Peak Power [dBm]	
					QPSK	16-QAM
LTE	1750.0	20350	1	0	27.33	28.28
			1	49	27.16	28.23
			25	13	28.20	28.84
			50	0	28.78	29.50

LTE Conducted Peak Output Powers (10 MHz Band 4 LTE – High Channel)

Band	Frequency(Mhz)	Channel	Resource Block Size	Resource Block Offset	Peak Power [dBm]	
					QPSK	16-QAM
LTE	1855.0	18650	1	0	27.41	27.82
			1	49	27.41	28.23
			25	13	28.35	28.75
			50	0	28.80	29.18

LTE Conducted Peak Output Powers (10 MHz Band 2 LTE – Low Channel)

Band	Frequency(Mhz)	Channel	Resource Block Size	Resource Block Offset	Peak Power [dBm]	
					QPSK	16-QAM
LTE	1880.0	18900	1	0	27.70	28.35
			1	49	27.80	28.41
			25	13	28.69	29.12
			50	0	29.02	29.50

LTE Conducted Peak Output Powers (10 MHz Band 2 LTE – Mid Channel)

Band	Frequency(Mhz)	Channel	Resource Block Size	Resource Block Offset	Peak Power [dBm]	
					QPSK	16-QAM
LTE	1905.0	19150	1	0	27.73	28.33
			1	49	27.53	28.07
			25	13	28.43	28.97
			50	0	28.75	29.34

LTE Conducted Peak Output Powers (10 MHz Band 2 LTE – High Channel)

Note : Detecting mode is Peak.

## 7.2 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT

Mode	RB/RB SIZE	Freq (MHz)	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	ERP	
								W	dBm
10 MHz BAND QPSK	1/0	1715.0	-18.00	15.43	9.98	2.69	H	0.19	22.72
		1732.5	-15.74	17.67	10.06	2.70	H	0.32	25.03
		1750.0	-16.05	17.33	10.14	2.68	H	0.30	24.78
	1/49	1715.0	-17.08	16.35	9.98	2.69	H	0.23	23.64
		1732.5	-15.71	17.70	10.06	2.70	H	0.32	25.06
		1750.0	-16.41	16.97	10.14	2.68	H	0.28	24.42
	25/12	1715.0	-17.61	15.82	9.98	2.69	H	0.20	23.11
		1732.5	-15.43	17.98	10.06	2.70	H	0.34	25.34
		1750.0	-16.54	16.84	10.14	2.68	H	0.27	24.29
	50/0	1715.0	-17.87	15.56	9.98	2.69	H	0.19	22.85
		1732.5	-16.68	16.73	10.06	2.70	H	0.26	24.09
		1750.0	-17.02	16.36	10.14	2.68	H	0.24	23.81

Equivalent Isotropic Radiated Power Output Data ( Band 4 )

Mode	RB/RB SIZE	Freq (MHz)	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	ERP	
								W	dBm
10 MHz BAND 16QAM	1/0	1715.0	-17.90	15.53	9.98	2.69	H	0.19	22.82
		1732.5	-15.63	17.78	10.06	2.70	H	0.33	25.14
		1750.0	-16.14	17.24	10.14	2.68	H	0.29	24.69
	1/49	1715.0	-16.78	16.65	9.98	2.69	H	0.25	23.94
		1732.5	-15.65	17.76	10.06	2.70	H	0.33	25.12
		1750.0	-16.53	16.85	10.14	2.68	H	0.27	24.30
	25/12	1715.0	-16.73	16.70	9.98	2.69	H	0.25	23.99
		1732.5	-14.89	18.52	10.06	2.70	H	0.39	25.88
		1750.0	-15.85	17.53	10.14	2.68	H	0.31	24.98
	50/0	1715.0	-16.59	16.84	9.98	2.69	H	0.26	24.13
		1732.5	-15.71	17.70	10.06	2.70	H	0.32	25.06
		1750.0	-15.77	17.61	10.14	2.68	H	0.32	25.06

Equivalent Isotropic Radiated Power Output Data ( Band 4 )



**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1202FR10	<b>Date of Issue:</b> February 17, 2012	<b>EUT Type:</b> Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	<b>FCC ID:</b> ZNFMS840

Mode	RB/RB SIZE	Freq (MHz)	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	ERP	
								W	dBm
10 MHz BAND QPSK	1/0	1855.0	-14.93	18.78	10.40	2.83	H	0.43	26.34
		1880.0	-13.70	20.18	10.43	2.81	H	0.60	27.80
		1905.0	-13.91	20.08	10.47	2.86	H	0.59	27.69
	1/49	1855.0	-14.92	18.79	10.40	2.83	H	0.43	26.35
		1880.0	-14.13	19.75	10.43	2.81	H	0.55	27.37
		1905.0	-13.55	20.44	10.47	2.86	H	0.64	28.05
	25/12	1855.0	-14.97	18.74	10.40	2.83	H	0.43	26.30
		1880.0	-13.89	19.99	10.43	2.81	H	0.58	27.61
		1905.0	-13.35	20.64	10.47	2.86	H	0.67	28.25
	50/0	1855.0	-15.65	18.06	10.40	2.83	H	0.36	25.62
		1880.0	-14.73	19.15	10.43	2.81	H	0.48	26.77
		1905.0	-14.49	19.50	10.47	2.86	H	0.51	27.11

Equivalent Isotropic Radiated Power Output Data ( Band 2 )

Mode	RB/RB SIZE	Freq (MHz)	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	ERP	
								W	dBm
10 MHz BAND 16QAM	1/0	1855.0	-15.07	18.64	10.40	2.83	H	0.42	26.20
		1880.0	-13.60	20.28	10.43	2.81	H	0.62	27.90
		1905.0	-13.60	20.39	10.47	2.86	H	0.63	28.00
	1/49	1855.0	-14.54	19.17	10.40	2.83	H	0.47	26.73
		1880.0	-14.14	19.74	10.43	2.81	H	0.54	27.36
		1905.0	-13.51	20.48	10.47	2.86	H	0.64	28.09
	25/12	1855.0	-14.37	19.34	10.40	2.83	H	0.49	26.90
		1880.0	-13.25	20.63	10.43	2.81	H	0.67	28.25
		1905.0	-12.90	21.09	10.47	2.86	H	0.74	28.70
	50/0	1855.0	-14.27	19.44	10.40	2.83	H	0.50	27.00
		1880.0	-13.75	20.13	10.43	2.81	H	0.60	27.75
		1905.0	-13.02	20.97	10.47	2.86	H	0.72	28.58

Equivalent Isotropic Radiated Power Output Data ( Band 2 )



**NOTES:**

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1202FR10	<b>Date of Issue:</b> February 17, 2012	<b>EUT Type:</b> Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	<b>FCC ID:</b> ZNFMS840



### 7.3 RADIATED SPURIOUS EMISSIONS

#### 7.3.1 RADIATED SPURIOUS EMISSIONS (Band 4)

- MEASURED OUTPUT POWER: 25.88 dBm = 0.387 W
- MODULATION SIGNAL: 10 MHz 16-QAM
- DISTANCE: 3 meters
- LIMIT: - (43 + 10 log<sub>10</sub> (W)) = - 38.88 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20000 (1715.00)	3430.00	-33.40	12.05	-36.98	5.17	V	-30.100	-55.98
	5145.00	-44.11	12.49	-39.86	6.34	V	-33.710	-59.59
	6860.00	-44.21	11.60	-36.35	6.56	V	-31.310	-57.19
20175 (1732.50)	3465.00	-43.95	12.12	-48.21	4.56	V	-40.650	-66.53
	5197.50	-44.27	12.50	-40.33	6.54	V	-34.370	-60.25
	6930.00	-46.18	11.54	-37.82	6.70	H	-32.980	-58.86
20350 (1750.00)	3500.00	-49.79	12.21	-52.72	5.08	V	-45.590	-71.47
	5250.00	-45.95	12.52	-42.88	6.39	H	-36.750	-62.63
	7000.00	-45.71	11.49	-36.21	6.69	V	-31.410	-57.29

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5<sup>th</sup> Harmonic for all channel.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. Worst case is 25 resource block.

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

### 7.3.2 RADIATED SPURIOUS EMISSIONS (Band 2)

- MEASURED OUTPUT POWER: 28.70 dBm = 0.741 W
- MODULATION SIGNAL: 10 MHz, 16-QAM
- DISTANCE: 3 meters
- LIMIT: - (43 + 10 log<sub>10</sub> (W)) = - 41.70 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
18650 (1855.00)	3710.00	-41.13	12.36	-42.92	4.87	V	-35.43	-64.13
	5565.00	-55.85	12.61	-52.30	6.66	H	-46.35	-75.05
	7420.00	-53.34	10.97	-42.11	6.60	V	-37.74	-66.44
18900 (1880.00)	3760.00	-38.36	12.40	-40.08	4.88	H	-32.56	-61.26
	5640.00	-50.23	12.65	-46.44	6.54	H	-40.33	-69.03
	7520.00	-51.63	10.84	-39.25	7.32	H	-35.73	-64.43
19150 (1905.00)	3810.00	-36.07	12.45	-38.30	5.02	V	-30.87	-59.57
	5715.00	-51.39	12.71	-47.86	6.54	H	-41.69	-70.39
	7620.00	-53.93	10.87	-41.02	7.78	H	-37.93	-66.63


- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5<sup>th</sup> Harmonic for all channel.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. Worst case is 25 resource block.

## 7.4 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

### 7.4.1 FREQUENCY STABILITY (Band 4)

OPERATING FREQUENCY: 1732,500,000 Hz  
 CHANNEL: 20175  
 REFERENCE VOLTAGE: 3.70 VDC  
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1732 500 004	0	0.000 000	0.000
100%		-30	1732 500 003	2.75	0.000 000	0.002
100%		-20	1732 500 007	6.55	0.000 000	0.004
100%		-10	1732 499 994	-5.81	0.000 000	-0.003
100%		0	1732 499 996	-3.93	0.000 000	-0.002
100%		+10	1732 499 989	-11.13	-0.000 001	-0.006
100%		+30	1732 499 989	-10.99	-0.000 001	-0.006
100%		+40	1732 500 001	1.22	0.000 000	0.001
100%		+50	1732 499 990	-9.96	-0.000 001	-0.006
115%		4.255	+20	1732 500 003	3.48	0.000 000
Batt. Endpoint	3.400	+20	1732 499 998	-1.69	0.000 000	-0.001

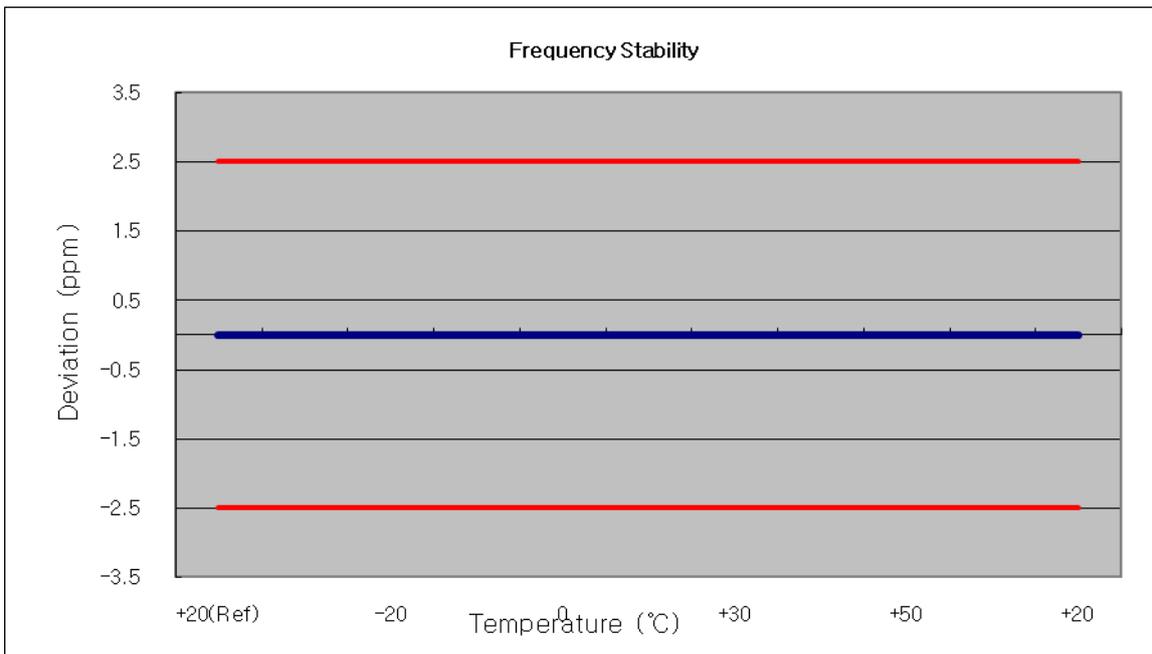

### 7.4.2 FREQUENCY STABILITY (Band 2)

OPERATING FREQUENCY: 1800,000,000 Hz  
 CHANNEL: 18900  
 REFERENCE VOLTAGE: 3.7 VDC  
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1880 000 003	0	0.000 000	0.000
100%		-30	1879 999 999	-4.21	0.000 000	-0.002
100%		-20	1880 000 005	2.09	0.000 000	0.001
100%		-10	1880 000 003	-0.2	0.000 000	0.000
100%		0	1880 000 004	1.12	0.000 000	0.001
100%		+10	1880 000 001	-1.99	0.000 000	-0.001
100%		+30	1879 999 996	-6.97	0.000 000	-0.004
100%		+40	1880 000 000	-3.2	0.000 000	-0.002
100%		+50	1880 000 006	2.93	0.000 000	0.002
115%		4.255	+20	1880 000 002	-1.49	0.000 000
Batt. Endpoint	3.400	+20	1879 999 998	-4.66	0.000 000	-0.002

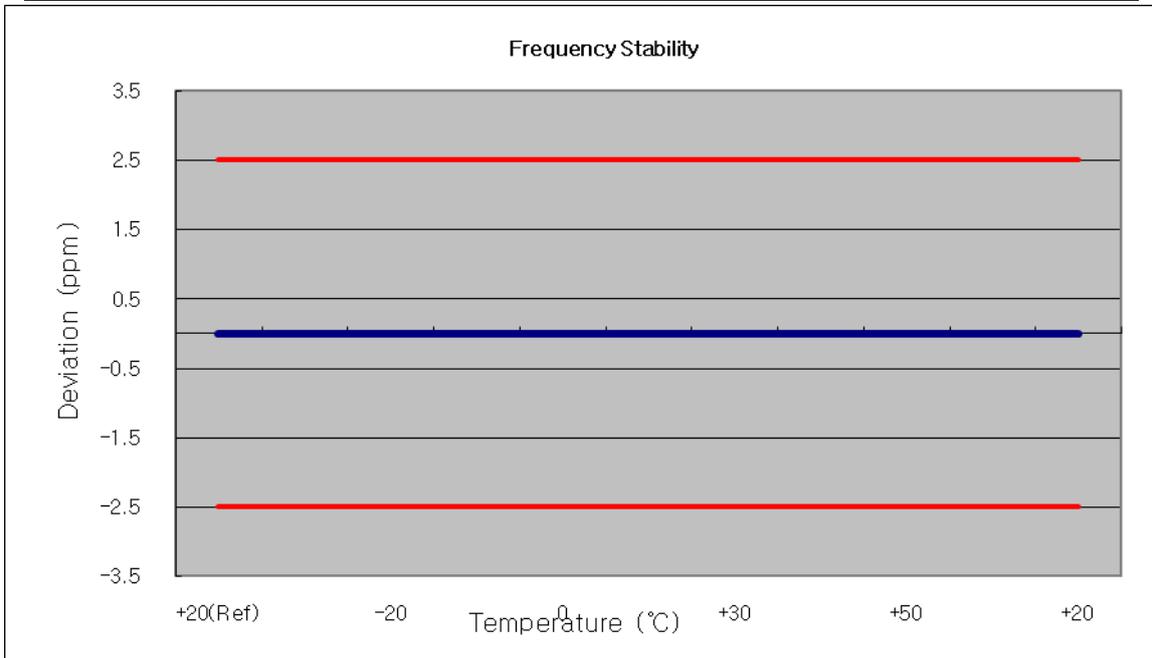


## 7.5 PEAK-TO-AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown Page 29~30, 36~37.

Band	Channel	Frequency(MHz)	Bandwidth	Modulation	P A R
LTE BAND 4	20175	1732.5	10 MHz	QPSK	5.40
				16-QAM	5.83
LTE BAND 2	18900	1880.0		QPSK	5.27
				16-QAM	6.09

## 8. TEST PLOTS

Conducted Spurious Plot (10 MHz BW, QPSK, AWS Band 4 – Low Channel)

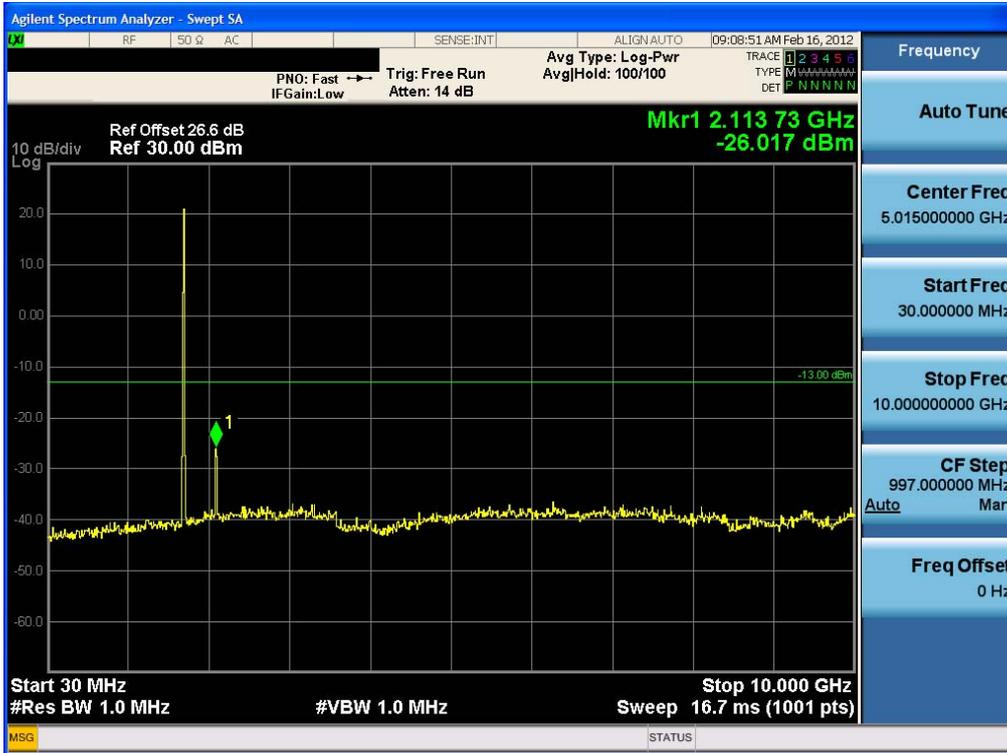


Conducted Spurious Plot (10 MHz BW, QPSK, AWS Band 4 – Low Channel)



FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

Band Edge Plot (10 MHz BW, QPSK, AWS Band 4 – Low Channel)

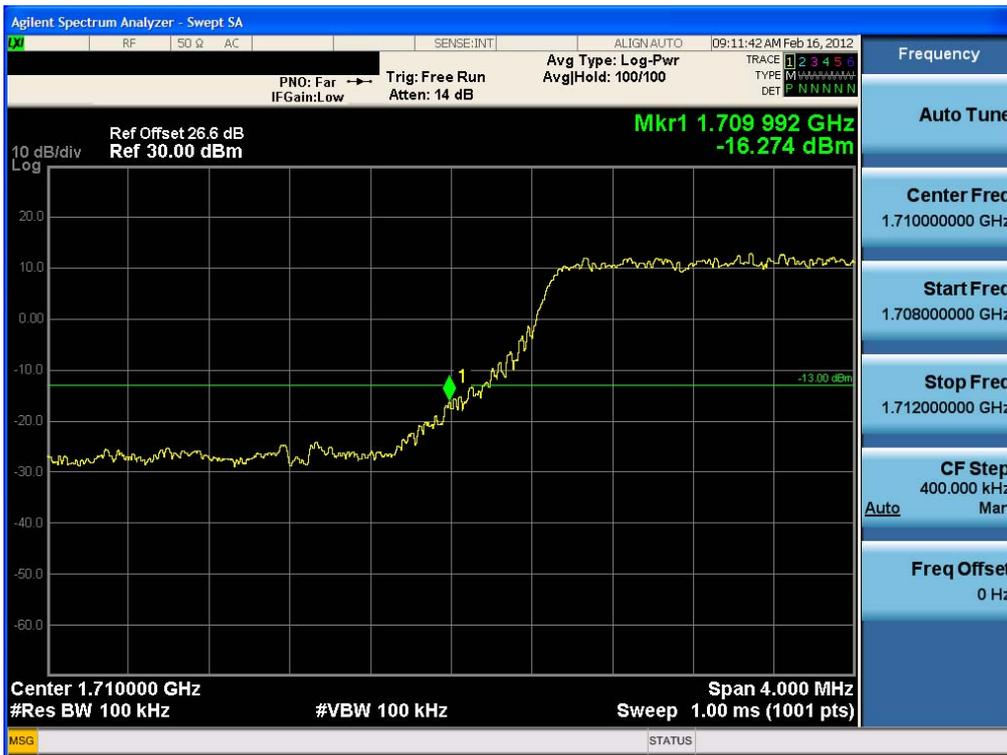

Extended Band Edge Plot (10 MHz BW, QPSK, AWS Band 4 – Low Channel)



FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

Conducted Spurious Plot (10 MHz BW, QPSK, AWS Band 4 – Mid Channel)



Conducted Spurious Plot (10 MHz BW, QPSK, AWS Band 4 – Mid Channel)




FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

Occupied Bandwidth Plot (10 MHz BW, QPSK, AWS Band 4 – Mid Channel)




Peak-Average Ratio Plot (10 MHz BW, QPSK, AWS Band 4 – Mid Channel)

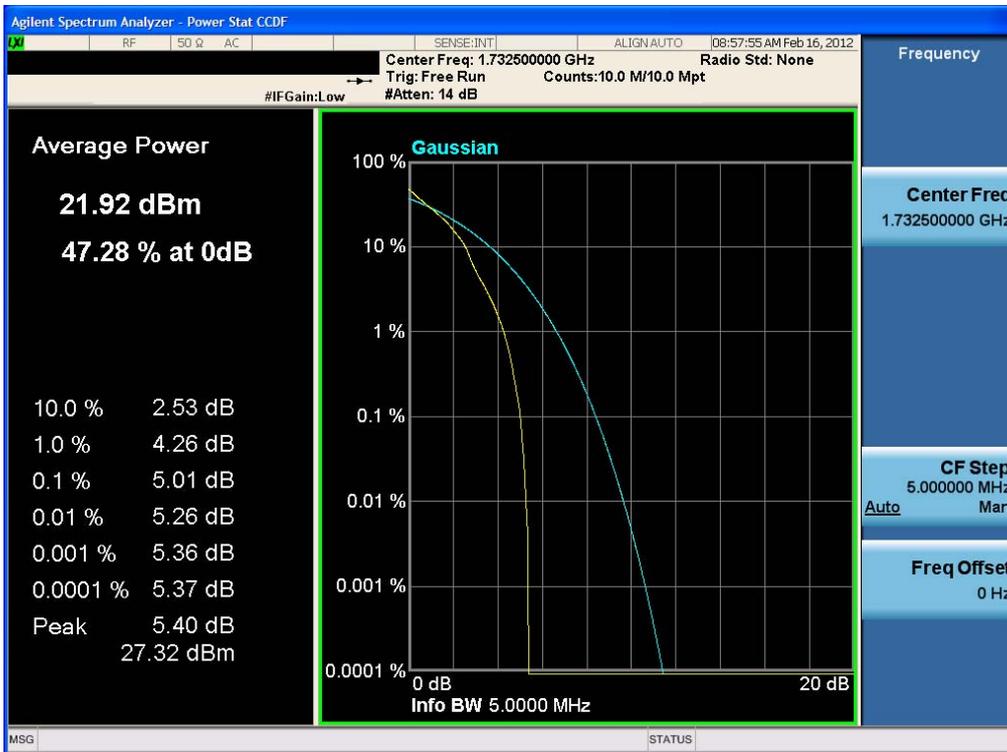


FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840



Occupied Bandwidth Plot (10 MHz BW, 16-QAM, AWS Band 4 – Mid Channel)

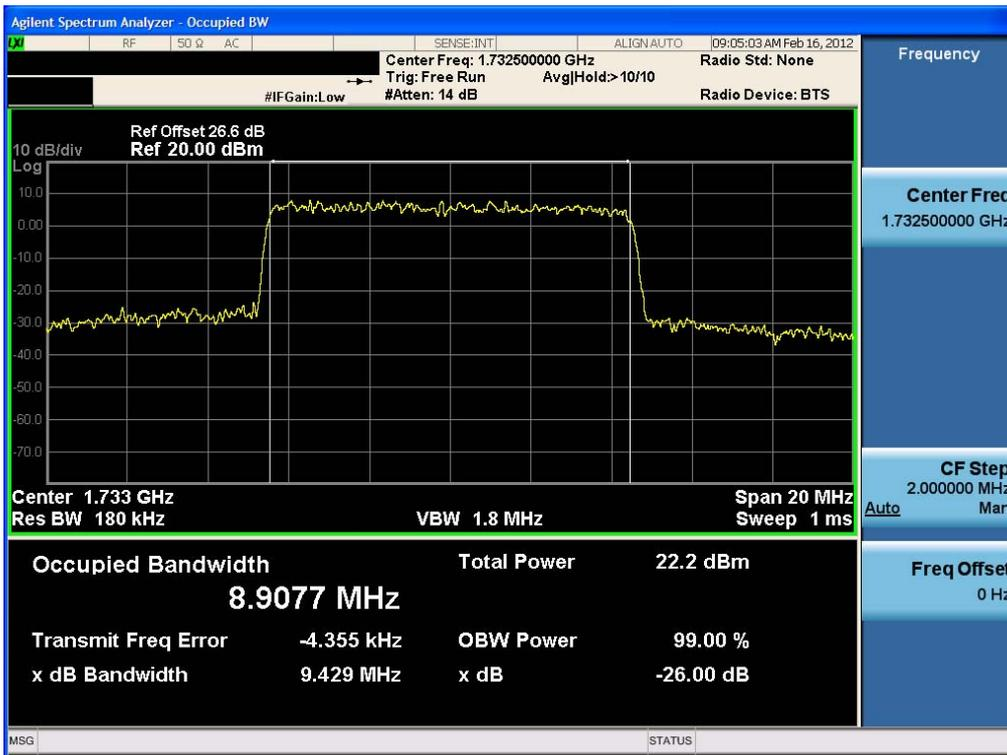

Peak-Average Ratio Plot (10 MHz BW, 16-QAM, AWS Band 4 – Mid Channel)

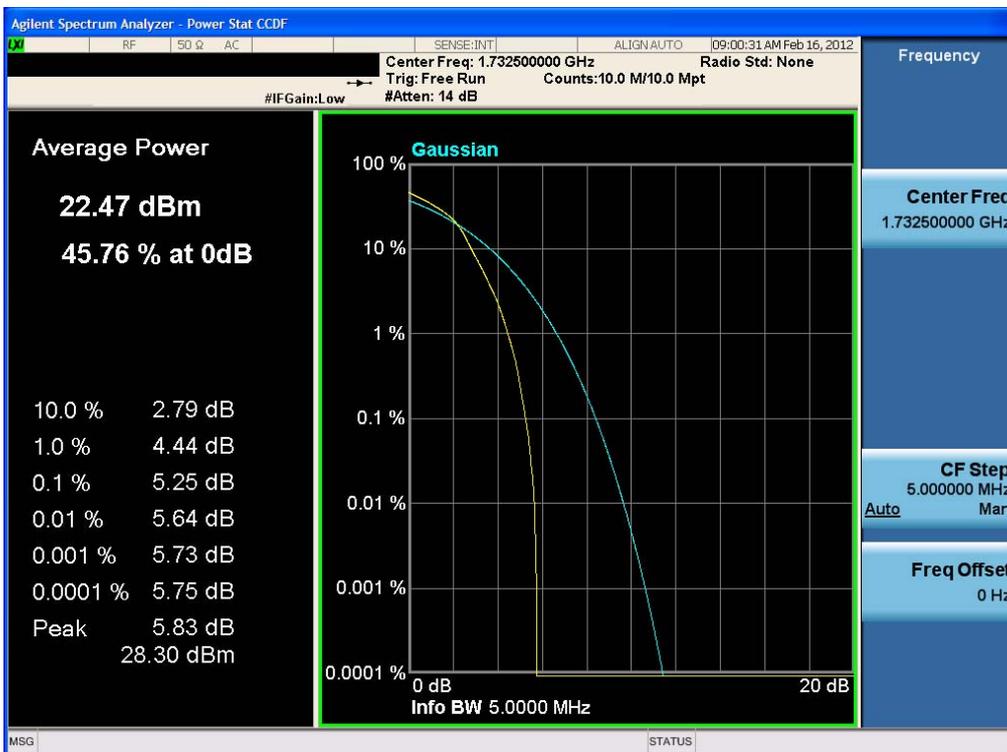

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

Conducted Spurious Plot (10 MHz BW, QPSK, AWS Band 4 – High Channel)



Conducted Spurious Plot (10 MHz BW, QPSK, AWS Band 4 – High Channel)




FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

Band Edge Plot (10 MHz BW, QPSK, AWS Band 4 – High Channel)




Extended Band Edge Plot (10 MHz BW, QPSK, AWS Band 4 – High Channel)

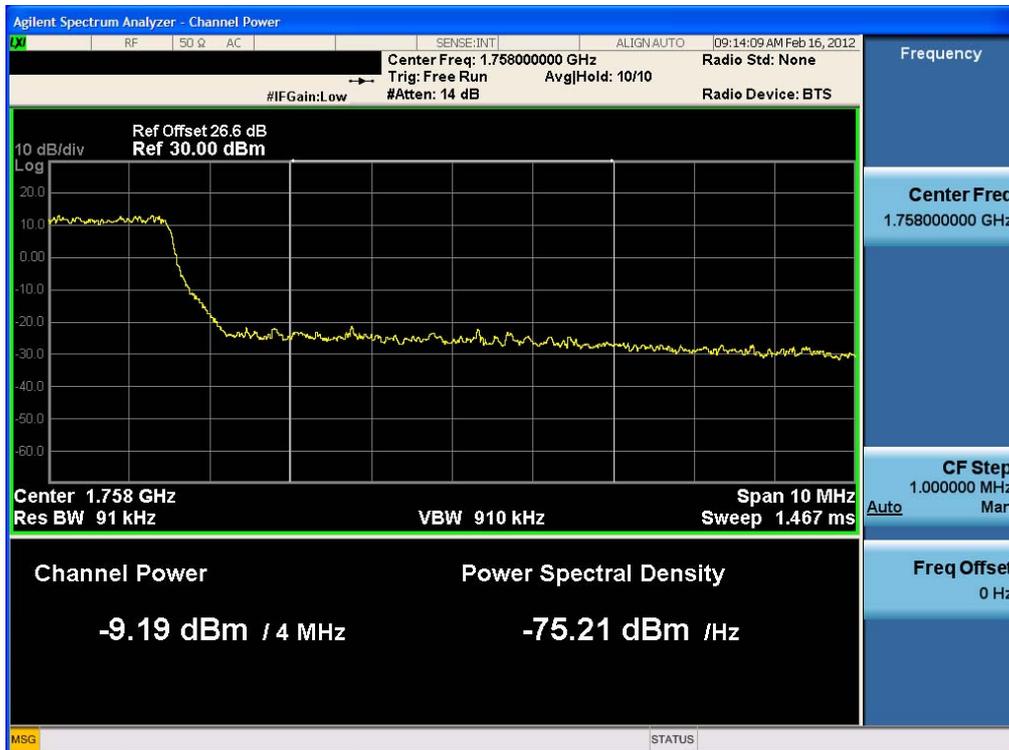

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840



Band Edge Plot (10 MHz BW, QPSK, PCS Band 2 – Low Channel)

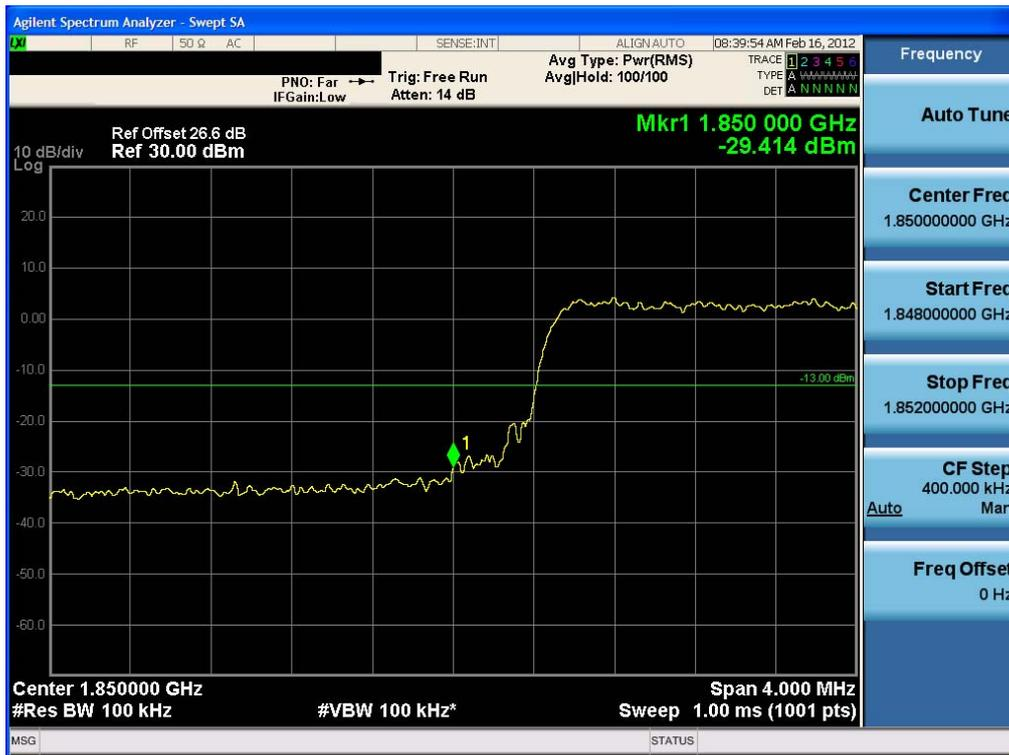

Extended Band Edge Plot (10 MHz BW, QPSK, PCS Band 2 – Low Channel)



FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

Conducted Spurious Plot (10 MHz BW, QPSK, PCS Band 2 – Mid Channel)



Conducted Spurious Plot (10 MHz BW, QPSK, PCS Band 2 – Mid Channel)




FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840



Occupied Bandwidth Plot (10 MHz BW, QPSK, PCS Band 2 – Mid Channel)




Peak-Average Ratio Plot (10 MHz BW, QPSK, PCS Band 2 – Mid Channel)

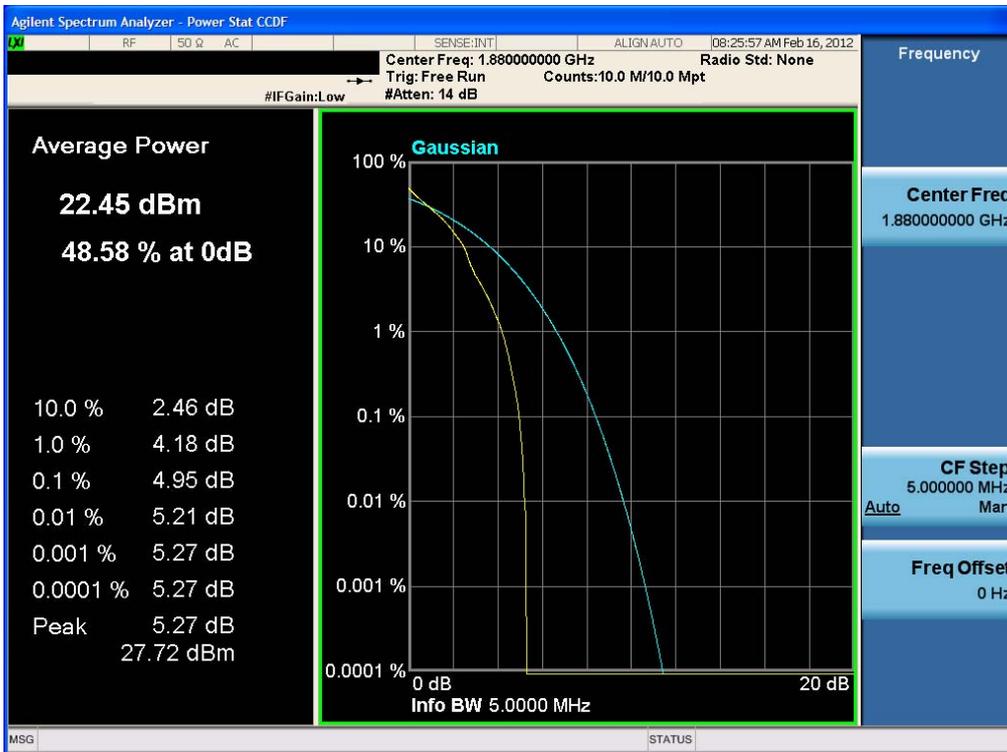


FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840



Occupied Bandwidth Plot (10 MHz BW, 16-QAM, PCS Band 2 – Mid Channel)

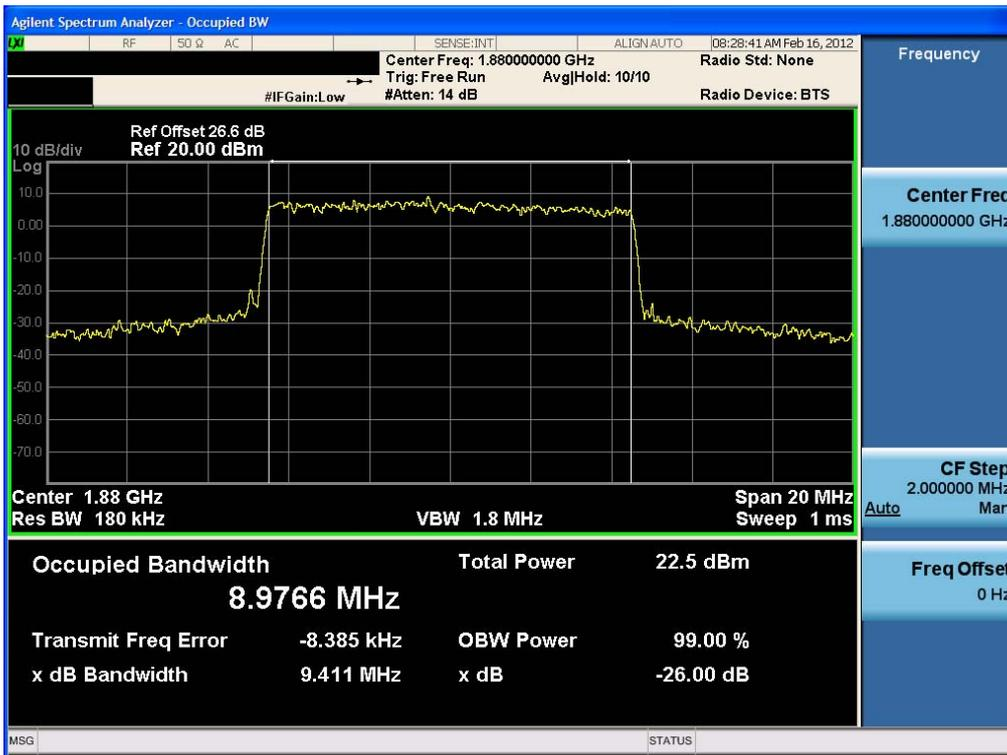

Peak-Average Ratio Plot (10 MHz BW, 16-QAM, PCS Band 2 – Mid Channel)

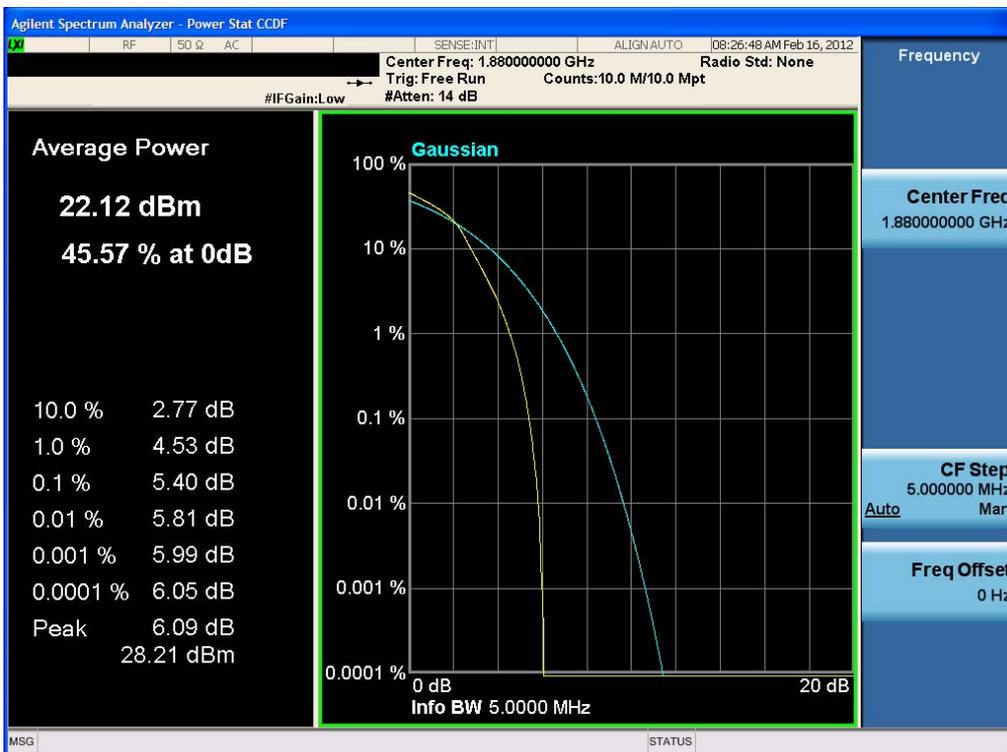

FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

Conducted Spurious Plot (10 MHz BW, QPSK, PCS Band 2 – High Channel)




Conducted Spurious Plot (10 MHz BW, QPSK, PCS Band 2 – High Channel)



FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840

Band Edge Plot (10 MHz BW, QPSK, PCS Band 2 – High Channel)

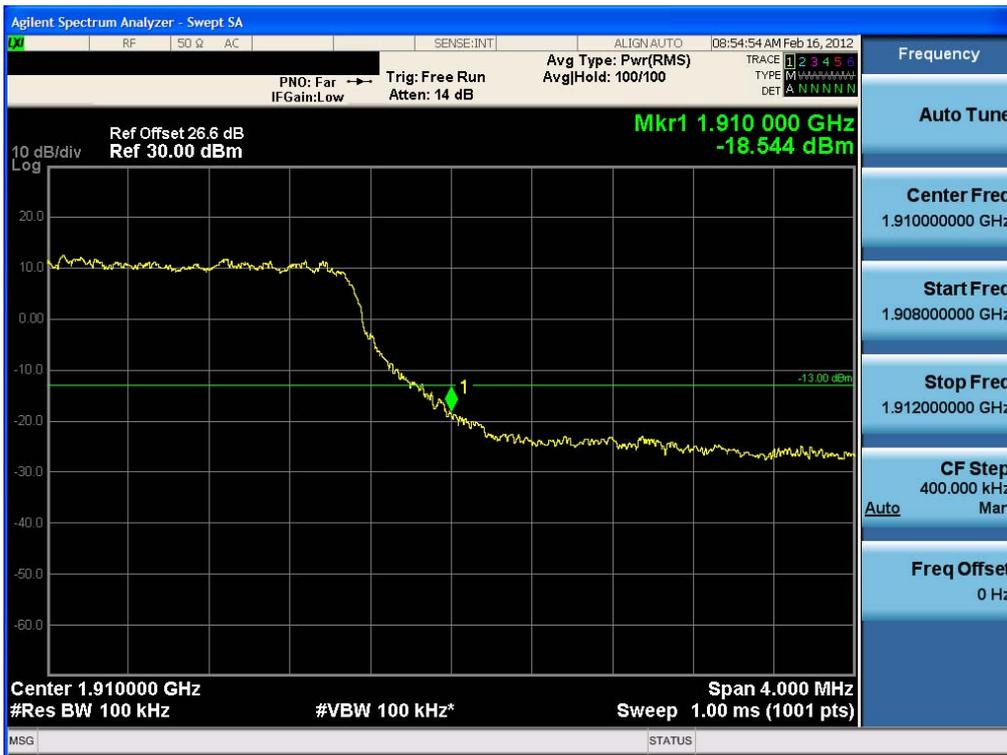

Extended Band Edge Plot (10 MHz BW, QPSK, PCS Band 2 – High Channel)



FCC Class II Permissive Change REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1202FR10	Date of Issue: February 17, 2012	EUT Type: Cellular/PCS/AWS CDMA/ AWS LTE with Bluetooth/ WLAN	FCC ID: ZNFMS840