



HCT CO., LTD.

CERTIFICATION DIVISION  
105-1, JANGAM-RI, MAJANG-MYEON, ICHEON-SI, KYOUNGKI-DO, REPUBLIC OF KOREA  
TEL: +82 31 645 6300 FAX: +82 31 645 6401

## EMI CERTIFICATION REPORT

**Applicant:**

**LG Electronics MobileComm U.S.A., Inc.**  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Date of Issue: August 27, 2012**  
**Test Report No.: HCTE1208FE20**  
**Test Site: HCT CO., LTD.**  
**HCT FRN: 0005-8664-21**

**FCC ID:**

**ZNFP895QB**

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B  
Equipment Type : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC  
Model Name : LG-P895qb  
Additional Model Name : P895qb, LGP895qb, P895QB, LGP895QB, LG-P895qb, LG-P895QB  
Port / Connector(s) : USB Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

**Report prepared by**  
**: Jeong-Hyeon Choi**  
**Test Engineer of EMC Team**

**Approved by**  
**: Sang-Jun Lee**  
**Manager of EMC Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## DOCUMENT HISTORY

---

The revision history for this document is shown in table.

Version	Date	Description
HCTE1208FE20	August 27, 2012	Initial Release

---

## TABLE OF CONTENTS

---

	PAGE
1. GENERAL INFORMATION .....	4
1.1 Product Description.....	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Tested System Details.....	5
1.4 Cable Description .....	6
1.5 Noise Suppression Parts on Cable. (I/O cable) .....	6
1.6 Test Methodology .....	7
1.7 Test Facility .....	7
1.8 Frequency Range of Radiated Measurements .....	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 Configuration of Test System.....	8
3. PRELIMINARY TEST .....	9
3.1 Conducted Emission Test .....	9
3. 2 Radiated Emission Test .....	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY .....	10
4.1 Conducted Emission Test .....	10
4.2 Radiated Emission Test .....	15
5. FIELD STRENGTH CALCULATION .....	17
6. TEST EQUIPMENT .....	18
7. CONCLUSION .....	19

**ATTACHMENT: TEST SETUP PHOTOGRAPHS**

## 1. GENERAL INFORMATION

### 1.1 Product Description

Equipment Under Test is **Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC, Model: LG-P895qb** manufactured by **LG Electronics MobileComm U.S.A., Inc.** Its basic purpose is used for communications.

<b>Model</b>	LG-P895qb
<b>Additional Model Name</b>	P895qb, LGP895qb, P895QB, LGP895QB, LG-P895qb LG-P895QB
<b>FCC ID</b>	ZNFP895QB
<b>E.U.T Type</b>	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA /HSUPA Phone with Bluetooth/WLAN/NFC
<b>TX Frequency</b>	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 1 852.4 MHz to 1 907.6 MHz (WCDMA 1 900)
<b>RX Frequency</b>	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 1 932.4 MHz to 1 987.6 MHz (WCDMA 1 900)

### 1.2 Related Submittal(s) / Grant(s)

Original submittal only.

### 1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Name	FCC ID / DoC	Connected To
E.U.T	LG	LG-P895qb	ZNFP895QB	Notebook PC
Notebook PC	H.P	ProBook 6560b	DoC	E.U.T Notebook PC adaptor
Notebook PC adaptor	CHICONY POWER TECHNOLOGY	Series PPP012H-S	-	Notebook PC
Mouse	Radio shack	Series 2-button mouse	FSUGMZE3	Notebook PC
SD Card	SanDisk	8GB	-	E.U.T
USB cable	Ningbo Broad	EAD62150402	-	E.U.T Notebook PC
Headset	CREYSIN	EMB-LGE019 STKC-2	-	E.U.T
Net hard	LG	N1A1DD1	Doc	Notebook PC Net hard adaptor
Net hard adaptor	Yang Ming Industrial	DA-60M12	-	Net hard
RJ45 cable	-	-	-	Net hard Notebook PC

### 1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
E.U.T	Micro USB	-	Y	(D)1.2
	Headset jack	-	N	(D)1.2
Notebook PC	Serial (Mouse)	-	N	(D)1.8
	RJ 45	-	N	(D)1.5

\* The marked "(D)" means the data cable and "(P)" means the power cable.

### 1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
E.U.T	Micro USB	N	N/A	Y	Both End
	Headset jack	N	N/A	Y	E.U.T End
Notebook PC	Serial (Mouse)	-	-	Y	Notebook PC End
	RJ 45	N	N/A	N	Both End

## 1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

## 1.7 Test Facility

The 3 m semi anechoic chamber used to collect the test data is located at the 105-1, Jangam-Ri, Majang-Myeon, Icheon-Si, Kyoungki-Do, Republic of Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4.

Detailed description of test facilities was submitted to the Commission and accepted dated Mar 02, 2011 (Registration Number: 90661)

## 1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower


## 2. SYSTEM TEST CONFIGURATION

### 2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

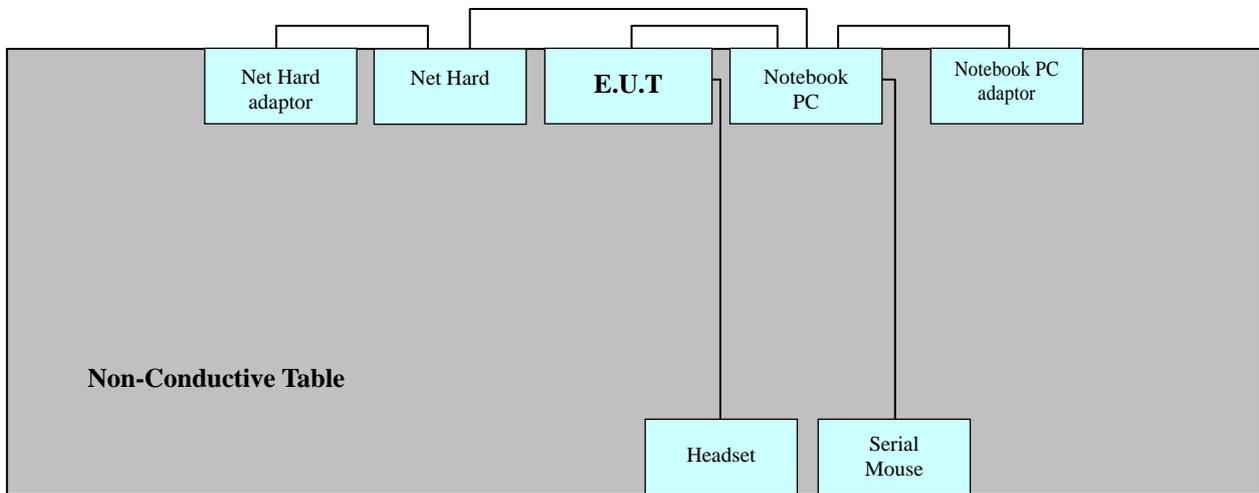

Power Line: 120 VAC

### **3. PRELIMINARY TEST**

---

#### **3.1 Conducted Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**       Data communication mode

#### **3. 2 Radiated Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**       Data communication mode

## 4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)

Operation Mode : Data communication mode

Temperature : 25.7 °C

Humidity Level : 50.8 %

Test Date : August 24, 2012

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit	Measurement Level	Result Level	Limit	Measurement Level	Result Level
			(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)
0.378	10.0	N	58	29.6	39.6	48	32.20	42.20
0.470	10.0	N	57	21.5	31.5	47	-	-
0.419	9.8	H	57	-	-	47	25.70	35.50
1.904	9.9	H	56	-	-	46	20.30	30.20
2.208	10.1	N	56	19.8	29.9	46	-	-
2.096	9.9	H	56	-	-	46	20.10	30.00

※ **NOTE:** Refer to page 11 to page 14 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor


**HCT**

**EMC**

EUT: P895qb  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: JH CHOI  
 Test Specification: FCC PART 15 B  
 Comment: H

**SCAN TABLE: "FCC PART 15 B(H)"**

Short Description:			FCC PART 15 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

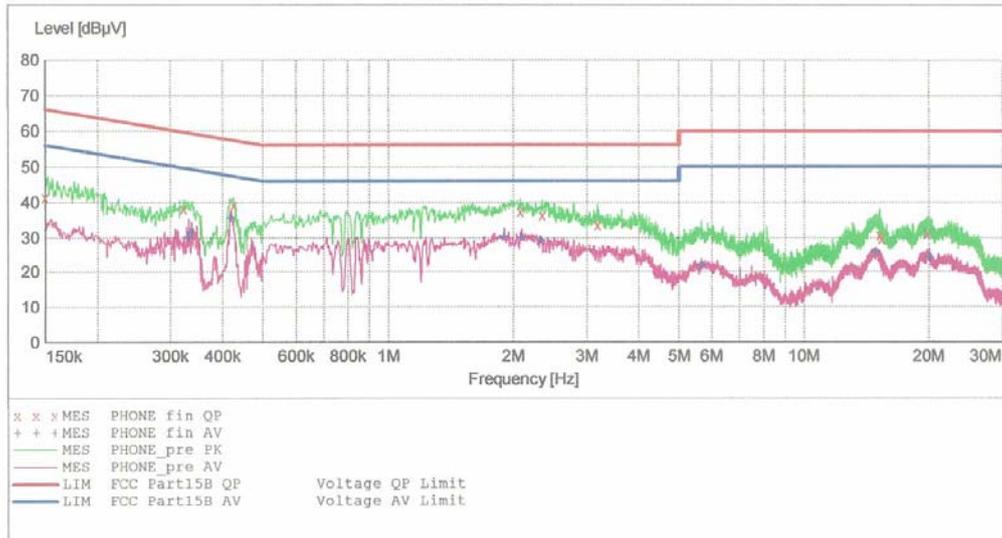

**MEASUREMENT RESULT: "PHONE\_fin\_QP"**

8/24/2012 1:53PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150010	41.50	9.8	66	24.5	---	---
0.323010	38.30	9.7	60	21.3	---	---
0.425010	39.20	9.8	57	18.2	---	---
2.080000	37.40	9.9	56	18.6	---	---
2.348000	36.40	10.0	56	19.6	---	---
3.192000	33.60	10.1	56	22.4	---	---
15.220000	30.80	11.0	60	29.2	---	---
15.368000	29.60	11.0	60	30.4	---	---
19.772000	31.10	11.7	60	28.9	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

8/24/2012 1:53PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.332010	29.90	9.7	49	19.5	---	---
0.336010	31.60	9.7	49	17.7	---	---
0.419010	35.50	9.8	48	12.0	---	---
1.904000	30.20	9.9	46	15.8	---	---
2.096000	30.00	9.9	46	16.0	---	---
2.328000	29.30	10.0	46	16.7	---	---
5.660000	21.90	10.2	50	28.1	---	---
14.884000	25.60	10.9	50	24.4	---	---
20.060000	24.20	11.8	50	25.8	---	---


**HCT**

**EMC**

EUT: P895qb  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: JH CHOI  
 Test Specification: FCC PART 15 CLASS B  
 Comment: N

**SCAN TABLE: "FCC PART 15 B(N)"**

Short Description:			FCC PART 15 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

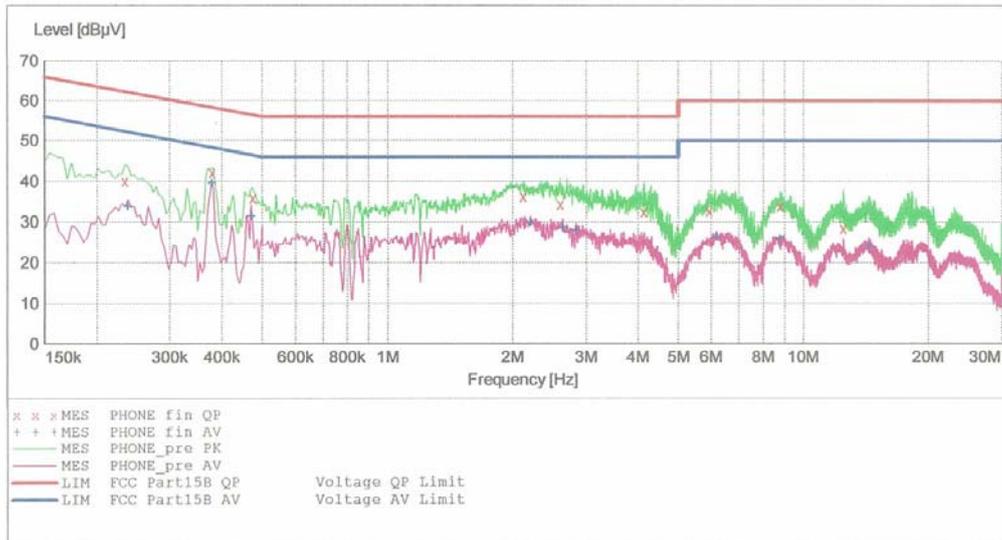

**MEASUREMENT RESULT: "PHONE\_fin\_QP"**

8/24/2012 1:49PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.234010	40.10	10.0	62	22.2	---	---
0.378010	42.20	10.0	58	16.1	---	---
0.474010	35.90	10.0	56	20.6	---	---
2.124000	36.20	10.1	56	19.8	---	---
2.600000	34.40	10.2	56	21.6	---	---
4.140000	32.50	10.3	56	23.5	---	---
5.928000	32.80	10.4	60	27.2	---	---
8.784000	33.90	10.6	60	26.1	---	---
12.488000	28.50	11.0	60	31.5	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

8/24/2012 1:49PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.238010	33.90	10.0	52	18.3	---	---
0.378010	39.60	10.0	48	8.7	---	---
0.470010	31.50	10.0	47	15.0	---	---
2.208000	29.90	10.1	46	16.1	---	---
2.636000	28.70	10.2	46	17.3	---	---
2.844000	28.00	10.2	46	18.0	---	---
6.180000	26.50	10.4	50	23.5	---	---
8.800000	26.00	10.6	50	24.0	---	---
14.388000	24.10	11.2	50	25.9	---	---

## 4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

### -For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data communication mode

Temperature : 25.7 °C

Humidity Level : 55.5 %

Test Date : August 21, 2012

Frequency (MHz)	Reading (dBUV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBUV/m)	Level (dBUV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
43.700	14.71	V	1.0	12.29	3.50	40.0	30.5	9.5
49.400	18.32	V	1.0	12.40	3.59	40.0	34.3	5.7
68.400	16.13	V	1.0	10.68	3.68	40.0	30.5	9.5
105.800	19.99	H	1.2	10.06	3.86	43.5	33.9	9.6
143.000	18.60	V	1.1	12.87	4.03	43.5	35.5	8.0
249.600	19.15	H	1.5	11.76	4.50	46.0	35.4	10.6

**-For measurement above 1 GHz**

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)  
 : Average mode: Peak (RBW: 1 MHz, VBW: 1 MHz)

Temperature : 25.6 °C

Humidity Level : 54.2 %

Test Date : August 22, 2012

Frequency (GHz)	Peak			POL	Average		
	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)		Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1.5900	49.20	74	24.8	V	28.40	54	25.6
1.9000	53.70	74	20.3	V	32.50	54	21.5
1.4000	48.10	74	25.9	H	26.80	54	27.2
1.9400	49.30	74	24.7	H	27.90	54	26.1

※ NOTE:

1. Measurement above 1 GHz was performed from 1 GHz to the 5<sup>th</sup> harmonic of highest fundamental frequency. Test was measured by 12 GHz.

## 5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.  
 The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB $\mu$ V/m value is mathematically converted to its corresponding level in  $\mu$ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

### [Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	$\mu$ V/m	dB $\mu$ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

## 6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<b><u>Conducted Emission</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2013.05.02
<input type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2013.07.04
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	2013.02.09
<input checked="" type="checkbox"/> LISN	EMCO	3816/2SH	9706-1070	1 year	2013.05.02
<input type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2013.07.31
<b><u>Radiated Emission</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2013.05.03
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU26	100241	1 year	2013.07.30
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2012.09.13
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input checked="" type="checkbox"/> Power Amplifier	Rohde & Schwarz	SCU-18	10094	1 year	2012.09.19
<input type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	937	2 year	2013.10.17
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	2014.02.20

## 7. CONCLUSION

---

The data collected shows that the **Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN/NFC, Model: LG-P895qb, FCC ID: ZNFP895QB** complies with §15.107 and §15.109 of the FCC rules.