

EMI CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Receipt: June 10, 2014**Date of Issue: June 23, 2014****Test Report No. HCT-E-1406-F047****HCT FRN: 0005866421****FCC ID:****ZNFUS990**

Rule Part(s) / Standard(s): FCC CFR 47 PART 15 Subpart B Class B
FCC Classification: JBP (Part 15 B – Class B Computing Device Peripheral)
EUT Type: CDMA/LTE Phone with Bluetooth, WIFI and NFC
Model Name: LG-US990
Additional Model Name: LGUS990, US990
Test Port: USB / Earphone Port
Date of Test: June 15, 2014 - June 16, 2014

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denial the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Ki-Min Lee
Test Engineer
EMC Team
Certification Division

Reviewed By

Sang-Jun Lee
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCT-E-1406-F047	June 23, 2014	Initial Release



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Test Facility	5
1.4 Tested System Details.....	6
1.5 Cable Description	7
1.6 Noise Suppression Parts on Cable. (I/O Cable)	7
2. DESCRIPTION OF TEST	8
3. PRELIMINARY TEST	11
3.1 Conducted Emission Test	11
3.2 Radiated Emission Test	11
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	12
4.1 Conducted Emission Test	12
4.2 Radiated Emission Test	19
5. LIST OF TEST EQUIPMENT	21
6. CONCLUSION	22

ATTACHMENT: TEST SETUP PHOTOGRAPHS



1. GENERAL INFORMATION

1.1 Description of EUT

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**
Its basic purpose is used for communications.

Model	LG-US990
FCC ID	ZNFUS990
Additional Model	LGUS990, US990
EUT Type	CDMA/LTE Phone with Bluetooth, WIFI and NFC
TX Frequency	824.70 MHz to 848.31 MHz (CDMA BC0) 1 851.25 MHz to 1 908.75 MHz (CDMA BC1) 1 850 MHz to 1 910 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 699 MHz to 716 MHz (LTE B12) 704 MHz to 716 MHz (LTE B17) 1 850 MHz to 1 915 MHz (LTE B25)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA BC0) 1 931.25 MHz to 1 988.75 MHz (CDMA BC1) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 729 MHz to 746 MHz (LTE B12) 734 MHz to 746 MHz (LTE B17) 1 930 MHz to 1 995 MHz (LTE B25)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.



1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2003.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3 m)	90661 (February 28, 2014)
Radiated Field strength measurement facility (10 m)	90661 (February 28, 2014)



1.4 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	LG-US990	LG	ZNFUS990	Notebook PC, Earphone
USB cable	EAD62329304	KSD	-	EUT, Notebook PC
Earphone	EAB62910502	CRESYN	-	EUT
Notebook PC	ProBook6560b	HP	DoC	EUT, Notebook PC adaptor
Notebook PC adaptor	PPP009D	DELTA Electronics (JIANGSU)LTD	-	Notebook PC
Gateway	MV440	Axesstel	PH7MV440	Notebook PC, Adaptor
Serial mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
Adaptor	DA-60M12	Yang Ming Industrial	-	Gateway
RJ45 cable	-	-	-	Notebook PC, Gateway
Micro SD Card (16 GB)	-	SanDisk	-	EUT



1.5 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.2
	Earphone	N/A	N	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.6 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End



2. DESCRIPTION OF TEST

2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 7

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth	Quasi-Peak(dB μ V)	Average(dB μ V)
0.15 to 0.5	9 kHz	66 to 56*	56 to 46*
0.5 to 5	9 kHz	56	46
5 to 30	9 kHz	60	50

**Decreases with the logarithm of the frequency.*



2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 8

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a 3 m shield room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. The antenna height scans apply for both horizontal and vertical polarizations, except that for vertical polarization, the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the lowest antenna element clears the site reference ground plane by at least 25 cm. (below 1 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu V/m$)	Quasi-Peak (dB $\mu V/m$)
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak (dB $\mu V/m$)	Average (dB $\mu V/m$)
Above 1 000	3	74	54




2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2.3 Configuration of Tested System

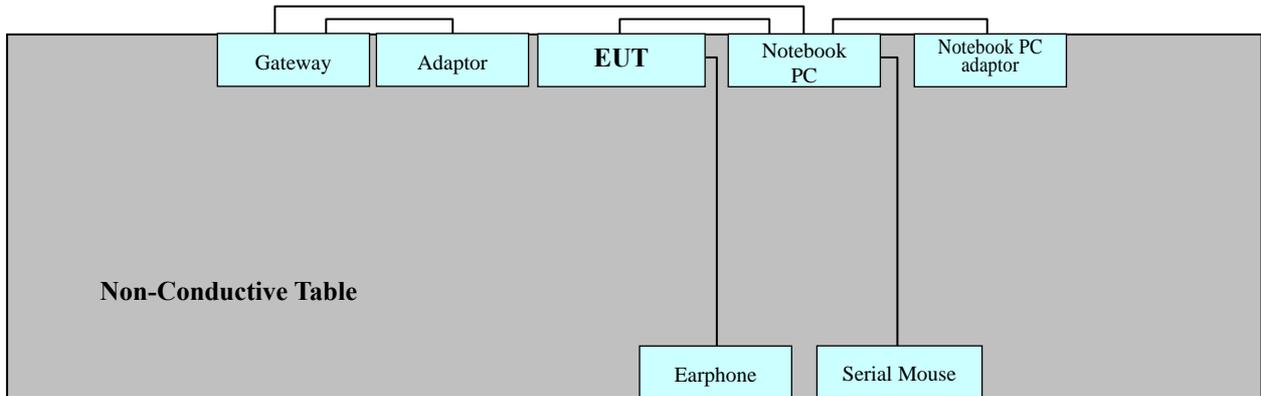

Power Line: 120 VAC, 60 Hz



3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode

3.2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode



4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test


The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, CISPR-Average
6 dB Bandwidth	: 9 kHz
Operation Mode	: Data Communication mode
Temperature	: 24.0 °C
Relative Humidity	: 46.4 %
Test Date	: June 15, 2014

※ NOTE: Refer to page 13 to page 18 for test data.



Figure 1: Spectral Diagrams, Conducted Emission, AC Mains (0.15 - 30)MHz, Line (L1)

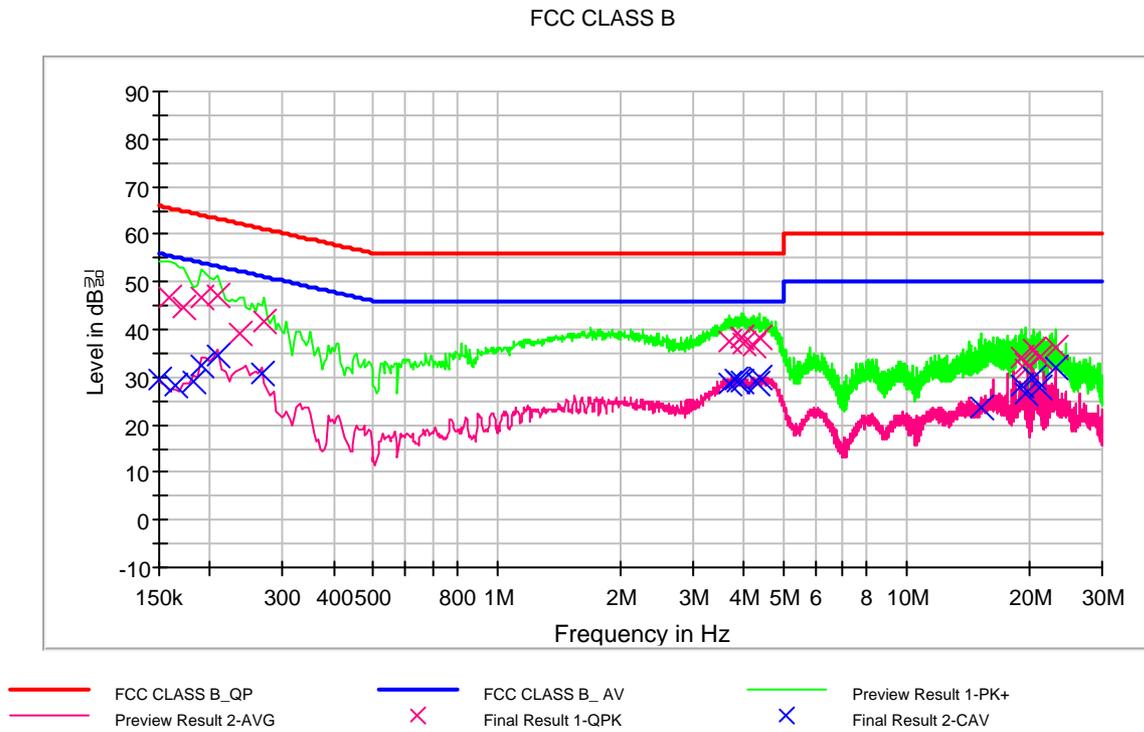

※ Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage



QuasiPeak Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.159000	46.7	9.000	L1	9.7	18.8	65.5
0.172500	44.5	9.000	L1	9.7	20.3	64.8
0.190500	46.5	9.000	L1	9.7	17.5	64.0
0.208500	47.2	9.000	L1	9.7	16.1	63.3
0.235500	39.2	9.000	L1	9.7	23.1	62.3
0.271500	41.7	9.000	L1	9.7	19.4	61.1
3.695000	37.7	9.000	L1	10.0	18.3	56.0
3.960500	38.4	9.000	L1	10.0	17.6	56.0
3.974000	38.4	9.000	L1	10.0	17.6	56.0
4.005500	37.2	9.000	L1	10.1	18.8	56.0
4.253000	36.7	9.000	L1	10.1	19.3	56.0
4.383500	38.2	9.000	L1	10.1	17.8	56.0
19.161500	34.2	9.000	L1	10.9	25.8	60.0
19.467500	32.9	9.000	L1	10.9	27.1	60.0
19.593500	31.5	9.000	L1	10.9	28.5	60.0
20.318000	35.6	9.000	L1	10.9	24.4	60.0
21.150500	34.3	9.000	L1	11.0	25.7	60.0
23.130500	36.3	9.000	L1	11.1	23.7	60.0




CAverage Final Result

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	29.4	9.000	L1	9.7	26.6	56.0
0.163500	28.3	9.000	L1	9.7	27.0	55.3
0.181500	29.1	9.000	L1	9.7	25.3	54.4
0.190500	32.6	9.000	L1	9.7	21.4	54.0
0.208500	34.4	9.000	L1	9.7	18.9	53.3
0.267000	30.8	9.000	L1	9.7	20.4	51.2
3.695000	28.5	9.000	L1	10.0	17.5	46.0
3.807500	29.4	9.000	L1	10.0	16.6	46.0
3.875000	29.2	9.000	L1	10.0	16.8	46.0
3.965000	29.1	9.000	L1	10.0	16.9	46.0
4.338500	28.8	9.000	L1	10.1	17.2	46.0
4.383500	29.9	9.000	L1	10.1	16.1	46.0
15.206000	23.7	9.000	L1	10.7	26.3	50.0
19.161500	28.2	9.000	L1	10.9	21.8	50.0
19.467500	26.4	9.000	L1	10.9	23.6	50.0
20.318000	30.1	9.000	L1	10.9	19.9	50.0
21.150500	27.7	9.000	L1	11.0	22.3	50.0
23.130500	31.8	9.000	L1	11.1	18.2	50.0



Figure 2: Spectral Diagrams, Conducted Emission, AC Mains (0.15 - 30)MHz, Line (N)

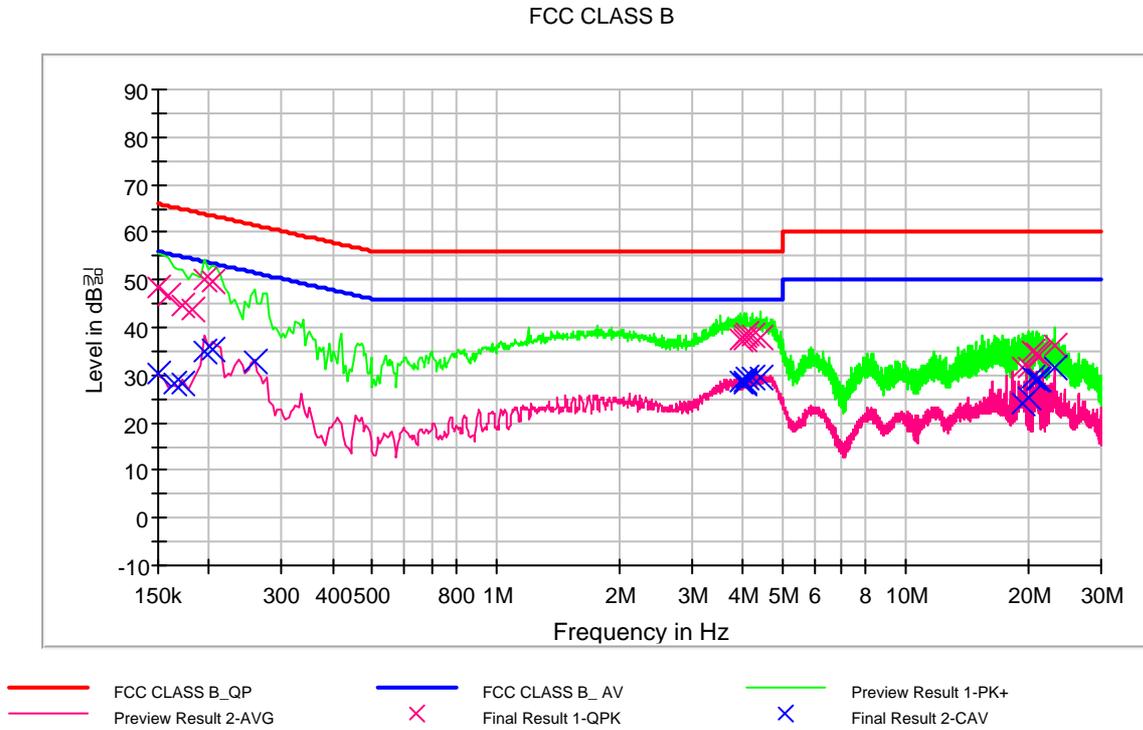

※ Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage



QuasiPeak Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	48.3	9.000	N	9.7	17.7	66.0
0.159000	46.7	9.000	N	9.7	18.8	65.5
0.172500	44.8	9.000	N	9.7	20.0	64.8
0.181500	43.6	9.000	N	9.7	20.8	64.4
0.195000	50.3	9.000	N	9.7	13.5	63.8
0.204000	49.6	9.000	N	9.7	13.8	63.4
3.947000	37.3	9.000	N	10.1	18.7	56.0
4.023500	37.5	9.000	N	10.1	18.5	56.0
4.032500	38.3	9.000	N	10.1	17.7	56.0
4.104500	38.9	9.000	N	10.1	17.1	56.0
4.244000	38.2	9.000	N	10.1	17.8	56.0
4.424000	37.7	9.000	N	10.1	18.3	56.0
19.400000	31.7	9.000	N	10.8	28.3	60.0
19.953500	31.6	9.000	N	10.8	28.4	60.0
20.318000	35.0	9.000	N	10.8	25.0	60.0
20.804000	34.5	9.000	N	10.8	25.5	60.0
21.051500	34.3	9.000	N	10.9	25.7	60.0
23.130500	36.0	9.000	N	10.9	24.0	60.0



CAverage Final Result

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	30.2	9.000	N	9.7	25.8	56.0
0.163500	28.1	9.000	N	9.7	27.2	55.3
0.172500	28.2	9.000	N	9.7	26.6	54.8
0.195000	35.2	9.000	N	9.7	18.6	53.8
0.204000	35.3	9.000	N	9.7	18.1	53.4
0.258000	32.8	9.000	N	9.7	18.7	51.5
3.942500	28.5	9.000	N	10.1	17.5	46.0
4.037000	28.6	9.000	N	10.1	17.4	46.0
4.059500	28.2	9.000	N	10.1	17.8	46.0
4.104500	29.3	9.000	N	10.1	16.7	46.0
4.248500	29.3	9.000	N	10.1	16.7	46.0
4.424000	29.5	9.000	N	10.1	16.5	46.0
19.400000	24.0	9.000	N	10.8	26.0	50.0
19.953500	25.2	9.000	N	10.8	24.8	50.0
20.318000	29.7	9.000	N	10.8	20.3	50.0
20.871500	29.2	9.000	N	10.8	20.8	50.0
21.051500	29.0	9.000	N	10.9	21.0	50.0
23.130500	31.5	9.000	N	10.9	18.5	50.0



4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

-For Measurement Below 1 GHz

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak 6 dB Bandwidth: RBW 120 kHz, VBW 300 kHz
Operation Mode	: Data Communication mode
Temperature	: 23.7°C
Relative Humidity	: 48.1 %
Test Date	: June 16, 2014

Frequency (MHz)	Quasi Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
34.647776	31.6	100.0	V	0.0	14.8	8.4	40.0
47.774990	31.9	100.0	V	290.0	15.9	8.1	40.0
77.173307	35.3	236.0	H	269.0	12.4	4.7	40.0
108.819399	31.5	295.0	H	216.0	14.2	12.0	43.5
266.514309	32.4	100.0	H	301.0	16.7	13.6	46.0
624.989659	37.4	100.0	V	17.0	25.4	8.6	46.0

※ Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



-For Measurement Above 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz)
 CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Highest Operating Frequency : 2.45 GHz

Testing Frequency Range : 1 GHz – 13 GHz

※ This product was tested up to the 5th harmonic above frequency.

Operation Mode : Data Communication mode

Temperature : 23.7°C

Relative Humidity : 48.1 %

Test Date : June 16, 2014

Frequency (MHz)	Peak (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1332.615231	50.4	100.0	V	11.0	-10.1	23.6	74.0
1999.348697	52.8	113.0	V	42.0	-9.7	21.2	74.0
2106.262525	49.5	100.0	V	42.0	-9.2	24.5	74.0
2662.374749	48.5	100.0	V	351.0	-6.8	25.5	74.0

Frequency (MHz)	CAverage (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1332.615231	32.4	100.0	V	11.0	-10.1	21.6	54.0
1999.348697	35.9	113.0	V	42.0	-9.7	18.1	54.0
2106.262525	35.1	100.0	V	42.0	-9.2	18.9	54.0
2662.374749	32.0	100.0	V	351.0	-6.8	22.0	54.0

※ Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



5. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>CAL Date</u>
<u>Conducted Emission</u>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	01.24. 2014
<input checked="" type="checkbox"/> LISN	EMCO	3816/2SH	9706-1070	1 year	04.07. 2014
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	01.29. 2014
<input type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	07.03. 2013
<input type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	07.03. 2013
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.07. 2014
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	12.17. 2012
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060-2M	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.18.2014
<input type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9168	185	2 year	04.16. 2013
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-
-For measurement above 1 GHz					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.07. 2014
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060-2M	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/> Power Amplifier	CERNEX	CBLU1183540	21691	1 year	07.24. 2013
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBLU5183530	24348	1 year	06.11.2014
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	12.13. 2012
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.18.2014
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170124	2 year	10.30. 2013
<input type="checkbox"/> Power Amplifier	CERNEX	CBL18265035	22966	1 year	07.24. 2013
<input type="checkbox"/> Power Amplifier	CERNEX	CBL26405040	19660	1 year	04.04. 2014
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-



6. CONCLUSION

The data collected shows that the **EUT Type: CDMA/LTE Phone with Bluetooth, WIFI and NFC, FCC ID: ZNFUS990, Model: LG-US990** complies with §15.107 and §15.109 of the FCC rules.