



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 27 LTE

**Applicant Name:**  
LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
12/16 - 12/18/2013  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1312092370.ZNF

<b>FCC ID :</b>	<b>ZNFVK810</b>
<b>APPLICANT:</b>	<b>LG ELECTRONICS MOBILECOMM U.S.A</b>

**FCC Classification:** Licensed Non-Broadcast Station Transmitter (TNB)  
**FCC Rule Part(s):** §2; §27  
**EUT Type:** Portable Tablet  
**Model(s):** LG-VK810, VK810, LGVK810  
**Test Device Serial No.:** identical prototype [S/N: LTE B4, B17 (Conducted), LTE B4, B17 (Radiated)]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 13	782	9M01G7D	QPSK	0.038	15.81
LTE Band 13	782	8M97W7D	16QAM	0.032	14.99
LTE Band 4	1712.5 - 1752.5	4M52G7D	QPSK	0.333	25.23
LTE Band 4	1712.5 - 1752.5	4M52W7D	16QAM	0.262	24.19
LTE Band 4	1715 - 1750	9M00G7D	QPSK	0.367	25.65
LTE Band 4	1715 - 1750	8M98W7D	16QAM	0.290	24.62
LTE Band 4	1717.5 - 1747.5	13M4G7D	QPSK	0.361	25.57
LTE Band 4	1717.5 - 1747.5	13M5W7D	16QAM	0.285	24.55
LTE Band 4	1720 - 1745	18M0G7D	QPSK	0.300	24.77
LTE Band 4	1720 - 1745	18M0W7D	16QAM	0.238	23.76

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Raindy Ortanez  
President




<b>FCC ID:</b> ZNFVK810		<b>FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1312092370.ZNF	<b>Test Dates:</b> 12/16 - 12/18/2013	<b>EUT Type:</b> Portable Tablet		Page 1 of 58

# T A B L E O F C O N T E N T S

FCC PART 27 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION .....		4
1.1 SCOPE .....		4
1.2 TESTING FACILITY .....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION .....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....		5
2.4 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS .....		6
3.1 MEASUREMENT PROCEDURE .....		6
3.1 BLOCK C FREQUENCY RANGE .....		6
3.2 AWS - BASE FREQUENCY BLOCKS .....		6
3.3 AWS - MOBILE FREQUENCY BLOCKS .....		6
3.4 OCCUPIED BANDWIDTH .....		7
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		7
3.6 PEAK-AVERAGE RATIO .....		7
3.7 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....		8
3.8 FREQUENCY STABILITY / TEMPERATURE VARIATION .....		9
4.0 TEST EQUIPMENT CALIBRATION DATA .....		10
5.0 SAMPLE CALCULATIONS .....		11
6.0 TEST RESULTS.....		12
6.1 SUMMARY.....		12
6.2 EFFECTIVE RADIATED POWER (ERP).....		13
6.3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP) .....		14
6.4 BAND 13 RADIATED SPURIOUS EMISSIONS .....		15
BAND 13 RADIATED SPURIOUS EMISSIONS 1559 – 1610MHZ BAND.....		16
6.5 BAND 4 RADIATED SPURIOUS EMISSIONS .....		17
6.6 BAND 13 FREQUENCY STABILITY MEASUREMENTS.....		20
6.7 BAND 4 FREQUENCY STABILITY MEASUREMENTS.....		22
7.0 BAND 13 PLOTS OF EMISSIONS.....		24
8.0 BAND 4 PLOTS OF EMISSIONS.....		29
9.0 CONCLUSION.....		58

<b>FCC ID:</b> ZNFVK810	 <small>ENGINEERING LABORATORY, INC.</small>	<b>FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>LG</b>	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1312092370.ZNF	<b>Test Dates:</b> 12/16 - 12/18/2013	<b>EUT Type:</b> Portable Tablet	Page 2 of 58	



# MEASUREMENT REPORT

## FCC Part 27




### §2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A  
**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632, United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** §2; §27  
**BASE MODEL:** LG-VK810  
**FCC ID:** ZNFVK810  
**FCC CLASSIFICATION:** Licensed Non-Broadcast Station Transmitter (TNB)  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
 LTE B4, B17  
**Test Device Serial No.:** (Conducted), LTE  Production  Pre-Production  Engineering  
 B4, B17 (Radiated)  
**DATE(S) OF TEST:** 12/16 - 12/18/2013  
**TEST REPORT S/N:** 0Y1312092370.ZNF

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 3 of 58	

# 1.0 INTRODUCTION


## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

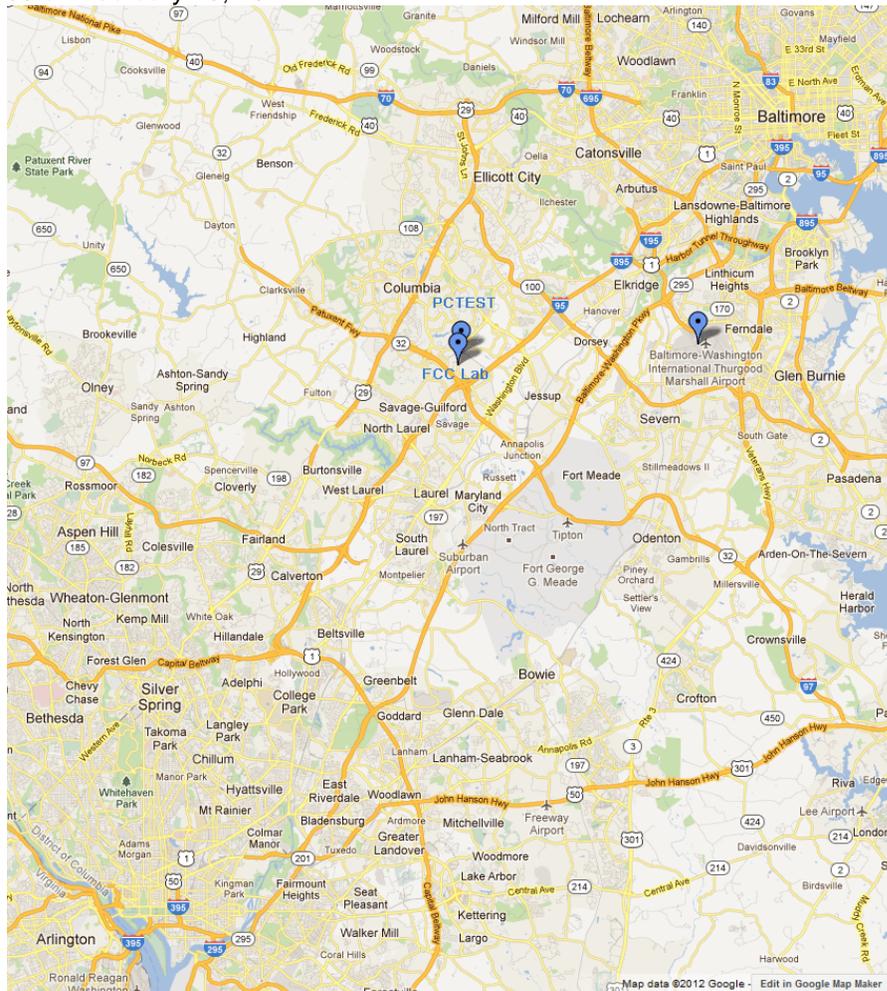

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 4 of 58	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Tablet FCC ID: ZNFVK810**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

### 2.2 Device Capabilities

This device contains the following capabilities:

Band 4 (5, 10, 15, 20 MHz BW), 13 (10MHz BW), LTE, 802.11a/b/g/n WLAN(DTS/UNII). Bluetooth(1x, EDR, LE)

### 2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

### 2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 5 of 58	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 v02r01) were used in the measurement of the **LG Portable Tablet FCC ID: ZNFVK810**.


### 3.1 Block C Frequency Range

§27.5(b)(3)

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.


### 3.2 AWS - Base Frequency Blocks

§27.5(h)

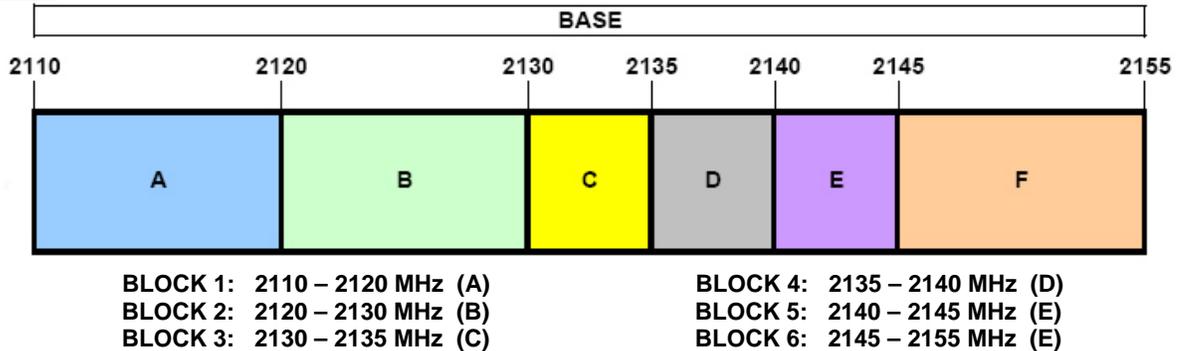

### 3.3 AWS - Mobile Frequency Blocks

§27.5(h)

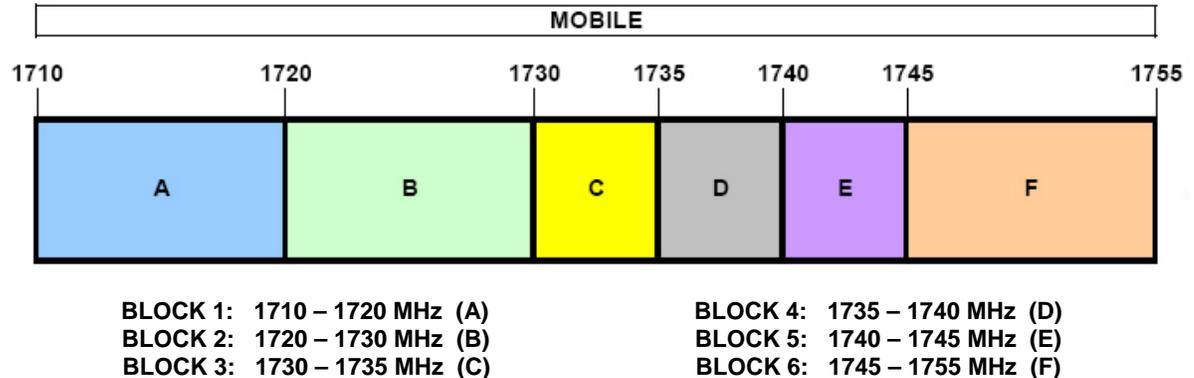

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 6 of 58	

### 3.4 Occupied Bandwidth

§2.1049 RSS-139(2.3)

#### Test Procedures Used

KDB 971168 v02r01 - Section 4.2

The implementation of this test is performed by the spectrum analyzer's occupied bandwidth function. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

### 3.5 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §27.53(f) §27.53(c.5) §27.53(h) RSS-139(6.5.1)

#### Test Procedures Used

KDB 971168 v02r01 - Section 6.0

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for 776-788 MHz band, or 1 MHz or greater for AWS band. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30kHz may be employed for 776-788MHz band. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed for AWS band. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### 3.6 Peak-Average Ratio

§27.50(d.5) RSS-139(6.4)

#### Test Procedures Used

KDB 971168 v02r01 - Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 7 of 58

### 3.7 Radiated Power and Radiated Spurious Emissions

§2.1053 §27.50(b.10) §27.50(d.4) §27.53(f) RSS-139(6.5.1)

#### Test Procedures Used

##### **Radiated Power (ERP/EIRP)**

KDB 971168 v02r01 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17

##### **Radiated Spurious Emissions Testing**

KDB 971168 v02r01 – Section 5.8

ANSI/TIA-603-C-2004 – Section 2.2.12

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾” (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 v02r01.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g [dBm] - \text{cable loss} [dB]$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power}_{[Watts]})$  specified in 22.917(a) and 24.238(a).

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 8 of 58	

### 3.8 Frequency Stability / Temperature Variation

§2.1055 §27.5(b) §27.5(h) §27.54 RSS-139(6.3)

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 27.*

#### Test Procedures Used

ANSI/TIA-603-C-2004

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: ZNFVK810	 <b>FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1312092370.ZNF	<b>Test Dates:</b> 12/16 - 12/18/2013	<b>EUT Type:</b> Portable Tablet	Page 9 of 58	

## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Agilent	E8267C	Vector Signal Generator	10/31/2013	Biennial	10/31/2015	US42340152
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Espec	ESX-2CA	Environmental Chamber	4/16/2013	Annual	4/16/2014	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/24/2013	Biennial	7/24/2015	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1200+	High Pass Filter	1/17/2013	Annual	1/17/2014	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/4/2013	Biennial	10/4/2015	103962
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/4/2013	Biennial	10/4/2015	102060
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/21/2013	Biennial	11/21/2015	9105-2404
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

**Table 4-1. Test Equipment**

FCC ID: ZNFVK810	 <b>FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 10 of 58	

## 5.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 D = Amplitude/Angle Modulated

#### 16QAM Modulation

**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz  
 W = Amplitude/Angle Modulated  
 7 = Quantized/Digital Info  
 D = Combination (Audio/Data)

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – ( $-24.80$ ).

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 11 of 58	

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFVK810  
 FCC Classification: Licensed Non-Broadcast Station Transmitter (TNB)  
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
<b>TRANSMITTER MODE (TX)</b>					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section, 7.0, 8.0
2.1051 27.53(f) 27.53(h)	Band Edge / Conducted Spurious Emissions	$> 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Section, 7.0, 8.0
27.50(d.5)	Peak-Average Ratio	$< 13$ dB		PASS	Section 8.0
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
27.50(b.10)	Effective Radiated Power (Band 13)	$< 3$ Watts max. ERP	RADIATED	PASS	Section 6.2
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	$< 1$ Watts max. EIRP		PASS	Section 6.3
2.1053 27.53(f) 27.53(h)	Undesirable Emissions	$> 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions		PASS	Section, 6.4, 6.5
2.1055. 27.5(b) 27.54	Frequency Stability	Fundamental emissions stay within authorized frequency block (Part 27)		PASS	Section, 6.6, 6.7

**Table 6-1. Summary of Test Results**

**Notes:**

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in Section 7.0 8.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 12 of 58	

## 6.2 Effective Radiated Power (ERP)

### §27.50(b.10)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
782.00	10	QPSK	Standard	1 / 0	12.05	3.76	V	15.81	0.038	-18.96
782.00	10	16QAM	Standard	1 / 0	11.14	3.85	V	14.99	0.032	-19.78

**Table 6-2. ERP Data (Band 13)**

#### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 13 of 58	

### 6.3 Equivalent Isotropic Radiated Power (EIRP)

#### §27.50(d.4) RSS-139(6.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1 / 24	15.05	9.89	V	24.94	0.312	-5.06
1732.50	5	QPSK	Standard	1 / 0	15.38	9.85	V	25.23	0.333	-4.77
1752.50	5	QPSK	Standard	1 / 24	15.03	9.80	V	24.83	0.304	-5.17
1712.50	5	16-QAM	Standard	1 / 24	14.30	9.89	V	24.19	0.262	-5.81
1732.50	5	16-QAM	Standard	1 / 0	14.22	9.85	V	24.07	0.255	-5.93
1752.50	5	16-QAM	Standard	1 / 24	13.85	9.80	V	23.65	0.232	-6.35
1715.00	10	QPSK	Standard	1 / 49	15.64	9.89	V	25.53	0.357	-4.47
1732.50	10	QPSK	Standard	1 / 0	15.80	9.85	V	25.65	0.367	-4.35
1750.00	10	QPSK	Standard	1 / 0	15.37	9.80	V	25.17	0.329	-4.83
1715.00	10	16-QAM	Standard	1 / 49	14.33	9.89	V	24.22	0.264	-5.78
1732.50	10	16-QAM	Standard	1 / 0	14.77	9.85	V	24.62	0.290	-5.38
1750.00	10	16-QAM	Standard	1 / 0	14.29	9.80	V	24.09	0.257	-5.91
1717.50	15	QPSK	Standard	1 / 74	15.68	9.89	V	25.57	0.361	-4.43
1732.50	15	QPSK	Standard	1 / 0	15.72	9.85	V	25.57	0.360	-4.43
1747.50	15	QPSK	Standard	1 / 0	15.09	9.80	V	24.89	0.309	-5.11
1717.50	15	16-QAM	Standard	1 / 74	14.53	9.89	V	24.42	0.277	-5.58
1732.50	15	16-QAM	Standard	1 / 0	14.70	9.85	V	24.55	0.285	-5.45
1747.50	15	16-QAM	Standard	1 / 0	14.01	9.80	V	23.81	0.241	-6.19
1720.00	20	QPSK	Standard	1 / 0	14.43	9.89	V	24.32	0.270	-5.68
1732.50	20	QPSK	Standard	1 / 99	14.92	9.85	V	24.77	0.300	-5.23
1745.00	20	QPSK	Standard	1 / 0	14.36	9.80	V	24.16	0.261	-5.84
1720.00	20	16-QAM	Standard	1 / 0	13.37	9.89	V	23.26	0.212	-6.74
1732.50	20	16-QAM	Standard	1 / 99	13.91	9.85	V	23.76	0.238	-6.24
1745.00	20	16-QAM	Standard	1 / 0	13.23	9.80	V	23.03	0.201	-6.97

**Table 6-3. EIRP Data (Band 4)**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810	 <b>FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>			Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 14 of 58	

## 6.4 Band 13 Radiated Spurious Emissions §2.1053 §27.53(f)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 782.00 MHz  
 MEASURED OUTPUT POWER: 15.81 dBm = 0.038 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  28.81 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
2346.00	-43.51	3.63	-39.88	H	55.69
3128.00	-40.50	5.11	-35.39	H	51.20
3910.00	-45.45	6.38	-39.07	H	54.88
4692.00	-48.05	7.34	-40.72	H	56.53
5474.00	-78.07	8.31	-69.75	H	85.56

**Table 6-4. Radiated Spurious Data**

#### NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 15 of 58	

**Band 13 Radiated Spurious Emissions 1559 – 1610MHz Band**  
**§2.1053 §27.53(f)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 782.00 MHz  
 MEASURED OUTPUT POWER: 15.81 dBm = 0.038 W  
 MODULATION SIGNAL: QPSK  
 DISTANCE: 3 meters  
 NARROWBAND EMISSION LIMIT: -50 dBm  
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

FREQUENCY (MHz)	EMISSION TYPE	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	MARGIN (dB)
1564.00	WIDEBAND	-49.59	5.86	-43.73	H	-3.73

**Table 6-5. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 16 of 58

## 6.5 Band 4 Radiated Spurious Emissions

### §2.1053 §27.53(h) RSS-139(6.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1715.00 MHz  
 MEASURED OUTPUT POWER: 25.53 dBm = 0.357 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  38.53 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3430.00	-35.19	8.11	-27.08	H	52.61
5145.00	-49.52	10.13	-39.40	H	64.93
6860.00	-54.07	11.31	-42.76	H	68.29
8575.00	-50.49	12.98	-37.51	H	63.05
10290.00	-52.73	13.22	-39.51	H	65.04
12005.00	-36.47	13.01	-23.46	H	48.99

**Table 6-6. Radiated Spurious Data**

#### **NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 17 of 58	

**Band 4 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(h) RSS-139(6.5.1)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1732.50 MHz  
 MEASURED OUTPUT POWER: 25.65 dBm = 0.367 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  38.65 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-34.98	8.23	-26.75	H	52.39
5197.50	-47.36	10.18	-37.18	H	62.82
6930.00	-52.14	11.41	-40.73	H	66.37
8662.50	-80.69	13.00	-67.69	H	93.34
10395.00	-51.37	13.15	-38.23	H	63.87
12127.50	-38.26	13.00	-25.27	H	50.91

**Table 6-7. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 18 of 58	

**Band 4 Radiated Spurious Measurements (continued)**  
**§2.1053 §27.53(h) RSS-139(6.5.1)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1750.00 MHz  
 MEASURED OUTPUT POWER: 25.17 dBm = 0.329 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  38.17 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3500.00	-38.25	8.32	-29.93	H	55.11
5250.00	-47.70	10.20	-37.50	H	62.68
7000.00	-53.07	11.48	-41.60	H	66.77
8750.00	-51.16	12.97	-38.20	H	63.37
10500.00	-77.31	13.04	-64.27	H	89.44
12250.00	-37.38	13.03	-24.35	H	49.52

**Table 6-8. Radiated Spurious Data**

**NOTES:**

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 19 of 58	

## 6.6 Band 13 Frequency Stability Measurements

§2.1055 §22.355 §27.5(b) §27.54

OPERATING FREQUENCY: 782,000,000 Hz  
 CHANNEL: 23230  
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	781,999,983	-17	-0.0000022
100 %		- 30	781,999,989	-11	-0.0000014
100 %		- 20	781,999,991	-9	-0.0000011
100 %		- 10	781,999,998	-2	-0.0000002
100 %		0	781,999,984	-16	-0.0000020
100 %		+ 10	781,999,999	-1	-0.0000001
100 %		+ 20	781,999,983	-17	-0.0000022
100 %		+ 30	781,999,999	-1	-0.0000001
100 %		+ 40	781,999,992	-8	-0.0000010
100 %		+ 50	781,999,991	-9	-0.0000011
115 %	4.37	+ 20	781,999,980	-20	-0.0000025
BATT. ENDPOINT	3.40	+ 20	781,999,980	-20	-0.0000025

**Table 6-9. Frequency Stability Data (Band 13)**


**Note:**

It is determined that the channel at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 20 of 58	

**Band 13 Frequency Stability Measurements (Cont'd)**

§2.1055 §22.355 §27.5(b) §27.54

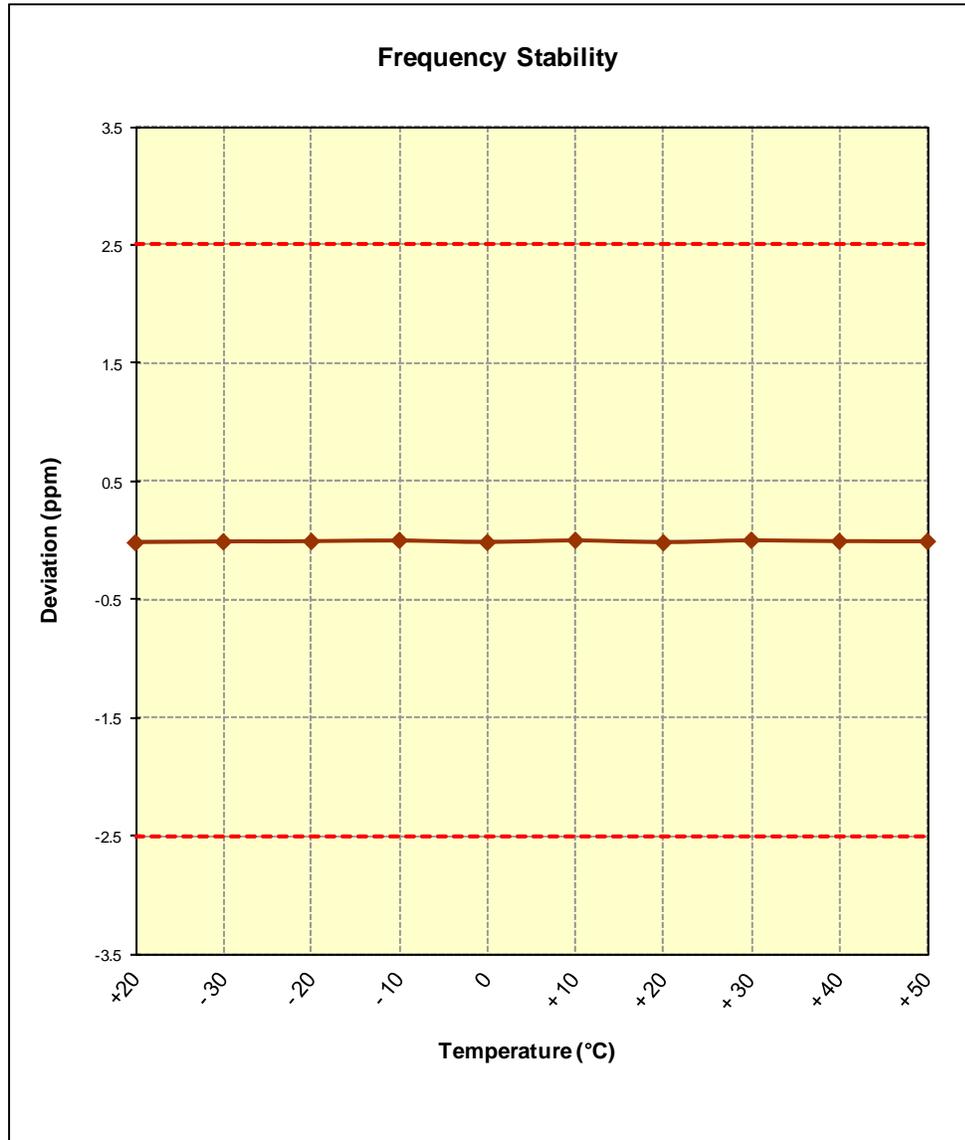

**Figure 6-1. Frequency Stability Graph (Band 13)**

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 21 of 58

## 6.7 Band 4 Frequency Stability Measurements

§2.1055 §27.54 RSS-139(6.3)

OPERATING FREQUENCY: 1,732,500,000 Hz  
 CHANNEL: 20175  
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,993	-7	-0.0000004
100 %		- 30	1,732,499,988	-12	-0.0000007
100 %		- 20	1,732,499,994	-6	-0.0000003
100 %		- 10	1,732,499,995	-5	-0.0000003
100 %		0	1,732,499,994	-6	-0.0000004
100 %		+ 10	1,732,499,982	-18	-0.0000010
100 %		+ 20	1,732,499,994	-6	-0.0000004
100 %		+ 30	1,732,499,991	-9	-0.0000005
100 %		+ 40	1,732,499,981	-19	-0.0000011
100 %		+ 50	1,732,499,994	-6	-0.0000004
115 %	4.37	+ 20	1,732,499,981	-19	-0.0000011
BATT. ENDPOINT	3.40	+ 20	1,732,499,986	-14	-0.0000008


Table 6-10. Frequency Stability Data (Band 4)

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet	Page 22 of 58	

**Band 4 Frequency Stability Measurements (Cont'd)**  
**§2.1055 §§27.54 RSS-139(6.3)**

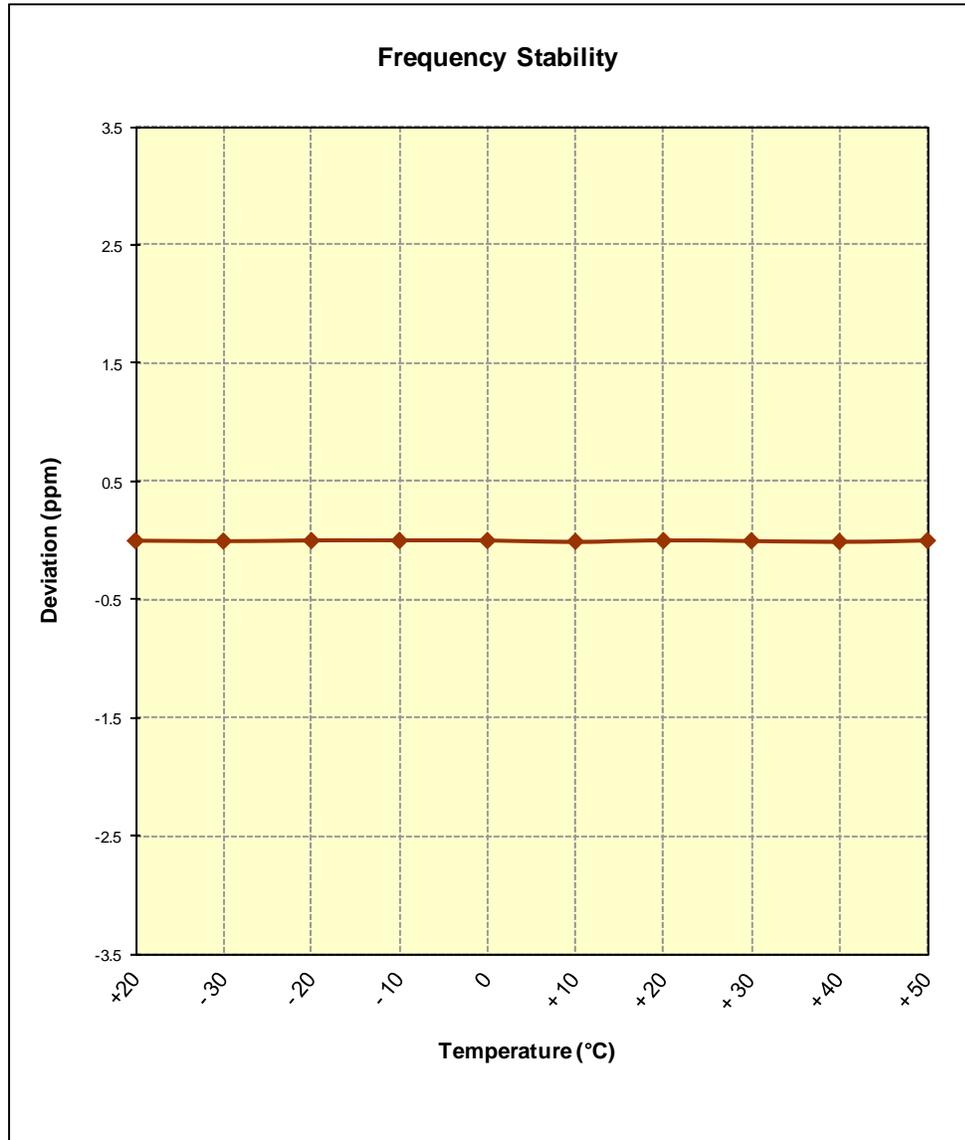


**Figure 6-2. Frequency Stability Graph (Band 4)**

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 23 of 58

## 7.0 BAND 13 PLOTS OF EMISSIONS


**Note:** All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

For all plots in Section 7.0 showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit is  $65 + 10\log_{10}(P_{\text{Watts}}) = -35\text{dBm}$  in a 6.25kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25kHz with the available equipment, a bandwidth of 10kHz was used instead to show compliance. By using a 10kHz bandwidth, the limit was adjusted by  $10\log_{10}(10\text{kHz}/6.25\text{kHz}) = 2.04\text{dB}$ . Thus, the limit shown in all plots in the 763 – 775MHz and 793 – 805MHz bands for all available modulation types was  $-35\text{dBm} + 2.04\text{dB} = -32.96\text{dBm}$ .

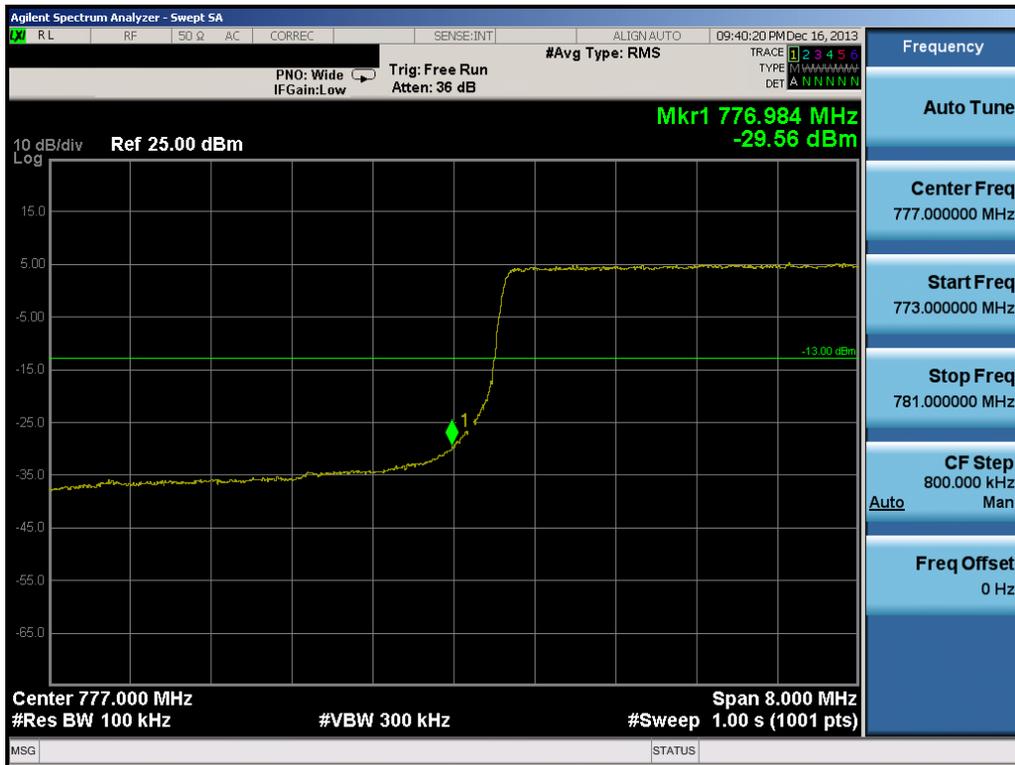


**Plot 7-1. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)**

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 24 of 58

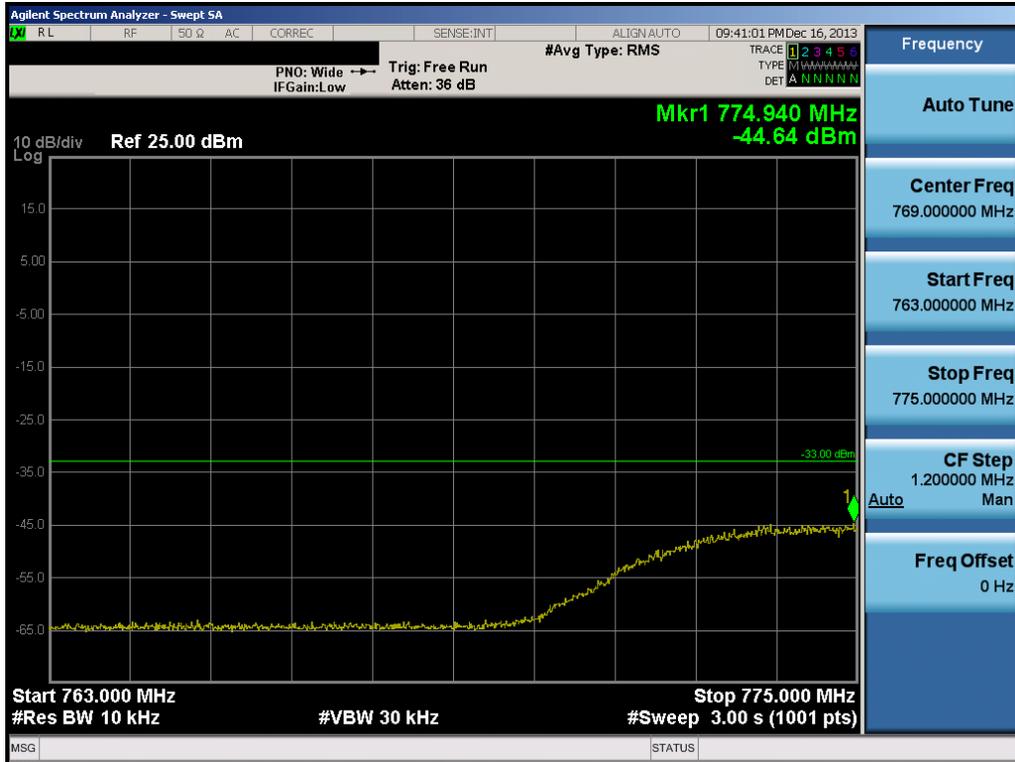

**Plot 7-2. Lower Emission Mask Plot (10.0MHz QPSK – RB Size 50)**

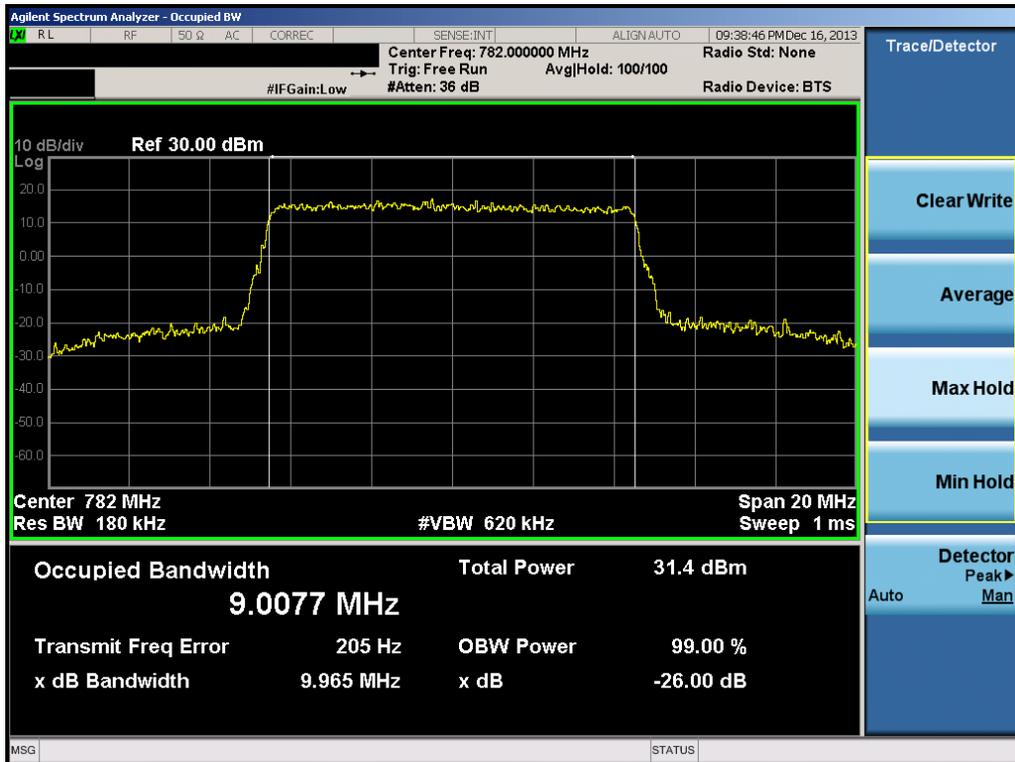


**Plot 7-3. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)**

FCC ID: ZNFVK810	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 25 of 58




Plot 7-4. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

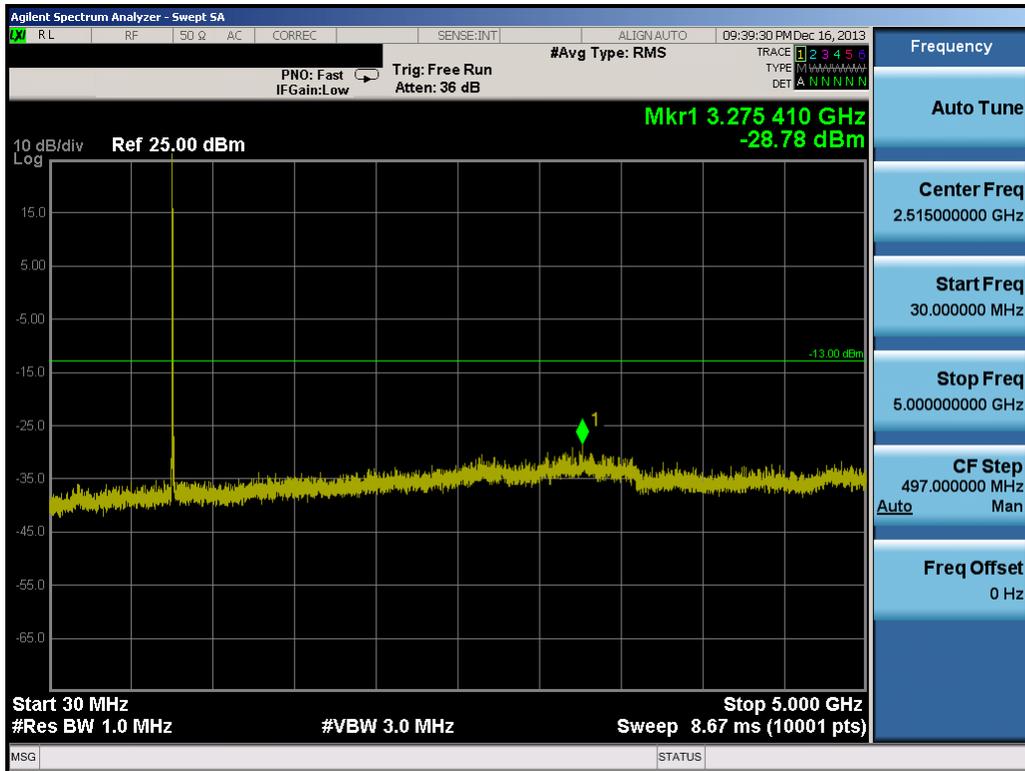

Plot 7-5. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 26 of 58

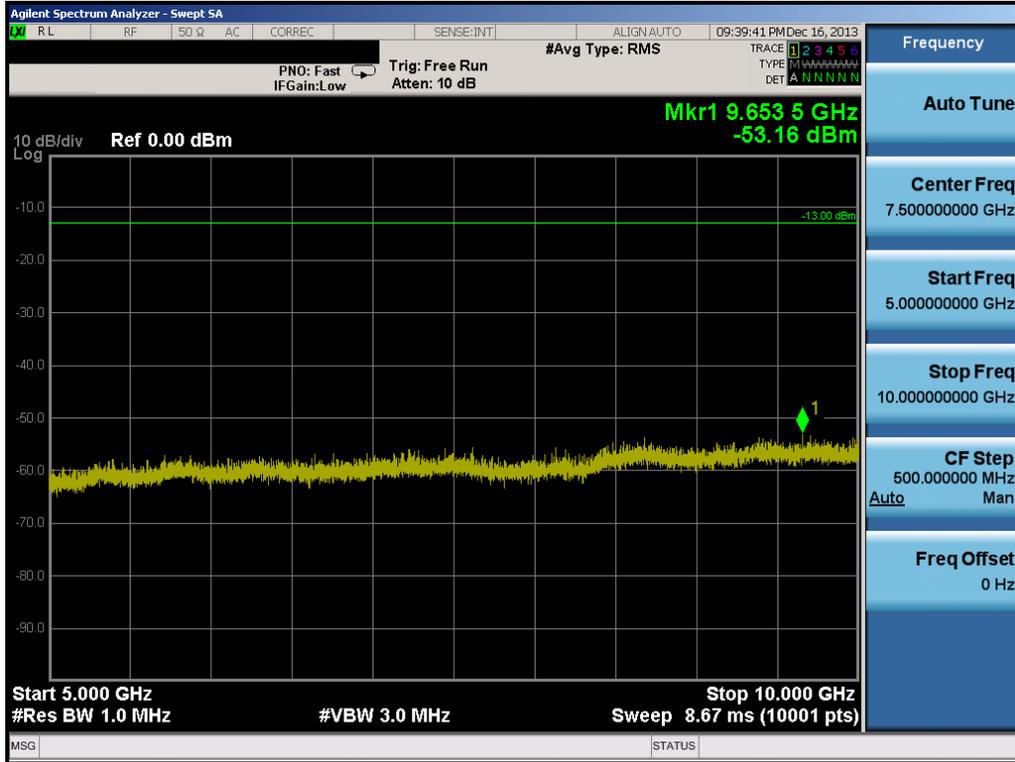

Plot 7-6. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0)



Plot 7-7. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 27 of 58




Plot 7-8. Upper Emission Mask Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 28 of 58


## 8.0 BAND 4 PLOTS OF EMISSIONS

**Note:** All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

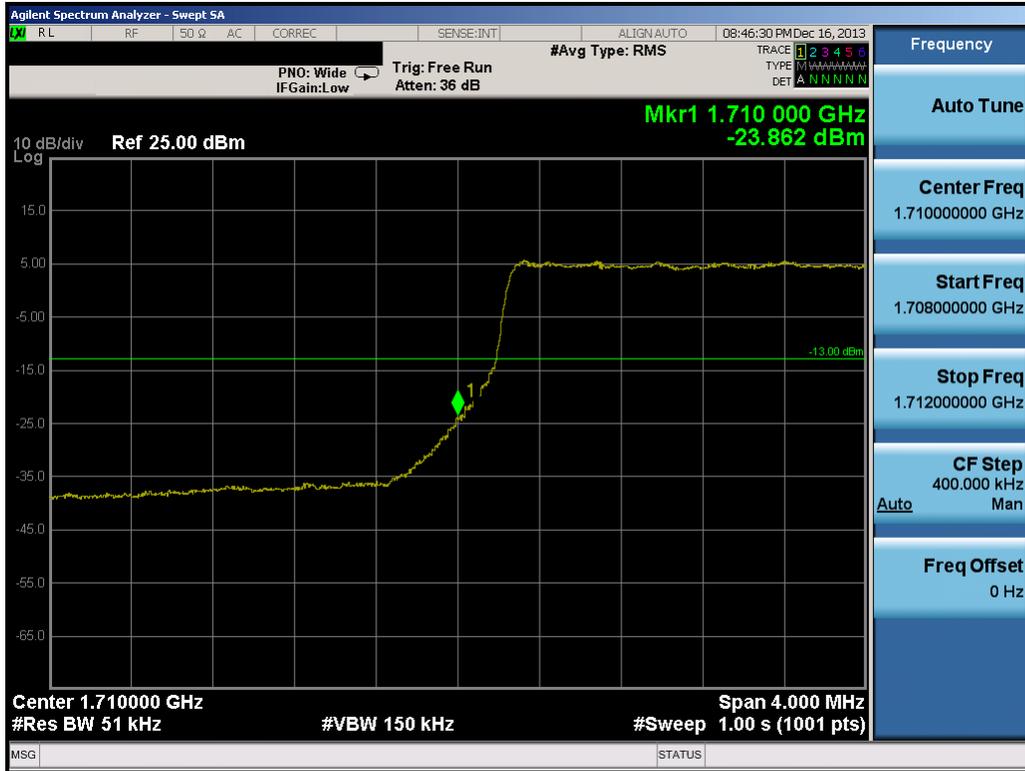


**Plot 8-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)**

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 29 of 58

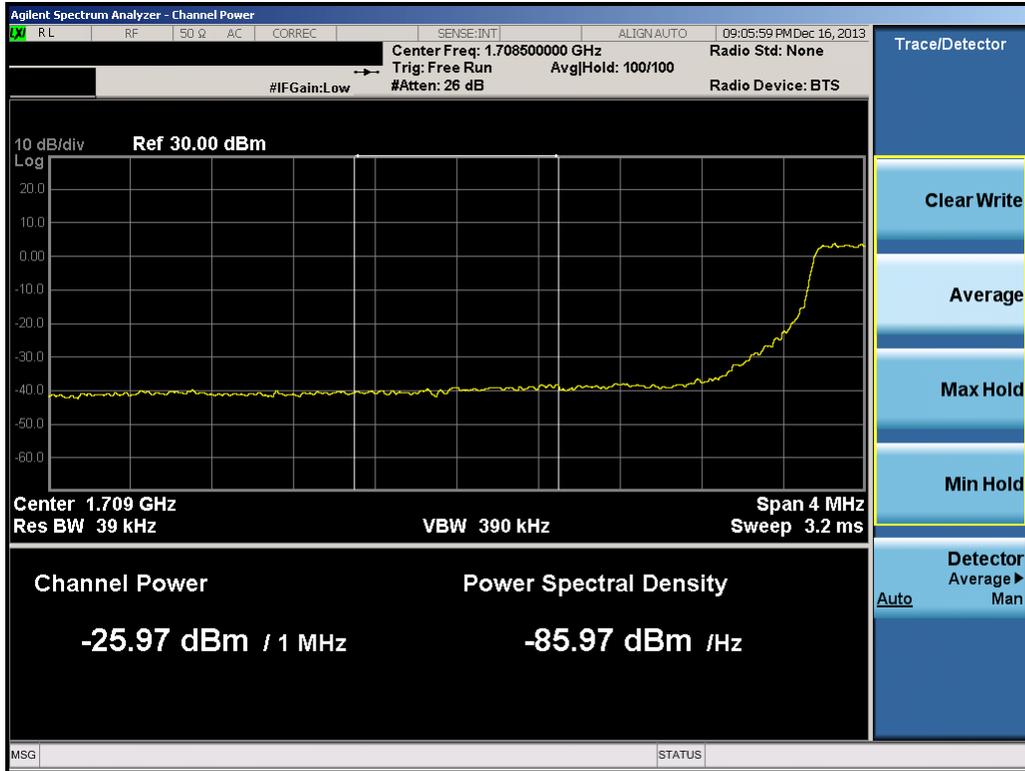


Plot 8-2. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

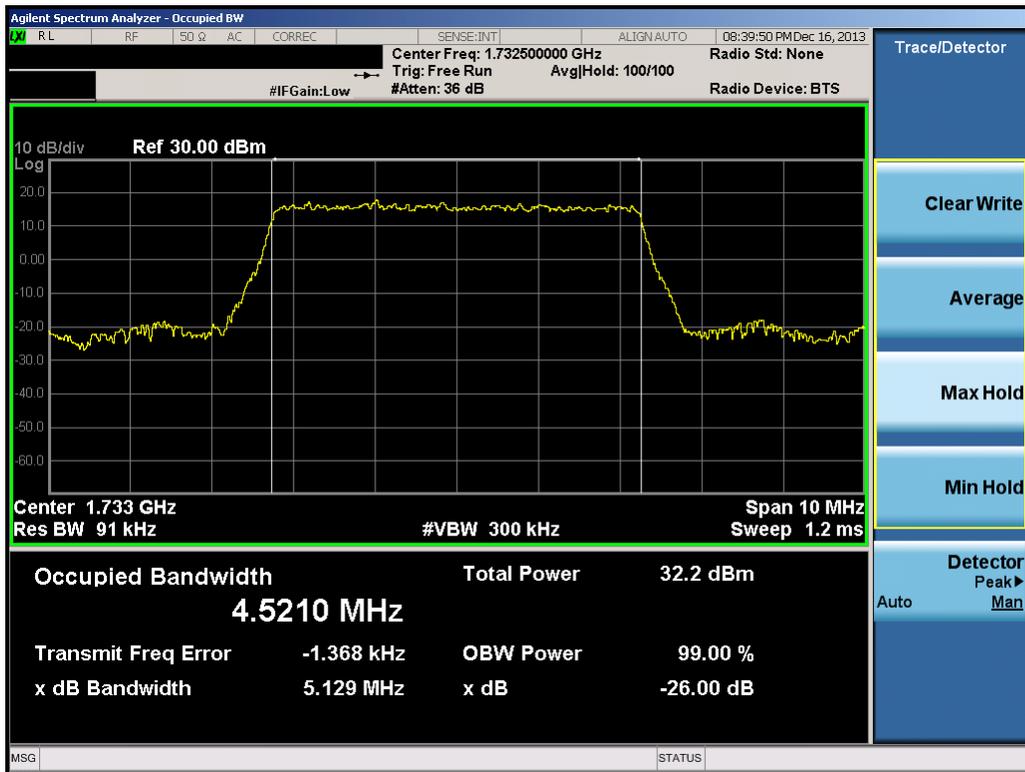


Plot 8-3. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 30 of 58

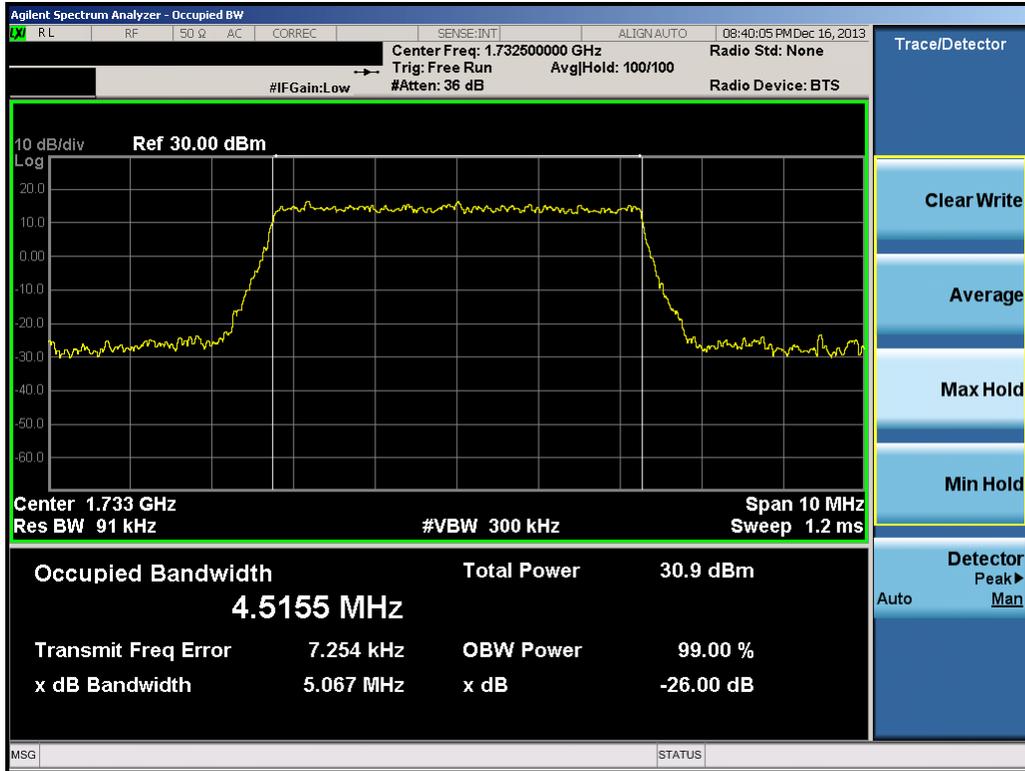


Plot 8-4. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

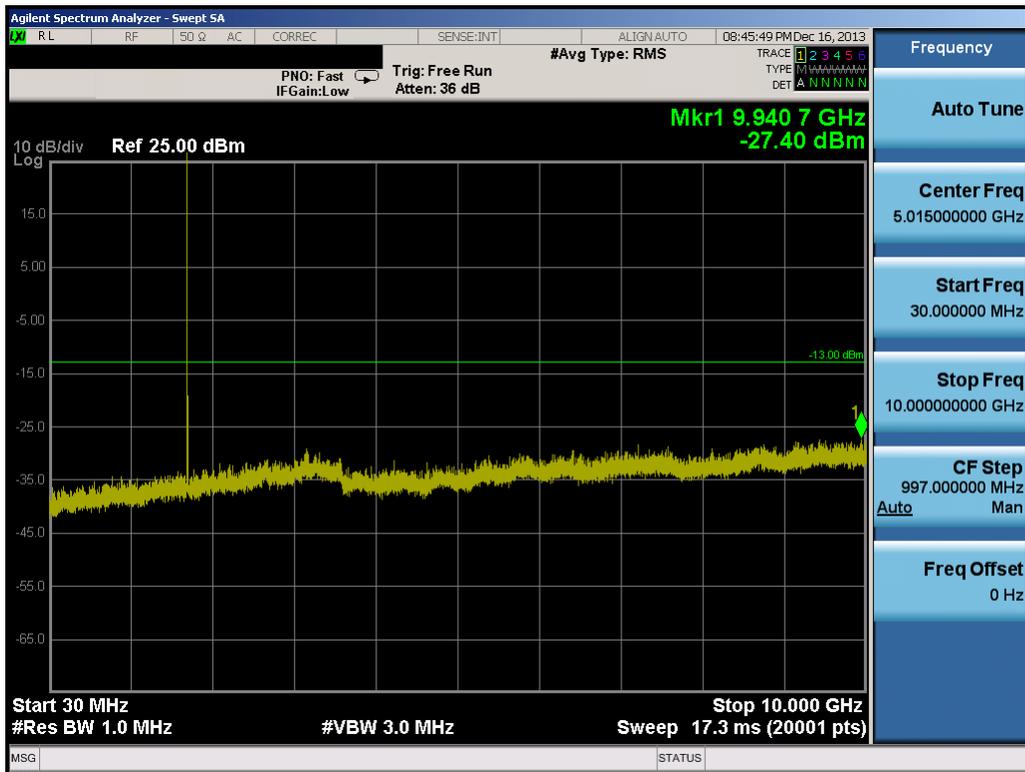


Plot 8-5. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 31 of 58

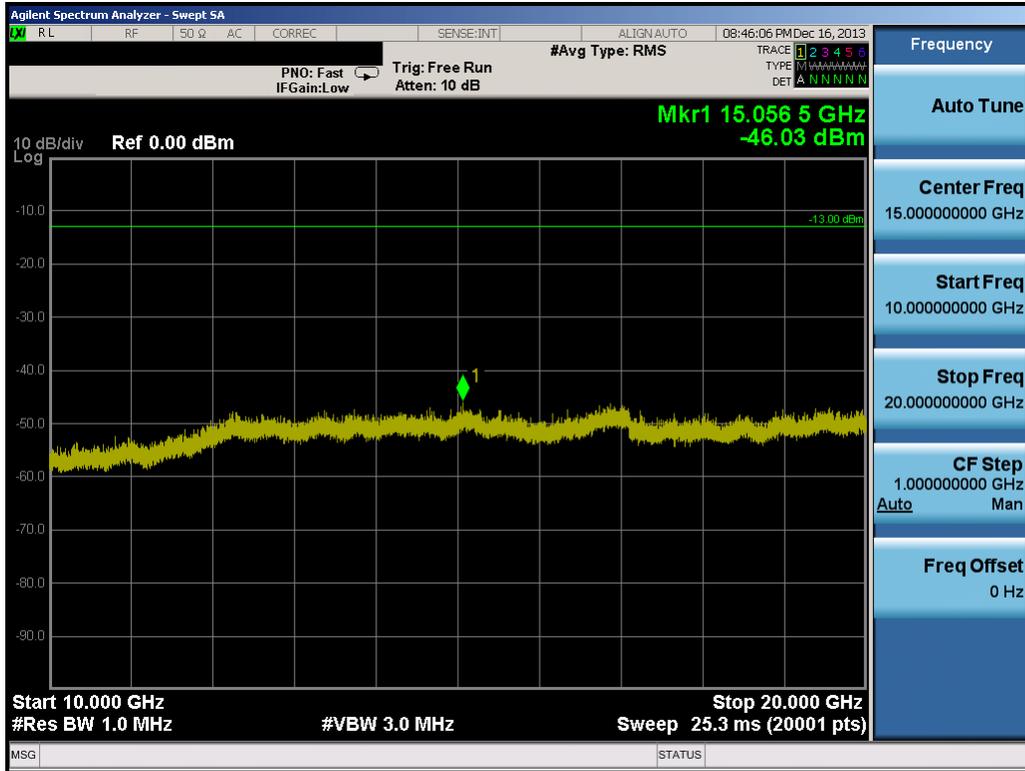


Plot 8-6. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

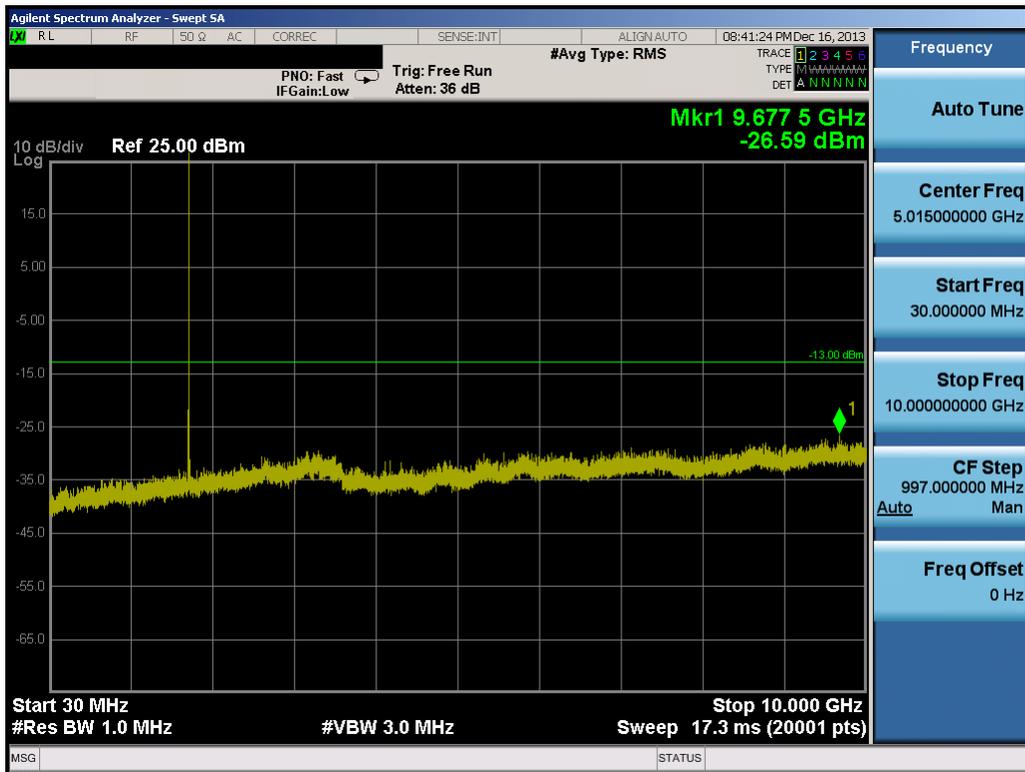


Plot 8-7. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFVK810	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 32 of 58

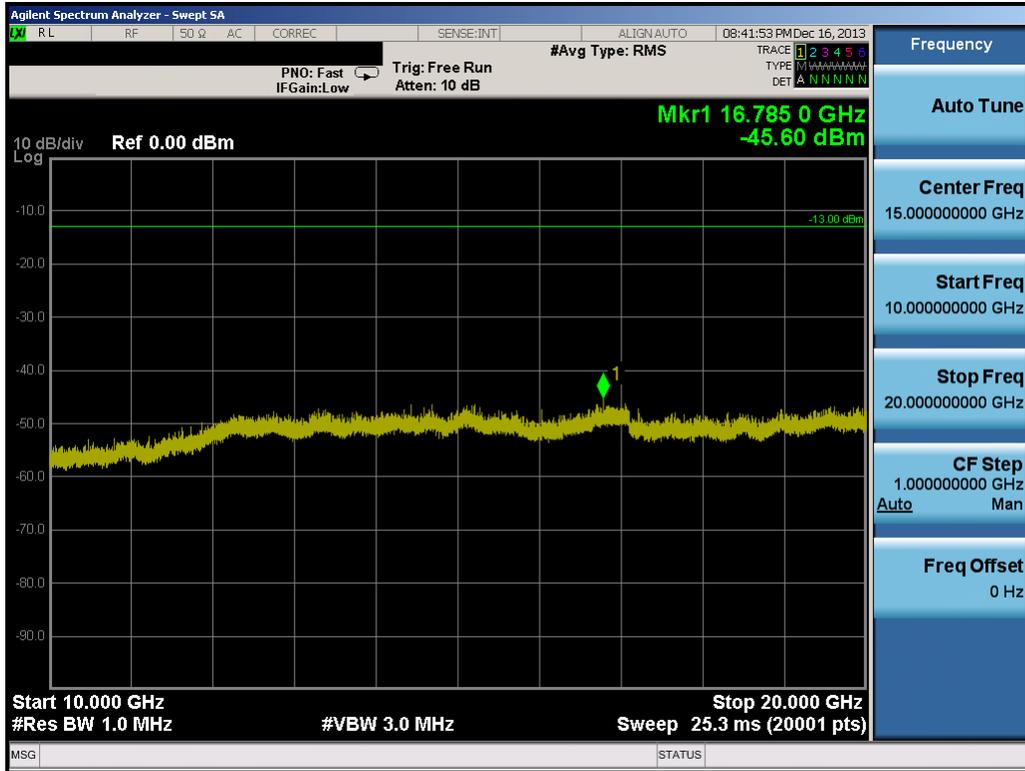


Plot 8-8. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

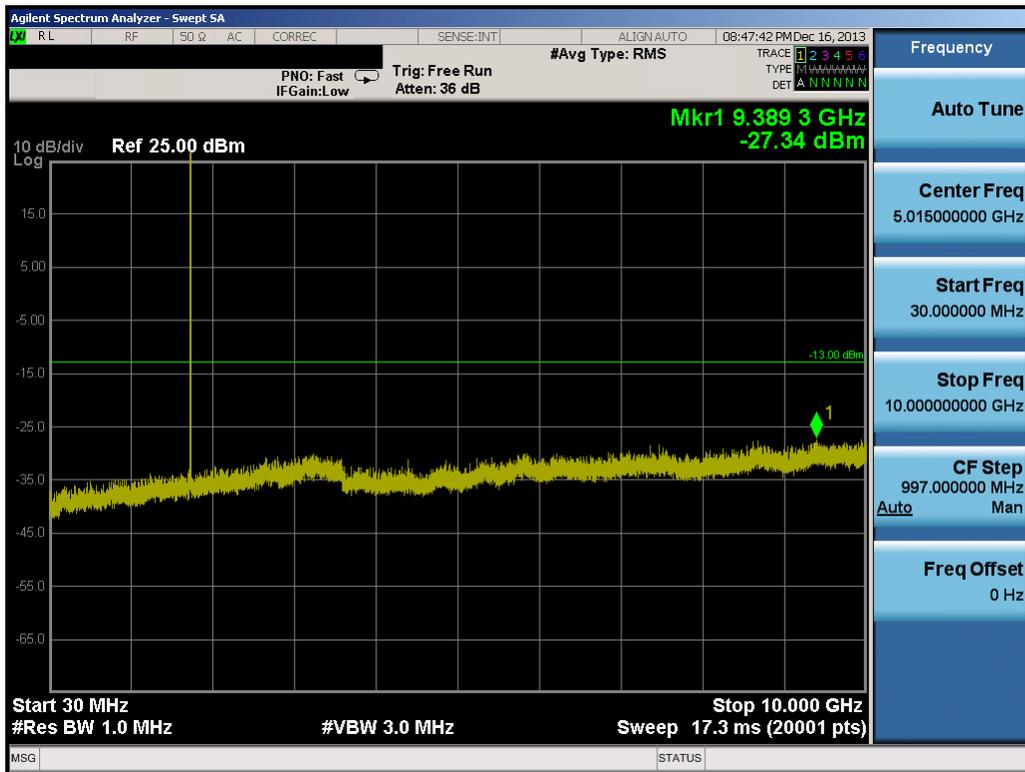


Plot 8-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 33 of 58

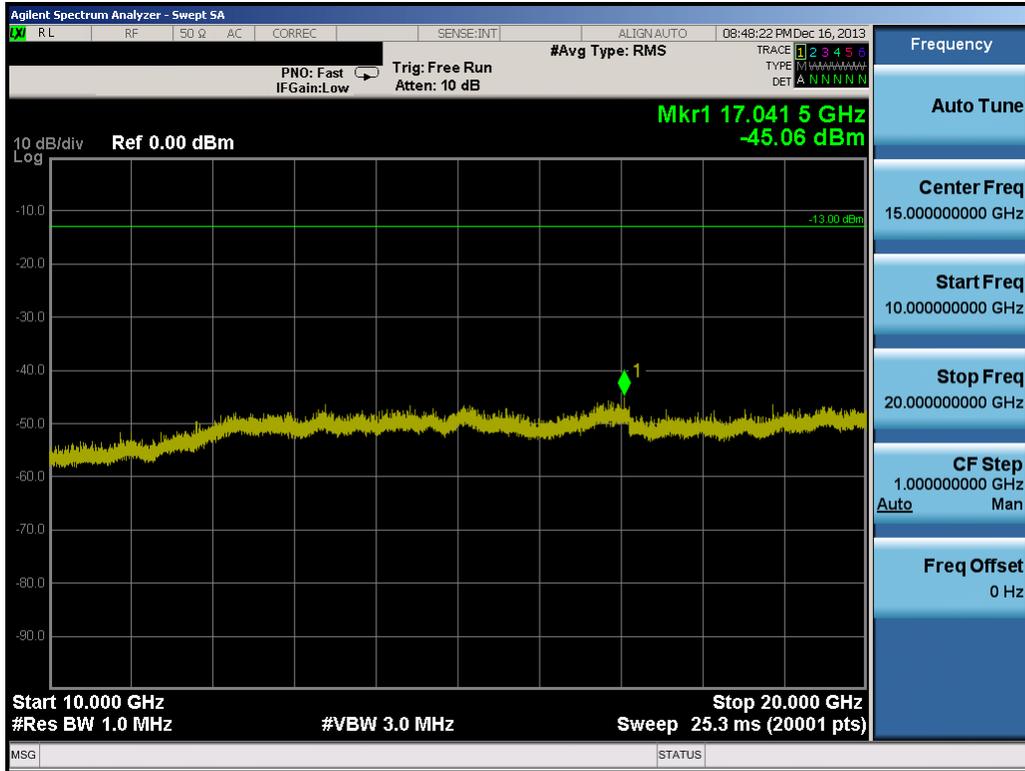


Plot 8-10. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

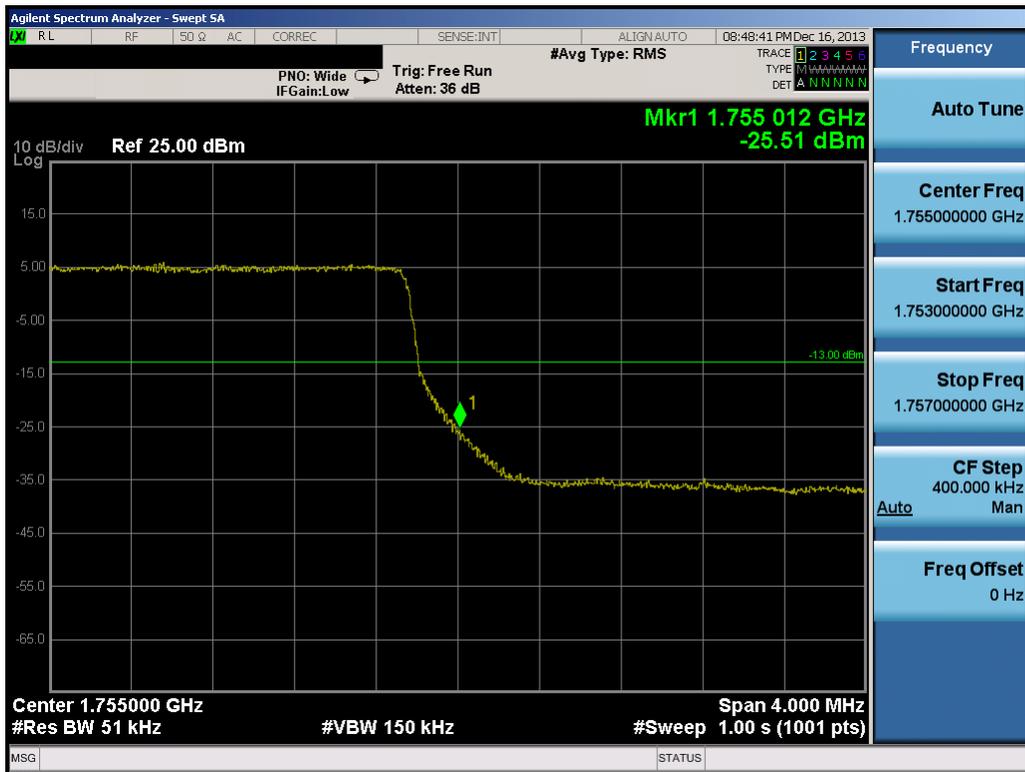


Plot 8-11. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 34 of 58

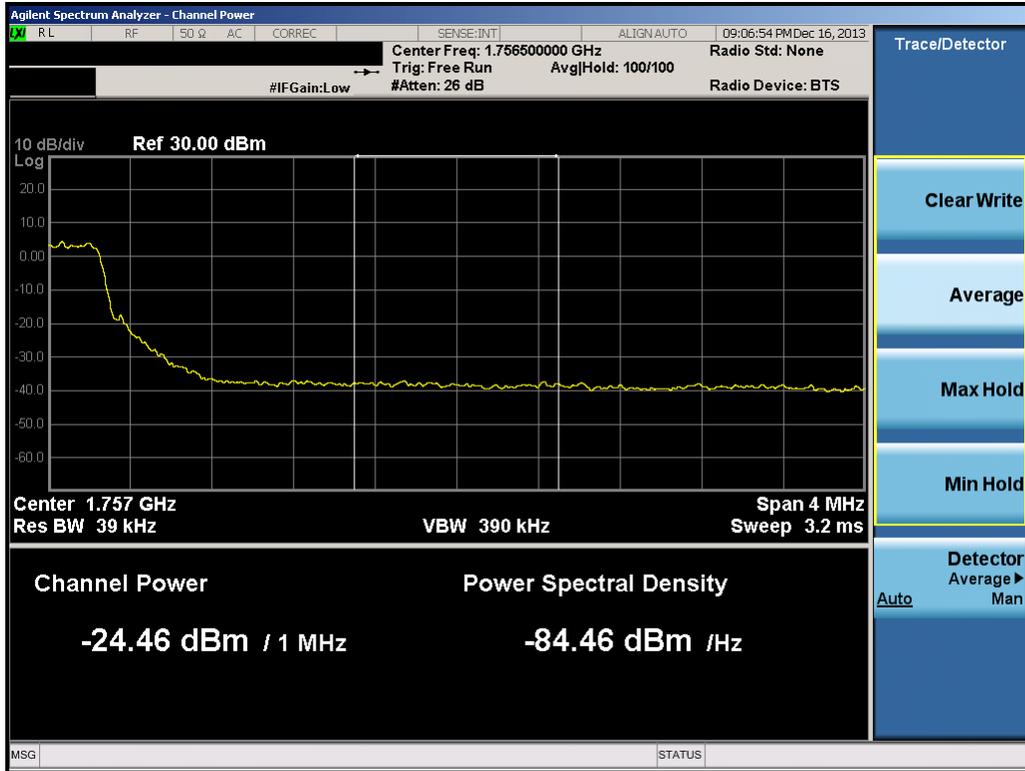


Plot 8-12. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

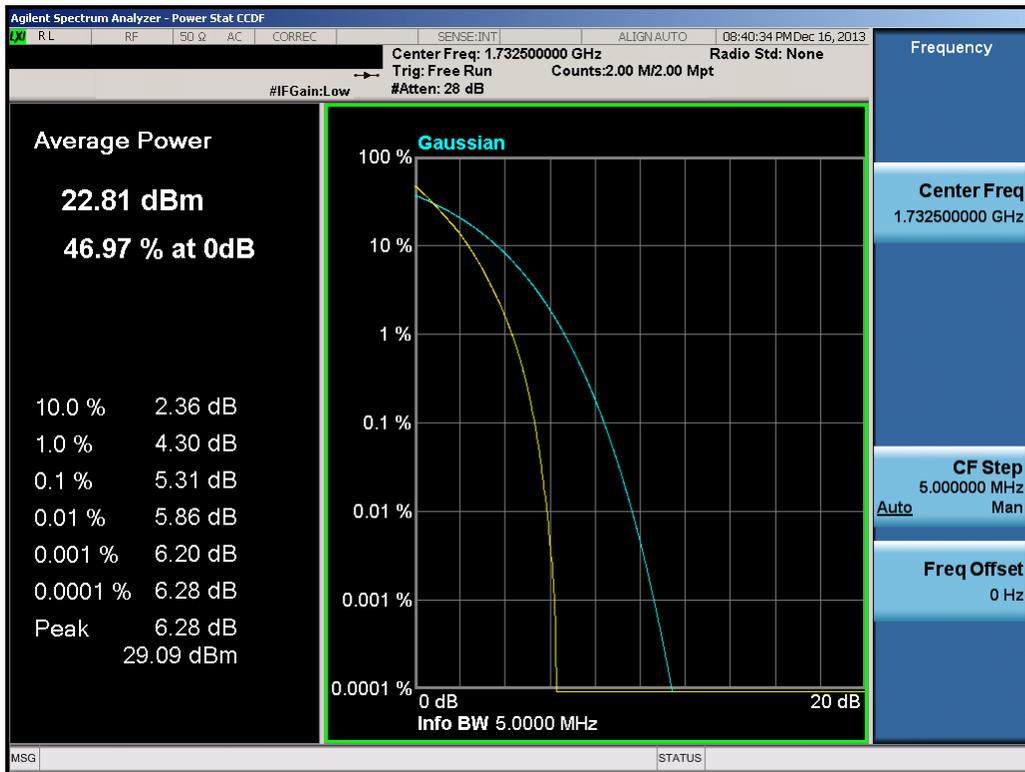


Plot 8-13. PAR Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 35 of 58

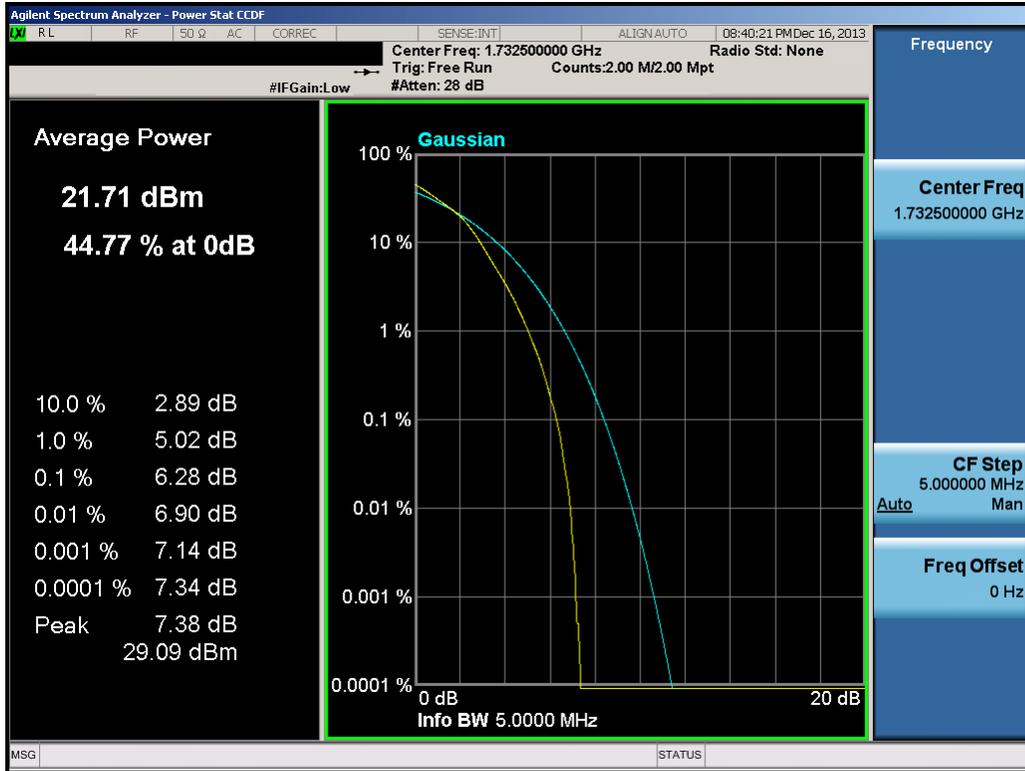

Plot 8-14. PAR Plot (5.0MHz 16-QAM – RB Size 25)

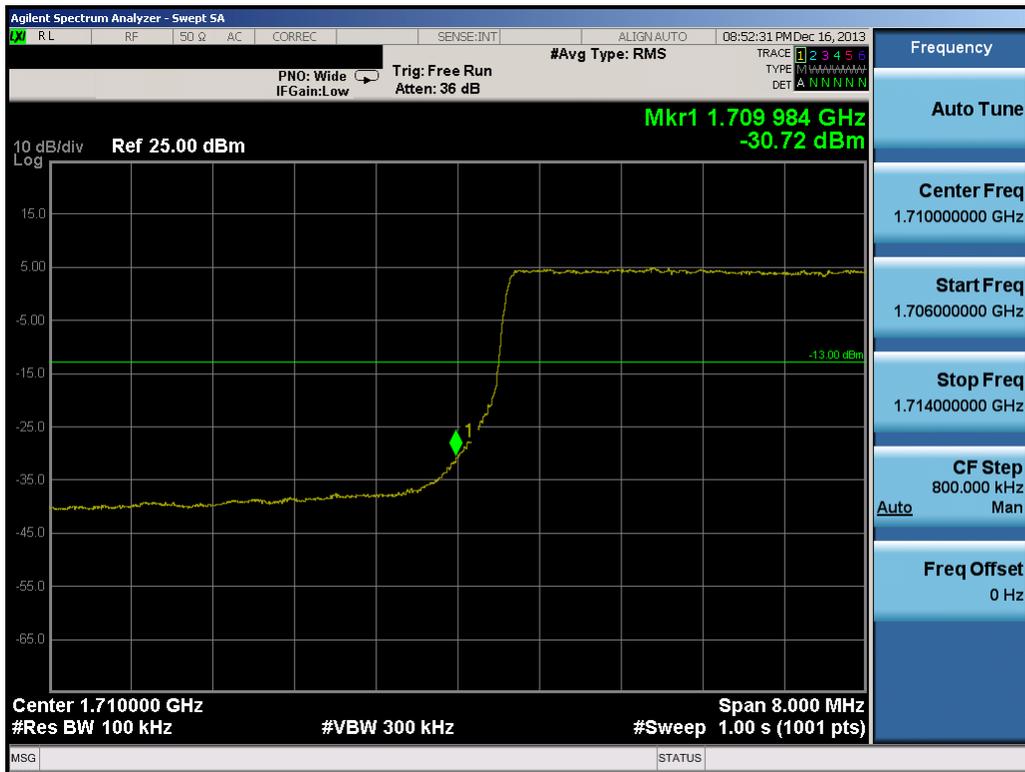

Plot 8-15. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 36 of 58



Plot 8-16. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)




Plot 8-17. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 37 of 58




Plot 8-18. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

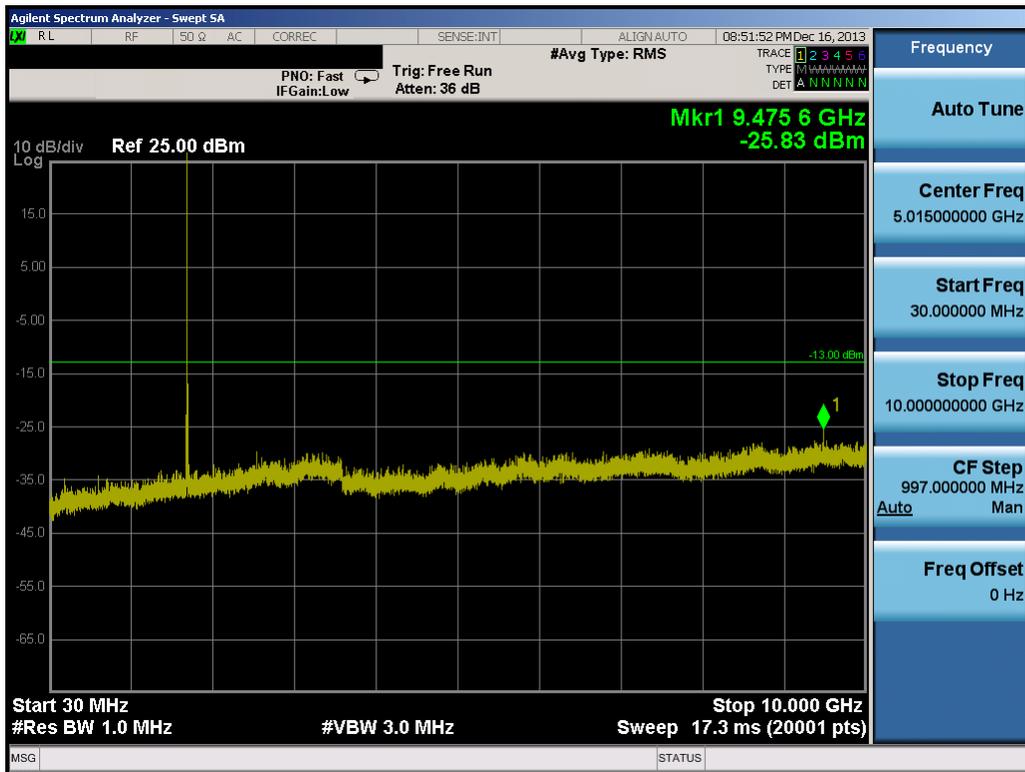


Plot 8-19. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 38 of 58

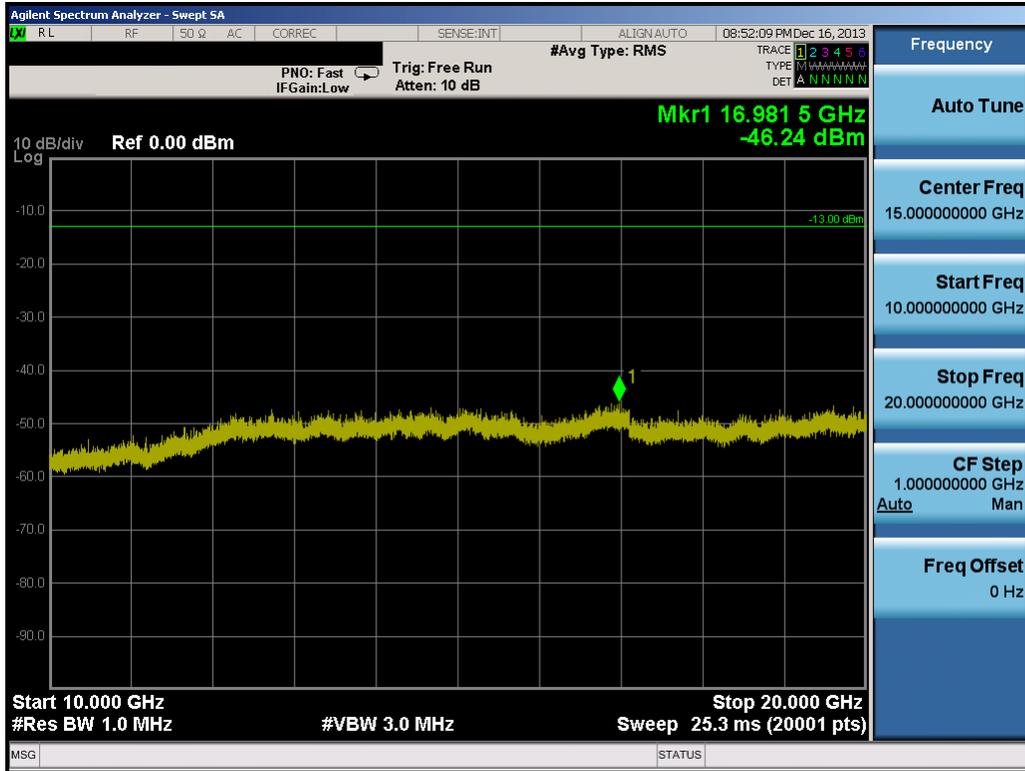


Plot 8-20. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

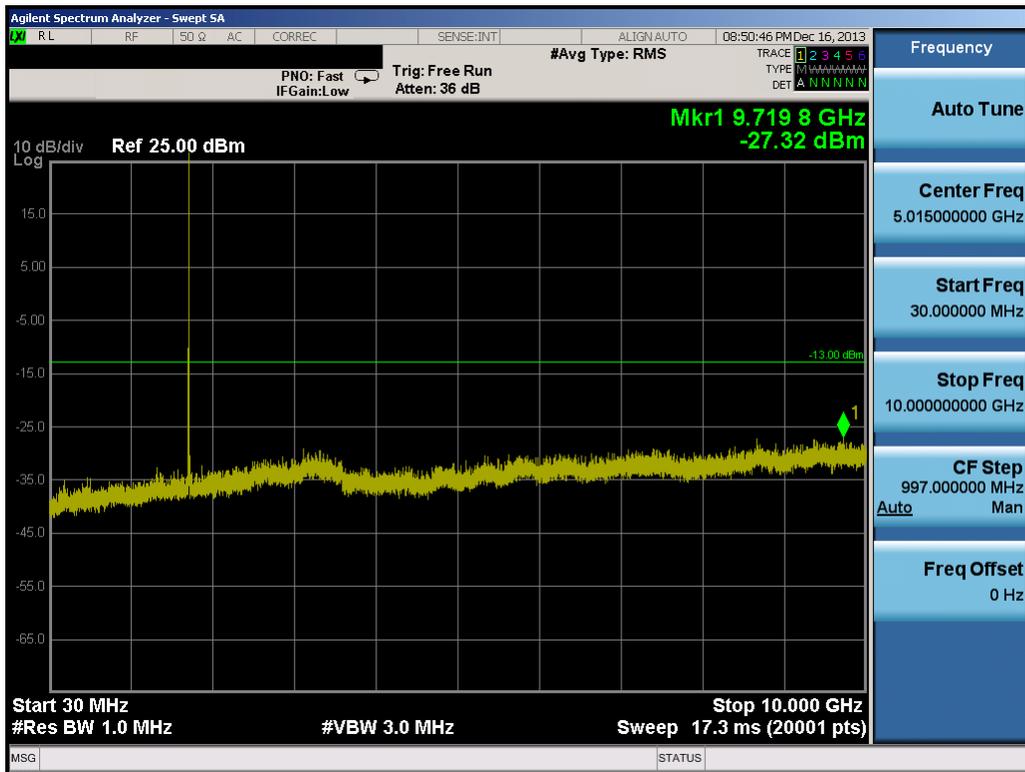


Plot 8-21. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 39 of 58

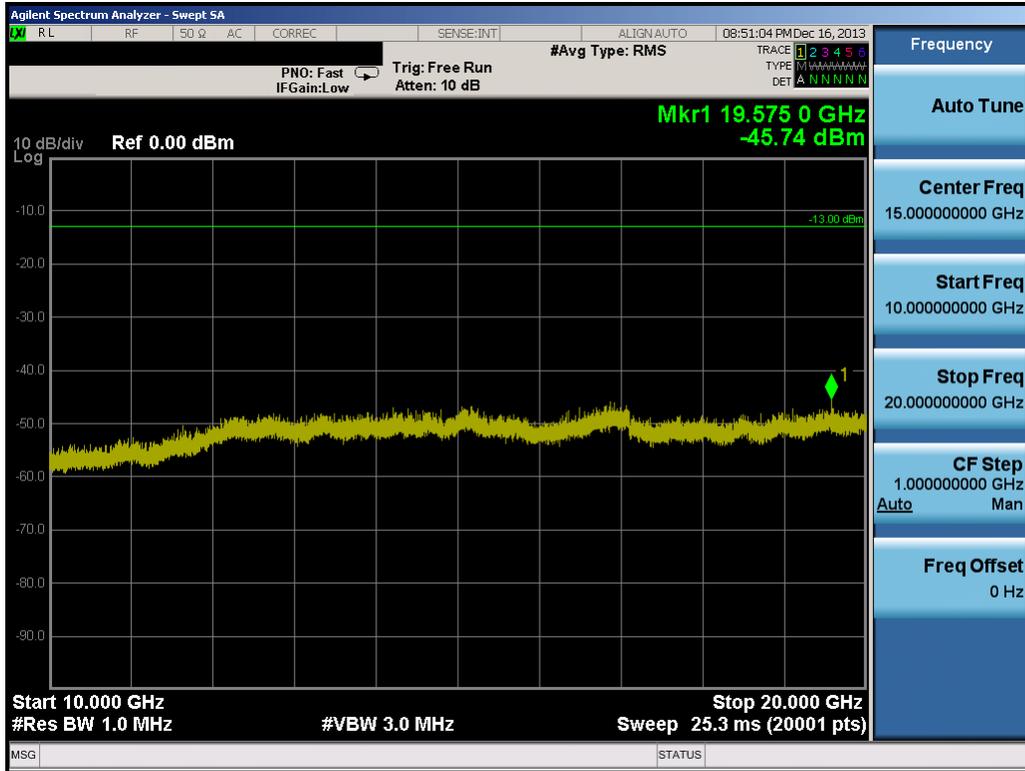

Plot 8-22. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

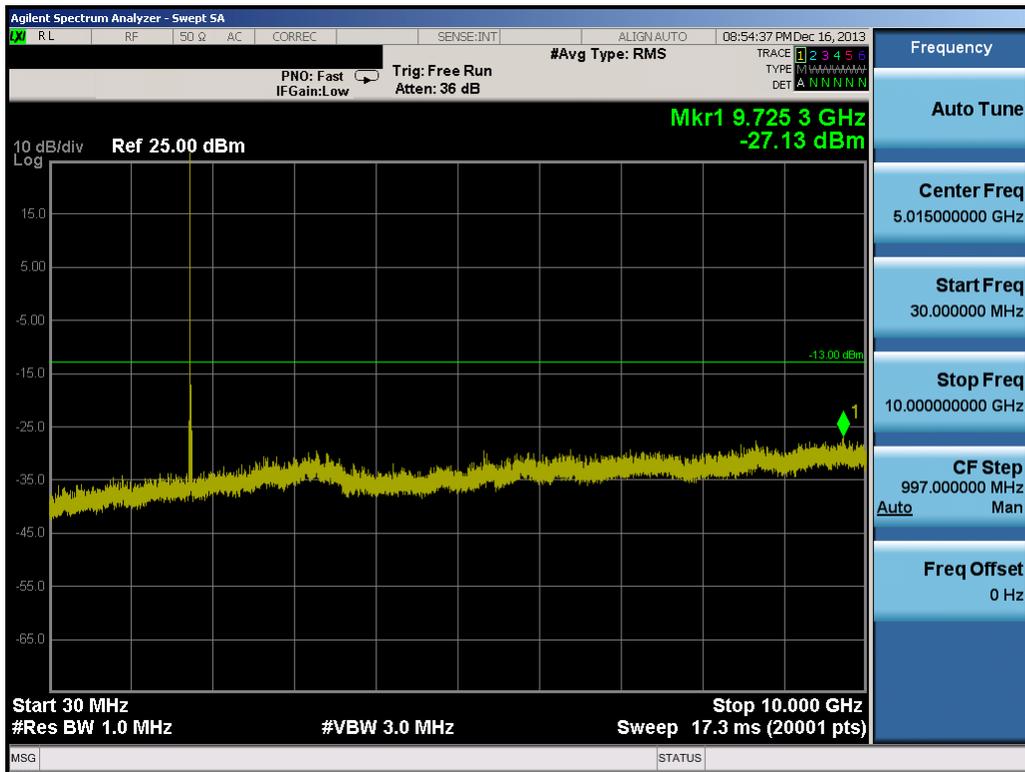


Plot 8-23. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 40 of 58






Plot 8-26. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

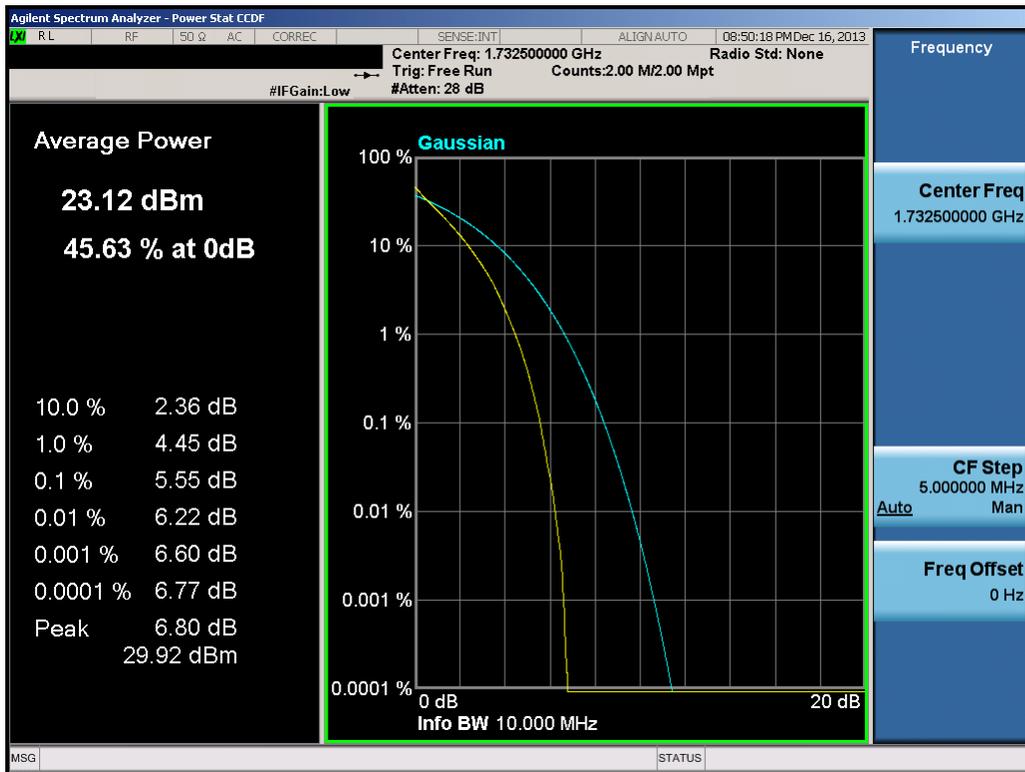


Plot 8-27. PAR Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 42 of 58

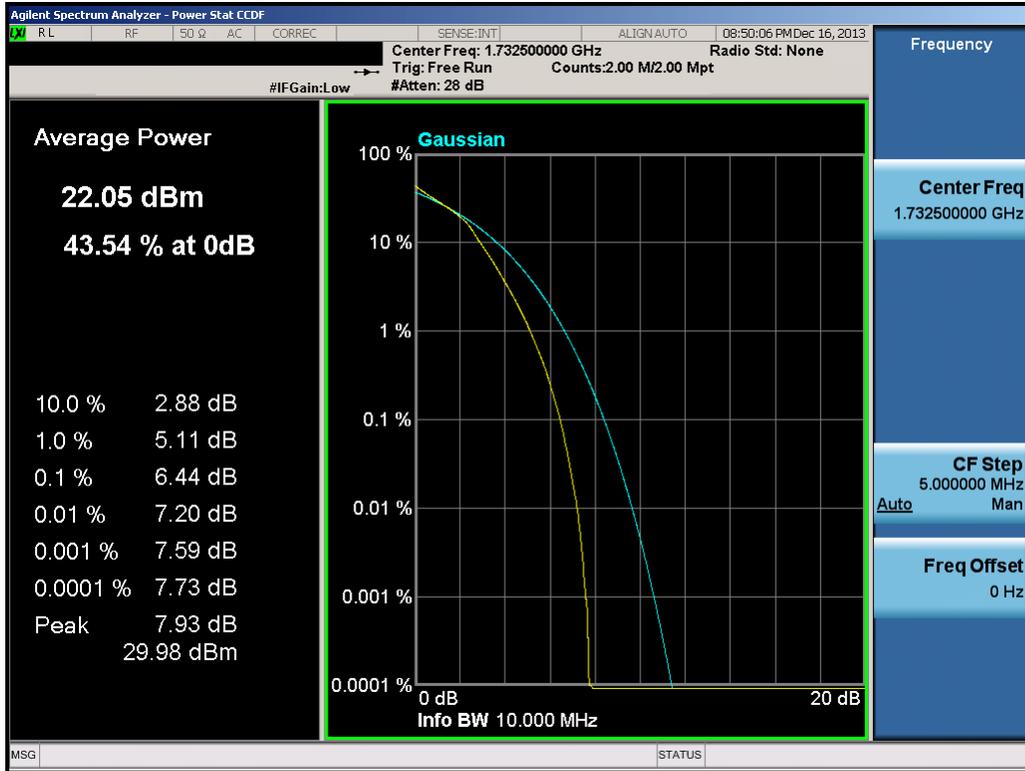

Plot 8-28. PAR Plot (10.0MHz 16-QAM – RB Size 50)

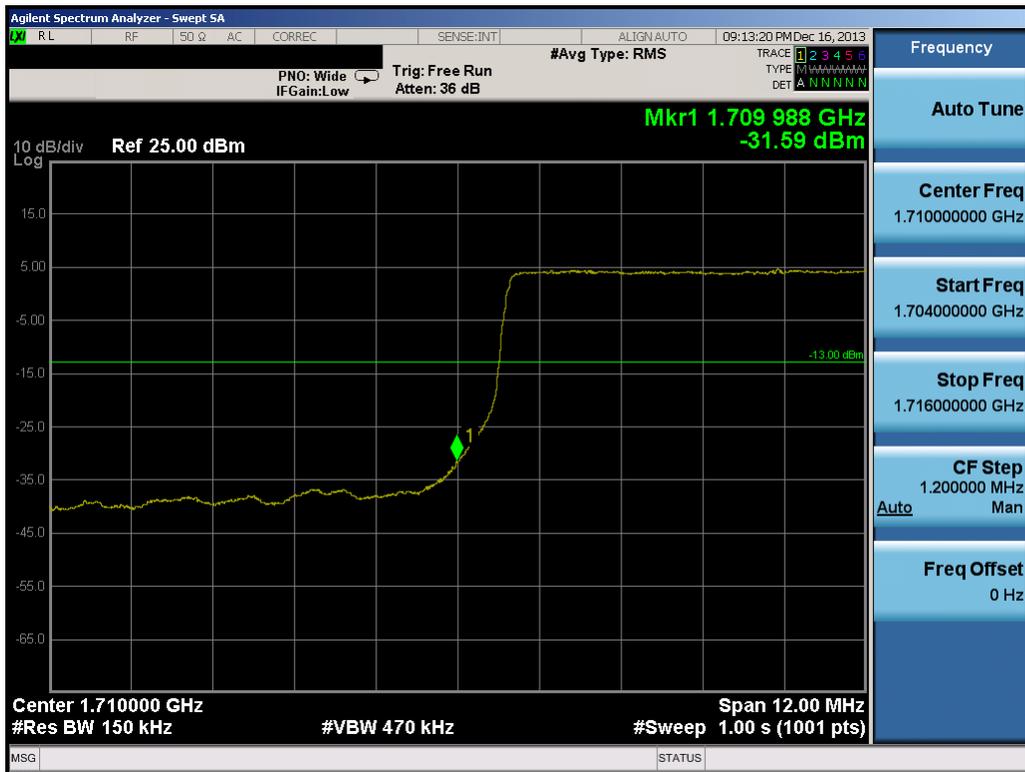


Plot 8-29. Lower Band Edge Plot (15.0MHz QPSK – RB Size 75)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 43 of 58




Plot 8-30. Lower Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)

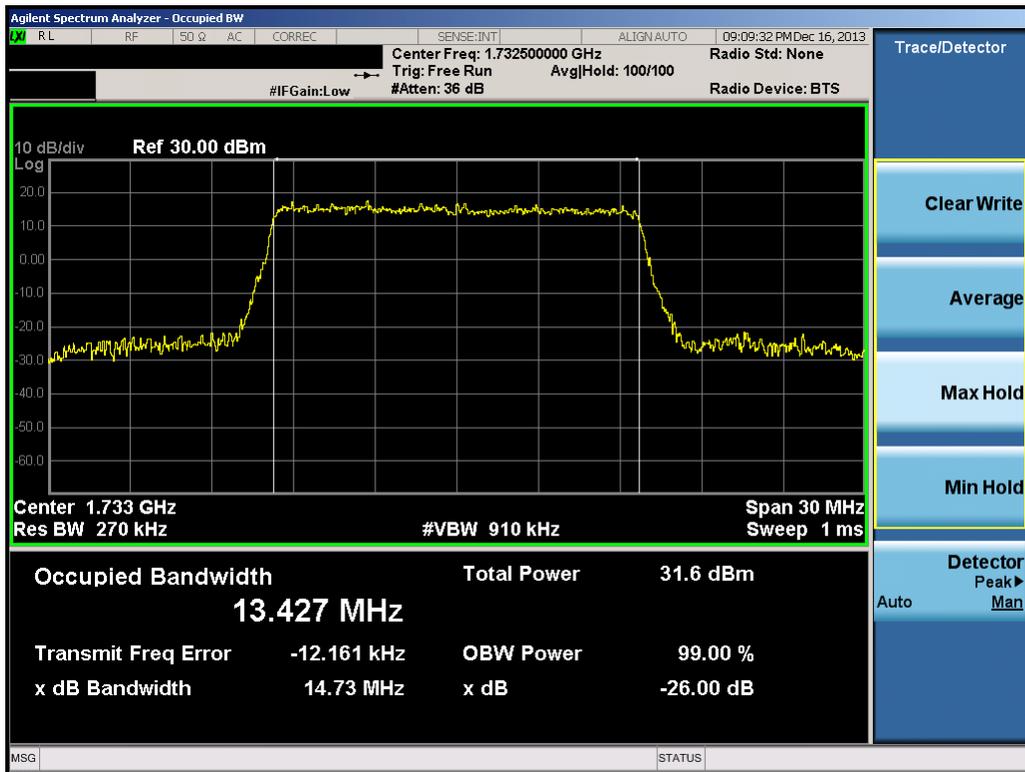


Plot 8-31. Occupied Bandwidth Plot (15.0MHz QPSK – RB Size 75)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 44 of 58

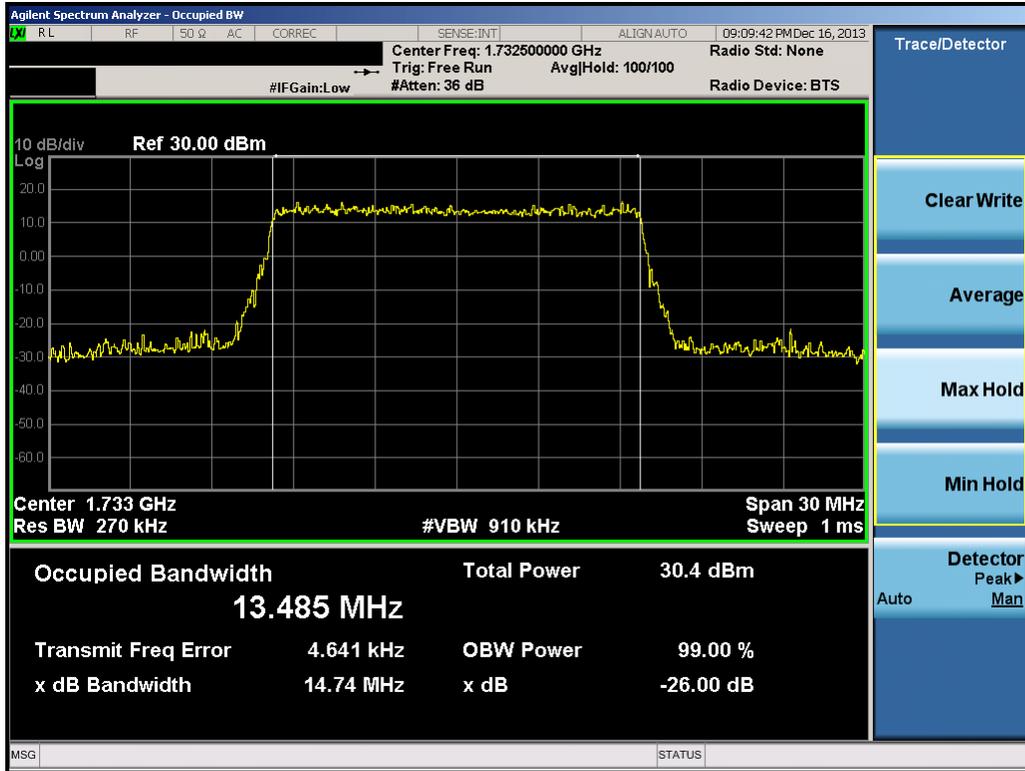


Plot 8-32. Occupied Bandwidth Plot (15.0MHz 16-QAM – RB Size 75)

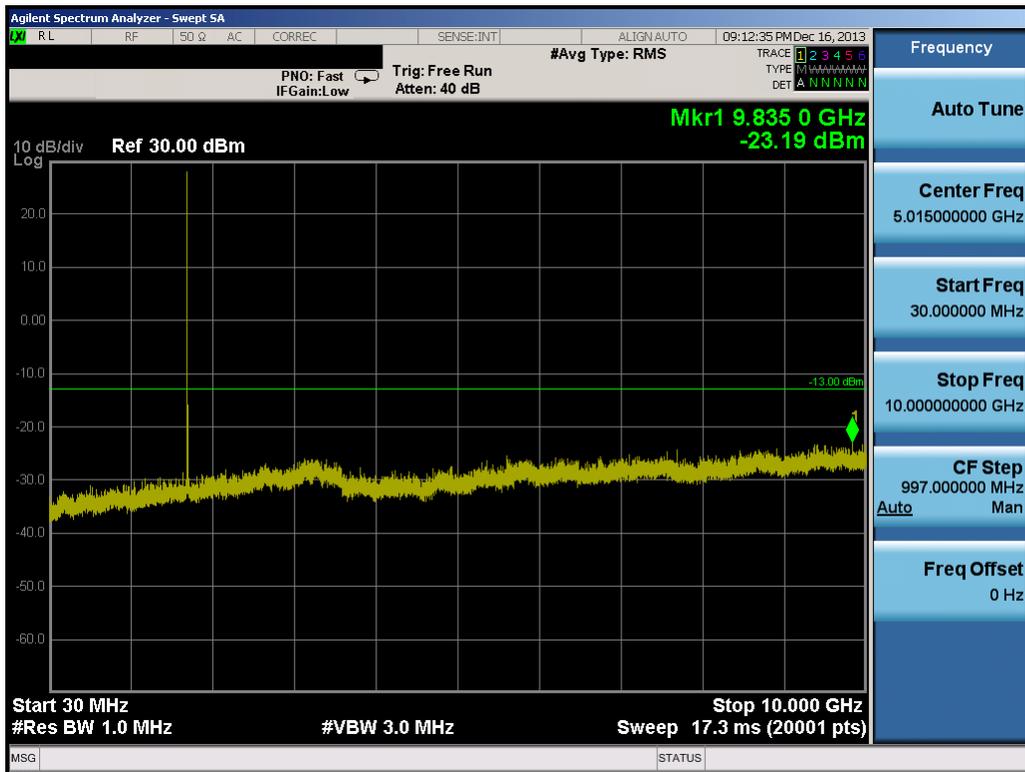


Plot 8-33. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 45 of 58

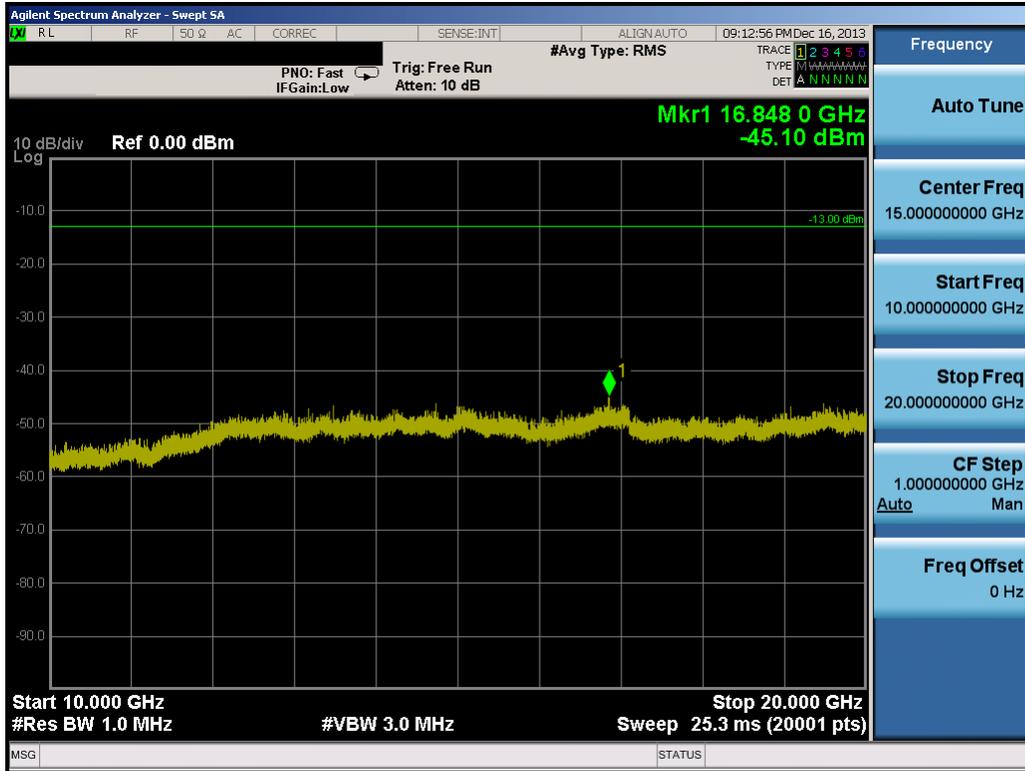


Plot 8-34. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

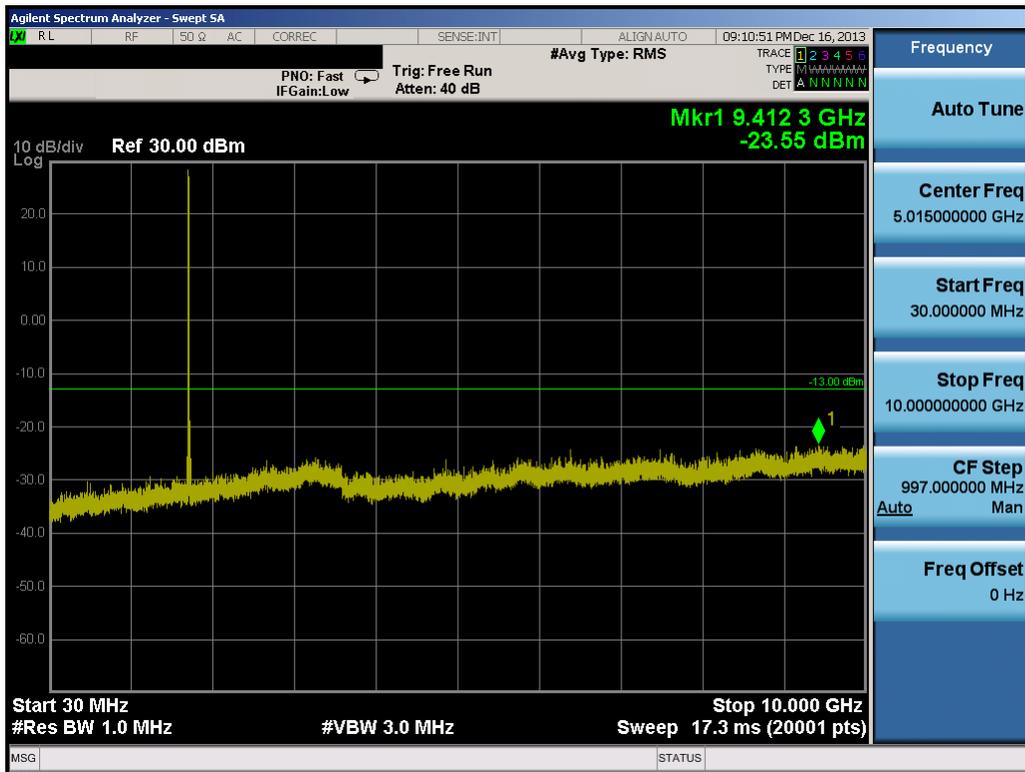


Plot 8-35. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 46 of 58

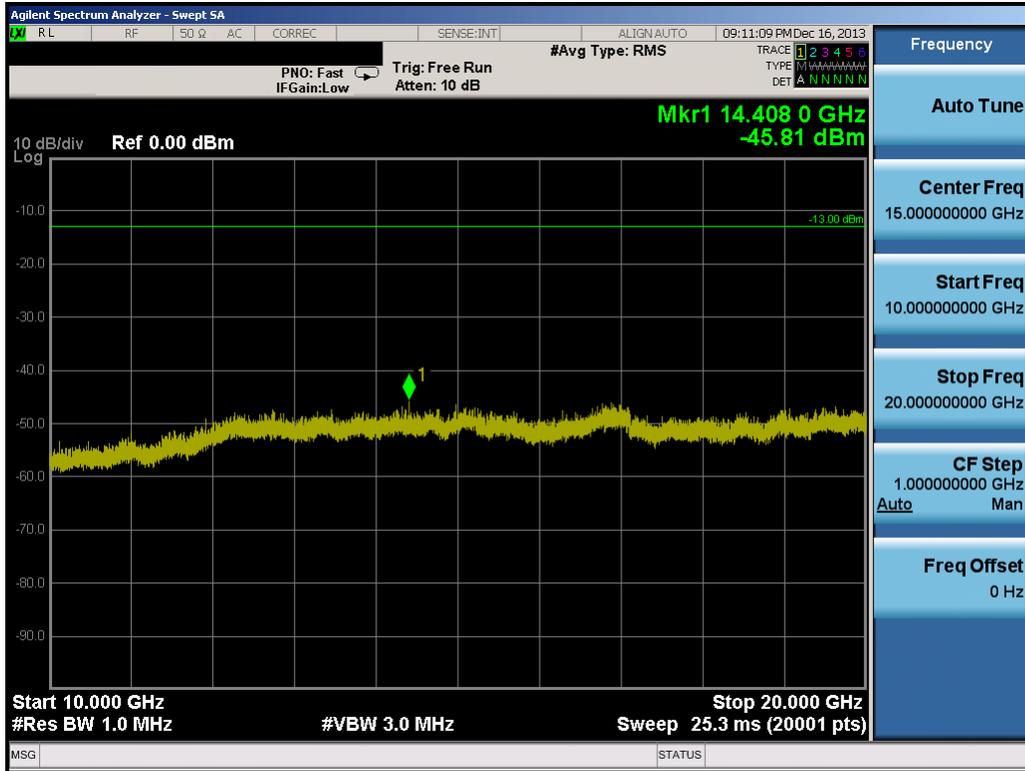


Plot 8-36. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

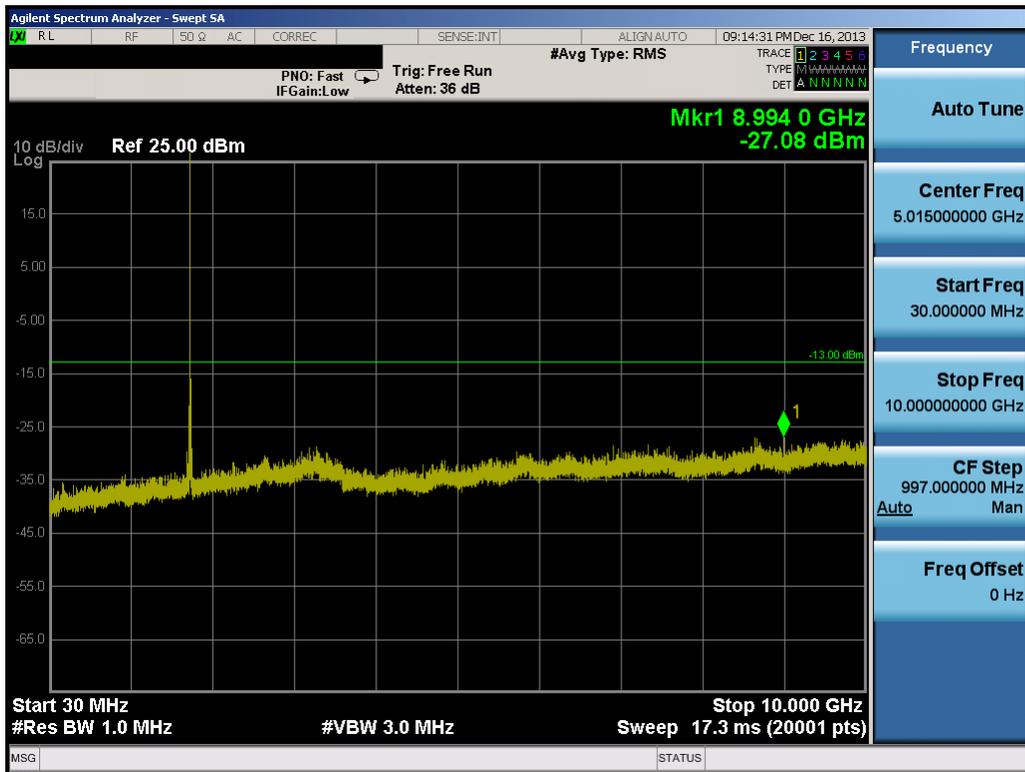


Plot 8-37. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 47 of 58

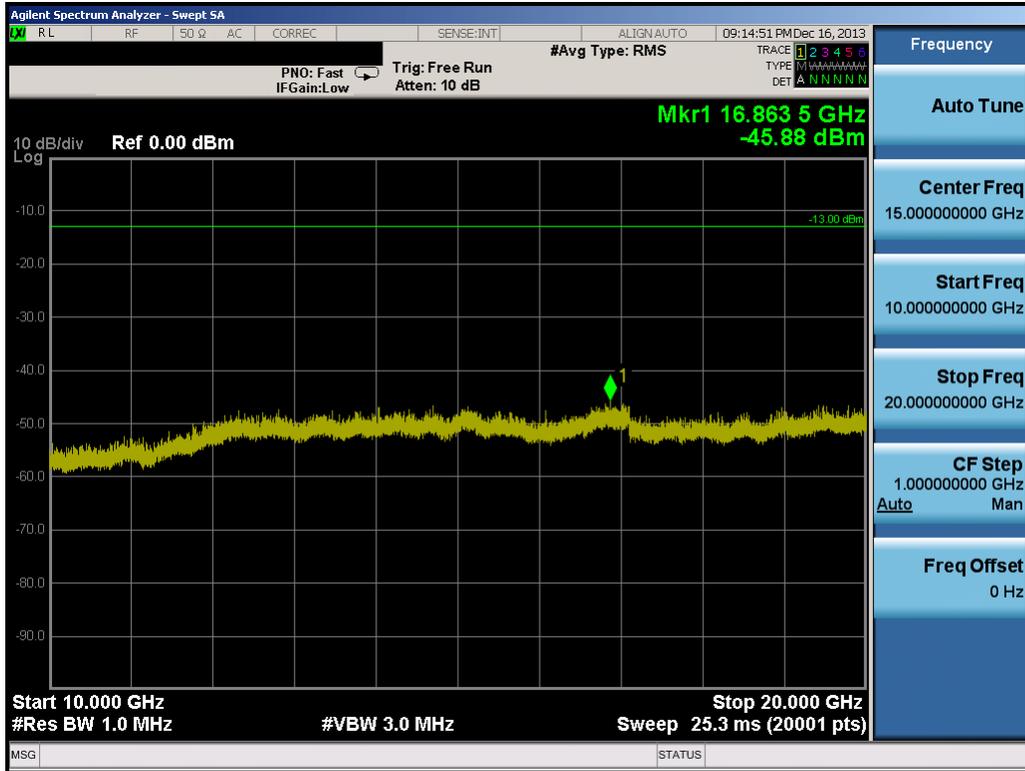


Plot 8-38. Conducted Spurious Plot (15.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

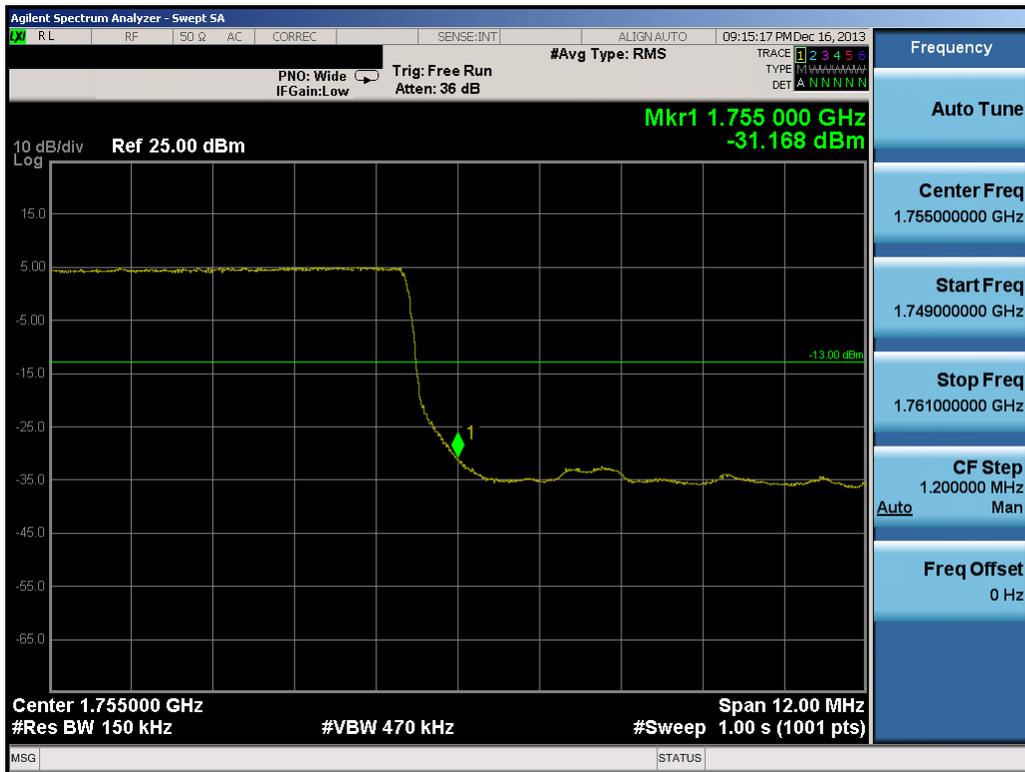


Plot 8-39. Upper Band Edge Plot (15.0MHz QPSK – RB Size 75)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 48 of 58

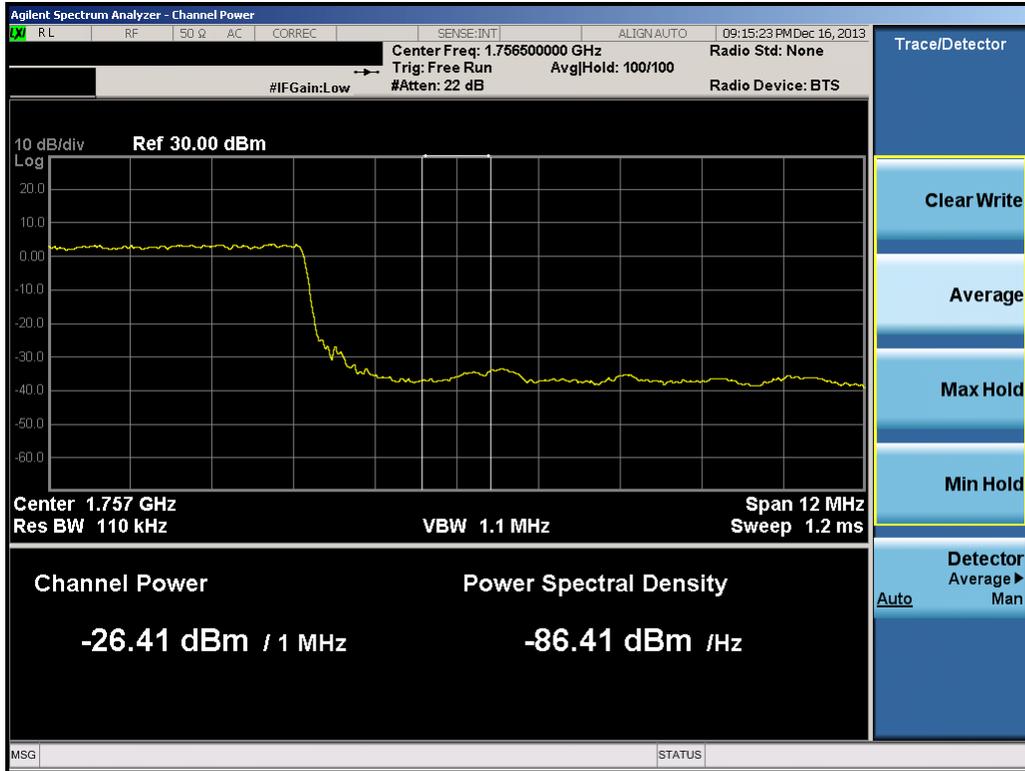


Plot 8-40. Upper Extended Band Edge Plot (15.0MHz QPSK – RB Size 75)

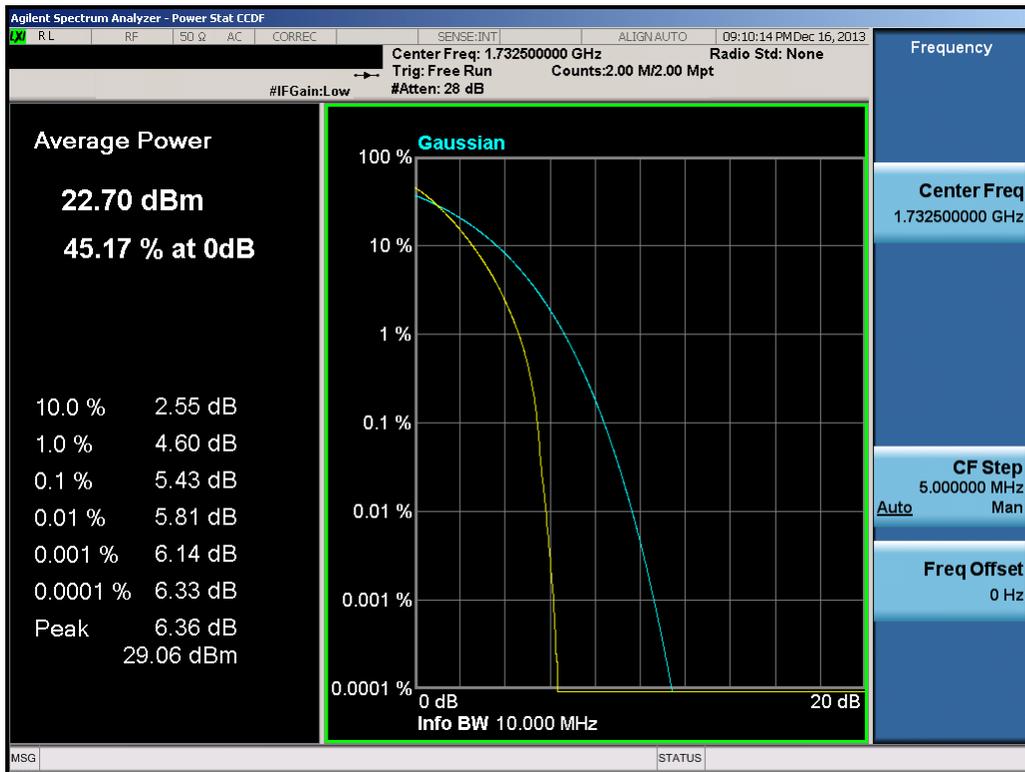


Plot 8-41. PAR Plot (15.0MHz QPSK – RB Size 75)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 49 of 58

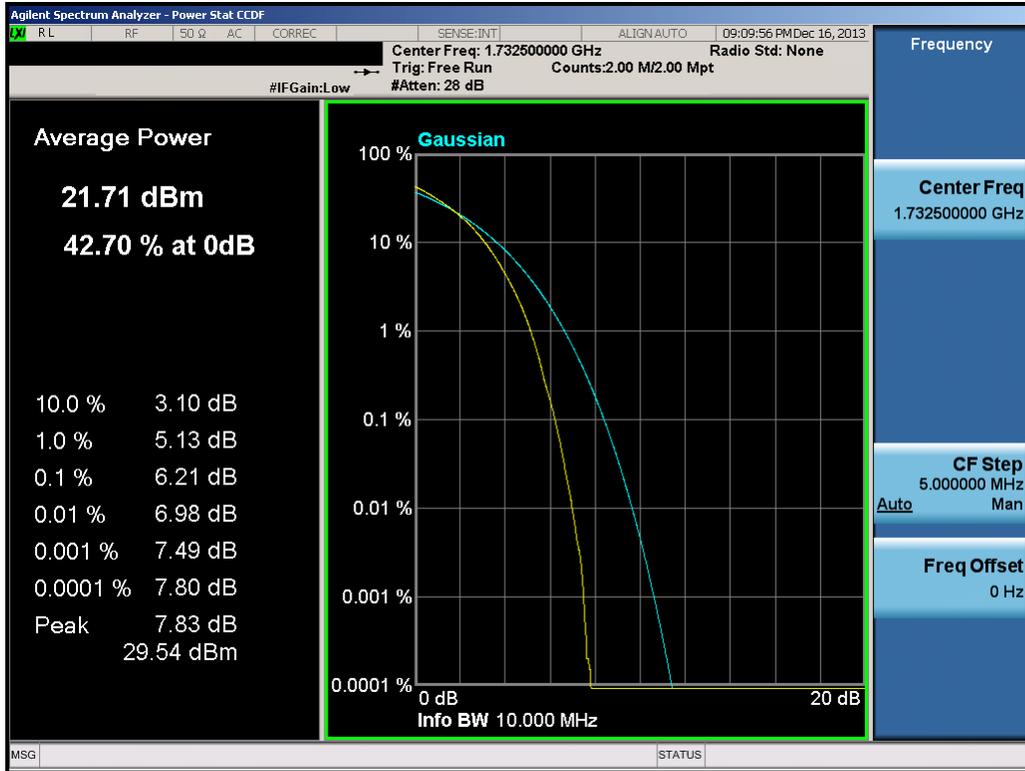

Plot 8-42. PAR Plot (15.0MHz 16-QAM – RB Size 75)

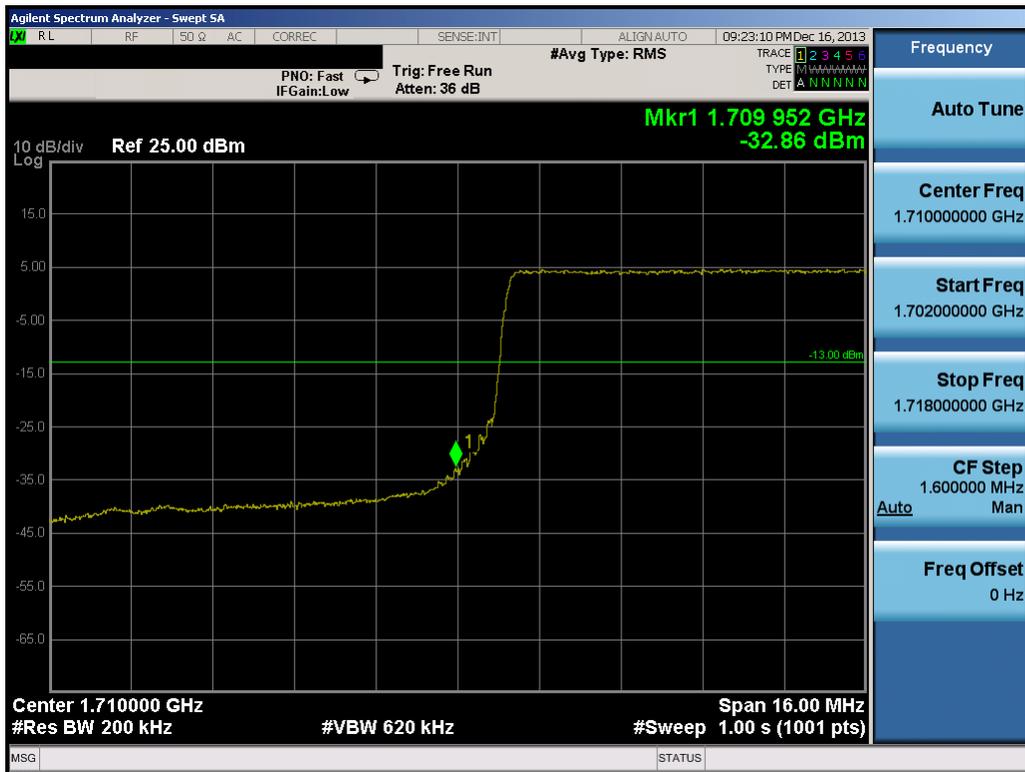


Plot 8-43. Lower Band Edge Plot (20.0MHz QPSK – RB Size 100)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 50 of 58




Plot 8-44. Lower Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)

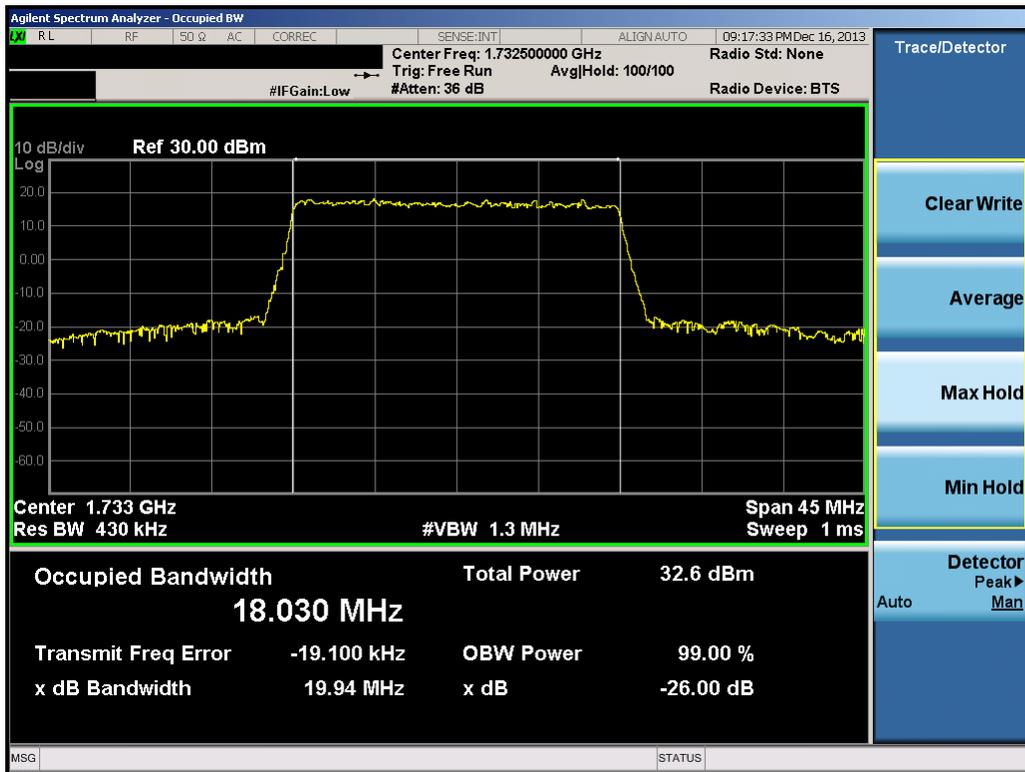


Plot 8-45. Occupied Bandwidth Plot (20.0MHz QPSK – RB Size 100)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 51 of 58

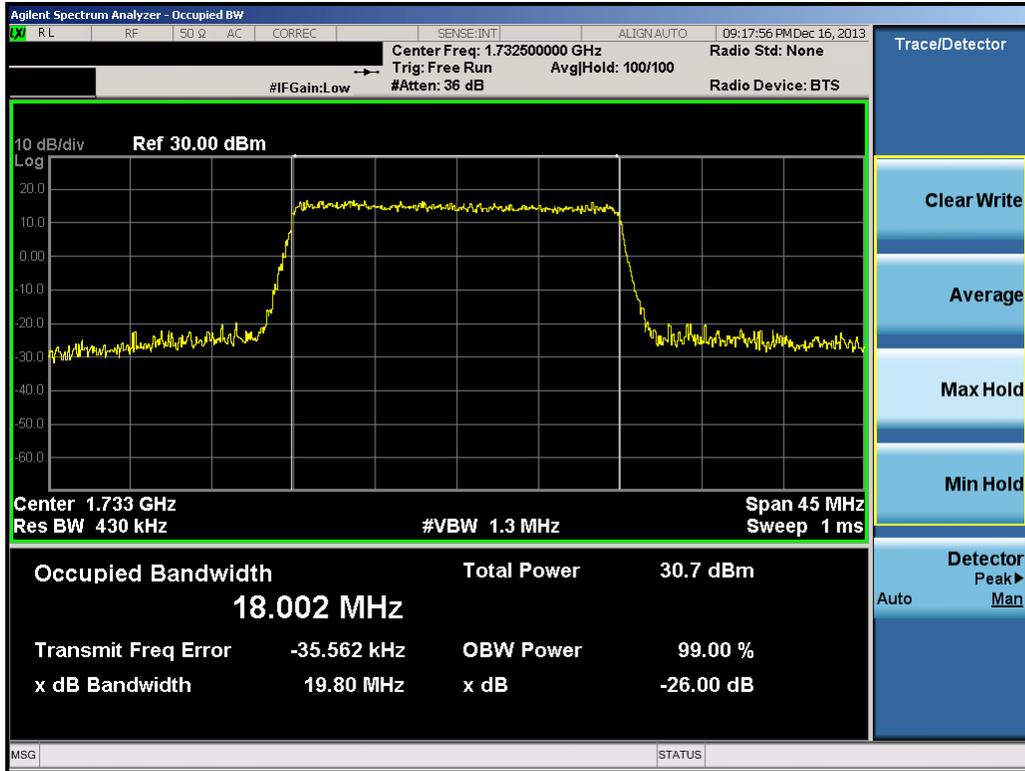


Plot 8-46. Occupied Bandwidth Plot (20.0MHz 16-QAM – RB Size 100)

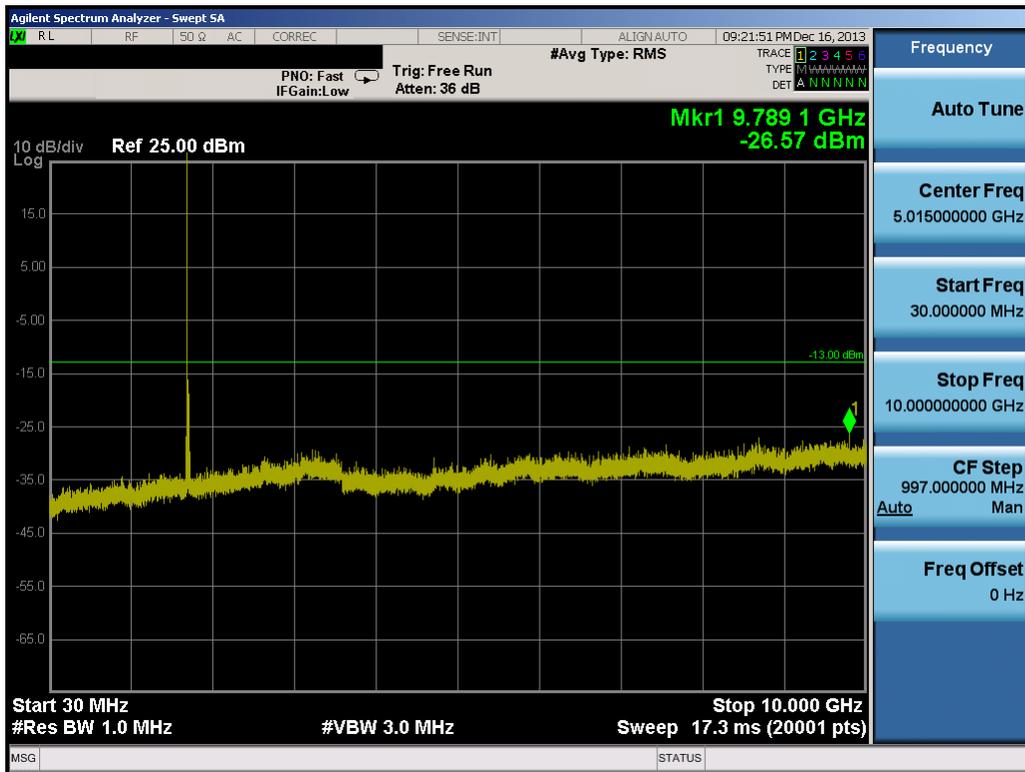


Plot 8-47. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 52 of 58

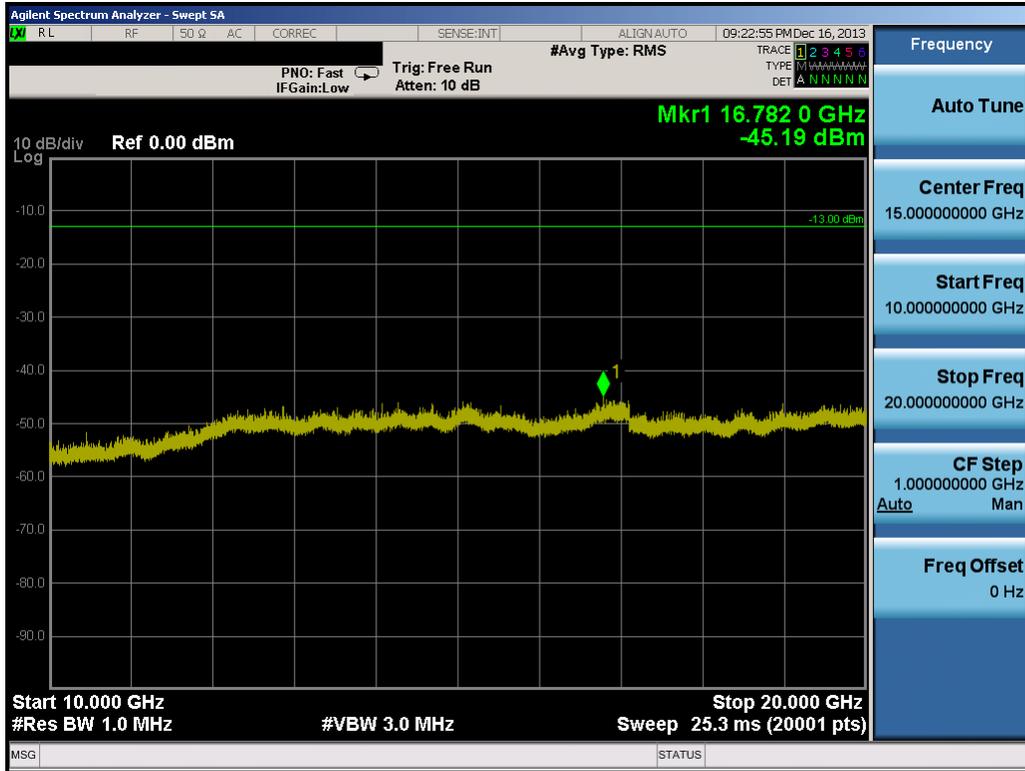


Plot 8-48. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

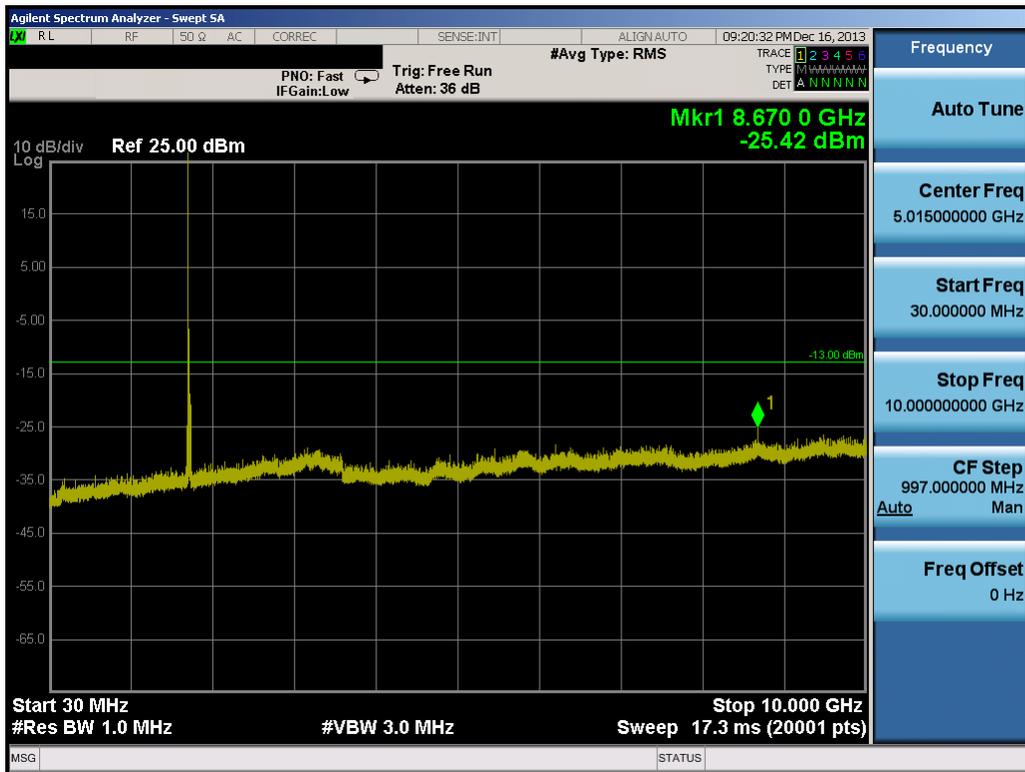


Plot 8-49. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 53 of 58

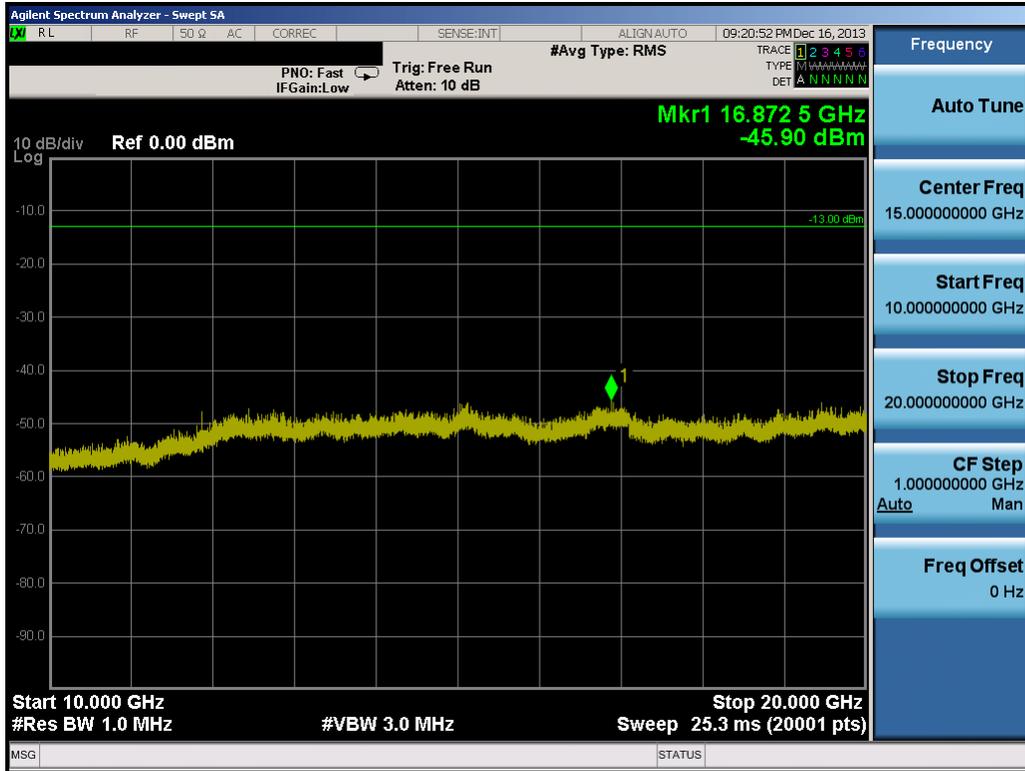


Plot 8-50. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

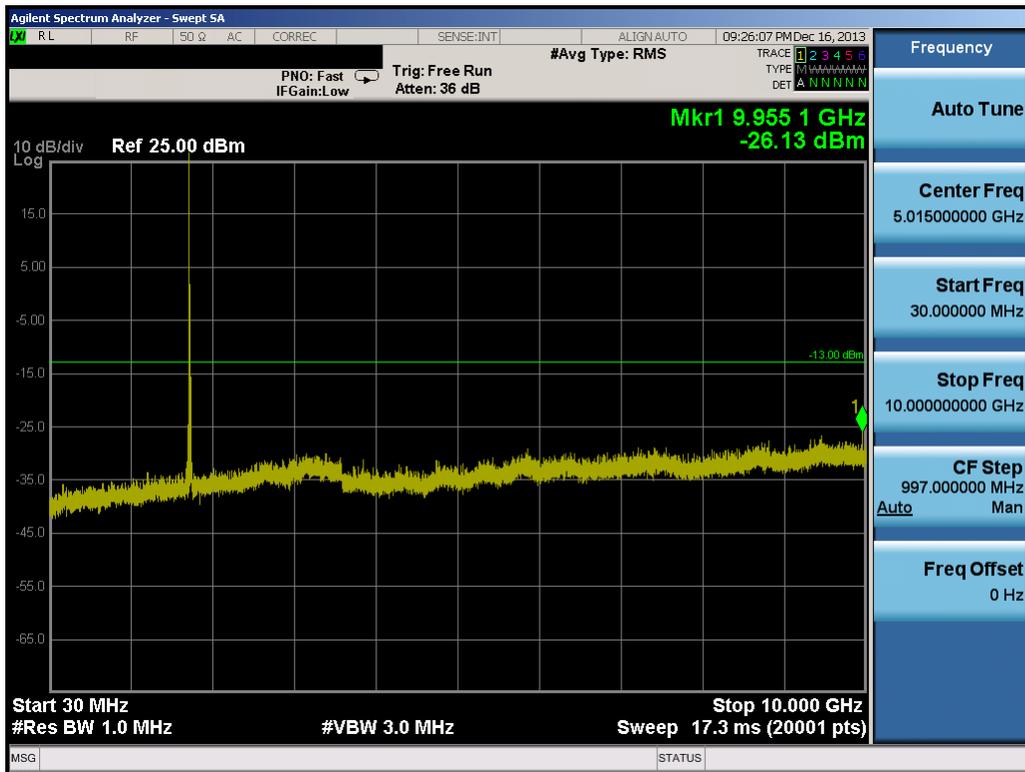


Plot 8-51. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 54 of 58

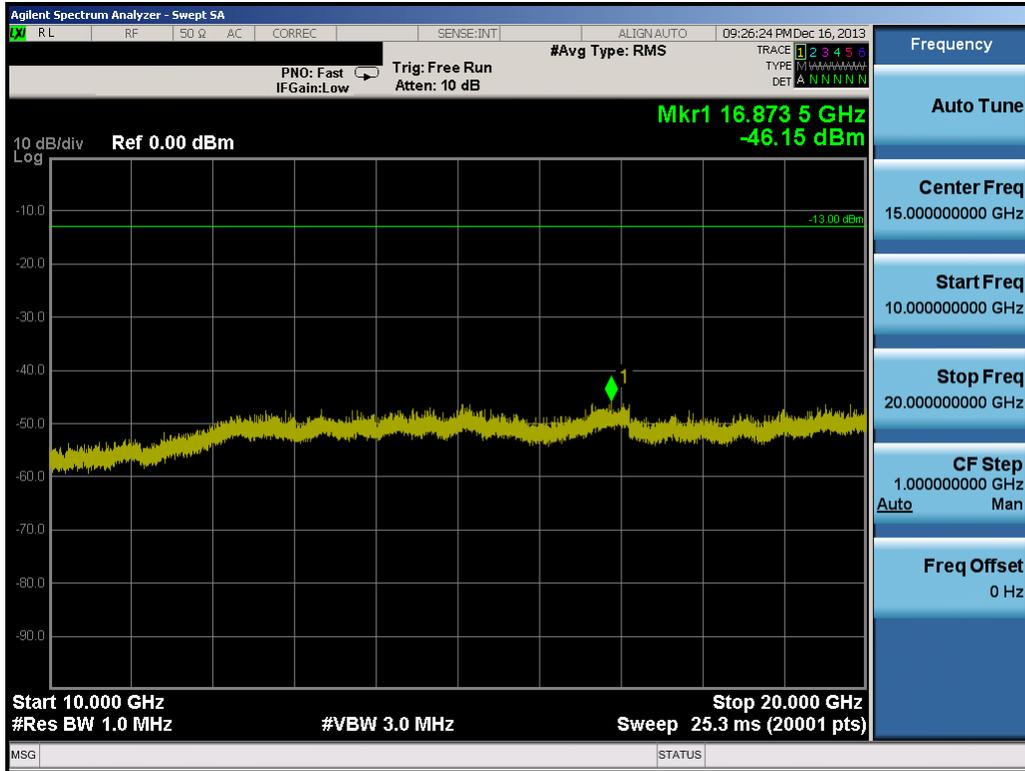


Plot 8-52. Conducted Spurious Plot (20.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

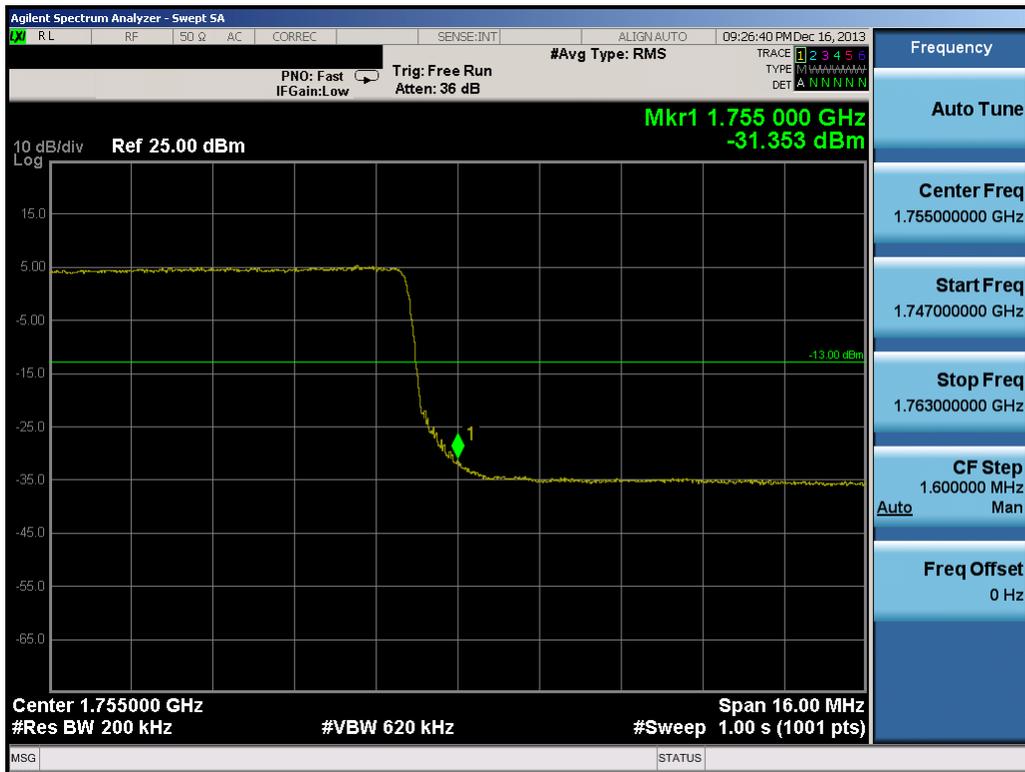


Plot 8-53. Upper Band Edge Plot (20.0MHz QPSK – RB Size 100)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 55 of 58

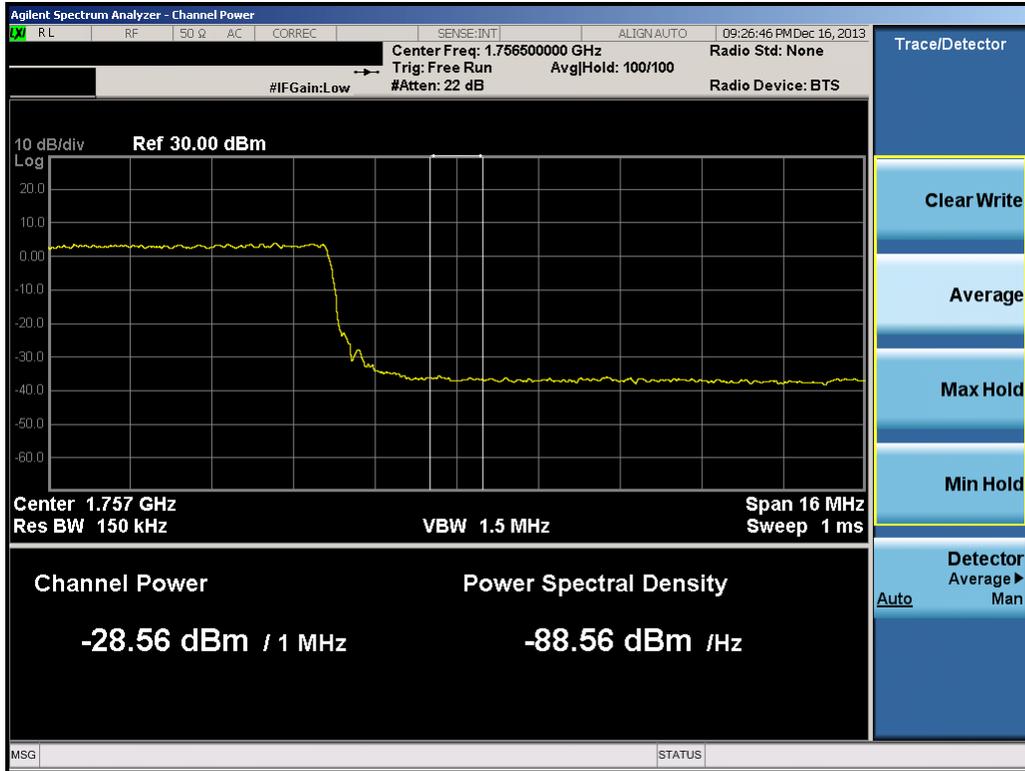


Plot 8-54. Upper Extended Band Edge Plot (20.0MHz QPSK – RB Size 100)

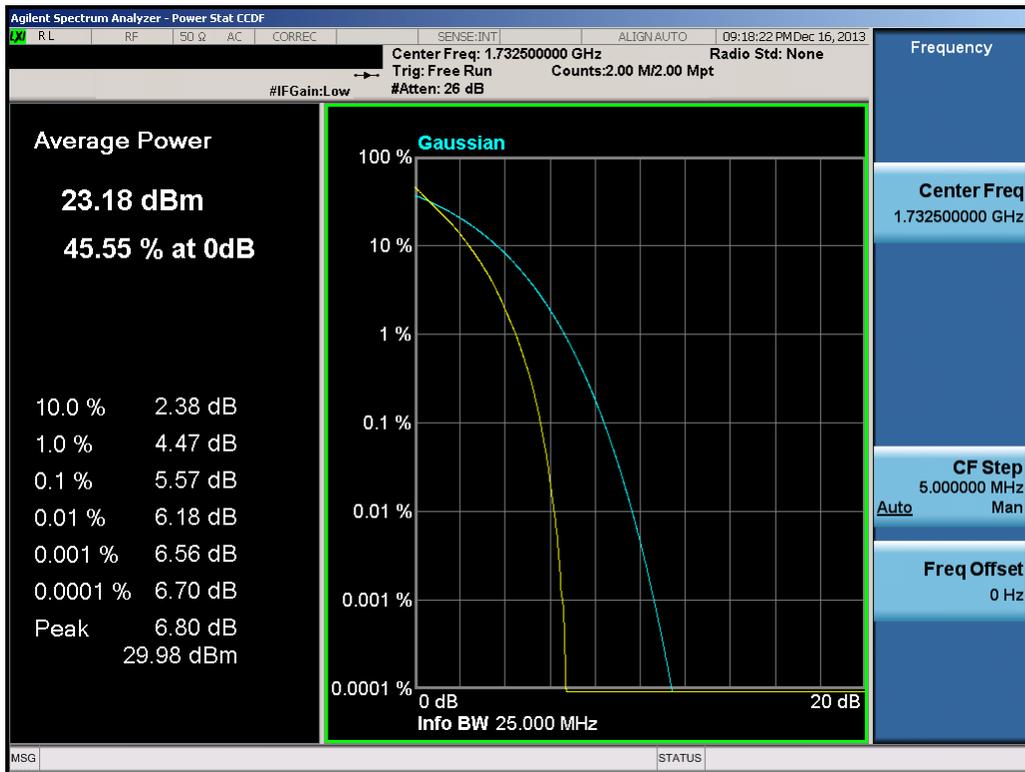

Plot 8-55. PAR Plot (20.0MHz QPSK – RB Size 100)

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 56 of 58

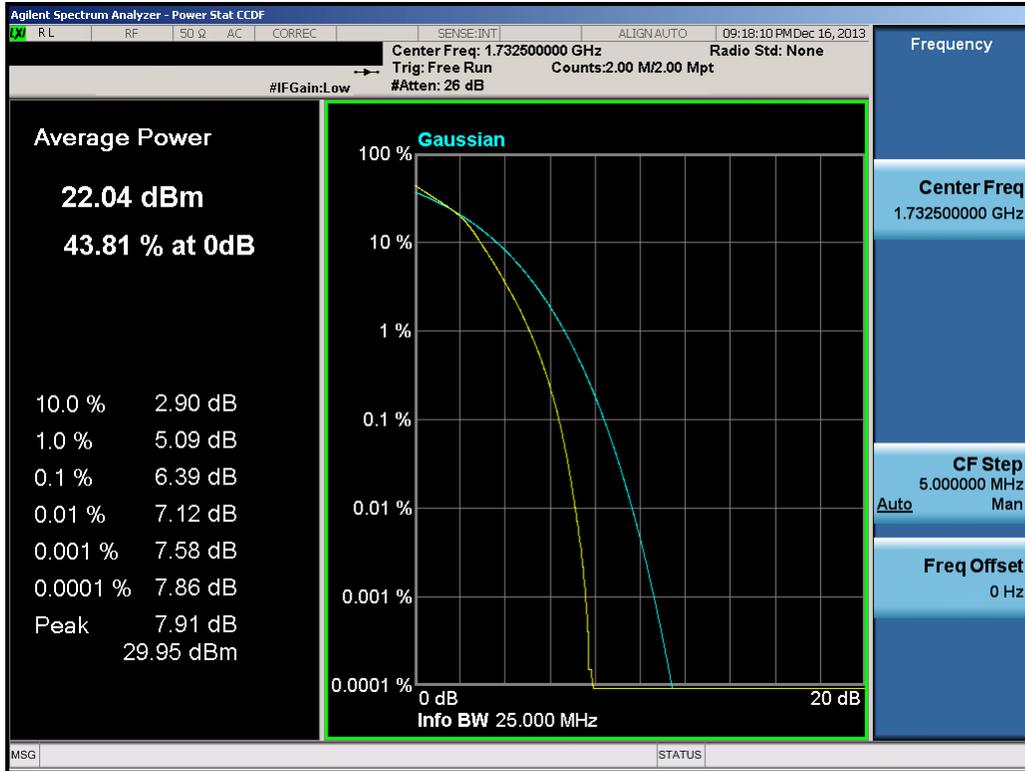

**Plot 8-56. PAR Plot (20.0MHz 16-QAM – RB Size 100)**

FCC ID: ZNFVK810	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1312092370.ZNF	Test Dates: 12/16 - 12/18/2013	EUT Type: Portable Tablet		Page 57 of 58

## 9.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Tablet FCC ID: ZNFVK810** complies with all the requirements of Parts 2, 27 of the FCC rules for LTE operation only.

FCC ID: ZNFVK810		<b>FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1312092370.ZNF	<b>Test Dates:</b> 12/16 - 12/18/2013	<b>EUT Type:</b> Portable Tablet	Page 58 of 58	