



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 27 LTE

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
1/20/2014
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1401170099.ZNF

FCC ID :	ZNFVK810
APPLICANT:	LG ELECTRONICS MOBILECOMM U.S.A

Application Type: Class II Permissive Change
FCC Classification: Licensed Non-Broadcast Transmitter (TNB)
FCC Rule Part(s): §2; §27
EUT Type: Portable Tablet
Model(s): LG-VK810, VK810, LGVK810
Test Device Serial No.: *identical prototype* [S/N: EMC]
Class II Permissive Change: Please see FCC change documents.
Original Grant Date: 1/23/2014

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 13	782	9M01G7D	QPSK	0.026	14.23
LTE Band 13	782	8M97W7D	16QAM	0.021	13.13
LTE Band 4	1712.5 - 1752.5	4M52G7D	QPSK	0.240	23.80
LTE Band 4	1712.5 - 1752.5	4M52W7D	16QAM	0.184	22.64
LTE Band 4	1715 - 1750	9M00G7D	QPSK	0.272	24.35
LTE Band 4	1715 - 1750	8M98W7D	16QAM	0.208	23.19
LTE Band 4	1717.5 - 1747.5	13M4G7D	QPSK	0.261	24.17
LTE Band 4	1717.5 - 1747.5	13M5W7D	16QAM	0.187	22.73
LTE Band 4	1720 - 1745	18M0G7D	QPSK	0.252	24.02
LTE Band 4	1720 - 1745	18M0W7D	16QAM	0.189	22.75

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President




FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet		Page 1 of 20

T A B L E O F C O N T E N T S

FCC PART 27 MEASUREMENT REPORT		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
2.4 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS		6
3.1 MEASUREMENT PROCEDURE		6
3.1 BLOCK C FREQUENCY RANGE		6
3.2 AWS - BASE FREQUENCY BLOCKS		6
3.3 AWS - MOBILE FREQUENCY BLOCKS		6
3.4 OCCUPIED BANDWIDTH		7
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		7
3.6 PEAK-AVERAGE RATIO		7
3.7 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		8
3.8 FREQUENCY STABILITY / TEMPERATURE VARIATION		9
4.0 TEST EQUIPMENT CALIBRATION DATA		10
5.0 SAMPLE CALCULATIONS		11
6.0 TEST RESULTS.....		12
6.1 SUMMARY.....		12
6.2 EFFECTIVE RADIATED POWER (ERP).....		13
6.3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)		14
6.4 BAND 13 RADIATED SPURIOUS EMISSIONS		15
BAND 13 RADIATED SPURIOUS EMISSIONS 1559 – 1610MHZ BAND.....		16
6.5 BAND 4 RADIATED SPURIOUS EMISSIONS		17
7.0 CONCLUSION.....		20

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 2 of 20	



MEASUREMENT REPORT

FCC Part 27




§2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2: §27
BASE MODEL: LG-VK810
FCC ID: ZNFVK810
FCC CLASSIFICATION: Licensed Non-Broadcast Transmitter (TNB)
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: EMC Production Pre-Production Engineering
DATE(S) OF TEST: 1/20/2014
TEST REPORT S/N: 0Y1401170099.ZNF

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: ZNFVK810	 FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 3 of 20	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

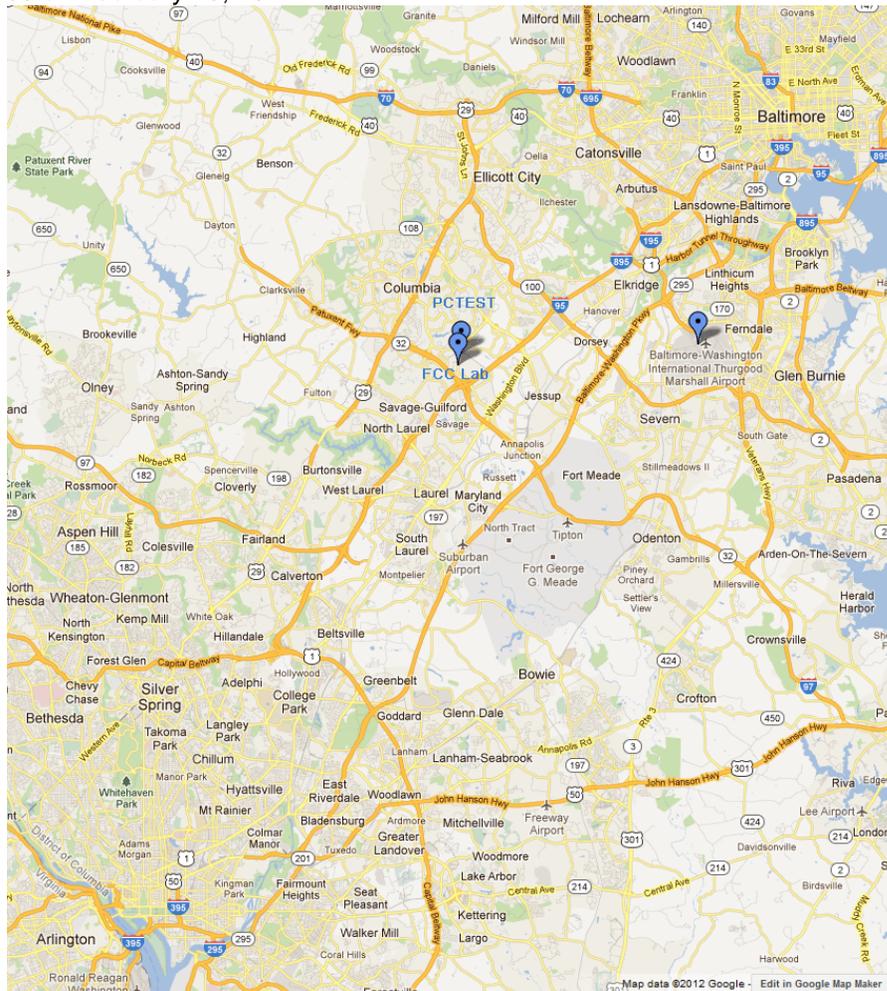


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet		Page 4 of 20

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Tablet FCC ID: ZNFVK810**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

Band 4 (5, 10, 15, 20 MHz BW), 13 (10MHz BW), LTE, 802.11a/b/g/n WLAN(DTS/UNII). Bluetooth(1x, EDR, LE)

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 5 of 20	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **LG Portable Tablet FCC ID: ZNFVK810**.


3.1 Block C Frequency Range

§27.5(b)(3)

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.


3.2 AWS - Base Frequency Blocks

§27.5(h)

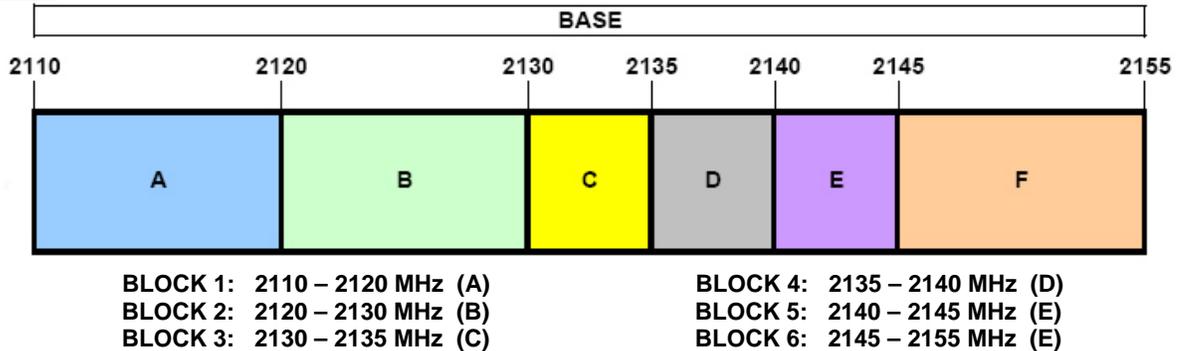

3.3 AWS - Mobile Frequency Blocks

§27.5(h)

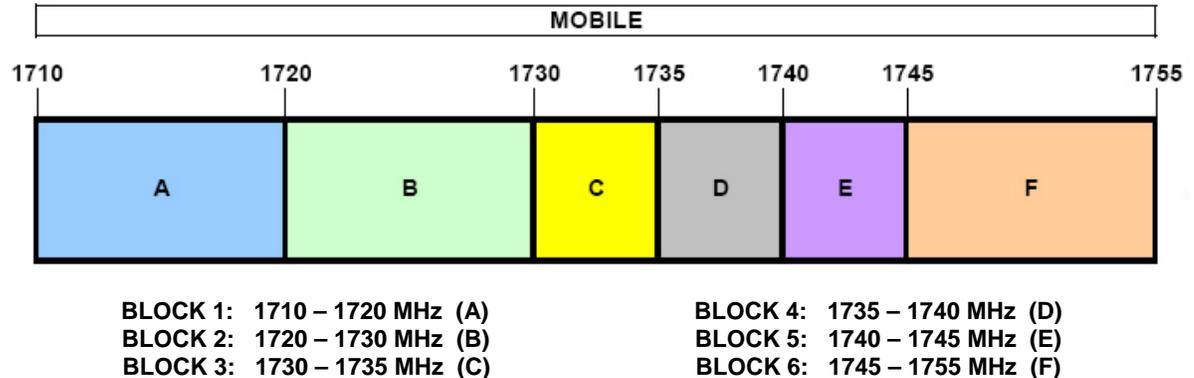

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 6 of 20	

3.4 Occupied Bandwidth

§2.1049 RSS-139(2.3)

The implementation of this test is performed by the spectrum analyzer's occupied bandwidth function. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

3.5 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §27.53(f) §27.53(c.5) §27.53(h) RSS-139(6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for 776-788 MHz band, or 1 MHz or greater for AWS band. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30kHz may be employed for 776-788MHz band. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed for AWS band. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.6 Peak-Average Ratio

§27.50(d.5) RSS-139(6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 7 of 20	

3.7 Radiated Power and Radiated Spurious Emissions

§2.1053 §27.50(b.10) §27.50(d.4) §27.53(f) RSS-139(6.5.1)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$ specified in 27.53(h).

FCC ID: ZNFVK810	 FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet		Page 8 of 20

3.8 Frequency Stability / Temperature Variation

§2.1055 §27.5(b) §27.5(h) §27.54 RSS-139(6.3)

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24 and 27. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: ZNFVK810	 FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 9 of 20	

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Agilent	E8267C	Vector Signal Generator	10/31/2013	Biennial	10/31/2015	US42340152
Espec	ESX-2CA	Environmental Chamber	4/16/2013	Annual	4/16/2014	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/24/2013	Biennial	7/24/2015	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1200+	High Pass Filter	1/27/2013	Annual	1/27/2014	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/27/2013	Annual	1/27/2014	30841
Mini-Circuits	SSG-4000HP	USB Synthesized Signal Generator	N/A	N/A	N/A	11208010032
Mini-Circuits	PWR-SENS-4RMS	USB Power Sensor	4/17/2013	Annual	4/17/2014	11210140001
Mini-Circuits	TVA-11-422	RF Power Amp	N/A	N/A	N/A	QA1303002
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/4/2013	Biennial	10/4/2015	103962
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/21/2013	Biennial	11/21/2015	9105-2404
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 4-1. Test Equipment

Note:

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 10 of 20	

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Amplitude/Angle Modulated

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Combination (Audio/Data)

Note:

The emission designators shown on page 1 of this report were calculated using the occupied bandwidth values in the original certification report of this device (FCC ID: ZNFVK810).

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 11 of 20	

6.0 TEST RESULTS

6.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFVK810
 FCC Classification: Licensed Non-Broadcast Transmitter (TNB)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
TRANSMITTER MODE (TX)					
27.50(b.10)	Effective Radiated Power (Band 13)	< 3 Watts max. ERP	RADIATED	PASS	Section 6.2
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053 27.53(f) 27.53(h)	Undesirable Emissions	> 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section, 6.4, 6.5

Table 6-1. Summary of Test Results

Note

All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet			Page 12 of 20

6.2 Effective Radiated Power (ERP)

§27.50(b.10)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
782.00	10	QPSK	Standard	1 / 49	10.47	3.76	V	14.23	0.026	-20.54
782.00	10	16QAM	Standard	1 / 49	9.28	3.85	V	13.13	0.021	-21.64

Table 6-2. ERP Data (Band 13)

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 13 of 20	

6.3 Equivalent Isotropic Radiated Power (EIRP)

§27.50(d.4) RSS-139(6.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1 / 0	13.91	9.89	V	23.80	0.240	-6.20
1732.50	5	QPSK	Standard	1 / 0	13.82	9.85	V	23.67	0.233	-6.33
1752.50	5	QPSK	Standard	1 / 5	13.54	9.80	V	23.34	0.216	-6.66
1712.50	5	16-QAM	Standard	1 / 0	12.75	9.89	V	22.64	0.184	-7.36
1732.50	5	16-QAM	Standard	1 / 0	12.72	9.85	V	22.57	0.181	-7.43
1752.50	5	16-QAM	Standard	1 / 5	12.45	9.80	V	22.25	0.168	-7.75
1715.00	10	QPSK	Standard	1 / 0	13.98	9.89	V	23.87	0.244	-6.13
1732.50	10	QPSK	Standard	1 / 0	14.50	9.85	V	24.35	0.272	-5.65
1750.00	10	QPSK	Standard	1 / 0	14.15	9.80	V	23.95	0.249	-6.05
1715.00	10	16-QAM	Standard	1 / 0	12.68	9.89	V	22.57	0.181	-7.43
1732.50	10	16-QAM	Standard	1 / 0	13.34	9.85	V	23.19	0.208	-6.81
1750.00	10	16-QAM	Standard	1 / 0	13.13	9.80	V	22.93	0.197	-7.07
1717.50	15	QPSK	Standard	1 / 0	13.75	9.89	V	23.64	0.231	-6.36
1732.50	15	QPSK	Standard	1 / 0	14.32	9.85	V	24.17	0.261	-5.83
1747.50	15	QPSK	Standard	1 / 0	14.15	9.80	V	23.95	0.249	-6.05
1717.50	15	16-QAM	Standard	1 / 0	12.69	9.89	V	22.58	0.181	-7.42
1732.50	15	16-QAM	Standard	1 / 0	12.88	9.85	V	22.73	0.187	-7.27
1747.50	15	16-QAM	Standard	1 / 0	12.83	9.80	V	22.63	0.183	-7.37
1720.00	20	QPSK	Standard	1 / 99	13.91	9.89	V	23.80	0.240	-6.20
1732.50	20	QPSK	Standard	1 / 0	14.17	9.85	V	24.02	0.252	-5.98
1745.00	20	QPSK	Standard	1 / 0	13.91	9.80	V	23.71	0.235	-6.29
1720.00	20	16-QAM	Standard	1 / 99	12.85	9.89	V	22.74	0.188	-7.26
1732.50	20	16-QAM	Standard	1 / 0	12.69	9.85	V	22.54	0.179	-7.46
1745.00	20	16-QAM	Standard	1 / 0	12.95	9.80	V	22.75	0.189	-7.25

Table 6-3. EIRP Data (Band 4)

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the V positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810	 FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 14 of 20	

6.4 Band 13 Radiated Spurious Emissions §2.1053 §27.53(f)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 782.00 MHz
 MEASURED OUTPUT POWER: 14.23 dBm = 0.026 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 27.23 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
2346.00	-40.85	3.63	-37.22	H	51.45
3128.00	-38.95	5.11	-33.85	H	48.08
3910.00	-52.30	6.38	-45.92	H	60.15
4692.00	-78.84	7.34	-71.50	H	85.73
5474.00	-78.26	8.31	-69.95	H	84.18

Table 6-4. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 15 of 20	

Band 13 Radiated Spurious Emissions 1559 – 1610MHz Band
§2.1053 §27.53(f)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 782.00 MHz
 MEASURED OUTPUT POWER: 14.231 dBm = 0.026 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

FREQUENCY (MHz)	EMISSION TYPE	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	MARGIN (dB)
1564.00	WIDEBAND	-54.56	5.86	-48.70	H	-8.70

Table 6-5. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 16 of 20	

6.5 Band 4 Radiated Spurious Emissions

§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1715.00 MHz
 MEASURED OUTPUT POWER: 23.87 dBm = 0.244 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.87 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3430.00	-35.28	8.11	-27.17	H	51.04
5145.00	-52.63	10.13	-42.51	H	66.38
6860.00	-81.14	11.31	-69.83	H	93.70
8575.00	-50.46	12.98	-37.48	H	61.35
10290.00	-54.06	13.22	-40.84	H	64.71
12005.00	-43.55	13.01	-30.54	H	54.41

Table 6-6. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 17 of 20	

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1732.50 MHz
 MEASURED OUTPUT POWER: 24.35 dBm = 0.272 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.35 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-43.38	8.23	-35.15	H	59.49
5197.50	-52.72	10.18	-42.53	H	66.88
6930.00	-56.22	11.41	-44.81	H	69.15
8662.50	-80.73	13.00	-67.73	H	92.08
10395.00	-78.02	13.15	-64.87	H	89.22
12127.50	-44.13	13.00	-31.14	H	55.48

Table 6-7. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 18 of 20	

Band 4 Radiated Spurious Measurements (continued)
§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1750.00 MHz
 MEASURED OUTPUT POWER: 23.95 dBm = 0.249 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.95 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3500.00	-41.85	8.32	-33.53	H	57.48
5250.00	-54.58	10.20	-44.38	H	68.33
7000.00	-80.97	11.48	-69.49	H	93.45
8750.00	-50.71	12.97	-37.74	H	61.70
10500.00	-53.78	13.04	-40.74	H	64.69
12250.00	-44.81	13.03	-31.79	H	55.74

Table 6-8. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations. This device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1RB for all bands.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found with the EUT in the H positioning. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 19 of 20	

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Tablet FCC ID: ZNFVK810** complies with all the requirements of Parts 2, 27 of the FCC rules for LTE operation only.

FCC ID: ZNFVK810		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1401170099.ZNF	Test Dates: 1/20/2014	EUT Type: Portable Tablet	Page 20 of 20	