

EMI TEST REPORT

FCC CERTIFICATION

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632
United States

Date of Receipt: November 01, 2017**Date of Issue: January 05, 2018****Test Report No. HCT-EM-1801-FC001-R1****FCC ID :****ZNFX210APM****Rule Part(s) / Standard(s):** FCC CFR 47 PART 15 Subpart B Class B**FCC Classification:** JBP (Part 15 B – Class B Computing Device Peripheral)**EUT Type:** GSM/WCDMA/LTE phone with Bluetooth and WLAN**Model Name:** LM-X210APM**Additional Model Name:** LMX210APM, X210APM, LM-X210CM, LMX210CM, X210CM, LM-X210CMR, LMX210CMR, X210CMR**Date of Test:** November 02, 2017 – November 07, 2017

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Dong-Hwan Seo
Test Engineer
EMC Team
Certification Division

Reviewed By

Jin-Pyo Hong
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



REVISION HISTORY

The revision history for this document is shown in table.

Report No.	Issue Date	Information About Changes
HCT-EM-1801-FC001	January 03, 2018	Initial Release Reissue of Report No. HCT-E-1711-F005 Changed the additional model name
HCT-EM-1801-FC001-R1	January 05, 2018	Added Additional Model Name



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s)	5
1.3 Test Facility	5
1.4 Calibration of Measuring Instrument	5
1.5 Tested System Details	6
1.6 Cable Description	7
1.7 Noise Suppression Parts on Cable. (I/O Cable)	7
2. MEASUREMENT UNCERTAINTY	8
3. DESCRIPTION OF TEST	9
3.1 Measurement of Conducted Emission.....	9
3.2 Measurement of Radiated Measurements	10
4. PRELIMINARY TEST	12
4.1 Conducted Emission Test	12
4.2 Radiated Emission Test	12
5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	13
5.1 Conducted Emission Test	13
5.2 Radiated Emission Test	20
6. LIST OF TEST EQUIPMENT.....	22
7. CONCLUSION.....	23
APPENDIX A_ TEST SETUP PHOTOGRAPHS	24



1. GENERAL INFORMATION

1.1 Description of EUT

Its basic purpose is used for communications.

FCC ID	ZNFX210APM
Model	LM-X210APM
Additional Model	LMX210APM, X210APM, LM-X210CM, LMX210CM, X210CM, LM-X210CMR, LMX210CMR, X210CMR
EUT Type	GSM/WCDMA/LTE phone with Bluetooth and WLAN
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 1 852.4 MHz to 1 907.6 MHz (WCDMA B2) 1712.4 MHz to 1752.6 MHz (WCDMA B4) 826.40 MHz to 846.60 MHz (WCDMA B5) 1 850 MHz to 1 910 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 699 MHz to 716 MHz (LTE B12) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 1 932.4 MHz to 1 987.6 MHz (WCDMA B2) 2 112.4 MHz to 2 152.6 MHz (WCDMA B4) 871.40 MHz to 891.60 MHz (WCDMA B5) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 729 MHz to 746 MHz (LTE B12) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz)



1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014.

Measurement Facilities	Registration Number
Radiated Field strength measurement facility 3 m Semi Anechoic chamber	90661 (July 07, 2015)
Radiated Field strength measurement facility 10 m Semi Anechoic chamber	

1.4 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).



1.5 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer	FCC ID / DoC
EUT	LM-X210APM	-	LG	ZNFX210APM
Data cable	EAD62377922	-	KSD	-
Data cable	EAD62377927		Ningbo	
Earphone	EAB64168751	-	I-Sound	-
Notebook PC	ProBook6560b	5CB2053MXF	HP	DoC
Notebook PC adaptor	Series PPP009L-E	-	LITE-On Technology	-
RJ45 cable	-	-	-	-
Gateway	TL-WR747N	-	TP-LINK	-
Gateway adaptor	T120150-2H1	-	TP-LINK	-
Serial mouse	Serial 2 button mouse	02031069	Radio shack	FSUGMZE3
Micro SD card	SanDisk Extreme 32 GB SD Card	-	SanDisk	-



1.6 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.0
	Earphone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.6
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked “(D)” means the data cable and “(P)” means the power cable.

1.7 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End



2. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Emission (0.15 MHz to 30 MHz)	1.82 dB ($k = 2$)
Radiated Emissions (30 MHz to 1 GHz)	5.20 dB ($k = 2$)
Radiated Emissions (1 GHz to 18 GHz)	5.24 dB ($k = 2$)
Radiated Emissions (18 GHz to 40 GHz)	5.40 dB ($k = 2$)



3. DESCRIPTION OF TEST

3.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth (kHz)	Quasi-Peak (dB(μV))	Average (dB(μV))
0.15 to 0.5	9	66 to 56*	56 to 46*
0.5 to 5	9	56	46
5 to 30	9	60	50

**Decreases with the logarithm of the frequency.*



3.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.(1 GHz to 40 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak ($\text{dB}(\mu\text{V})/\text{m}$)
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak ($\text{dB}(\mu\text{V})/\text{m}$)	Average ($\text{dB}(\mu\text{V})/\text{m}$)
Above 1 000	3	74	54

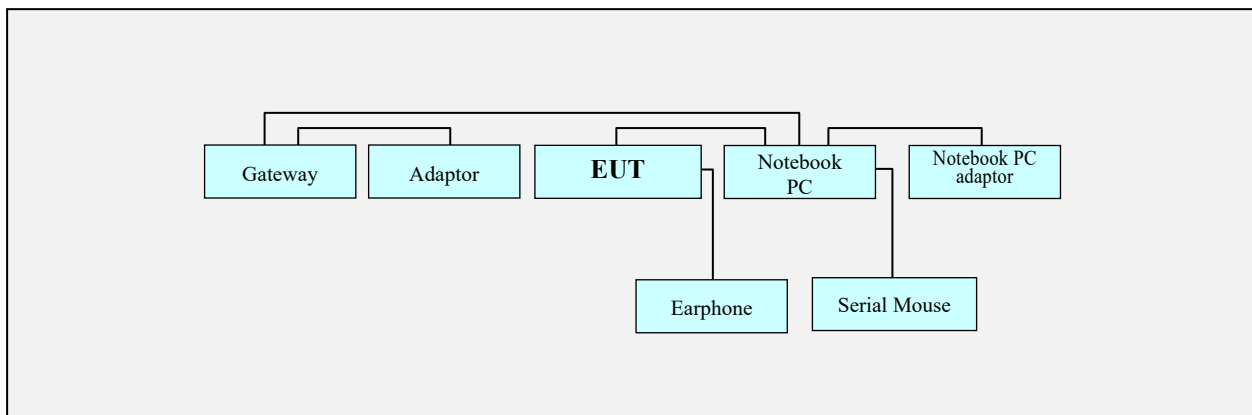


3.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

3.3 Configuration of Tested System



Non-Conductive Table
Power Line: 120 VAC, 60 Hz



4. PRELIMINARY TEST

4.1 Conducted Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

4. 2 Radiated Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode



5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

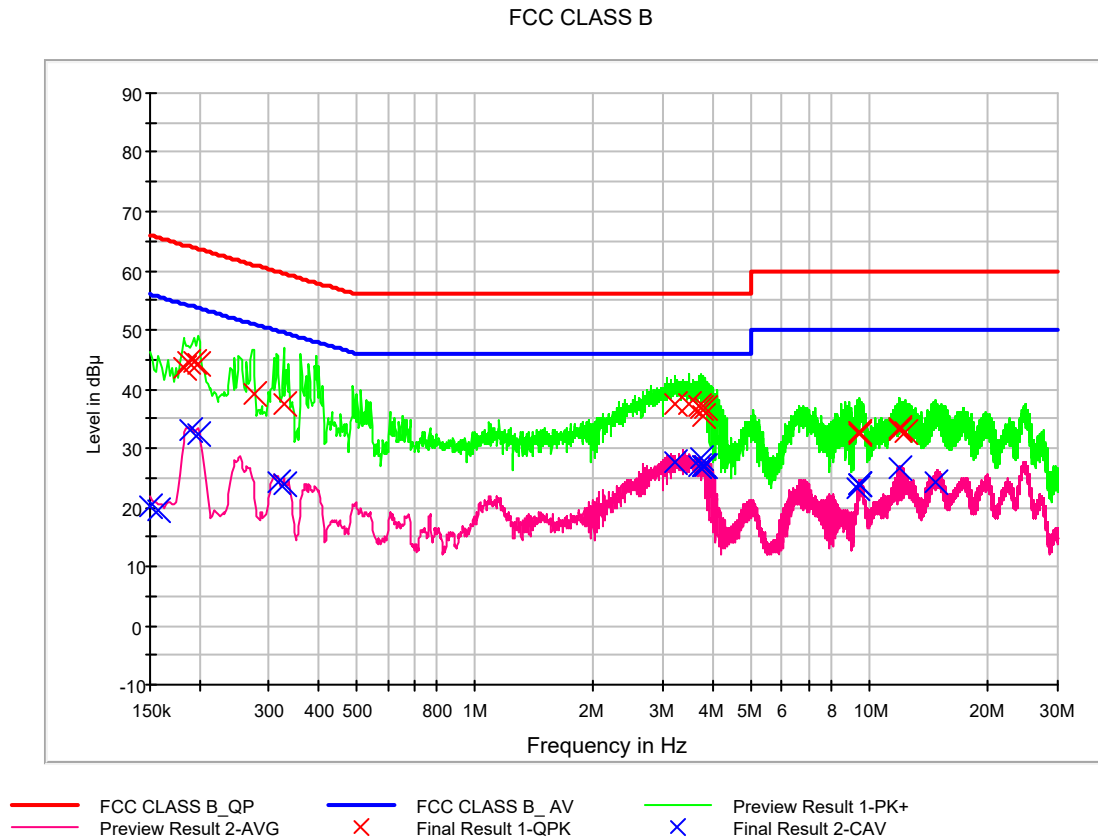
5.1 Conducted Emission Test

The test results of conducted emission at mains ports provide the following information:

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
Worst Data Cable	KSD
Kind of Test Site	Shielded Room
Temperature	21.5 °C
Relative Humidity	47.2 %
Test Date	November 07, 2017

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

**Figure 1: Conducted Emission, AC Main Port, Data Communication Mode, Line (L1)**



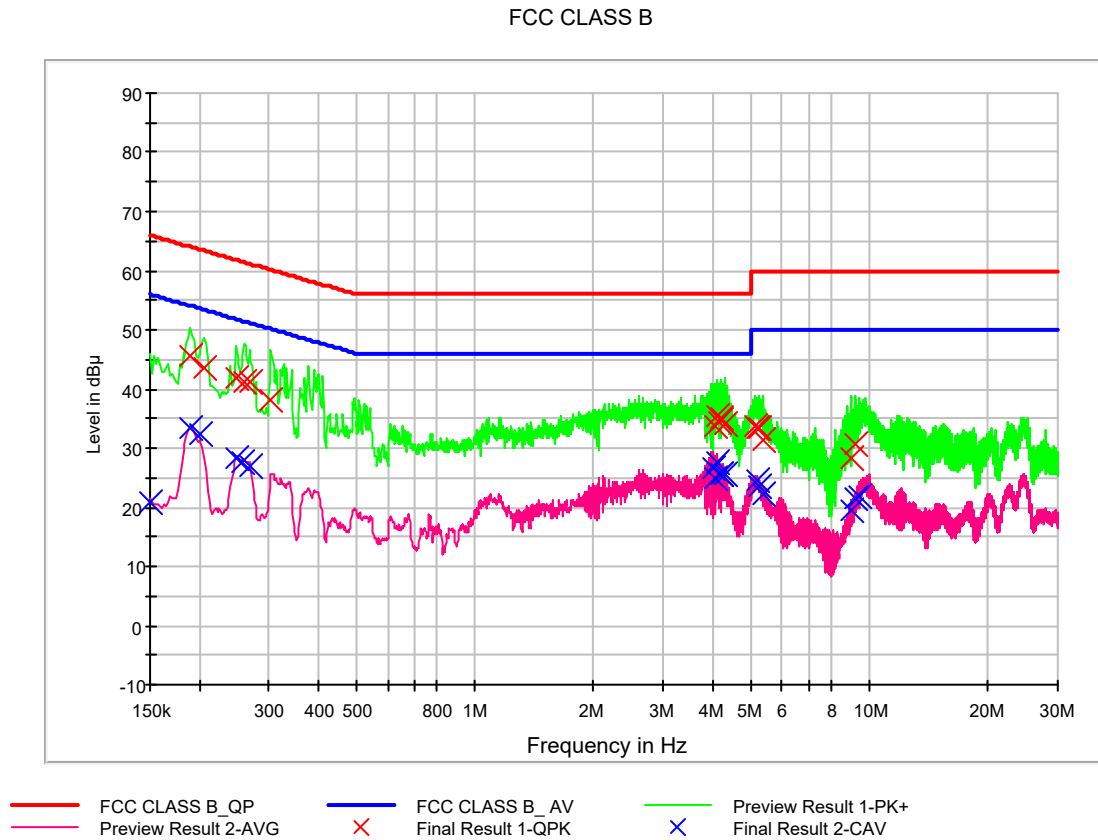
QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.182000	43.7	9.000	L1	9.6	20.7	64.4
0.188000	44.4	9.000	L1	9.6	19.7	64.1
0.194000	44.5	9.000	L1	9.6	19.3	63.9
0.198000	44.3	9.000	L1	9.6	19.4	63.7
0.274000	39.0	9.000	L1	9.6	21.9	61.0
0.328000	37.4	9.000	L1	9.6	22.1	59.5
3.214000	37.4	9.000	L1	9.8	18.6	56.0
3.488000	37.5	9.000	L1	9.8	18.5	56.0
3.688000	37.0	9.000	L1	9.8	19.0	56.0
3.720000	36.7	9.000	L1	9.8	19.3	56.0
3.770000	35.6	9.000	L1	9.8	20.4	56.0
3.830000	36.7	9.000	L1	9.8	19.3	56.0
9.402000	32.6	9.000	L1	10.1	27.4	60.0
9.458000	32.5	9.000	L1	10.1	27.5	60.0
9.462000	32.2	9.000	L1	10.1	27.8	60.0
11.900000	33.5	9.000	L1	10.1	26.5	60.0
11.904000	33.1	9.000	L1	10.1	26.9	60.0
12.268000	32.8	9.000	L1	10.1	27.2	60.0



CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	20.3	9.000	L1	9.6	35.7	56.0
0.158000	19.6	9.000	L1	9.6	36.0	55.6
0.190000	33.1	9.000	L1	9.6	21.0	54.0
0.198000	32.3	9.000	L1	9.6	21.4	53.7
0.316000	24.4	9.000	L1	9.6	25.4	49.8
0.328000	23.9	9.000	L1	9.6	25.6	49.5
3.214000	27.6	9.000	L1	9.8	18.4	46.0
3.688000	27.0	9.000	L1	9.8	19.0	46.0
3.720000	28.1	9.000	L1	9.8	17.9	46.0
3.770000	27.1	9.000	L1	9.8	18.9	46.0
3.796000	26.9	9.000	L1	9.8	19.1	46.0
3.830000	26.8	9.000	L1	9.8	19.2	46.0
9.336000	23.2	9.000	L1	10.1	26.8	50.0
9.402000	24.0	9.000	L1	10.1	26.0	50.0
9.458000	23.9	9.000	L1	10.1	26.1	50.0
9.462000	23.9	9.000	L1	10.1	26.1	50.0
11.900000	26.7	9.000	L1	10.1	23.3	50.0
14.716000	24.3	9.000	L1	10.2	25.7	50.0

**Figure 2: Conducted Emission, AC Main Port, Data Communication Mode, Line (N)**



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.190000	45.6	9.000	N	9.6	18.4	64.0
0.206000	43.5	9.000	N	9.6	19.9	63.4
0.248000	41.8	9.000	N	9.6	20.0	61.8
0.260000	41.3	9.000	N	9.6	20.1	61.4
0.268000	41.1	9.000	N	9.6	20.1	61.2
0.304000	38.2	9.000	N	9.6	21.9	60.1
4.040000	33.9	9.000	N	9.8	22.1	56.0
4.120000	35.3	9.000	N	9.8	20.7	56.0
4.150000	34.5	9.000	N	9.8	21.5	56.0
4.186000	34.6	9.000	N	9.8	21.4	56.0
4.192000	35.1	9.000	N	9.8	20.9	56.0
4.302000	34.0	9.000	N	9.8	22.0	56.0
5.134000	33.7	9.000	N	9.9	26.3	60.0
5.162000	33.5	9.000	N	9.9	26.5	60.0
5.272000	33.3	9.000	N	9.9	26.7	60.0
5.350000	31.5	9.000	N	9.9	28.5	60.0
9.040000	28.4	9.000	N	10.0	31.6	60.0
9.238000	30.7	9.000	N	10.0	29.3	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	20.8	9.000	N	9.6	35.2	56.0
0.190000	33.5	9.000	N	9.6	20.5	54.0
0.200000	32.3	9.000	N	9.6	21.4	53.6
0.248000	28.3	9.000	N	9.6	23.5	51.8
0.258000	27.5	9.000	N	9.6	24.0	51.5
0.268000	26.8	9.000	N	9.6	24.4	51.2
3.996000	26.5	9.000	N	9.8	19.5	46.0
4.040000	25.0	9.000	N	9.8	21.0	46.0
4.120000	27.5	9.000	N	9.8	18.5	46.0
4.186000	25.6	9.000	N	9.8	20.4	46.0
4.224000	25.7	9.000	N	9.8	20.3	46.0
4.302000	25.5	9.000	N	9.8	20.5	46.0
5.188000	24.6	9.000	N	9.9	25.4	50.0
5.272000	23.5	9.000	N	9.9	26.5	50.0
5.350000	22.2	9.000	N	9.9	27.8	50.0
9.040000	19.3	9.000	N	10.0	30.7	50.0
9.238000	21.5	9.000	N	10.0	28.5	50.0
9.412000	21.9	9.000	N	10.1	28.1	50.0



5.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
Worst Data Cable	KSD
Kind of Test Site	3 m semi anechoic chamber
Temperature	22.7 °C
Relative Humidity	50.7 %
Test Date	November 02, 2017

Frequency (MHz)	Quasi Peak (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.781166	30.9	100.0	V	292.0	21.8	9.1	40.0
54.189600	31.4	100.0	V	132.0	23.2	8.6	40.0
84.614400	32.3	400.0	H	278.0	18.2	7.7	40.0
125.007200	33.5	100.0	V	258.0	21.5	10.0	43.5
265.612800	34.2	125.0	H	129.0	22.8	11.8	46.0
600.019200	40.6	115.0	V	1.0	31.3	5.4	46.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



-For Measurement Above 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	2 480 MHz
Upper Frequency	1 GHz to 12.4 GHz
Operation Mode	Data Communication mode
Worst Data Cable	KSD
Kind of Test Site	3 m semi anechoic chamber
Temperature	22.4 °C
Relative Humidity	50.5 %
Test Date	November 03, 2017

Frequency (MHz)	Peak (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1400.020000	46.3	291.7	H	178.0	-12.9	27.7	74.0
1499.010000	46.7	322.5	V	0.0	-12.6	27.3	74.0
1986.820000	48.4	111.5	V	51.0	-11.8	25.6	74.0
2590.920000	52.3	290.6	V	62.0	-9.5	21.7	74.0
4486.765000	43.3	99.8	V	0.0	-5.4	30.7	74.0
5994.480000	48.2	349.7	V	49.0	-2.2	25.8	74.0

Frequency (MHz)	CAverage (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1400.020000	44.5	291.7	H	178.0	-12.9	9.5	54.0
1499.010000	40.5	322.5	V	0.0	-12.6	13.5	54.0
1986.820000	32.8	111.5	V	51.0	-11.8	21.2	54.0
2590.920000	33.2	290.6	V	62.0	-9.5	20.8	54.0
4486.765000	28.5	99.8	V	0.0	-5.4	25.5	54.0
5994.480000	33.6	349.7	V	49.0	-2.2	20.4	54.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



6. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>CAL Date</u>
<u>Conducted Emission</u>					
☐ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	06.20.2017
☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100033	1 year	06.27.2017
☒ LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	05.22.2017
☒ LISN	Rohde & Schwarz	ENV216	100073	1 year	12.23.2016
☐ LISN	Rohde & Schwarz	ENV216	100073	1 year	07.18.2017
☒ Software	Rohde & Schwarz	EMC32 VER8.54.0	-	-	-
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
☒ EMI Test Receiver	Rohde & Schwarz	ESU40	100524	1 year	08.16.2017
☒ Trilog Antenna	Schwarzbeck	VULB 9168	760	2 year	04.06.2017
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
☒ Turn Table	INNCO Systems	1060-2M	-	N/A	-
☒ Turn Table controller	INNCO Systems	CO2000	-	N/A	-
☐ EMI Test Receiver	Rohde & Schwarz	ESU26	100241	1 year	08.16.2017
☐ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
☒ Software	Rohde & Schwarz	EMC32 VER8.40.0	-	-	-
-For measurement above 1 GHz					
☒ EMI Test Receiver	Rohde & Schwarz	ESU40	100524	1 year	08.16.2017
☒ Antenna master	INNCO Systems	MA4000-XP-ET	-	N/A	-
☒ Antenna master controller	INNCO Systems	CO 3000	CO 3000/870/ 35990515/L	N/A	-
☒ Turn Table	INNCO Systems	1060-2M	-	N/A	-
☒ Turn Table controller	INNCO Systems	CO2000	-	N/A	-
☒ Power Amplifier	CERNEX	CBLU5183530	24348	1 year	06.01.2017
☐ Power Amplifier	CERNEX	CBL18265035	21873	1 year	01.19.2017
☐ Power Amplifier	CERNEX	CBL26405040	19660	1 year	07.11.2017
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	10.12.2016
☐ Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170124	2 year	04.25.2017
☐ Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
☐ Power Amplifier	CERNEX	CBLU1183540	21691	1 year	06.28.2017
☐ Antenna master	HD GmbH	MA240	240/520	N/A	-
☐ Horn Antenna	Schwarzbeck	BBHA 9120D	1300	2 year	06.30.2017
☐ EMI Test Receiver	Rohde & Schwarz	ESU26	100241	1 year	08.16.2017
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
☒ Software	Rohde & Schwarz	EMC32 VER8.40.0	-	-	-



7. CONCLUSION

The data collected shows that the **EUT Type: GSM/WCDMA/LTE phone with Bluetooth and WLAN, Model: LM-X210APM, FCC ID: ZNFX210APM** complies with §15.107 and §15.109 of the FCC rules.



APPENDIX A. TEST SETUP PHOTOGRAPHS

Please refer to Appendix A