



# Variant FCC Test Report

**APPLICANT** : LG Electronics Mobile Comm USA  
**EQUIPMENT** : Smart phone  
**BRAND NAME** : LG  
**MODEL NAME** : LG-X220m  
**FCC ID** : ZNFX220M  
**STANDARD** : FCC 47 CFR FCC Part 15 Subpart B  
**CLASSIFICATION** : Certification

This is a variant report which is only valid together with the original report. The product was received on Dec. 03, 2015 and testing was completed on Jan. 04, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Accessories and Support Equipment ..... 7

    1.6. Modification of EUT ..... 7

    1.7. Test Location ..... 8

    1.8. Applicable Standards ..... 8

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1. Test Mode ..... 9

    2.2. Connection Diagram of Test System ..... 11

    2.3. Support Unit used in test configuration and system ..... 12

    2.4. EUT Operation Test Setup ..... 13

**3. TEST RESULT ..... 14**

    3.1. Test of AC Conducted Emission Measurement ..... 14

    3.2. Test of Radiated Emission Measurement ..... 22

**4. LIST OF MEASURING EQUIPMENT ..... 28**

**5. UNCERTAINTY OF EVALUATION ..... 29**

**APPENDIX A. PRODUCT EQUALITY DECLARATION**





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 7.07 dB at 2.720 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.45 dB at 30.270 MHz for Quasi-Peak



# 1. General Description

## 1.1. Applicant

**LG Electronics Mobile Comm USA**  
1000 Sylvan Avenue Englewood Cliffs, NJ 07632

## 1.2. Manufacturer

**Arima Communications Corp.**  
6F, No.866,Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart phone
Brand Name	LG
Model Name	LG-X220m
FCC ID	ZNFX220M
EUT supports Radios application	GSM/GPRS/EGPRS(Downlink Only)/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conduction: 357133070005437 Radiation: 357133070005254
HW Version	5542MB-003
SW Version	LGX220m-00-V10a-SCA-XXX-DEC-16-2015+0
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850 : 824.2 MHz ~ 848.8 MHz GSM1900 : 1850.2 MHz ~ 1909.8MHz WCDMA Band V : 826.4 MHz ~ 846.6 MHz WCDMA Band II : 1852.4 MHz ~ 1907.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Rx Frequency</b>	GSM850 : 869.2 MHz ~ 893.8 MHz GSM1900 : 1930.2 MHz ~ 1989.8 MHz WCDMA Band V : 871.4 MHz ~ 891.6 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz
<b>Antenna Type</b>	WWAN : IFA Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GPS: IFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK/(MCS 5-9): 8PSK(Downlink Only) WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (16QAM uplink is not supported) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GPS : BPSK



### 1.5. Accessories and Support Equipment

Specification of Accessory				
AC Adapter	Brand Name	LG	P/N	SSAD0038201(STA-U17WD)
	Power Rating	I/P: 100-240Vac, 0.2A, O/P: 5.1Vdc, 0.7A		
Battery	Brand Name	LG	P/N	EAC62378301(BL-41ZH)
	Power Rating	3.8Vdc, 1900mAh		
USB Cable	Brand Name	BROAD	P/N	EAD62377902(LG0108)
	Signal Line Type	0.99m shielded without core		
Earphone	Brand Name	BUJEON	P/N	EAB64228801(BHS300-K0)
	Signal Line Type	1.10meter, non-shielded cable without core		

### 1.6. Modification of EUT

No modifications are made to the EUT during all test items.



### 1.7. Test Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	CO01-KS	03CH02-KS	418269

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	☒
2.	Data application transferred mode (EUT connected with notebook)	☒	☒	☒


**Abbreviations:**

- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz




Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	Mode 1: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera(Front) <Fig. 1> Mode 2: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx <Fig. 2>
Radiated Emissions < 1GHz	1/2	Mode 1: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 <Fig. 1> Mode 2: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx <Fig. 2>
Radiated Emissions ≥ 1GHz	1/2	Mode 1: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 <Fig. 1> Mode 2: WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx <Fig. 2>
<b>Remark:</b> <ol style="list-style-type: none"> <li>The worst case of AC is mode 1; and the USB Link mode of AC is mode 2, the test data of these modes were reported.</li> <li>The worst case of RE &lt; 1G is mode 1; and the USB Link mode of RE is mode 2, the test data of these modes were reported.</li> <li>Data Link with Notebook means data application transferred mode between EUT and Notebook.</li> </ol>		

## 2.2. Connection Diagram of Test System

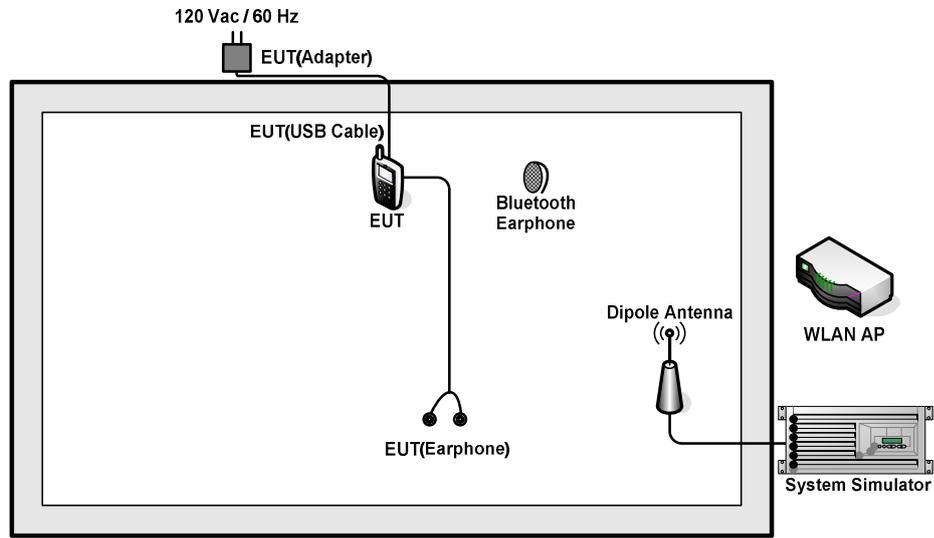

<Fig.1>

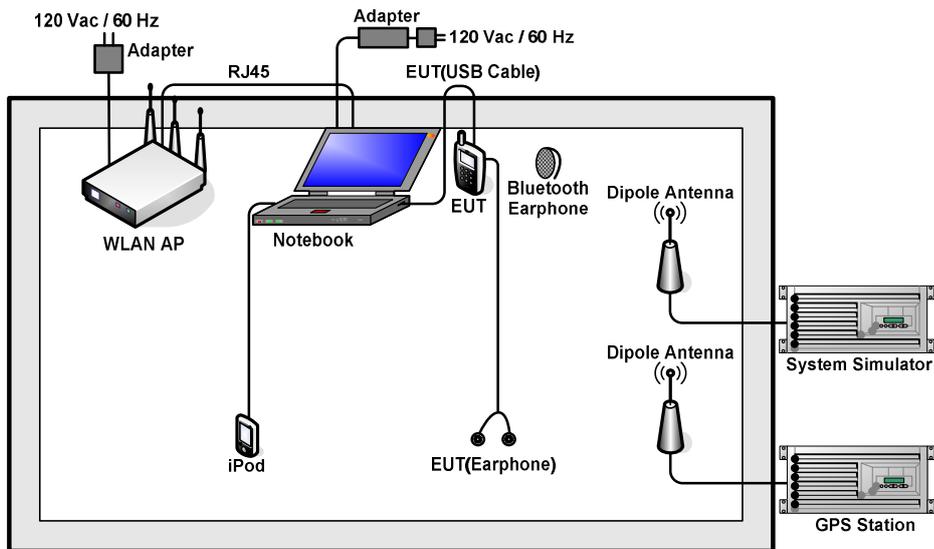

<Fig.2>



### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	Latitude3440	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A
6.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
7.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
8.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
9.	iPod	Apple	A1199	FCC DoC	Shielded, 1.2 m	N/A
10.	SD Card	SanDisk	Uitra	N/A	N/A	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA idle mode during the testing. The EUT was synchronized to the BCCH, and was in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Execute "Video Player" to play MPEG4 files.
3. Turn on camera to capture images.
4. Turn on GPS function to make the EUT receive continuous signals from GPS station.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

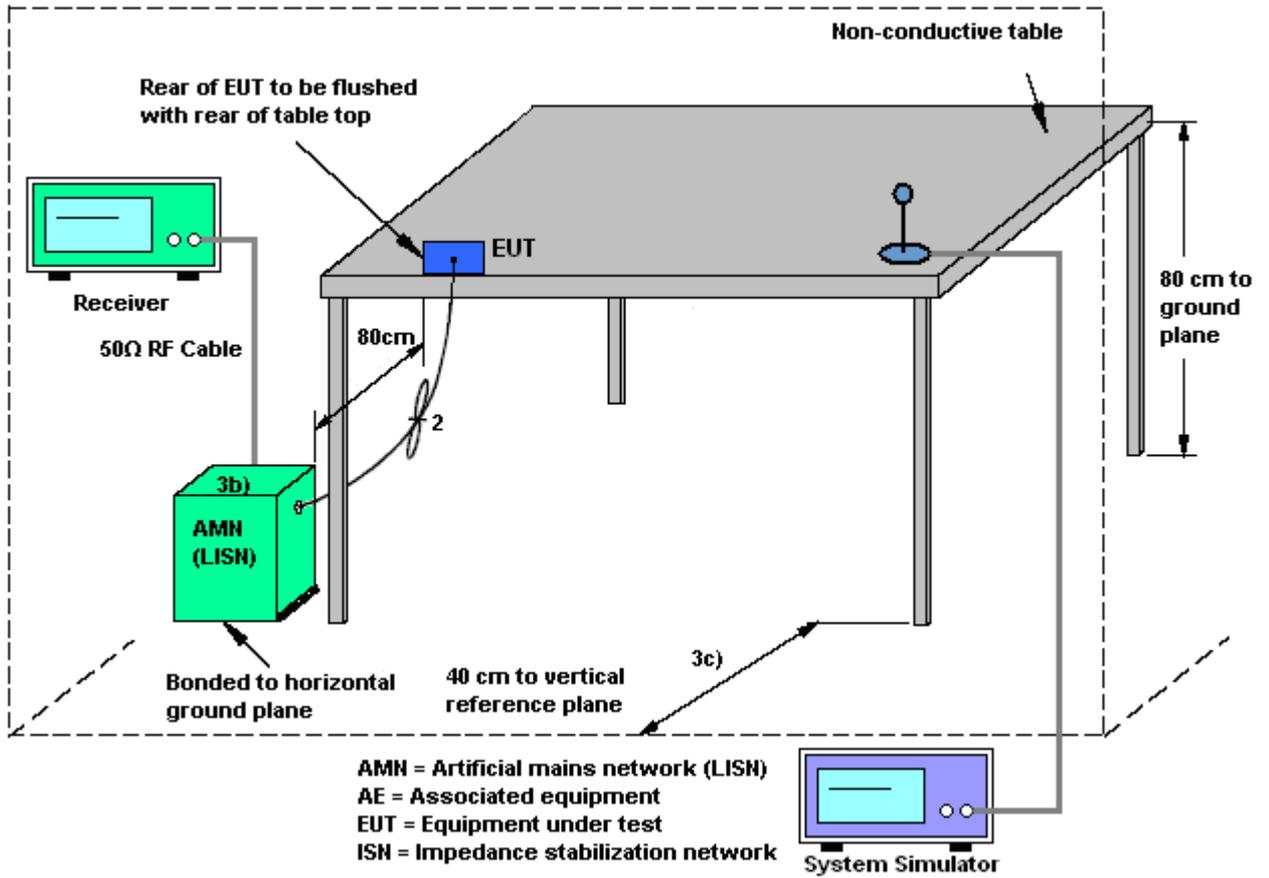



**3.1.5 Test Result of AC Conducted Emission**

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	20~22°C
<b>Test Engineer :</b>	Morris Li	<b>Relative Humidity :</b>	32~34%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line
<b>Function Type :</b>	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera(Front)		

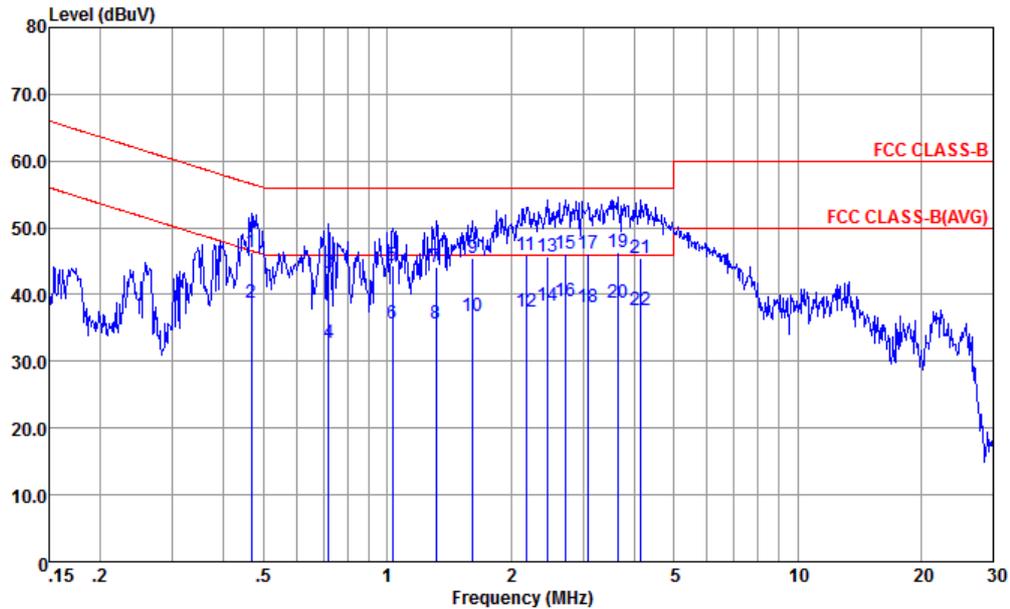


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-20151024 LINE  
 Project : (FC) 5D0307  
 mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.47	46.29	-10.29	56.58	35.90	0.23	10.16	QP
2	0.47	38.79	-7.79	46.58	28.40	0.23	10.16	Average
3	0.72	43.29	-12.71	56.00	32.90	0.24	10.15	QP
4	0.72	32.79	-13.21	46.00	22.40	0.24	10.15	Average
5	1.03	44.28	-11.72	56.00	33.89	0.25	10.14	QP
6	1.03	35.68	-10.32	46.00	25.29	0.25	10.14	Average
7	1.32	44.16	-11.84	56.00	33.80	0.22	10.14	QP
8	1.32	35.56	-10.44	46.00	25.20	0.22	10.14	Average
9	1.62	45.54	-10.46	56.00	35.20	0.20	10.14	QP
10	1.62	36.74	-9.26	46.00	26.40	0.20	10.14	Average
11	2.18	45.93	-10.07	56.00	35.61	0.18	10.14	QP
12	2.18	37.53	-8.47	46.00	27.21	0.18	10.14	Average
13	2.46	45.63	-10.37	56.00	35.30	0.18	10.15	QP
14	2.46	38.23	-7.77	46.00	27.90	0.18	10.15	Average
15	2.72	46.23	-9.77	56.00	35.90	0.18	10.15	QP
16 *	2.72	38.93	-7.07	46.00	28.60	0.18	10.15	Average
17	3.09	46.14	-9.86	56.00	35.81	0.18	10.15	QP
18	3.09	38.14	-7.86	46.00	27.81	0.18	10.15	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	20~22°C
<b>Test Engineer :</b>	Morris Li	<b>Relative Humidity :</b>	32~34%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line
<b>Function Type :</b>	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera(Front)		

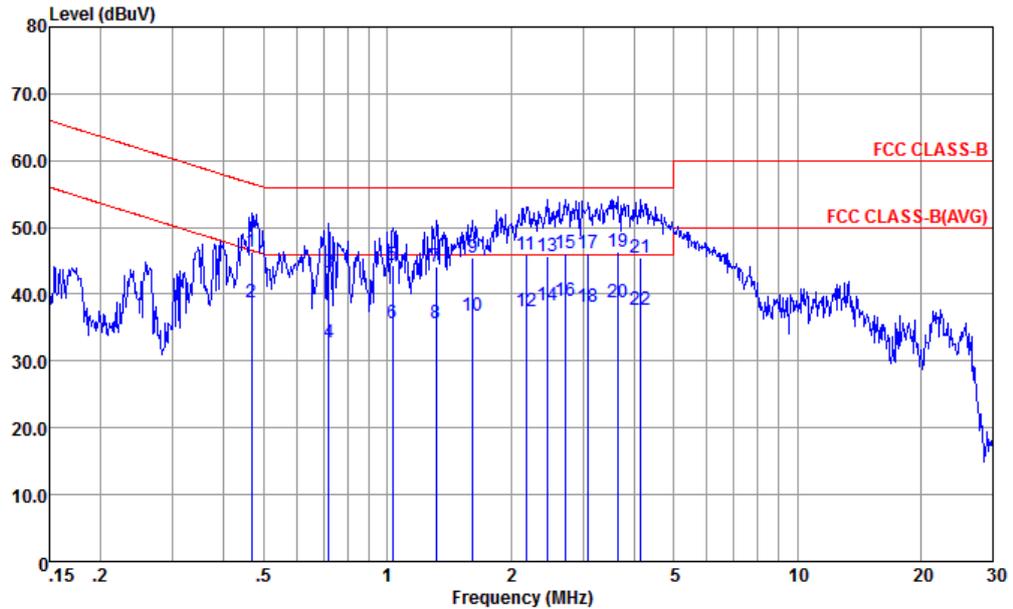


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-20151024 LINE  
 Project : (FC) 5D0307  
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
19	3.64	46.25	-9.75	56.00	35.90	0.19	10.16	QP
20	3.64	38.75	-7.25	46.00	28.40	0.19	10.16	Average
21	4.16	45.56	-10.44	56.00	35.20	0.19	10.17	QP
22	4.16	37.56	-8.44	46.00	27.20	0.19	10.17	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	20~22°C
<b>Test Engineer :</b>	Morris Li	<b>Relative Humidity :</b>	32~34%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera(Front)		

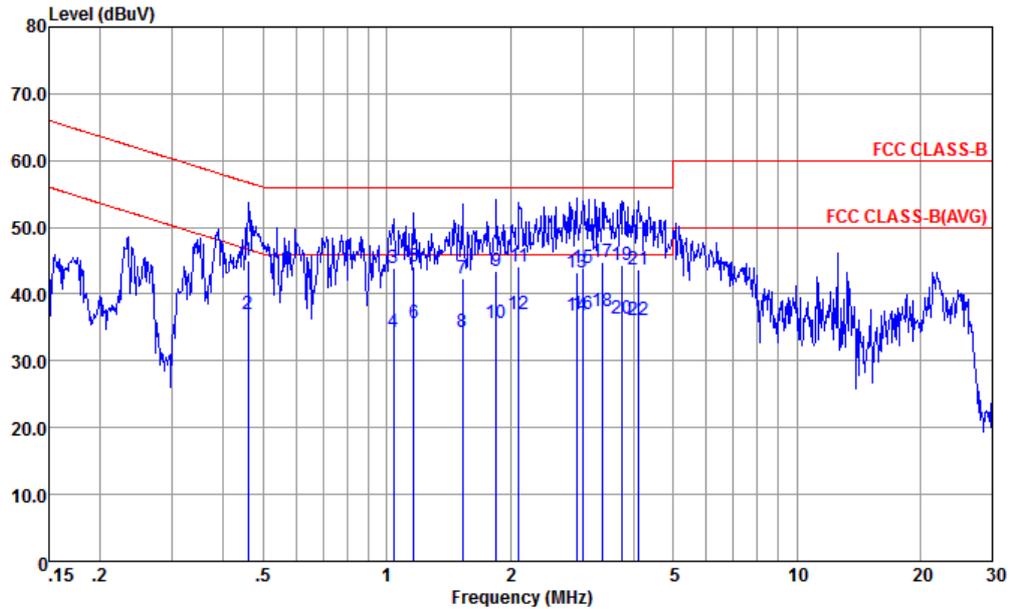


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL  
 Project : (FC) 5D0307  
 mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.46	44.99	-11.72	56.71	34.50	0.32	10.17	QP
2	0.46	36.99	-9.72	46.71	26.50	0.32	10.17	Average
3	1.04	43.81	-12.19	56.00	33.30	0.37	10.14	QP
4	1.04	34.31	-11.69	46.00	23.80	0.37	10.14	Average
5	1.17	44.11	-11.89	56.00	33.60	0.37	10.14	QP
6	1.17	35.61	-10.39	46.00	25.10	0.37	10.14	Average
7	1.53	42.32	-13.68	56.00	31.80	0.38	10.14	QP
8	1.53	34.32	-11.68	46.00	23.80	0.38	10.14	Average
9	1.85	43.42	-12.58	56.00	32.90	0.38	10.14	QP
10	1.85	35.62	-10.38	46.00	25.10	0.38	10.14	Average
11	2.10	44.02	-11.98	56.00	33.50	0.38	10.14	QP
12	2.10	36.92	-9.08	46.00	26.40	0.38	10.14	Average
13	2.90	43.12	-12.88	56.00	32.60	0.37	10.15	QP
14	2.90	36.82	-9.18	46.00	26.30	0.37	10.15	Average
15	3.01	43.83	-12.17	56.00	33.31	0.37	10.15	QP
16	3.01	36.93	-9.07	46.00	26.41	0.37	10.15	Average
17	3.36	44.83	-11.17	56.00	34.30	0.37	10.16	QP
18 *	3.36	37.43	-8.57	46.00	26.90	0.37	10.16	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	20~22°C
<b>Test Engineer :</b>	Morris Li	<b>Relative Humidity :</b>	32~34%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera(Front)		

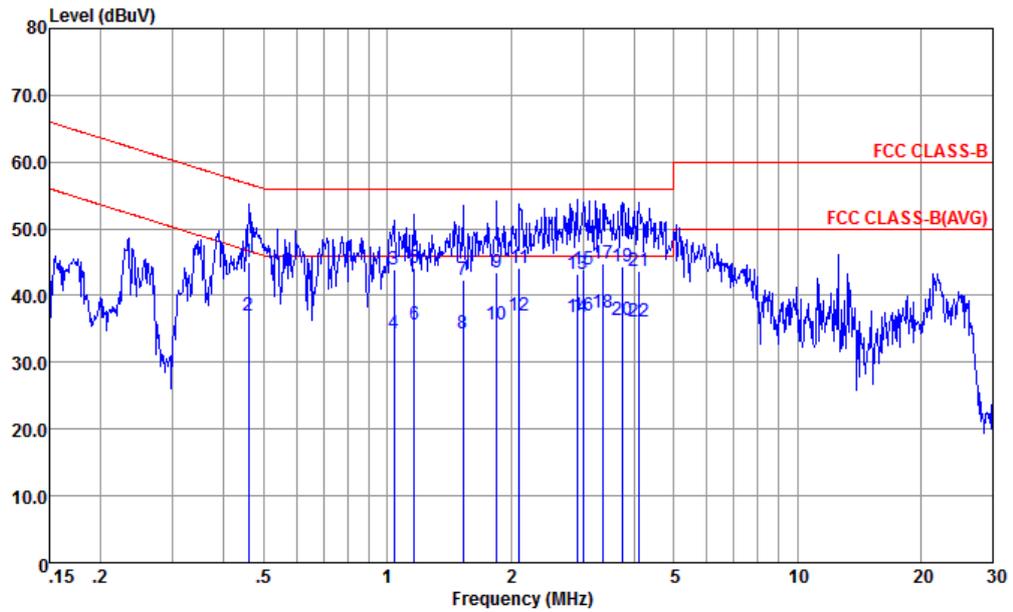


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL  
 Project : (FC) 5D0307  
 mode : Mode 1

	Over	Limit	Read	LISN	Cable			
Freq	Level	Limit	Line	Level	Factor	Loss		
MHz	dBuV	dB	dBuV	dBuV	dB	dB		
19	3.76	44.43	-11.57	56.00	33.90	0.37	10.16	QP
20	3.76	36.43	-9.57	46.00	25.90	0.37	10.16	Average
21	4.11	43.73	-12.27	56.00	33.20	0.36	10.17	QP
22	4.11	36.13	-9.87	46.00	25.60	0.36	10.17	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	20~22°C
<b>Test Engineer :</b>	Morris Li	<b>Relative Humidity :</b>	32~34%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Line
<b>Function Type :</b>	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

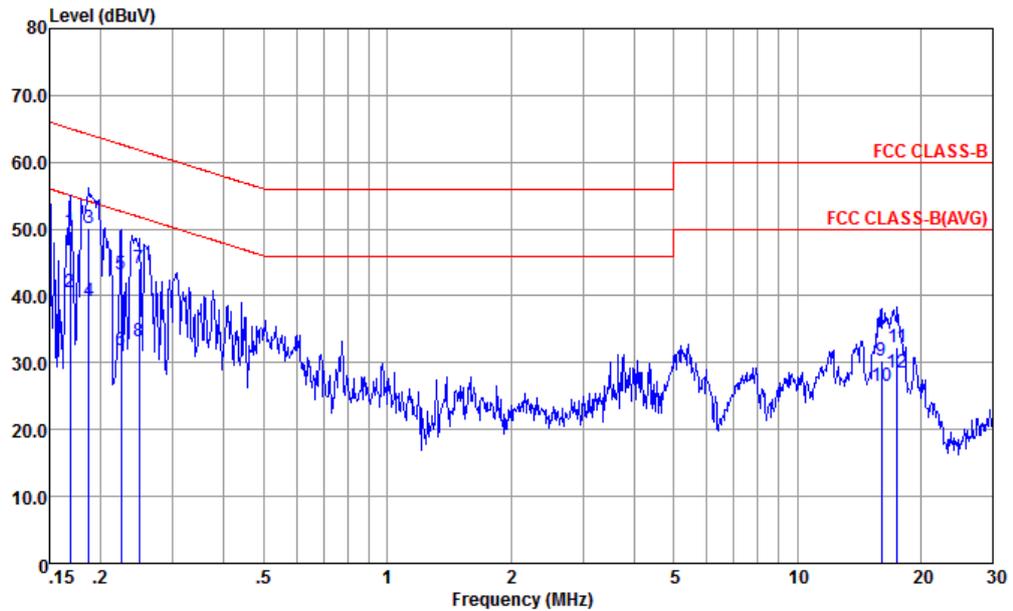


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-20151024 LINE  
 Project : (FC) 5D0307  
 mode : Mode 2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	49.63	-15.40	65.03	39.10	0.41	10.12	QP
2	0.17	40.63	-14.40	55.03	30.10	0.41	10.12	Average
3 *	0.19	50.21	-13.94	64.15	39.80	0.29	10.12	QP
4	0.19	39.21	-14.94	54.15	28.80	0.29	10.12	Average
5	0.22	43.25	-19.41	62.66	32.90	0.22	10.13	QP
6	0.22	31.85	-20.81	52.66	21.50	0.22	10.13	Average
7	0.25	44.16	-17.66	61.82	33.80	0.22	10.14	QP
8	0.25	33.16	-18.66	51.82	22.80	0.22	10.14	Average
9	16.05	30.28	-29.72	60.00	19.60	0.26	10.42	QP
10	16.05	26.48	-23.52	50.00	15.80	0.26	10.42	Average
11	17.57	32.33	-27.67	60.00	21.60	0.27	10.46	QP
12	17.57	28.53	-21.47	50.00	17.80	0.27	10.46	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	20~22°C
<b>Test Engineer :</b>	Morris Li	<b>Relative Humidity :</b>	32~34%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b>	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

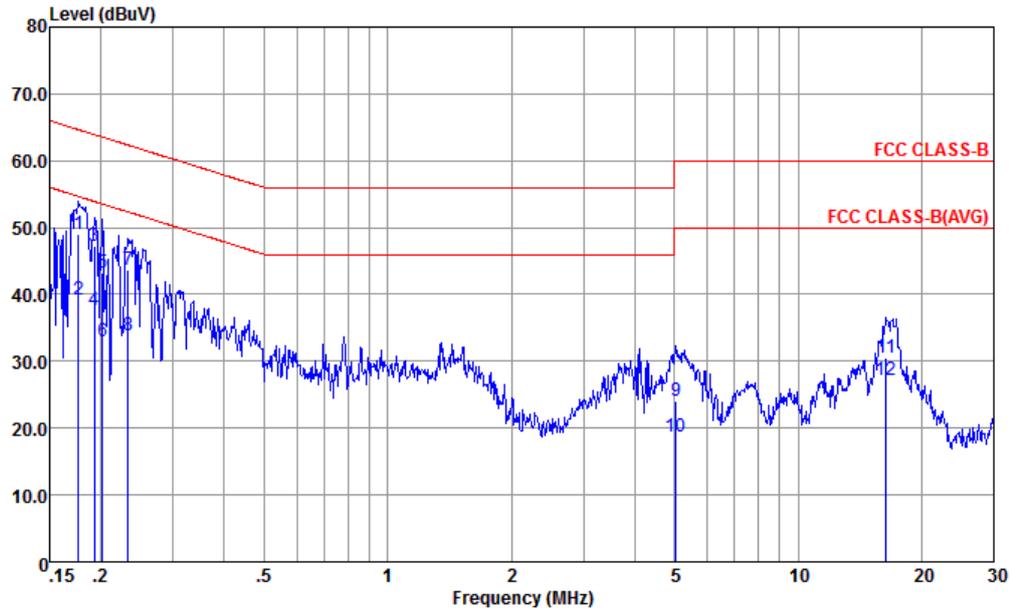

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL  
 Project : (FC) 5D0307  
 mode : Mode 2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18	49.03	-15.61	64.64	38.60	0.31	10.12	QP
2 *	0.18	39.33	-15.31	54.64	28.90	0.31	10.12	Average
3	0.19	47.23	-16.70	63.93	36.80	0.31	10.12	QP
4	0.19	37.63	-16.30	53.93	27.20	0.31	10.12	Average
5	0.20	43.24	-20.30	63.54	32.80	0.31	10.13	QP
6	0.20	33.04	-20.50	53.54	22.60	0.31	10.13	Average
7	0.23	43.65	-18.70	62.35	33.20	0.31	10.14	QP
8	0.23	33.95	-18.40	52.35	23.50	0.31	10.14	Average
9	5.03	24.14	-35.86	60.00	13.60	0.36	10.18	QP
10	5.03	18.74	-31.26	50.00	8.20	0.36	10.18	Average
11	16.40	30.59	-29.41	60.00	19.90	0.26	10.43	QP
12	16.40	27.09	-22.91	50.00	16.40	0.26	10.43	Average



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

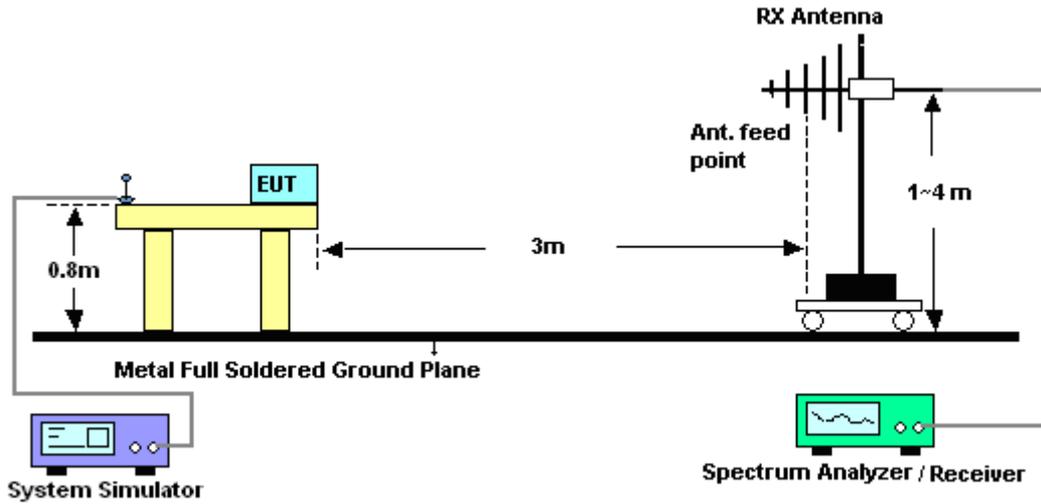


For radiated emissions above 1GHz

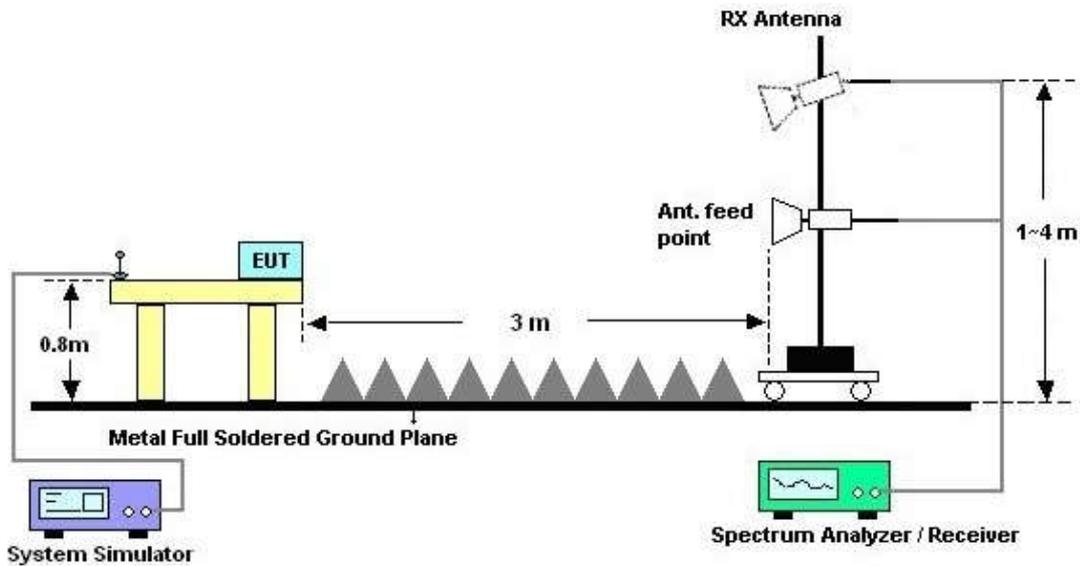



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Jack Wang	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4		
Remark :	#7 is system simulator signal which can be ignored.		

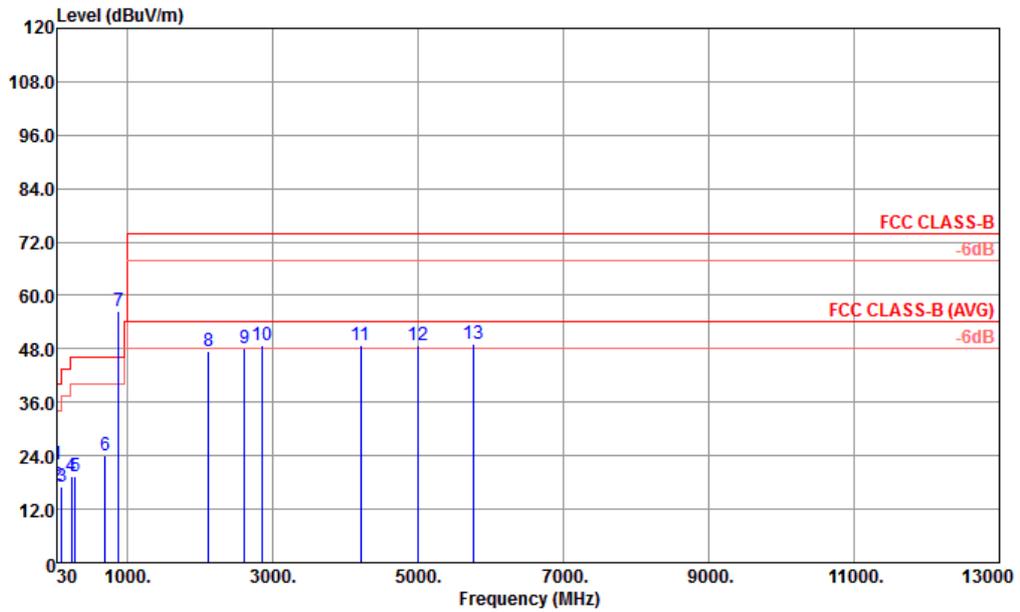


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF\_ANT\_37879 HORIZONTAL  
 Project : (FC)5D0307  
 Mode : 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1	31.08	22.09	-17.91	40.00	33.48	18.71	0.96	31.06	122	54	Peak	HORIZONTAL
2	39.45	17.49	-22.51	40.00	33.01	14.30	1.08	30.90	---	---	Peak	HORIZONTAL
3	101.01	17.10	-26.40	43.50	34.54	11.31	1.65	30.40	---	---	Peak	HORIZONTAL
4	230.88	19.41	-26.59	46.00	36.18	11.22	2.47	30.46	---	---	Peak	HORIZONTAL
5	277.86	19.27	-26.73	46.00	34.42	12.61	2.74	30.50	---	---	Peak	HORIZONTAL
6	692.70	24.12	-21.88	46.00	29.98	19.91	4.62	30.39	---	---	Peak	HORIZONTAL
7 *	881.70	56.49			59.89	22.08	5.05	30.53	---	---	Peak	HORIZONTAL
8	2122.00	47.34	-26.66	74.00	42.76	30.98	5.80	32.20	---	---	Peak	HORIZONTAL
9	2608.00	48.29	-25.71	74.00	40.51	31.75	6.48	30.45	---	---	Peak	HORIZONTAL
10	2846.00	48.69	-25.31	74.00	38.99	32.50	6.77	29.57	---	---	Peak	HORIZONTAL
11	4206.00	48.71	-25.29	74.00	35.57	34.79	8.52	30.17	---	---	Peak	HORIZONTAL
12	5007.00	48.79	-25.21	74.00	38.34	35.00	8.88	33.43	---	---	Peak	HORIZONTAL
13	5772.00	49.15	-24.85	74.00	39.79	35.32	9.66	35.62	---	---	Peak	HORIZONTAL



Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Jack Wang	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4		
Remark :	#7 is system simulator signal which can be ignored.		

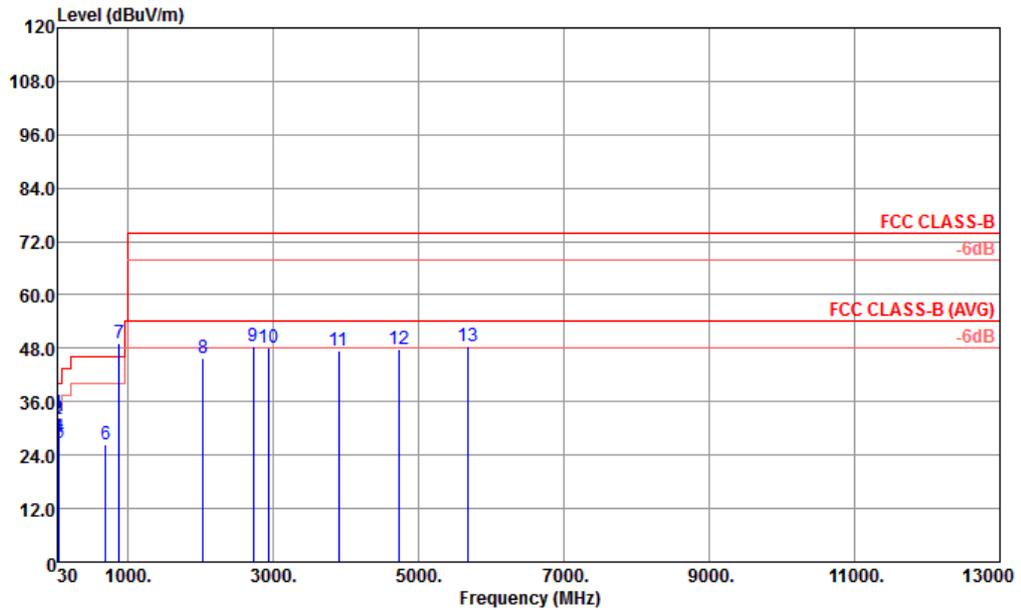


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF\_ANT\_37879 VERTICAL  
 Project : (FC)5D0307  
 Mode : 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.27	33.55	-6.45	40.00	44.50	19.20	0.95	31.10	100	181	QP VERTICAL
2	41.61	32.11	-7.89	40.00	48.60	13.28	1.09	30.86	100	95	QP VERTICAL
3	44.58	32.55	-7.45	40.00	50.49	11.75	1.11	30.80	---	---	Peak VERTICAL
4	54.57	27.92	-12.08	40.00	49.77	7.66	1.19	30.70	---	---	Peak VERTICAL
5	60.51	26.82	-13.18	40.00	49.98	6.10	1.34	30.60	---	---	Peak VERTICAL
6	692.70	26.27	-19.73	46.00	32.13	19.91	4.62	30.39	---	---	Peak VERTICAL
7 *	880.30	49.23			52.66	22.05	5.04	30.52	---	---	Peak VERTICAL
8	2038.00	45.96	-28.04	74.00	42.20	30.85	5.69	32.78	---	---	Peak VERTICAL
9	2724.00	48.47	-25.53	74.00	39.66	32.11	6.62	29.92	---	---	Peak VERTICAL
10	2930.00	47.98	-26.02	74.00	38.18	32.67	6.86	29.73	---	---	Peak VERTICAL
11	3900.00	47.54	-26.46	74.00	34.47	34.42	8.37	29.72	---	---	Peak VERTICAL
12	4725.00	47.79	-26.21	74.00	36.34	34.83	8.65	32.03	---	---	Peak VERTICAL
13	5682.00	48.52	-25.48	74.00	39.10	35.23	9.59	35.40	---	---	Peak VERTICAL



Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Jack Wang	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

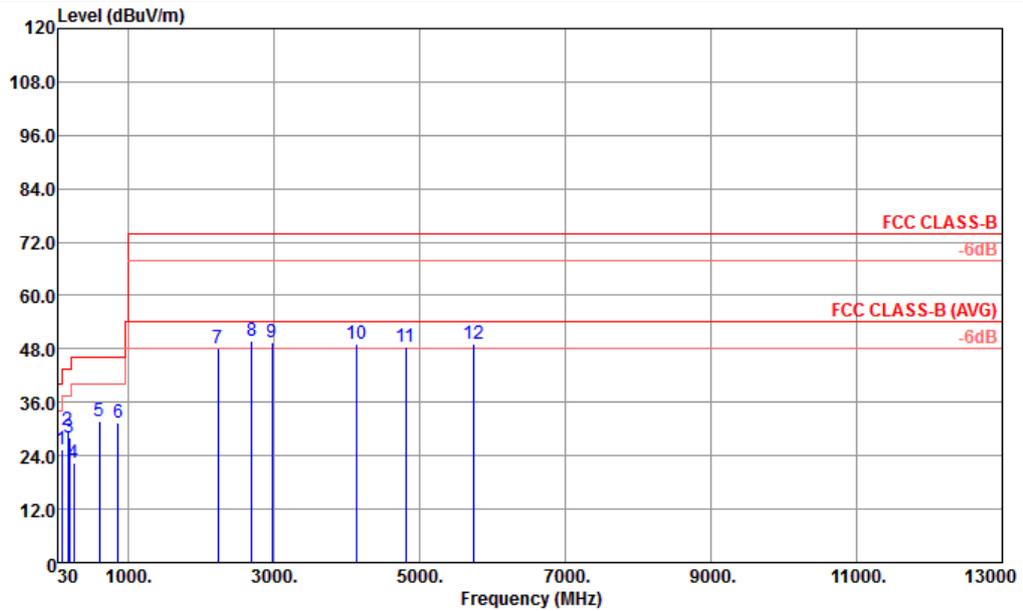


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF\_ANT\_37879 HORIZONTAL  
 Project : (FC)5D0307  
 Mode : 2

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	89.94	25.53	-17.97	43.50	44.27	10.20	1.56	30.50	---	---	Peak HORIZONTAL
2	166.89	29.91	-13.59	43.50	47.09	11.07	2.15	30.40	130	210	Peak HORIZONTAL
3	189.84	28.18	-15.32	43.50	46.13	10.17	2.28	30.40	---	---	Peak HORIZONTAL
4	255.18	22.28	-23.72	46.00	37.93	12.19	2.66	30.50	---	---	Peak HORIZONTAL
5	597.50	31.86	-14.14	46.00	39.08	18.81	4.18	30.21	---	---	Peak HORIZONTAL
6	862.80	31.44	-14.56	46.00	35.43	21.46	5.00	30.45	---	---	Peak HORIZONTAL
7	2234.00	47.99	-26.01	74.00	42.45	31.14	5.96	31.56	---	---	Peak HORIZONTAL
8	2694.00	49.80	-24.20	74.00	41.19	32.05	6.57	30.01	---	---	Peak HORIZONTAL
9	2978.00	49.58	-24.42	74.00	39.74	32.73	6.91	29.80	---	---	Peak HORIZONTAL
10	4137.00	48.98	-25.02	74.00	35.77	34.75	8.52	30.06	---	---	Peak HORIZONTAL
11	4806.00	48.34	-25.66	74.00	37.25	34.88	8.71	32.50	---	---	Peak HORIZONTAL
12	5736.00	49.05	-24.95	74.00	39.68	35.29	9.63	35.55	---	---	Peak HORIZONTAL



Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Jack Wang	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	WCDMA Band II Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

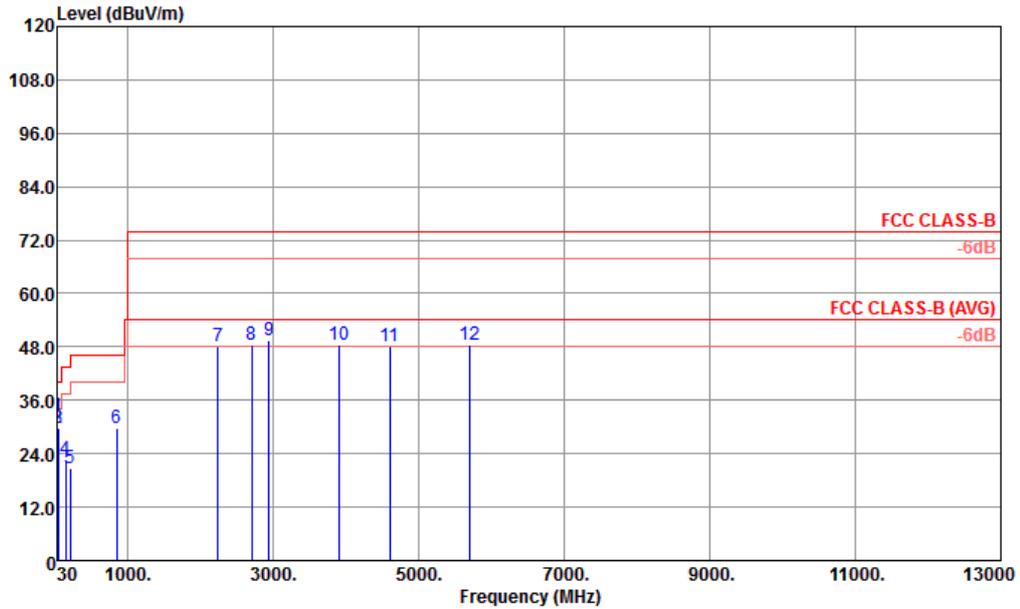

Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m LF\_ANT\_37879 VERTICAL  
 Project : (FC)5D0307  
 Mode : 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1	30.54	32.41	-7.59	40.00	43.80	18.71	0.96	31.06	125	130	QP	VERTICAL
2	41.07	29.60	-10.40	40.00	45.60	13.79	1.09	30.88	---	---	Peak	VERTICAL
3	46.74	29.70	-10.30	40.00	48.64	10.74	1.12	30.80	---	---	Peak	VERTICAL
4	153.12	22.71	-20.79	43.50	39.47	11.59	2.05	30.40	---	---	Peak	VERTICAL
5	208.20	20.73	-22.77	43.50	38.59	10.20	2.36	30.42	---	---	Peak	VERTICAL
6	853.70	29.87	-16.13	46.00	34.18	21.13	4.98	30.42	---	---	Peak	VERTICAL
7	2240.00	47.98	-26.02	74.00	42.44	31.14	5.96	31.56	---	---	Peak	VERTICAL
8	2706.00	48.61	-25.39	74.00	40.00	32.05	6.57	30.01	---	---	Peak	VERTICAL
9	2944.00	49.56	-24.44	74.00	39.76	32.67	6.86	29.73	---	---	Peak	VERTICAL
10	3906.00	48.59	-25.41	74.00	35.52	34.42	8.37	29.72	---	---	Peak	VERTICAL
11	4605.00	48.14	-25.86	74.00	36.19	34.76	8.57	31.38	---	---	Peak	VERTICAL
12	5691.00	48.45	-25.55	74.00	39.05	35.25	9.59	35.44	---	---	Peak	VERTICAL



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Sep. 10, 2015	Jan. 03, 2016	Sep. 09, 2016	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz; Max 30dBm	Sep. 10, 2015	Jan. 03, 2016	Sep. 09, 2016	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz-2GHz	Sep. 12, 2015	Jan. 03, 2016	Sep. 11, 2016	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 07, 2015	Jan. 03, 2016	Nov. 06, 2016	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz ~1000MHz / 32 dB	May 04, 2015	Jan. 03, 2016	May 03, 2016	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 24, 2015	Jan. 03, 2016	Oct. 23, 2016	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Jan. 03, 2016	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 03, 2016	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 03, 2016	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 04, 2015	Jan. 04, 2016	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Jan. 04, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Jan. 04, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Jan. 04, 2016	Oct. 23, 2016	Conduction (CO01-KS)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------



## **Appendix A. Product Equality Declaration**

# Arima Communications Corp.

6F,No.866,Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan  
Tel: 886-2-8227-7755

Date: March 3, 2016

## Product Equality Declaration

(Declaration of equality of a product variant with a previously assessed original product. To be signed in the name of the company that is responsible for the product variant)

We, LG Electronics Inc, declare on our sole responsibility for that the variant product –X220m is in all relevant parts identical to its original product—X220g, except for the differences listed below:

(Below is differences description example for your reference)

### 1. HW differences (from X220g to X220m)

#### 1) For Mode version SW auto detection:

From


R101: NC, R102: 100K, R103: NC, R104: 100K, R111: NC, R112: 100K

To


R101: 100K, R102: NC, R103: 100K, R104: NC, R111: 100K, R112: NC

Schematic:


X220g:

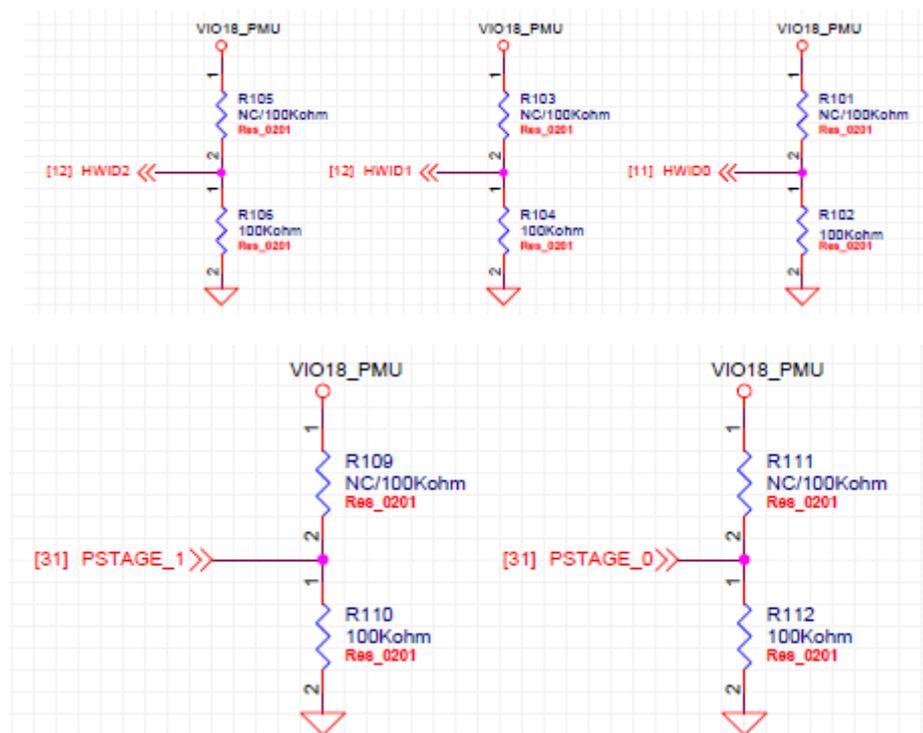

X220m:

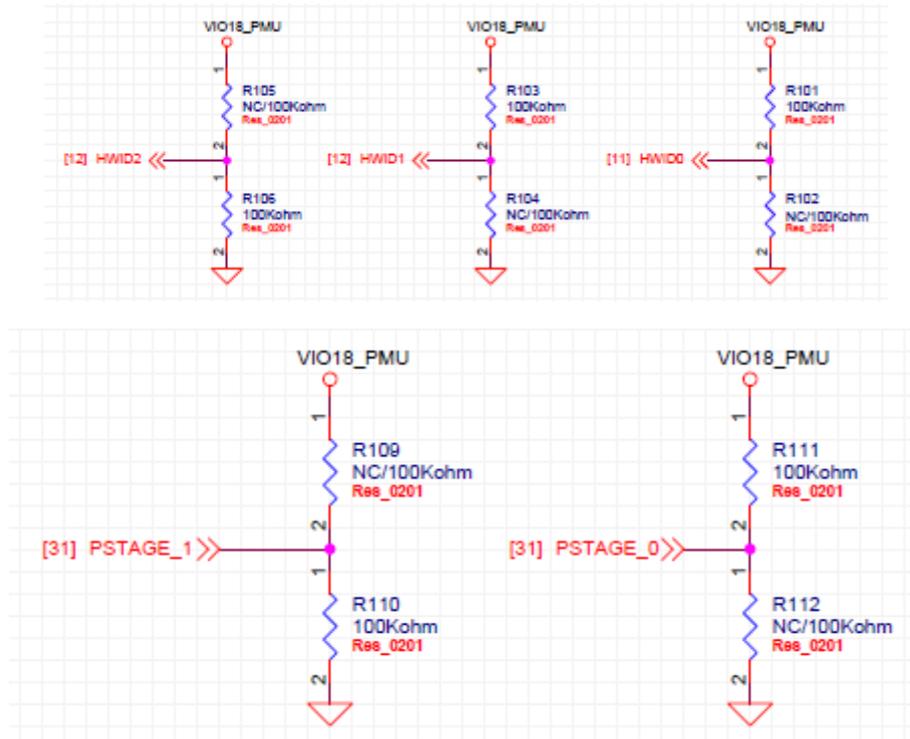

Layout

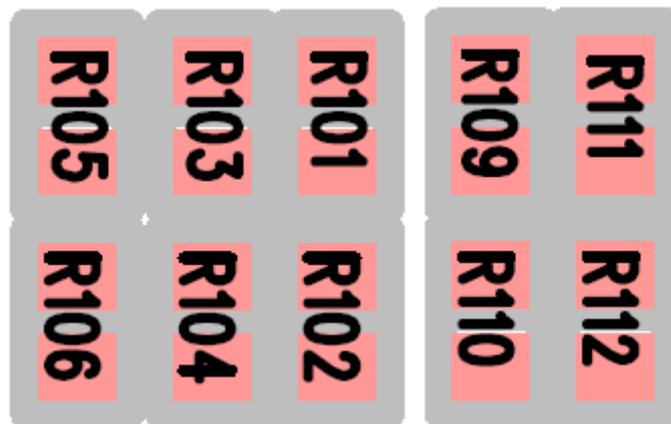



2) RF:WCDMA RF Circuit Change: B2/B5 to B2/B5/B8

SCH location:


Add Band 8

X220m:

UMTS BAND8  
900

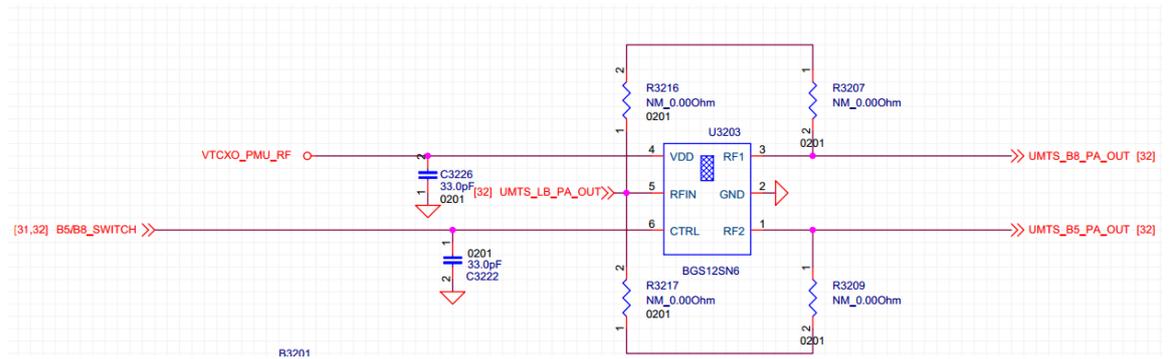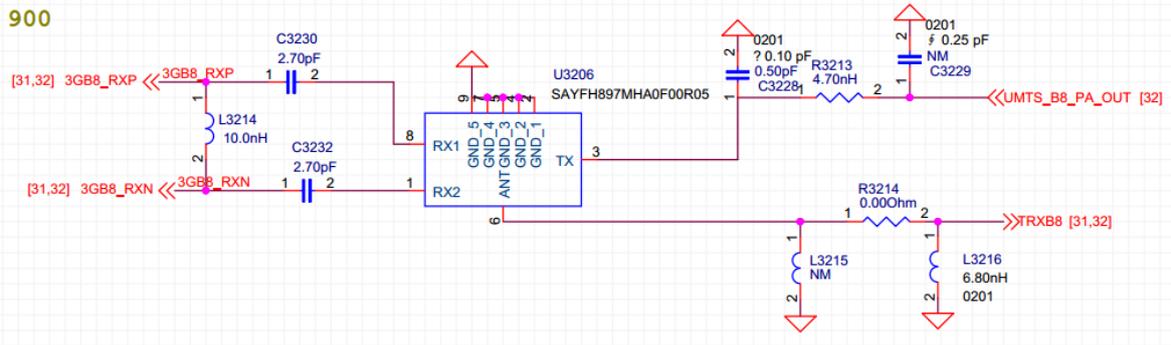


Layout location:

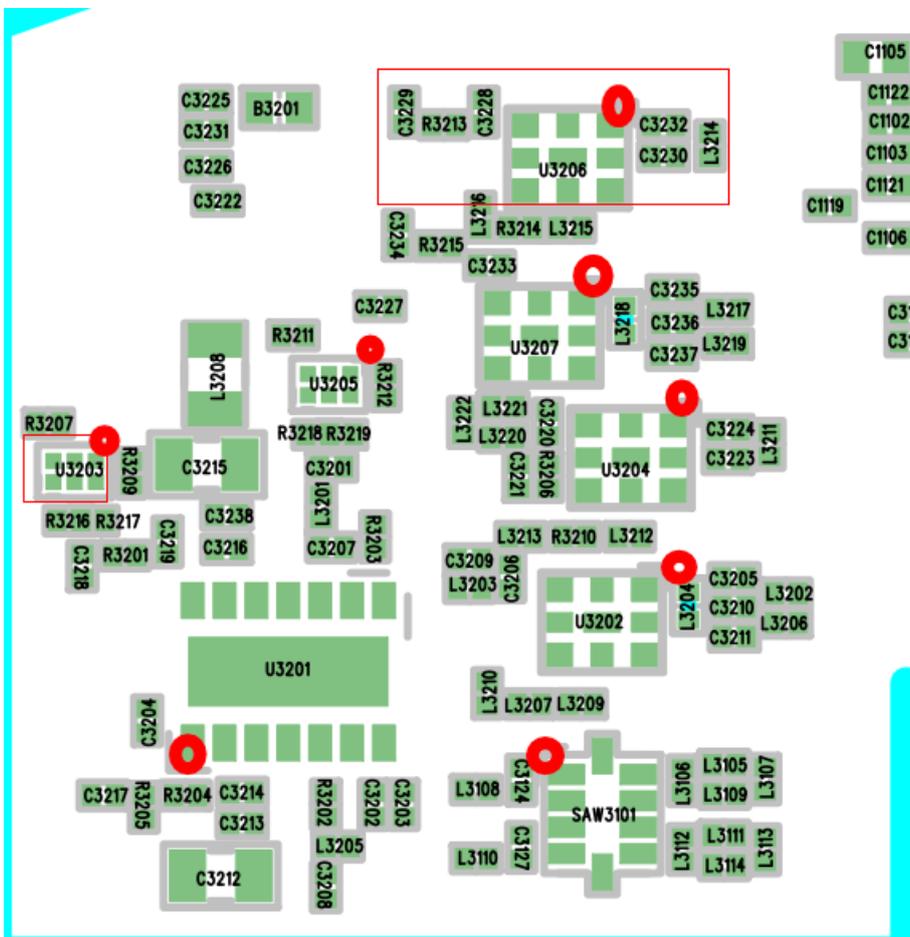


3) Add 3G B1 performance:

Change antenna pattern:

X220g:

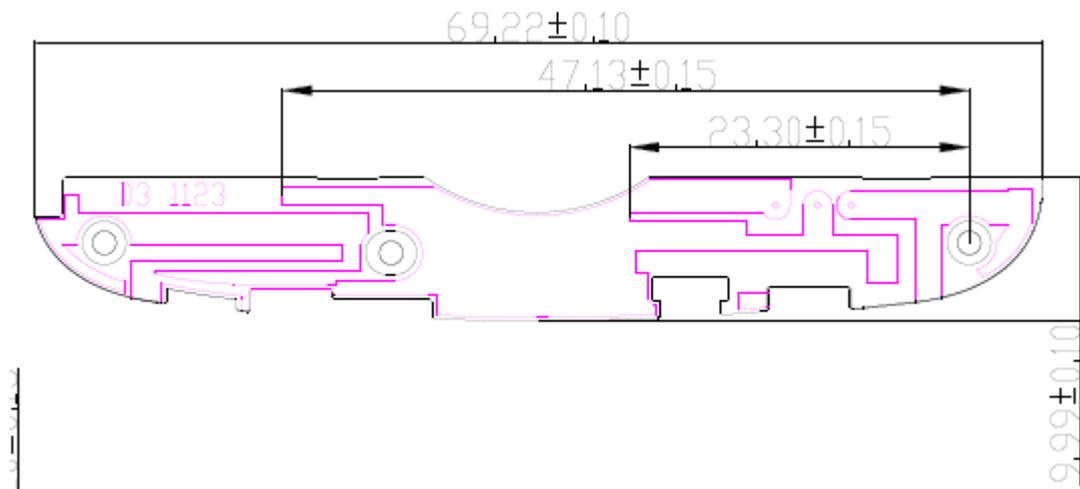

X220m:

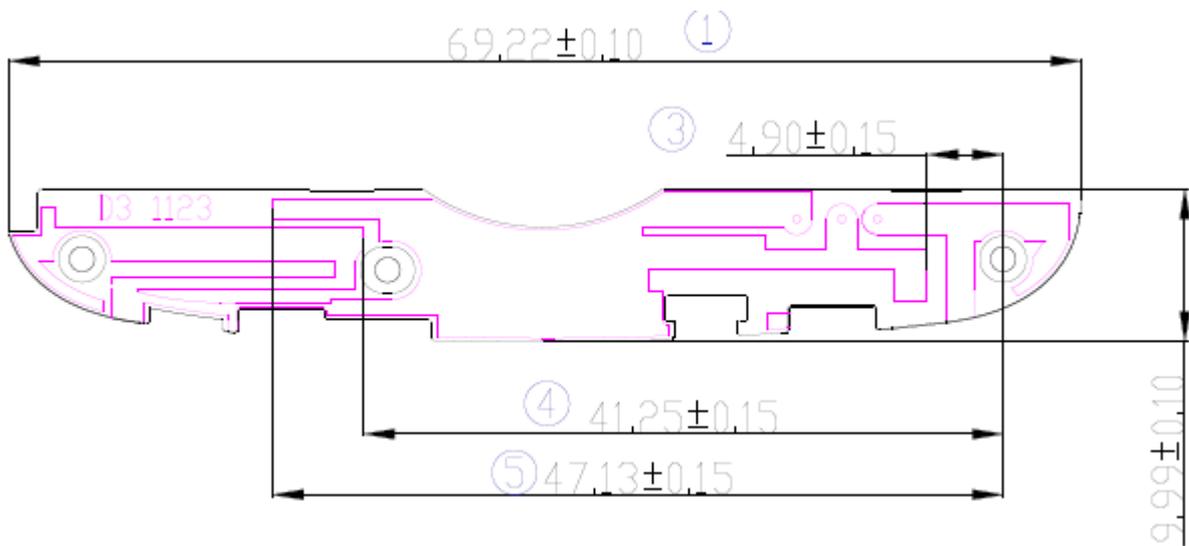

Color

PP2 gold



DV Silver



1. SW differences (from X220m to X220g)

1) X220m is for Panama open market

X220g is for Mexico Telcel

2) SW version name:

X220m: LGX220m-00-V[08a/09a/10a]-SCA-XXX-[Month]-[date]-[year]

X220g: LGX220g-00-V[08a/09a/10a]-334-20-[Month]-[date]-[year]

3) Requirement difference

The differences are defined in GPRI documents of X220m and X220g such as network settings, languages, preload apps, etc.

All of these changes listed above have been applied to the samples used for lab tests.

Sincerely yours,

*Deborah Chen*

Contact Person: Deborah Chen

Company: Arima Communications Corp.

Tel: +886-2-2670 5577 EXT.3784

Fax: +886-2- 8227-5533

E-Mail: [deborahchen@arimacomm.com.tw](mailto:deborahchen@arimacomm.com.tw)