FCC Test Report

Report No.: AGC03055190507FE03

FCC ID	:	ZRX62599
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Remote control car series
BRAND NAME	:	N/A
MODEL NAME	:	62599
SERIES MODEL		Please to see page 5
APPLICANT	:	HE TAI TOYS FACTORY
DATE OF ISSUE	:	Jun. 21, 2019
STANDARD(S) **TEST PROCEDURE(S)**	:	FCC Part 15 Subpart C Section 15.227
REPORT VERSION	:	V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:
This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 21, 2019	Valid	Initial release

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY

Applicant	HE TAI TOYS FACTORY
Address	RONGFU INDUSTRIAL PAPK, FENGXIANG, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG, CHINA
Manufacturer	HE TAI TOYS FACTORY
Address	RONGFU INDUSTRIAL PAPK, FENGXIANG, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG, CHINA
Factory	HE TAI TOYS FACTORY
Address	RONGFU INDUSTRIAL PAPK, FENGXIANG, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG, CHINA
Product Designation	Remote control car series
Brand Name	N/A
Test Model	62599
Series Model	Please to see page 5
Difference description	All the same except for the model name and different appearance color
Date of test	Jun. 09, 2019 to Jun. 21, 2019
Deviation	None
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.227. The test results of this report relate only to the tested sample identified in this report.

Tested By Draven Li

Draven Li(Li Ming Liang) Jun. 21, 2019

Reviewed By Max Zhang

Max Zhang(Zhang Yi) Jun. 21, 2019

Approved By Forrest Lei

Forrest Lei(Lei Yonggang)
Authorized Officer Jun. 21, 2019

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	27.145MHZ
Field Strength(3m)	64.15dBuV/m(Peak)@3m
Modulation	AM
Number of channels	1
Hardware Version	YLD410011
Software Version	V1.0
Antenna Designation	Fixed antenna
Antenna Gain	0.5dBi
Power Supply	DC 3V by Battery

Series Model:

61599, 63599, 64599, 65599, 66599, 60599, 67599, 67599B, 68599, 68599B, 69599, 69599B, 70599, 70599B, 74599, 75599, 76599, 73599, 77599, 78599, 79599, 79599B, 80599, 81599, 82599, 83599, 84599, 85599, 86599, 87599, 88599, 89599, 22599, 91599, 92599, C21599, C31599, 23599, 24599, 25599, 26599, 27599, 29599, 26599P, 22599P, 32599, 33599, 34599, 35599, 37599, 29599P, 67599P, 68599P, 38599, 39599, 30599, 69599P, 69599BP, 70599P, 70599BP, 74599P, 75599P, 79599P, 79599BP 69599F, 75599F, 70599F, 76599F, 93599, 94599, 95599, 96599, 97599, 98599, 99599, 10599, 11599, 12599, 13599, 14599, 15599, 16599, 17599, 18599, 19599, 20599, 59599, 01599, 02599, 03599, 04599, 05599

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Transmitting mode

Note:
1. All the test modes can be supply by new battery, and only the data of the worst case recorded in the test report.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1:



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Remote control car seriesseries	N/A	62599	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.227&15.209	Radiated Emission	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	N/A

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

7. TEST EQUIPMENT LIST

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.11, 2019	Jun.12, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
Attenuator	Weinachel Corp	58-30-33	N/A	Jun.11, 2019	Jun.12, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2018	Jun. 13, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 28, 2017	Sep. 27, 2019

8. RADIATED EMISSION

8.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP

8.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

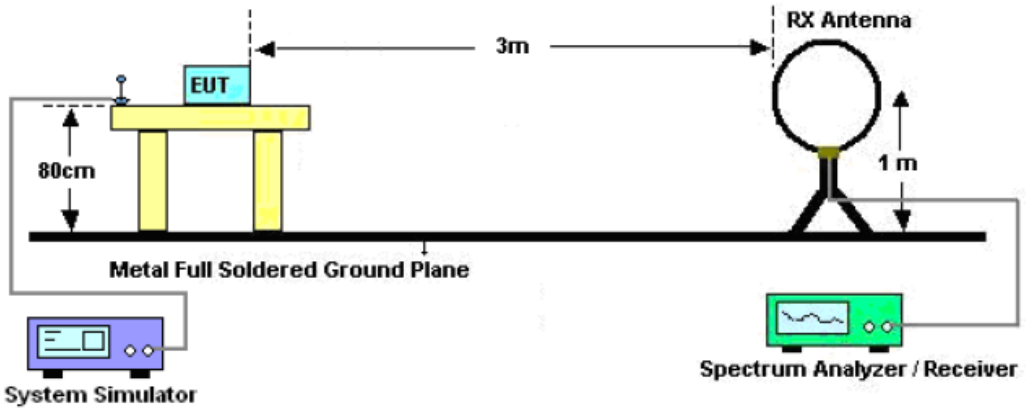

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

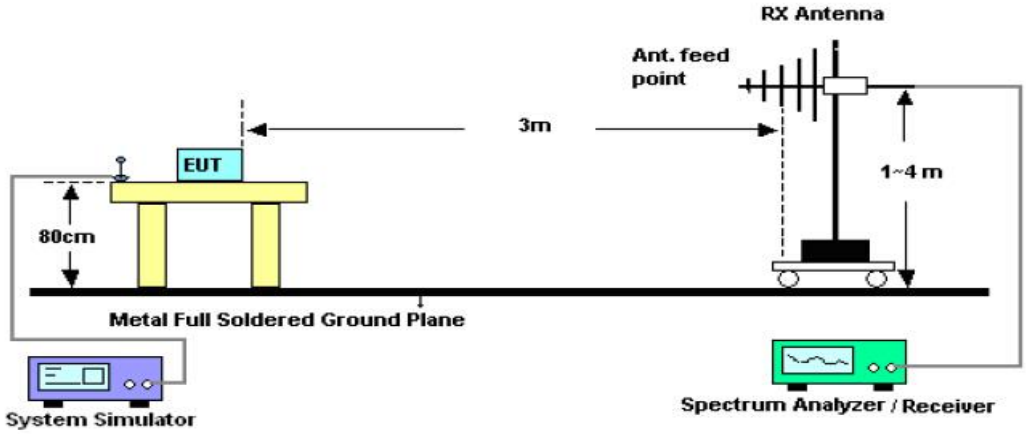

8.3. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

EUT：	Remote control car series	Model Name. ：	62599
Temperature：	20 ℃	Relative Humidtity：	48%
Pressure：	1010 hPa	Test Voltage ：	DC 3V
Test Mode ：	Mode 1	Polarization :	--

Frequency MHz	Polarization	Reading dB(uV) PK	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) AV	Margin dB	Pass/Fail
27.145	Face	51.72	12.43	64.15	80.00	-15.85	Pass
27.145	Side	39.10	12.43	51.53	80.00	-28.47	Pass

Note: The level of peak emission is less than the average limit, so the level of average emission need not to be tested. Other emissions from 9kHz to 30MHz are considered as ambient noise. No recording in the test report.

RADIATED EMISSION BELOW 1GHZ-Horizontal

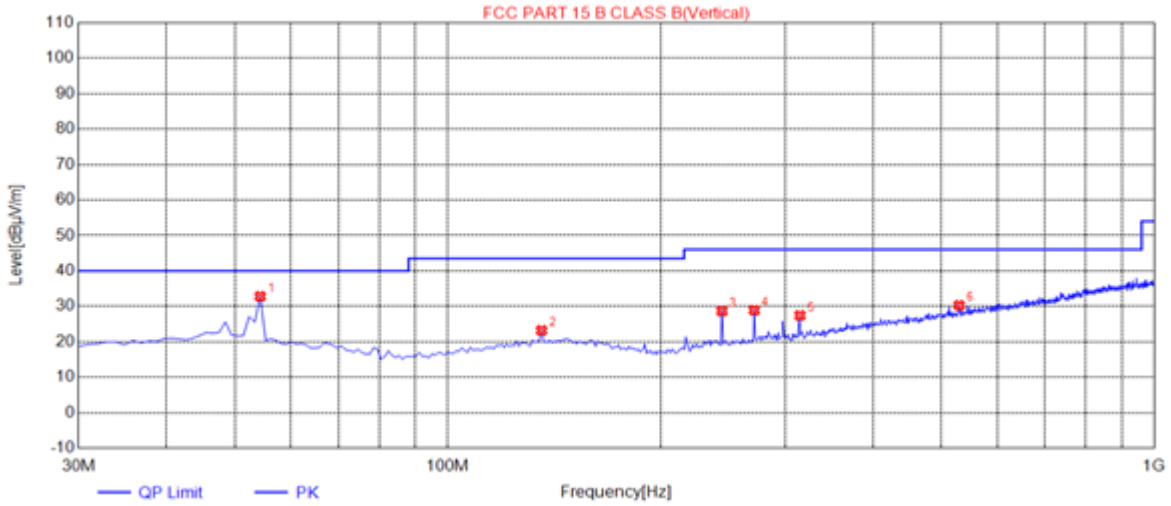

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	54.2500	32.80	14.35	40.00	7.20	100	165	Vertical
2	135.7300	23.20	14.56	43.50	20.30	100	89	Vertical
3	244.3700	28.67	14.78	46.00	17.33	200	2	Vertical
4	271.5300	28.88	15.55	46.00	17.12	200	298	Vertical
5	315.1800	27.42	16.48	46.00	18.58	100	302	Vertical
6	529.5500	30.27	22.85	46.00	15.73	200	41	Vertical

RADIATED EMISSION BELOW 1GHZ-Vertical

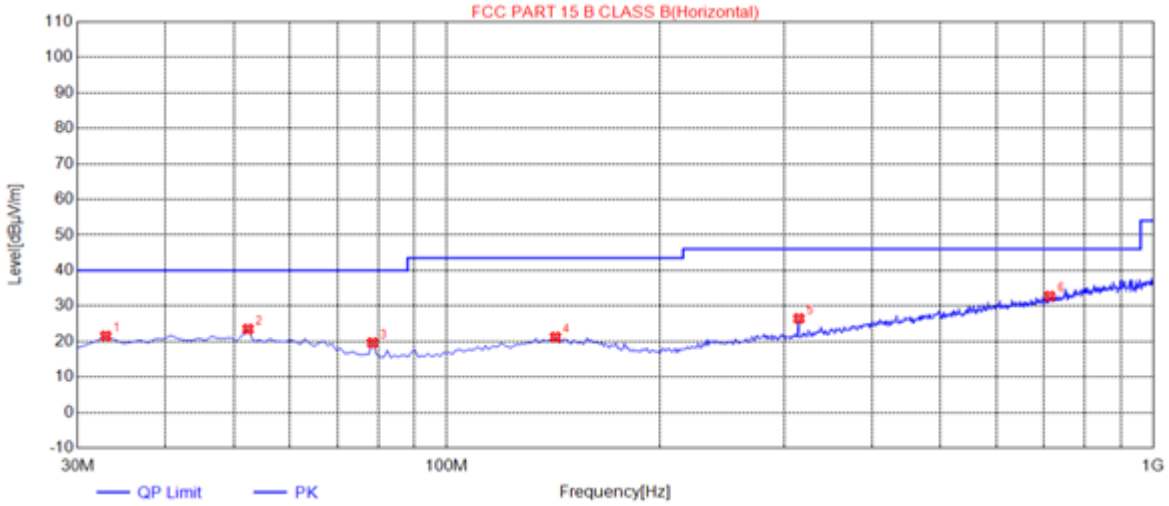

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.9100	21.53	13.36	40.00	18.47	150	360	Horizontal
2	52.3100	23.48	14.49	40.00	16.52	150	312	Horizontal
3	78.5000	19.63	10.46	40.00	20.37	200	2	Horizontal
4	142.5200	21.22	14.88	43.50	22.28	100	63	Horizontal
5	315.1800	26.46	16.48	46.00	19.54	200	304	Horizontal
6	713.8500	32.75	26.29	46.00	13.25	100	77	Horizontal

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

9. BANDWIDTH

9.1. MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:
   Centre frequency = Operation Frequency
   RBW=300Hz
   VBW=1KHz
   Span: 30kHz
   Sweep time: Auto
2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the “N dB down” function of SPA to define the bandwidth.
3. Record the plots and Reported.

9.2. TEST SETUP

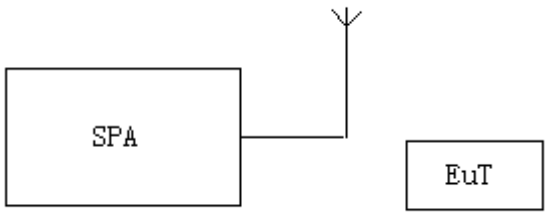

9.3. TEST RESULT

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	AM

Test Data (kHz)		Criteria
Operate Channel	5.789	PASS

TEST PLOT OF BANDWIDTH

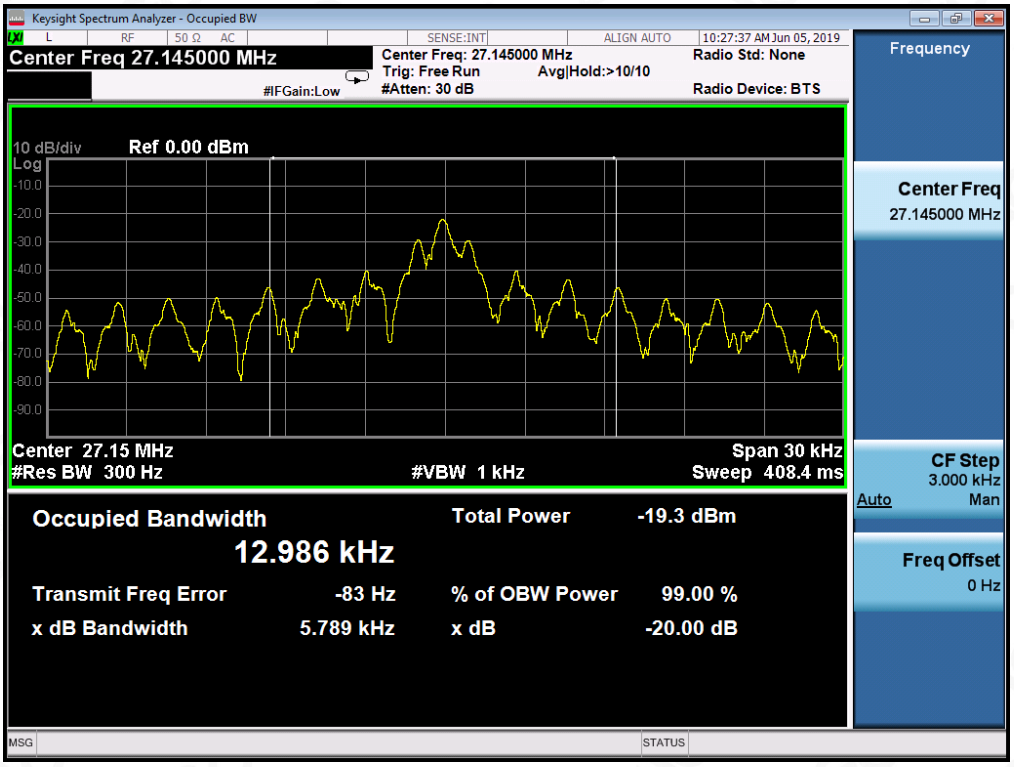

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP

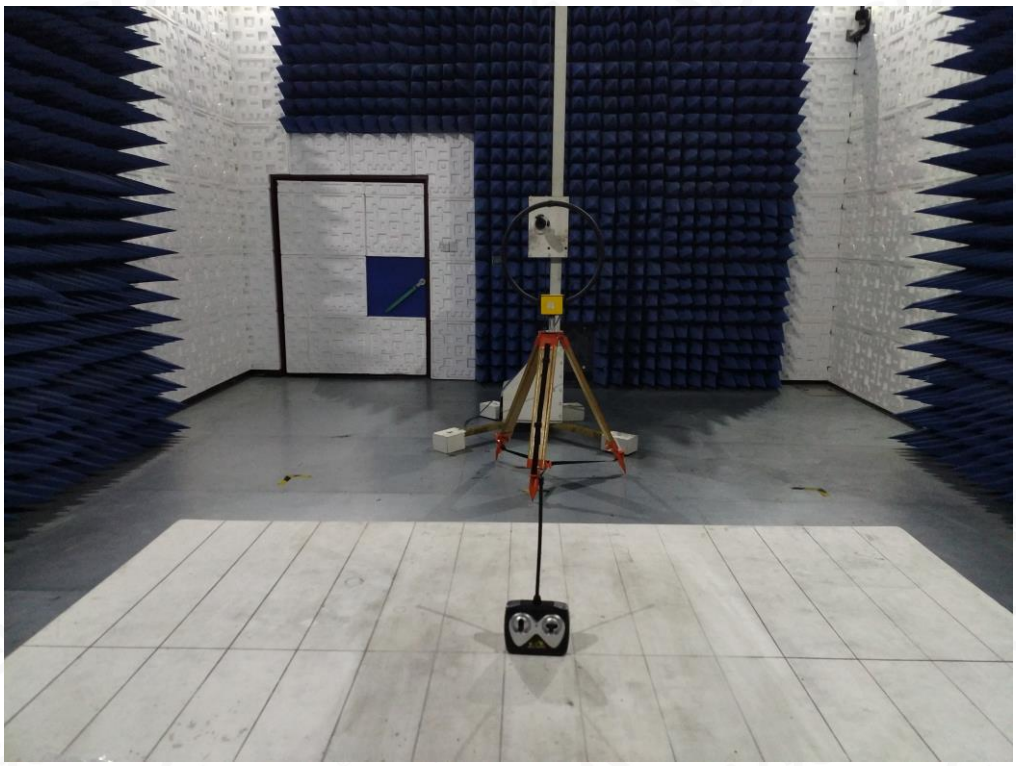

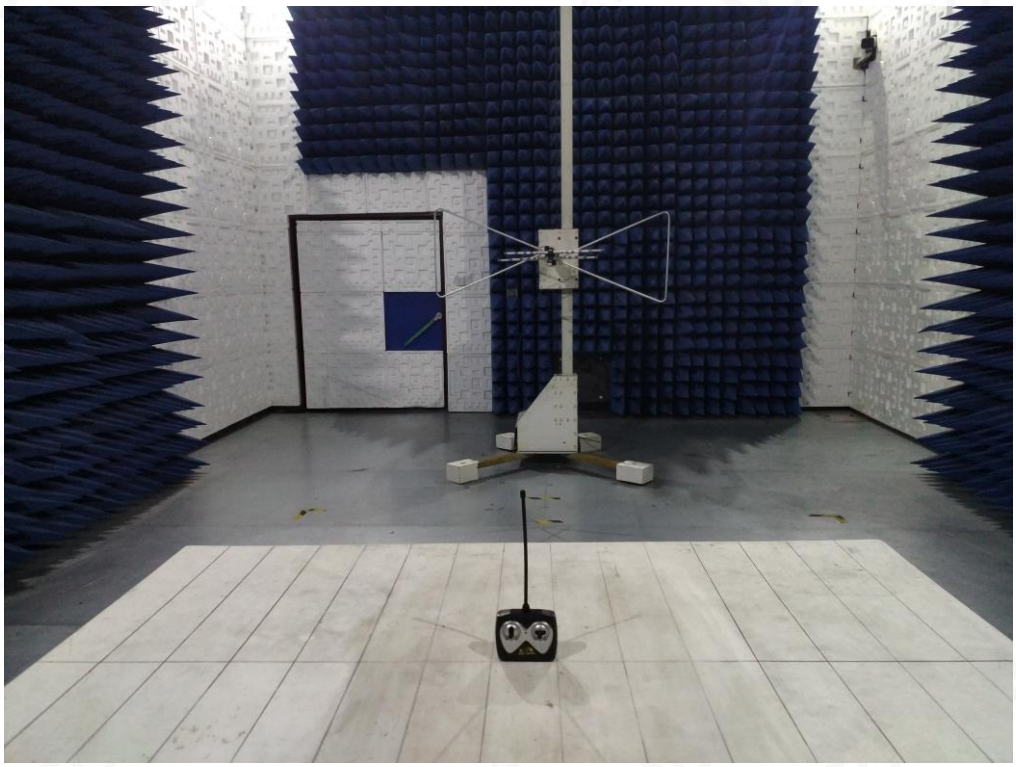

APPENDIX B: PHOTOGRAPHS OF EUT

ALL VIEW OF EUT

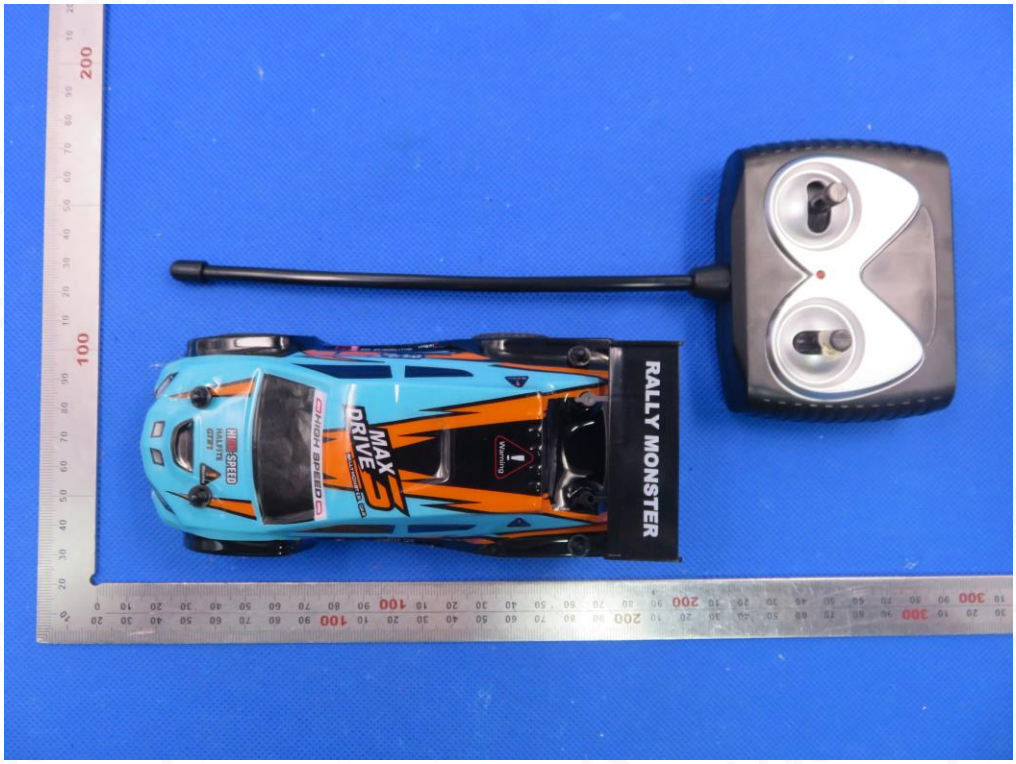

TOP VIEW OF EUT

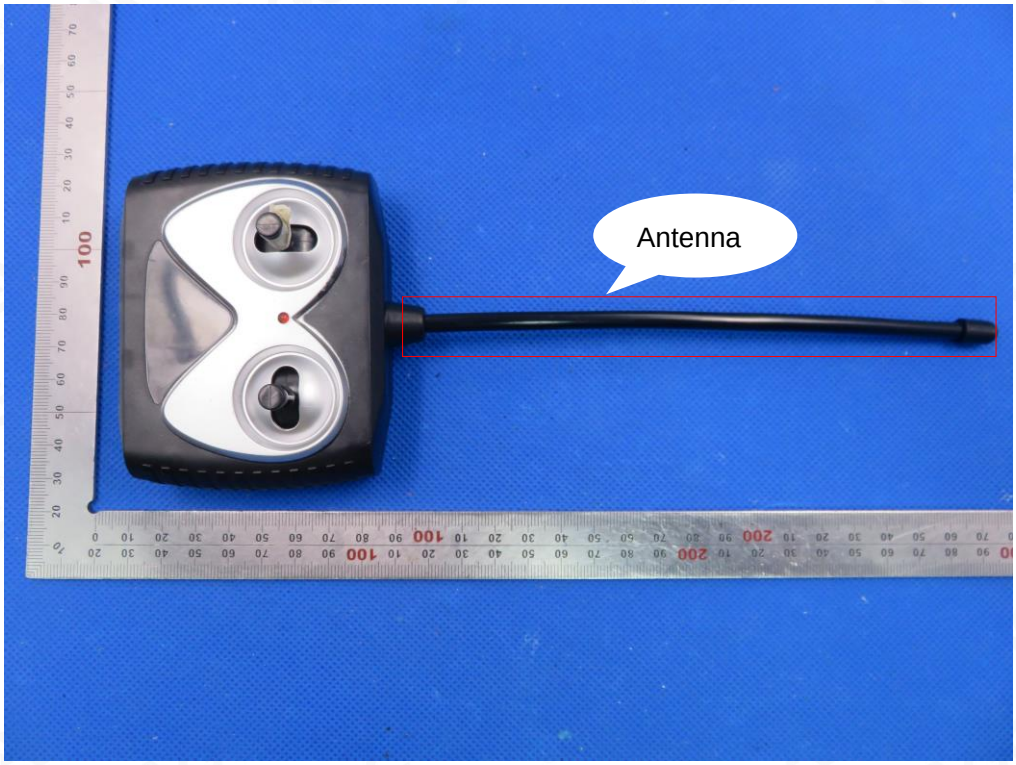

BOTTOM VIEW OF EUT

FRONT VIEW OF EUT

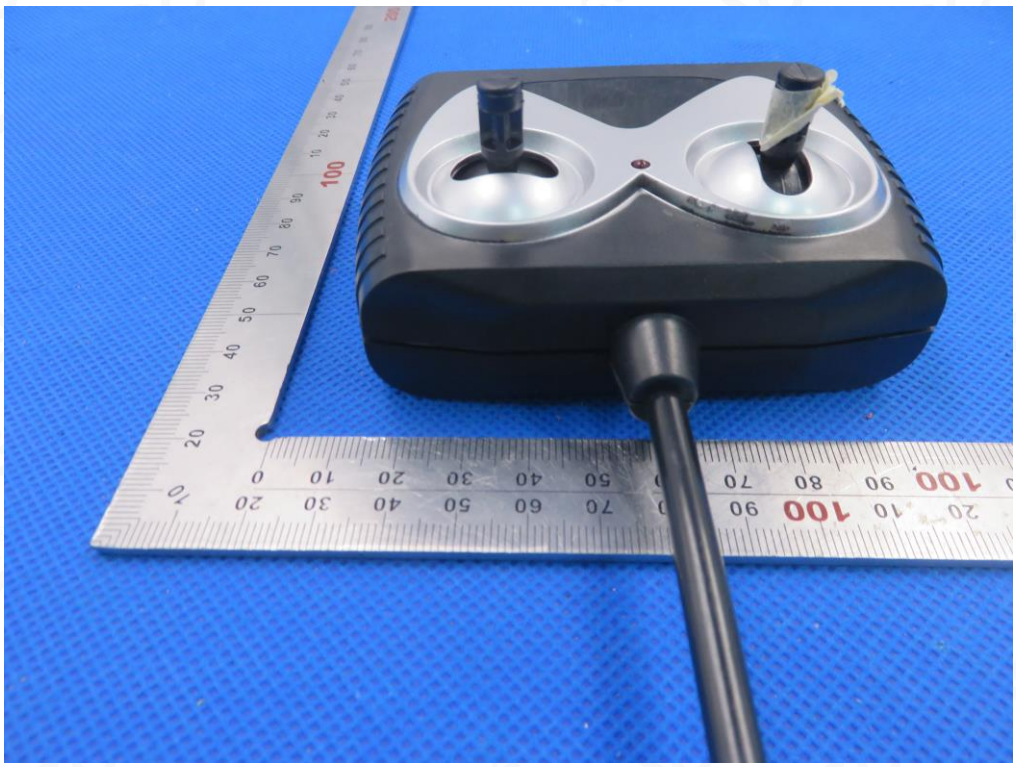

BACK VIEW OF EUT

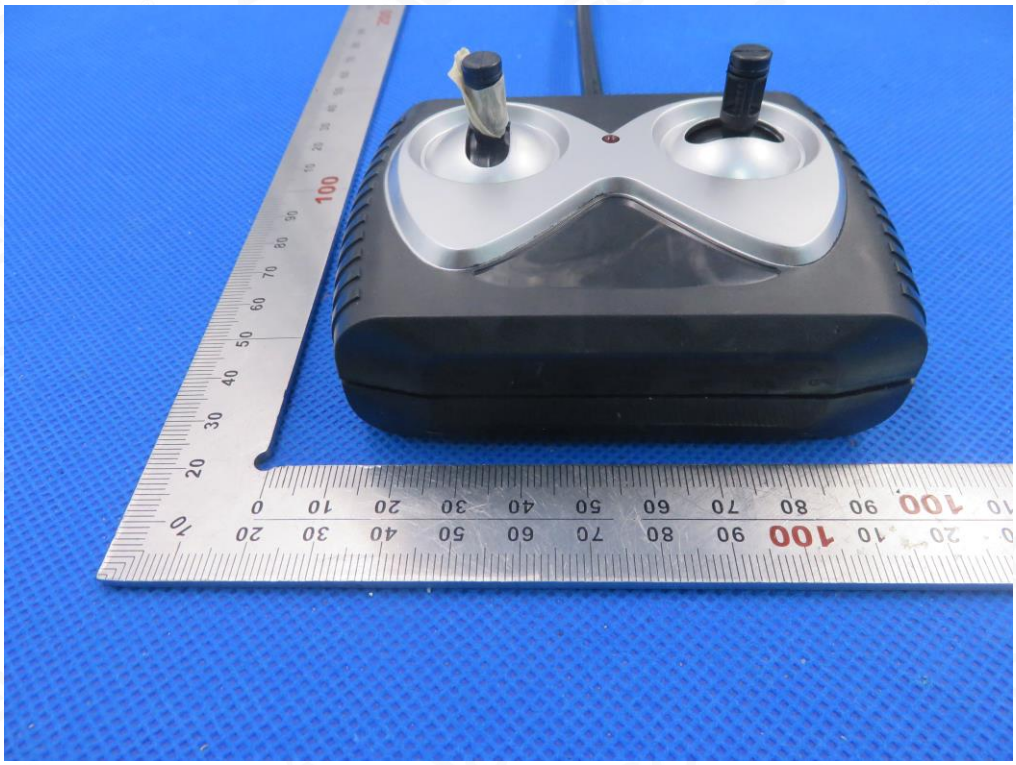

LEFT VIEW OF EUT

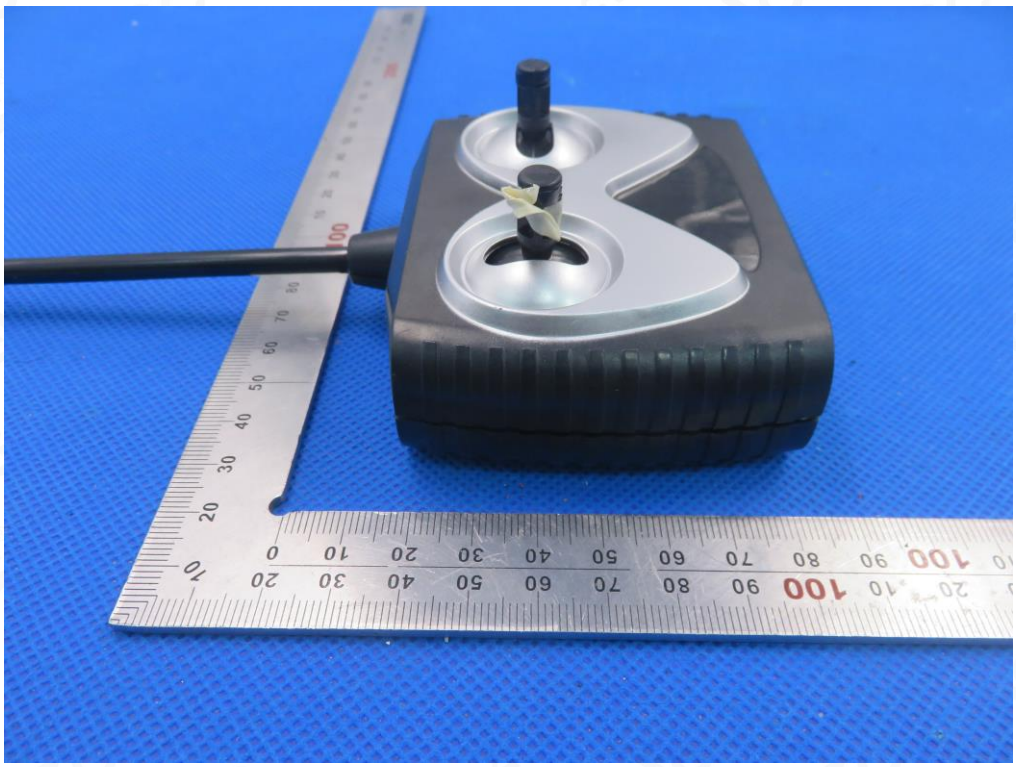

RIGHT VIEW OF EUT

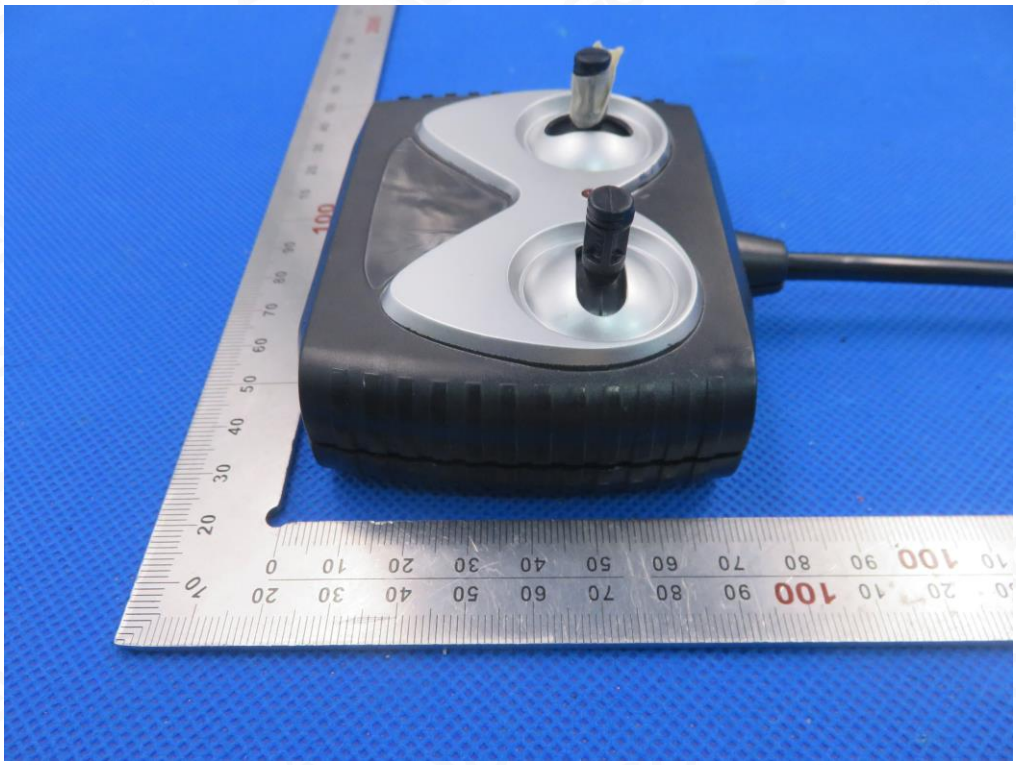

OPEN VIEW OF EUT-1

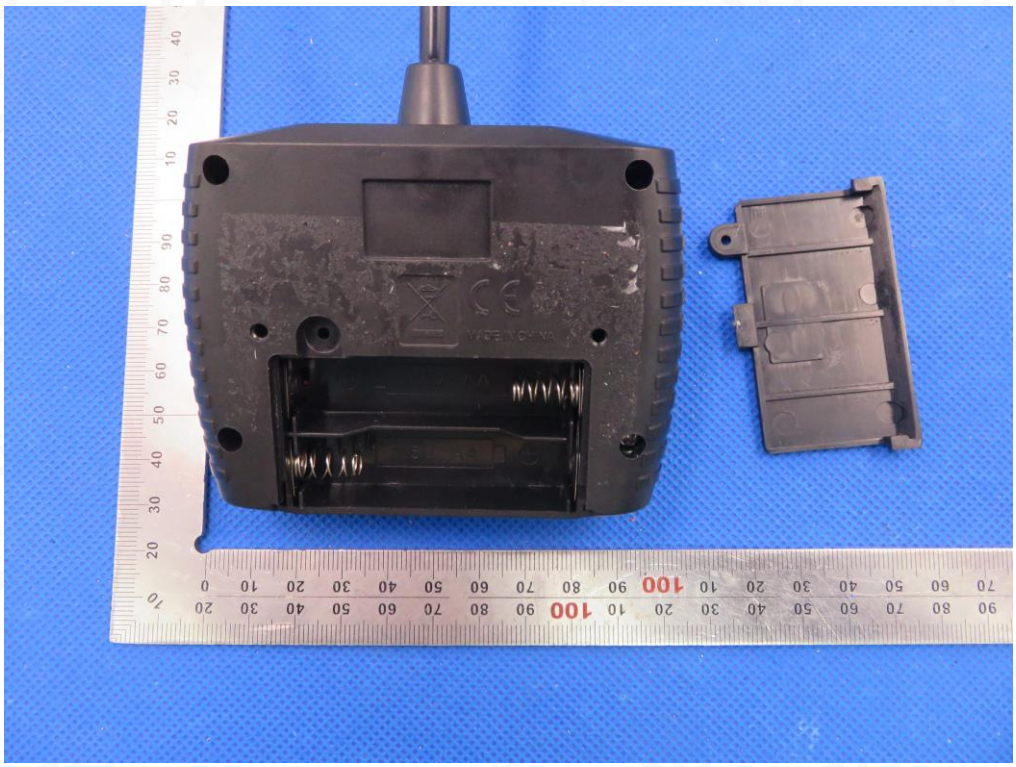

OPEN VIEW OF EUT-2

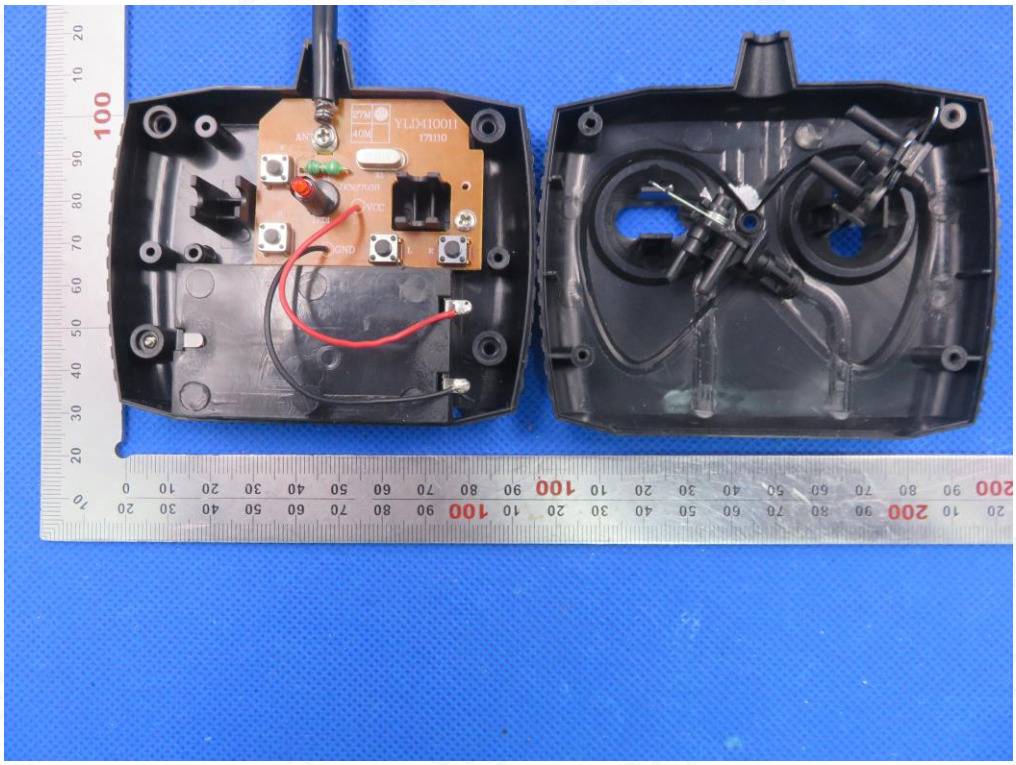

INTERNAL VIEW OF EUT-1

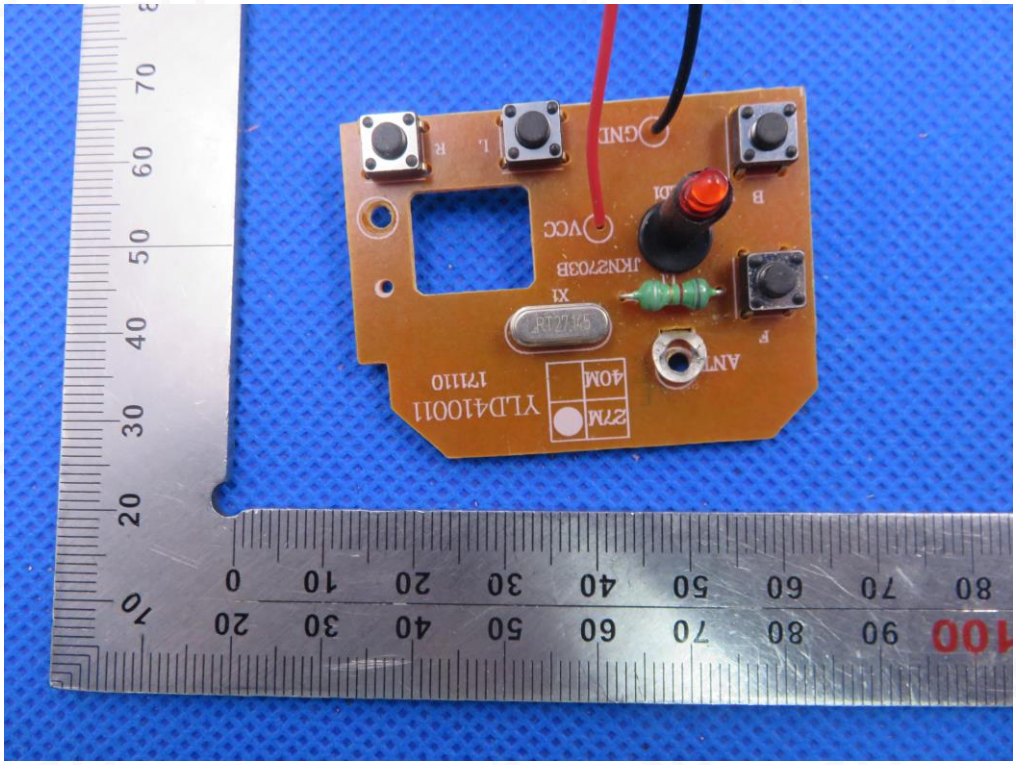

INTERNAL VIEW OF EUT-2

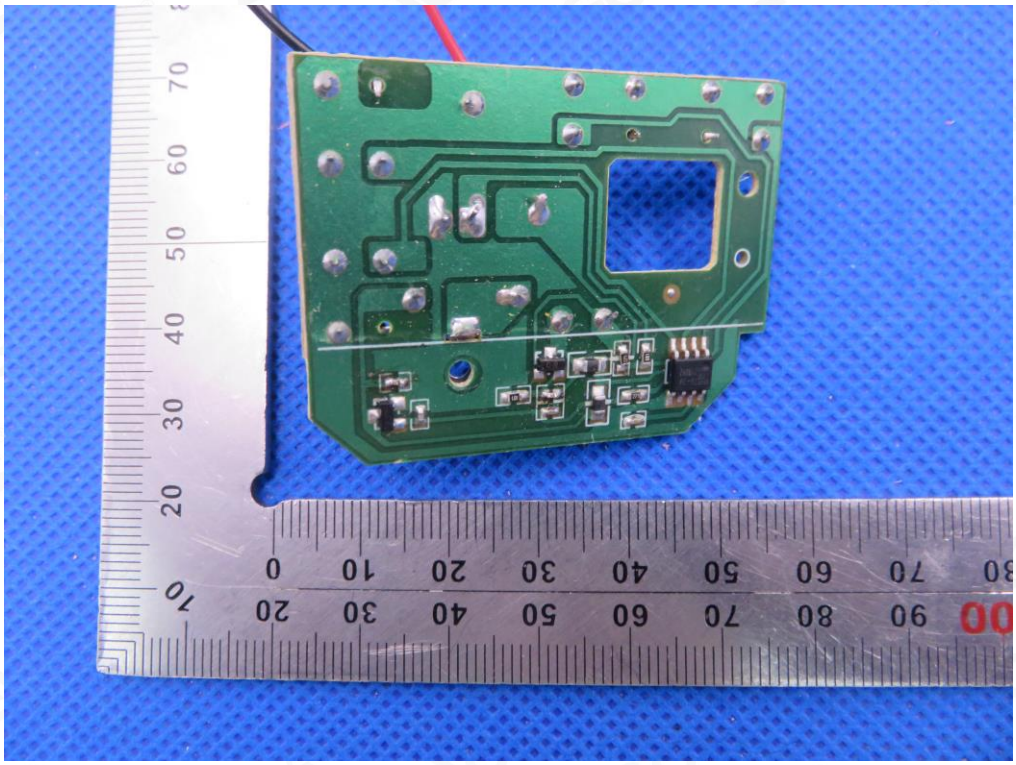

----END OF REPORT----

Statement

1. This report is invalid without the special seal for report of AGC and the signatures of approver.

2. This report is invalid if it is blotted out and deleted.

3. If the applicant has any questions about results, shall submit to AGC within 15 days.

4. This report is responsible for the sample provided by the client only.

5. This report shall not be reproduced except in full, or extracted without the written approval of AGC.

6. This report photocopy is invalid without the red chop.