



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

FCC ID TEST REPORT

for

3D wireless air mouse

MODEL: E909, F949, F100, F499, E800, E010

FCC ID: ZTQ-E909

Test Report Number: PTS11073147E

Issued Date: July 31, 2011

Issued for

Hong Kong RB Touch Co.

**Flat A, 23F, Block D, Golden Harbour Garden, Jintian Road 1001, Futian, Shenzhen,
China**

Issued by:

DongGuan Precise Testing Service Co.,Ltd.

**F616A Room, 6th Floor, Meixin Business Center, Dongcheng Middle Road,
Dongguan, Guangdong, China**

TEL: +86-769-23368601

FAX: + 86-769-23368602

Note: This report shall not be reproduced except in full, without the written approval of DongGuan Precise Testing Service Co.,Ltd. This document may be altered or revised by DongGuan Precise Testing Service Co.,Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

Revision History of report

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	PTS11073147E	Initial Issue	ALL	Lisa Zhu



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION.....	4
2 TEST RESULT SUMMARY.....	5
3 EUT DESCRIPTION.....	6
4 TEST METHODOLOGY.....	7
4.1 DECISION OF FINAL TEST MODE.....	7
4.2 EUT SYSTEM OPERATION.....	7
5 SETUP OF EQUIPMENT UNDER TEST.....	8
5.1 DESCRIPTION OF SUPPORT UNITS	8
5.2 CONFIGURATION OF SYSTEM UNDER TEST.....	8
6 FACILITIES AND ACCREDITATIONS	9
6.1 FACILITIES	9
6.2 MEASUREMENT UNCERTAINTY	9
7 CONDUCTED EMISSION MEASUREMENT	9
7.4 TEST SETUP	10
7.5. TEST RESULTS.....	11
8 RADIATED EMISSION MEASUREMENT	14
8.1. LIMITS OF RADIATED EMISSION MEASUREMENT.....	14
8.2. TEST INSTRUMENTS	14
8.3. TEST PROCEDURES.....	15
8.4. TEST SETUP	16
8.5. TEST RESULTS.....	17



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

1 TEST RESULT CERTIFICATION

Product: 3D wireless air mouse

Model: E909, F949, F100, F499, E800, E010

Trade Mark: RB-Touch

Applicant: **Hong Kong RB Touch Co.**

Flat A, 23F, Block D, Golden Harbour Garden, Jintian Road 1001, Futian, Shenzhen, China

Factory **Hong Kong RB Touch Co.**

Flat A, 23F, Block D, Golden Harbour Garden, Jintian Road 1001, Futian, Shenzhen, China

Tested Date: July 22, 2011 -July 31, 2011

Test Voltage: DC 5V PC

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC PART 15B	No non-compliance noted
ANSI C63.4: 2003	No non-compliance noted

Note: 1. The test result judgment is decided by the limit of measurement standard
2. The information of measurement uncertainty is available upon the customer's request.

The above equipment has been tested by DongGuan Precise Testing Service Co.,Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Davis Ma
Tested By: _____

Date: July 31, 2011

(Davis Ma)

Merry Zhao

Check By: _____

Date: July 31, 2011

(Merry Zhao)

Lisa Zhu

Approved By: _____

Date: July 31, 2011

(Lisa Zhu)

FCC ID: ZTQ-E909

Tel: 86-769-23368601

Fax: 86-769-23368602

<http://www.pts-testing.com>



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

2 TEST RESULT SUMMARY

Test Item	Test Result
Conduct Emission	Pass
Radiation Emission	Pass

Note: 1. The test result judgment is decided by the limit of test standard
2. The information of measurement uncertainty is available upon the customer's request.
3. N/A means to no applicable.



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

3 EUT DESCRIPTION

Product	3D wireless air mouse
Brand Name	RB-Touch
Model	E909, F949, F100, F499, E800, E010
Applicant	Hong Kong RB Touch Co.
Serial Number	N/A
EUT Power Rating	DC 5V PC
Temperature Range(Operating)	15-35°C
Operating Frequency	Receive 2402-2480MHz

N/A mean to no applicable

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH
N/A	-	-

Models difference

All models have the same constructions, circuit diagram and PCB layout. Only model name and plastic shell are different.



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

4 TEST METHODOLOGY

4.1 DECISION OF FINAL TEST MODE

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were scanned during the preliminary test:

Pre-Test Mode		
Emission	Conducted Emission	Mode : receiving
	Radiated Emission	Mode : receiving

After the preliminary scan, the following test mode was found to produce the highest emission level.

The Worst Test Mode		
Emission	Conducted Emission	Mode : receiving
	Radiated Emission	Mode : receiving

4.2 EUT SYSTEM OPERATION

1. Set up EUT with the relative support equipments.
2. Make sure the EUT normal operation during the test.



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

5 SETUP OF EQUIPMENT UNDER TEST

5.1 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	PC	dx2700	CNG7140T7P	N/A	HP	Unshielded 1.6m	N/A
2	Monitor	HPL1706V	CND74535YZ	N/A	HP	Unshielded 1.6m	N/A
3	Keyboard	SK-2880	435302-AA1	N/A	HP	Unshielded 1.6m	N/A
4	Mouse	M-SAW83A	HCA31707689	N/A	HP	Unshielded 1.6m	N/A
5	Laser Jet5L	C3941A	JPTVOB2337	N/A	HP	Unshielded 1.6m	N/A
6	Modem	SW108SMD	N/A	N/A	N/A	Unshielded 1.6m	N/A

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2 CONFIGURATION OF SYSTEM UNDER TEST

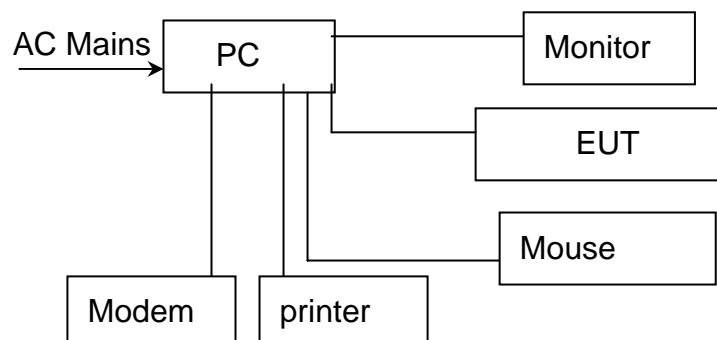

(EUT: 3D wireless air mouse)



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

6 FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

The test site used to collect the radiated data is located on the address of emitel (Shenzhen) Limited

(FCC Registered Test Site Number: 746887) on
Building 2, 171 Meihua Road, Futian District, Shenzhen, 518049 China
The Test Site is constructed and calibrated to meet the FCC requirements.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency		Uncertainty
Conducted emissions	450kHz~30MHz		+/- 3.59dB
Radiated emissions	Horizontal	30MHz ~ 200MHz	+/- 4.77dB
		200MHz ~1000MHz	+/- 4.93dB
	Vertical	30MHz ~ 200MHz	+/- 5.04dB
		200MHz ~1000MHz	+/- 4.93dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

7 CONDUCTED EMISSION MEASUREMENT

7.1 LIMITS

FREQUENCY (MHz)	LIMIT(dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from EUT or system, shall not exceed the level of field strengths specified above.



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

7.2 TEST INSTRUMENTS

Conducted Emission Shielding Room Test Site (843)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	100005	06/24/2012
LISN	AFJ	LS16	16010222119	09/29/2011
LISN(EUT)	Mestec	AN3016	04/10040	09/28/2011

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).
2. N.C.R = No Calibration Request.

7.3 TEST PROCEDURES


The EUT was put on a wooden table which was 0.8metre high above the ground and connected to the AC mains through a Artificial Mains Network (A.M.N). The mains lead in excess of 1 m separating the EUT from the AMN was folded back and forth parallel to the lead so as to form a bundle with a length of 0.3m to 0.4m. The EUT was kept 0.4m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during conducted emission test.

The bandwidth of the test receiver (ESCI) was set at 9KHz.

The frequency range from 150 KHz to 30 MHz was investigated.

The test data of the worst-case condition(s) was recorded.

7.4 TEST SETUP

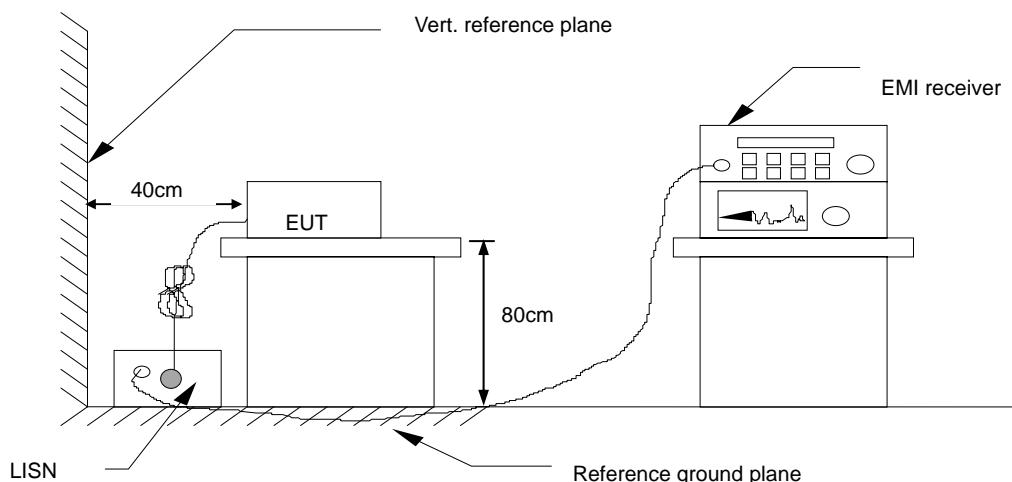



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5. TEST RESULTS

Model No.	E909	6dB Bandwidth	10 KHz
Environmental Conditions	26°C, 55% RH	Test Mode	receiving
Detector Function	Peak / Quasi-peak/AV	Test Result	Pass
Test By	Davis Ma		

NOTE:

L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

“---” denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.

Freq. = Emission frequency in MHz

Reading level(dBuV) = Receiver reading

Corr. Factor (dB) = Attenuator factor + Cable loss

Level (dBuV) = Reading level(dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

Q.P.=Quasi-Peak




PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

Conducted Emission Measurement

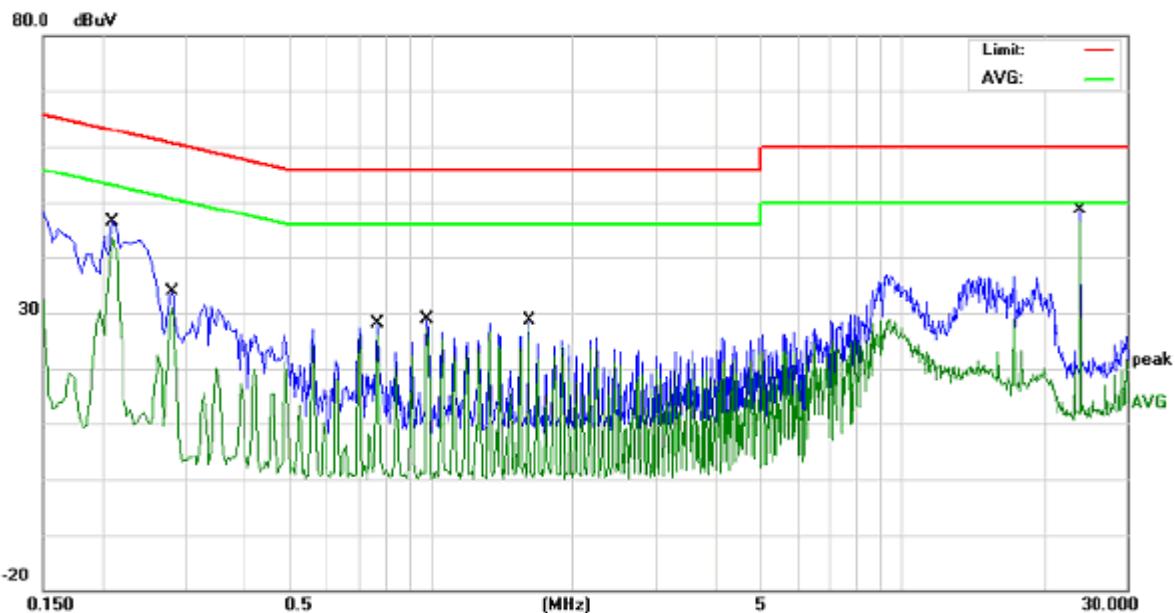

Site 843 Shielded Room

Phase: L1

Temperature: 26

Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Over	
								Detector	Comment
1		0.2100	33.34	10.74	44.08	63.20	-19.12	QP	
2		0.2100	32.92	10.74	43.66	53.20	-9.54	AVG	
3		0.2819	20.45	10.84	31.29	60.76	-29.47	QP	
4		0.2819	19.61	10.84	30.45	50.76	-20.31	AVG	
5		0.7700	16.46	10.39	26.85	56.00	-29.15	QP	
6		0.7700	15.79	10.39	26.18	46.00	-19.82	AVG	
7		0.9820	17.74	10.26	28.00	56.00	-28.00	QP	
8		0.9820	17.03	10.26	27.29	46.00	-18.71	AVG	
9		1.6140	17.57	10.27	27.84	56.00	-28.16	QP	
10		1.6140	17.10	10.27	27.37	46.00	-18.63	AVG	
11		23.9980	37.69	10.28	47.97	60.00	-12.03	QP	
12	*	23.9980	36.56	10.28	46.84	50.00	-3.16	AVG	

*:Maximum data x:Over limit l:over margin

(Reference Only)




PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

Conducted Emission Measurement

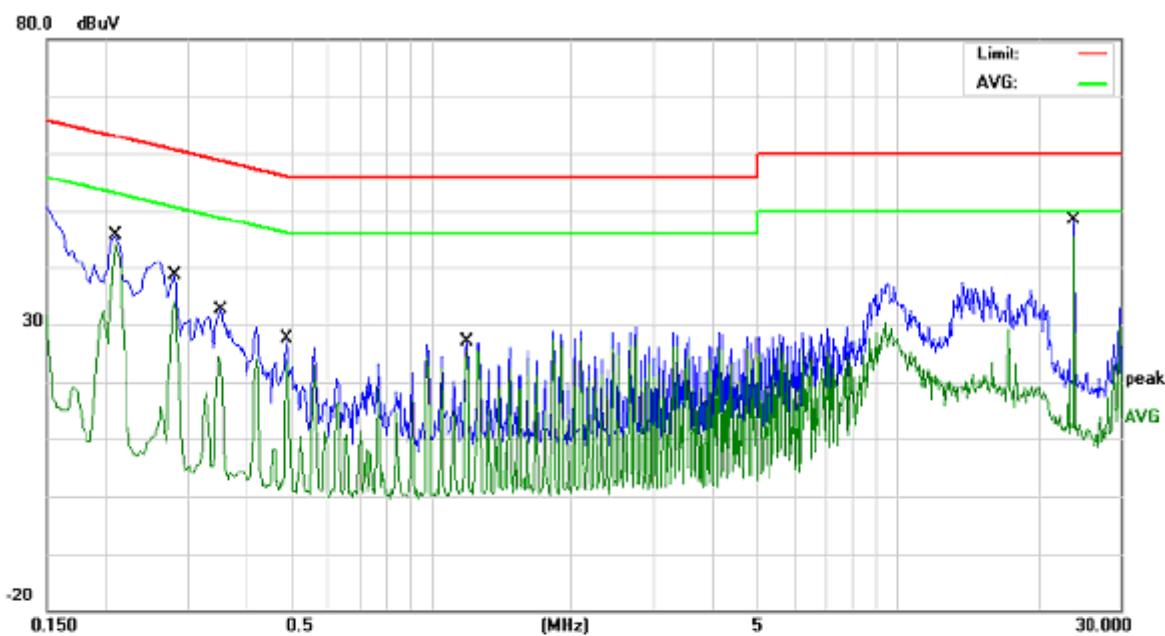

Site 843 Shielded Room

Phase: **N**

Temperature: 26

Humidity: 55 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.2100	33.52	10.74	44.26	63.20	-18.94	QP	
2		0.2100	33.54	10.74	44.28	53.20	-8.92	AVG	
3		0.2819	24.83	10.84	35.67	60.76	-25.09	QP	
4		0.2819	22.94	10.84	33.78	50.76	-16.98	AVG	
5		0.3540	14.25	10.78	25.03	58.87	-33.84	QP	
6		0.3540	11.23	10.78	22.01	48.87	-26.86	AVG	
7		0.4900	14.62	10.56	25.18	56.17	-30.99	QP	
8		0.4900	13.47	10.56	24.03	46.17	-22.14	AVG	
9		1.1940	15.80	10.26	26.06	56.00	-29.94	QP	
10		1.1940	14.96	10.26	25.22	46.00	-20.78	AVG	
11		23.9980	37.65	10.28	47.93	60.00	-12.07	QP	
12	*	23.9980	36.50	10.28	46.78	50.00	-3.22	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

8 RADIATED EMISSION MEASUREMENT

8.1. LIMITS OF RADIATED EMISSION MEASUREMENT

Maximum permissible level of Radiated Emission measured at 3 meter

FREQUENCY (MHz)	dBuV/m (At 3m)	
	Class B	
30~88	40.00	
88~216	43.50	
216~960	46.00	
960~1000	54.00	
>1000	PK:74;AV:54	

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) The limit below 1GHz use QP detector

8.2. TEST INSTRUMENTS

966 Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100005	09/24/2011
Spectrum Analyzer	R&S	FSU	100114	09/24/2011
Pre Amplifier	H.P.	HP8447E	2945A02715	09/24/2011
Pre-Amplifier	Compliance	PAM0118	1360976	09/24/2011
Bilog Antenna	SUNOL Sciences	JB3	A021907	09/24/2011
Horn Antenna	Compliance	CE18000	001	09/24/2011
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	09/24/2011
Cable	TIME MICROWAVE	--	--	09/24/2011
Signal generator	HP	8657B	101059-999	09/24/2011
System-Controller	CCS	N/A	N/A	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to International system of unit (SI).

2. N.C.R = No Calibration Request.



PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

8.3. TEST PROCEDURES

The EUT was placed on a turn table which was 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on a antenna tower. At the frequency band of 30MHz to 1GHz, The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 to 4 m for horizontal and vertical polarizations. The broadband antenna (calibrated by dipole antenna) was used as a receiving antenna. At the frequency band of 1GHz to 2GHz, The measuring antenna moved from 1 to 4 m for horizontal and vertical polarization. The horn antenna was used as a receiving antenna.

The resolution bandwidth and video bandwidth of the test receiver was 120 KHz and 300KHz for Quasi-peak detection at frequency below 1GHz.

The resolution bandwidth and video bandwidth of the test receiver was 1MHz and 3MHz for Peak emssion mesurement above 1GHz .

The resolution bandwidth of the test receiver was 1MHz and the video bandwidth are 10Hz for Average emssion mesurement above 1GHz .

The EUT was tested in Chamber Site.

The test data of the worst case condition(s) was reported on the following pages.




PRECISE TESTING

DongGuan Precise Testing Service Co.,Ltd.


Report No.: PTS11073147E

8.4. TEST SETUP

Below 1GHz

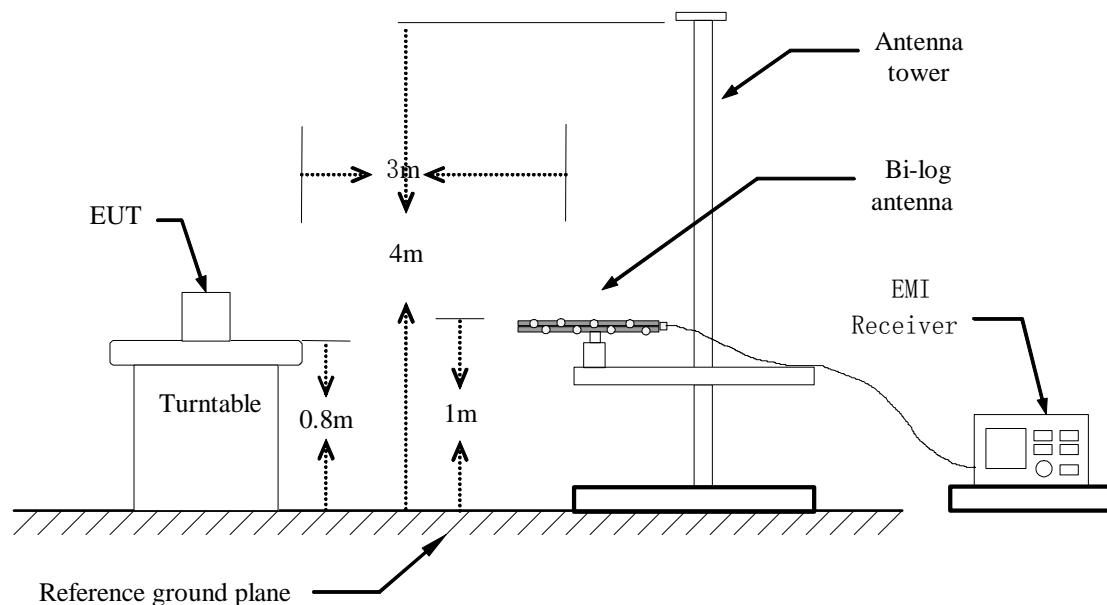

Abover 1GHz

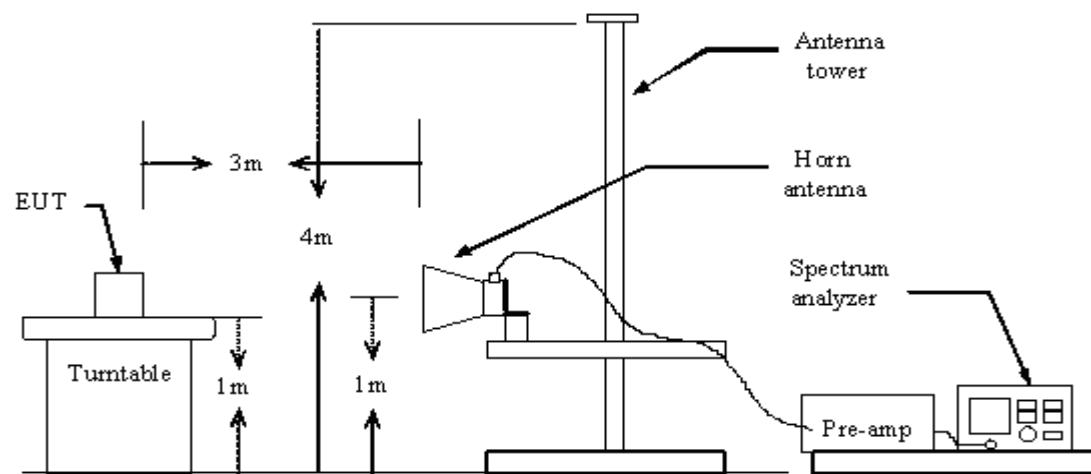

**PRECISE TESTING**

DongGuan Precise Testing Service Co.,Ltd.

Report No.: PTS11073147E

8.5.TEST RESULTS

Model No.	E909	Test Mode	receiving (worse case)
Environmental Conditions	25°C, 55% RH	Test Result	pass

Frequency (MHz)	Ant. Pol.	Corr.Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin	Note	Result
74.6200	H	-12.03	34.55	40.00	-5.45	QP	Pass
148.34	H	-6.83	31.56	43.50	-11.94	QP	Pass
223.03	H	-5.90	36.34	46.00	-9.66	QP	Pass
259.89	H	-4.52	35.54	46.00	-10.46	QP	Pass
296.75	H	-3.64	34.25	46.00	-11.75	QP	Pass
1238.00	H	26.51	45.50	74.00	-28.5	Peak	Pass
1238.00	H	26.51	--	54.00	--	AV	Pass
74.62	V	-11.64	30.82	40.00	-9.18	QP	Pass
200.72	V	-3.27	30.94	43.50	-12.56	QP	Pass
259.89	V	-3.60	30.43	46.00	-15.57	QP	Pass
296.75	V	-1.70	28.90	46.00	-17.1	QP	Pass
401.51	V	1.19	28.25	46.00	-17.75	QP	Pass
1200.00	V	26.50	47.53	74.00	-26.47	Peak	Pass
1200.00	V	26.50	--	54.00	--	AV	Pass

Note: 1. Level = Correction factor + Meter Reading

2. Correction factor=antenna factor + cable loss - preamplifier gain.

3. – means to the measure is no necessary,due to the PK value comply with AV limits.