



RADIO TEST REPORT

Test Report No. : 31KE0030-HO-01


Applicant : URYU SEISAKU,LTD.
Type of Equipment : BATTERY OIL-PULSE TOOL
Model No. : UDBP-T60 (RFA)
Test regulation : FCC Part 15 Subpart C: 2011
FCC ID : ZVI-UDBP-RFA
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: July 12 and 29, 2011

Representative test engineer: S. Matsuyama
Satofumi Matsuyama
Engineer of WiSE Japan,
UL Verification Service

Approved by: M. Fujimura
Mitsuru Fujimura
Leader of WiSE Japan,
UL Verification Service

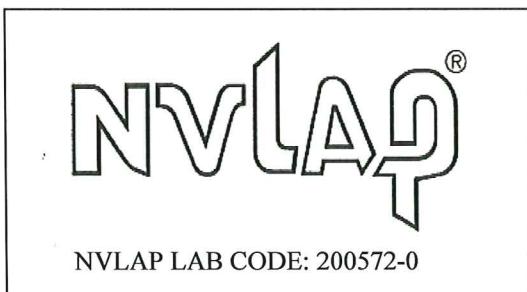

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	5
SECTION 4: Operation of E.U.T. during testing	8
SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission) 9	
SECTION 6: Automatically deactivate	10
SECTION 7: -20dB Bandwidth	10
APPENDIX 1: Photographs of test setup	11
Radiated emission	11
Worst case position	12
APPENDIX 2: Data of EMI test	13
Automatically deactivate	13
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)	14
-20dB Bandwidth	15
Duty Cycle	16
APPENDIX 3: Test Instruments	17

SECTION 1: Customer information

Company Name : URYU SEISAKU,LTD.
Address : 2-9-26 Kamiji, Higashinari, Osaka, 537-0003 Japan
Telephone Number : +81-6-6973-9444
Facsimile Number : +81-6-6973-5759
Contact Person : Hidekazu Kimura


SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : BATTERY OIL-PULSE TOOL
Model No. : UDBP-T60 (RFA)
Serial No. : Refer to Clause 4.2
Rating : DC5.0V
Receipt Date of Sample : July 12, 2011
Country of Mass-production : Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

UDBP-T60 (RFA) has following variant models.

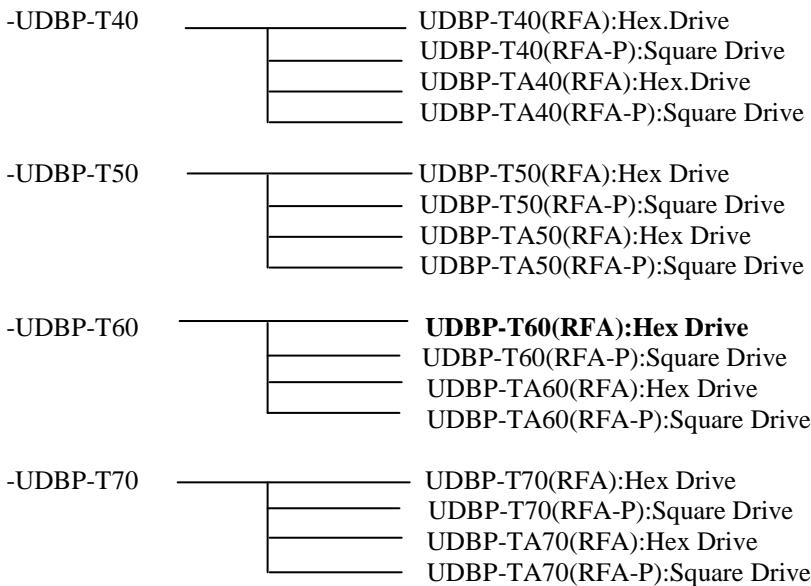

UDBP-T**: standard (**is described by 40, 50, 60, and 70)

UDBP-TA**: Auto relief mechanism (**is described by 40, 50, 60, and 70)

The pulse mechanism is different. However, externals of the pulse are the same.

UDBP-T40 series and UDBP-T50 series are Li-ion battery DC11.1V.

UDBP-T60 series are Li-ion battery DC22.2V.

UDBP-T70 series are Li-ion battery DC33.3V.

They are identical in electronic characteristics.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

General Specification

Clock frequency(ies) in the system : CPU: 5MHz

Radio Specification

Radio Type : Transmitter
Frequency of Operation : 426.100MHz
Other Clock Frequency : Crystal oscillator: 71.01666MHz (x6)
Modulation : FSK
Method of Frequency Generation : Crystal
Power Supply (radio part input) : DC 5.0V
Antenna type : Built on the foundation
Folded monopole antenna

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C: 2011, final revised on July 8, 2011 and effective August 8, 2011

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.231 Periodic operation in the band 40.66 - 40.70MHz
and above 70MHz

*The revision on July 8, 2011 does not affect the test specification applied to the EUT.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC: Section 15.207	N/A	N/A*1)	-
Automatically Deactivate	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.231(a)(1)	N/A	Complied	Radiated
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.231(b)	5.2dB 426.100MHz Vertical, QP	Complied	Radiated
Electric Field Strength of Spurious Emission	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.205 Section 15.209 Section 15.231(b)	10.0dB 4261.000MHz Horizontal, PK with Duty factor	Complied	Radiated
-20dB Bandwidth	FCC: ANSI C63.4:2003 13. Measurement of intentional radiators	FCC: Section 15.231(c)	N/A	Complied	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT does not have AC Mains.

FCC 15.31 (e)

The EUT is a battery-operated device and test was performed with the full-charged battery. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi- anechoic chamber)	Radiated emission						
	(3m*)(+dB)			(1m*)(+dB)		(0.5m*)(+dB)	
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	3.5dB	5.1dB	5.2dB	4.8dB	5.1dB	4.4dB	4.3dB
No.2	4.0dB	5.1dB	5.2dB	4.8dB	5.0dB	4.3dB	4.2dB
No.3	4.2dB	4.7dB	5.2dB	4.8dB	5.0dB	4.5dB	4.2dB
No.4	4.0dB	5.0dB	5.1dB	4.8dB	5.0dB	5.1dB	4.2dB

*3m/1m/0.5m = Measurement distance

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, Test instruments.

Refer to APPENDIX.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116


Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

Test Item*	Mode
Automatically Deactivate Duty Cycle	Normal use mode
Electric Field Strength of Fundamental Emission Electric Field Strength of Spurious Emission -20dB & 99% Occupied Bandwidth	Transmitting mode (Tx)
* The system was configured in typical fashion (as a customer would normally use it) for testing.	

4.2 Configuration and peripherals



* Test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	BATTERY OIL-PULSE TOOL (Module)	HTW-003T	863-971-1	URYU SEISAKU,LTD.	EUT
B	BATTERY OIL-PULSE TOOL (Drill)	UDBP-T60 (RFA)	09432	URYU SEISAKU,LTD.	EUT
C	BATTERY OIL-PULSE TOOL (Drill Battery)	UB222Li	861-182-1	URYU SEISAKU,LTD.	EUT

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane. The EUT was set on the center of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in Appendix 1.

[Transmitting mode]

The Radiated Electric Field Strength has been measured on Semi anechoic chamber with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver/spectrum analyzer.

Test Antennas are used as below;

Frequency	Below 30MHz	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

	Below or equal to 1GHz *1)	Above 1GHz
Detector Type	QP	Peak and Peak with Duty factor
IF Bandwidth	120kHz	PK: S/A:RBW 1MHz, VBW:3MHz

*1) The test below 1GHz was performed with QP detect because the transmitting duty was 100% on all tests.

Frequency shift width is 8.5kHz, which is much lower than 120kHz. Therefore, the measurement was performed with duty 100%.

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

Noise levels of all the frequencies were measured at the position.

*The result is rounded off to the second decimal place, so some differences might be observed.

Measurement range : 30MHz-4.3GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Automatically deactivate

Test Procedure

The measurement was performed with Electric field strength using a spectrum analyzer.

Test data : APPENDIX
Test result : Pass

SECTION 7: -20dB Bandwidth

Test Procedure

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
20dB Bandwidth	100kHz	15kHz	51kHz	Auto	Peak	Max Hold	Spectrum Analyzer

Test data : APPENDIX
Test result : Pass