



FCC PART 15.407

TEST REPORT

For

SHENZHEN UNITED TIME TECHNOLOGY CO.,LTD.

702,5-A Building, Software Industrial Base, No.11 Haitian 1st Road,
Nanshan District,Shenzhen, China

FCC ID: ZXTIDONDRDOX1

Report Type: Original Report	Product Type: LTE mobile phone
Report Number: <u>RGMA191128001-00E</u>	
Report Date: <u>2020-03-11</u>	
Reviewed By: <u>RF Engineer</u> Jimmy Xiao <i>Jimmy Xiao</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	13
SUPPORT EQUIPMENT LIST AND DETAILS	14
EXTERNAL I/O CABLE.....	14
BLOCK DIAGRAM OF TEST SETUP	14
SUMMARY OF TEST RESULTS.....	15
TEST EQUIPMENT LIST	16
FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION	17
APPLICABLE STANDARD	17
TEST RESULT	17
FCC §15.203 – ANTENNA REQUIREMENT	18
APPLICABLE STANDARD	18
ANTENNA CONNECTOR CONSTRUCTION	18
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS	19
APPLICABLE STANDARD	19
EUT SETUP.....	19
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE	19
TEST RESULTS SUMMARY	20
TEST DATA	20
§15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION	23
APPLICABLE STANDARD	23
EUT SETUP	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
CORRECTED AMPLITUDE & MARGIN CALCULATION	25
TEST RESULTS SUMMARY	25
TEST DATA	25
FCC §15.407(a) (1) – 26 dB & 6dB EMISSION BANDWIDTH.....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41
FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER	64
APPLICABLE STANDARD	64

TEST PROCEDURE64

TEST DATA65

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY67

APPLICABLE STANDARD67

TEST PROCEDURE67

TEST DATA68

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	LTE mobile phone
Model	Discovery-X1
Frequency Range	5G Wi-Fi: 5150-5250 MHz; 5725-5850 MHz
Conducted Average Output Power	5150-5250 MHz: 10.61dBm (802.11a), 10.85dBm(802.11n20), 10.91 dBm(802.11n40) 10.84dBm (802.11ac20), 10.94dBm(802.11 ac40) 5725-5850 MHz 9.94dBm (802.11a), 10.97dBm(802.11n20), 10.87 dBm(802.11n40), 10.96dBm (802.11ac20), 10.67dBm(802.11 ac40)
Modulation Technique	OFDM
Antenna Specification	-1.29dBi
Voltage Range	DC 3.8 V from battery or DC 5V from adapter
Date of Test	2019-12-10 to 2020-03-07
Sample serial number	RGMA191128001-RF-S1(Assigned by BACL, Shenzhen)
Received date	2019-11-28
Sample/EUT Status	Good condition
Adapter information	Model: LM-601E-050200U01CE Input: AC 100-240V, 50/60Hz, 0.35A Output: DC 5V, 2000mA

Objective

This type approval report is prepared on behalf of *SHENZHEN UNITED TIME TECHNOLOGY CO.,LTD.* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS&DSS, Part 22H&24E&27 PCE and FCC Part 15B JBP submissions with FCC ID: ZXTIDONDRDOX1.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device support 802.11a/n20/n40/ac20/ac40 modes.

For 5150-5250MHz Band, 6 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	/	/	/

For 5725-5850MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	/	165	5825


EUT Exercise Software

CMD command was made to the EUT tested. Test frequencies and power level were configured as below:

U-NII	Mode	Frequency (MHz)	Rate (Mbps)	Power Level
5150 – 5250MHz	802.11 a	5180	6	14
		5200	6	14
		5240	6	14
	802.11 n20	5180	MCS0	14
		5200	MCS0	14
		5240	MCS0	14
	802.11 n40	5190	MCS0	14
		5230	MCS0	14
	802.11 ac20	5180	MCS0	14
		5200	MCS0	14
		5240	MCS0	14
	802.11 ac40	5190	MCS0	14
		5230	MCS0	14
5725 – 5850MHz	802.11 a	5745	6	17
		5785	6	17
		5825	6	17
	802.11 n20	5745	MCS0	17
		5785	MCS0	17
		5825	MCS0	17
	802.11 n40	5755	MCS0	17
		5795	MCS0	17
	802.11 ac20	5745	MCS0	17
		5785	MCS0	17
		5825	MCS0	17
	802.11 ac40	5755	MCS0	17
		5795	MCS0	17


Duty cycle
5150-5250 MHz

802.11a mode

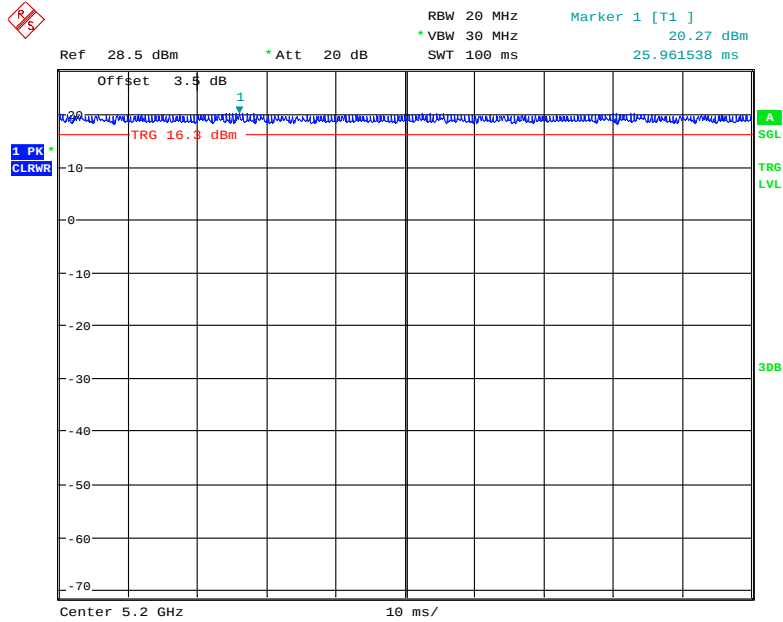


Date: 7.MAR.2020 20:32:42

802.11n20 mode

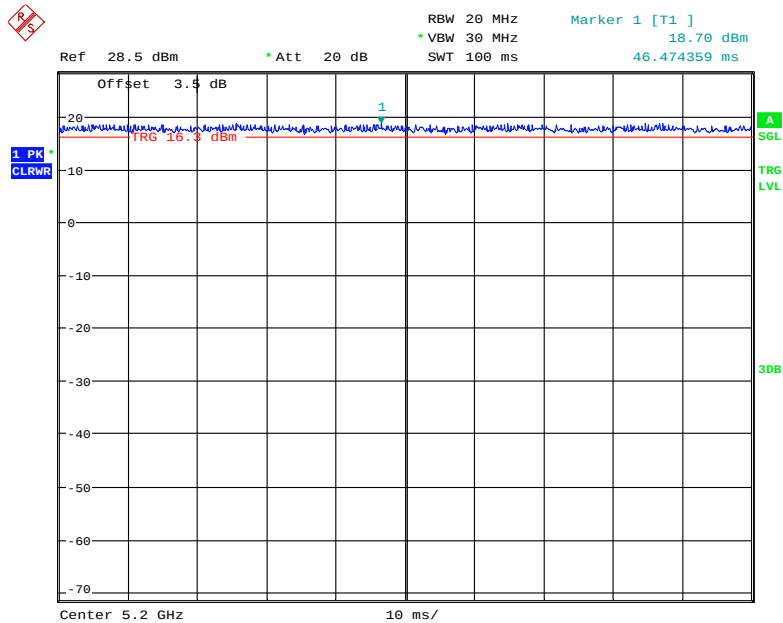


Date: 7.MAR.2020 20:32:18

802.11n40 mode

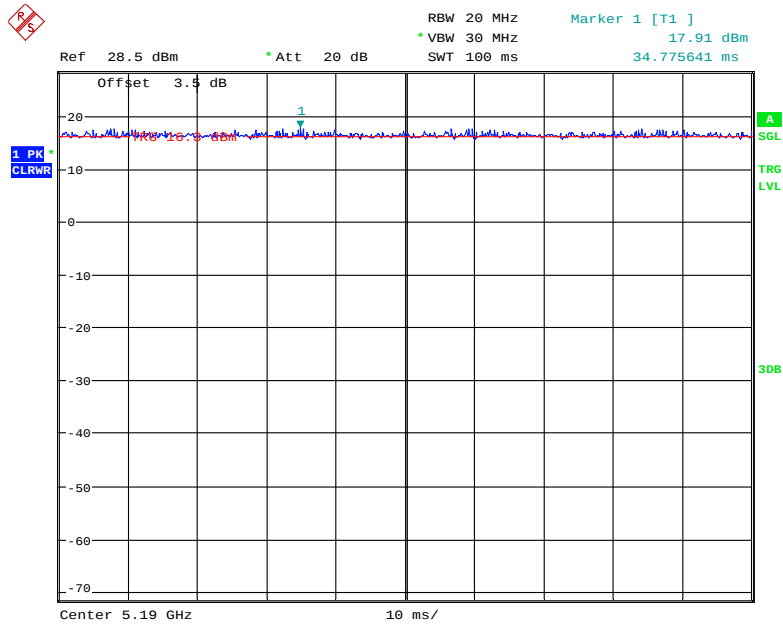


Date: 7.MAR.2020 20:33:25

802.11ac20 Mode

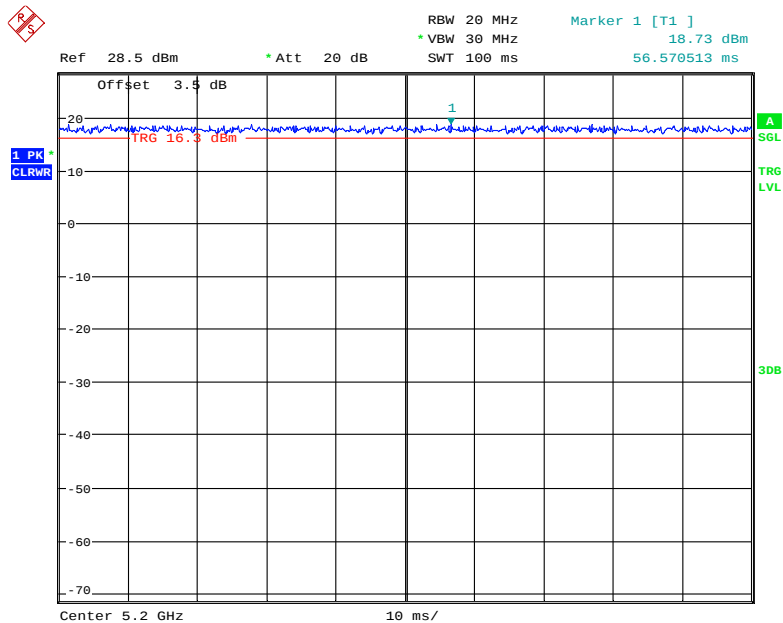

Date: 7.MAR.2020 20:32:00


802.11ac40 Mode

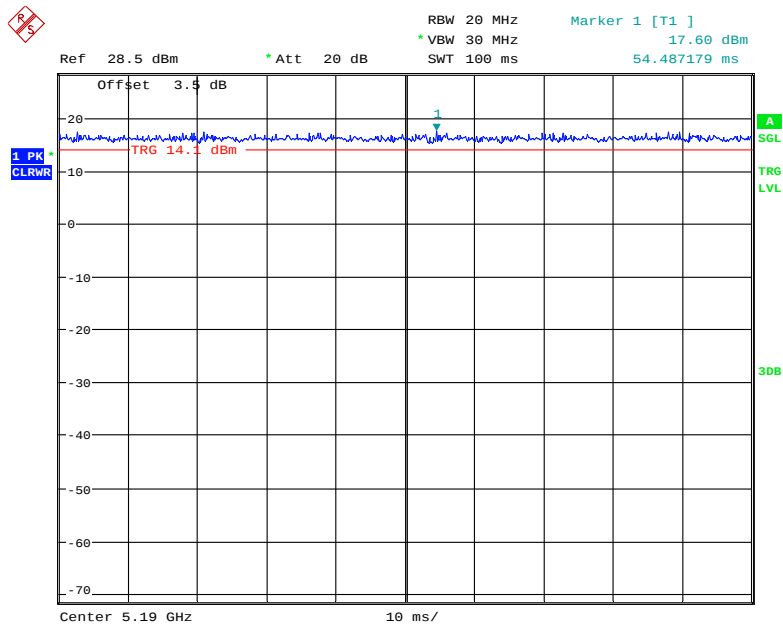

Date: 7.MAR.2020 20:26:42


5725 – 5850MHz

802.11a mode

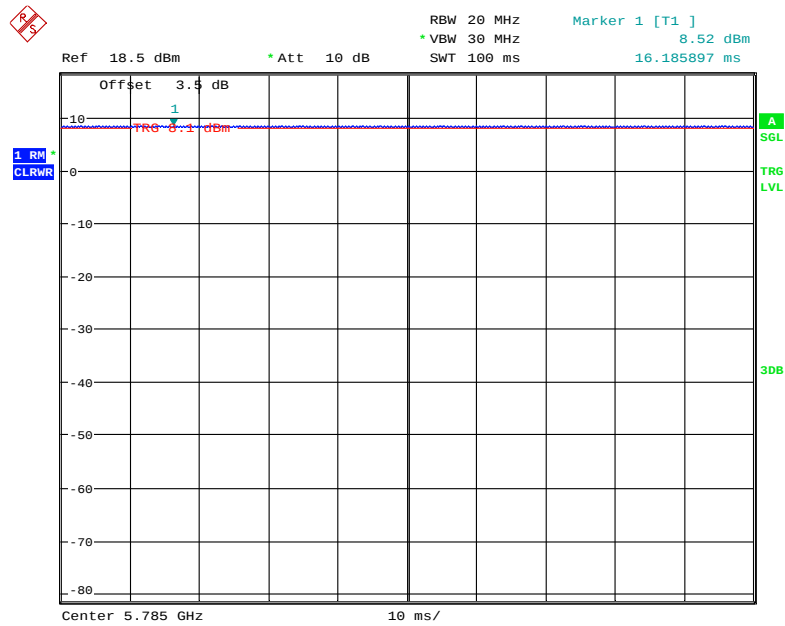


Date: 10.DEC.2019 20:14:57

802.11n20 mode

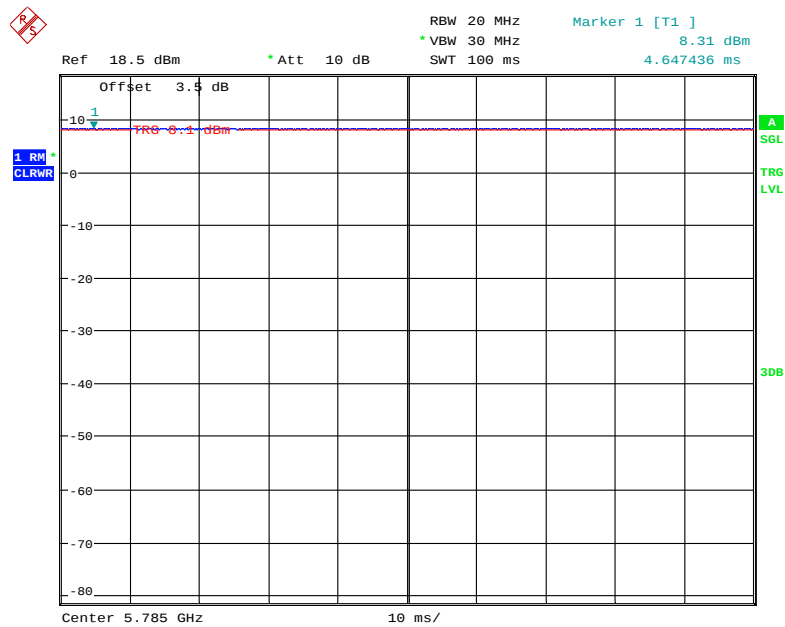


Date: 10.DEC.2019 20:14:34

802.11n40 mode

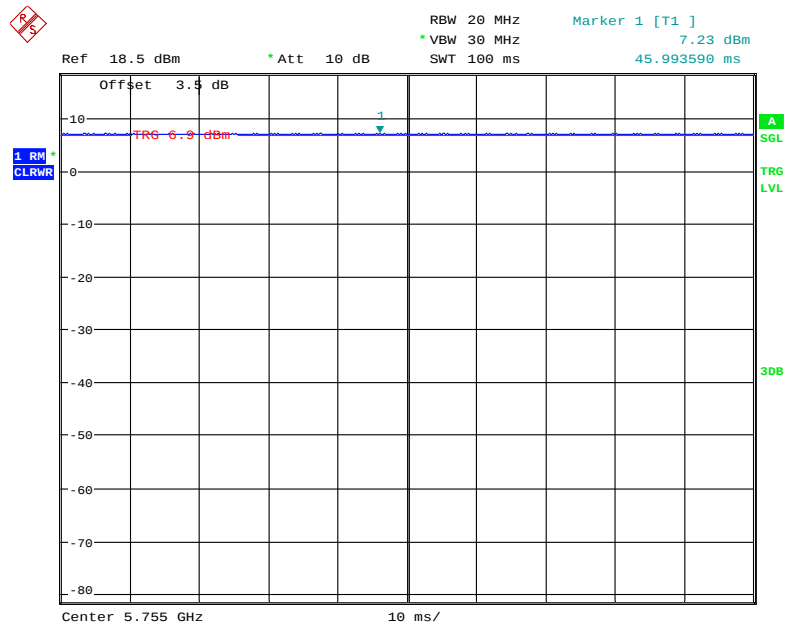


Date: 10.DEC.2019 20:13:20

802.11ac20 Mode

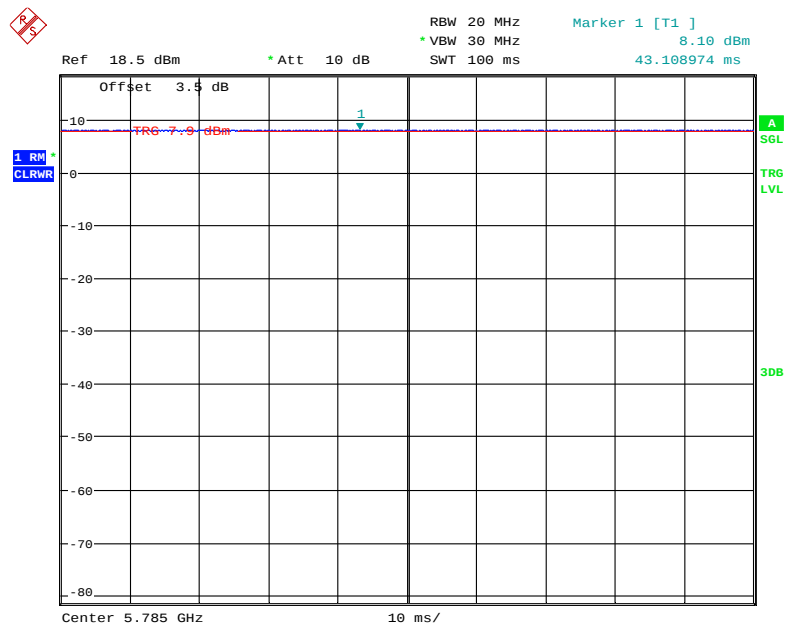

Date: 10.DEC.2019 20:14:14

802.11ac40 Mode

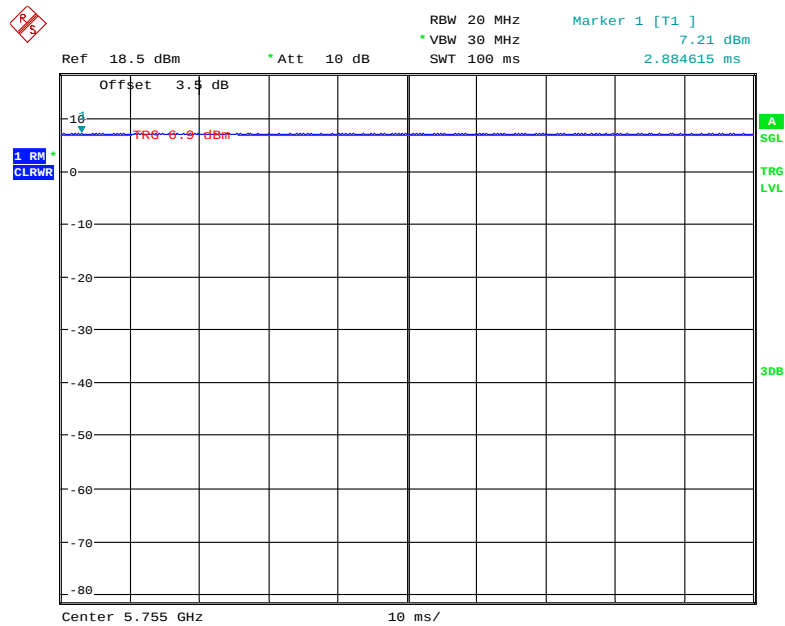

Date: 10.DEC.2019 20:13:39

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting	10log(1/x)
802.11a	100	-	-	10Hz	-
802.11n20	100	-	-	10Hz	-
802.11n40	100	-	-	10Hz	-
802.11ac20	100	-	-	10Hz	-
802.11ac40	100	-	-	10Hz	-

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

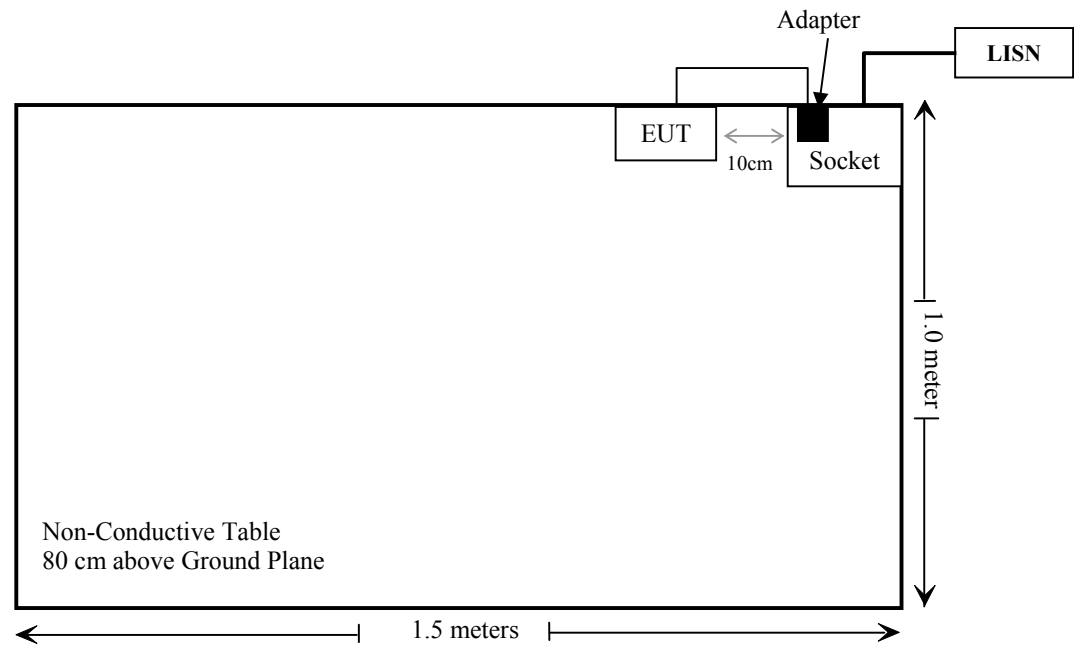

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 1.1307 , §2.1093	RF Exposure (SAR)	Compliance*
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b) (1), (4),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(a) (1), (5),(e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliance
§15.407(a)(1),(3)	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(3)	Power Spectral Density	Compliance

Note: * Please refer to SAR report released by BACL, report number: RGMA191128001-SAA.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2019/7/9	2020/7/8
Rohde & Schwarz	LISN	ENV216	101613	2020/1/22	2021/1/21
Rohde & Schwarz	Transient Limitor	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2019/7/9	2020/7/8
Sonoma instrument	Pre-amplifier	310 N	186238	2019/4/20	2020/4/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019/7/22	2020/07/21
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
SNSD	Band Reject filter	BSF5150-5850MN-0899-004	5G filter	2019/4/20	2020/4/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2017/12/6	2020/12/5
Ducommun Technologies	Horn antenna	ARH-2823-02	1007726-02 1302	2017/12/6	2020/12/5
RF Conducted Test					
Agilent	USB Wideband Power Sensor	U2021XA	MY54250003	2019/7/10	2020/7/9
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200982	2019/3/2	2020/3/2
WEINSCHL	3dB Attenuator	Unknown	F-03-EM121	2019/11/29	2020/11/28
Ducommun technologies	RF Cable	RG-214	3	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RGMA191128001-SAA.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement for 5G Wi-Fi, which was permanently attached and the antenna gain is -1.29 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

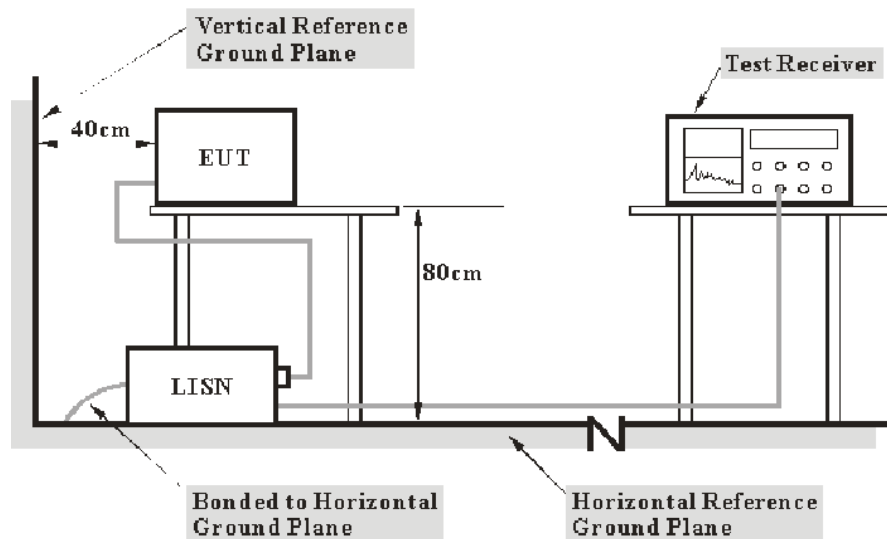

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary


According to the EUT complied with the FCC Part 15.207.

Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2019-12-10

EUT operation mode: Transmitting (worst case is 802.11a mode 5180 MHz)

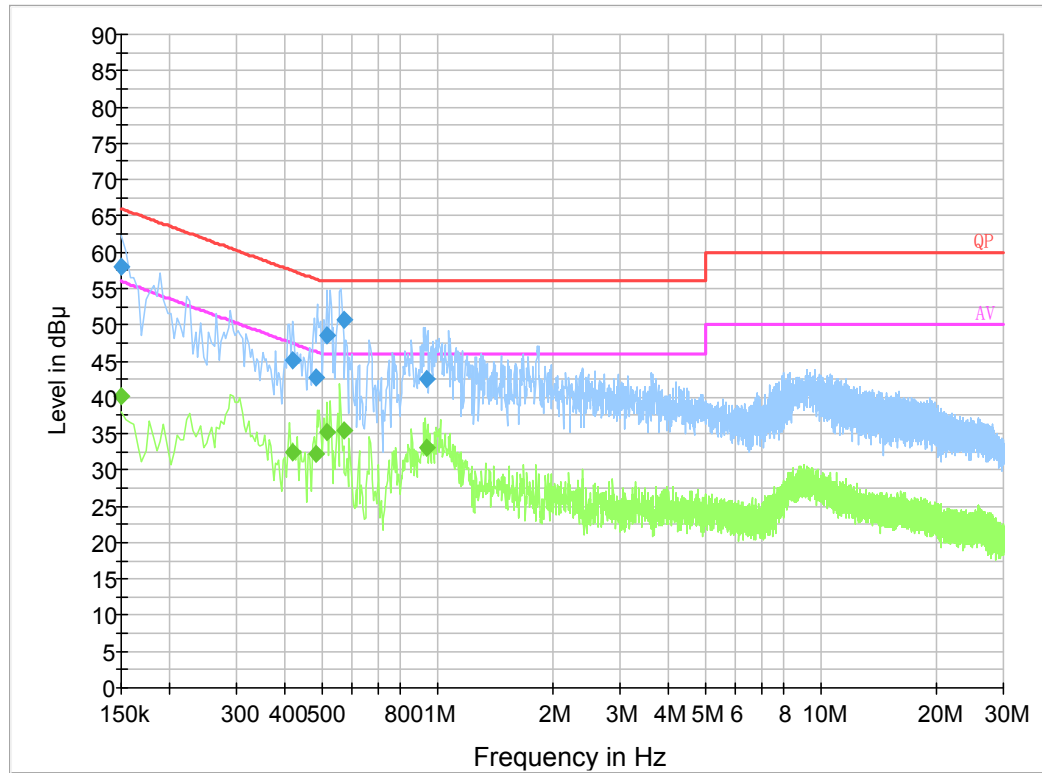AC 120V/60 Hz, Line:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	58.1	19.8	66.0	7.9	QP
0.419670	45.1	19.9	57.5	12.4	QP
0.485170	42.9	19.8	56.3	13.4	QP
0.518230	48.6	19.8	56.0	7.4	QP
0.569570	50.6	19.8	56.0	5.4	QP
0.935830	42.5	19.8	56.0	13.5	QP
0.150000	40.2	19.8	56.0	15.8	Ave.
0.419670	32.5	19.9	47.5	15.0	Ave.
0.485170	32.2	19.8	46.3	14.1	Ave.
0.518230	35.2	19.8	46.0	10.8	Ave.
0.569570	35.5	19.8	46.0	10.5	Ave.
0.935830	33.0	19.8	46.0	13.0	Ave.

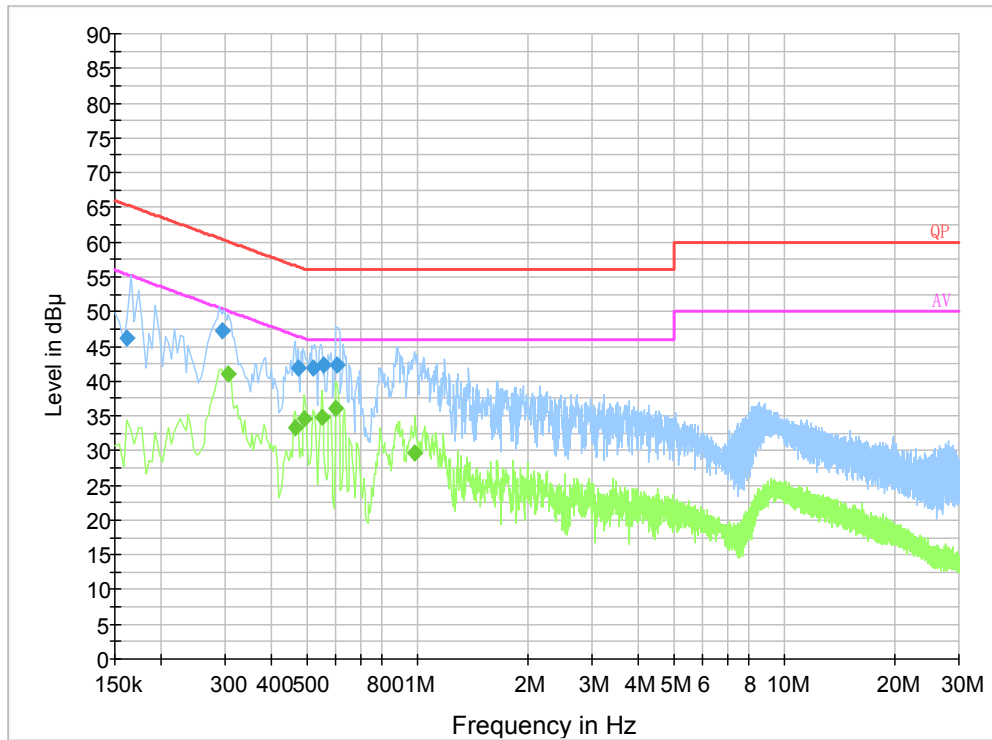AC120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.161500	46.1	19.8	65.4	19.3	QP
0.293500	47.2	19.7	60.4	13.2	QP
0.472990	42.0	19.8	56.5	14.5	QP
0.522110	41.9	19.8	56.0	14.1	QP
0.554190	42.3	19.8	56.0	13.7	QP
0.604970	42.2	19.8	56.0	13.8	QP
0.306000	41.1	19.7	50.1	9.0	Ave.
0.466000	33.3	19.8	46.6	13.3	Ave.
0.494000	34.6	19.8	46.1	11.5	Ave.
0.550000	34.8	19.8	46.0	11.2	Ave.
0.602000	36.0	19.8	46.0	10.0	Ave.
0.986000	29.7	19.8	46.0	16.3	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

§15.205 & §15.209 & §15.407(B) (1), (4), (6), (7) – UNDESIRABLE EMISSION**Applicable Standard**

FCC §15.407 (b) (1), (4), (6), (7); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


(4) For transmitters operating in the 5.725-5.85 GHz band:


(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

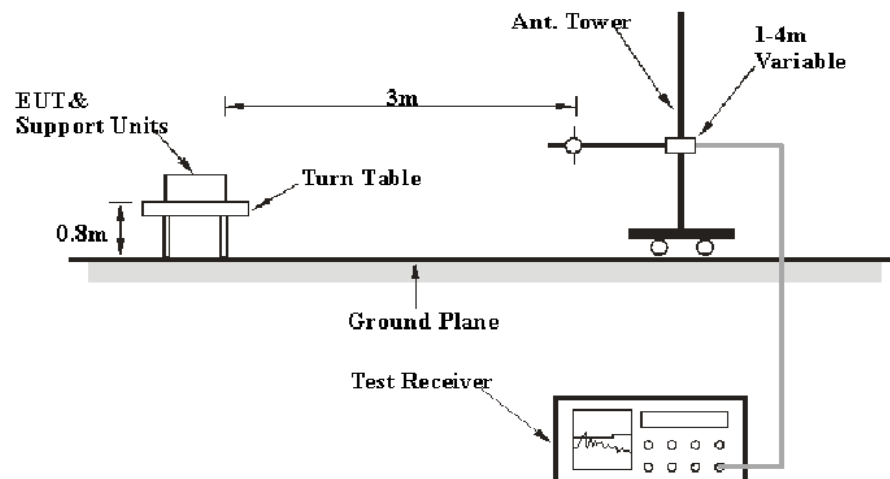

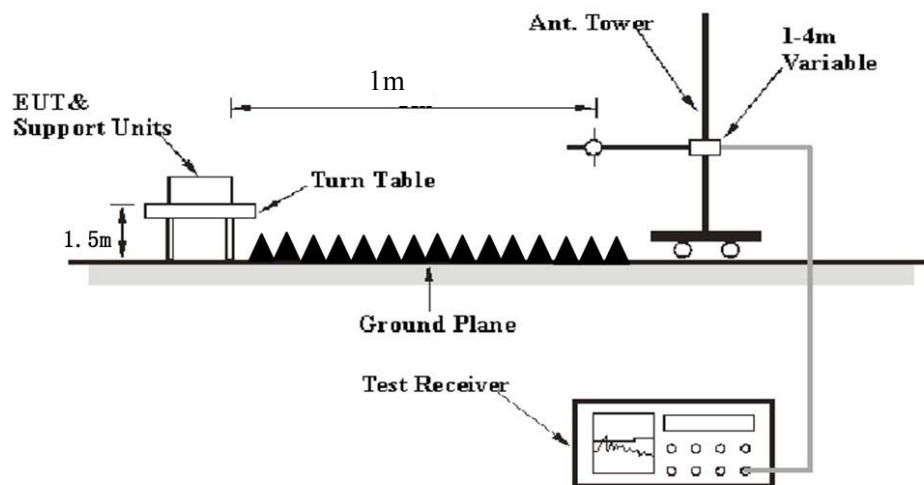Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart E, section 15.205, 15.209 and 15.407 rules.


Test Data

Environmental Conditions

Temperature:	23~25 °C
Relative Humidity:	50~55%
ATM Pressure:	100.9~101.0 kPa

The testing was performed by Steve Lan on 201912-10 for below 1G and Alan He on 2020-02-27 to 2020-02-28 for above 1G.

EUT operation mode: Transmitting

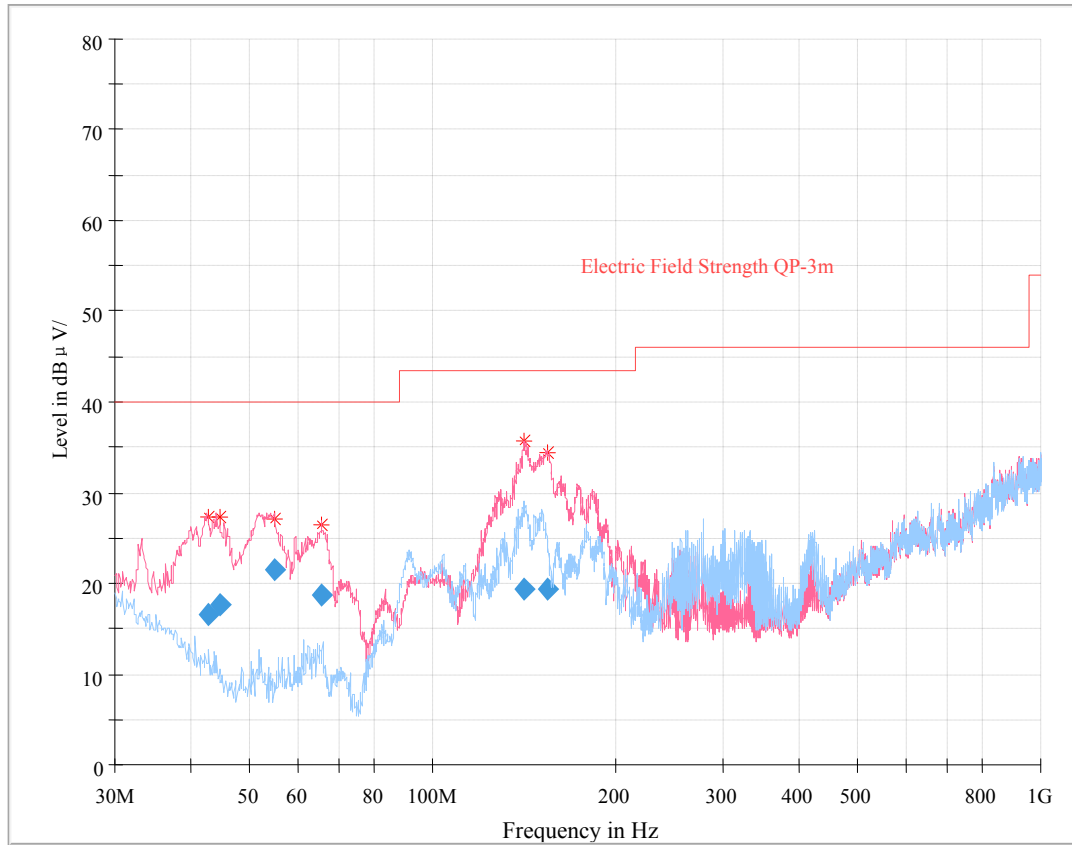30 MHz – 1 GHz: (worst case is 802.11a mode 5180 MHz)

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
42.605125	16.51	105.0	V	159.0	-15.6	40.00	23.49
44.646750	17.57	108.0	V	71.0	-17.0	40.00	22.43
54.911375	21.49	120.0	V	231.0	-19.9	40.00	18.51
65.565375	18.69	140.0	V	47.0	-20.4	40.00	21.31
141.805000	19.25	101.0	V	315.0	-14.2	43.50	24.25
154.014625	19.26	102.0	V	293.0	-14.3	43.50	24.24

30 MHz ~ 40 GHz:

Note: The test distance is 1m, so the correct factor from 3m to 1m is $20\log(3/1)=9.5\text{dB}$ which was added into the final limit.

5150-5250 MHz:

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5180 MHz									
5123.34	31.73	PK	159	2.1	H	38.36	70.09	83.5	13.41
5123.34	16.63	Ave.	159	2.1	H	38.36	54.99	63.5	8.51
5382.87	31.36	PK	75	1.8	H	39.09	70.45	83.5	13.05
5382.87	16.67	Ave.	75	1.8	H	39.09	55.76	63.5	7.74
8287.92	51.81	PK	49	2.3	H	13.16	64.97	83.5	18.53
8287.92	48.73	Ave.	49	2.3	H	13.16	61.89	63.5	1.61
10360.00	44.99	PK	19	1.5	H	17.42	62.41	77.7	15.29
5200 MHz									
8319.87	51.74	PK	287	1.8	H	13.16	64.90	83.5	18.60
8319.87	48.31	Ave.	287	1.8	H	13.16	61.47	63.5	2.03
10400.00	44.36	PK	110	1.3	H	17.52	61.88	77.7	15.82
5240 MHz									
5147.79	31.49	PK	195	1.9	H	38.36	69.85	83.5	13.65
5147.79	16.54	Ave.	195	1.9	H	38.36	54.90	63.5	8.60
5361.38	30.90	PK	263	1.8	H	39.09	69.99	83.5	13.51
5361.38	16.66	Ave.	263	1.8	H	39.09	55.75	63.5	7.75
8383.68	50.90	PK	284	1.9	H	12.95	63.85	83.5	19.65
8383.68	46.43	Ave.	284	1.9	H	12.95	59.38	63.5	4.12
10480.00	42.99	PK	81	2.5	H	17.25	60.24	77.7	17.46

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n20									
5180 MHz									
5148.95	31.97	PK	164	1.7	H	38.36	70.33	83.5	13.17
5148.95	16.78	Ave.	164	1.7	H	38.36	55.14	63.5	8.36
5431.38	30.78	PK	215	1.9	H	39.19	69.97	83.5	13.53
5431.38	16.65	Ave.	215	1.9	H	39.19	55.84	63.5	7.66
8288.09	52.09	PK	146	2.0	H	13.16	65.25	83.5	18.25
8288.09	49.04	Ave.	146	2.0	H	13.16	62.20	63.5	1.30
10360.00	44.65	PK	63	2.3	H	17.42	62.07	77.7	15.63
5200 MHz									
8320.10	52.28	PK	222	1.6	H	13.16	65.44	83.5	18.06
8320.10	49.00	Ave.	222	1.6	H	13.16	62.16	63.5	1.34
10400.00	43.76	PK	71	2.4	H	17.52	61.28	77.7	16.42
5240 MHz									
5136.43	31.63	PK	239	1.4	H	38.36	69.99	83.5	13.51
5136.43	16.54	Ave.	239	1.4	H	38.36	54.90	63.5	8.60
5354.38	30.95	PK	351	1.7	H	39.09	70.04	83.5	13.46
5354.38	16.66	Ave.	351	1.7	H	39.19	55.85	63.5	7.65
8383.97	50.92	PK	230	1.4	H	12.95	63.87	83.5	19.63
8383.97	47.21	Ave.	230	1.4	H	12.95	60.16	63.5	3.34
10480.00	42.87	PK	187	2.3	H	17.25	60.12	77.7	17.58

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n40									
5190 MHz									
5149.60	34.75	PK	187	1.8	H	38.36	73.11	83.5	10.39
5149.60	20.02	Ave.	187	1.8	H	38.36	58.38	63.5	5.12
5394.97	31.88	PK	25	1.4	H	39.19	71.07	83.5	12.43
5394.97	16.66	Ave.	25	1.4	H	39.19	55.85	63.5	7.65
8303.97	52.57	PK	233	2.1	H	13.16	65.73	83.5	17.77
8303.97	49.62	Ave.	233	2.1	H	13.16	62.78	63.5	0.72
10380.00	41.97	PK	222	1.4	H	17.42	59.39	77.7	18.31
5230 MHz									
5149.82	31.58	PK	269	1.2	H	38.36	69.94	83.5	13.56
5149.82	16.56	Ave.	269	1.2	H	38.36	54.92	63.5	8.58
5398.95	30.63	PK	46	2.2	H	39.19	69.82	83.5	13.68
5394.97	16.65	Ave.	46	2.2	H	39.19	55.84	63.5	7.66
8368.02	50.29	PK	323	2.4	H	12.95	63.24	83.5	20.26
8368.02	46.82	Ave.	323	2.4	H	12.95	59.77	63.5	3.73
10460.00	41.69	PK	296	2.2	H	17.15	58.84	77.7	18.86

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac20									
5180 MHz									
5149.53	31.74	PK	220	1.7	H	38.36	70.10	83.5	13.40
5149.53	16.69	Ave.	220	1.7	H	38.36	55.05	63.5	8.45
5451.01	30.84	PK	282	1.2	H	39.37	70.21	83.5	13.29
5451.01	16.64	Ave.	282	1.2	H	39.37	56.01	63.5	7.49
8288.06	52.38	PK	326	2.2	H	13.16	65.54	83.5	17.96
8288.06	49.27	Ave.	326	2.2	H	13.16	62.43	63.5	1.07
10360.00	43.91	PK	204	2.4	H	17.42	61.33	77.7	16.37
5200 MHz									
8319.93	52.73	PK	295	2.0	H	13.16	65.89	83.5	17.61
8319.93	49.55	Ave.	295	2.0	H	13.16	62.71	63.5	0.79
10400.00	42.29	PK	203	1.4	H	17.52	59.81	77.7	17.89
5240 MHz									
5110.46	31.65	PK	221	1.6	H	38.26	69.91	83.5	13.59
5110.46	16.54	Ave.	221	1.6	H	38.26	54.80	63.5	8.70
5454.19	31.38	PK	347	2.2	H	39.37	70.75	83.5	12.75
5454.19	16.67	Ave.	347	2.2	H	39.37	56.04	63.5	7.46
8384.03	50.55	PK	321	2.1	H	12.95	63.50	83.5	20.00
8384.03	46.79	Ave.	321	2.1	H	12.95	59.74	63.5	3.76
10480.00	41.85	PK	308	1.4	H	17.25	59.10	77.7	18.60

Frequency (MHz)	Receiver		Turntable	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.	Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11ac40									
5190 MHz									
5145.84	34.43	PK	305	2.1	H	38.36	72.79	83.5	10.71
5145.84	19.40	Ave.	305	2.1	H	38.36	57.76	63.5	5.74
5454.19	31.64	PK	40	1.8	H	39.37	71.01	83.5	12.49
5454.19	16.61	Ave.	40	1.8	H	39.37	55.98	63.5	7.52
8304.00	52.05	PK	296	1.4	H	13.16	65.21	83.5	18.29
8304.00	43.49	Ave.	296	1.4	H	13.16	56.65	63.5	6.85
10380.00	41.74	PK	319	1.0	H	17.42	59.16	77.7	18.54
5230 MHz									
5132.31	31.27	PK	221	1.2	H	38.36	69.63	83.5	13.87
5132.31	16.34	Ave.	221	1.2	H	38.36	54.70	63.5	8.80
5432.86	31.43	PK	4	2.1	H	39.29	70.72	83.5	12.78
5432.86	16.65	Ave.	4	2.1	H	39.29	55.94	63.5	7.56
8368.04	49.95	PK	246	1.2	H	12.95	62.90	83.5	20.60
8368.04	41.39	Ave.	246	1.2	H	12.95	54.34	63.5	9.16
10460.00	41.08	PK	98	2.5	H	17.15	58.23	77.7	19.47

5725-5850 MHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part 15.407/205/209	
	Reading (dBµV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
802.11a									
5745 MHz									
5681.08	32.06	PK	311	1.9	H	39.49	71.55	100.7	29.15
5719.93	33.46	PK	311	1.9	H	39.49	72.95	120.28	47.33
5724.97	38.69	PK	118	1.6	H	39.49	78.18	131.63	53.45
8048.00	47.78	PK	316	1.3	H	13.16	60.94	83.5	22.56
8048.00	35.30	Ave.	316	1.3	H	13.16	48.46	63.5	15.04
11490.00	52.42	PK	43	2.3	H	17.47	69.89	83.5	13.61
11490.00	37.55	Ave.	43	2.3	H	17.47	55.02	63.5	8.48
5785 MHz									
8098.00	45.37	PK	183	1.8	H	13.40	58.77	83.5	24.73
8098.00	32.62	Ave.	183	1.8	H	13.40	46.02	63.5	17.48
11570.00	54.16	PK	290	2.3	H	17.51	71.67	83.5	11.83
11570.00	38.63	Ave.	290	2.3	H	17.51	56.14	63.5	7.36
5825 MHz									
5852.96	35.61	PK	153	1.1	H	39.87	75.48	124.95	49.47
5856.40	33.70	PK	153	1.1	H	39.87	73.57	119.91	46.34
5899.42	33.39	PK	349	2.1	H	39.87	73.26	96.63	23.37
8064.31	45.77	PK	202	1.9	H	13.40	59.17	83.5	24.33
8064.31	32.65	Ave.	202	1.9	H	13.40	46.05	63.5	17.45
11650.00	54.36	PK	341	1.4	H	16.18	70.54	83.5	12.96
11650.00	39.73	Ave.	341	1.4	H	16.18	55.91	63.5	7.59

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11n20									
5745 MHz									
5688.82	33.41	PK	177	1.2	H	39.49	72.90	106.43	33.53
5719.99	37.73	PK	177	1.2	H	39.49	77.22	120.3	43.08
5724.86	45.21	PK	284	1.1	H	39.49	84.70	131.38	46.68
8074.25	45.88	PK	263	1.1	H	13.40	59.28	83.5	24.22
8074.25	32.67	Ave.	263	1.1	H	13.40	46.07	63.5	17.43
11490.00	52.97	PK	51	2.1	H	17.47	70.44	83.5	13.06
11490.00	36.82	Ave.	51	2.1	H	17.47	54.29	63.5	9.21
5785 MHz									
8052.47	47.38	PK	230	1.4	H	13.40	60.78	83.5	22.72
8052.47	35.01	Ave.	230	1.4	H	13.40	48.41	63.5	15.09
11570.00	53.06	PK	180	2.2	H	17.51	70.57	83.5	12.93
11570.00	37.08	Ave.	180	2.2	H	17.51	54.59	63.5	8.91
5825 MHz									
5850.10	37.29	PK	320	1.5	H	39.87	77.16	131.47	54.31
5855.56	34.03	PK	320	1.5	H	39.87	73.90	120.14	46.24
5924.24	34.06	PK	112	2.2	H	39.97	74.03	78.26	4.23
8066.54	45.84	PK	137	1.5	H	13.40	59.24	83.5	24.26
8066.54	32.36	Ave.	137	1.5	H	13.40	45.76	63.5	17.74
11650.00	52.10	PK	200	2.4	H	16.18	68.28	83.5	15.22
11650.00	36.16	Ave.	200	2.4	H	16.18	52.34	63.5	11.16

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11n40									
5755 MHz									
5695.91	34.15	PK	287	2.4	H	39.49	73.64	116.67	43.03
5719.03	43.40	PK	287	2.4	H	39.49	82.89	120.03	37.14
5721.88	44.35	PK	58	2.4	H	39.49	83.84	124.59	40.75
8085.46	45.39	PK	102	2.0	H	13.40	58.79	83.5	24.71
8085.46	32.28	Ave.	102	2.0	H	13.40	45.68	63.5	17.82
11510.00	50.15	PK	332	1.3	H	17.47	67.62	83.5	15.88
11510.00	37.07	Ave.	332	1.3	H	17.47	54.54	63.5	8.96
5795 MHz									
5854.66	34.87	PK	10	1.4	H	39.87	74.74	121.08	46.34
5867.03	33.68	PK	10	1.4	H	39.87	73.55	116.93	43.38
5879.38	33.45	PK	118	1.1	H	39.87	73.32	111.46	38.14
8072.64	45.29	PK	334	2.1	H	13.40	58.69	83.5	24.81
8072.64	32.23	Ave.	334	2.1	H	13.40	45.63	63.5	17.87
11590.00	50.42	PK	164	1.5	H	17.51	67.93	83.5	15.57
11590.00	37.28	Ave.	164	1.5	H	17.51	54.79	63.5	8.71

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11ac20									
5745 MHz									
5677.53	32.64	PK	280	1.1	H	55.25	87.89	98.07	10.18
5719.99	36.57	PK	280	1.1	H	55.25	91.82	120.3	28.48
5724.07	44.48	PK	120	1.2	H	55.25	99.73	129.58	29.85
8069.73	45.32	PK	193	2.4	H	13.40	58.72	83.5	24.78
8069.73	32.18	Ave.	193	2.4	H	13.40	45.58	63.5	17.92
11490.00	52.38	PK	10	2.2	H	17.47	69.85	83.5	13.65
11490.00	36.69	Ave.	10	2.2	H	17.47	54.16	63.5	9.34
5785 MHz									
8083.52	45.66	PK	37	2.5	H	13.40	59.06	83.5	24.44
8083.52	32.35	Ave.	37	2.5	H	13.40	45.75	63.5	17.75
11570.00	52.01	PK	29	1.5	H	17.51	69.52	83.5	13.98
11570.00	36.33	Ave.	29	1.5	H	17.51	53.84	63.5	9.66
5825 MHz									
5850.47	37.82	PK	279	2.3	H	39.87	77.69	130.47	52.78
5860.11	33.98	PK	279	2.3	H	39.87	73.85	118.87	45.02
5913.24	33.42	PK	38	1.3	H	39.87	73.29	86.4	13.11
8077.26	45.83	PK	289	1.8	H	13.40	59.23	83.5	24.27
8077.26	32.27	Ave.	289	1.8	H	13.40	45.67	63.5	17.83
11650.00	51.53	PK	87	1.5	H	16.18	67.71	83.5	15.79
11650.00	35.85	Ave.	87	1.5	H	16.18	52.03	63.5	11.47

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
802.11ac40									
5755 MHz									
5699.53	33.98	PK	255	1.2	H	39.49	73.47	114.35	40.88
5719.00	43.90	PK	255	1.2	H	39.49	83.39	120.02	36.63
5723.64	44.47	PK	165	1.2	H	39.49	83.96	128.6	44.64
8053.44	45.34	PK	321	2.4	H	13.40	58.74	83.5	24.76
8053.44	32.18	Ave.	321	2.4	H	13.40	45.58	63.5	17.92
11510.00	49.63	PK	87	1.8	H	17.47	67.10	83.5	16.40
11510.00	37.05	Ave.	87	1.8	H	17.47	54.52	63.5	8.98
5795 MHz									
5850.00	35.65	PK	254	2.2	H	39.87	75.52	131.7	56.18
5859.67	34.43	PK	254	2.2	H	39.87	74.30	118.99	44.69
5893.99	33.69	PK	193	2.4	H	39.87	73.56	100.65	27.09
8049.36	47.34	PK	311	1.8	H	13.16	60.50	83.5	23.00
8049.36	35.14	Ave.	311	1.8	H	13.16	48.30	63.5	15.20
11590.00	49.56	PK	290	1.0	H	17.51	67.07	83.5	16.43
11590.00	37.26	Ave.	290	1.0	H	17.51	54.77	63.5	8.73

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor


Margin = Limit- Corr. Amplitude

All other spurious emissions are 20 dB below the limit or are on the system noise floor level.


Peak

Pre-scan with 802.11a 5785MHz


Horizontal

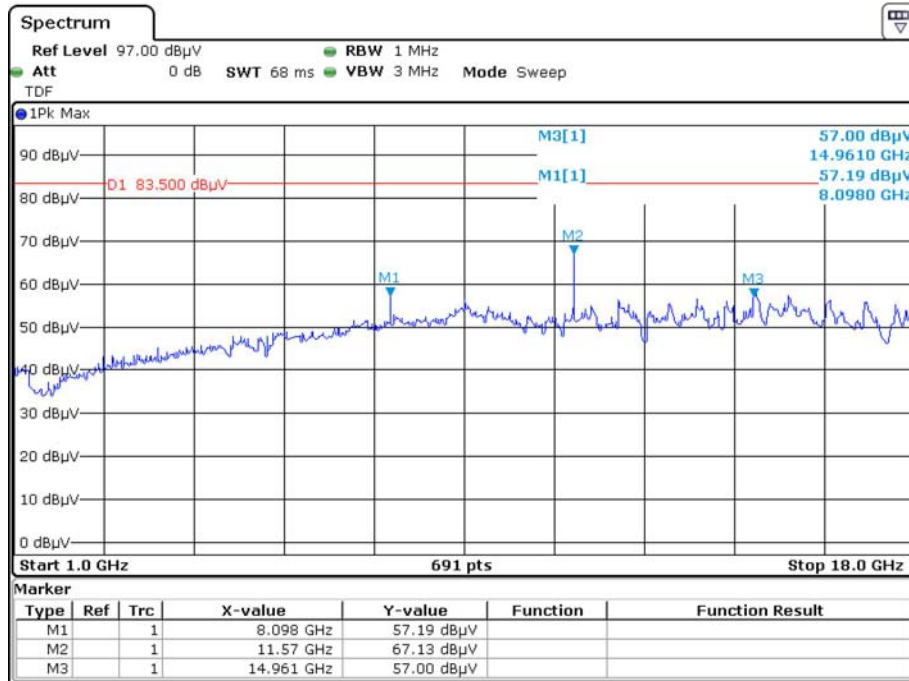


Date: 28.FEB.2020 13:32:35

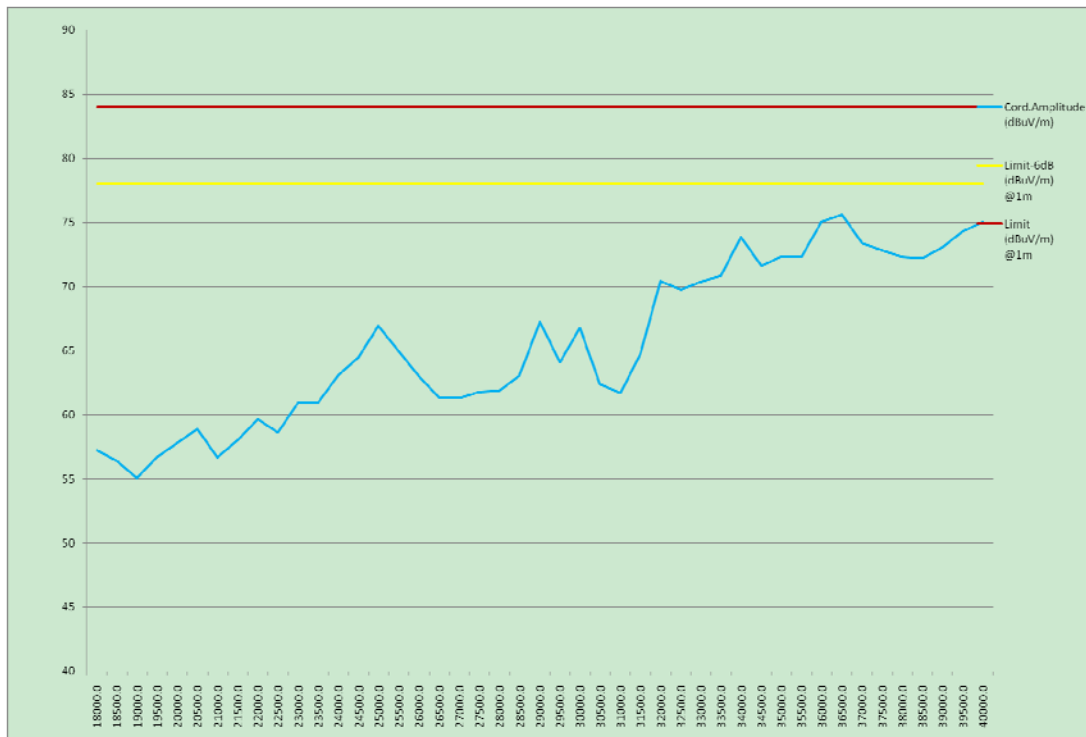


Vertical

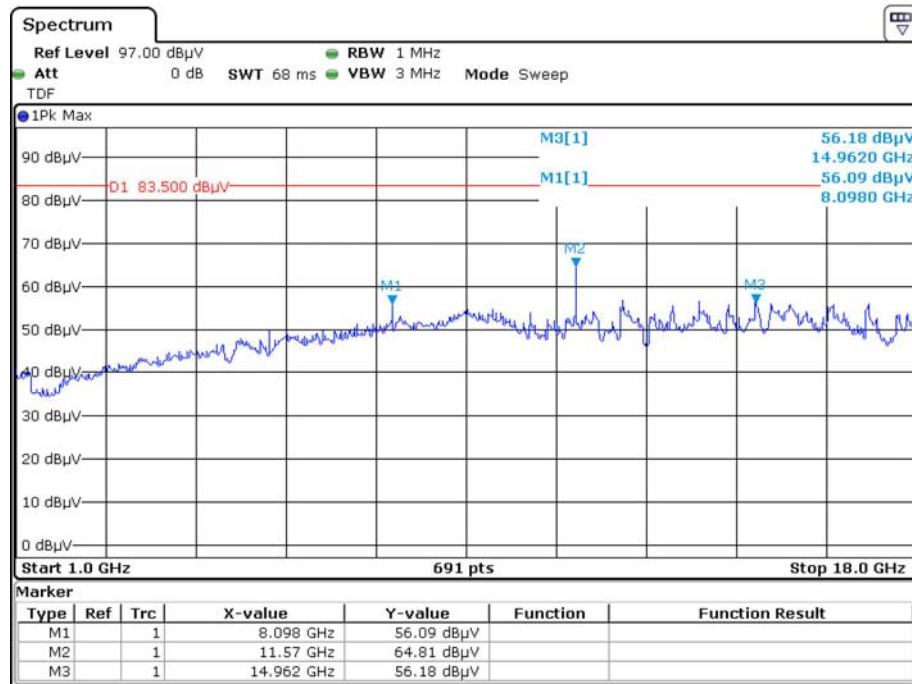


Date: 28.FEB.2020 13:43:28

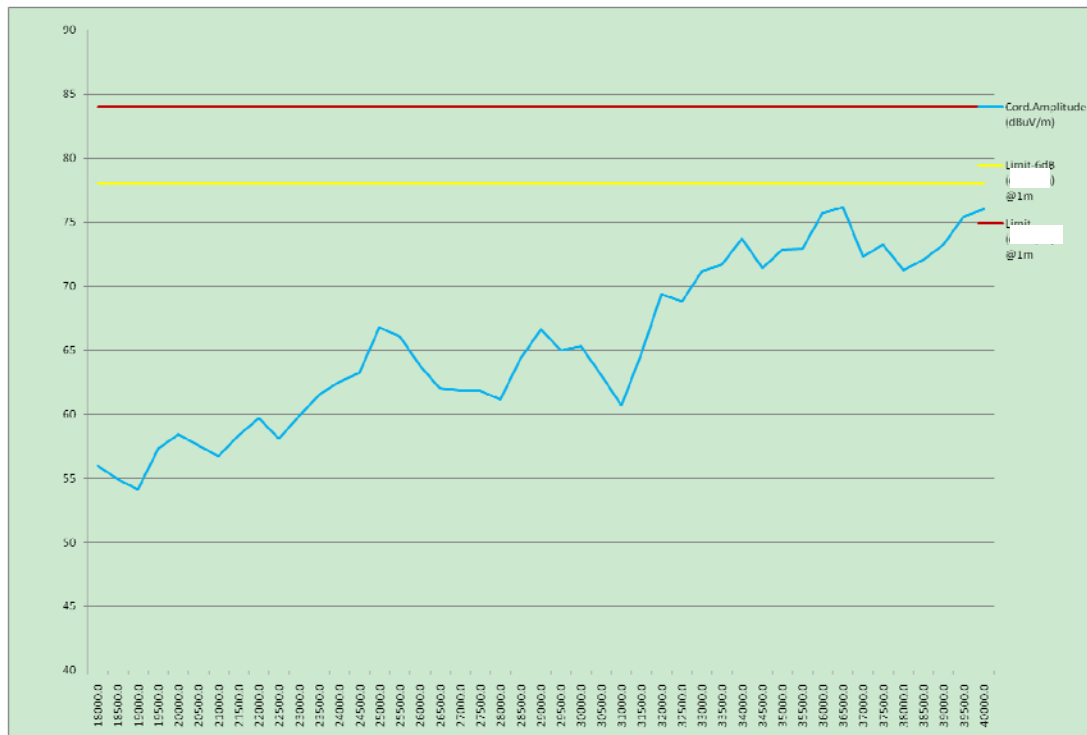


Average Horizontal

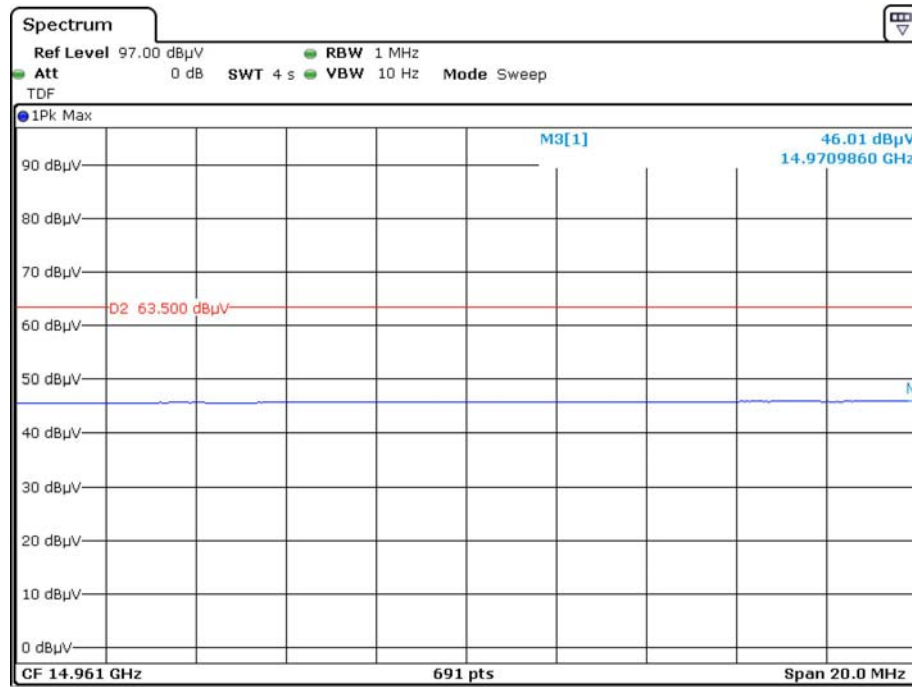


Date: 28.FEB.2020 13:36:57

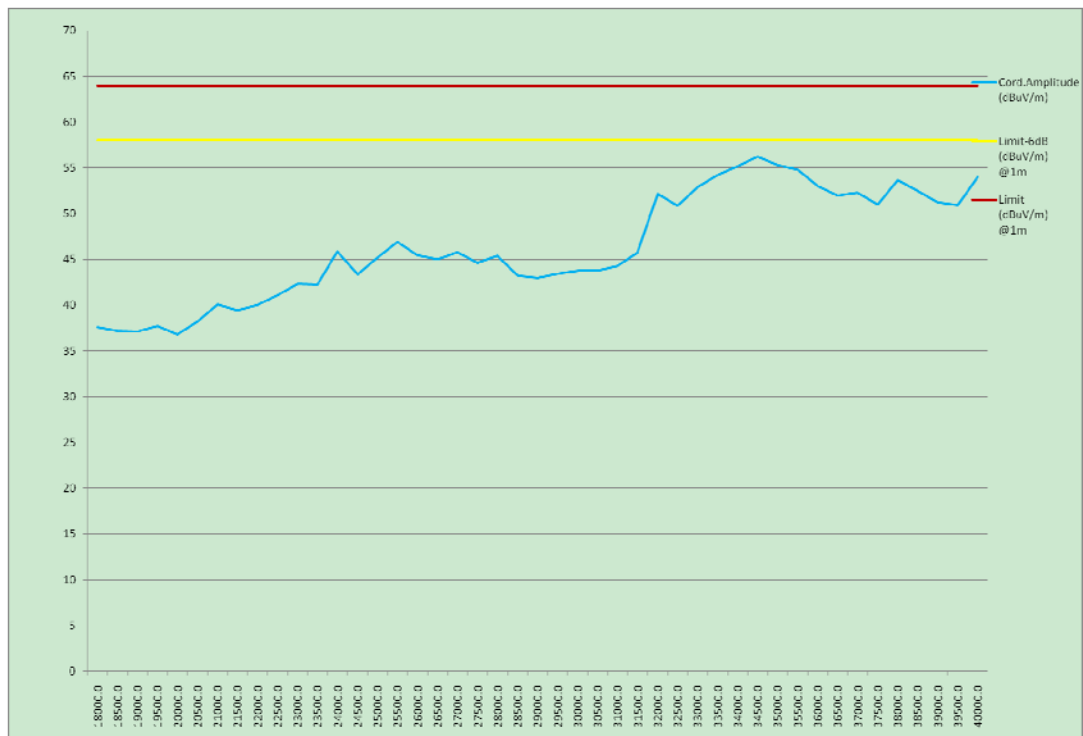

Vertical

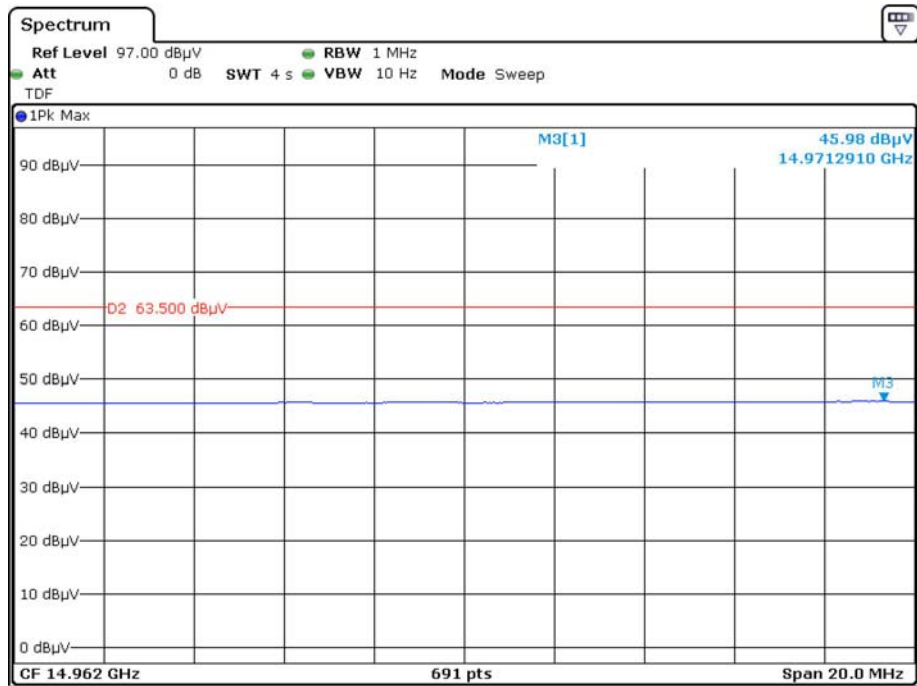

Date: 28.FEB.2020 13:48:43

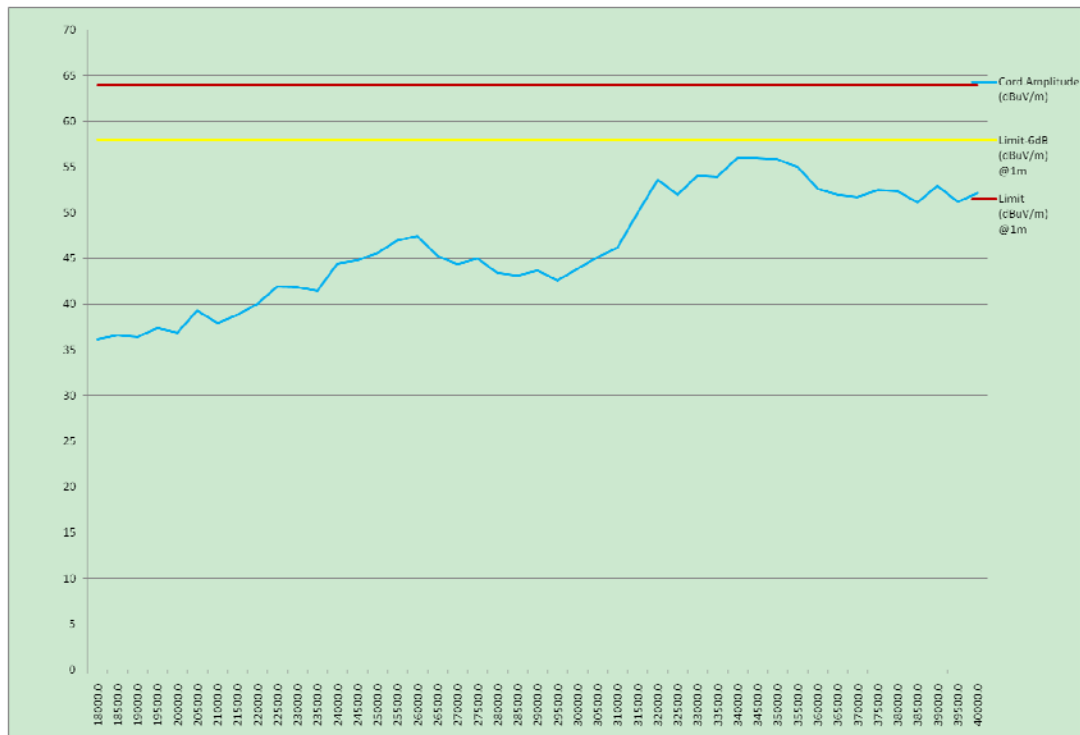

FCC §15.407(a) (1) – 26 dB & 6dB EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	22~24 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa


The testing was performed by James Fu on 2019-12-10 and George Zhong on 2020-03-07.

EUT operation mode: Transmitting


Test Result: Pass; please refer to the following tables and plots.

5150 MHz - 5250 MHz:

Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Remark
802.11a			No transmitted signal in the 99% bandwidth extends into the U-NII-2A band
5180	19.97	16.99	
5200	19.87	16.86	
5240	19.87	16.92	
802.11n20			
5180	19.97	17.76	
5200	20.00	17.76	
5240	20.22	17.76	
802.11n40			
5190	40.33	36.15	
5230	40.36	36.15	
802.11ac20			
5180	20.10	17.76	
5200	20.06	17.76	
5240	20.15	17.76	
802.11ac40			
5190	40.33	36.15	
5230	40.36	36.15	

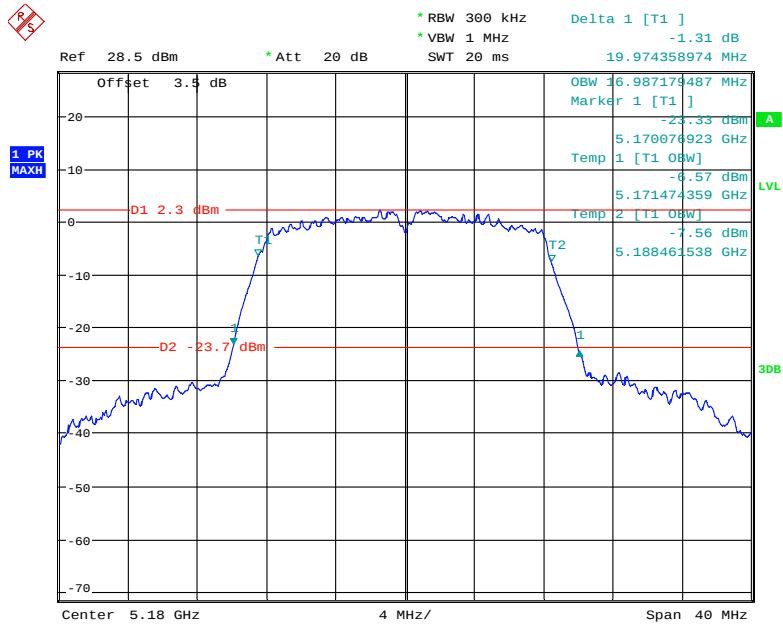
802.11a mode, 26 dB Emissions & 99% Occupied Bandwidth, 5180 MHz

Date: 7.MAR.2020 20:14:42

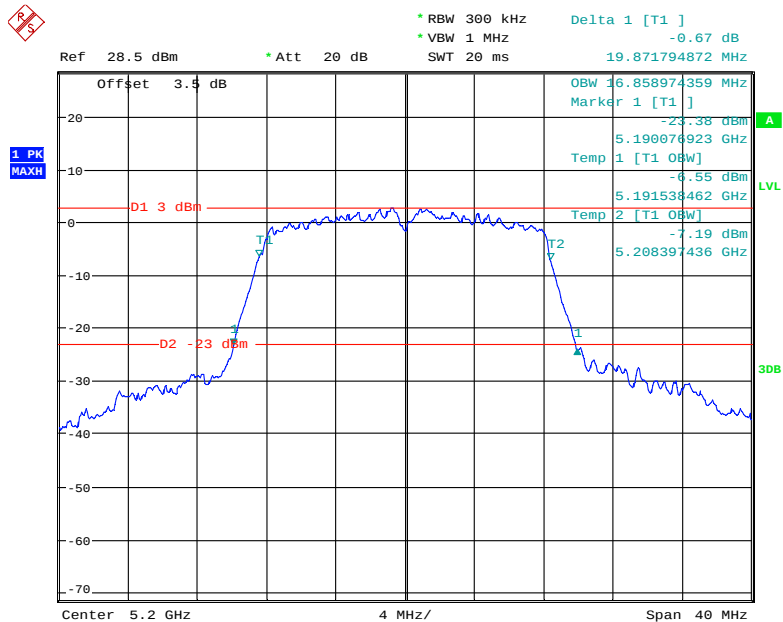802.11a mode, 26 dB Emissions & 99% Occupied Bandwidth, 5200 MHz


Date: 7.MAR.2020 20:13:31

802.11a mode, 26 dB Emissions & 99% Occupied Bandwidth, 5240 MHz

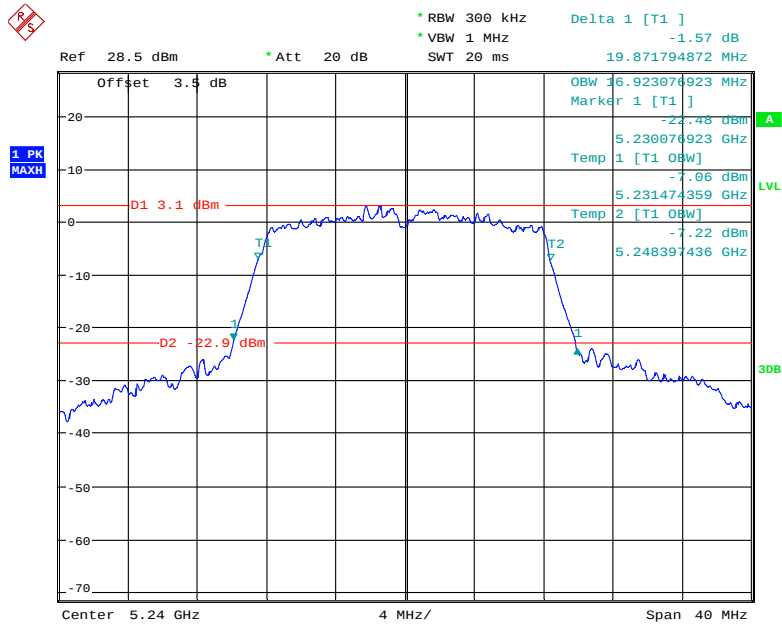


Date: 7.MAR.2020 20:12:28

802.11n20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5180 MHz

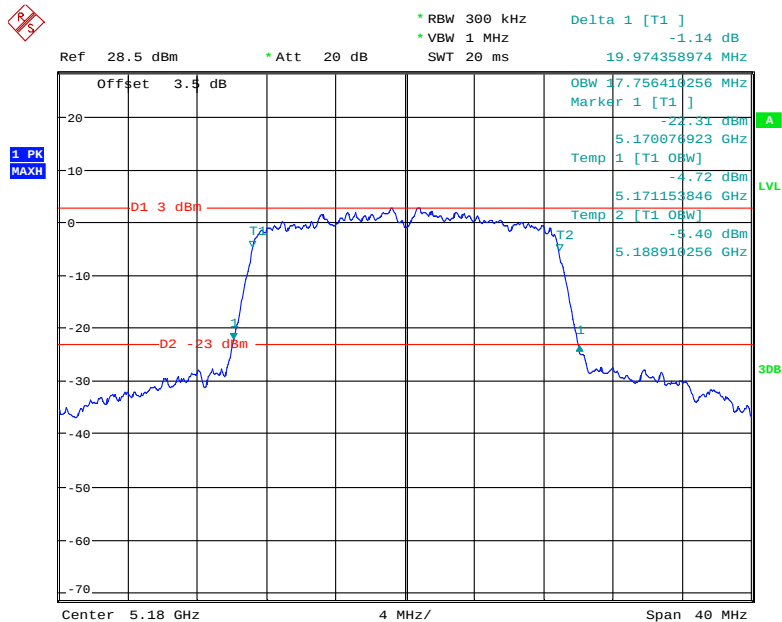


Date: 7.MAR.2020 20:16:02

802.11n20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5200 MHz

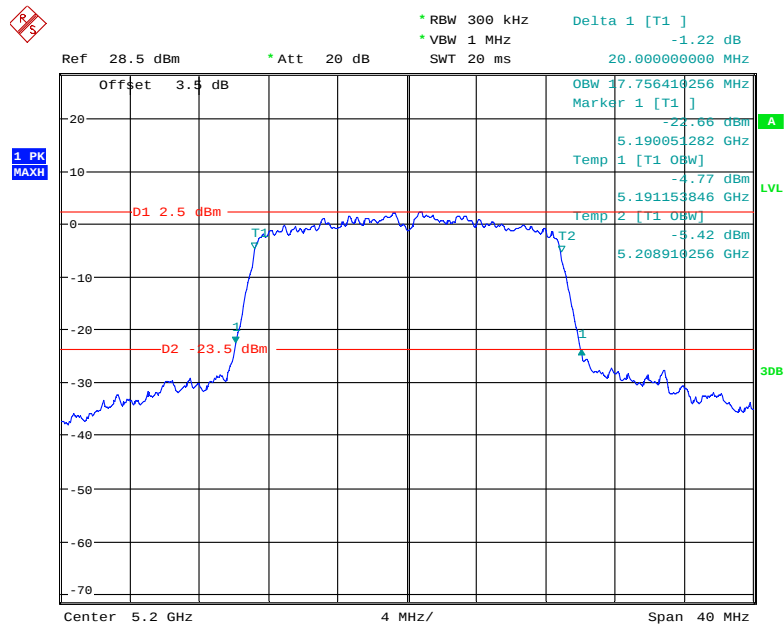


Date: 7.MAR.2020 20:18:14


802.11n20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5240 MHz

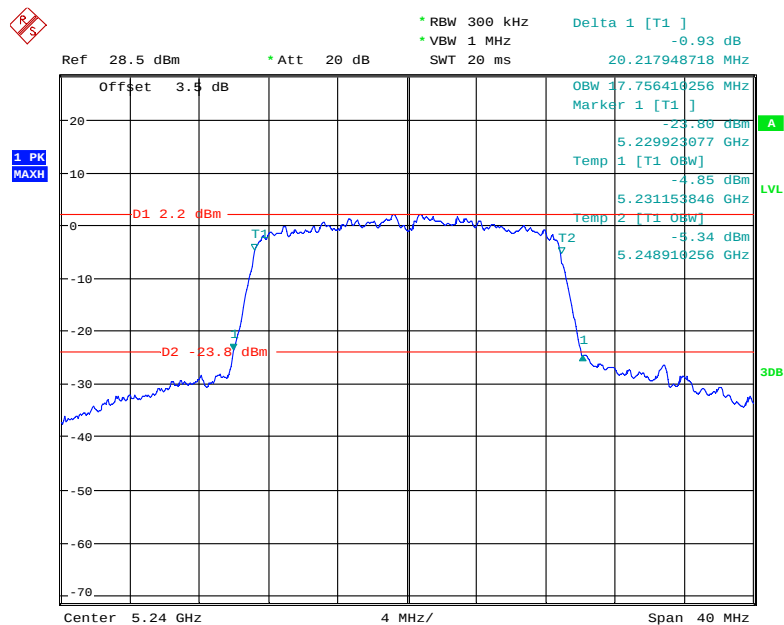

Date: 7.MAR.2020 20:19:18

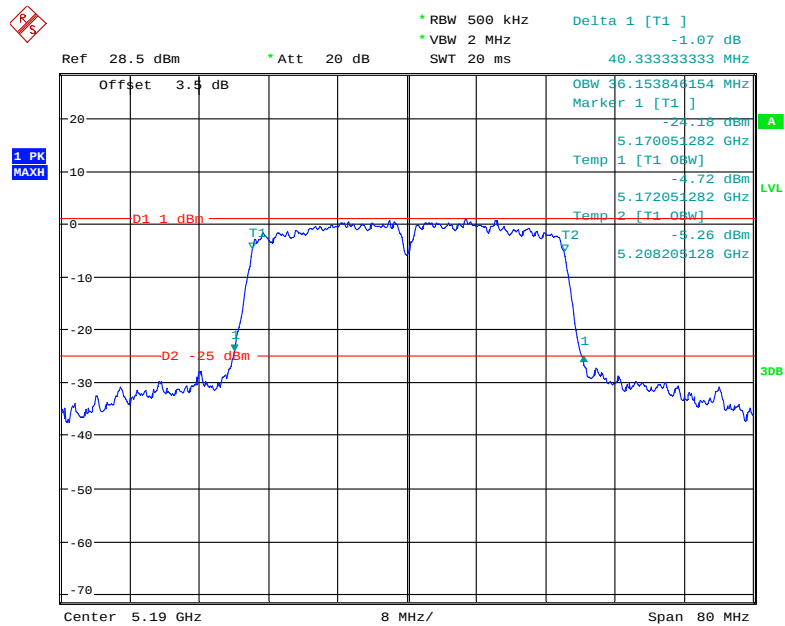
802.11n40 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5190 MHz

Date: 7.MAR.2020 20:23:22

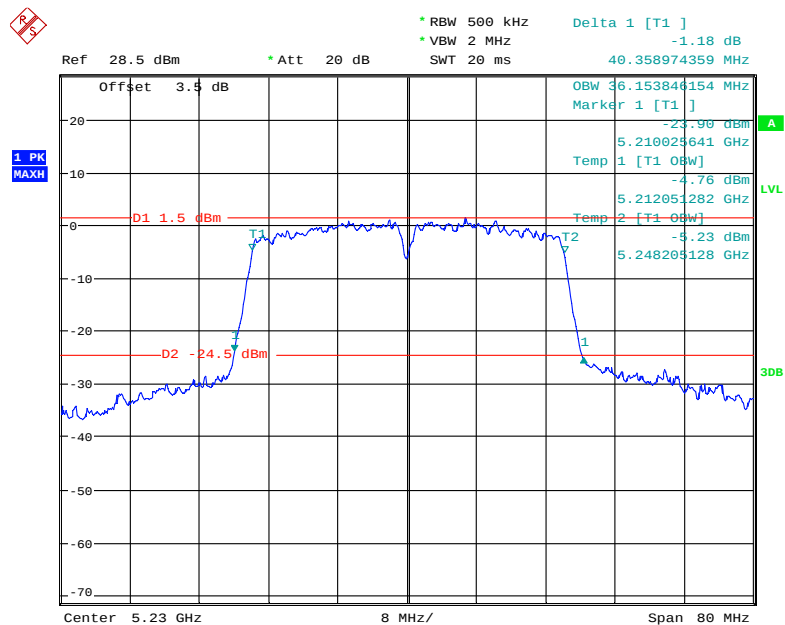802.11n40 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5230 MHz


Date: 7.MAR.2020 20:24:14

802.11ac20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5180 MHz

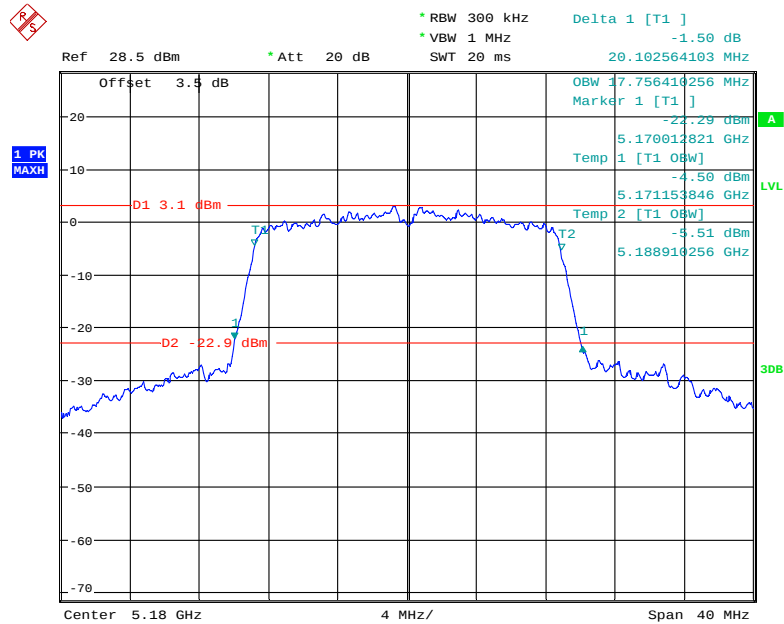


Date: 7.MAR.2020 20:16:36


802.11ac20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5200 MHz

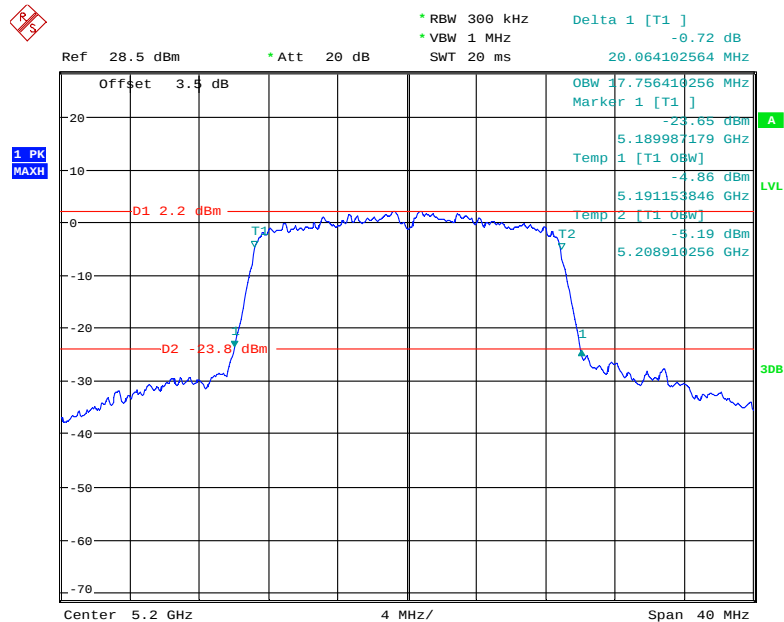

Date: 7.MAR.2020 20:17:36

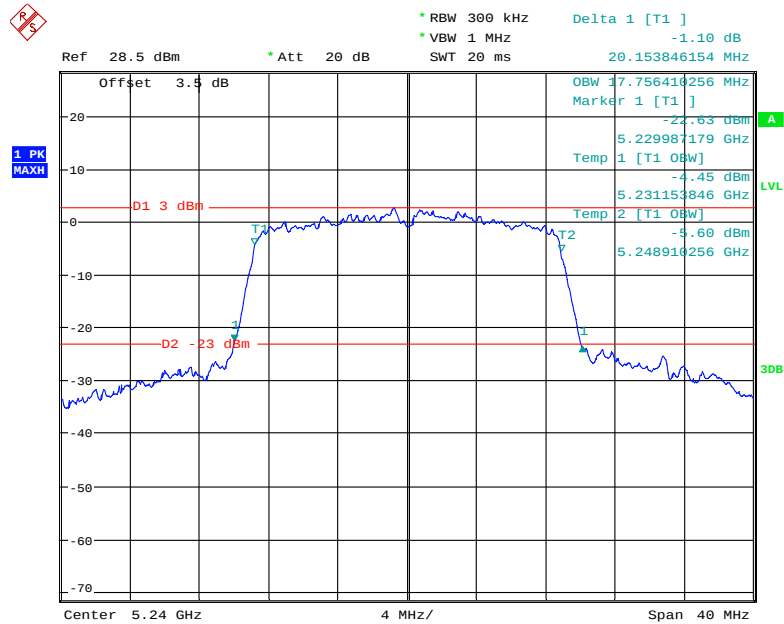
802.11ac20 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5240 MHz

Date: 7.MAR.2020 20:19:59

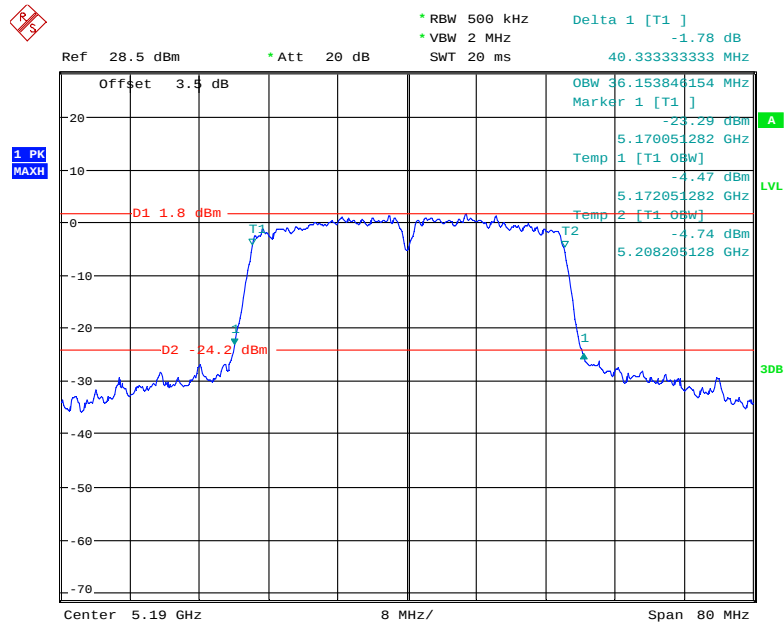802.11ac40 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5190 MHz

Date: 7.MAR.2020 20:22:30

802.11ac40 mode, 26 dB Emissions & 99% Occupied Bandwidth, 5230 MHz

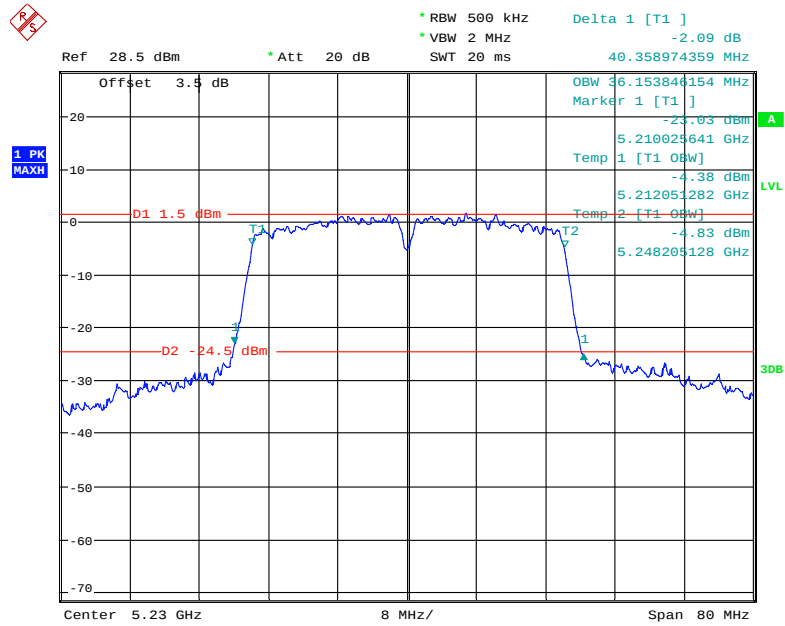


Date: 7.MAR.2020 20:24:49

5725 MHz – 5850 MHz:


Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Remark
802.11a				No transmitted signal in the 99% bandwidth extends into the U-NII-2C band
5745	16.46	18.59	0.5	
5785	16.42	18.27	0.5	
5825	16.53	17.76	0.5	
802.11n20				
5745	17.68	22.76	0.5	
5785	17.68	19.68	0.5	
5825	17.71	18.59	0.5	
802.11n40				
5755	36.36	42.56	0.5	
5795	36.56	42.05	0.5	
802.11ac20				
5745	17.68	20.64	0.5	
5785	17.68	19.49	0.5	
5825	17.69	18.53	0.5	
802.11ac40				
5755	36.56	43.21	0.5	
5795	36.49	41.54	0.5	

802.11a mode, 6dB Emission Bandwidth, 5745 MHz

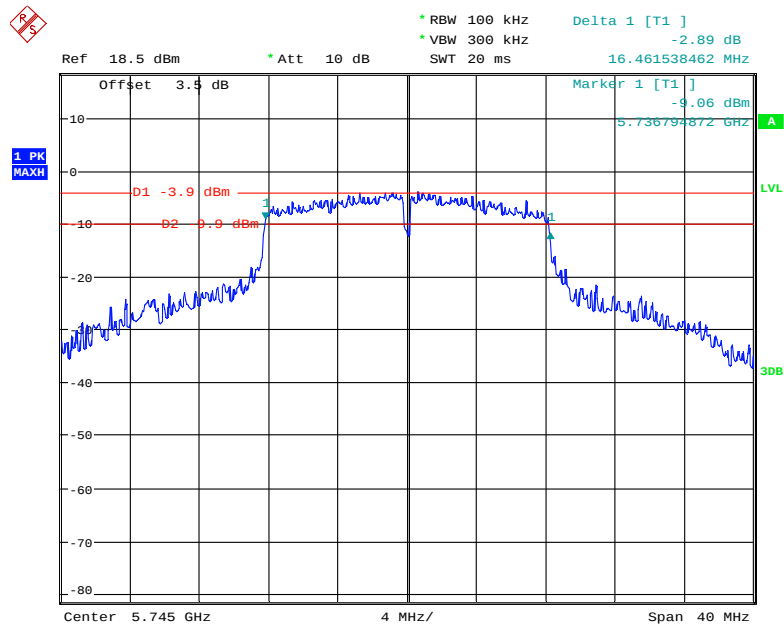


Date: 10.DEC.2019 20:48:31

802.11a mode, 6dB Emission Bandwidth, 5785 MHz

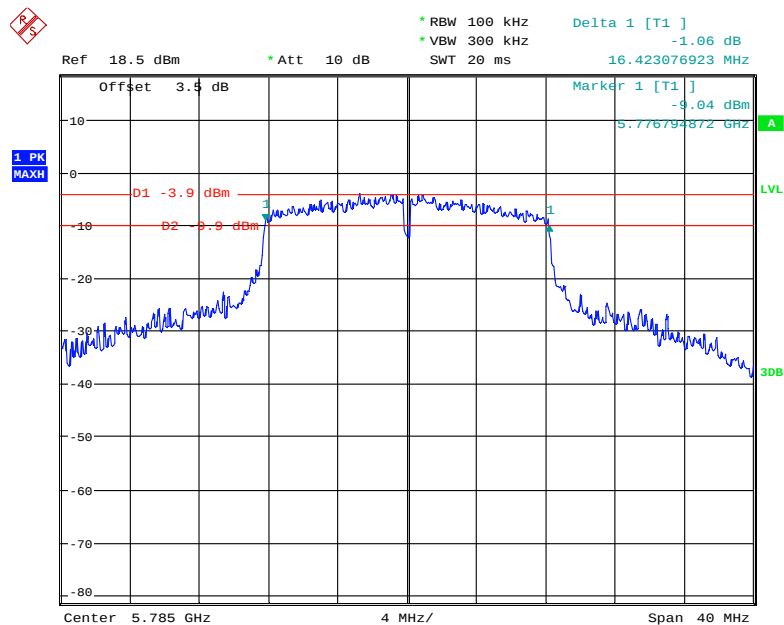


Date: 10.DEC.2019 20:47:48

802.11a mode, 6dB Emission Bandwidth, 5825 MHz

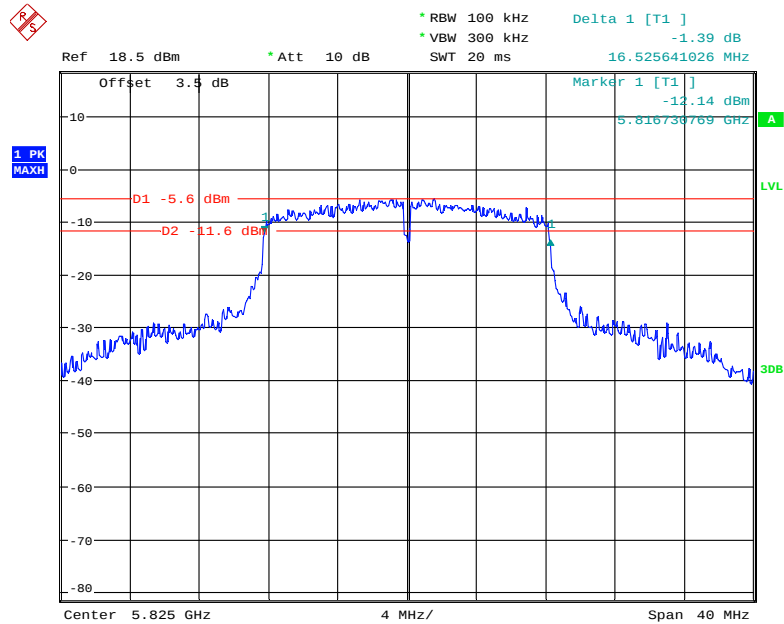


Date: 10.DEC.2019 20:43:40

802.11n20 mode, 6dB Emission Bandwidth, 5745 MHz

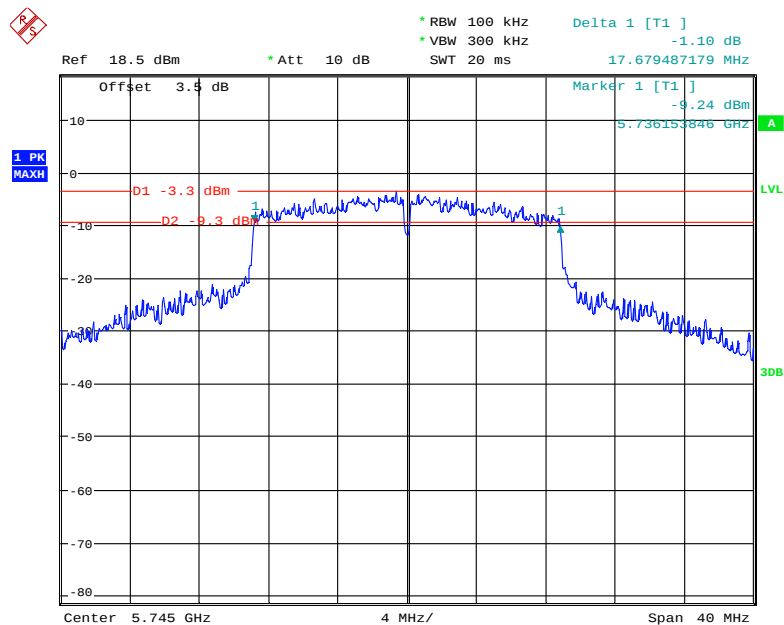


Date: 10.DEC.2019 20:49:48

802.11n20 mode, 6dB Emission Bandwidth, 5785 MHz

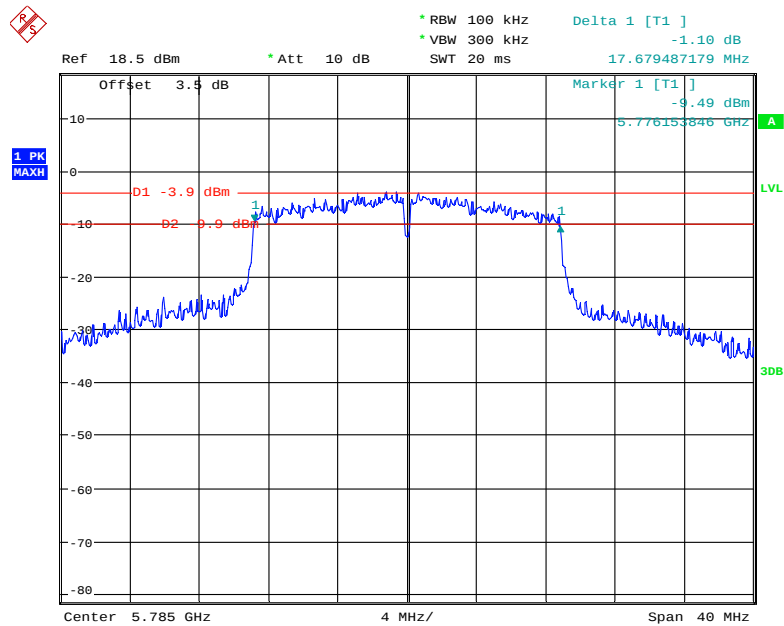


Date: 10.DEC.2019 20:50:46

802.11n20 mode, 6dB Emission Bandwidth, 5825 MHz

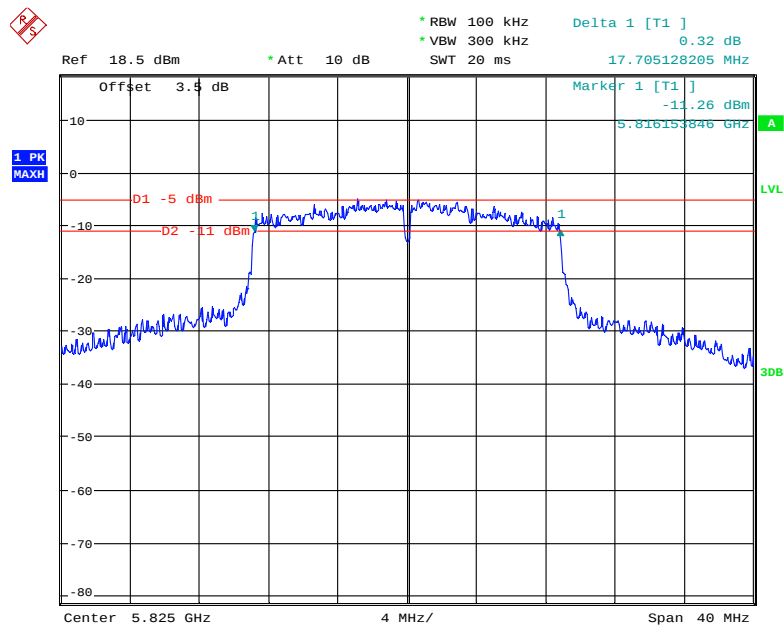


Date: 10.DEC.2019 20:56:39

802.11n40 mode, 6dB Emission Bandwidth, 5755 MHz

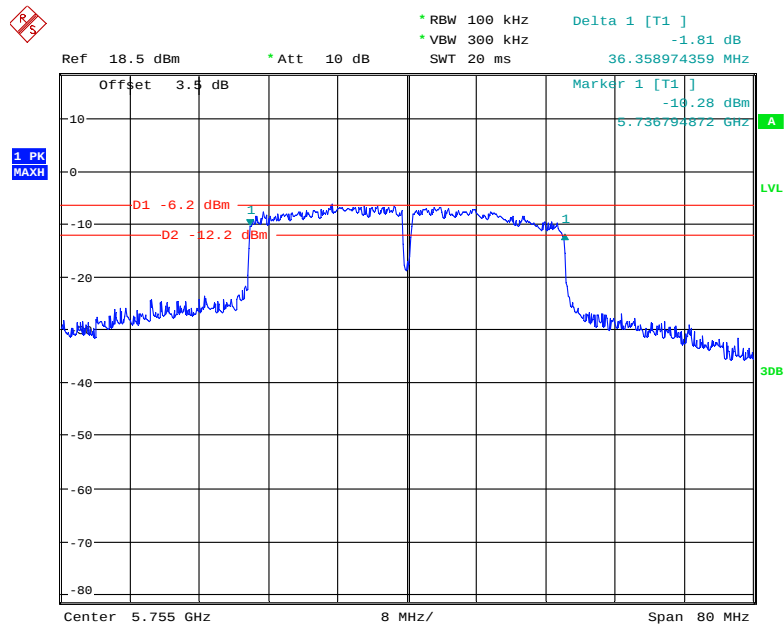


Date: 10.DEC.2019 21:11:25

802.11n40 mode, 6dB Emission Bandwidth, 5795 MHz

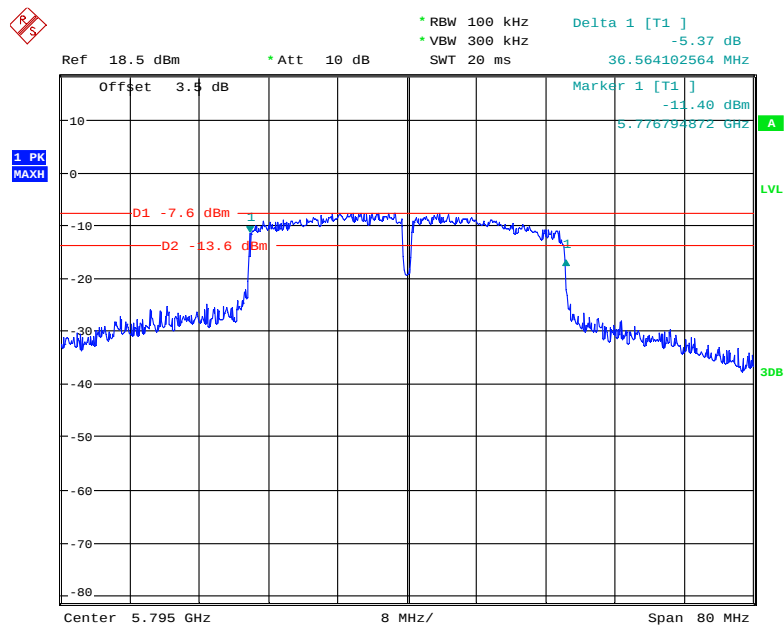


Date: 10.DEC.2019 21:07:13

802.11ac20 mode, 6dB Emission Bandwidth, 5745 MHz

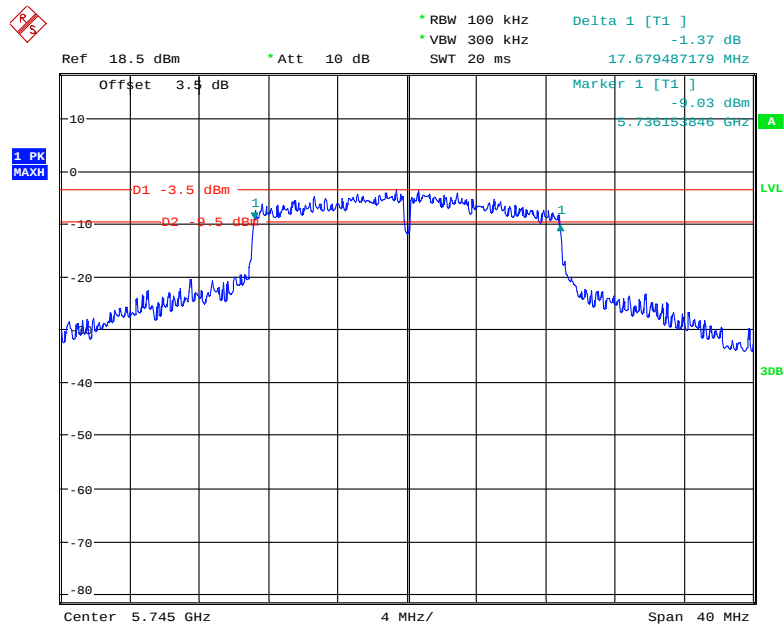


Date: 10.DEC.2019 20:59:23

802.11ac20 mode, 6dB Emission Bandwidth, 5785 MHz

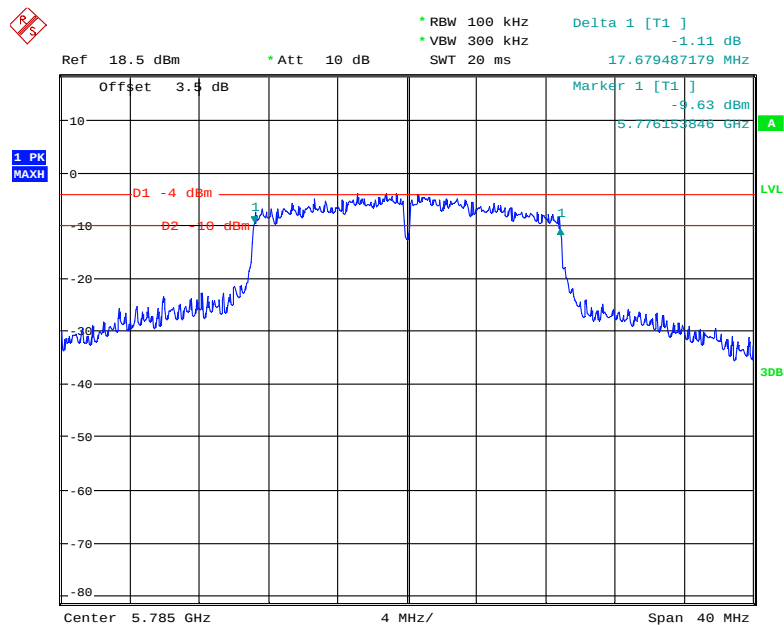


Date: 10.DEC.2019 20:58:03

802.11ac20 mode, 6dB Emission Bandwidth, 5825 MHz

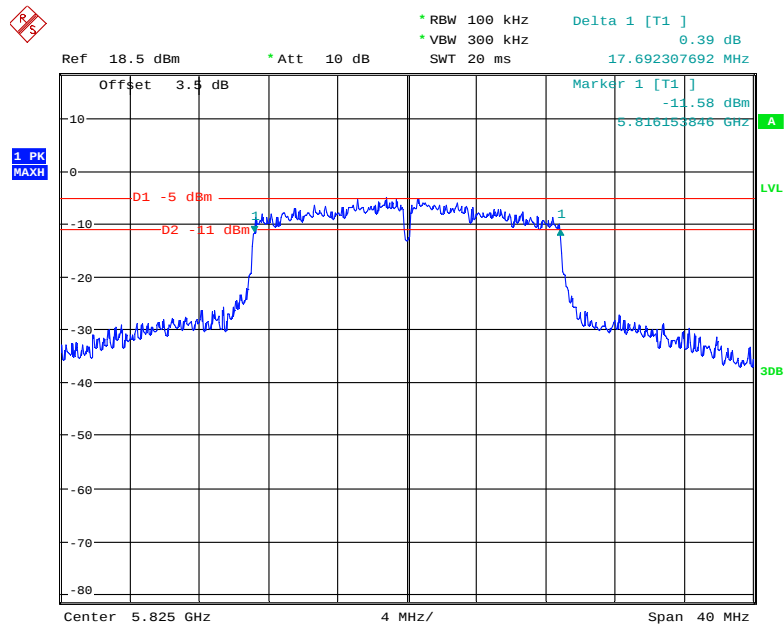

Date: 10.DEC.2019 20:57:26

802.11ac40 mode, 6dB Emission Bandwidth, 5755 MHz

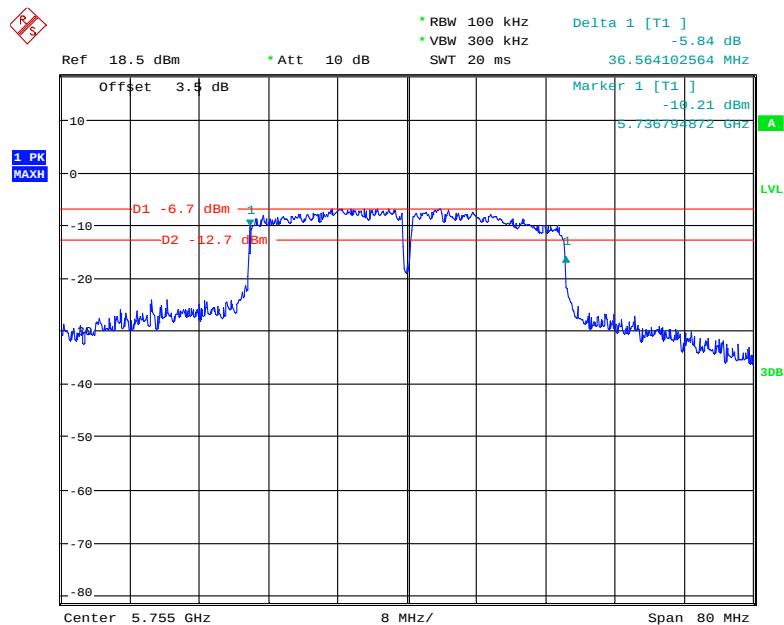

Date: 10.DEC.2019 21:00:38

Ref 18.5 dBm * Att 10 dB

* RBW 100 kHz Delta 1 [T1] -5.61 dB
 * VBW 300 kHz 36.487179487 MHz
 SWT 20 ms

Offset 3.5 dB Marker 1 [T1] -10.97 dBm
 5.776794872 GHz


1 PK MAXH

D1 -7.6 dBm
 D2 -13.6 dBm

3dB


Center 5.795 GHz 8 MHz/Span 80 MHz

802.11a mode, 99% Occupied Bandwidth, 5745 MHz

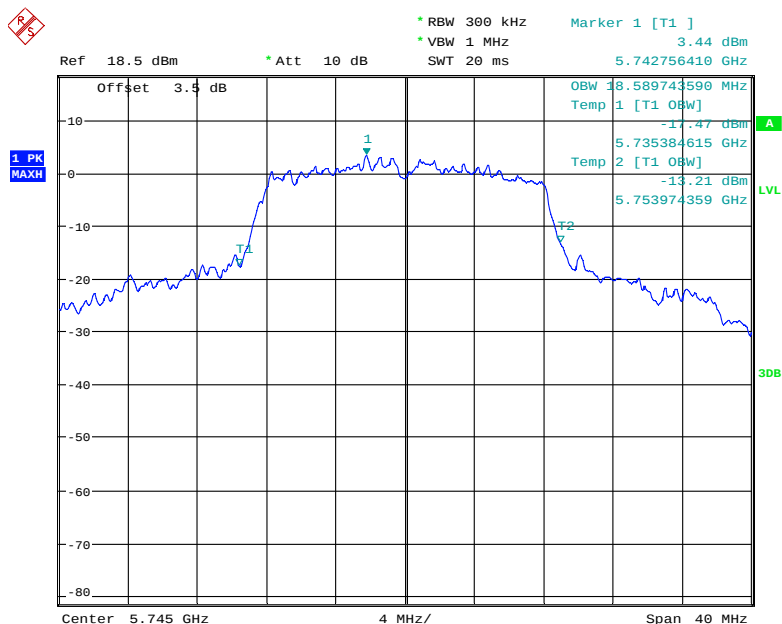


Page 57 of 83

802.11a mode, 99% Occupied Bandwidth, 5785 MHz

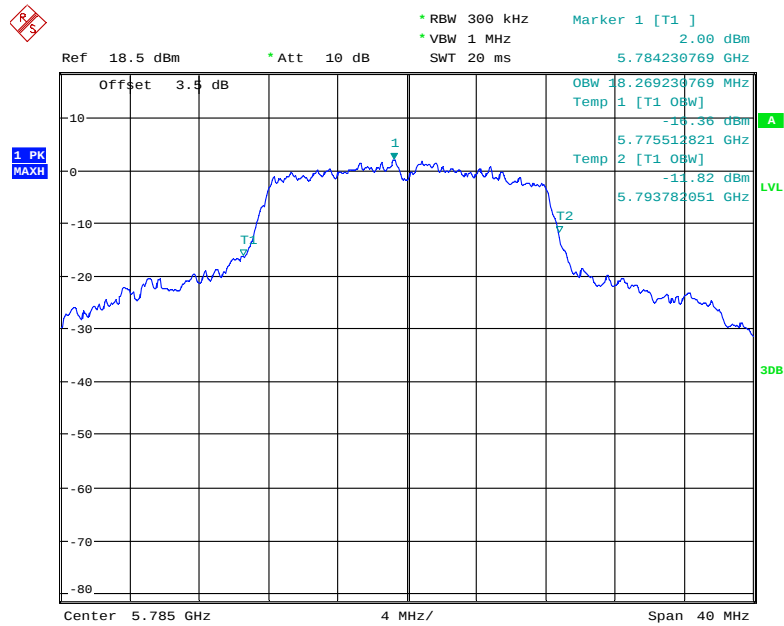


Date: 10.DEC.2019 21:13:34

802.11a mode, 99% Occupied Bandwidth, 5825 MHz

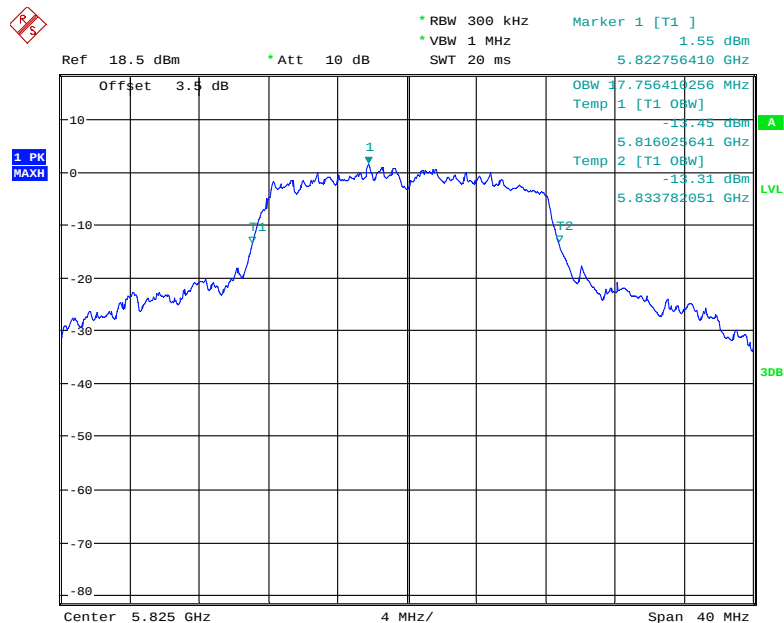


Date: 10.DEC.2019 21:13:54

802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz

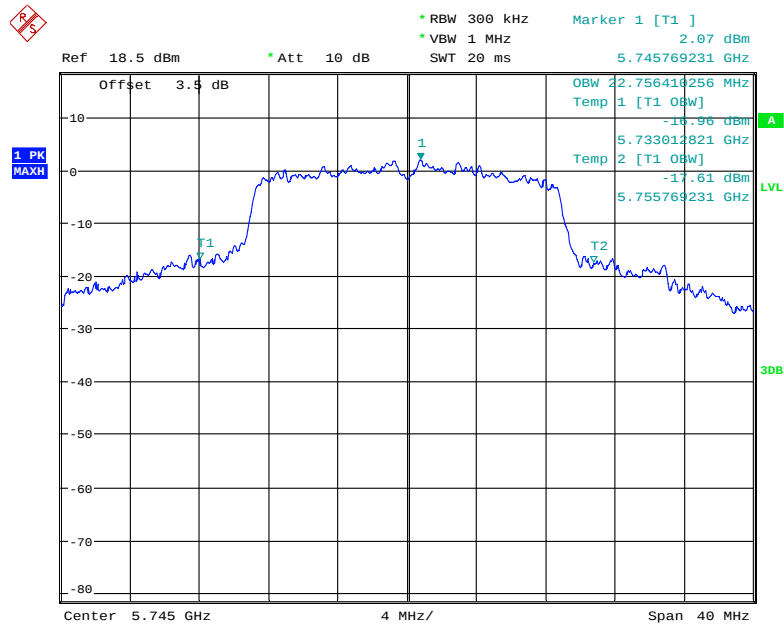


Date: 10.DEC.2019 21:15:53

802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz

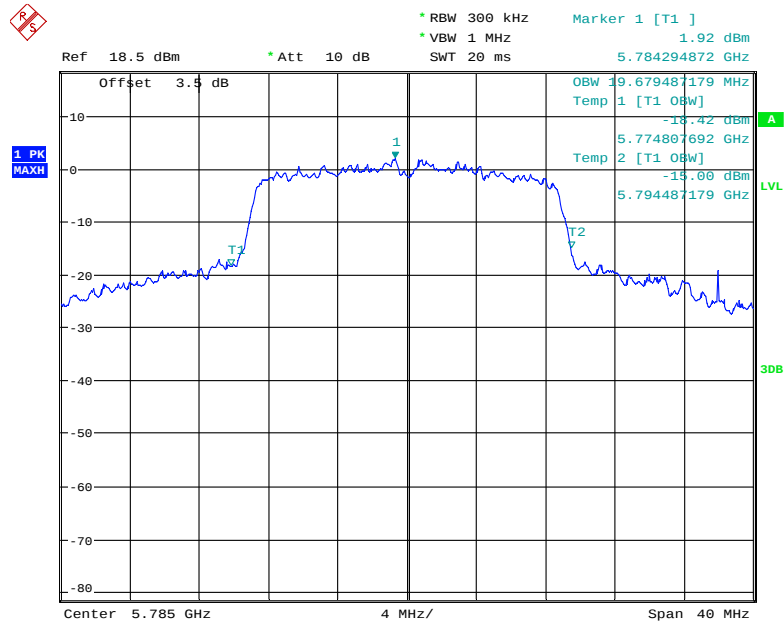


Date: 10.DEC.2019 21:15:33

802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz

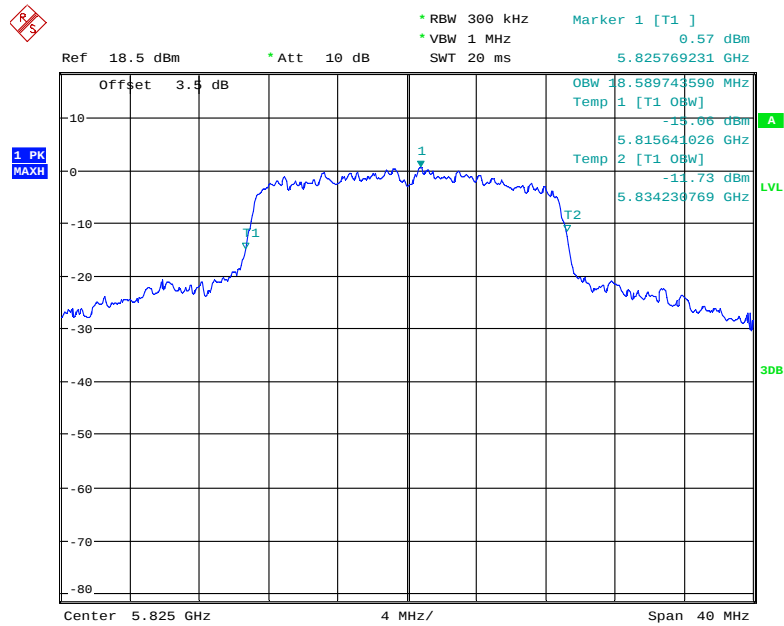


Date: 10.DEC.2019 21:14:26


802.11n40 mode, 99% Occupied Bandwidth, 5755 MHz

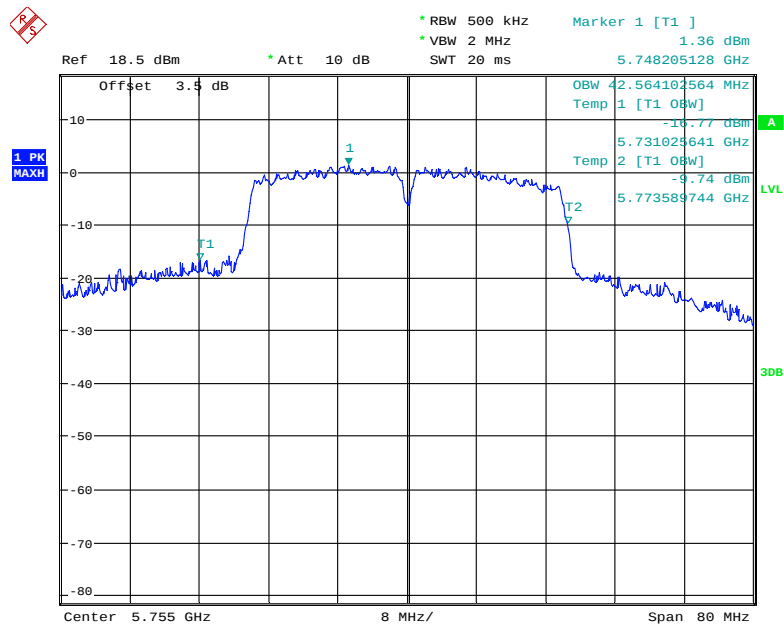

Date: 10.DEC.2019 21:18:44

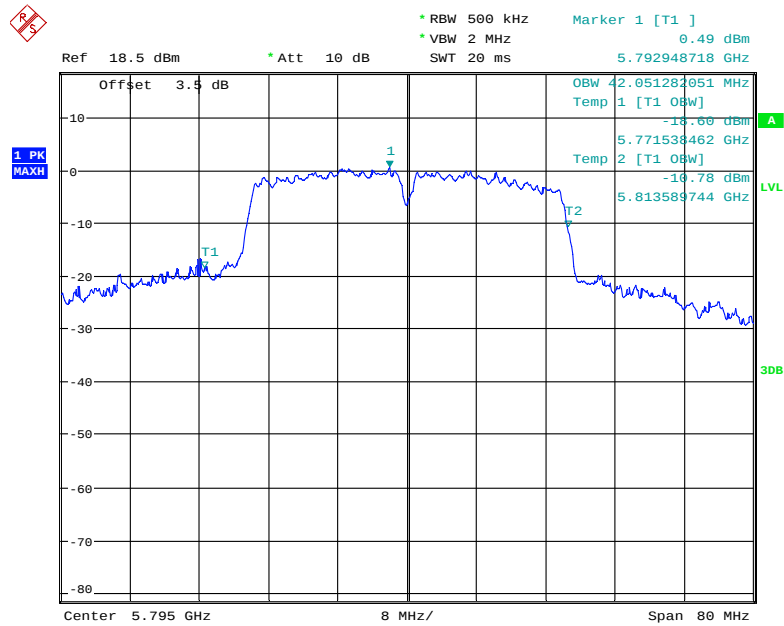
802.11n40 mode, 99% Occupied Bandwidth, 5795 MHz

Date: 10.DEC.2019 21:18:22

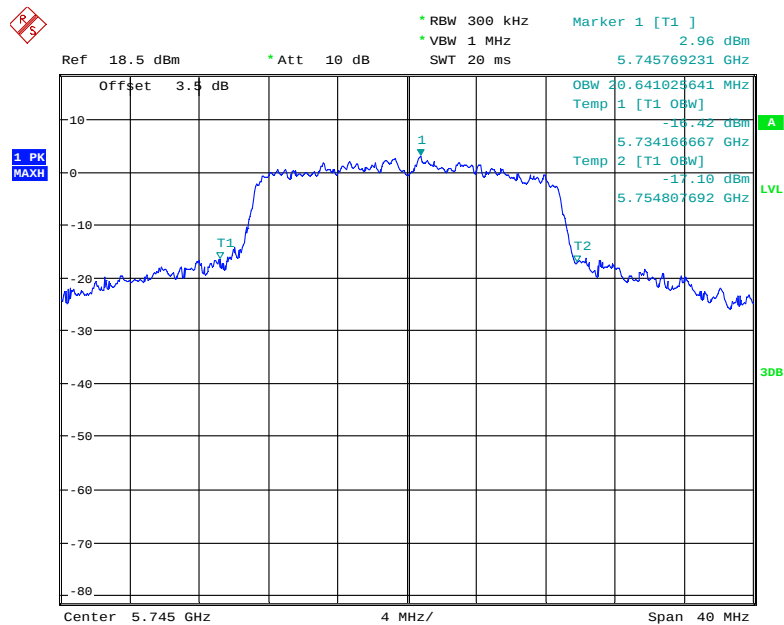802.11ac20 mode, 99% Occupied Bandwidth, 5745 MHz


Date: 10.DEC.2019 21:16:36

802.11ac20 mode, 99% Occupied Bandwidth, 5785 MHz

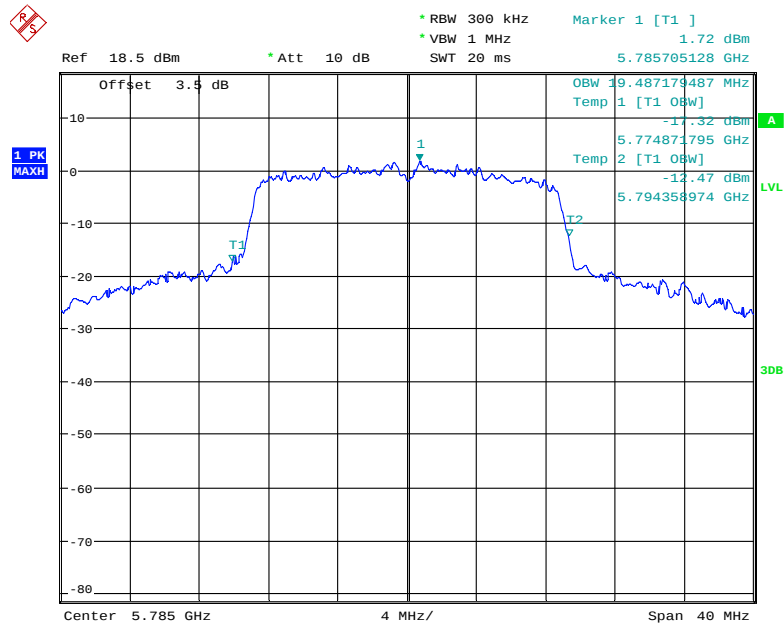


Date: 10.DEC.2019 21:16:55

802.11ac20 mode, 99% Occupied Bandwidth, 5825 MHz

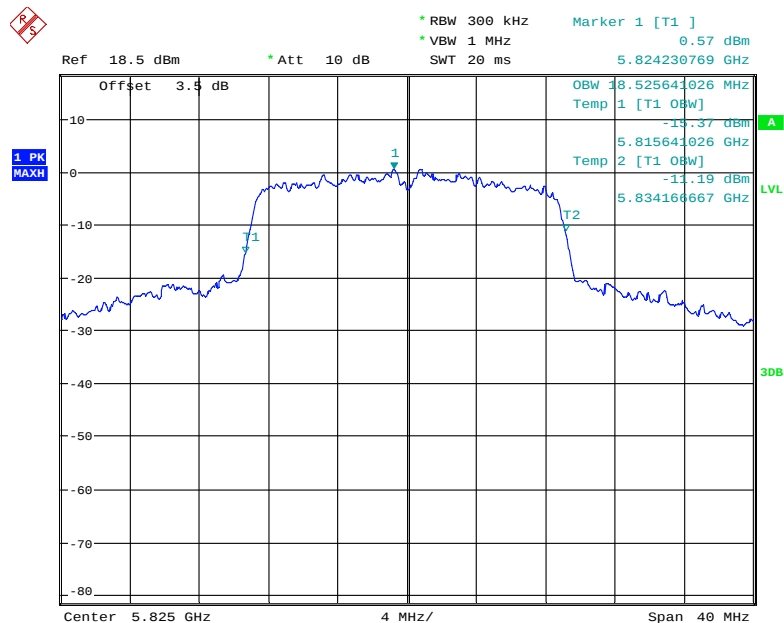


Date: 10.DEC.2019 21:17:14

802.11ac40 mode, 99% Occupied Bandwidth, 5755 MHz

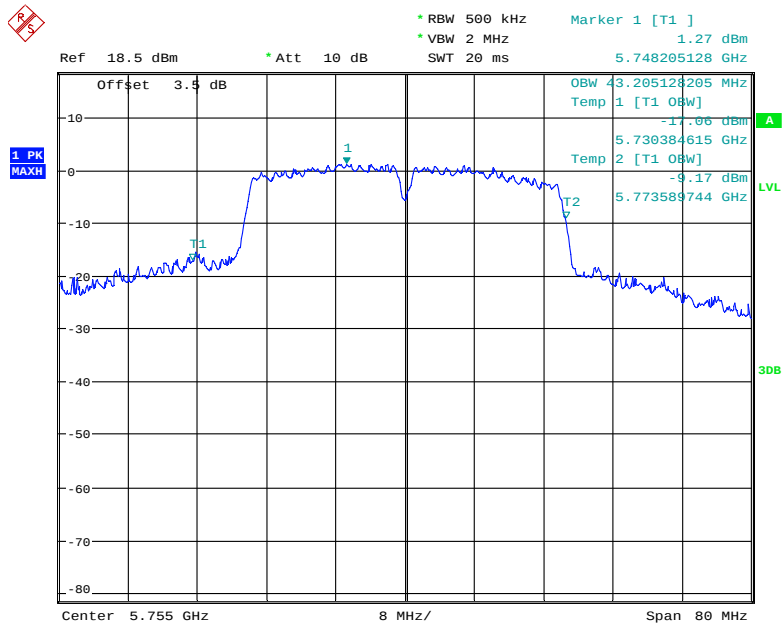

Date: 10.DEC.2019 21:17:41

802.11ac40 mode, 99% Occupied Bandwidth, 5795 MHz

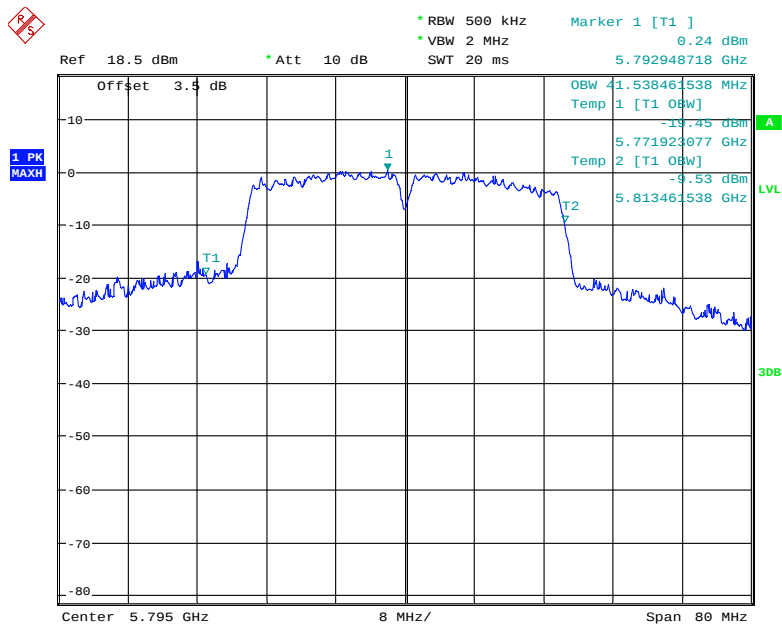

Date: 10.DEC.2019 21:18:05

FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard


For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data**Environmental Conditions**

Temperature:	22~24 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.0 kPa

The testing was performed by James Fu on 2019-12-10 and George Zhong on 2020-03-07.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables.

5150 MHz – 5250 MHz

Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
802.11a		
5180	10.21	24
5200	10.38	
5240	10.61	
802.11n20		
5180	10.76	24
5200	10.85	
5240	10.23	
802.11n40		
5190	10.69	24
5230	10.91	
802.11ac20		
5180	10.32	24
5200	10.84	
5240	10.79	
802.11ac40		
5190	10.92	24
5230	10.94	

5725 MHz – 5825 MHz:

Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
802.11a		
5745	9.94	30
5785	9.73	
5825	8.69	
802.11n20		
5745	10.97	30
5785	9.79	
5825	8.56	
802.11n40		
5755	10.87	30
5795	9.79	
802.11ac20		
5745	10.96	30
5785	9.88	
5825	8.72	
802.11ac40		
5755	10.67	30
5795	9.79	

FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY

Applicable Standard

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Test Data**Environmental Conditions**

Temperature:	22~24 °C
Relative Humidity:	50~52 %
ATM Pressure:	101 kPa

The testing was performed by James Fu on 2019-12-10 and George Zhong on 2020-03-07.

EUT operation mode: Transmitting


Test Result: Pass

Please refer to the following tables and plots.

5150 MHz – 5250 MHz


Frequency (MHz)	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)
802.11a		
5180	0.86	11
5200	0.63	
5240	0.61	
802.11n20		
5180	0.57	11
5200	0.49	
5240	0.07	
802.11n40		
5190	-3.00	11
5230	-3.30	
802.11ac20		
5180	0.09	11
5200	0.47	
5240	0.38	
802.11ac40		
5190	-3.02	11
5230	-3.12	

802.11a mode, Power Spectral Density, 5180 MHz

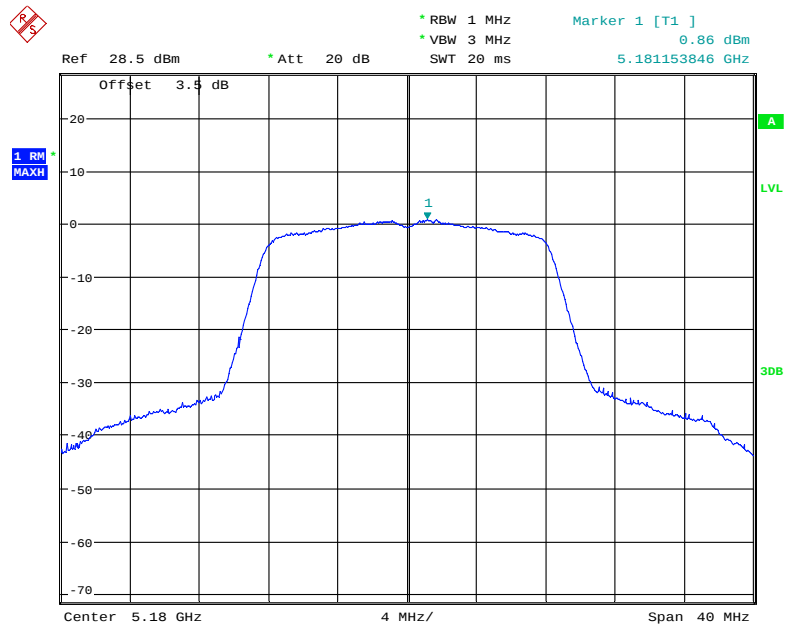


Date: 7.MAR.2020 20:10:23

802.11a mode, Power Spectral Density, 5200 MHz

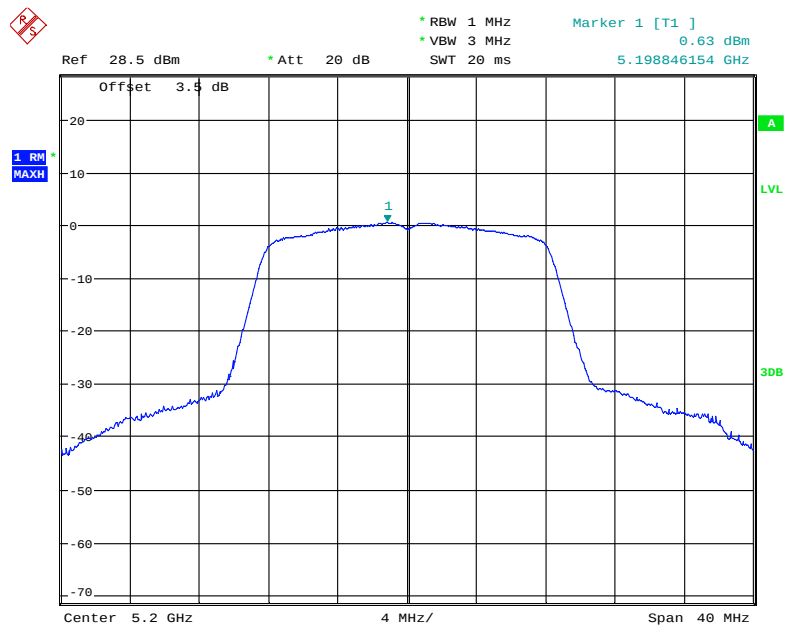


Date: 7.MAR.2020 20:10:45

802.11a mode, Power Spectral Density, 5240 MHz

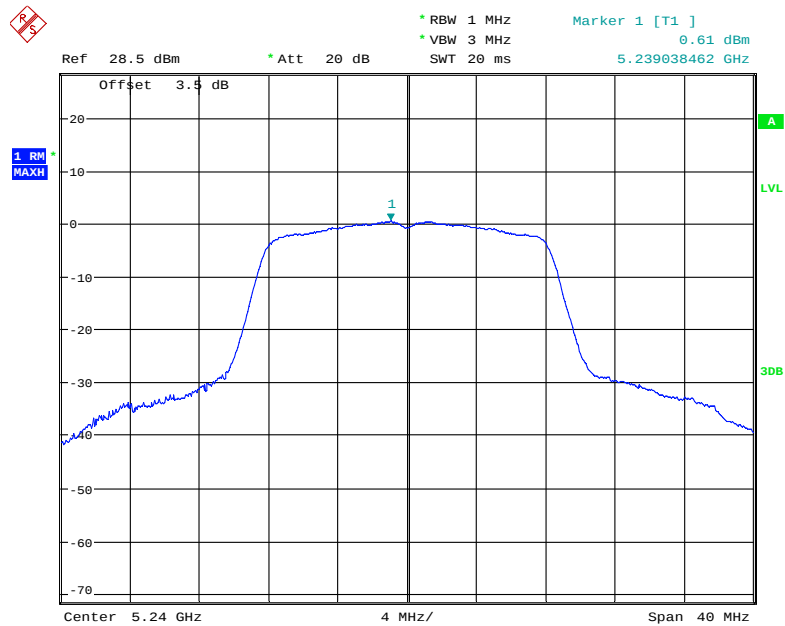


Date: 7.MAR.2020 20:11:04

802.11n20 mode, Power Spectral Density, 5180 MHz

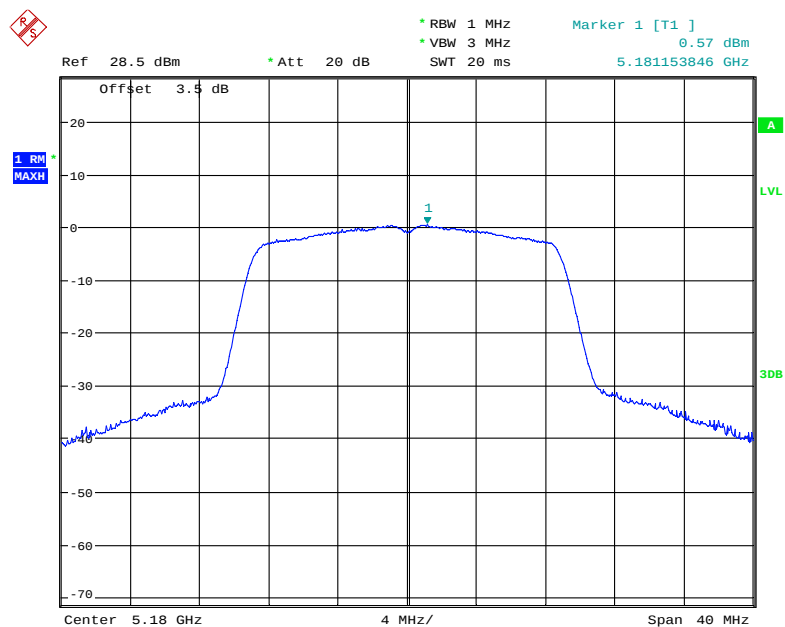


Date: 7.MAR.2020 20:09:53

802.11n20 mode, Power Spectral Density, 5200 MHz

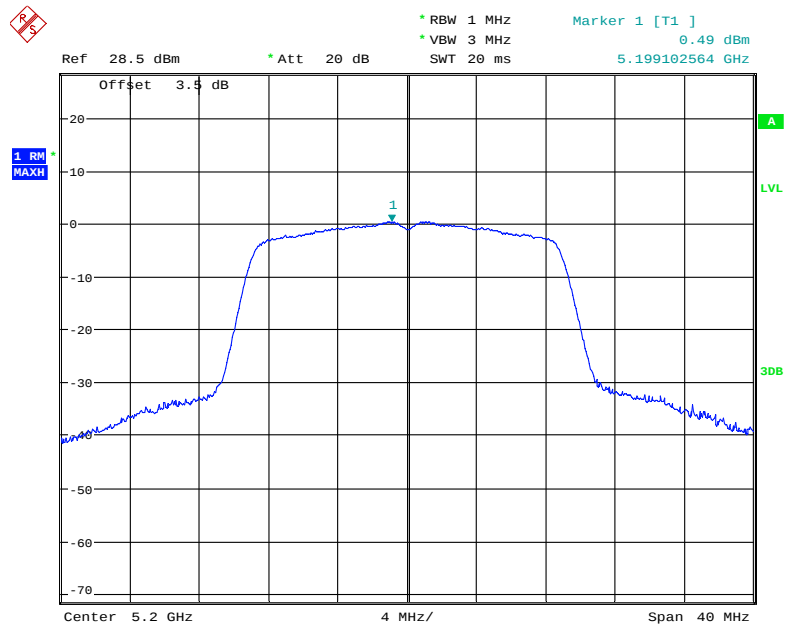


Date: 7.MAR.2020 20:09:29

802.11n20 mode, Power Spectral Density, 5240 MHz

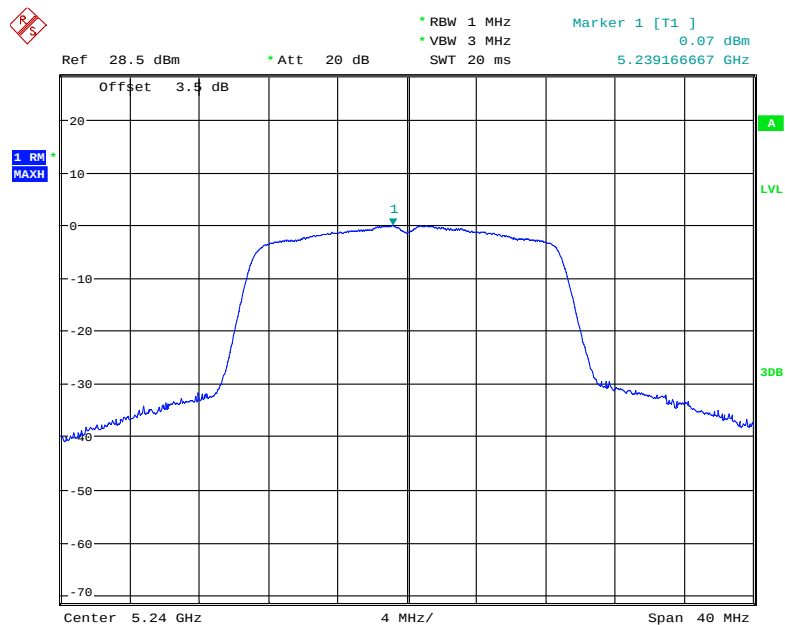


Date: 7.MAR.2020 20:09:09

802.11n40 mode, Power Spectral Density, 5190 MHz

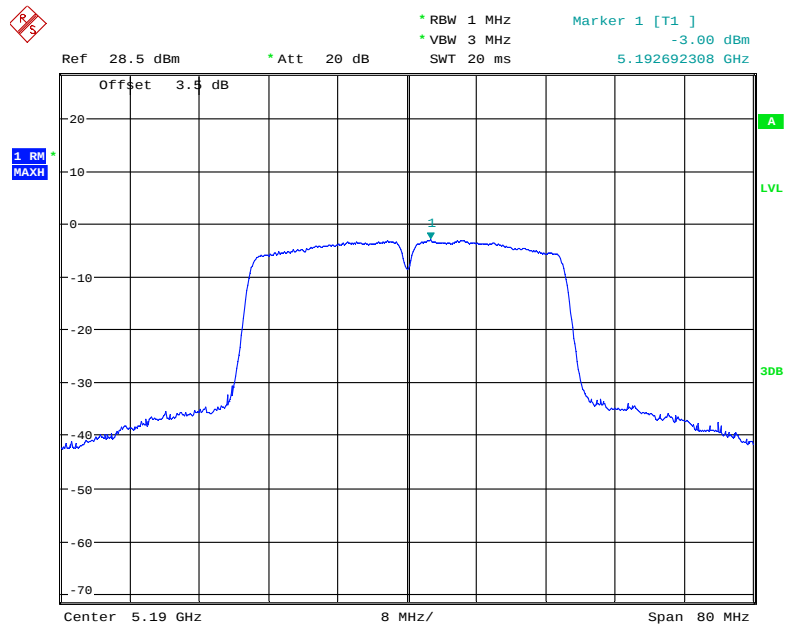


Date: 7.MAR.2020 20:06:33

802.11n40 mode, Power Spectral Density, 5230 MHz

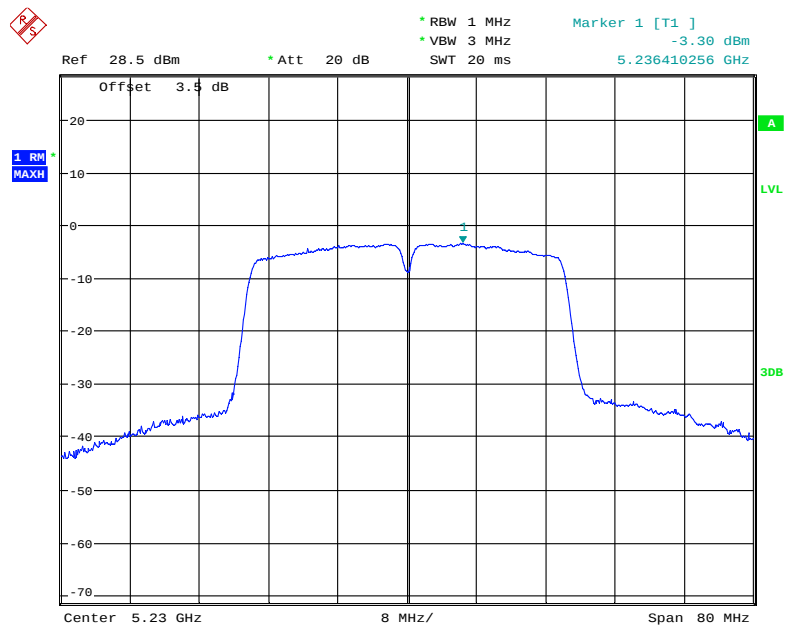


Date: 7.MAR.2020 20:06:12

802.11ac20 mode, Power Spectral Density, 5180 MHz

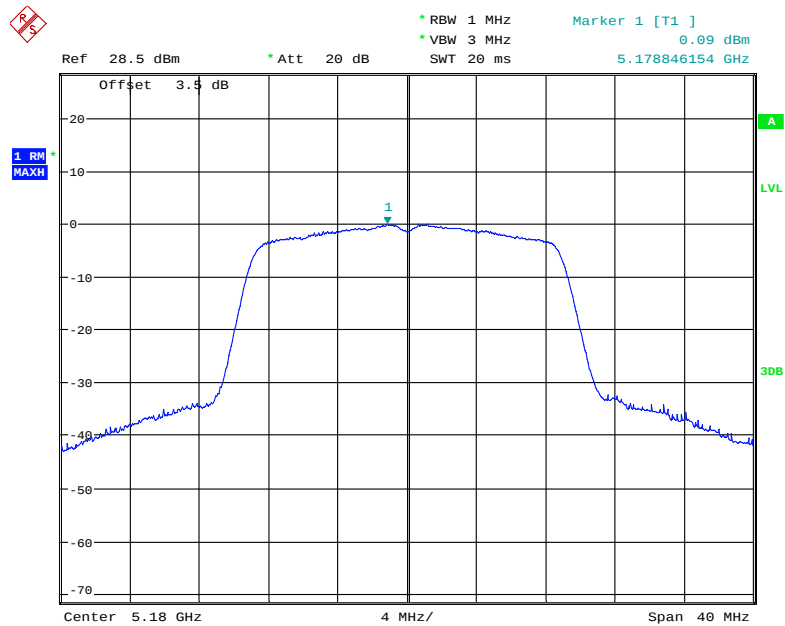


Date: 7.MAR.2020 20:08:09

802.11ac20 mode, Power Spectral Density, 5200 MHz

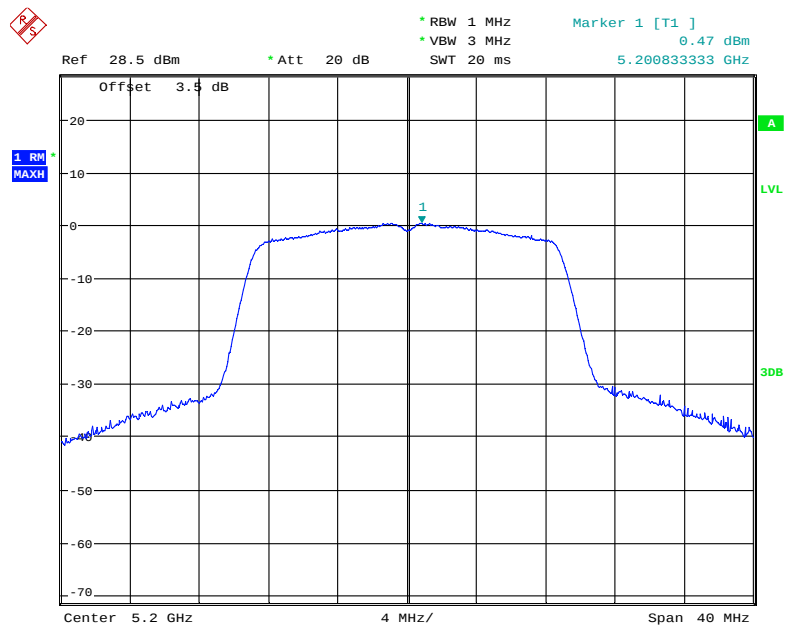


Date: 7.MAR.2020 20:08:33

802.11ac20 mode, Power Spectral Density, 5240 MHz

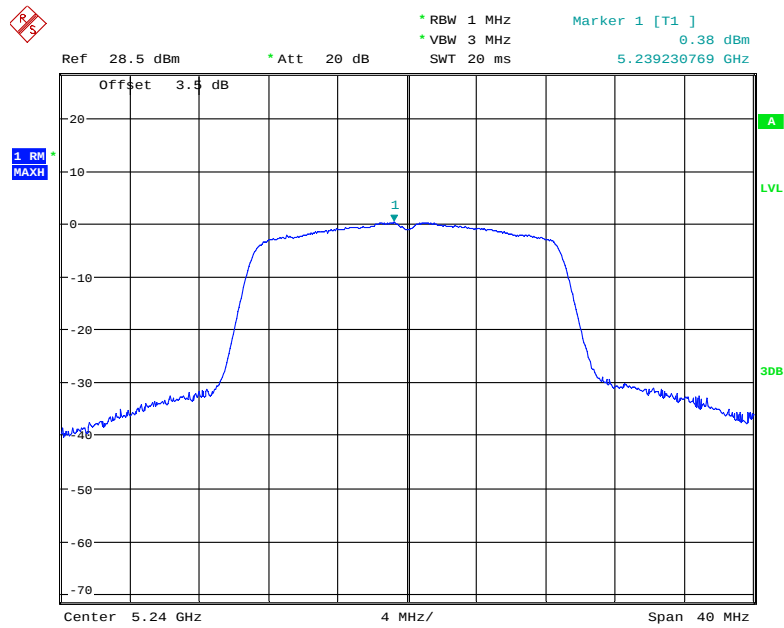


Date: 7.MAR.2020 20:08:50

802.11ac40 mode, Power Spectral Density, 5190 MHz

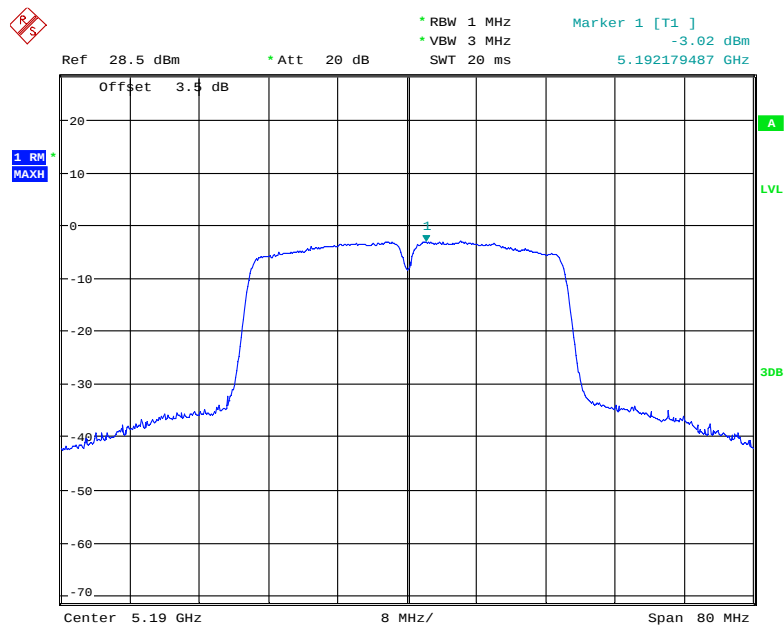

Date: 7.MAR.2020 20:06:50

802.11ac40 mode, Power Spectral Density, 5230 MHz

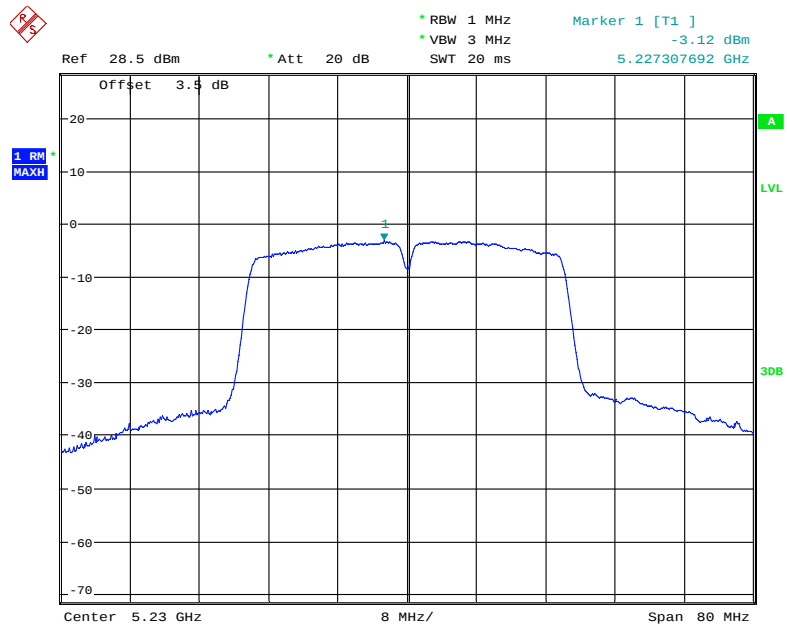


Date: 7.MAR.2020 20:05:50

5725 MHz – 5825 MHz:


Frequency (MHz)	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)
802.11a		
5745	-1.47	30
5785	-2.79	
5825	-3.64	
802.11n20		
5745	-1.71	30
5785	-2.58	
5825	-3.97	
802.11n40		
5755	-5.54	30
5795	-6.54	
802.11ac20		
5745	-2.85	30
5785	-3.07	
5825	-3.53	
802.11ac40		
5755	-5.42	30
5795	-6.57	

802.11a mode, Power Spectral Density, 5745 MHz

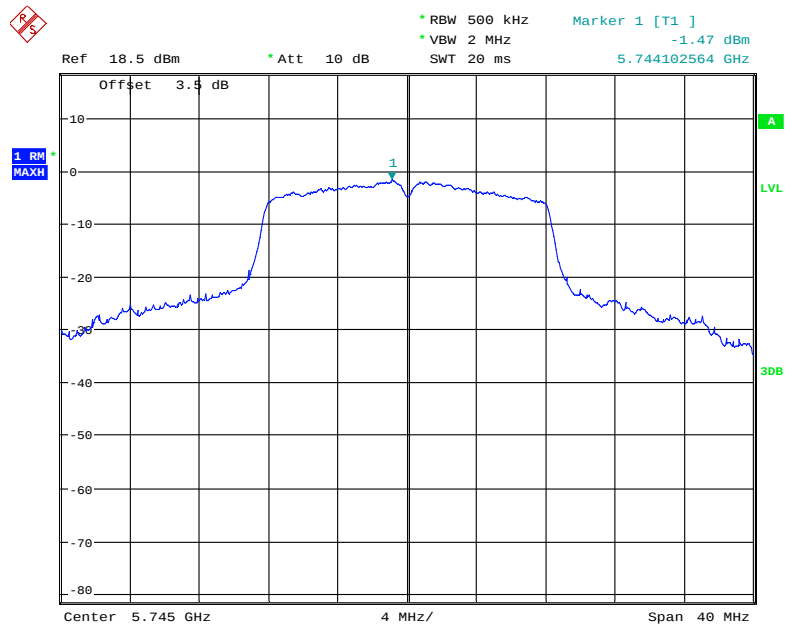


Date: 10.DEC.2019 20:40:37

802.11a mode, Power Spectral Density, 5785 MHz

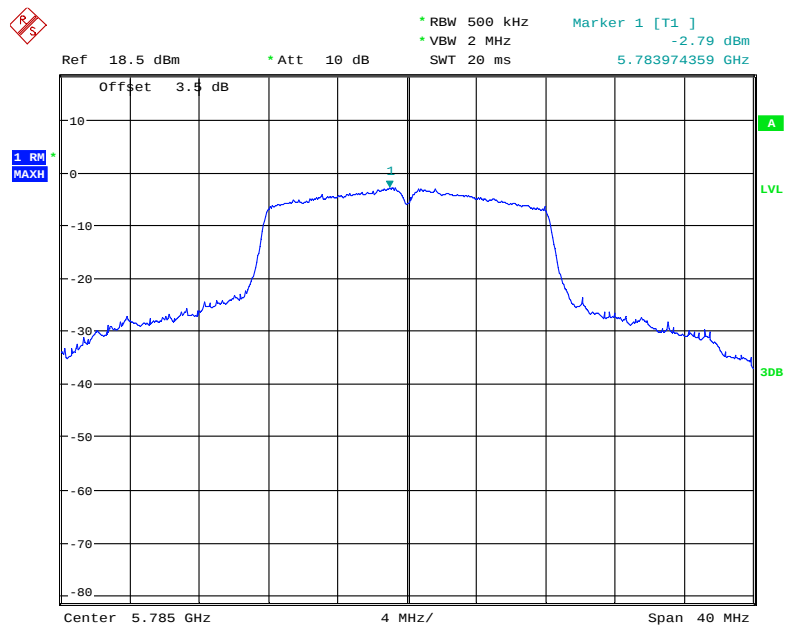


Date: 10.DEC.2019 20:40:58

802.11a mode, Power Spectral Density, 5825 MHz

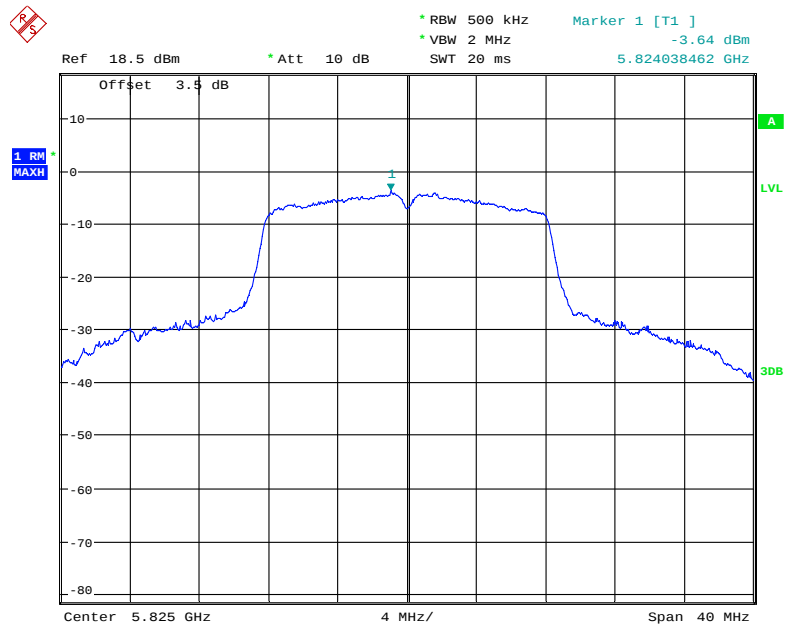


Date: 10.DEC.2019 20:41:18

802.11n20 mode, Power Spectral Density, 5745 MHz

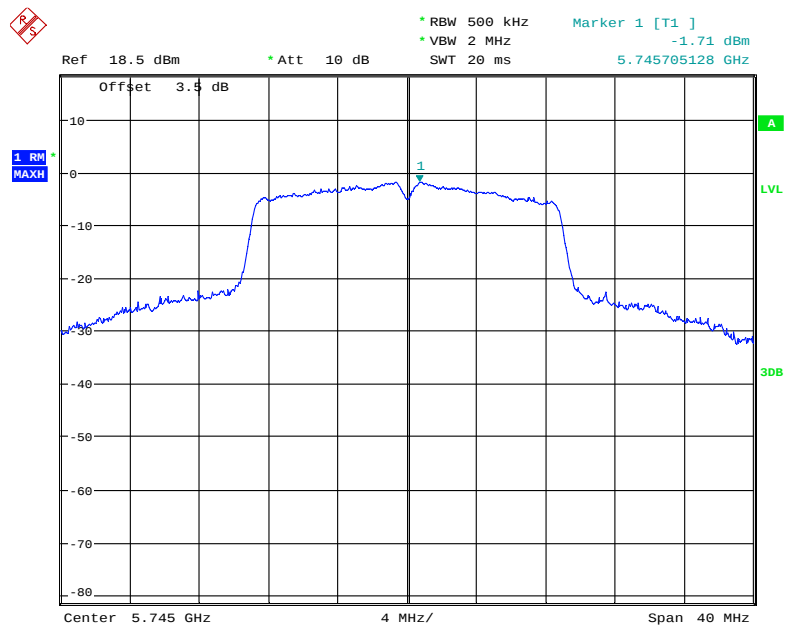


Date: 10.DEC.2019 20:40:16

802.11n20 mode, Power Spectral Density, 5785 MHz

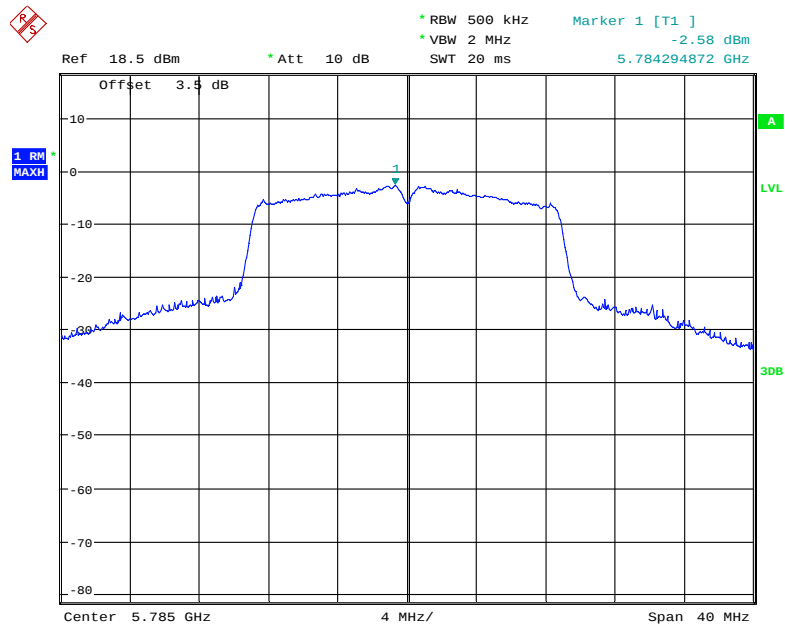


Date: 10.DEC.2019 20:40:00

802.11n20 mode, Power Spectral Density, 5825 MHz

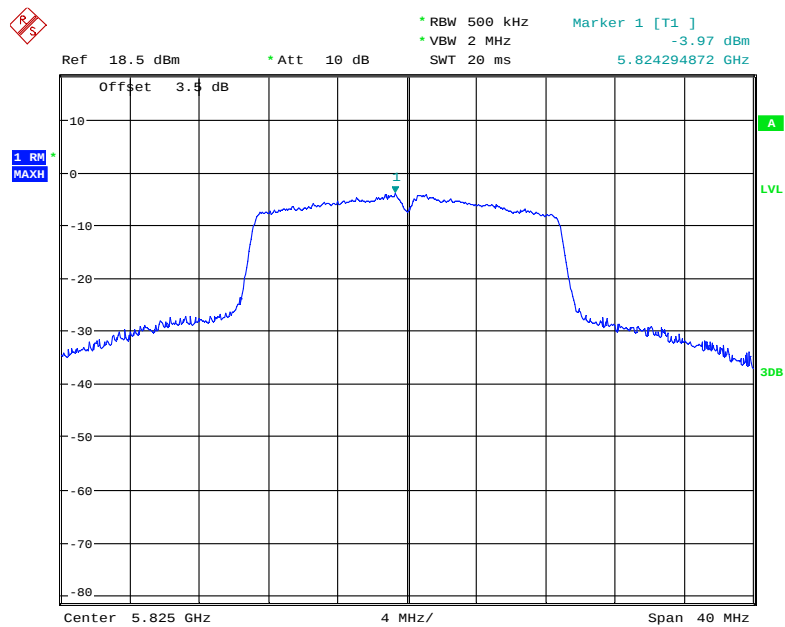


Date: 10.DEC.2019 20:39:42

802.11n40 mode, Power Spectral Density, 5755 MHz

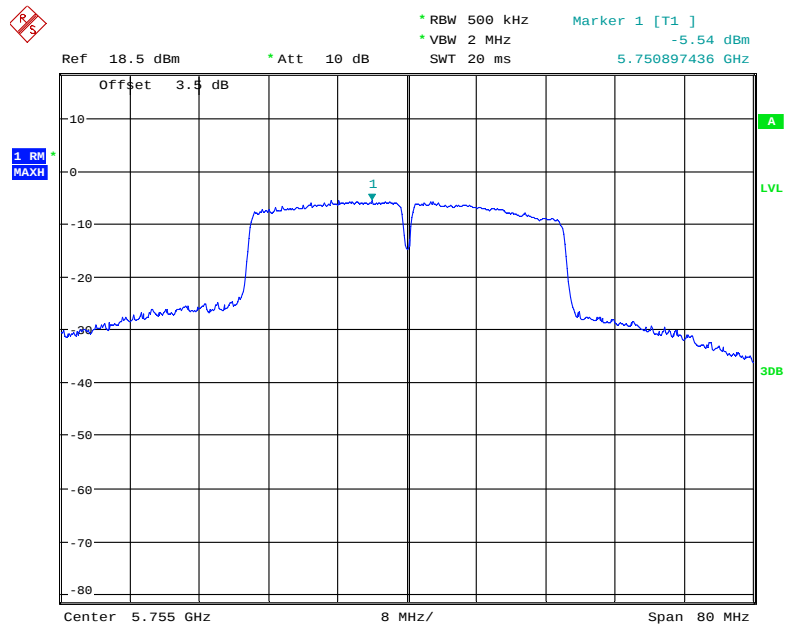


Date: 10.DEC.2019 20:32:09

802.11n40 mode, Power Spectral Density, 5795 MHz

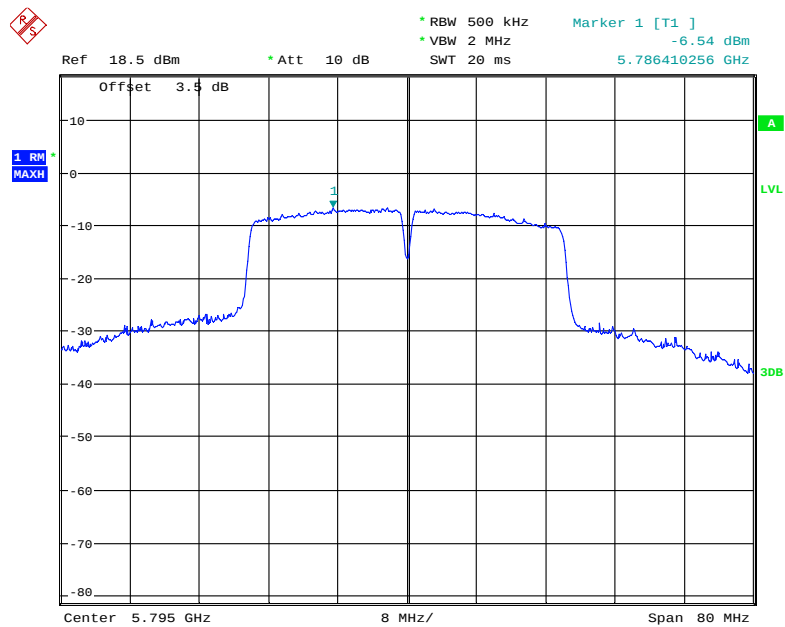


Date: 10.DEC.2019 20:32:30

802.11ac20 mode, Power Spectral Density, 5745 MHz

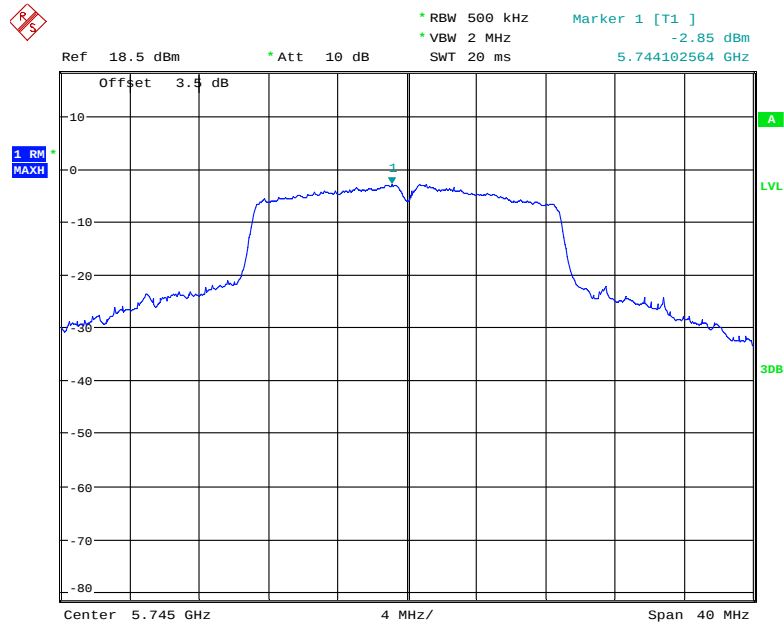


Date: 10.DEC.2019 20:34:44

802.11ac20 mode, Power Spectral Density, 5785 MHz

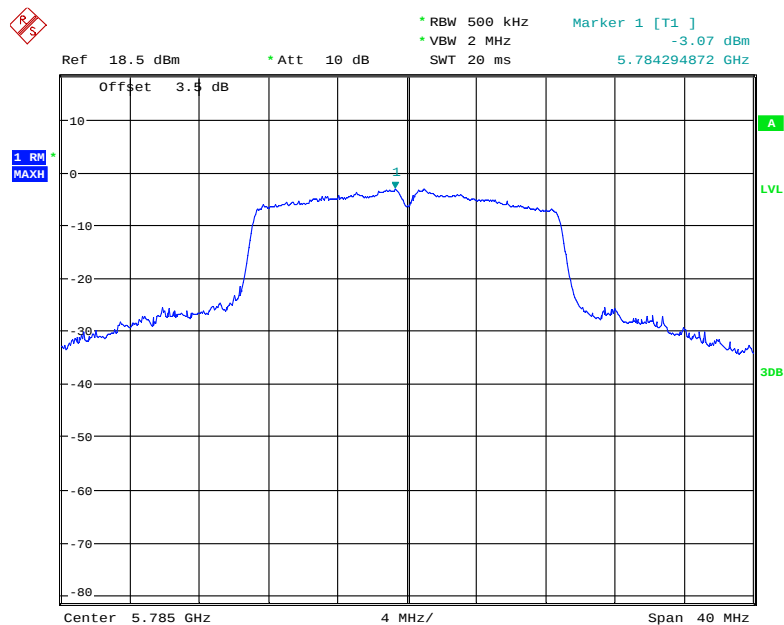


Date: 10.DEC.2019 20:35:08

802.11ac20 mode, Power Spectral Density, 5825 MHz

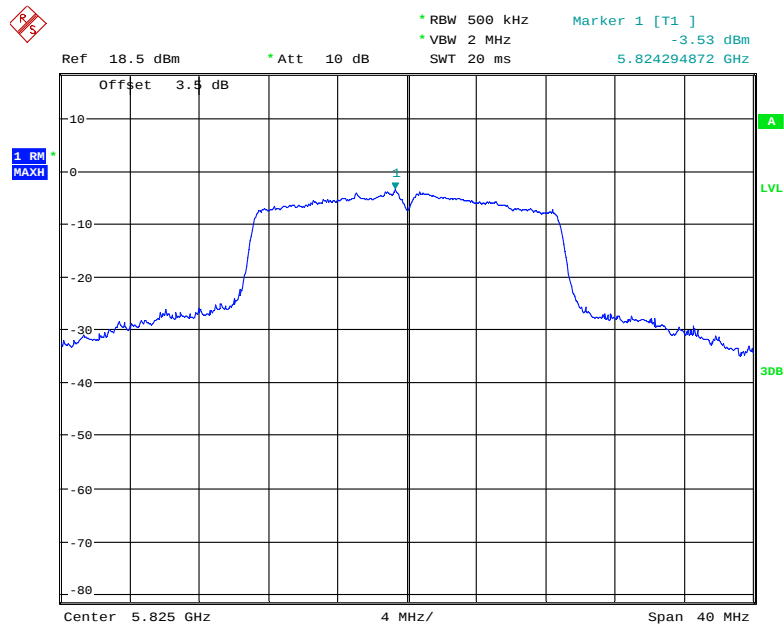


Date: 10.DEC.2019 20:37:32

802.11ac40 mode, Power Spectral Density, 5755 MHz

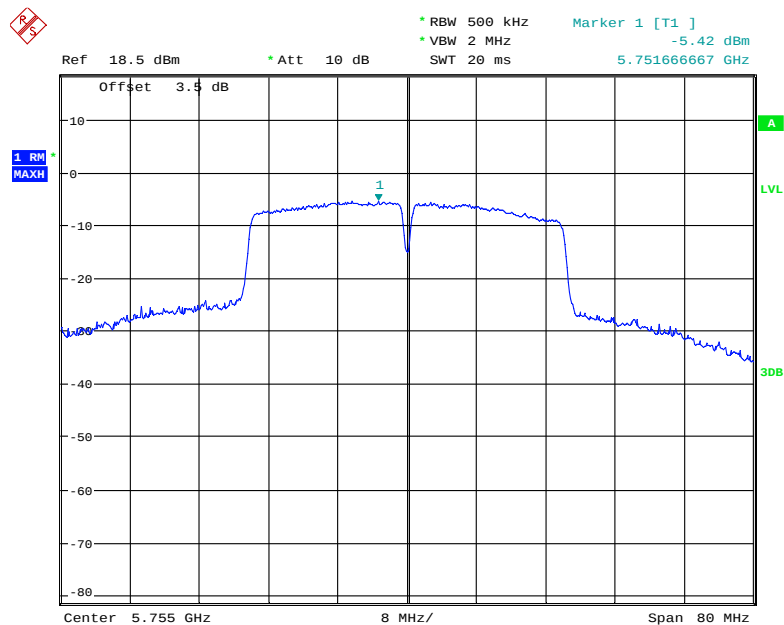

Date: 10.DEC.2019 20:33:03

802.11ac40 mode, Power Spectral Density, 5795 MHz

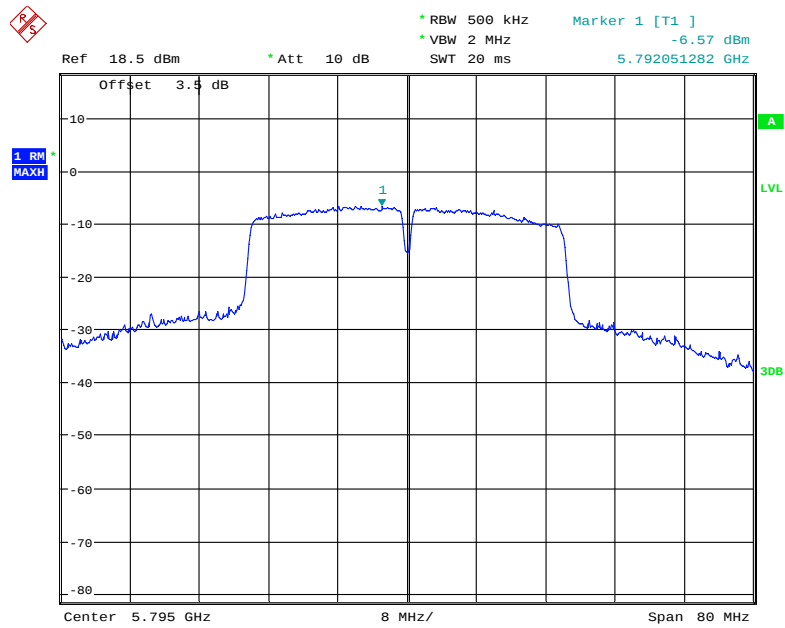

Date: 10.DEC.2019 20:32:45

***** END OF REPORT *****