

## FCC - TEST REPORT

Report Number : **709502228908-00B** Date of Issue: April 24, 2022

Model : CM-05

Product Type : Tubular motor

Applicant : Coulisse B.V.

Address : Vonderweg 48, 7468 DC Enter, THE NETHERLANDS

Production Facility : Ningbo Dooya Mechanical & Electronic Technology Co., Ltd.

Address : No.168 Shengguang Road, Luotuo, Zhenhai 315202 Ningbo,  
Zhejiang province, People's republic of China

Test Result :  Positive  Negative

Total pages including Appendices : 44

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

## 1 Table of Contents

|     |   |    |
|-----|---|----|
| 1   | Table of Contents .....                           | 2  |
| 2   | Details about the Test Laboratory .....           | 3  |
| 3   | Description of the Equipment under Test .....     | 4  |
| 4   | Summary of Test Standards .....                   | 6  |
| 5   | Summary of Test Results .....                     | 7  |
| 6   | General Remarks .....                             | 8  |
| 7   | Test Setups .....                                 | 9  |
| 8   | Systems test configuration .....                  | 12 |
| 9   | Technical Requirement .....                       | 13 |
| 9.1 | Conducted Emission .....                          | 13 |
| 9.2 | Conducted peak output power .....                 | 16 |
| 9.3 | 6dB bandwidth .....                               | 19 |
| 9.4 | Power spectral density .....                      | 22 |
| 9.5 | Spurious RF conducted emissions .....             | 25 |
| 9.6 | Band edge .....                                   | 32 |
| 9.7 | Spurious radiated emissions for transmitter ..... | 35 |
| 10  | Test Equipment List .....                         | 41 |
| 11  | System Measurement Uncertainty .....              | 42 |
| 12  | Photographs of Test Set-ups .....                 | 43 |
| 13  | Photographs of EUT .....                          | 44 |

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch  
No.16 Lane, 1951 Du Hui Road,  
Shanghai 201108,  
P.R. China

Test Firm FCC 820234  
Registration  
Number:

Designation CN1183  
Number

IC Company 25988  
Number

CAB identifier CN0101

Telephone: +86 21 6141 0123  
Fax: +86 21 6140 8600

### 3 Description of the Equipment under Test

#### Description of the Equipment Under Test

Product: Tubular motor

Model no: CM-05

FCC ID: ZY4CM05B

IC: N/A

Options and accessories: NA

Rating: 5 V DC

RF Transmission Frequency: 433.92MHz  
2402~2480 MHz(BLE)

No. of Operated Channel: 2.4GHz BLE:40

Modulation: For 433.92MHz: FSK  
For 2.4GHz BLE: GFSK

Antenna Type: For 433.92MHz: line antenna  
For 2.4GHz BLE: line antenna

Antenna Gain: For 433.92MHz: -4dBi  
For 2.4GHz BLE: 0dBi

Channel list:

| Bluetooth Low Energy |          |    |          |    |          |    |          |
|----------------------|----------|----|----------|----|----------|----|----------|
| Ch                   | Fre(MHz) | Ch | Fre(MHz) | Ch | Fre(MHz) | Ch | Fre(MHz) |
| 0                    | 2402     | 10 | 2422     | 20 | 2442     | 30 | 2462     |
| 1                    | 2404     | 11 | 2424     | 21 | 2444     | 31 | 2464     |
| 2                    | 2406     | 12 | 2426     | 22 | 2446     | 32 | 2466     |
| 3                    | 2408     | 13 | 2428     | 23 | 2448     | 33 | 2468     |
| 4                    | 2410     | 14 | 2430     | 24 | 2450     | 34 | 2470     |
| 5                    | 2412     | 15 | 2432     | 25 | 2452     | 35 | 2472     |
| 6                    | 2414     | 16 | 2434     | 26 | 2454     | 36 | 2474     |
| 7                    | 2416     | 17 | 2436     | 27 | 2456     | 37 | 2476     |
| 8                    | 2418     | 18 | 2438     | 28 | 2458     | 38 | 2478     |
| 9                    | 2420     | 19 | 2440     | 29 | 2460     | 39 | 2480     |



Description of the EUT:

The Equipment Under Test (EUT) is a Tubular motor which transmitted at 433.92MHz and support 2.4GHz BLE (support 1Mbps and 2Mbps data rate). we tested it and listed the worst data in this report.

Test sample no.:

SHA-638108-1

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment, antenna gain or any information supplied.

## 4 Summary of Test Standards

| <b>Test Standards</b>      |  |
|----------------------------|--|
| FCC Part 15 Subpart C:2020 | PART 15 - RADIO FREQUENCY DEVICES<br>Subpart C - Intentional Radiators |

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10 (2013).

## 5 Summary of Test Results

| Technical Requirements |   |            |           |             |
|------------------------|---|------------|-----------|-------------|
| Test Condition         |   | Pages      | Test Site | Test Result |
| §15.207                | Conducted emission AC power port            | 13-15      | Site 1    | Pass        |
| §15.247 (b) (3)        | Conducted peak output power                 | 16-18      | Site 1    | Pass        |
| §15.247(a)(1)          | 20dB bandwidth                              | ---        | ---       | N/A         |
| §15.247(a)(1)          | Carrier frequency separation                | ---        | ---       | N/A         |
| §15.247(a)(1)(iii)     | Number of hopping frequencies               | ---        | ---       | N/A         |
| §15.247(a)(1)(iii)     | Dwell Time                                  | ---        | ---       | N/A         |
| §15.247(a)(2)          | 6dB bandwidth                               | 19-21      | Site 1    | Pass        |
| §15.247(e)             | Power spectral density                      | 22-24      | Site 1    | Pass        |
| §15.247(d)             | Spurious RF conducted emissions             | 25-31      | Site 1    | Pass        |
| §15.247(d)             | Band edge                                   | 32-34      | Site 1    | Pass        |
| §15.247(d) & §15.209   | Spurious radiated emissions for transmitter | 35-40      | Site 1    | Pass        |
| §15.203                | Antenna requirement                         | See note 1 |           | Pass        |

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a line antenna, which gain is -4dBi for 433.92MHz and 0dBi for 2.4GHz BLE. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: ZY4CM05B, complies with Section 15.203, 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules.

This report is only for the 2.4GHz BLE test report, for the 433.92MHz test report please refer to 709502228908-00A.

### SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: March 1, 2022

Testing Start Date: March 3, 2022

Testing End Date: March 8, 2022

-TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:



Hui TONG  
Review Engineer

Prepared by:



Jiaxi XU  
Project Engineer


Tested by:



Yan YANG  
Test Engineer


## 7 Test Setups

### 7.1 AC Power Line Conducted Emission test setups

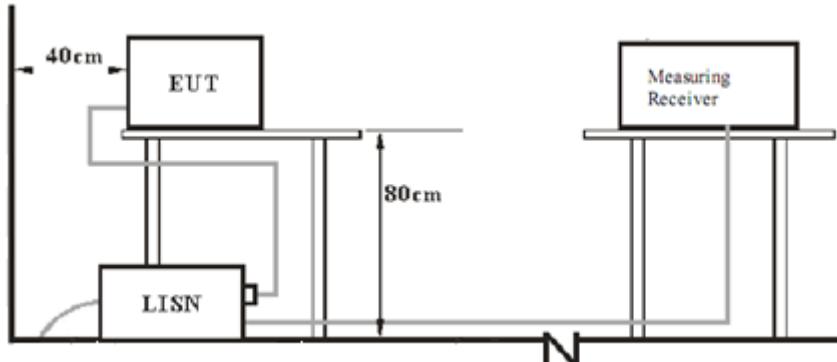


### 7.2 Radiated test setups


#### 9kHz ~ 30MHz Test Setup:

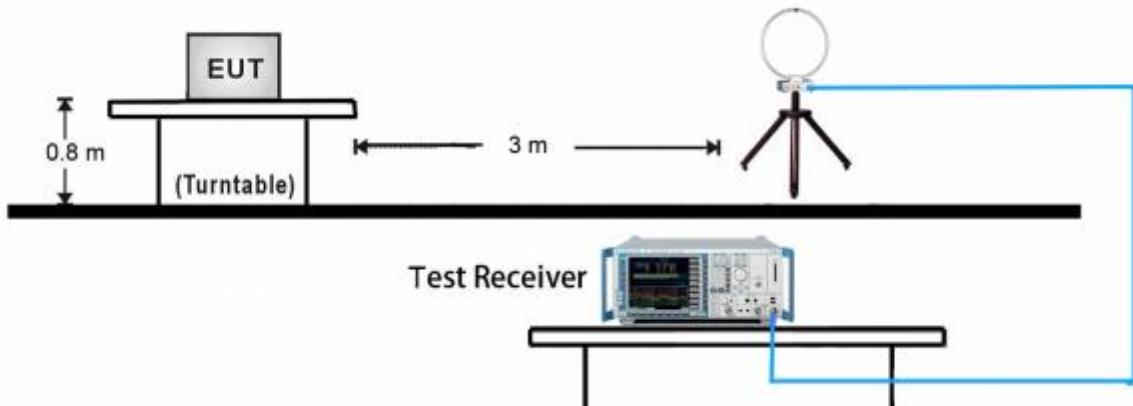


## 30MHz ~ 1GHz Test Setup:

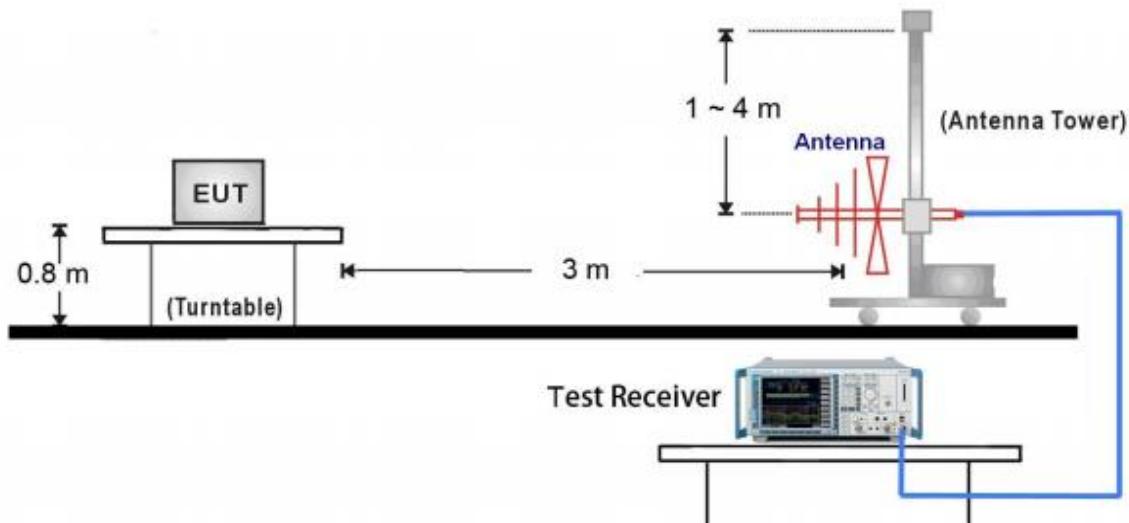


## 1GHz ~ 18GHz Test Setup:

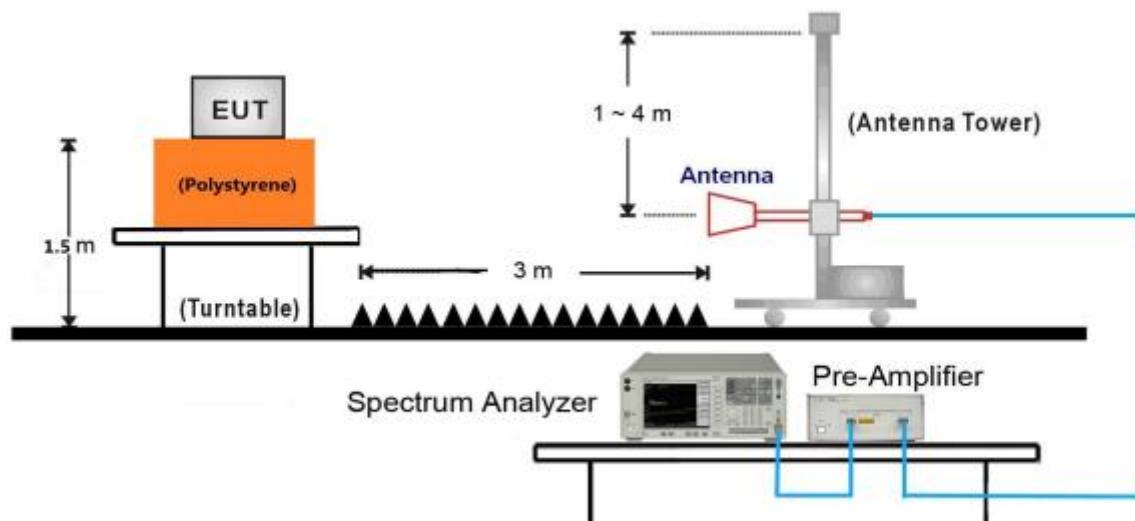

## 18GHz ~ 40GHz Test Setup:

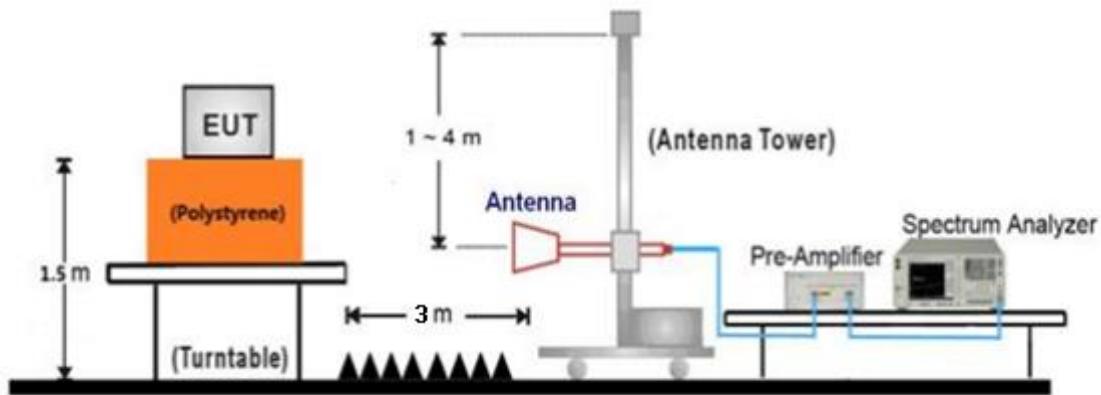

## 7.3 Conducted RF test setups

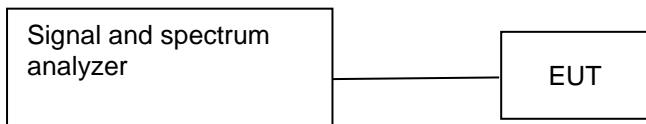

## 8 Systems test configuration

Auxiliary Equipment Used during Test:

| DESCRIPTION | MANUFACTURER | MODEL NO.(SHIELD) | S/N(LENGTH)    |
|-------------|--------------|-------------------|----------------|
| Notebook    | Lenovo       | T450S             | SL 10H72007 JS |

Test software: BlueNRG GUI v4.0.0

The system was configured to channel 0, 19, and 39 for the test.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

## 9 Technical Requirement

### 9.1 Conducted Emission

#### Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. An EMI test receiver is used to test the emissions from both sides of AC line


#### Limit

| Frequency<br>MHz | QP Limit<br>dB $\mu$ V | AV Limit<br>dB $\mu$ V |
|------------------|------------------------|------------------------|
| 0.150-0.500      | 66-56*                 | 56-46*                 |
| 0.500-5          | 56                     | 46                     |
| 5-30             | 60                     | 50                     |

Decreasing linearly with logarithm of the frequency

## Conducted Emission


Product Type : Tubular motor  
 M/N : CM-05  
 Operating Condition : Tx\_2402MHz for BLE; 1Mbps  
 Test Specification : L-line  
 Comment : 5VDC (powered by notebook whose input is 120V~ 60Hz)

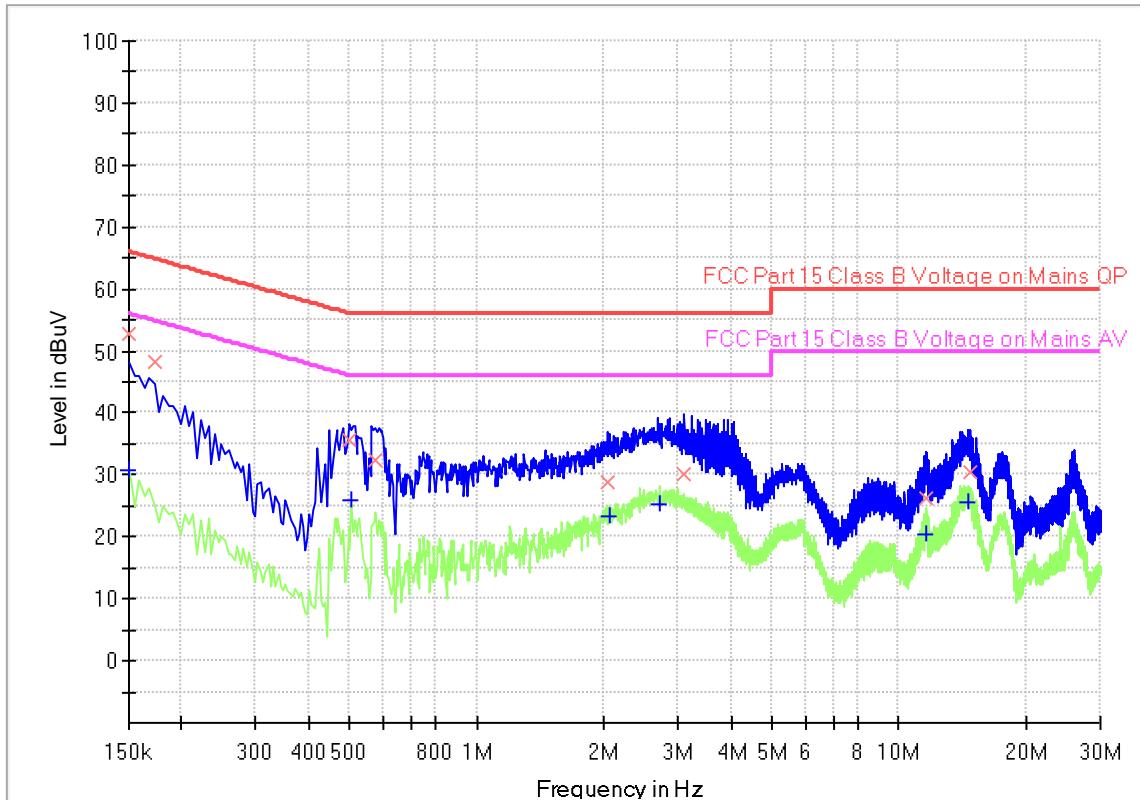

## Final\_Result

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.150000        | ---              | 30.85           | 56.00        | 25.15       | 1000.0          | 9.000           | L1   | 19.5       |
| 0.150000        | 52.72            | ---             | 66.00        | 13.28       | 1000.0          | 9.000           | L1   | 19.5       |
| 0.172500        | 48.31            | ---             | 64.84        | 16.53       | 1000.0          | 9.000           | L1   | 19.5       |
| 0.501000        | 35.62            | ---             | 56.00        | 20.38       | 1000.0          | 9.000           | L1   | 19.5       |
| 0.505500        | ---              | 26.04           | 46.00        | 19.96       | 1000.0          | 9.000           | L1   | 19.5       |
| 0.577500        | 32.29            | ---             | 56.00        | 23.71       | 1000.0          | 9.000           | L1   | 19.5       |
| 2.040000        | 28.77            | ---             | 56.00        | 27.23       | 1000.0          | 9.000           | L1   | 19.5       |
| 2.067000        | ---              | 23.37           | 46.00        | 22.63       | 1000.0          | 9.000           | L1   | 19.5       |
| 2.706000        | ---              | 25.31           | 46.00        | 20.69       | 1000.0          | 9.000           | L1   | 19.5       |
| 3.106500        | 30.18            | ---             | 56.00        | 25.82       | 1000.0          | 9.000           | L1   | 19.6       |
| 11.620500       | ---              | 20.47           | 50.00        | 29.53       | 1000.0          | 9.000           | L1   | 19.7       |
| 11.620500       | 26.37            | ---             | 60.00        | 33.63       | 1000.0          | 9.000           | L1   | 19.7       |
| 14.568000       | ---              | 25.56           | 50.00        | 24.44       | 1000.0          | 9.000           | L1   | 19.8       |
| 14.694000       | 30.40            | ---             | 60.00        | 29.60       | 1000.0          | 9.000           | L1   | 19.8       |

Product Type : Tubular motor  
 M/N : CM-05  
 Operating Condition : Tx\_2402MHz for BLE; 1Mbps  
 Test Specification : N-line  
 Comment : 5VDC (powered by notebook whose input is 120V~ 60Hz)

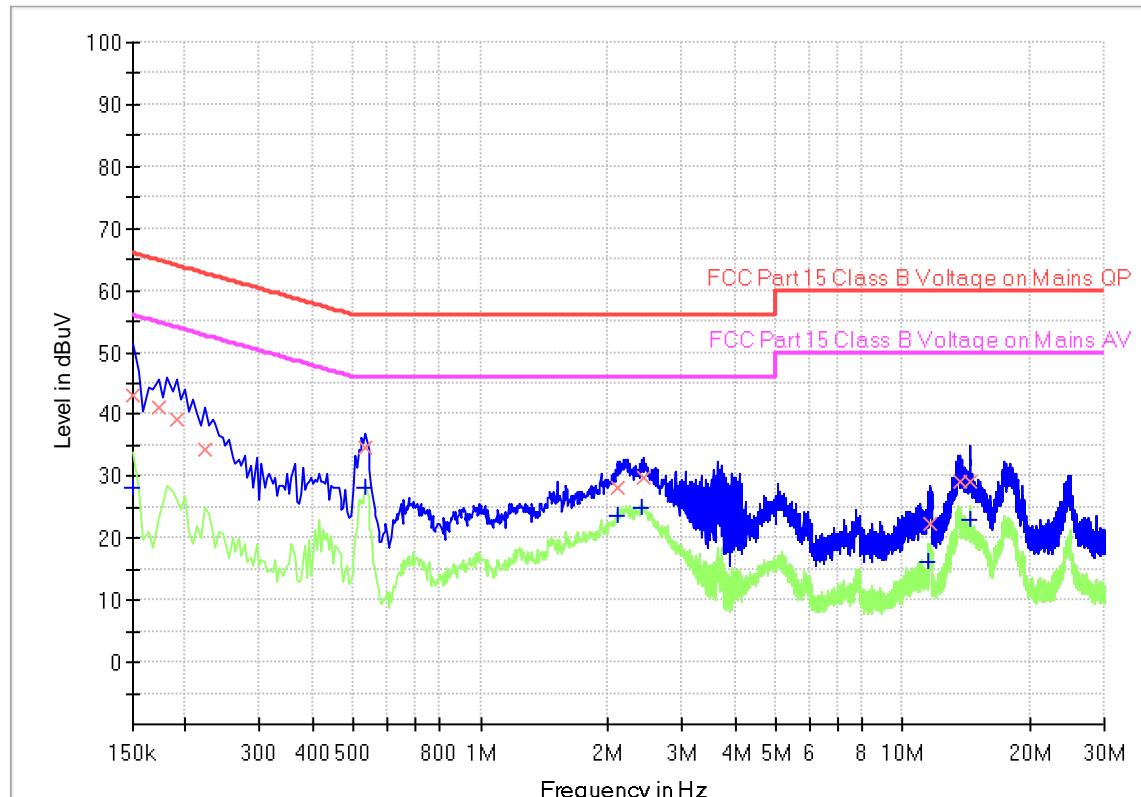

## Final Result

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|-----------------|-----------------|------|------------|
| 0.150000        | ---              | 28.33           | 56.00        | 27.67       | 1000.0          | 9.000           | N    | 19.5       |
| 0.150000        | 42.91            | ---             | 66.00        | 23.09       | 1000.0          | 9.000           | N    | 19.5       |
| 0.172500        | 41.12            | ---             | 64.84        | 23.72       | 1000.0          | 9.000           | N    | 19.5       |
| 0.190500        | 39.15            | ---             | 64.01        | 24.86       | 1000.0          | 9.000           | N    | 19.5       |
| 0.222000        | 34.30            | ---             | 62.74        | 28.44       | 1000.0          | 9.000           | N    | 19.5       |
| 0.532500        | ---              | 28.10           | 46.00        | 17.90       | 1000.0          | 9.000           | N    | 19.5       |
| 0.532500        | 34.68            | ---             | 56.00        | 21.32       | 1000.0          | 9.000           | N    | 19.5       |
| 2.103000        | 28.23            | ---             | 56.00        | 27.77       | 1000.0          | 9.000           | N    | 19.5       |
| 2.121000        | ---              | 23.51           | 46.00        | 22.49       | 1000.0          | 9.000           | N    | 19.5       |
| 2.395500        | ---              | 25.02           | 46.00        | 20.98       | 1000.0          | 9.000           | N    | 19.5       |
| 2.427000        | 29.82            | ---             | 56.00        | 26.18       | 1000.0          | 9.000           | N    | 19.5       |
| 11.521500       | ---              | 16.08           | 50.00        | 33.92       | 1000.0          | 9.000           | N    | 19.7       |
| 11.620500       | 22.24            | ---             | 60.00        | 37.76       | 1000.0          | 9.000           | N    | 19.7       |
| 13.605000       | 29.01            | ---             | 60.00        | 30.99       | 1000.0          | 9.000           | N    | 19.7       |
| 14.379000       | ---              | 22.88           | 50.00        | 27.12       | 1000.0          | 9.000           | N    | 19.7       |
| 14.379000       | 29.19            | ---             | 60.00        | 30.81       | 1000.0          | 9.000           | N    | 19.7       |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)  
 Factor (dB) = Cable Loss (dB) + LISN Factor (dB) + 10dB Attenuator

## 9.2 Conducted peak output power

### Test Method

1. Use the following spectrum analyzer settings:  
RBW > the 6 dB bandwidth of the emission being measured,  $VBW \geq 3RBW$ ,  $Span \geq 3RBW$   
Sweep = auto, Detector function = peak, Trace = max hold.
2. Add a correction factor to the display.
3. Use a power meter to measure the conducted peak output power.

### Limits

According to §15.247 (b) (1), conducted peak output power limit as below:


| Conducted peak output power |            |              |
|-----------------------------|------------|--------------|
| Frequency Range<br>MHz      | Limit<br>W | Limit<br>dBm |
| 2400-2483.5                 | ≤1         | ≤30          |

Test result as below table

| Frequency              | Conducted Peak<br>Output Power | Data transmission<br>rate | Result |
|------------------------|--------------------------------|---------------------------|--------|
| MHz                    | dBm                            |                           |        |
| Low channel 2402MHz    | -3.06                          | 1Mbps                     | Pass   |
| Middle channel 2440MHz | -2.88                          |                           | Pass   |
| High channel 2480MHz   | -2.85                          |                           | Pass   |
| Low channel 2402MHz    | -3.04                          | 2Mbps                     | Pass   |
| Middle channel 2440MHz | -2.91                          |                           | Pass   |
| High channel 2480MHz   | -2.89                          |                           | Pass   |


## Peak output power

## Channel 0 (2402MHz; 1Mbps)

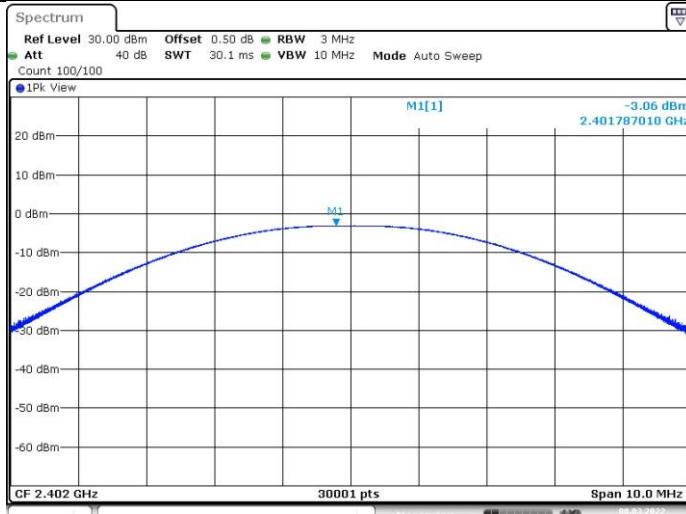


Date: 8 MAR 2022 13:43:05

## Channel 19 (2440MHz; 1Mbps)

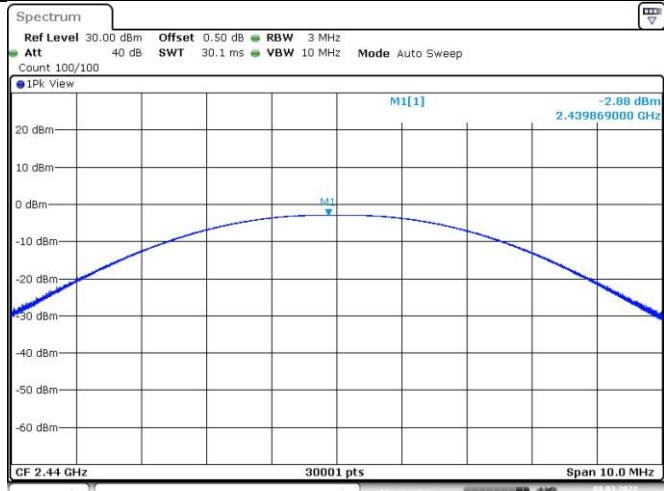


Date: 8 MAR 2022 13:45:21

## Channel 39 (2480MHz; 1Mbps)

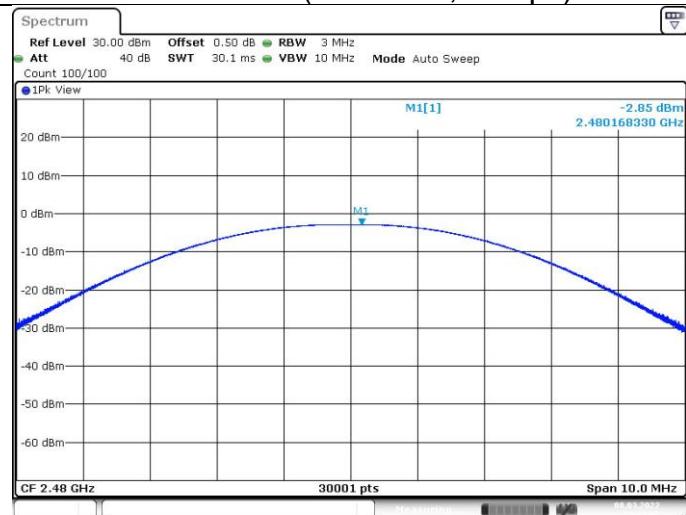

Date: 8 MAR 2022 13:47:07

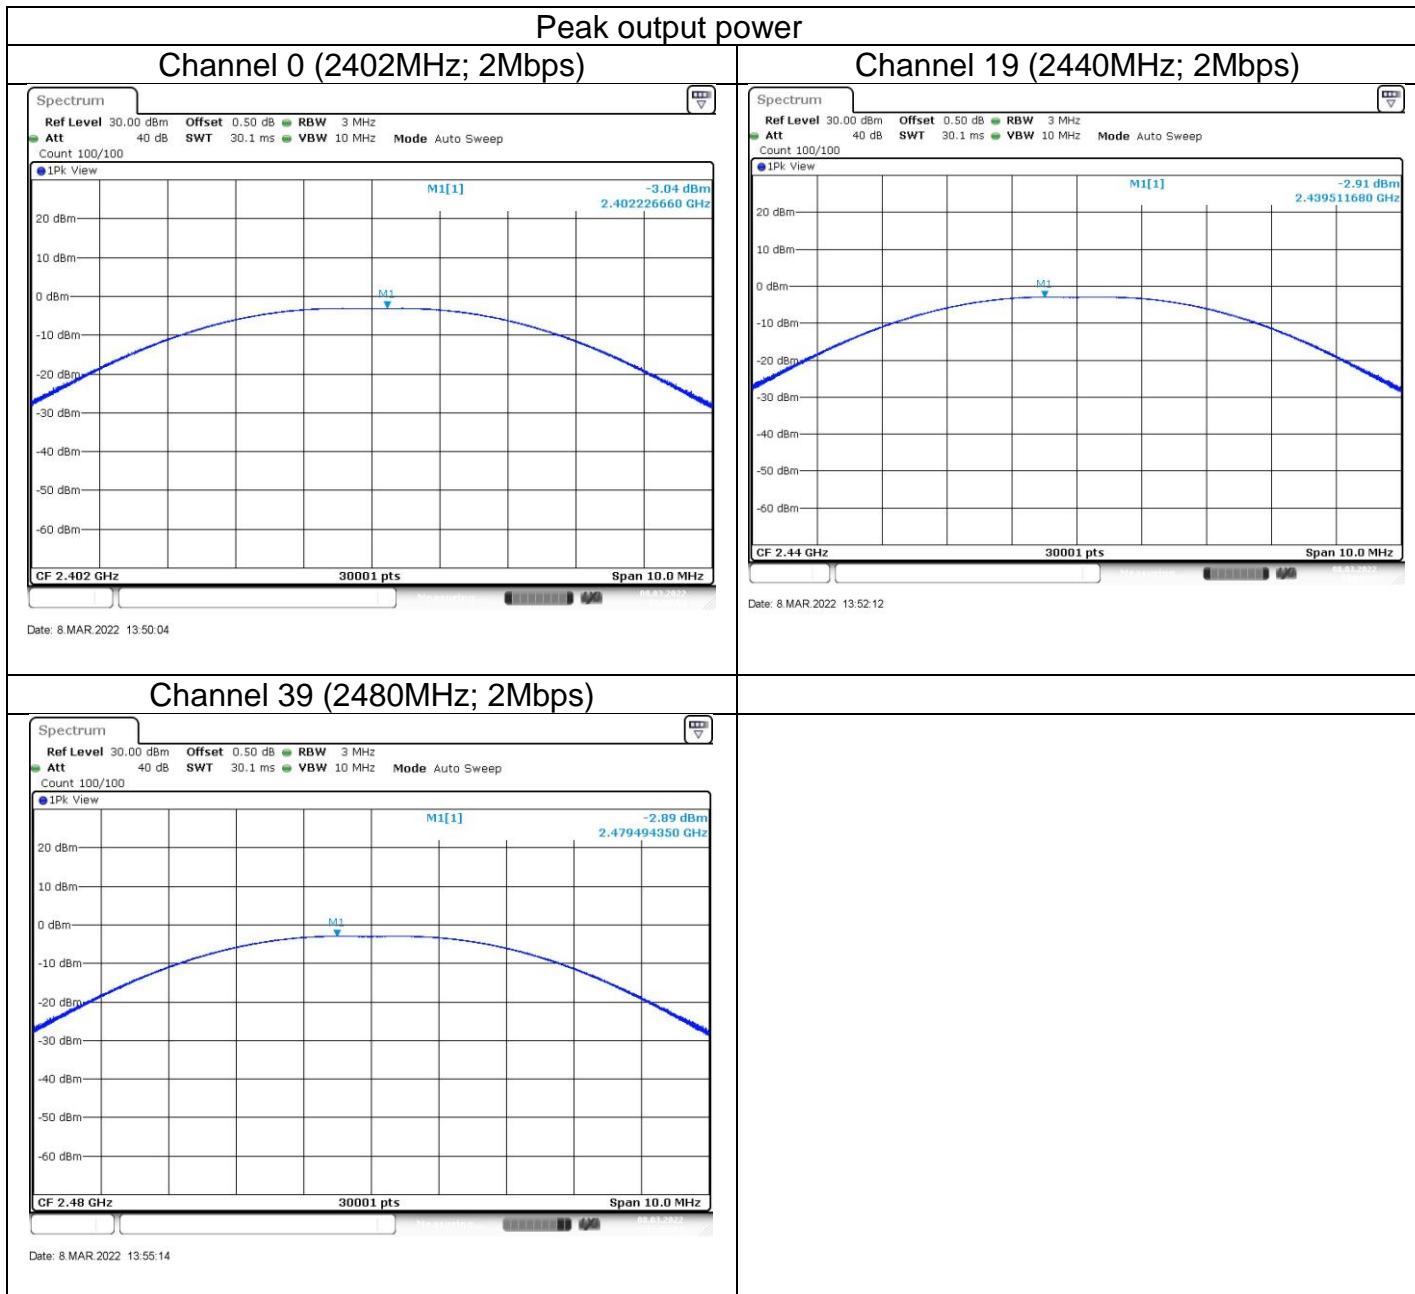

## 9.3 6dB bandwidth

### Test Method

1. Use the following spectrum analyzer settings:  
RBW=100K, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

### Limit


**Limit [kHz]**

$\geq$ 500


### Test result

| Frequency              | 6dB bandwidth | Data transmission rate | Result |
|------------------------|---------------|------------------------|--------|
| MHz                    | kHz           |                        |        |
| Top channel 2402MHz    | 667           | 1Mbps                  | Pass   |
| Middle channel 2440MHz | 664           |                        | Pass   |
| Bottom channel 2480MHz | 668           |                        | Pass   |
| Top channel 2402MHz    | 1130          | 2Mbps                  | Pass   |
| Middle channel 2440MHz | 1128          |                        | Pass   |
| Bottom channel 2480MHz | 1128          |                        | Pass   |

## 6dB Bandwidth

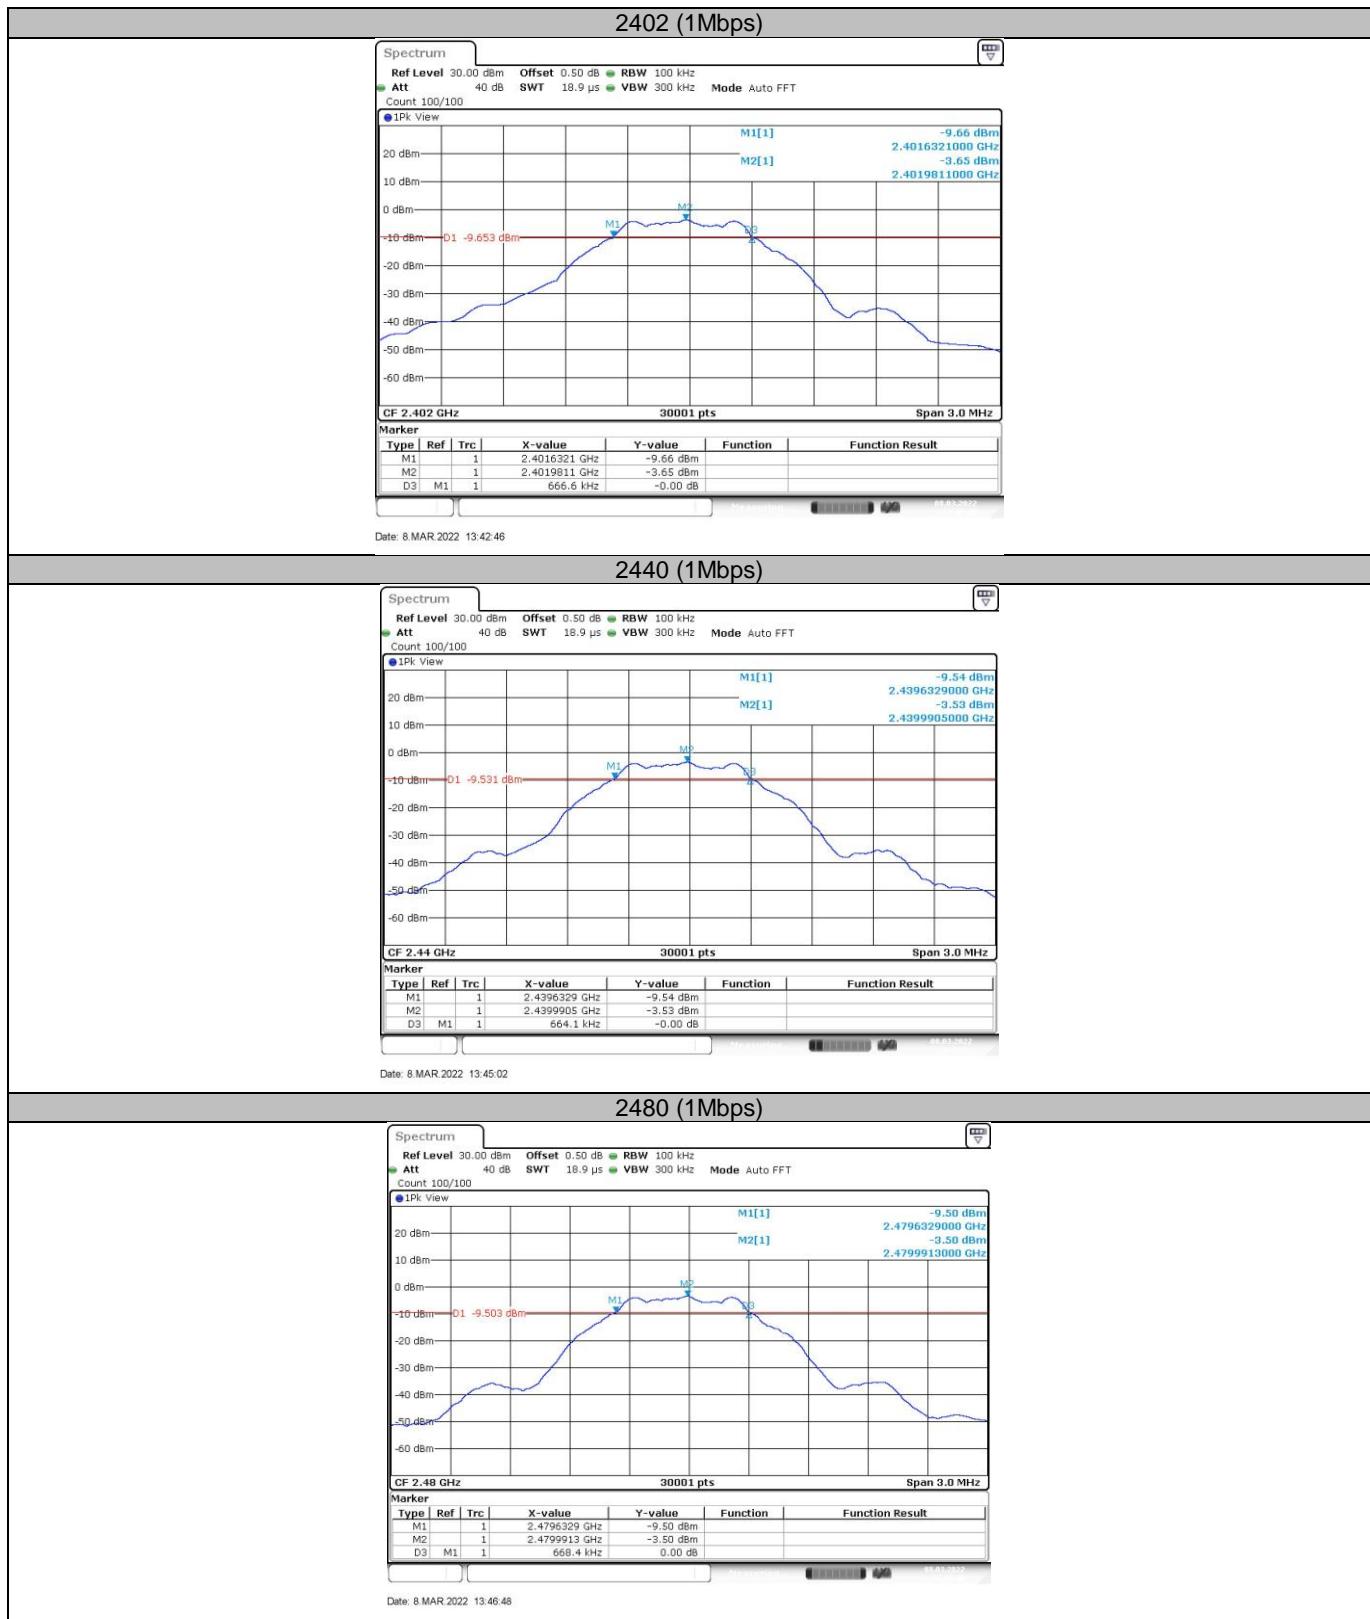

## 6dB Bandwidth

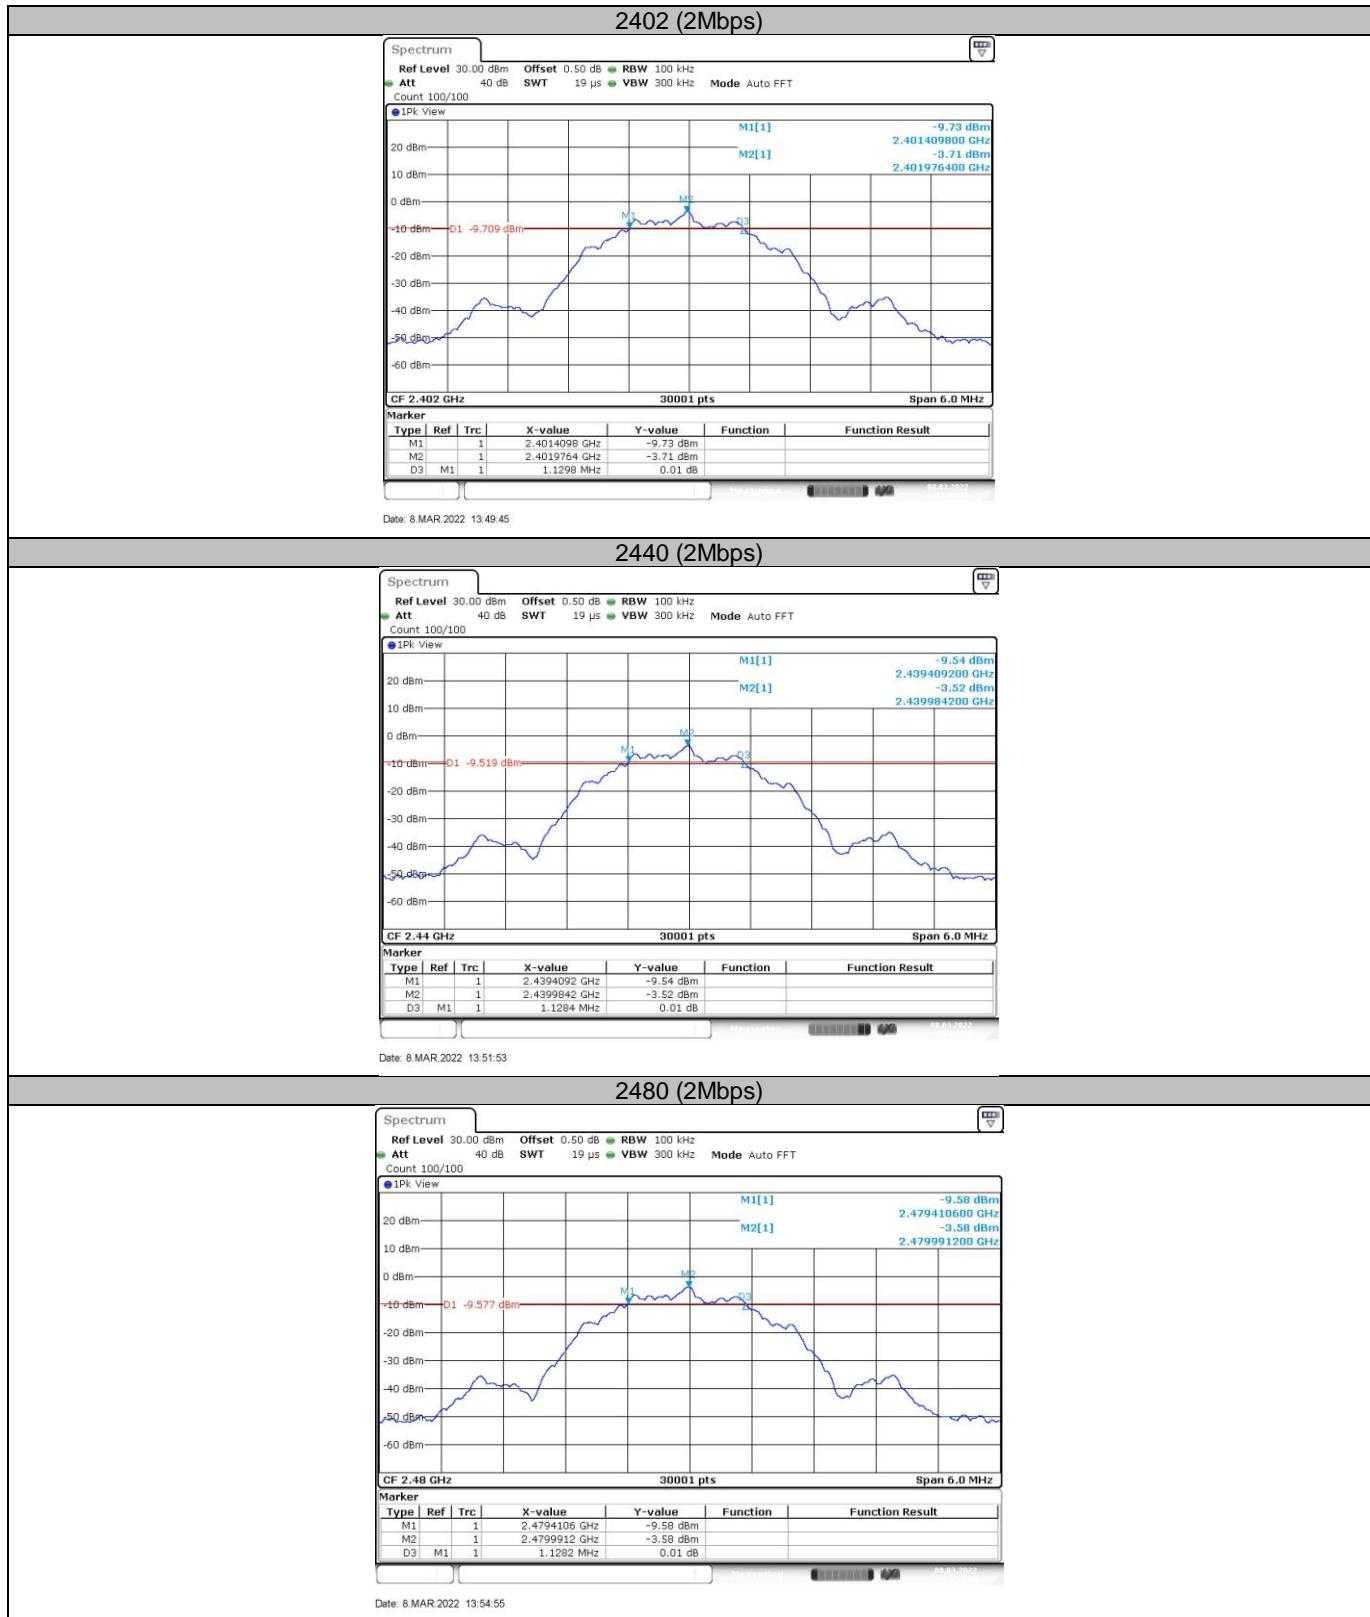

## 9.4 Power spectral density

### Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency.  
RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

### Limit


Limit [dBm/3kHz]

≤8


### Test result

| Frequency              | Power spectral density | Data transmission rate | Result |
|------------------------|------------------------|------------------------|--------|
| MHz                    | dBm/3KHz               |                        |        |
| Top channel 2402MHz    | -18.19                 | 1Mbps                  | Pass   |
| Middle channel 2440MHz | -18.50                 |                        | Pass   |
| Bottom channel 2480MHz | -18.58                 |                        | Pass   |
| Top channel 2402MHz    | -21.62                 | 2Mbps                  | Pass   |
| Middle channel 2440MHz | -21.88                 |                        | Pass   |
| Bottom channel 2480MHz | -21.60                 |                        | Pass   |

## Power spectral density

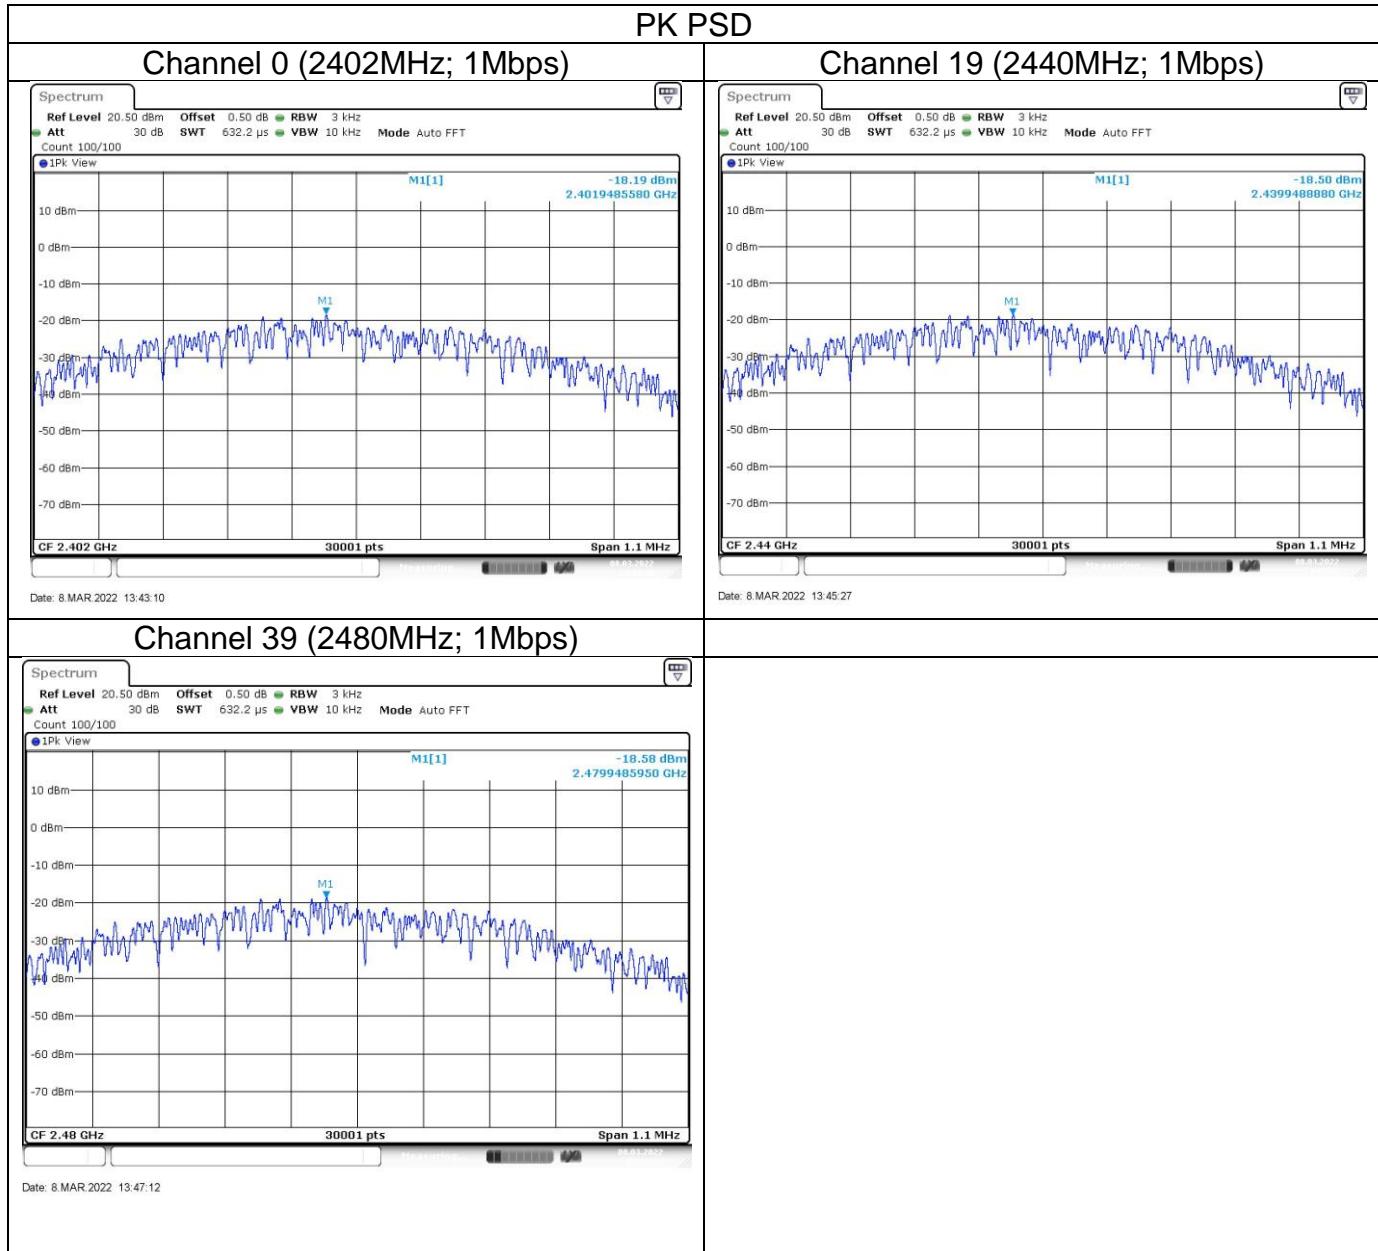

## Power spectral density

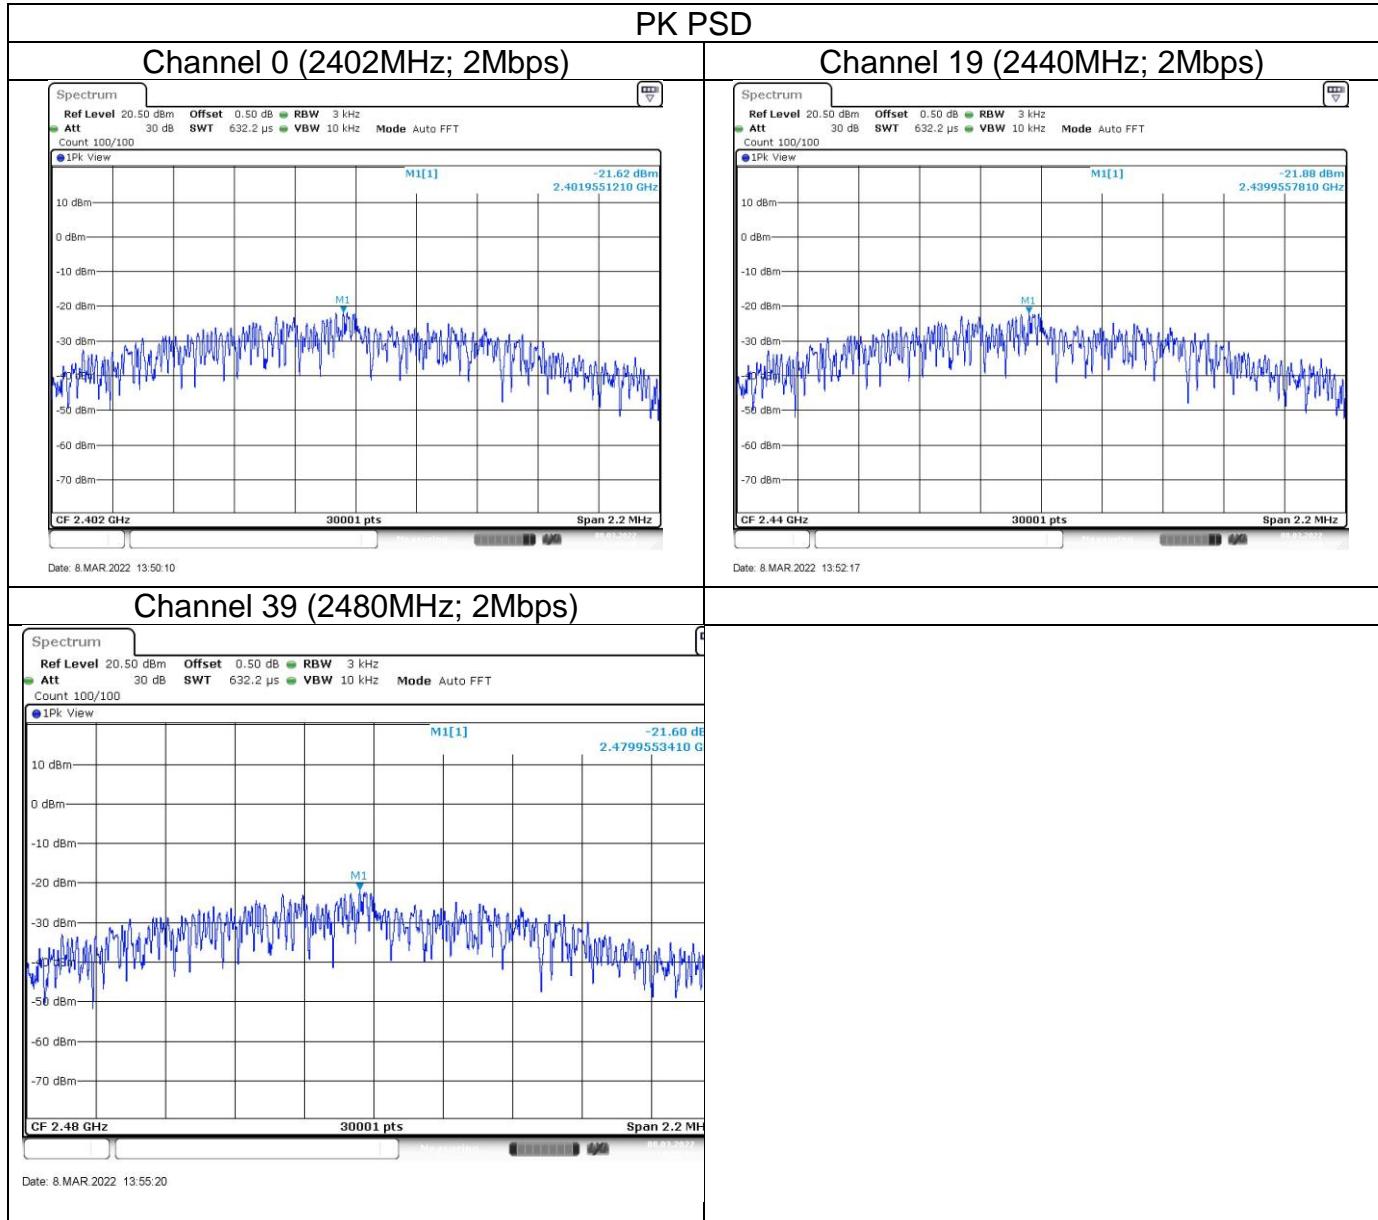

## 9.5 Spurious RF conducted emissions


### Test Method

1. Establish a reference level by using the following procedure:
  - a. Set RBW=100 kHz. VBW $\geq$ 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
  - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
  - a. Set the center frequency and span to encompass frequency range to be measured.
  - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.


### Limit

| Frequency Range<br>MHz | Limit (dBc) |
|------------------------|-------------|
| 30-25000               | -20         |


## Spurious RF conducted emissions

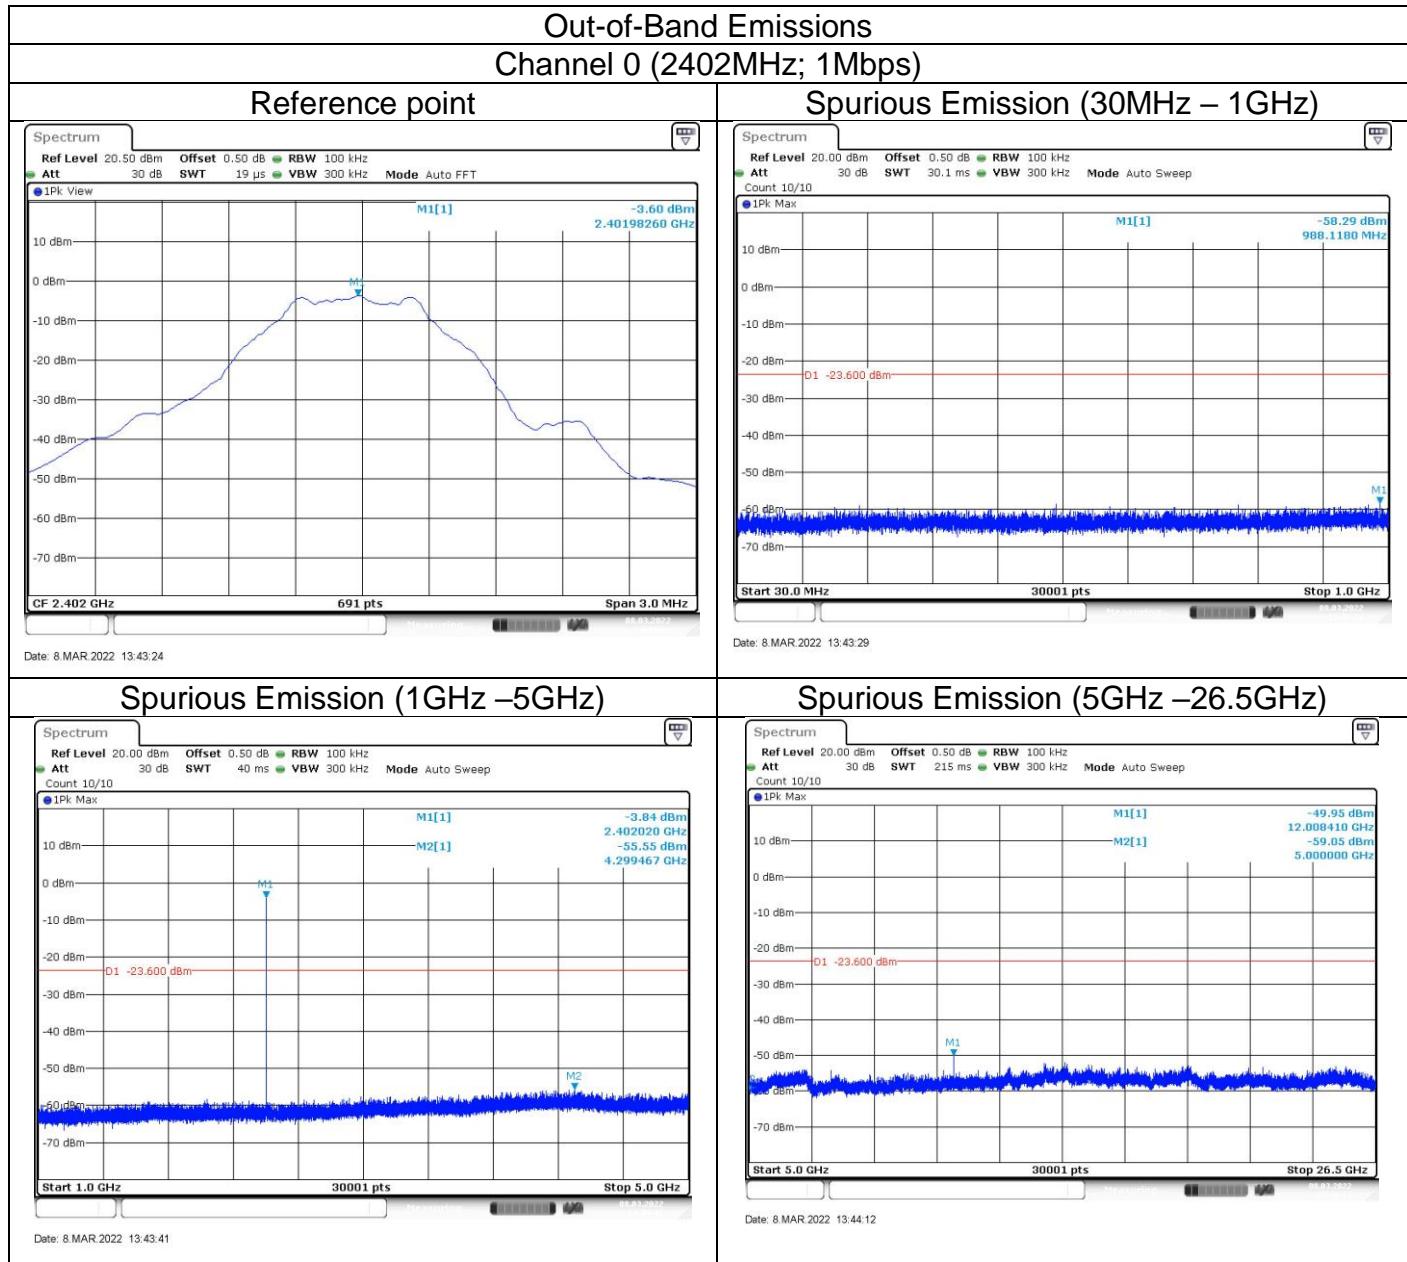


## Spurious RF conducted emissions

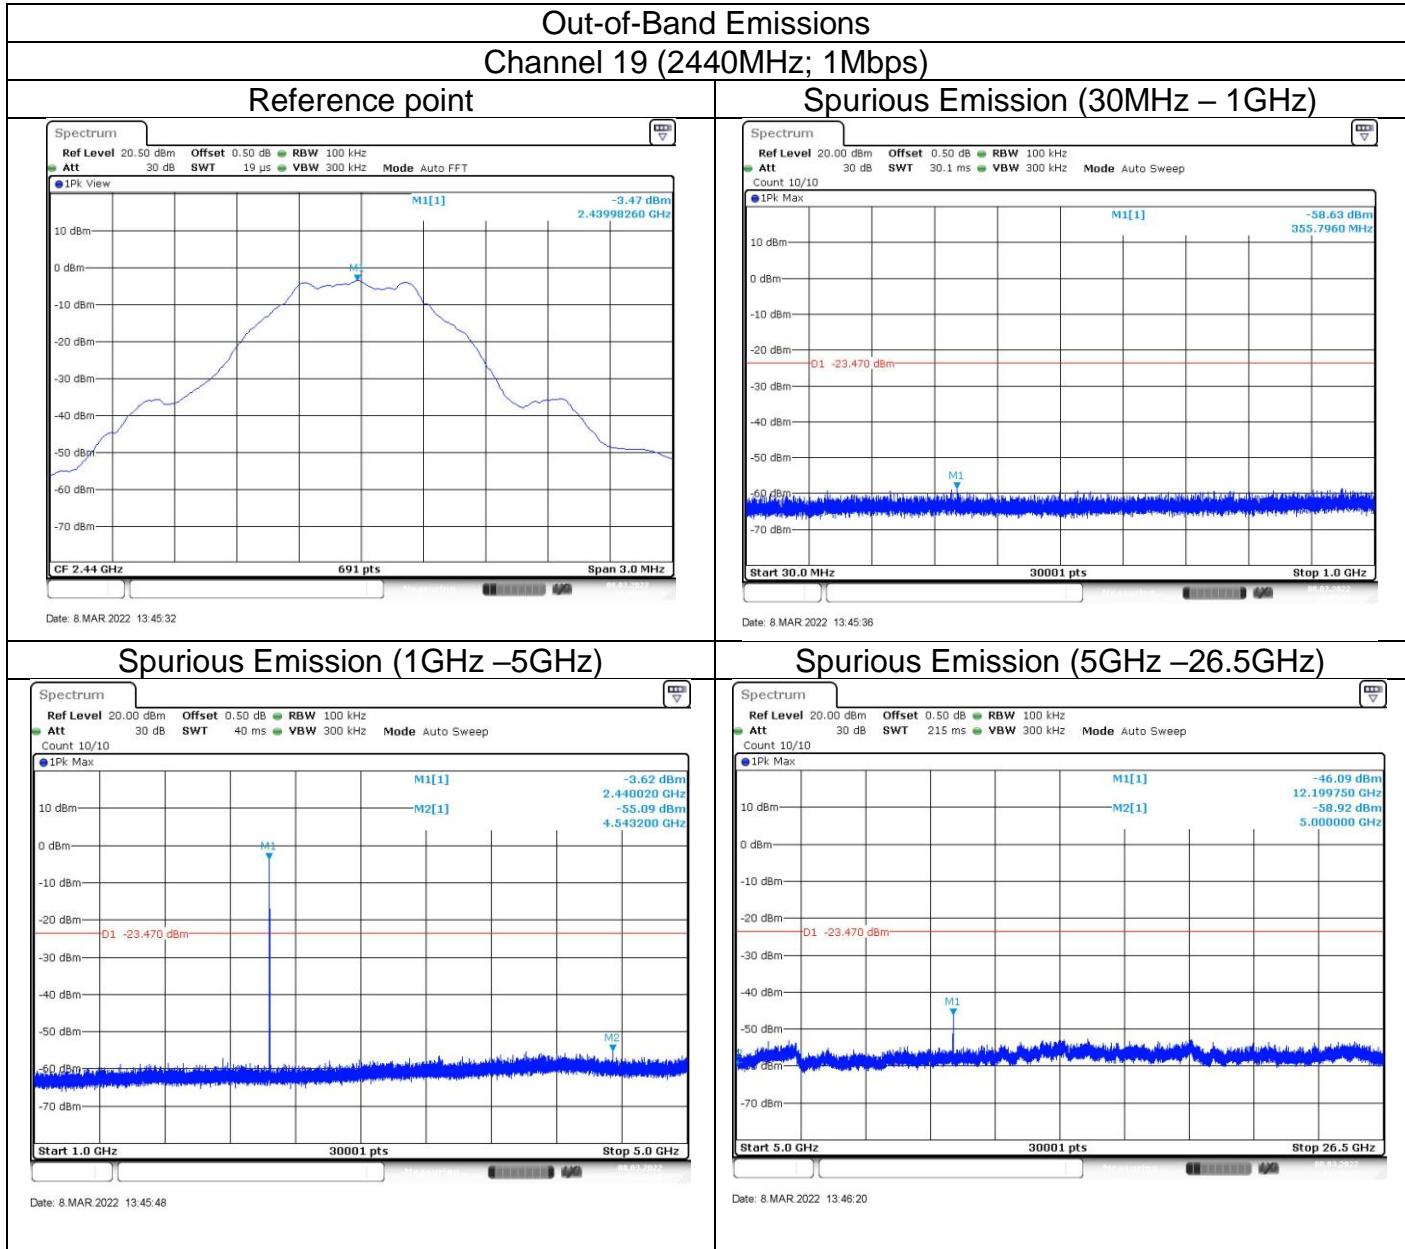


## Spurious RF conducted emissions

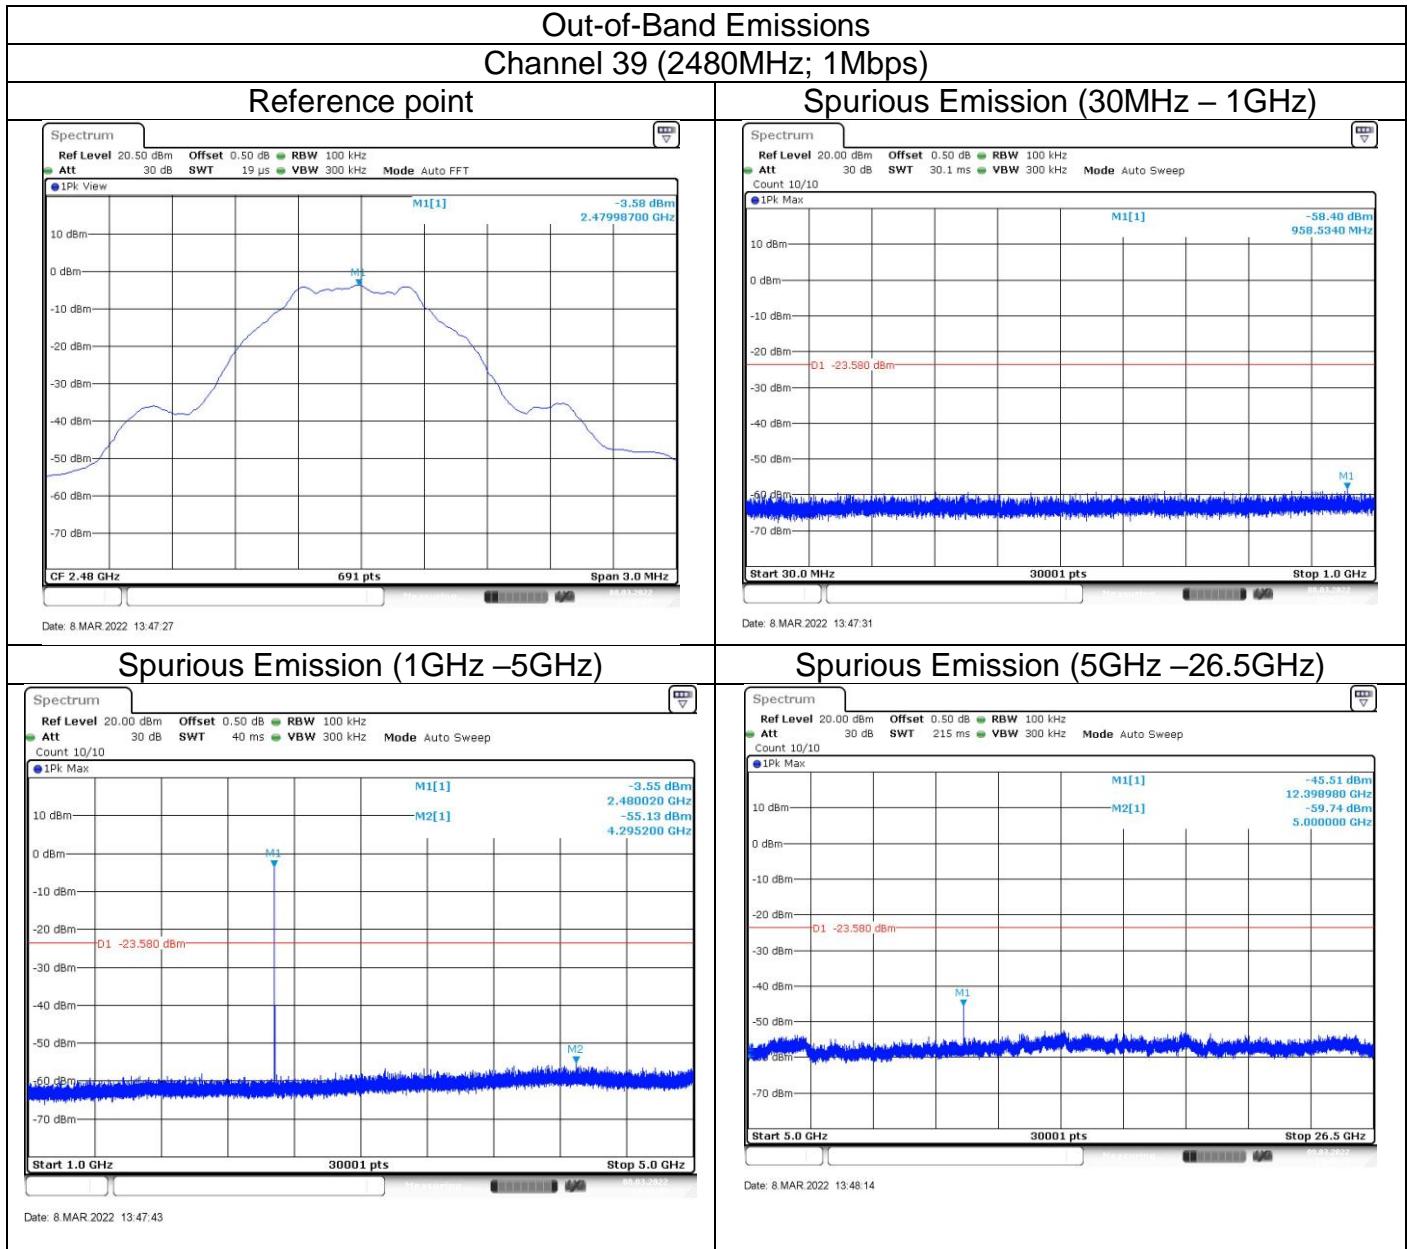


## Spurious RF conducted emissions

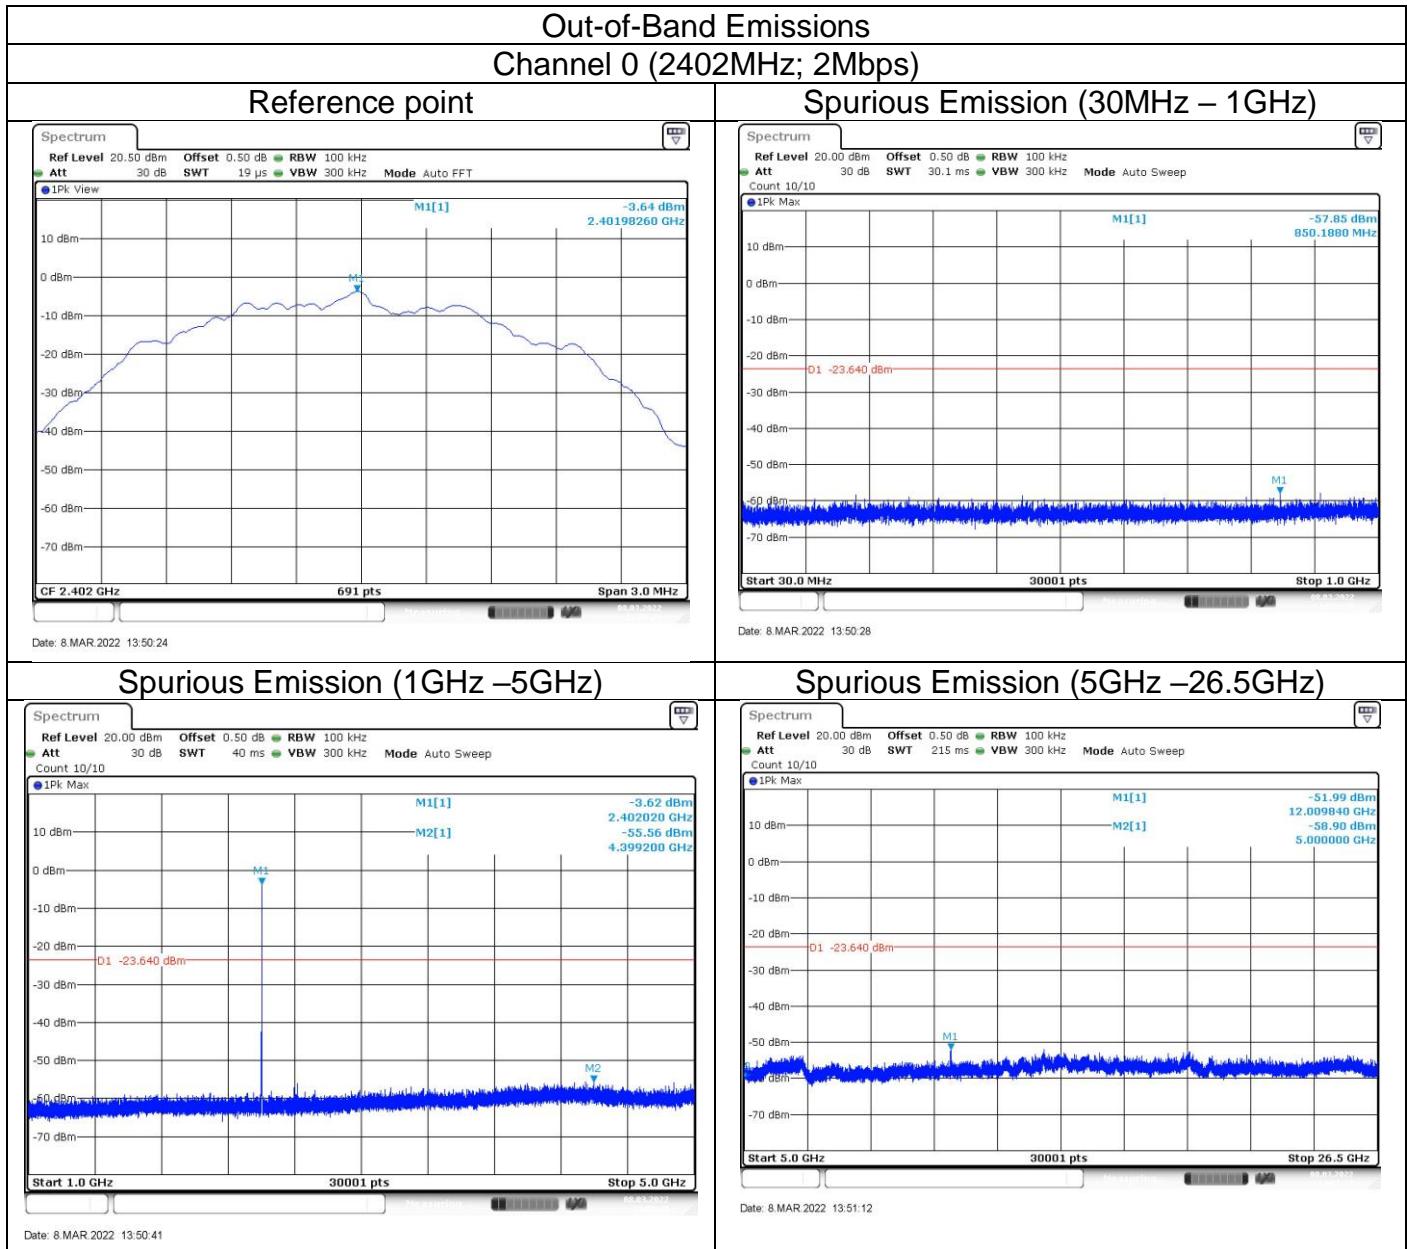

## Spurious RF conducted emissions

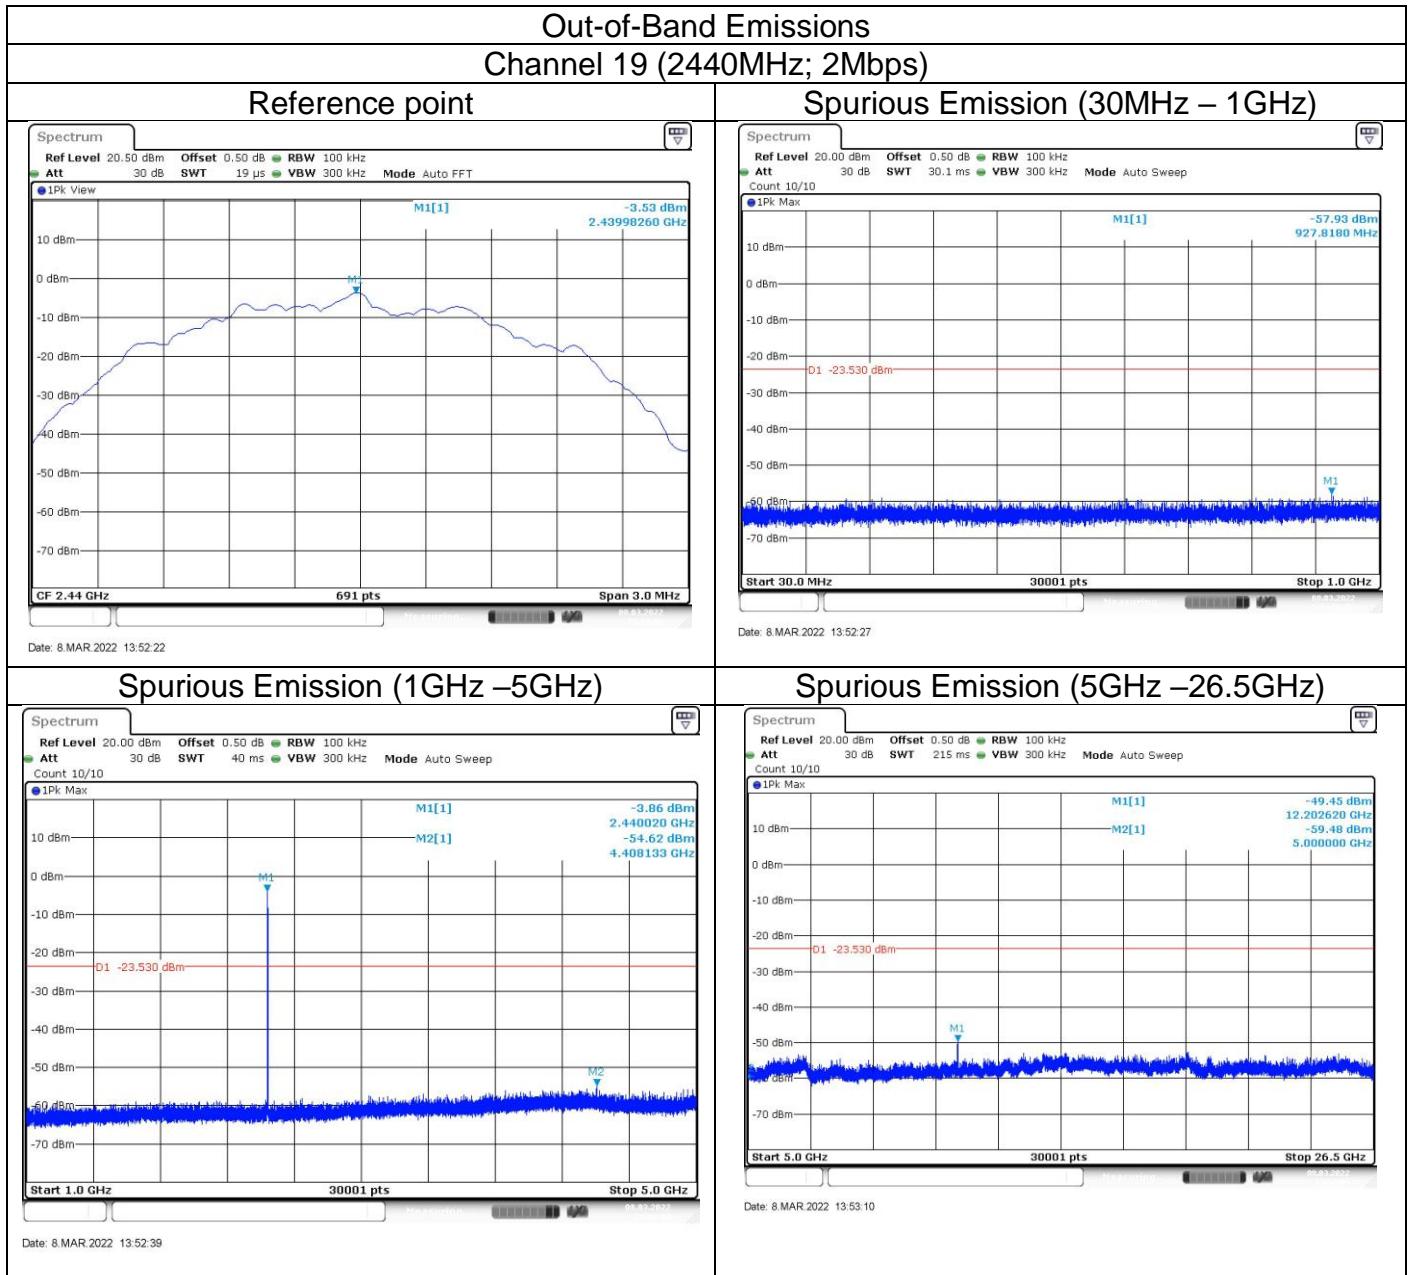

## Spurious RF conducted emissions

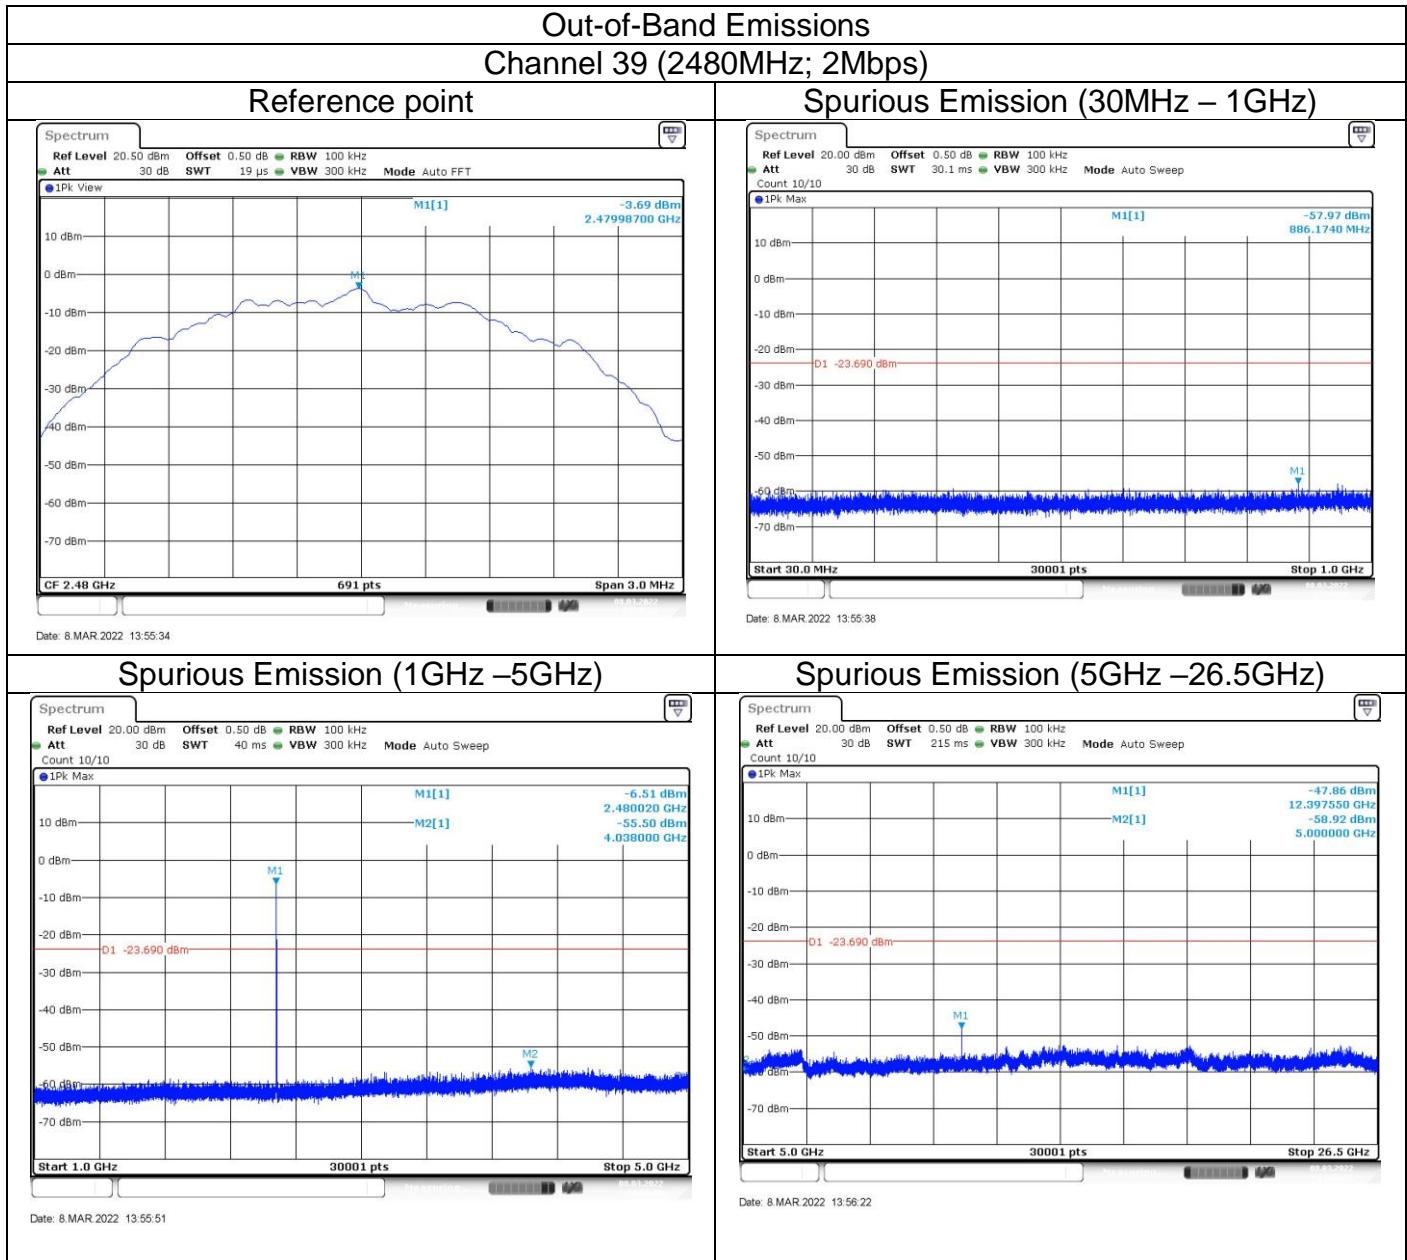

## 9.6 Band edge


### Test Method

- 1 Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW $\geq$ RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.


### Limit

According to §15.247(d) and RSS-247 5.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)) and RSS-Gen.

## Test result

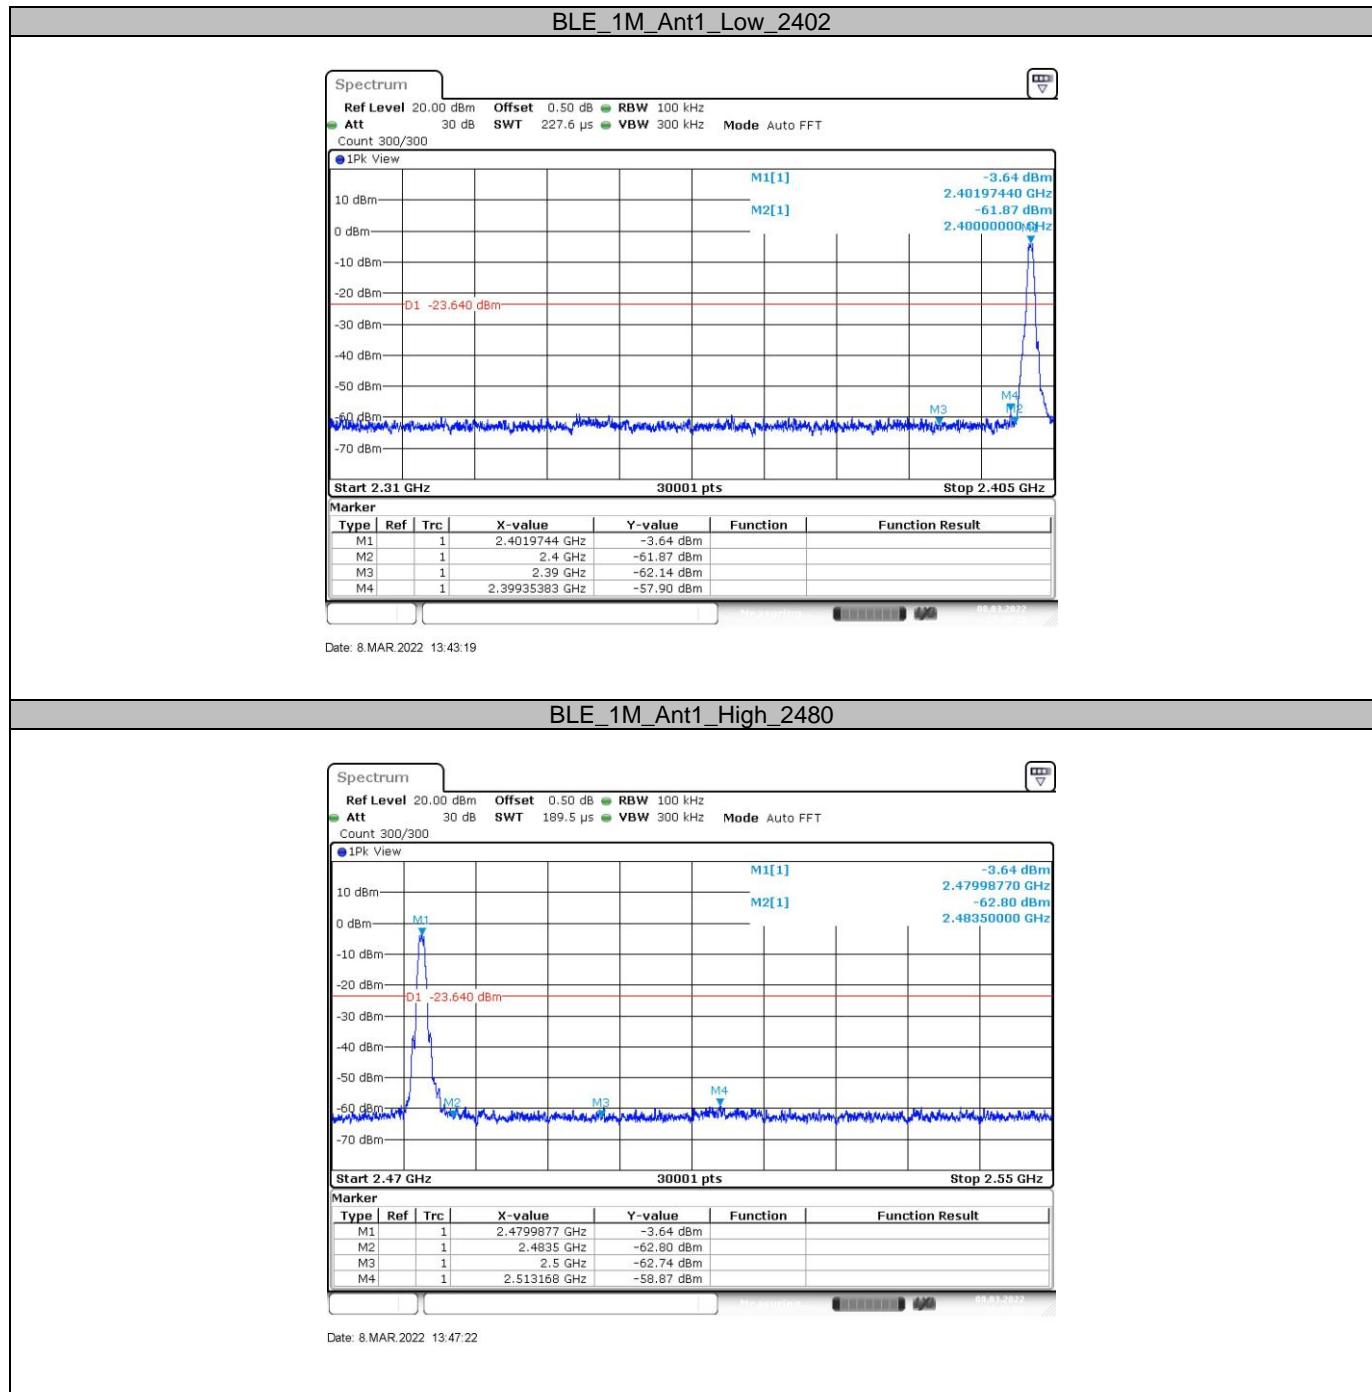

## Test result

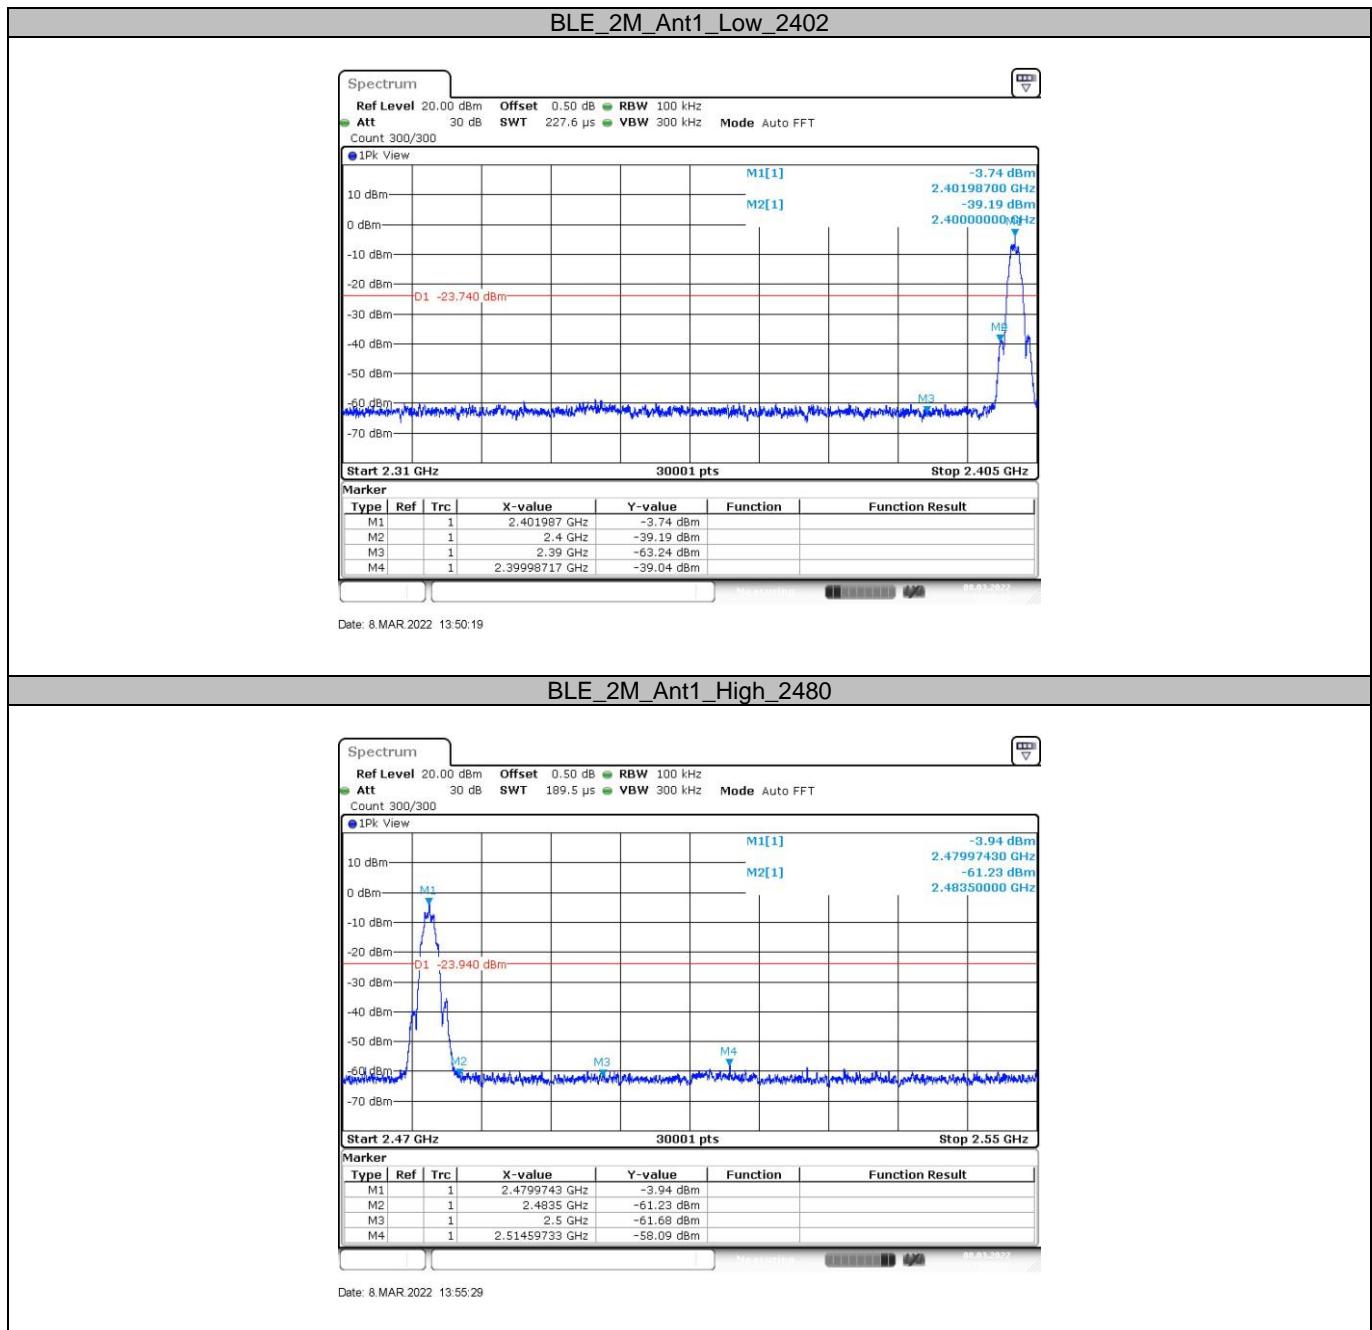

## 9.7 Spurious radiated emissions for transmitter

### Test Method

1. The EUT was place on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

#### For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 100 kHz to 120 kHz, VBW $\geq$ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 1MHz, VBW $\geq$ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1MHz.
- b) VBW  $\geq$  [3  $\times$  RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)]  $\leq$  RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

## Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205 and RSS-GEN 8.10 must comply with the radiated emission limits specified in section 15.209.

| Frequency<br>MHz | Field Strength<br>uV/m | Measured Distance<br>Meters |
|------------------|------------------------|-----------------------------|
| 0.009~0.490      | 2400/F (kHz)           | 300                         |
| 0.490~1.705      | 24000/F (kHz)          | 30                          |
| 1.705~30         | 30                     | 30                          |

| Frequency<br>MHz | Field Strength<br>uV/m | Field Strength<br>dB $\mu$ V/m | Detector |
|------------------|------------------------|--------------------------------|----------|
| 30-88            | 100                    | 40                             | QP       |
| 88-216           | 150                    | 43.5                           | QP       |
| 216-960          | 200                    | 46                             | QP       |
| 960-1000         | 500                    | 54                             | QP       |
| Above 1000       | 500                    | 54                             | AV       |
| Above 1000       | 5000                   | 74                             | PK       |

### Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Pre-scan with three orthogonal axis and worst case as X axis. The only worse case test result is listed in the report.

### Test result

| Test mode: GFSK (1Mbps) |                        |                |             |          |              |
|-------------------------|------------------------|----------------|-------------|----------|--------------|
| Channel 0 (2402MHz)     |                        |                |             |          |              |
| Frequency (MHz)         | Measure Level (dBuV/m) | Limit (dBuV/M) | Margin (dB) | Detector | Polarization |
| 2383.5                  | 42.82                  | 74.00          | 31.18       | Peak     | Horizontal   |
| 4960.4                  | 47.68                  | 74.00          | 26.32       | Peak     | Horizontal   |
| 7206.7                  | 48.12                  | 74.00          | 25.88       | Peak     | Horizontal   |
| 2385.1                  | 43.59                  | 74.00          | 30.41       | Peak     | Vertical     |
| 4804.0                  | 42.63                  | 74.00          | 31.37       | Peak     | Vertical     |
| 7206.1                  | 47.35                  | 74.00          | 26.65       | Peak     | Vertical     |

| Test mode: GFSK (1Mbps) |                        |                |             |          |              |
|-------------------------|------------------------|----------------|-------------|----------|--------------|
| Channel 19 (2440MHz)    |                        |                |             |          |              |
| Frequency (MHz)         | Measure Level (dBuV/m) | Limit (dBuV/M) | Margin (dB) | Detector | Polarization |
| 4879.9                  | 42.25                  | 74.00          | 31.75       | Peak     | Horizontal   |
| 7319.5                  | 51.94                  | 74.00          | 22.06       | Peak     | Horizontal   |
| 4879.4                  | 43.63                  | 74.00          | 30.37       | Peak     | Vertical     |
| 7319.5                  | 49.55                  | 74.00          | 24.45       | Peak     | Vertical     |

| Test mode: GFSK (1Mbps) |                        |                |             |          |              |
|-------------------------|------------------------|----------------|-------------|----------|--------------|
| Channel 39 (2480MHz)    |                        |                |             |          |              |
| Frequency (MHz)         | Measure Level (dBuV/m) | Limit (dBuV/M) | Margin (dB) | Detector | Polarization |
| 2483.8                  | 47.16                  | 74.00          | 26.84       | Peak     | Horizontal   |
| 4959.9                  | 42.50                  | 74.00          | 31.50       | Peak     | Horizontal   |
| 7439.6                  | 48.97                  | 74.00          | 25.03       | Peak     | Horizontal   |
| 2483.6                  | 45.39                  | 74.00          | 28.61       | Peak     | Vertical     |
| 7439.0                  | 50.59                  | 74.00          | 23.41       | Peak     | Vertical     |

| Test mode: GFSK (2Mbps) |                        |                |             |          |              |
|-------------------------|------------------------|----------------|-------------|----------|--------------|
| Channel 0 (2402MHz)     |                        |                |             |          |              |
| Frequency (MHz)         | Measure Level (dBuV/m) | Limit (dBuV/M) | Margin (dB) | Detector | Polarization |
| 2385.7                  | 43.85                  | 74.00          | 30.15       | Peak     | Horizontal   |
| 7204.4                  | 49.10                  | 74.00          | 24.90       | Peak     | Horizontal   |
| 4804.6                  | 50.07                  | 74.00          | 23.93       | Peak     | Horizontal   |
| 7206.1                  | 52.33                  | 74.00          | 21.67       | Peak     | Horizontal   |
| 2384.5                  | 43.78                  | 74.00          | 30.22       | Peak     | Vertical     |
| 4804.6                  | 43.58                  | 74.00          | 30.42       | Peak     | Vertical     |
| 7204.4                  | 48.01                  | 74.00          | 25.99       | Peak     | Vertical     |

| Test mode: GFSK (2Mbps) |                        |                |             |          |              |
|-------------------------|------------------------|----------------|-------------|----------|--------------|
| Channel 19 (2440MHz)    |                        |                |             |          |              |
| Frequency (MHz)         | Measure Level (dBuV/m) | Limit (dBuV/M) | Margin (dB) | Detector | Polarization |
| 4879.9                  | 42.79                  | 74.00          | 31.21       | Peak     | Horizontal   |
| 7318.9                  | 48.51                  | 74.00          | 25.49       | Peak     | Horizontal   |
| 4879.9                  | 44.72                  | 74.00          | 29.28       | Peak     | Vertical     |
| 7318.3                  | 48.64                  | 74.00          | 25.36       | Peak     | Vertical     |

| Test mode: GFSK (2Mbps) |                        |                |             |          |              |
|-------------------------|------------------------|----------------|-------------|----------|--------------|
| Channel 39 (2480MHz)    |                        |                |             |          |              |
| Frequency (MHz)         | Measure Level (dBuV/m) | Limit (dBuV/M) | Margin (dB) | Detector | Polarization |
| 2483.6                  | 46.45                  | 74.00          | 27.55       | Peak     | Horizontal   |
| 4960.4                  | 42.83                  | 74.00          | 31.17       | Peak     | Horizontal   |
| 7439.0                  | 47.66                  | 74.00          | 26.34       | Peak     | Horizontal   |
| 2483.6                  | 45.21                  | 74.00          | 28.79       | Peak     | Vertical     |
| 7438.5                  | 49.59                  | 74.00          | 24.41       | Peak     | Vertical     |


## Remark:

- (1) Emission level= Original Receiver Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss -Amplifier gain
- (3) Margin = limit – Corrected Reading

## The worst case of Radiated Emission below 1GHz:

|   |   |
|---|---|
| Site: 3 meter chamber   | Time: 2022/3/08 - 12:44   |
| Limit: FCC Part15.209 RE(3m) Class B  | Engineer: Yan YANG  |
| Probe: VULB9168   | Polarity: Horizontal  |
| EUT: Tubular motor,<br>Model no: CM-05  | Power:<br>5VDC (powered by notebook whose input is 120V~60Hz)<br>3.3VDC by debug board for BLE module |
| Note: Transmit by at channel 2402MHz.<br>Note: Pre-scan with three orthogonal axis and worst case as X axis |   |

RE\_VULB9168\_pre\_Cont\_30-1000

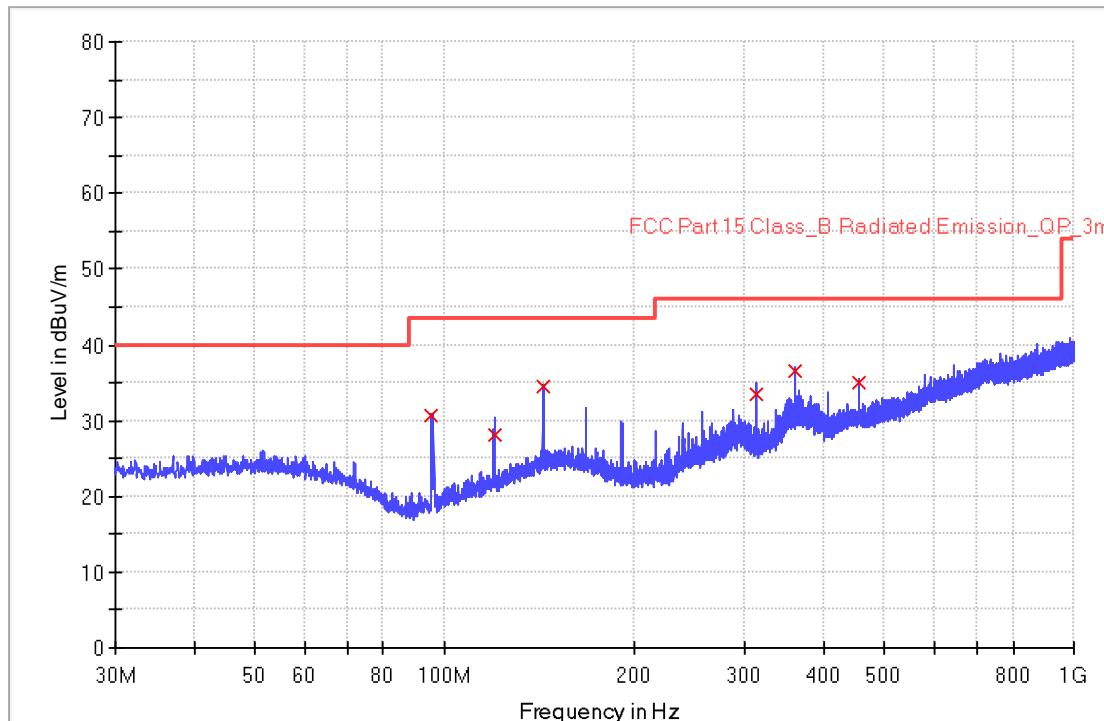

## Limit and Margin

| Frequency (MHz) | QuasiPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|-----|---------------|--------------|-------------------|----------------------|
| 95.440000       | 30.7               | 1000.0          | 120.000         | 200.0       | H   | 228.0         | 15.5         | 12.9              | 43.5                 |
| 119.960000      | 28.0               | 1000.0          | 120.000         | 230.0       | H   | 9.0           | 18.1         | 15.5              | 43.5                 |
| 143.840000      | 34.6               | 1000.0          | 120.000         | 212.0       | H   | 0.0           | 20.5         | 8.9               | 43.5                 |
| 311.960000      | 33.6               | 1000.0          | 120.000         | 134.0       | H   | 57.0          | 21.9         | 12.5              | 46.0                 |
| 360.000000      | 36.5               | 1000.0          | 120.000         | 121.0       | H   | 126.0         | 23.0         | 9.5               | 46.0                 |
| 455.960000      | 35.1               | 1000.0          | 120.000         | 150.0       | H   | 193.0         | 25.9         | 10.9              | 46.0                 |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## The worst case of Radiated Emission below 1GHz:

|   |   |
|---|---|
| Site: 3 meter chamber   | Time: 2022/3/08 - 12:51   |
| Limit: FCC_Part15.209_RE(3m) Class B  | Engineer: Yan YANG  |
| Probe: VULB9168   | Polarity: Vertical  |
| EUT: Tubular motor<br>Model no: CM-05   | Power:<br>5VDC (powered by notebook whose input is 120V~60Hz)<br>3.3VDC by debug board for BLE module |
| Note: Transmit by at channel 2402MHz.<br>Note: Pre-scan with three orthogonal axis and worst case as X axis |   |

RE\_VULB9168\_pre\_Cont\_30-1000

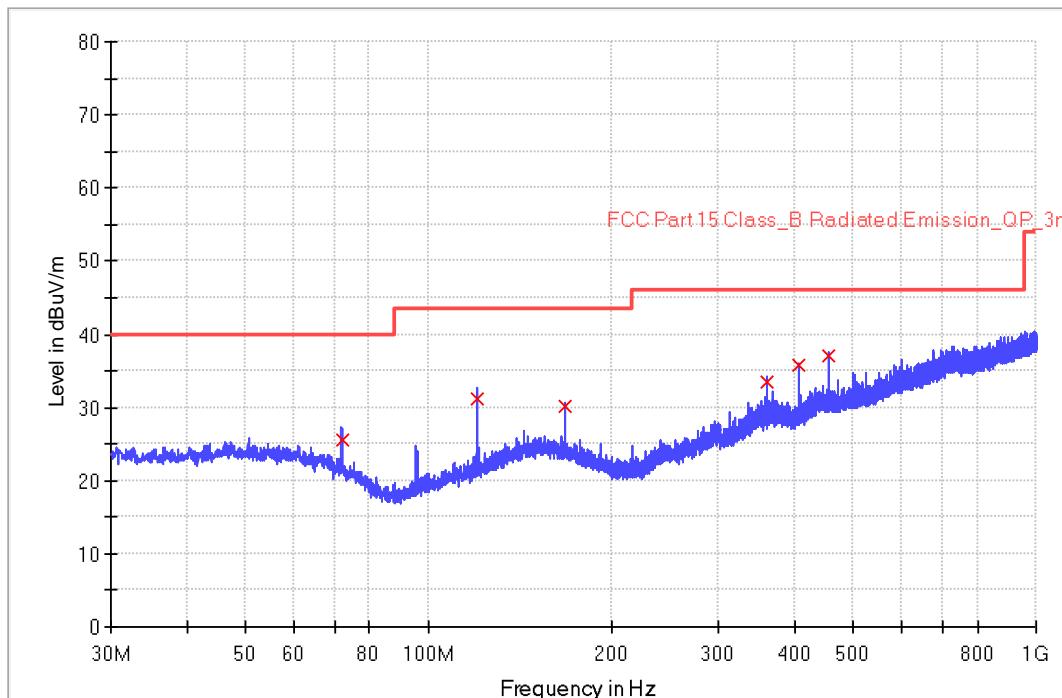

## Limit and Margin

| Frequency (MHz) | QuasiPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|-----|---------------|--------------|-------------------|----------------------|
| 71.960000       | 25.5               | 1000.0          | 120.000         | 110.0       | V   | 239.0         | 18.2         | 14.5              | 40.0                 |
| 119.960000      | 31.2               | 1000.0          | 120.000         | 105.0       | V   | 134.0         | 18.1         | 12.3              | 43.5                 |
| 168.000000      | 30.1               | 1000.0          | 120.000         | 134.0       | V   | 45.0          | 20.4         | 13.4              | 43.5                 |
| 360.000000      | 33.5               | 1000.0          | 120.000         | 105.0       | V   | 1.0           | 23.0         | 12.5              | 46.0                 |
| 408.000000      | 35.7               | 1000.0          | 120.000         | 106.0       | V   | 47.0          | 24.2         | 10.3              | 46.0                 |
| 455.960000      | 37.2               | 1000.0          | 120.000         | 100.0       | V   | 104.0         | 25.9         | 8.8               | 46.0                 |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 10 Test Equipment List

List of Test Instruments  
Test Site1

|    | DESCRIPTION   | MANUFACTURER    | MODEL NO. | SERIAL NO. | CAL. DATE | CAL. DUE DATE |
|----|---|-----------------|-----------|------------|-----------|---------------|
| C  | Signal and Spectrum Analyzer                                      | Rohde & Schwarz | FSV40     | 101091     | 2021-8-2  | 2022-8-1      |
| RE | EMI Test Receiver   | Rohde & Schwarz | ESR3      | 101906     | 2021-8-2  | 2022-8-1      |
|    | Signal Analyzer   | Rohde & Schwarz | FSV40     | 101091     | 2021-8-2  | 2022-8-1      |
|    | Trilog Super Broadband Test Antenna                               | Schwarzbeck     | VULB 9168 | 961        | 2021-9-23 | 2024-9-22     |
|    | Horn Antenna  | Rohde & Schwarz | HF907     | 102393     | 2021-3-15 | 2024-3-14     |
|    | Pre-amplifier   | Rohde & Schwarz | SCU-18D   | 19006451   | 2021-8-2  | 2022-8-1      |
|    | Loop antenna  | Rohde & Schwarz | HFH2-Z2   | 100443     | 2021-5-21 | 2022-5-20     |
|    | DOUBLE-RIDGED WAVEGUIDE HORN WITH PRE-AMPLIFIER (18 GHZ - 40 GHZ) | ETS-Lindgren    | 3116C-PA  | 002222727  | 2020-9-23 | 2023-9-22     |
| CE | 3m Semi-anechoic chamber  | TDK             | 9X6X6     | ----       | 2021-5-8  | 2024-5-7      |
|    | EMI Test Receiver   | Rohde & Schwarz | ESR3      | 101907     | 2021-8-2  | 2022-8-1      |
|    | LISN  | Rohde & Schwarz | ENV216    | 101924     | 2021-8-2  | 2022-8-1      |

| Measurement Software Information |                                |                             |             |
|----------------------------------|--------------------------------|-----------------------------|-------------|
| Test Item                        | Software                       | Manufacturer                | Version     |
| C                                | Bluetooth and WiFi Test System | Shenzhen JS tonsend co.,ltd | 2.6.77.0518 |
| RE                               | EMC 32                         | Rohde & Schwarz             | V10.50.40   |
| CE                               | EMC 32                         | Rohde & Schwarz             | V9.15.03    |

### C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density\*
- Spurious RF conducted emissions
- Band edge

## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

| Items                                   | Extended Uncertainty   |
|---|--|
| Radiated Disturbance                    | 30MHz to 1GHz, $\pm 5.03\text{dB}$ (Horizontal)<br>$\pm 5.12\text{dB}$ (Vertical)<br>1GHz to 18GHz, $\pm 5.49\text{dB}$<br>18GHz to 40GHz, $\pm 5.63\text{dB}$ |
| Carrier power conducted measurement     | 50MHz~18GHz, $\pm 1.238\text{dB}$  |
| Spurious Emission Conducted Measurement | 9kHz ~40GHz, $\pm 1.224\text{dB}$  |

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.

## 12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.

## 13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

---

THE END