

TEST REPORT

Report No.: 15080865HKG-001

Shenzhen Great Power Enterprise Co., Ltd

Application
For
Certification
(Original Grant)
(FCC ID: ZY9-1201682)

Transceiver

Prepared and Checked by:

Signed On File
Lok Chi Hang, Wil
Assistant Engineer

Approved by:

Wong Kwok Yeung, Kenneth
Lead Engineer
Date: October 29, 2015

- Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Grantee:	Shenzhen Great Power Enterprise Co., Ltd
Grantee Address:	Building E, Xin Xulong Industrial Area, Kukeng Village, Guanlan Town, Baoan District, Shenzhen, China.
Contact Person:	Daniel Liu
Tel:	0755-29832500-868
Fax:	0755-29832502
e-mail:	daniel@greatpower.cn
Manufacturer:	Shenzhen Great Power Enterprise Co., Ltd
Manufacturer Address:	Building E, Xin Xulong Industrial Area, Kukeng Village, Guanlan Town, Baoan District, Shenzhen, China.
Brand Name:	radioshack
Model:	1201682
Type of EUT:	Transceiver
Description of EUT:	Radio Alarm Clock with Bluetooth Speaker / Bluetooth Alarm Clock Radio
Serial Number:	N/A
FCC ID:	ZY9-1201682
Date of Sample Submitted:	August 18, 2015
Date of Test:	August 18, 2015 to September 09, 2015
Report No.:	15080865HKG-001
Report Date:	October 29, 2015
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

SUMMARY OF TEST RESULT

TEST SPECIFICATION	REFERENCE	RESULTS
Transmitter Power Line Conducted Emissions	15.207	Pass
Radiated Emission Radiated Emission on the Bandedge	15.249, 15.209	Pass
Radiated Emission in Restricted Bands	15.205	Pass

The equipment under test is found to be complying with the following standards:
FCC Part 15, October 1, 2014 Edition

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

INTERTEK TESTING SERVICES

Table of Contents

1.0	<u>General Description</u>	1
1.1	Product Description	1
1.2	Related Submittal(s) Grants	1
1.3	Test Methodology	1
1.4	Test Facility	1
2.0	<u>System Test Configuration</u>	2
2.1	Justification	2
2.2	EUT Exercising Software	2
2.3	Special Accessories	2
2.4	Measurement Uncertainty	2
2.5	Support Equipment List and Description	2
3.0	<u>Emission Results</u>	3
3.1	Field Strength Calculation	3
3.2	Radiated Emission Configuration Photograph	4
3.3	Radiated Emission Data	4
3.4	Conducted Emission Configuration Photograph	4
3.5	Conducted Emission Data	4
4.0	<u>Equipment Photographs</u>	13
5.0	<u>Product Labelling</u>	13
6.0	<u>Technical Specifications</u>	13
7.0	<u>Instruction Manual</u>	13
8.0	<u>Miscellaneous Information</u>	14
8.1	Radiated Emission on the Bandedge	14
8.2	Discussion of Pulse Desensitization	19
8.3	Calculation of Average Factor	19
8.4	Emissions Test Procedures	21
9.0	<u>Equipment List</u>	25

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a Radio Alarm Clock with 2.4GHz Bluetooth 4.0/3.0/2.0 Speaker. For Bluetooth 4.0, the EUT occupies a frequency range from 2402MHz to 2480MHz (40 channels with channel spacing of 2MHz) For Bluetooth 3.0/2.0 ,the EUT operates in a frequency range from 2402MHz to 2480MHz (79 channels with channel spacing of 1MHz). The EUT can pair with smart device through Bluetooth for playing music. Also, It is able to play FM Radio. The EUT is powered by AC/DC Adapter Input: 100-240V~300mA, Output: 5V and 2 X 1.5 VDC AAA backup batteries. The USB portal is for charging to other mobile devices.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by new 3 x 1.5V AAA batteries (backup power) and AC/DC Adaptor (Model: TPKB00500200-02, Input: 100-240V~300mA, Output: 5V)

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

All relevant operation modes have been tested, and the worst case data is included in this report.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

2.5 Support Equipment List and Description

1. Resistive Load (5-ohm) (Provided by Intertek)
2. USB Charging cable with length of 190cm (Provided by Intertek)

INTERTEK TESTING SERVICES

3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RR = $RA - AG - AV$ in $\text{dB}\mu\text{V}$

LF = $CF + AF$ in dB

Assume a receiver reading of 52.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ was converted to its corresponding level in $\mu\text{V}/\text{m}$.

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 50.763 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 15.6 dB

3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 451.500 kHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.


3.5 Conducted Emission Data

For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 15.45 dB

INTERTEK TESTING SERVICES

Worst-Case Operating Mode: powered by AC/DC Adaptor

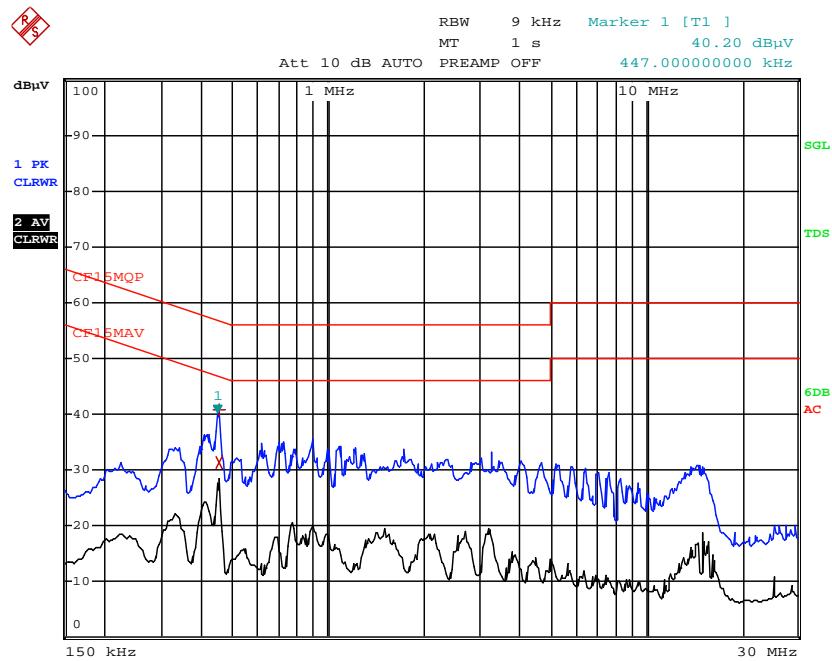

EDIT PEAK LIST (Final Measurement Results)			
Trace1:	CF15MQP		
Trace2:	CF15MAV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Quasi Peak	451.5 kHz	40.80 N	-16.04
2 CISPR Average	451.5 kHz	31.39 N	-15.45

Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Shenzhen Great Power Enterprise Co., Ltd Date of Test: September 09, 2015
 Model: 1201682
 Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

Table 1
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	97.1	33	29.4	93.5	41.1	52.4	94.0	-41.6
V	4804.000	51.6	33	34.9	53.5	41.1	12.4	54.0	-41.6
V	7206.000	50.9	33	37.9	55.8	41.1	14.7	54.0	-39.3
V	9608.000	47.9	33	40.4	55.3	41.1	14.2	54.0	-39.8
V	12010.000	49.0	33	40.5	56.5	41.1	15.4	54.0	-38.6
V	14412.000	50.0	33	40.0	57.0	41.1	15.9	54.0	-38.1

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	97.1	33	29.4	93.5	114.0	-20.5
V	4804.000	51.6	33	34.9	53.5	74.0	-20.5
V	7206.000	50.9	33	37.9	55.8	74.0	-18.2
V	9608.000	47.9	33	40.4	55.3	74.0	-18.7
V	12010.000	49.0	33	40.5	56.5	74.0	-17.5
V	14412.000	50.0	33	40.0	57.0	74.0	-17.0

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Shenzhen Great Power Enterprise Co., Ltd Date of Test: September 09, 2015
 Model: 1201682
 Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

Table 2
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2440.000	97.4	33	29.4	93.8	41.1	52.7	94.0	-41.3
V	4880.000	51.5	33	34.9	53.4	41.1	12.3	54.0	-41.7
V	7320.000	51.0	33	37.9	55.9	41.1	14.8	54.0	-39.2
V	9760.000	48.3	33	40.4	55.7	41.1	14.6	54.0	-39.4
V	12200.000	49.3	33	40.5	56.8	41.1	15.7	54.0	-38.3
V	14640.000	51.9	33	38.4	57.3	41.1	16.2	54.0	-37.8

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2440.000	97.4	33	29.4	93.8	114.0	-20.2
V	4880.000	51.5	33	34.9	53.4	74.0	-20.6
V	7320.000	51.0	33	37.9	55.9	74.0	-18.1
V	9760.000	48.3	33	40.4	55.7	74.0	-18.3
V	12200.000	49.3	33	40.5	56.8	74.0	-17.2
V	14640.000	51.9	33	38.4	57.3	74.0	-16.7

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Shenzhen Great Power Enterprise Co., Ltd Date of Test: September 09, 2015
 Model: 1201682
 Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

Table 3
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	2480.000	97.5	33	29.4	93.9	41.1	52.8	94.0	-41.2
V	4952.000	51.4	33	34.9	53.3	41.1	12.2	54.0	-41.8
V	7428.000	50.6	33	37.9	55.5	41.1	14.4	54.0	-39.6
V	9904.000	47.8	33	40.4	55.2	41.1	14.1	54.0	-39.9
V	12380.000	49.4	33	40.5	56.9	41.1	15.8	54.0	-38.2
V	14856.000	51.8	33	38.4	57.2	41.1	16.1	54.0	-37.9

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2480.000	97.5	33	29.4	93.9	114.0	-20.1
V	4952.000	51.4	33	34.9	53.3	74.0	-20.7
V	7428.000	50.6	33	37.9	55.5	74.0	-18.5
V	9904.000	47.8	33	40.4	55.2	74.0	-18.8
V	12380.000	49.4	33	40.5	56.9	74.0	-17.1
V	14856.000	51.8	33	38.4	57.2	74.0	-16.8

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Shenzhen Great Power Enterprise Co., Ltd Date of Test: September 09, 2015
 Model: 1201682
 Worst-Case Operating Mode: Transmitting (Bluetooth 3.0)

Table 4
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	96.6	33	29.4	93.0	24	69.0	94.0	-25.0
V	4804.000	51.5	33	34.9	53.4	24	29.4	54.0	-24.6
V	7206.000	50.5	33	37.9	55.4	24	31.4	54.0	-22.6
V	9608.000	47.6	33	40.4	55.0	24	31.0	54.0	-23.0
V	12010.000	48.7	33	40.5	56.2	24	32.2	54.0	-21.8
V	14412.000	50.1	33	40.0	57.1	24	33.1	54.0	-20.9

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2402.000	96.6	33	29.4	93.0	114.0	-21.0
V	4804.000	51.5	33	34.9	53.4	74.0	-20.6
V	7206.000	50.5	33	37.9	55.4	74.0	-18.6
V	9608.000	47.6	33	40.4	55.0	74.0	-19.0
V	12010.000	48.7	33	40.5	56.2	74.0	-17.8
V	14412.000	50.1	33	40.0	57.1	74.0	-16.9

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Shenzhen Great Power Enterprise Co., Ltd Date of Test: September 09, 2015
 Model: 1201682
 Worst-Case Operating Mode: Transmitting (Bluetooth 3.0)

Table 5
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2440.000	96.7	33	29.4	93.1	24	69.1	94.0	-24.9
V	4880.000	51.3	33	34.9	53.2	24	29.2	54.0	-24.8
V	7320.000	50.3	33	37.9	55.2	24	31.2	54.0	-22.8
V	9760.000	47.8	33	40.4	55.2	24	31.2	54.0	-22.8
V	12200.000	48.9	33	40.5	56.4	24	32.4	54.0	-21.6
V	14640.000	51.8	33	38.4	57.2	24	33.2	54.0	-20.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2440.000	96.7	33	29.4	93.1	114.0	-20.9
V	4880.000	51.3	33	34.9	53.2	74.0	-20.8
V	7320.000	50.3	33	37.9	55.2	74.0	-18.8
V	9760.000	47.8	33	40.4	55.2	74.0	-18.8
V	12200.000	48.9	33	40.5	56.4	74.0	-17.6
V	14640.000	51.8	33	38.4	57.2	74.0	-16.8

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Shenzhen Great Power Enterprise Co., Ltd Date of Test: September 09, 2015
 Model: 1201682
 Worst-Case Operating Mode: Transmitting (Bluetooth 3.0)

Table 6
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	2480.000	96.9	33	29.4	93.3	24	69.3	94.0	-24.7
V	4960.000	51.6	33	34.9	53.5	24	29.5	54.0	-24.5
V	7440.000	50.3	33	37.9	55.2	24	31.2	54.0	-22.8
V	9920.000	47.9	33	40.4	55.3	24	31.3	54.0	-22.7
V	12400.000	48.8	33	40.5	56.3	24	32.3	54.0	-21.7
V	14880.000	51.6	33	38.4	57.0	24	33.0	54.0	-21.0

Polari-zation	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	2480.000	96.9	33	29.4	93.3	114.0	-20.7
V	4960.000	51.6	33	34.9	53.5	74.0	-20.5
V	7440.000	50.3	33	37.9	55.2	74.0	-18.8
V	9920.000	47.9	33	40.4	55.3	74.0	-18.7
V	12400.000	48.8	33	40.5	56.3	74.0	-17.7
V	14880.000	51.6	33	38.4	57.0	74.0	-17.0

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Shenzhen Great Power Enterprise Co., Ltd Date of Test: September 09, 2015

Model: 1201682

Worst-Case Operating Mode: BT Sound Playing

Table 7
Radiated Emissions
Pursuant to FCC Part 15 Section 15.209 Requirement

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	32.634	29.8	16	10.0	23.8	40.0	-16.2
V	50.763	29.4	16	11.0	24.4	40.0	-15.6
V	111.346	23.4	16	14.0	21.4	43.5	-22.1
H	149.485	29.2	16	14.0	27.2	43.5	-16.3
H	165.770	23.4	16	17.0	24.4	43.5	-19.1
H	208.775	22.5	16	17.0	23.5	43.5	-20.0

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

4.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 Product Labelling

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 Technical Specifications

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

8.0 Miscellaneous Information

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).


8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

INTERTEK TESTING SERVICES

Peak Measurement (Bluetooth 4.0 BLE)

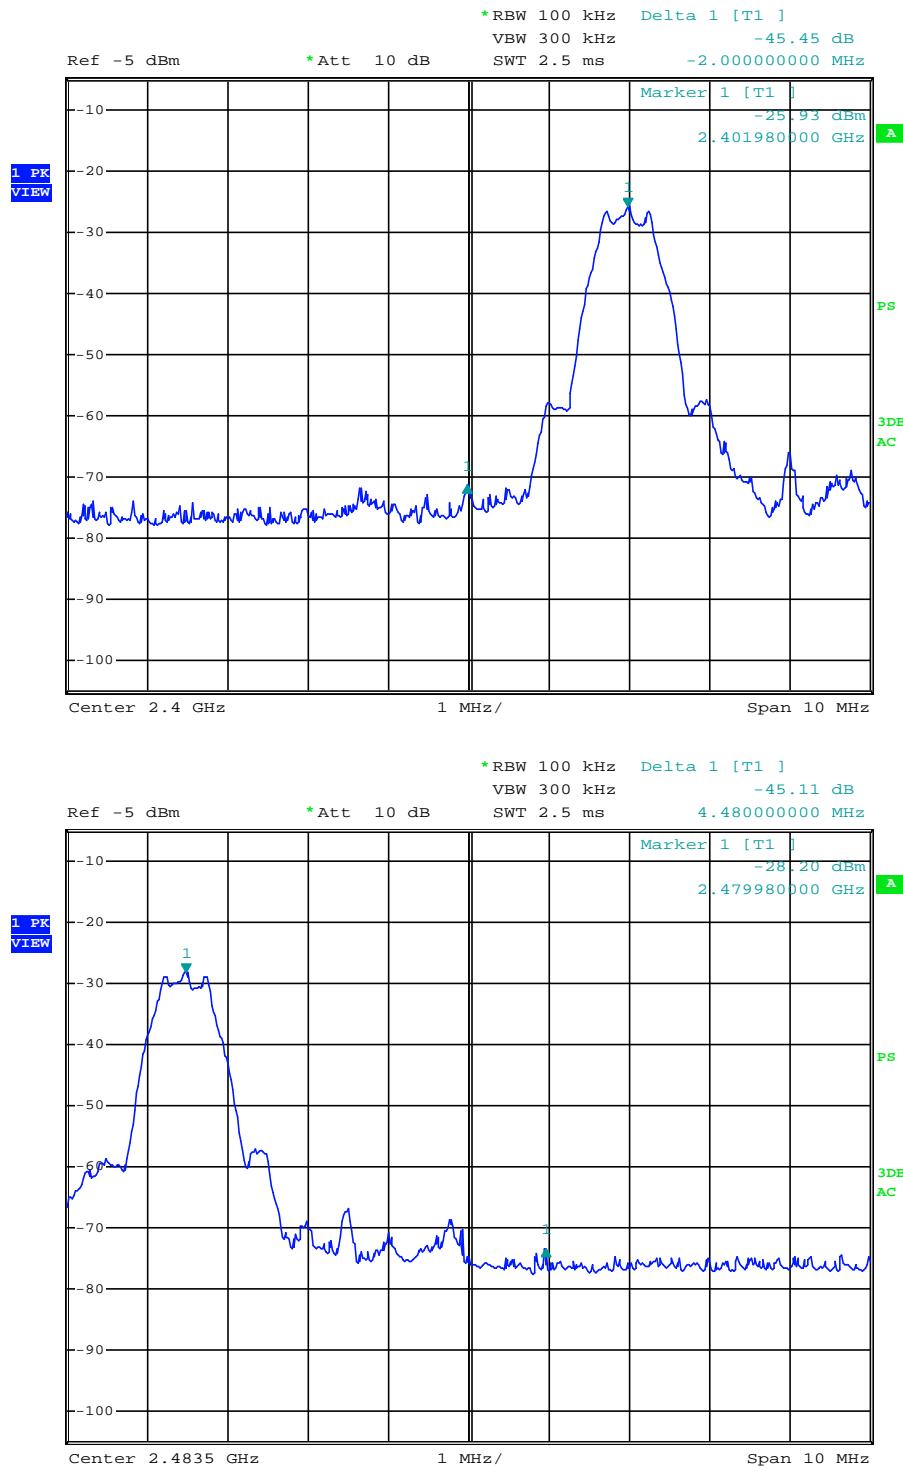

INTERTEK TESTING SERVICES

Peak Measurement (Bluetooth 4.0 BLE)

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=93.5 \text{ dB}\mu\text{V/m} - 45.5 \text{ dB}$$

$$=48.0 \text{ dB}\mu\text{V/m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$=52.4 \text{ dB}\mu\text{V/m} - 45.5 \text{ dB}$$

$$=6.9 \text{ dB}\mu\text{V/m}$$

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=93.9 \text{ dB}\mu\text{V/m} - 45.1 \text{ dB}$$

$$=48.8 \text{ dB}\mu\text{V/m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot


$$=52.8 \text{ dB}\mu\text{V/m} - 45.1 \text{ dB}$$

$$=7.7 \text{ dB}\mu\text{V/m}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

INTERTEK TESTING SERVICES

Peak Measurement (Bluetooth 3.0)

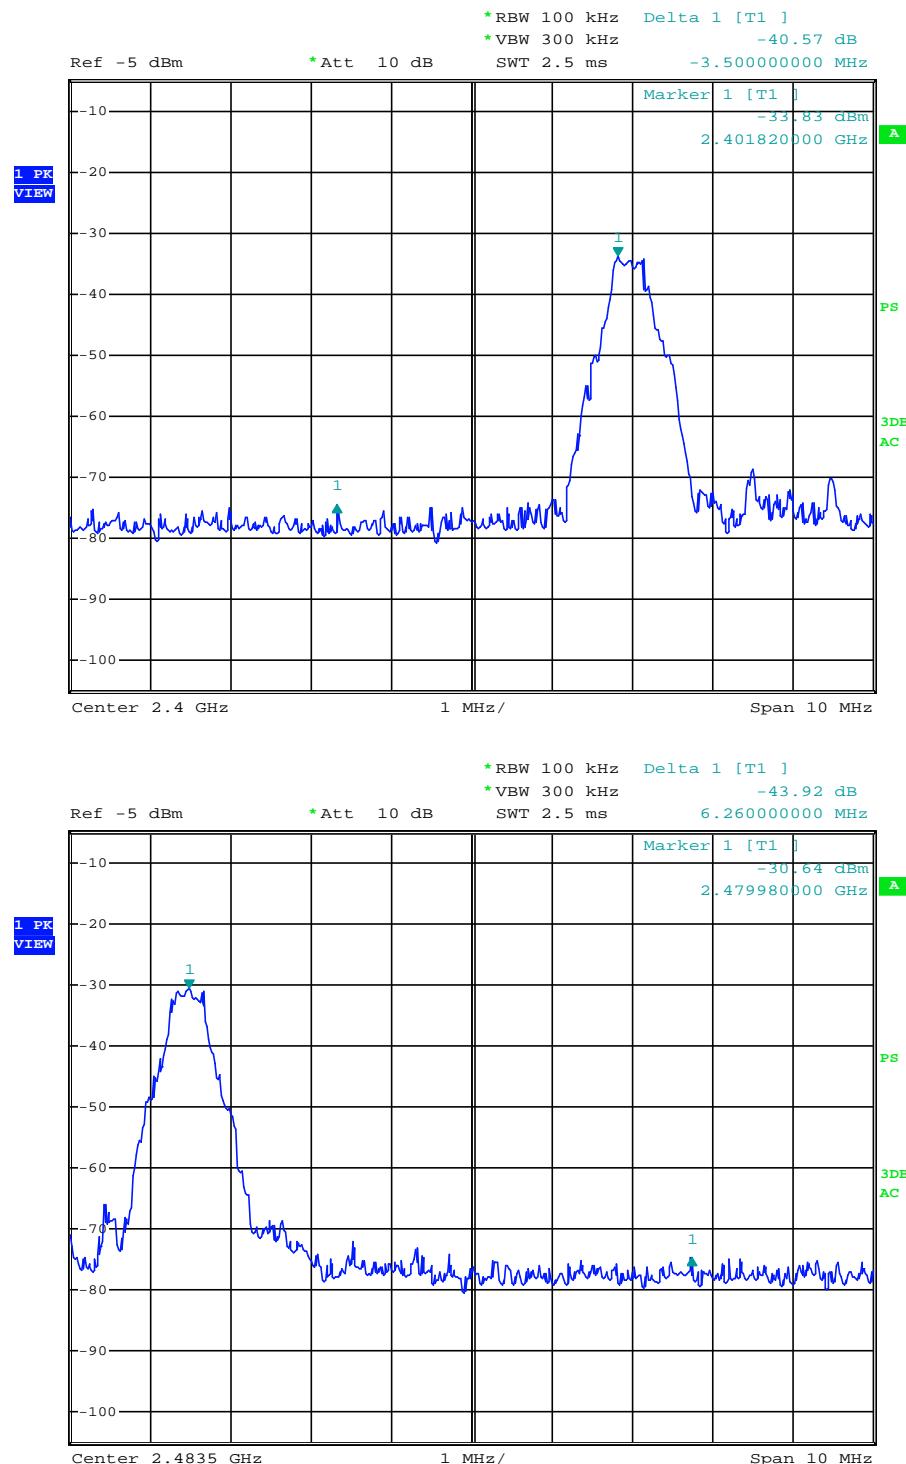

INTERTEK TESTING SERVICES

Peak Measurement (Bluetooth 3.0)

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 93.0 \text{ dB}\mu\text{V/m} - 40.6 \text{ dB} \\ &= 52.4 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 69.0 \text{ dB}\mu\text{V/m} - 40.6 \text{ dB} \\ &= 28.4 \text{ dB}\mu\text{V/m} \end{aligned}$$

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 93.3 \text{ dB}\mu\text{V/m} - 44.0 \text{ dB} \\ &= 49.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 69.3 \text{ dB}\mu\text{V/m} - 44.0 \text{ dB} \\ &= 25.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

INTERTEK TESTING SERVICES

8.2 Discussion of Pulse Desensitization

(Bluetooth 4.0 BLE)

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately $80\ \mu s$ for a digital "1" bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

(Bluetooth 4.0 BLE)

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 100ms

Effective period of the cycle = $11 \times 0.08 = 0.88\text{ms}$

DC = $0.88/100 = 0.0088$

Therefore, the averaging factor is found by $20\log 0.0088 = -41.1\text{dB}$.

(Bluetooth 3.0)

Based on the Bluetooth Specification Version 3.0 + EDR, the transmitter ON time for each timeslot of Bluetooth is $625\mu s$. DH5 has the maximum duty cycle, which consists of 5 continuous Tx slots and 1 Rx slot. Therefore one hopset take $(5+1) \times 625\mu s = 3.75\text{ms}$. For one period for a pseudo-random hopping through at least 20 RF channels in adaptive mode (worse case), it take: $20 \times 3.75\text{ms} = 75\text{ms}$.

The dwell time for DH5 is $5 \times 625\mu s = 3.125\text{ms}$.


For the worst case calculation, there are two transmissions might occur in 100ms. Therefore,

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in 100ms/100ms} \\ &= 3.125\text{ms} \times 2/100\text{ms} \\ &= 0.0625\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF) of Bluetooth in dB} &= 20 \log_{10} (0.0625) \\ &= -24\text{dB}\end{aligned}$$

INTERTEK TESTING SERVICES

Average Factor (Bluetooth 4.0 BLE)

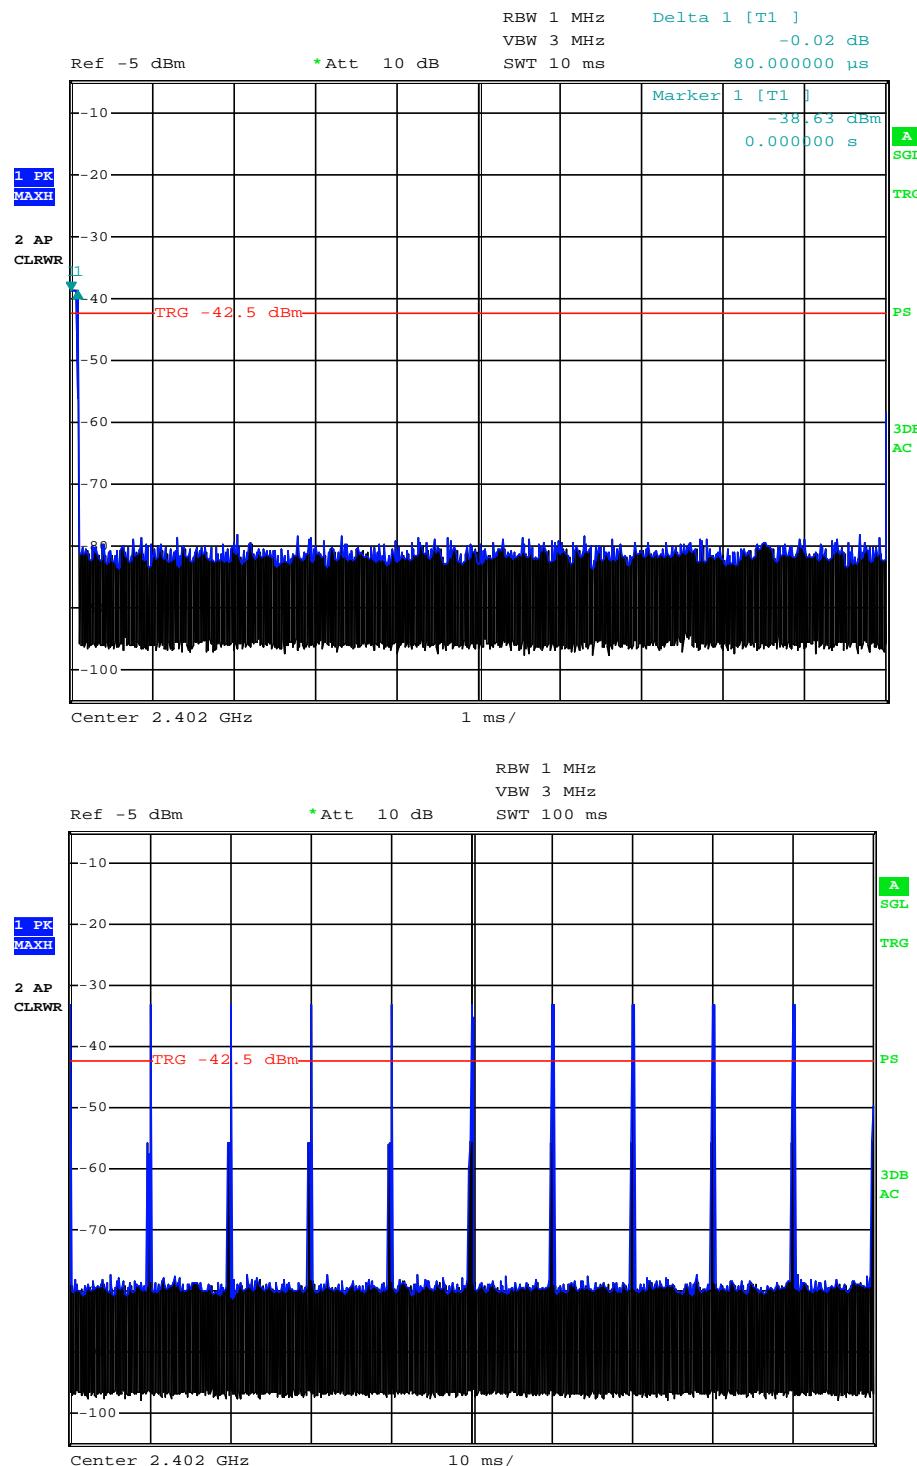

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


INTERTEK TESTING SERVICES

8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

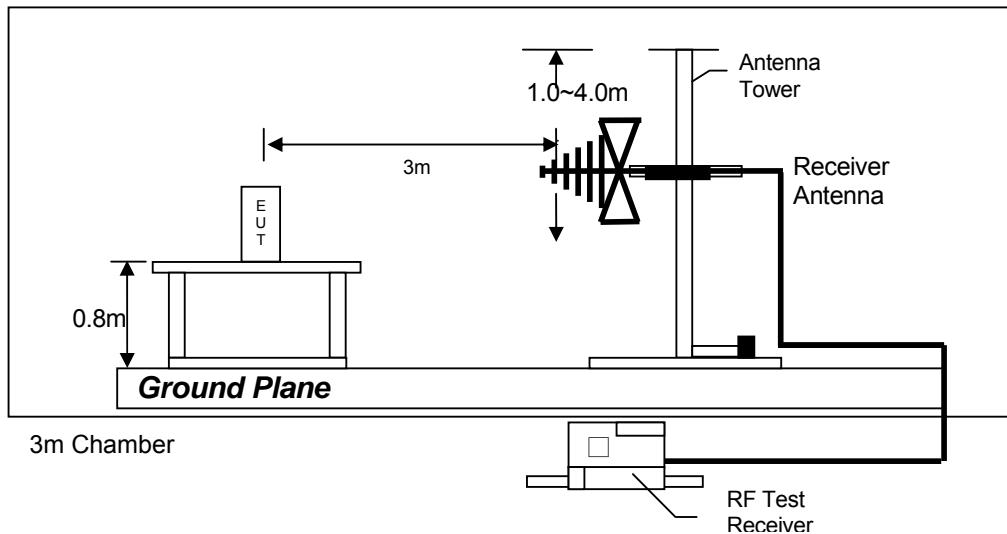

Test setup of radiated emissions up to 1GHz

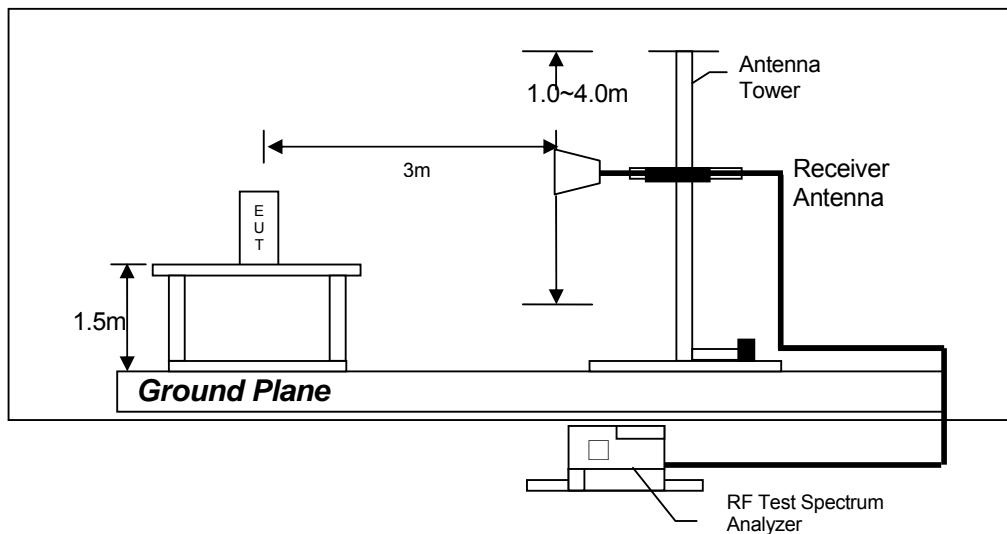

Test setup of radiated emissions above 1GHz


INTERTEK TESTING SERVICES

8.4.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4.3 Conducted Emission Test Setup

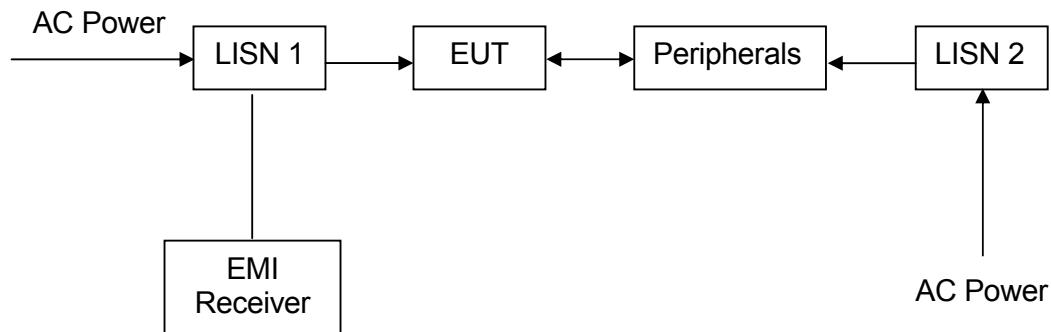

INTERTEK TESTING SERVICES

9.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer
Registration No.	EW-3095	EW-2253
Manufacturer	R&S	R&S
Model No.	ESCI	FSP40
Calibration Date	Oct. 16, 2014	May 27, 2015
Calibration Due Date	Oct. 16, 2015	May 27, 2016

Equipment	BiConiLog Antenna	Pyramidal Horn Antenna	Double Ridged Guide Antenna
Registration No.	EW-3061	EW-0905	EW-1133
Manufacturer	EMCO	EMCO	EMCO
Model No.	3412E	3160-09	3115
Calibration Date	Jul. 22, 2015	Jun. 05, 2014	Apr. 30, 2014
Calibration Due Date	Jul. 22, 2016	Dec. 05, 2015	Oct. 30, 2015

2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-2251	EW-2501
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Dec. 04, 2014	Jan. 15, 2015
Calibration Due Date	Dec. 04, 2015	Jan. 15, 2016

3) Bandedge & Average Factor Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2329
Manufacturer	R&S
Model No.	FSP3
Calibration Date	Jun. 17, 2015
Calibration Due Date	Jun. 17, 2016

END OF TEST REPORT