

RADIO TEST REPORT

FOR

Solar Loyal Limited

PS3 Basic Bluetooth Controller

Model No.: SL-2104

Prepared for
Address

: Solar Loyal Limited
: 21/F., NEW WORLD TOWER 1, 18QUEEN's ROAD CENTRAL,
HK

Prepared by
Address

: Shenzhen LCS Compliance Testing Laboratory Ltd.
: 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an
District, Shenzhen, Guangdong, China

Date of receipt of test sample : September 11, 2012
Number of tested samples : 1
Serial number : Prototype
Date of Test : September 11, 2012 – October 10, 2012
Date of Report : October 10, 2012

TEST REPORT
FCC CFR 47 PART 15 C(15.247)

Report Reference No. : **LCS120911052TF**

Date of Issue : October 10, 2012

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd.,
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name : **Solar Loyal Limited**

Address : 21/F., NEW WORLD TOWER 1, 18QUEEN's ROAD
CENTRAL, HK

Test Specification

Standard : FCC CFR 47 PART 15 Subpart C, ANSI C63.4-2003

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : **PS3 Basic Bluetooth Controller**

Trade Mark : Solar


Model/ Type reference : SL-2104

Ratings : DC 3.7V (Li-ion Battery)

DC 5V From USB Via PS3 Input AC 120/60Hz

Result : **Positive**

Compiled by:



Ada Liang/ File administrators

Supervised by:



Vito Cao/ Technique principal

Approved by:



Gavin Liang/ Manager

RADIO -- TEST REPORT

Test Report No. : LCS120911052TF	<u>October 10, 2012</u> Date of issue
---	--

Type / Model..... : SL-2104

EUT..... : PS3 Basic Bluetooth Controller

Applicant..... : Solar Loyal Limited

Address..... : 21/F., NEW WORLD TOWER 1, 18QUEEN's ROAD
CENTRAL, HK

Telephone..... : /

Fax..... : /

Manufacturer..... : Dongguan Kingsheng Electronics&Tech Co., Ltd

Address..... : Building 39, Arising Sun Industrial City, Lincun Village, Tang
Xia Town, Dongguan City, China

Telephone..... : /

Fax..... : /

Factory..... : Dongguan Kingsheng Electronics&Tech Co., Ltd

Address..... : Building 39, Arising Sun Industrial City, Lincun Village, Tang
Xia Town, Dongguan City, China

Telephone..... : /

Fax..... : /

Test Result:	Positive
---------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1 Description of Device (EUT).....	5
1.2 Host System Configuration List and Details	5
1.3 External I/O Cable	5
1.4 Description of Test Facility	5
1.5 Statement of The Measurement Uncertainty	6
1.6 Measurement Uncertainty.....	6
1.7 Description Of Test Modes.....	6
2. TEST METHODOLOGY	7
2.1 EUT Configuration	7
2.2 EUT Exercise	7
2.3 General Test Procedures	7
3. SYSTEM TEST CONFIGURATION.....	8
3.1 Justification.....	8
3.2 EUT Exercise Software	8
3.3 Special Accessories.....	8
3.4 Block Diagram/Schematics.....	8
3.5 Equipment Modifications	8
3.6 Block Diagram of Test Setup.....	8
4. FCC PART 15.247 REQUIREMENTS	9
4.1 Peak Power	9
4.2 Band Edges Measurement	10
4.3 Frequency Separation	17
4.4 Number Of Hopping Frequency	21
4.5 Time Of Occupancy (Dwell Time).....	24
4.6 Spurious Emissions.....	27
5. RADIATED EMISSION MEASUREMENT	31
5.1 Test Equipment.....	31
5.2 Block Diagram of Test Setup.....	31
5.3 Radiated Emission Limit	32
5.4 Test Results.....	32
6. POWER LINE CONDUCTED EMISSIONS.....	35
6.1 Standard Applicable.....	35
6.2 Block Diagram of Test Setup.....	35
6.3 Test Results.....	35
7. ANTENNA REQUIREMENT	37
7.1 Standard Applicable.....	37
8. MANUFACTURER/ APPROVAL HOLDER DECLARATION	38

1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : PS3 Basic Bluetooth Controller
 Model Number : SL-2104
 Power Supply : DC 3.7V (Li-ion Battery)
 DC 5V From USB Via PS3 Input AC 120/60Hz
 Frequency Range : 2402.00-2480.00MHz (Channel Frequency=2402+1(K-1),
 K=1, 2, 379)
 Modulation Technology : GFSK(1Mbps)
 π /4-DQPSK(2Mbps)
 8-DPSK(3Mbps)
 Module Channel : 79
 Channel Spacing : 1MHz
 Bluetooth Version : Bluetooth 2.1 Version with EDR
 Antenna Gain : 1.0dBi (Isotropic)

1.2 Host System Configuration List and Details

Manufacturer	Description	Model	S/N	Certificate
Sony	PS3	Slim	01	DoC
TCL	Monitor	L19P21	TTP0003923	DoC

1.3 External I/O Cable

Cable Description	Length (M)	From/Port	To
Reticle	1.0	EUT	N/A

1.4 Description of Test Facility

Site Description
 EMC Lab. : Accredited by CNAS, June 04, 2010
 The Certificate Registration Number. is L4595.
 Accredited by FCC, July 14, 2011
 The Certificate Registration Number. is 899208.
 Accredited by Industry Canada, May. 02, 2011
 The Certificate Registration Number. is 9642A-1

1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	30MHz~200MHz	± 2.96dB	(1)
	200MHz~1000MHz	± 3.10dB	(1)
	1GHz~26.5GHz	± 3.80dB	(1)
Conduction Uncertainty	150kHz~30MHz	± 1.63dB	(1)
Power disturbance	30MHz~300MHz	± 1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With the introduction of the enhanced data rate (EDR) feature, the data rates can be up to 3 Mb/s. An increase in the peak data rate beyond the basic rate of 1 Mb/s is achieved by modulating the RF carrier using GFSK techniques, resulting in an increase of two to three times the number of bits per symbol. The 2 Mb/s EDR packets use a Pi/4-DQPSK modulation and the 3 Mb/s EDR packets use 8DPSK modulation. The following operating modes were applied for the related test items.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
GFSK	2402	1
	2441	1
	2480	1
$\pi/4$ DQPSK	2402	2
	2441	2
	2480	2
8 DPSK	2402	3
	2441	3
	2480	3
For Conducted Emission		
Test Mode	TX Mode	
For Radiated Emission		
Test Mode	TX Mode	

Note: All the test modes were tested, and only the result of the worst case was recorded in the report.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4

3. SYSTEM TEST CONFIGURATION

3.1 Justification

N/A.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

N/A.


3.4 Block Diagram/Schematics

Please refer to the report.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Block Diagram of Test Setup

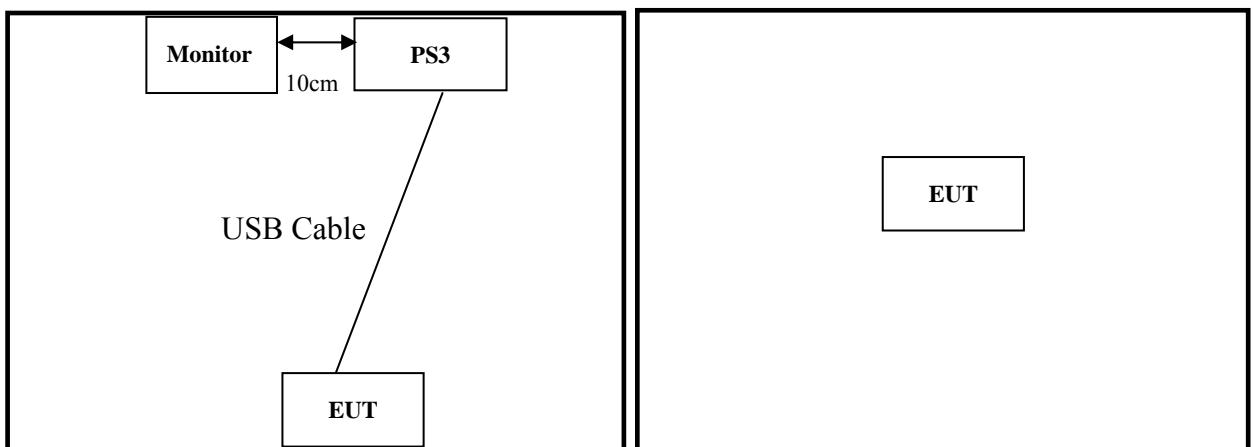

a. Conducted emission

b. Radiated emission


4. FCC PART 15.247 REQUIREMENTS

4.1 Peak Power

4.1.1 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Sensor	Agilent	E9327A	US40441788	2012-06-18
2	Power Meter	Agilent	E4416A	QB41292714	2012-06-18
3	DC Filter	MPE	23872C	N/A	2012-06-18

4.1.2 Block Diagram of Test Setup

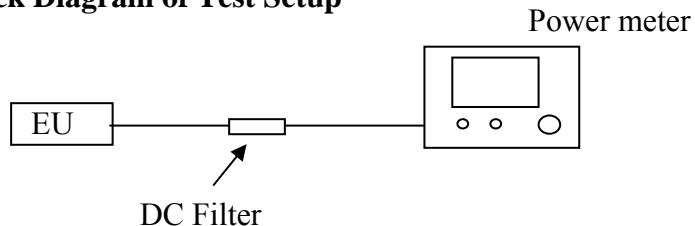

4.1.3 Limit

According to § 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

4.1.4 Test Procedure

The transmitter output is connected to the Power Meter.

4.1.5 Test Results

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Result
GFSK	2402	0.90	1.23	125	Pass
	2441	1.17	1.31	125	Pass
	2480	0.68	1.17	125	Pass
$\pi/4$ DQPSK	2402	-0.76	0.84	125	Pass
	2441	-0.60	0.87	125	Pass
	2480	-0.86	0.82	125	Pass
8DPSK	2402	-0.41	0.91	125	Pass
	2441	-0.36	0.92	125	Pass
	2480	-0.46	0.90	125	Pass

4.2 Band Edges Measurement


4.2.1 Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

4.2.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18
2	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2012-06-18
3	DC Filter	MPE	23872C	N/A	2012-06-18

4.2.3 Block Diagram of Test Setup

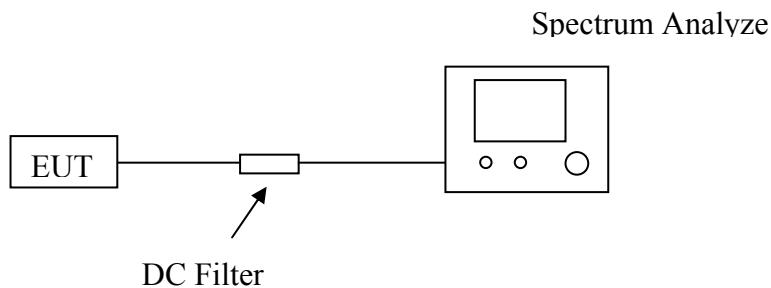


4.2.4 Test Procedure


- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = Lower and Upper channel.
- D. Set the Spectrum Analyzer as RBW = 100kHz, VBW = 300kHz, Span = 10MHz, Sweep = auto.
- E. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

4.2.5 Test Results


Lower Band-edge – Hopping off (GFSK)

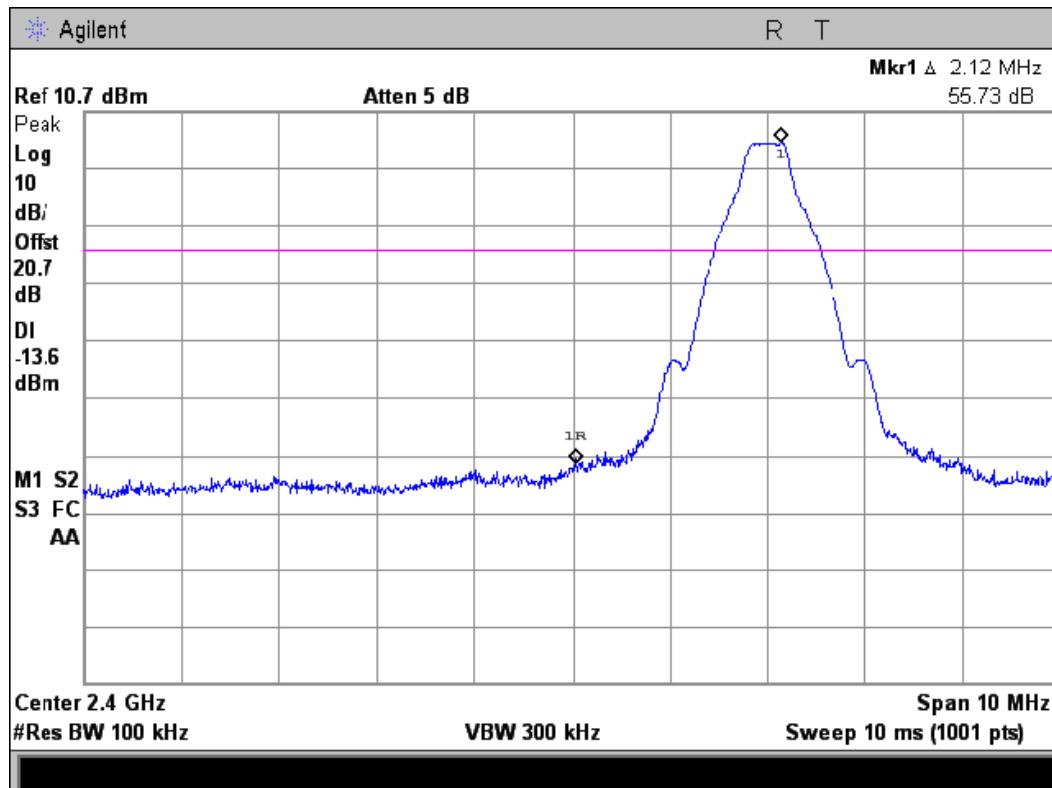


Upper Band-edge – Hopping off (GFSK)


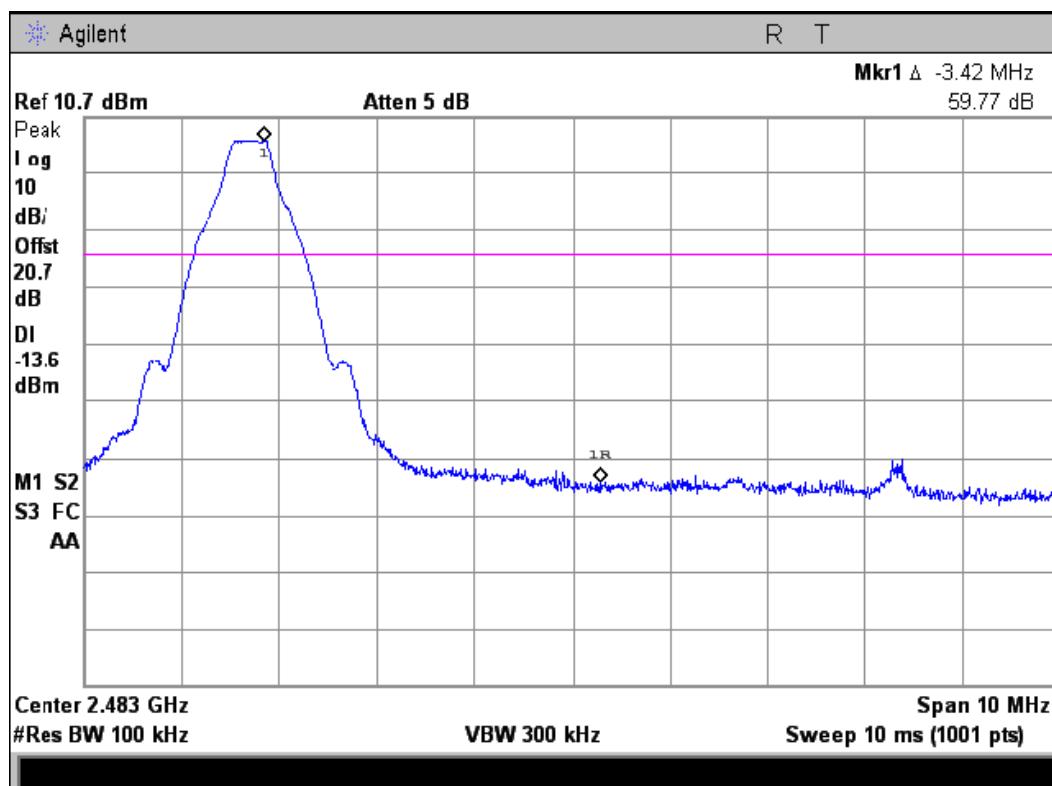




Lower Band-edge – Hopping on (GFSK)

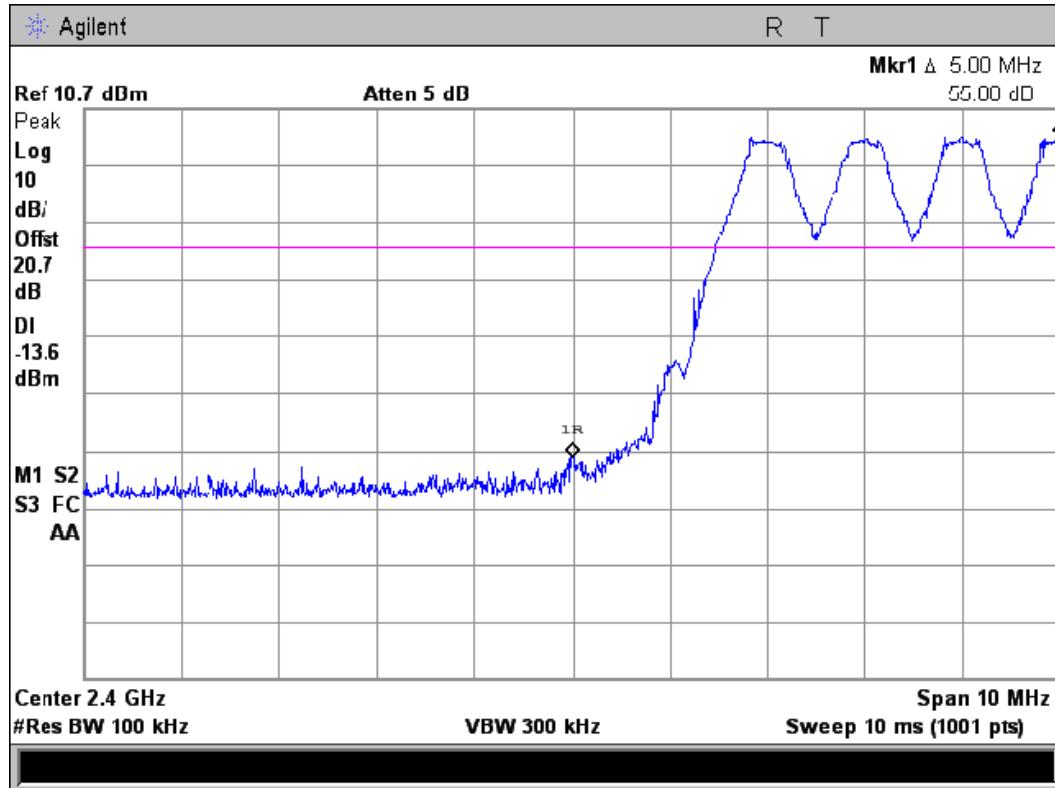


Upper Band-edge – Hopping on (GFSK)

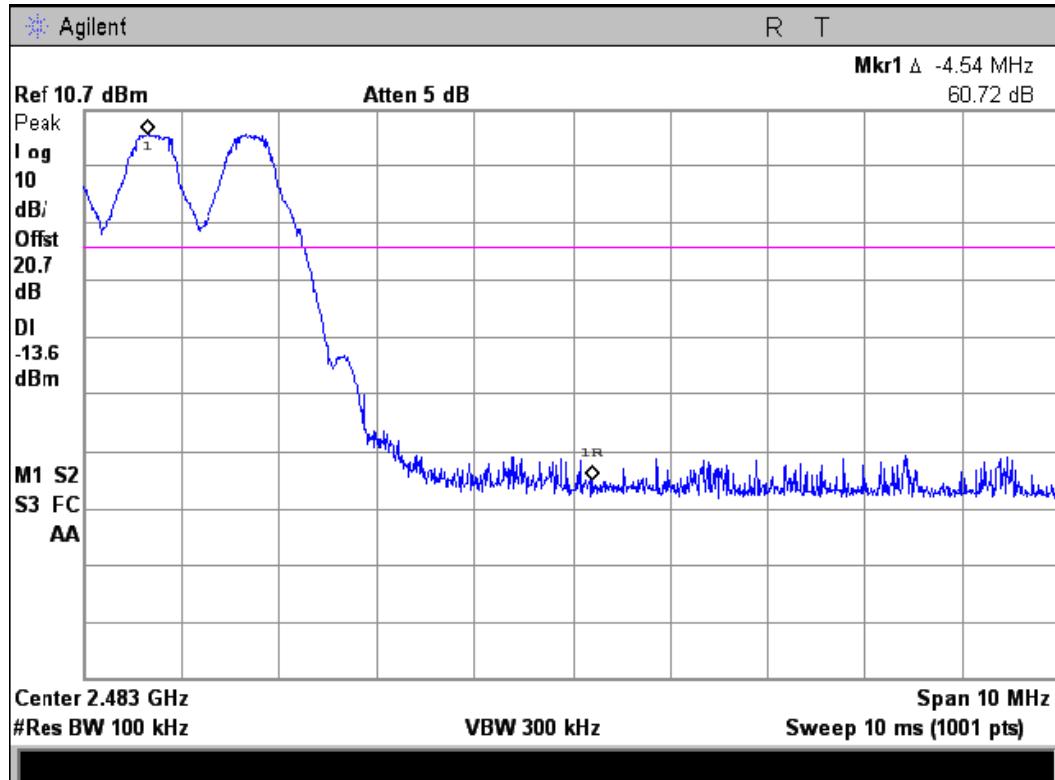

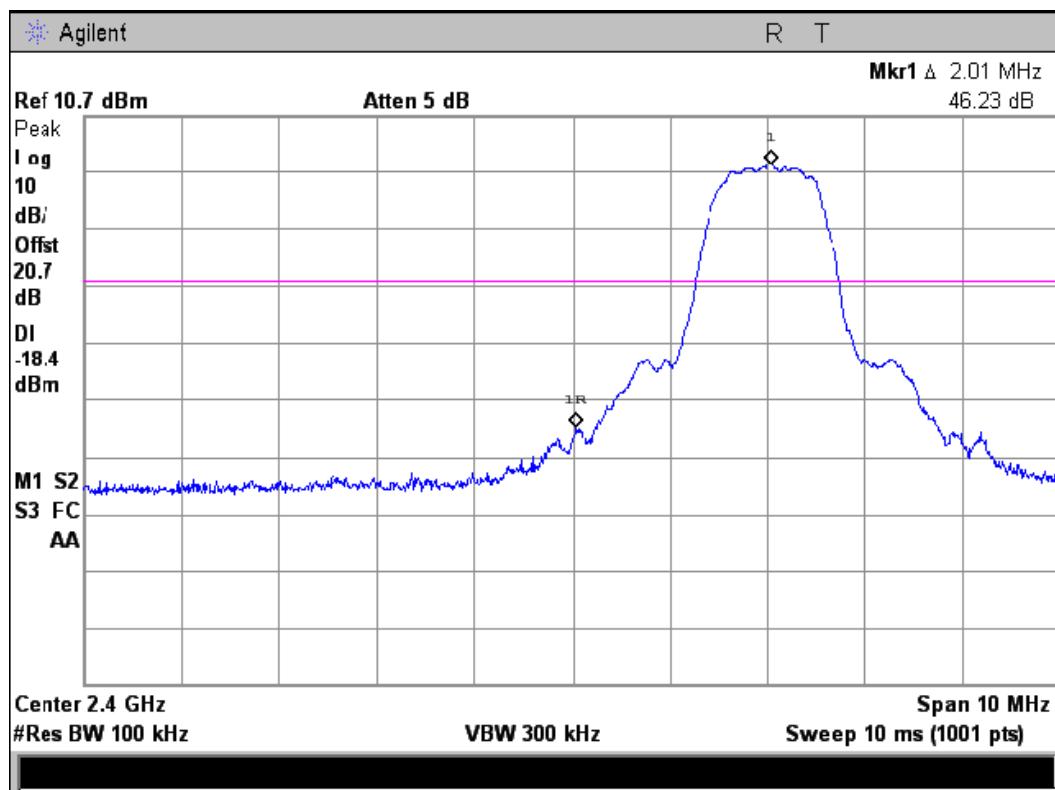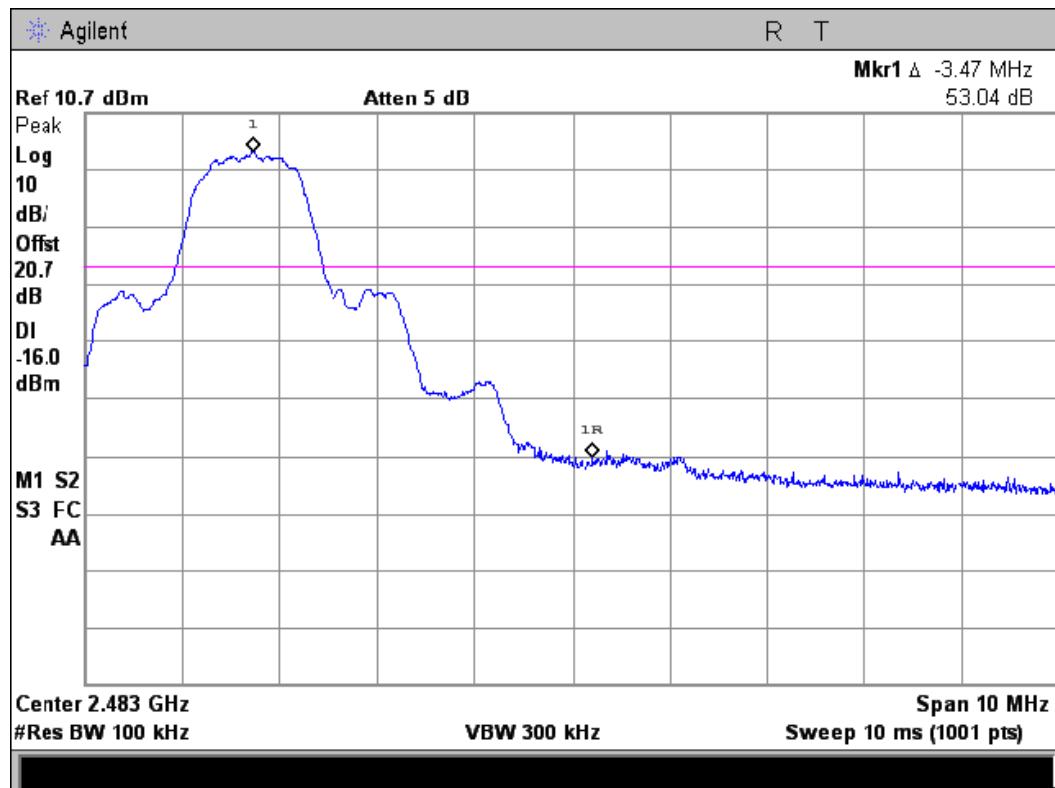
Lower Band-edge – Hopping off ($\pi/4$ DQPSK)Upper Band-edge – Hopping off ($\pi/4$ DQPSK)

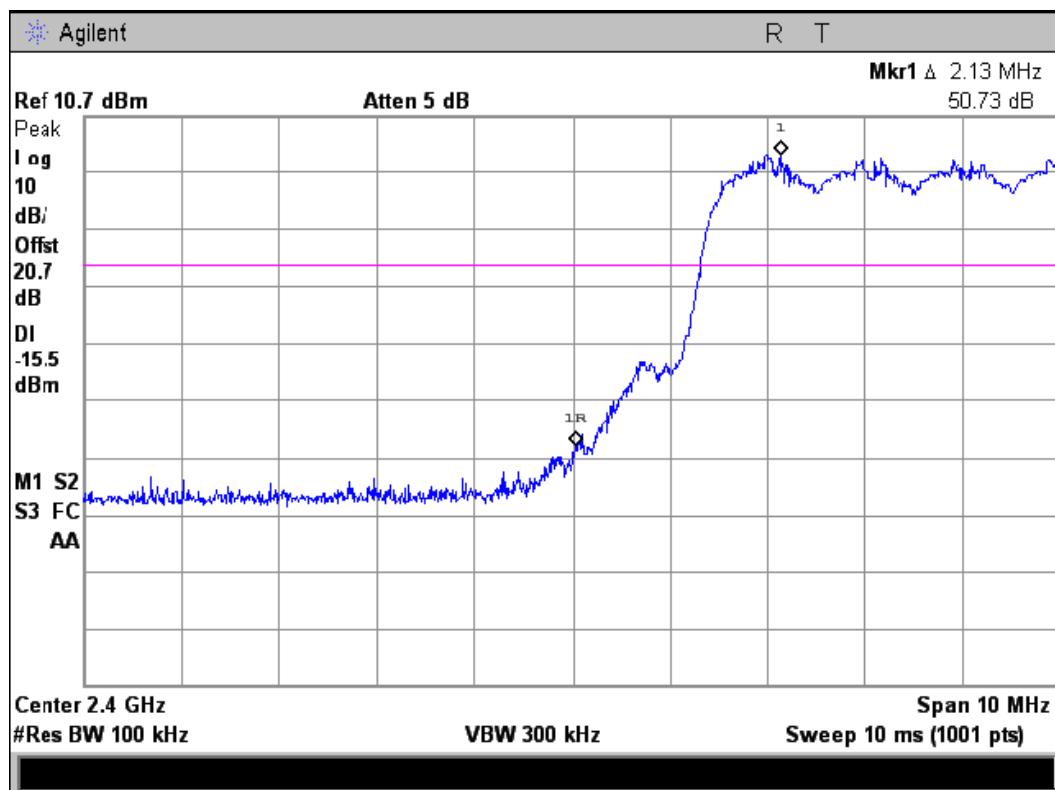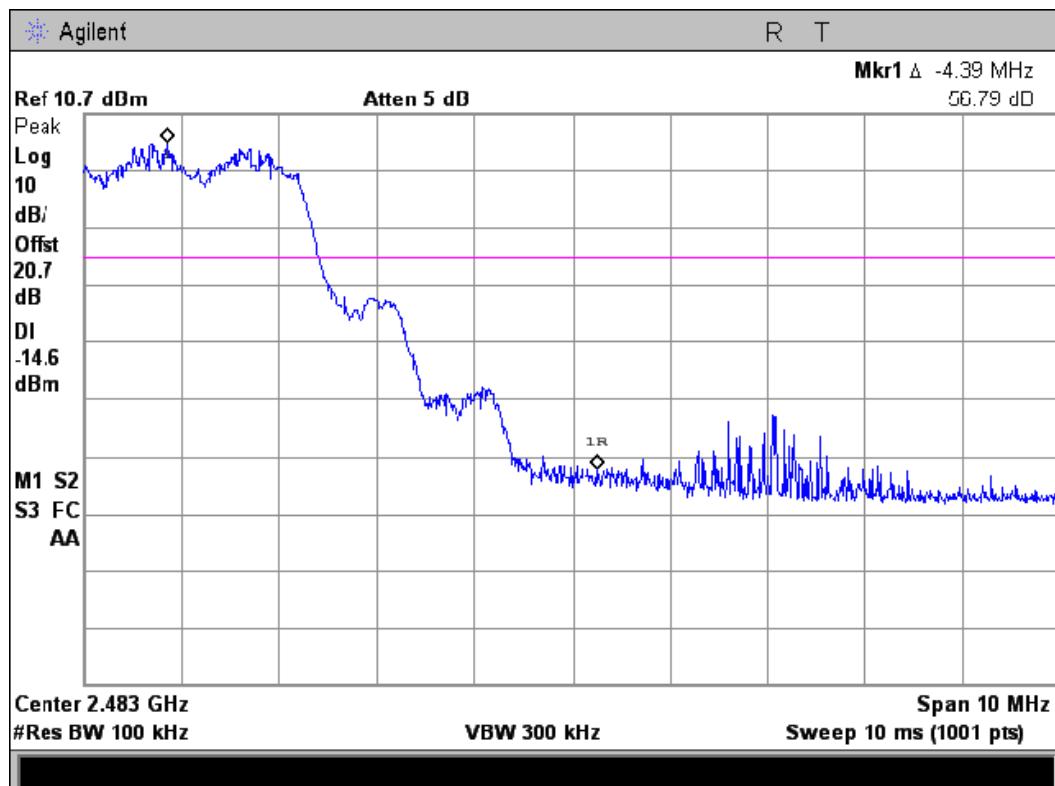Lower Band-edge – Hopping on ($\pi/4$ DQPSK)Upper Band-edge – Hopping on ($\pi/4$ DQPSK)


Lower Band-edge – Hopping off (8DPSK)

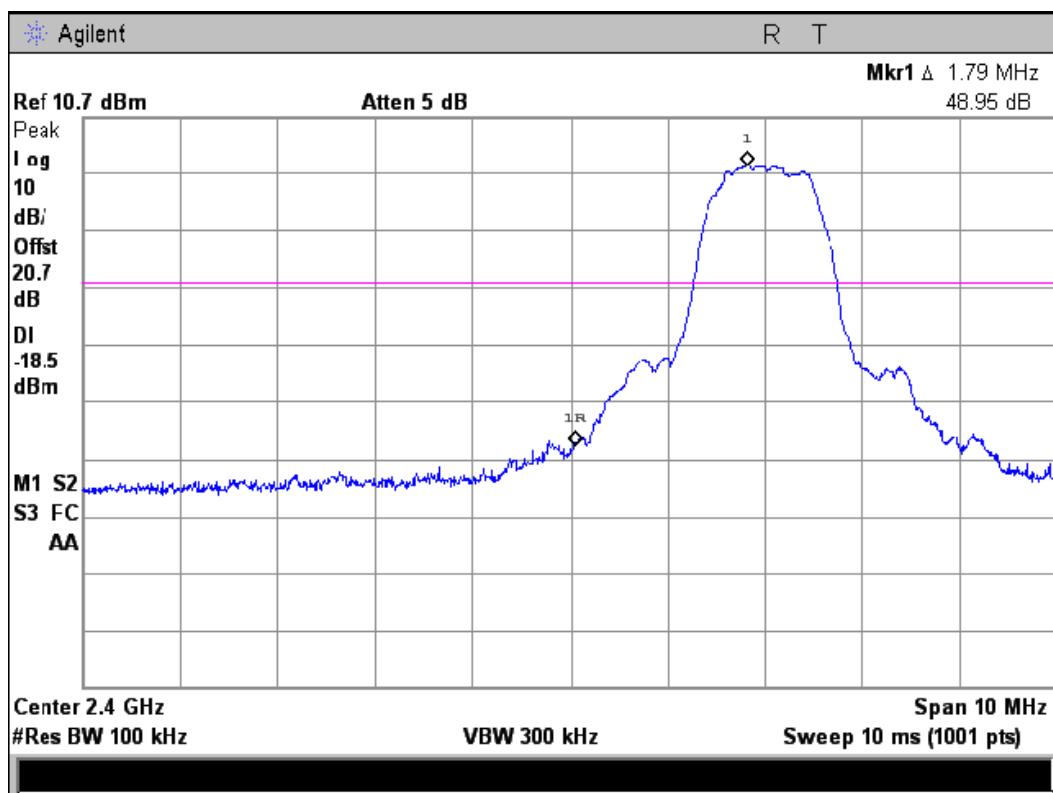


Upper Band-edge – Hopping off (8DPSK)

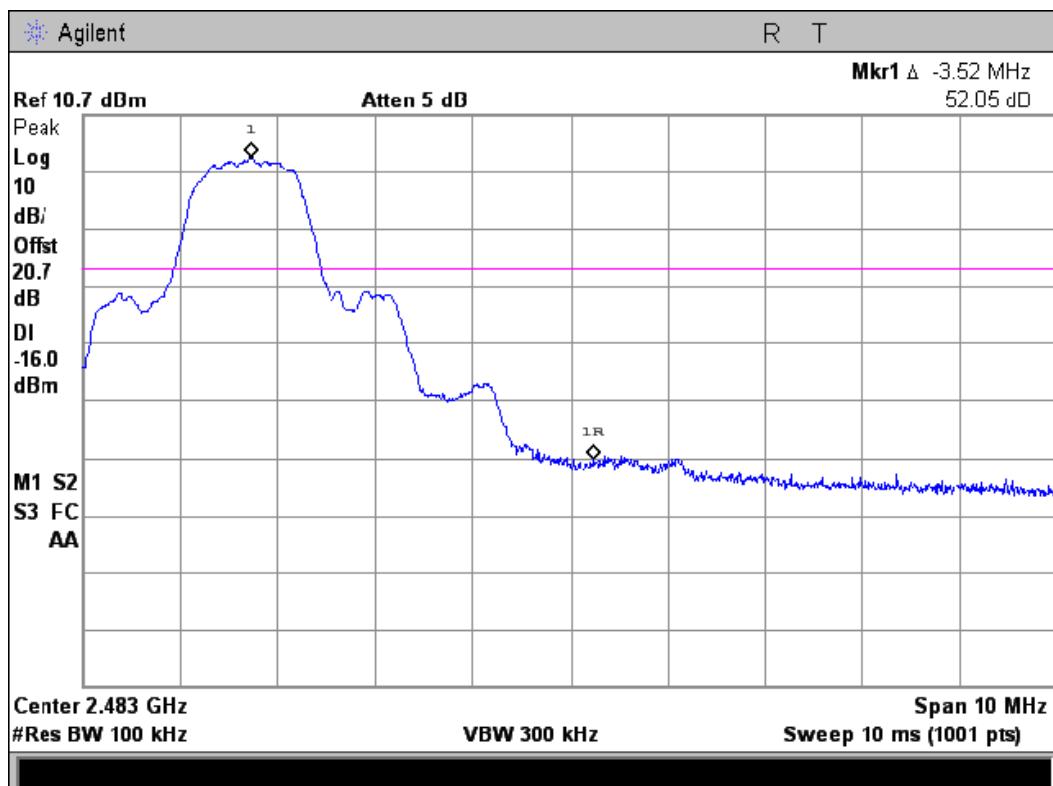

Lower Band-edge – Hopping on (8DPSK)

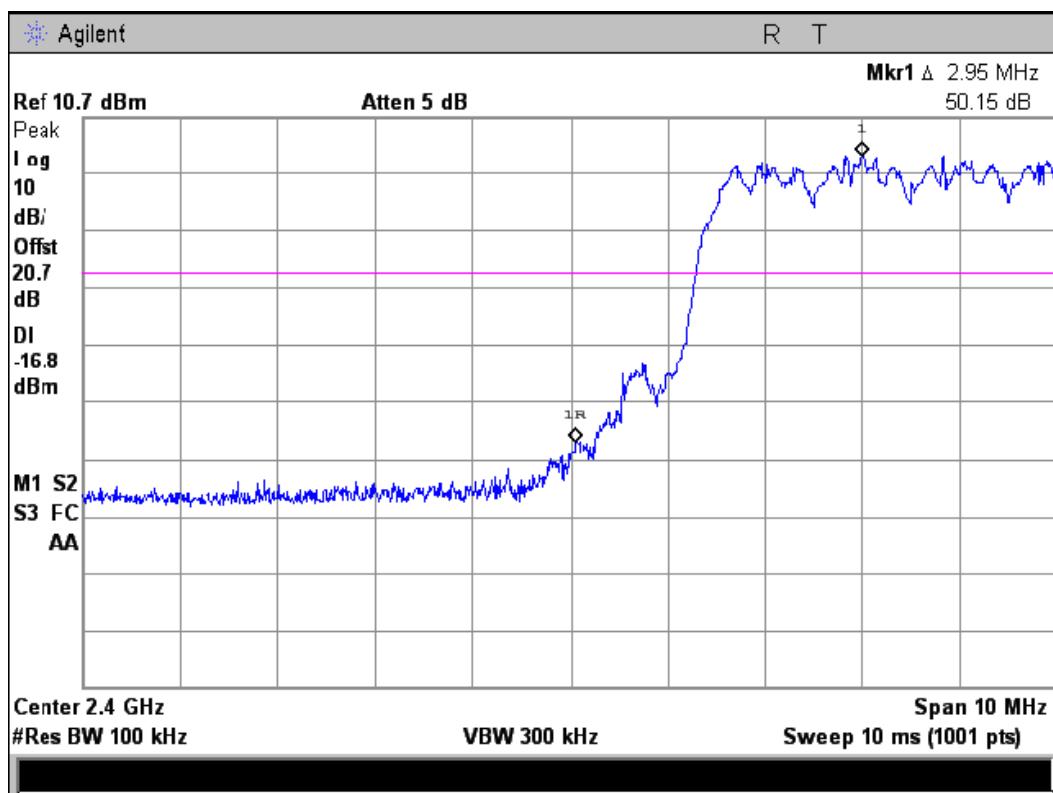

Upper Band-edge – Hopping on (8DPSK)

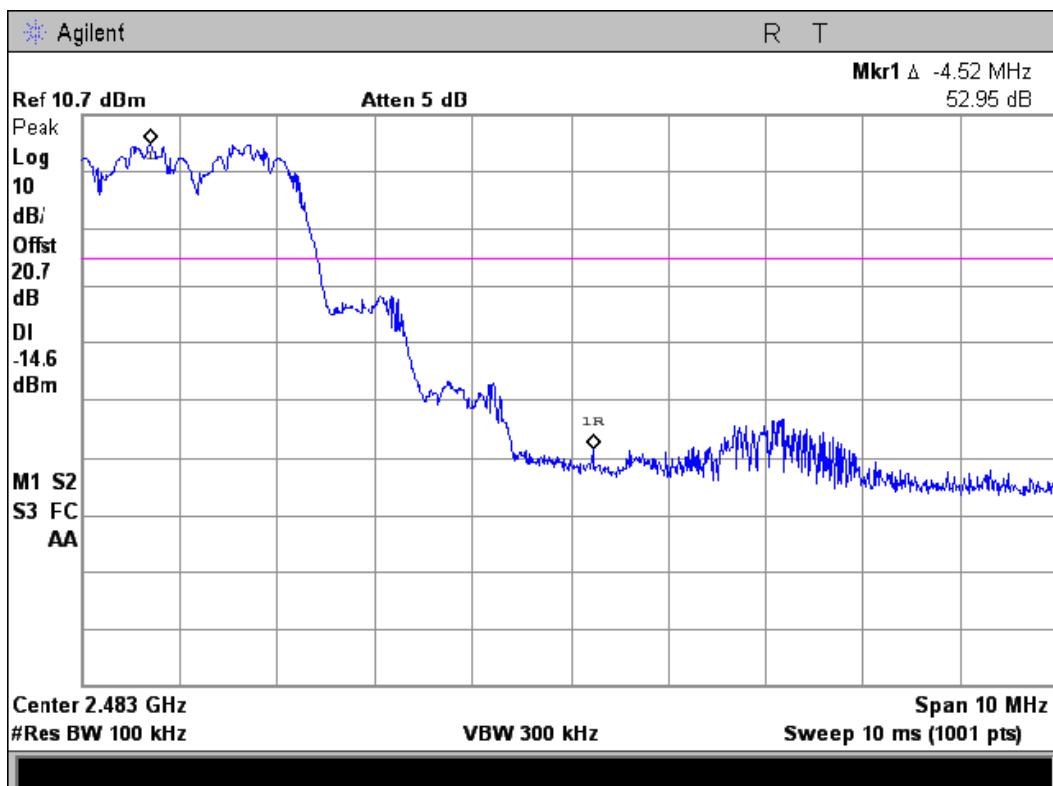

4.3 Frequency Separation


4.3.1 Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.3.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18
2	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2012-06-18
3	DC Filter	MPE	23872C	N/A	2012-06-18

4.3.3 Block Diagram of Test Setup

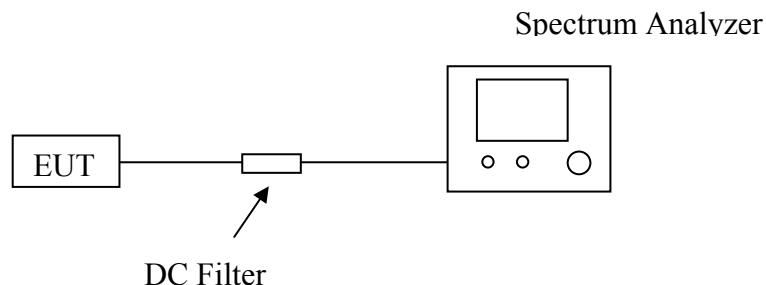

4.3.4 Test Procedure

- F. Place the EUT on the table and set it in transmitting mode.
- G. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- H. Set center frequency of Spectrum Analyzer = middle of hopping channel.
- I. Set the Spectrum Analyzer as RBW = 100kHz, VBW = 300kHz, Span = 3MHz, Sweep = auto.
- J. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

4.3.5 Test Results


The Measurement Result With The Worst Case of 3Mbps For 8DQPSK Modulation

Channel	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Result
Low	1.000	1.340	>0.893	Pass
Middle	1.000	1.253	>0.835	Pass

High	1.000	1.261	>0.841	Pass
------	-------	-------	--------	------


The test data graph please refer to the following page.

Carrier Frequency Separation

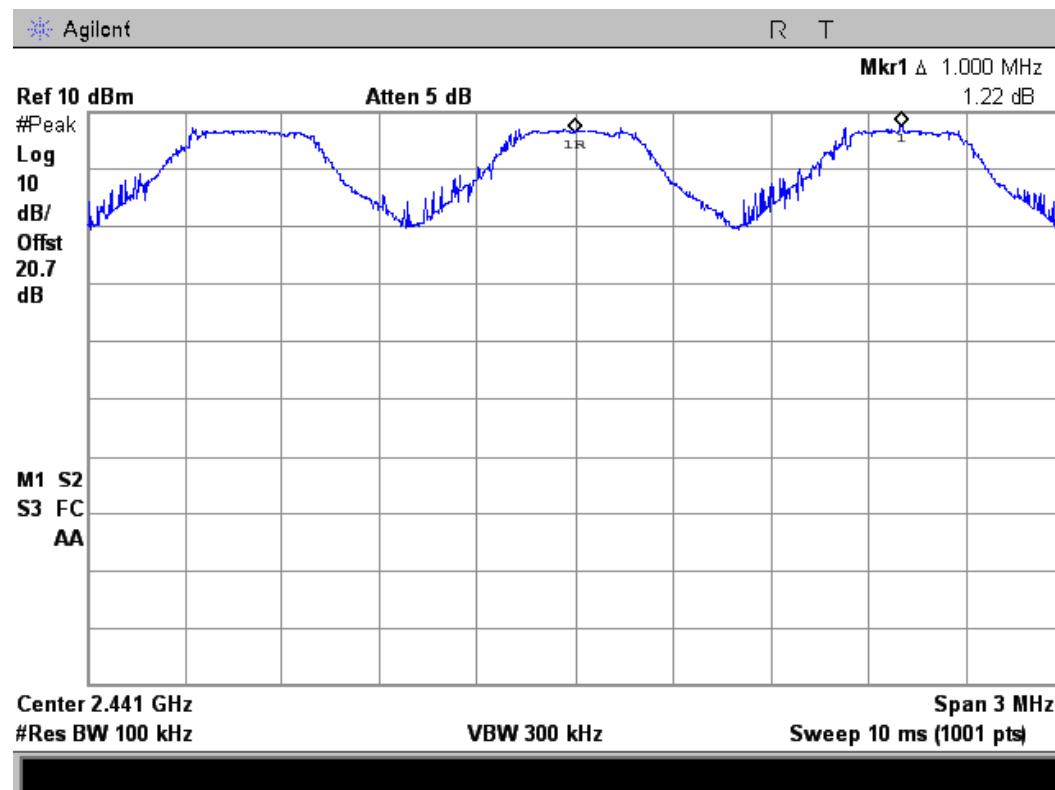

Measurement of 20dB Bandwidth


Test frequency: 2402MHz

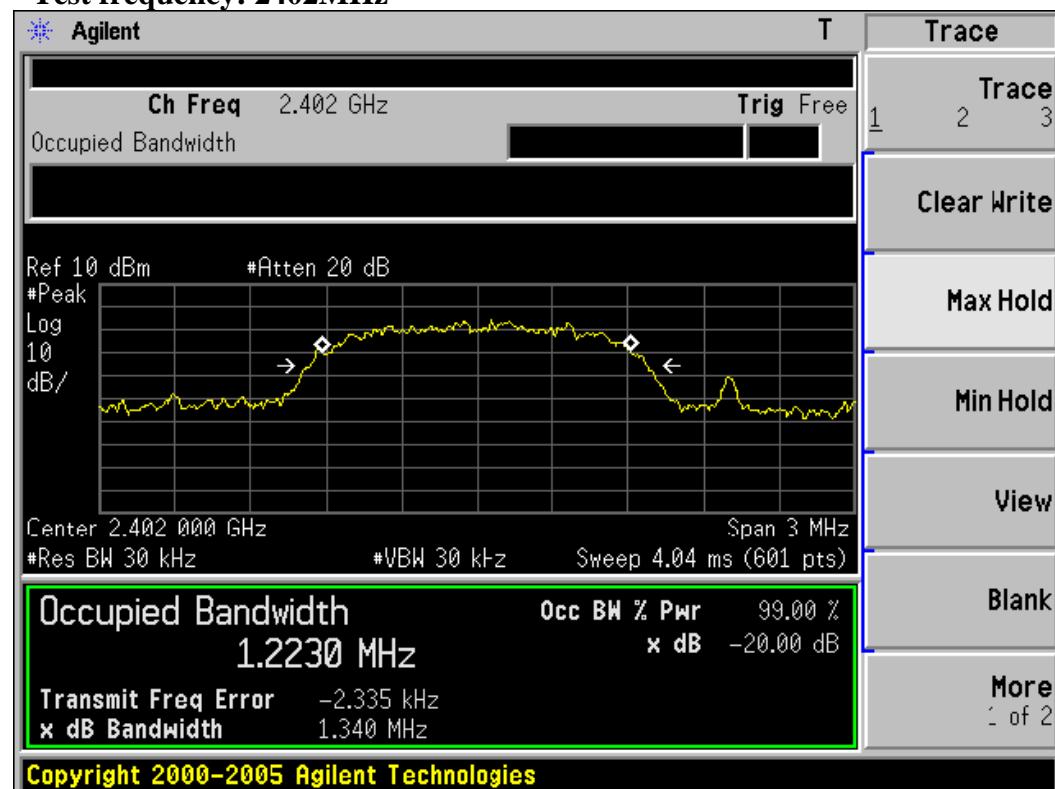

Test frequency: 2441MHz



Test frequency: 2480MHz

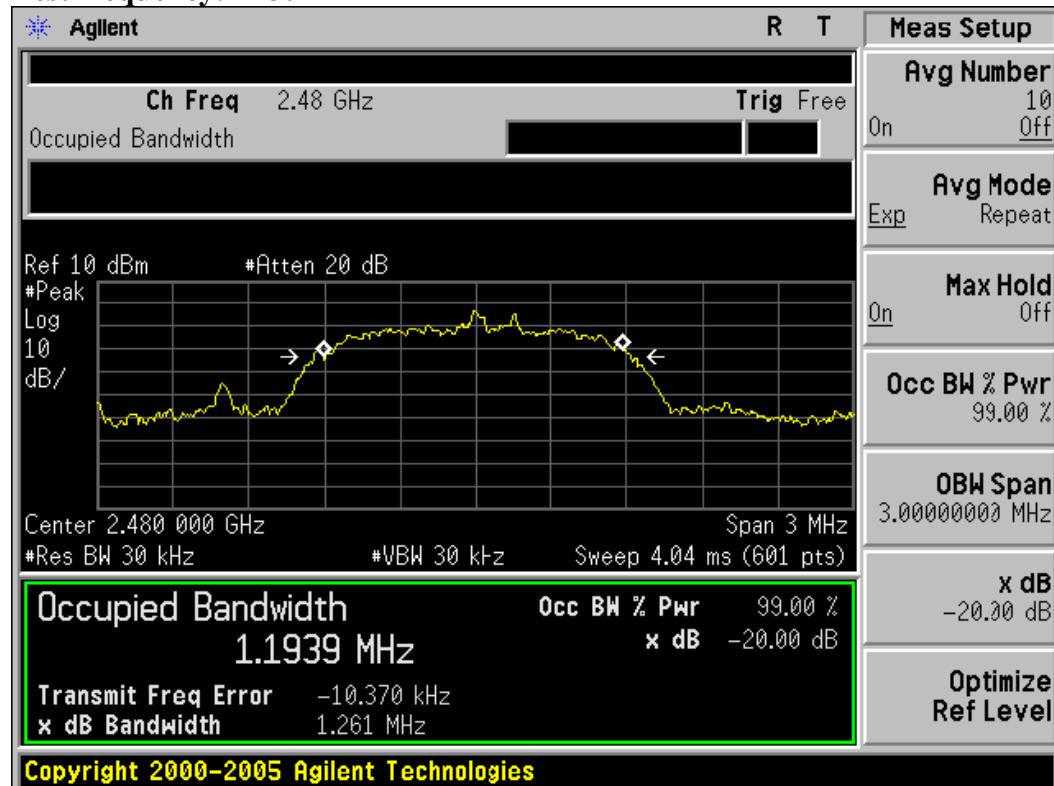

4.4 Number Of Hopping Frequency


4.4.1 Limit

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

4.4.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18
2	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2012-06-18
3	DC Filter	MPE	23872C	N/A	2012-06-18

4.4.3 Block Diagram of Test Setup

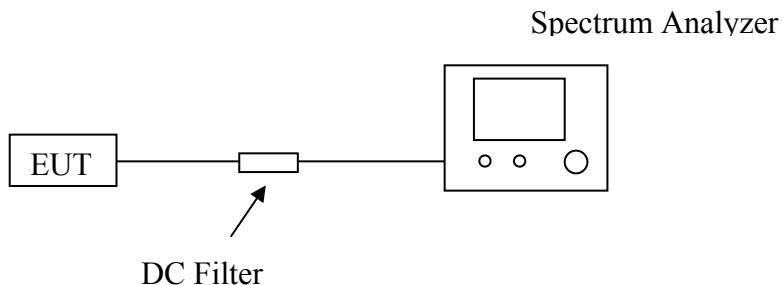



4.4.4 Test Procedure


- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- Set the Spectrum Analyzer as RBW, VBW=1.0MHz.
- Max hold, view and count how many channel in the band.

4.4.5 Test Results

The Measurement Result With The Worst Case of 3Mbps For 8DPSK Modulation			
Total No. of Hopping Channel	Measurement Result (No. of Ch)	Limit (MHz)	Result
	79	≥15	Pass

The test data graph please refer to the following page.

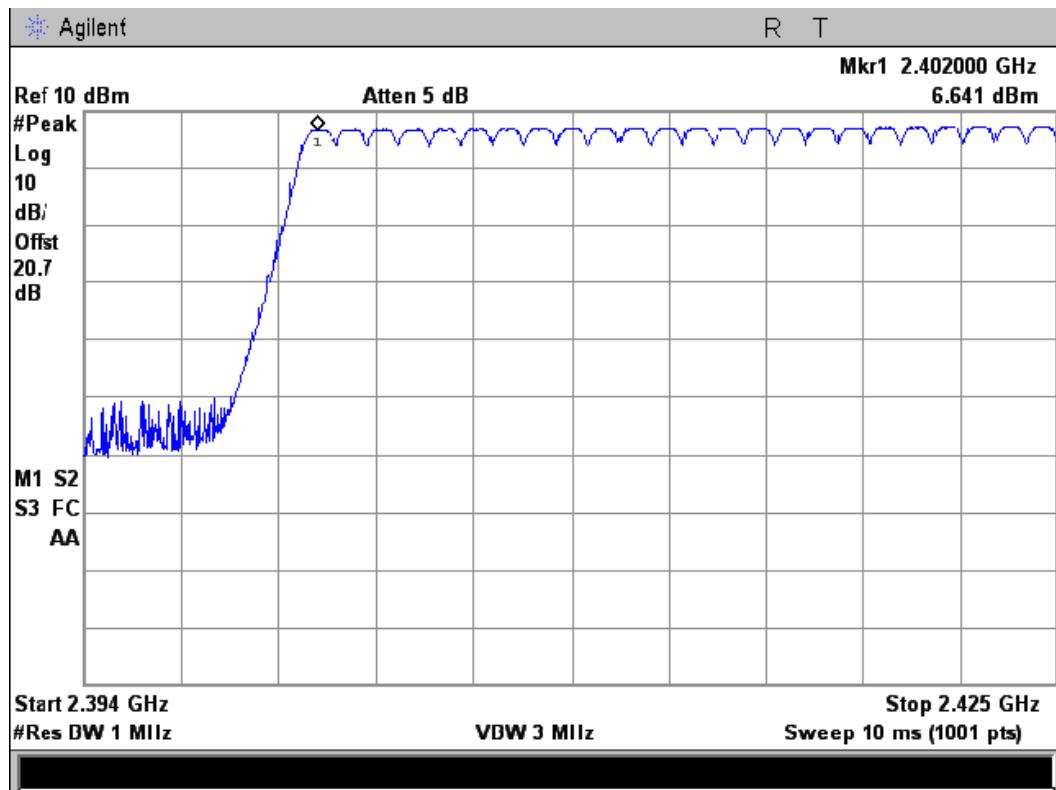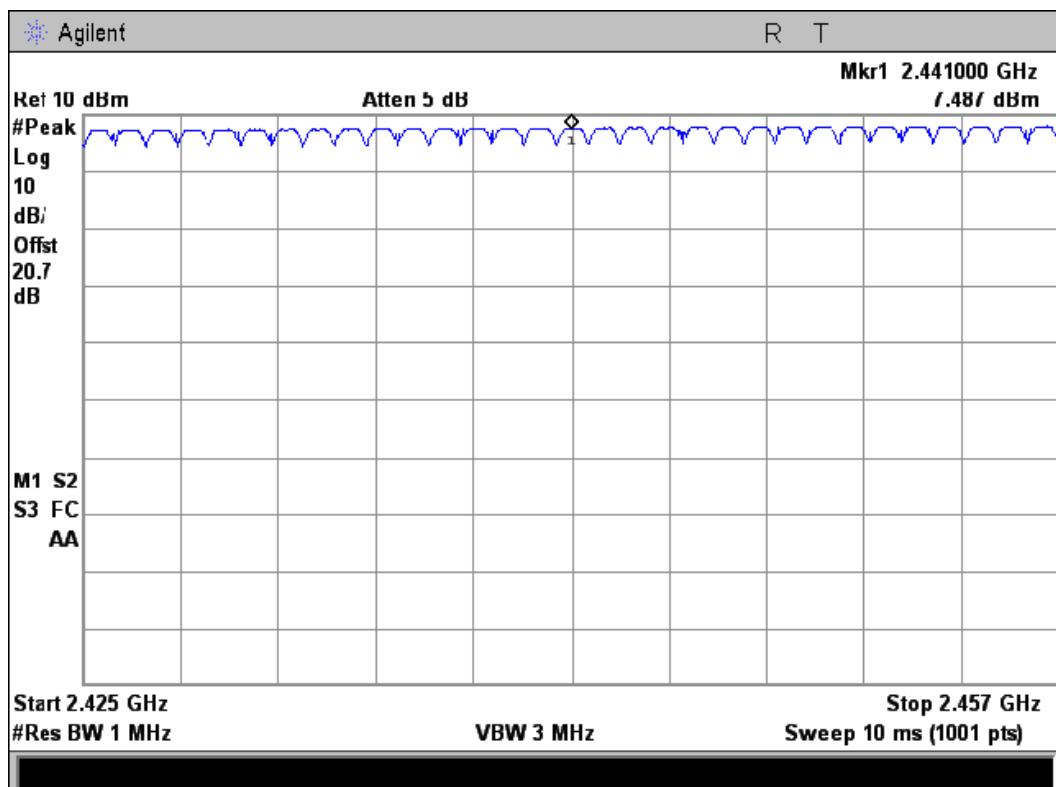Number of Hopping Channel(1-24)**Number of Hopping Channel(25-55)**

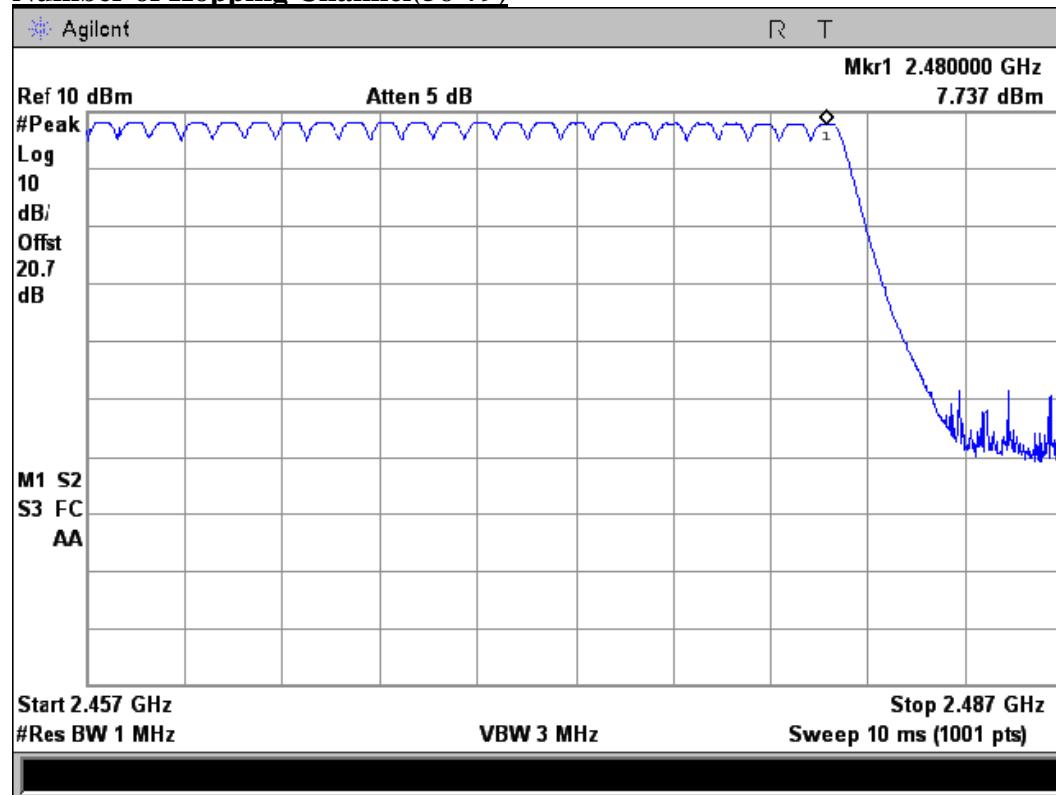Number of Hopping Channel(56-79)

4.5 Time Of Occupancy (Dwell Time)


4.5.1 Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

4.5.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18
2	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2012-06-18
3	DC Filter	MPE	23872C	N/A	2012-06-18

4.5.3 Block Diagram of Test Setup

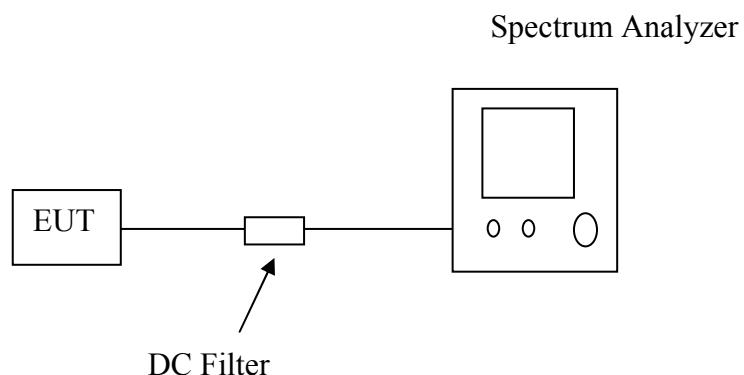

4.5.4 Test Procedure

- A. Place the EUT on the table and set it in transmitting mode.
- B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- C. Set center frequency of Spectrum Analyzer = operating frequency.
- D. Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- E. Repeat above procedures until all frequency measured were complete.

4.5.5 Test Results

The Measurement Result With The Worst Case of 3Mbps For 8DPSK Modulation				
Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.883	31.6	307.52	400
Middle	2.906	31.6	309.97	400
High	2.906	31.6	309.97	400

Low Channel

$$2.883 * (1600/6) / 79 * 31.6 = 307.52 \text{ ms}$$

Middle Channel


$$2.906 * (1600/6) / 79 * 31.6 = 309.97 \text{ ms}$$

High Channel


$$2.906 * (1600/6) / 79 * 31.6 = 309.97 \text{ ms}$$

The test data graph please refer to the following:


Low Channel

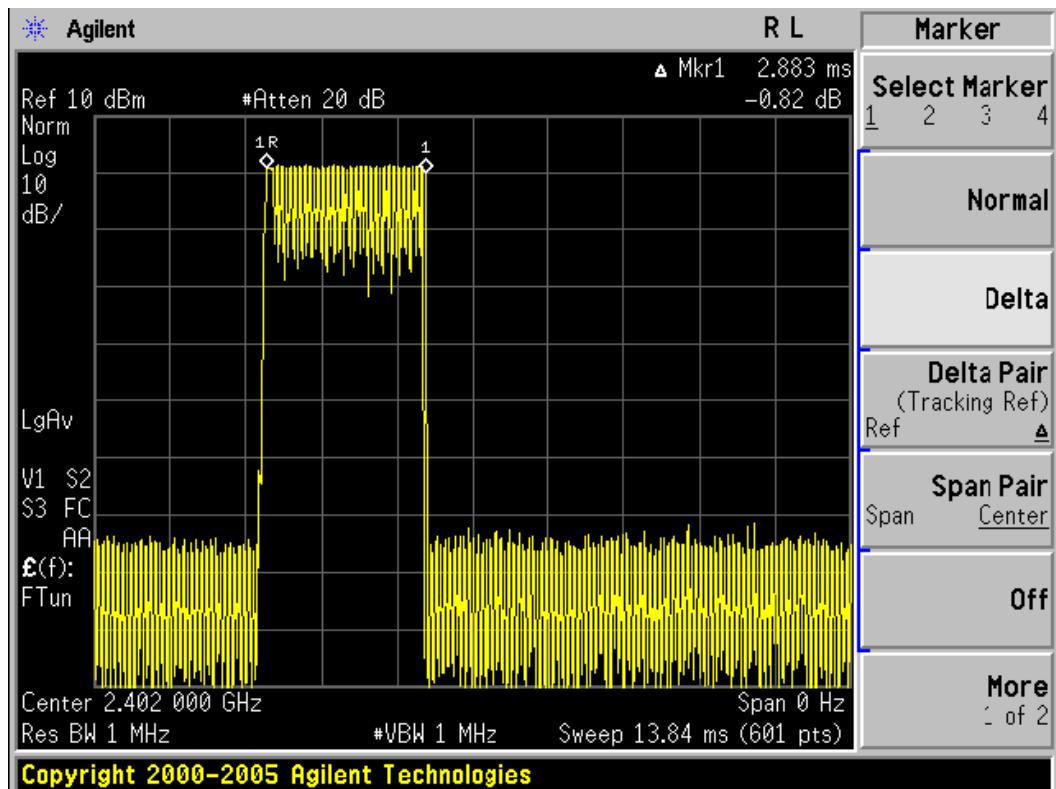

Middle Channel

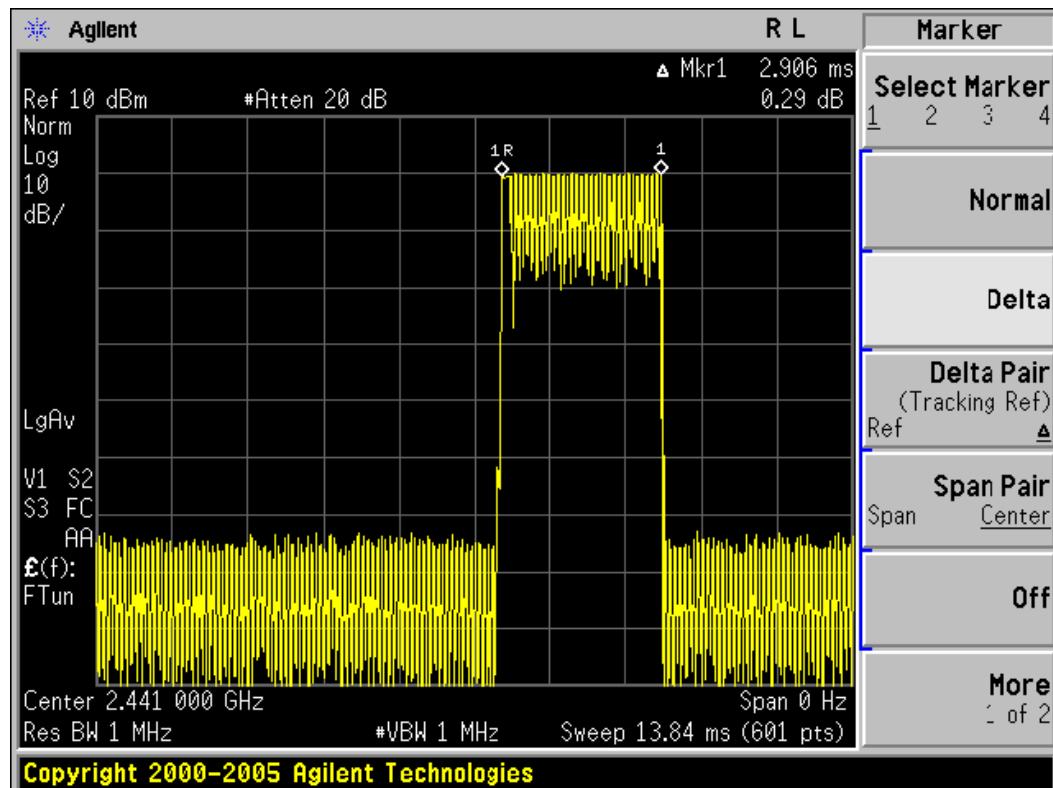

Middle Channel

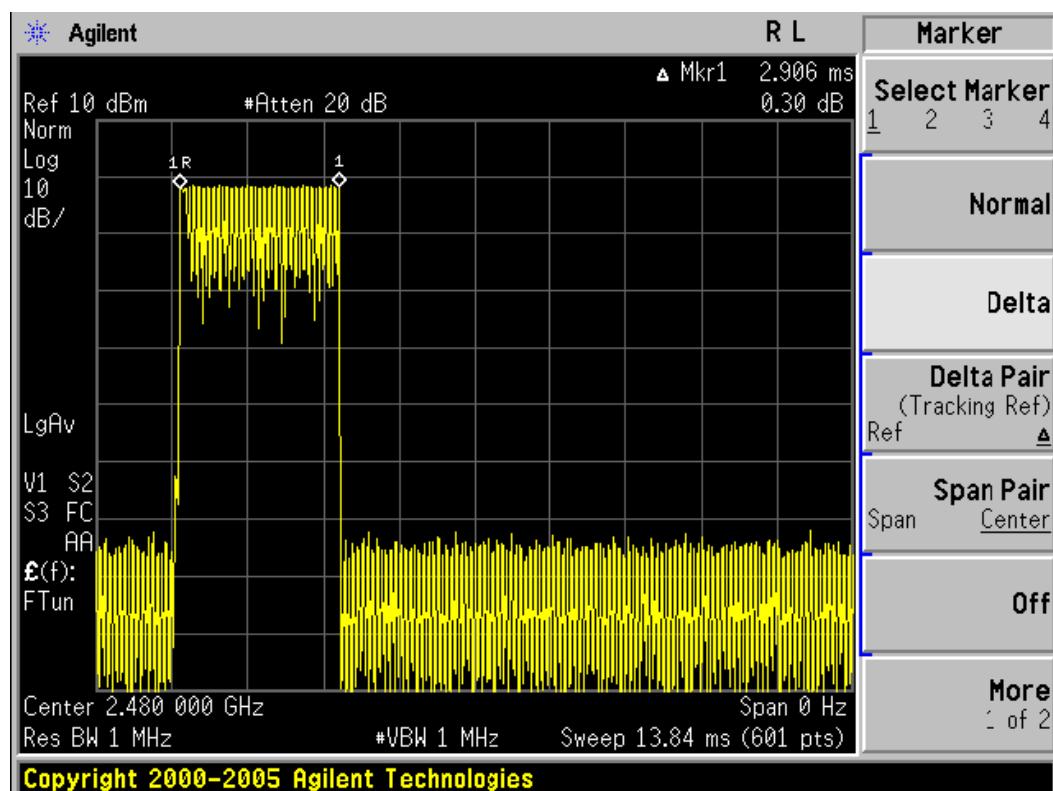

4.6 Spurious Emissions


4.6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.6.2 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18
2	RF Cable	Hubersuhne	Sucoflex104	FP2RX2	2012-06-18
3	DC Filter	MPE	23872C	N/A	2012-06-18

4.6.3 Block Diagram of Test Setup

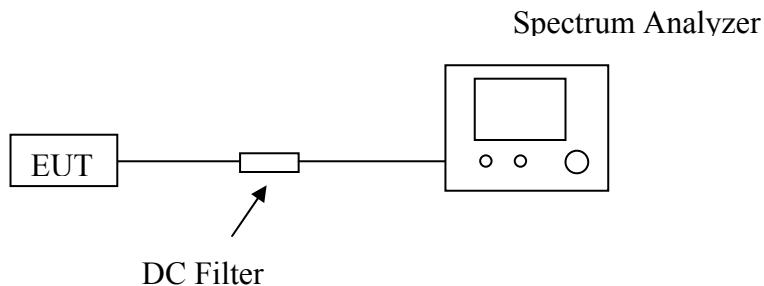

4.6.4 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.



Measurements are made over the 9kHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels. *No emission found between lowest internal used/generated frequency to 30 MHz.*



4.6.5 Test Results

No non-compliance noted

The test data graph please refer to the following page.

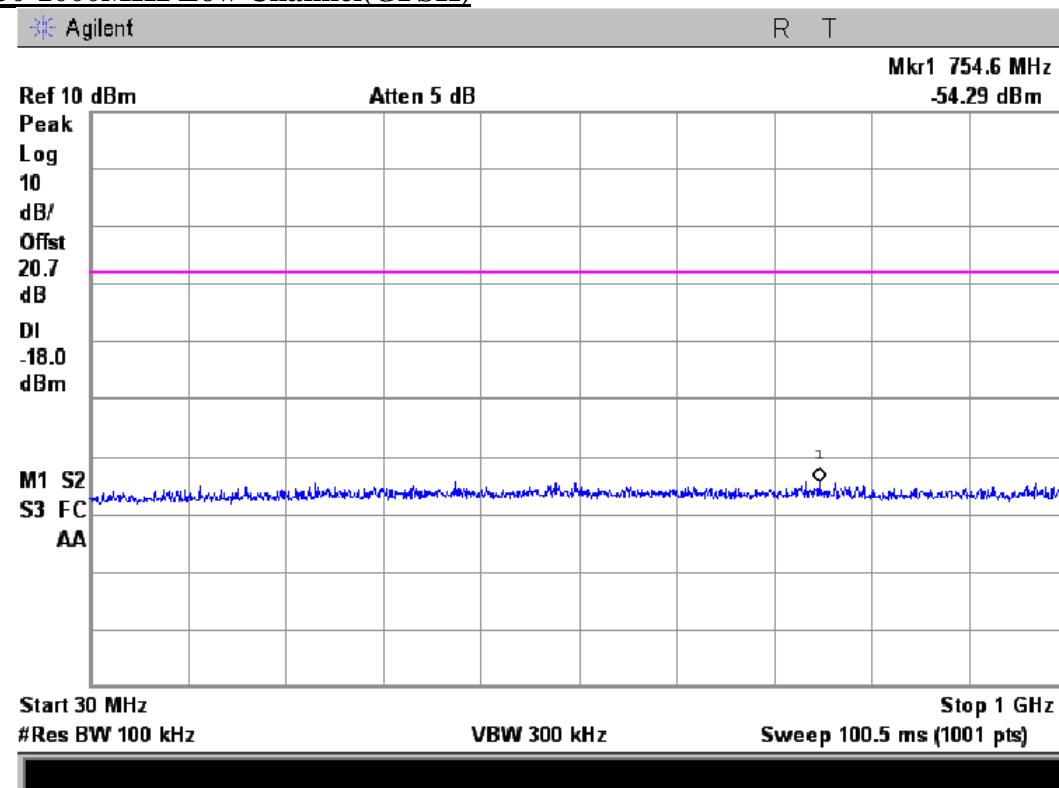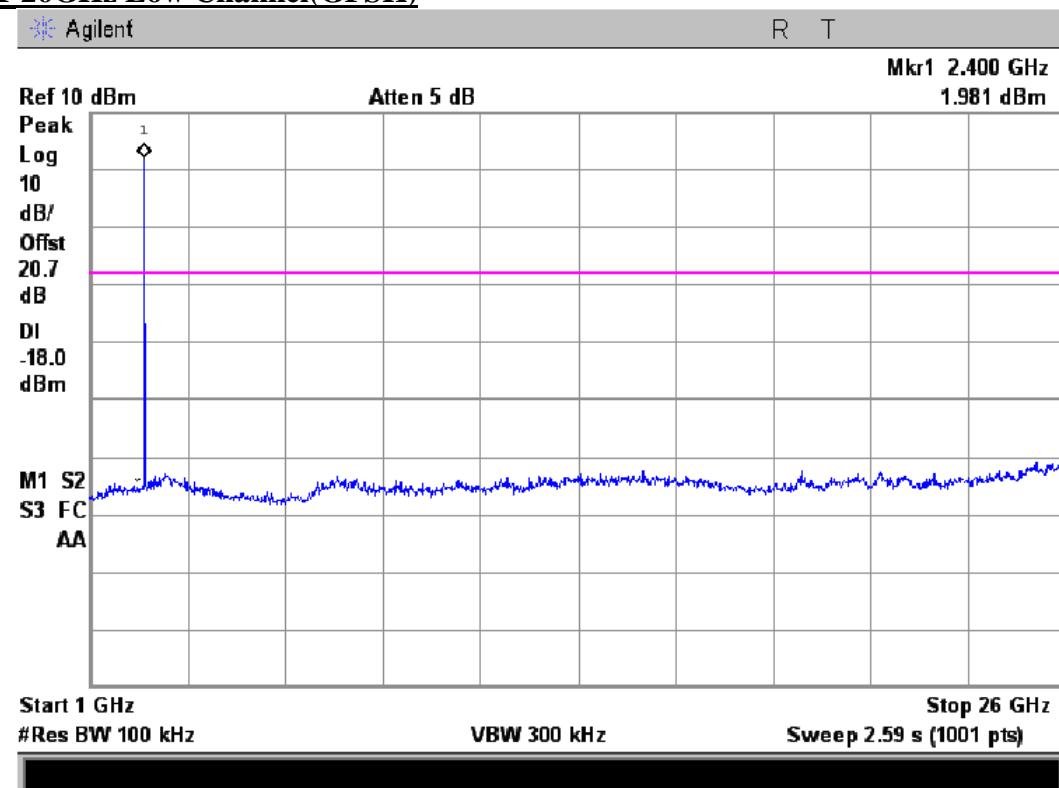Test Plot**30-1000MHz Low Channel(GFSK)****1-26GHz Low Channel(GFSK)**

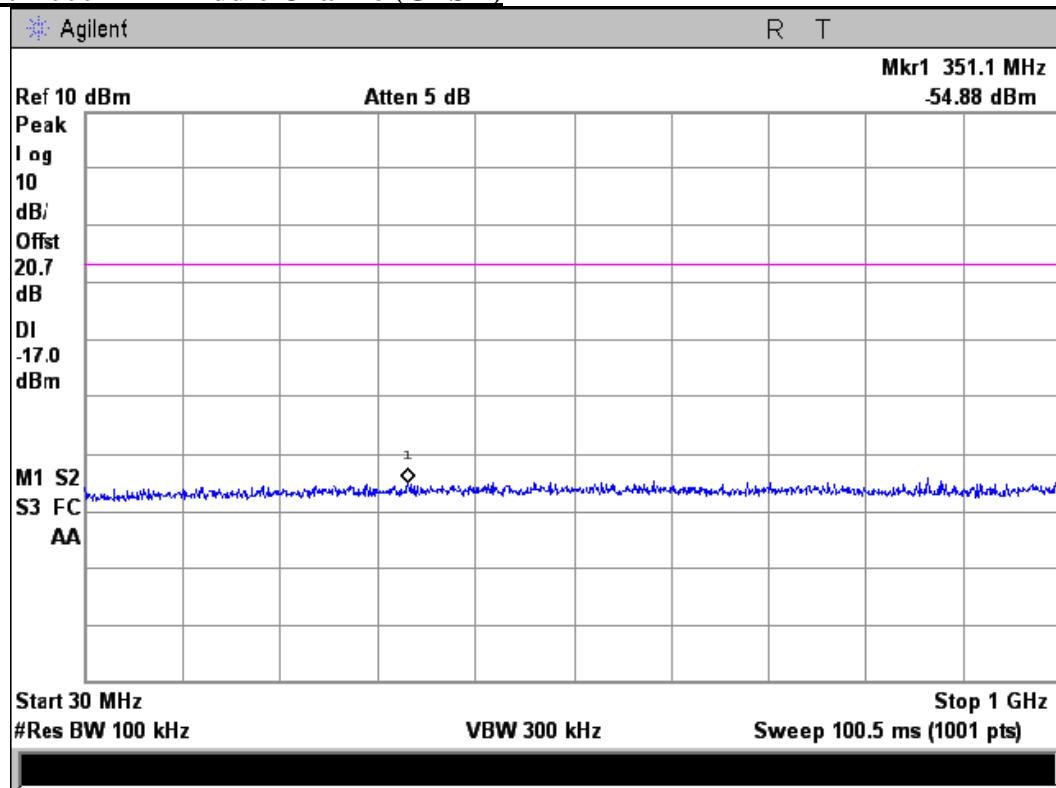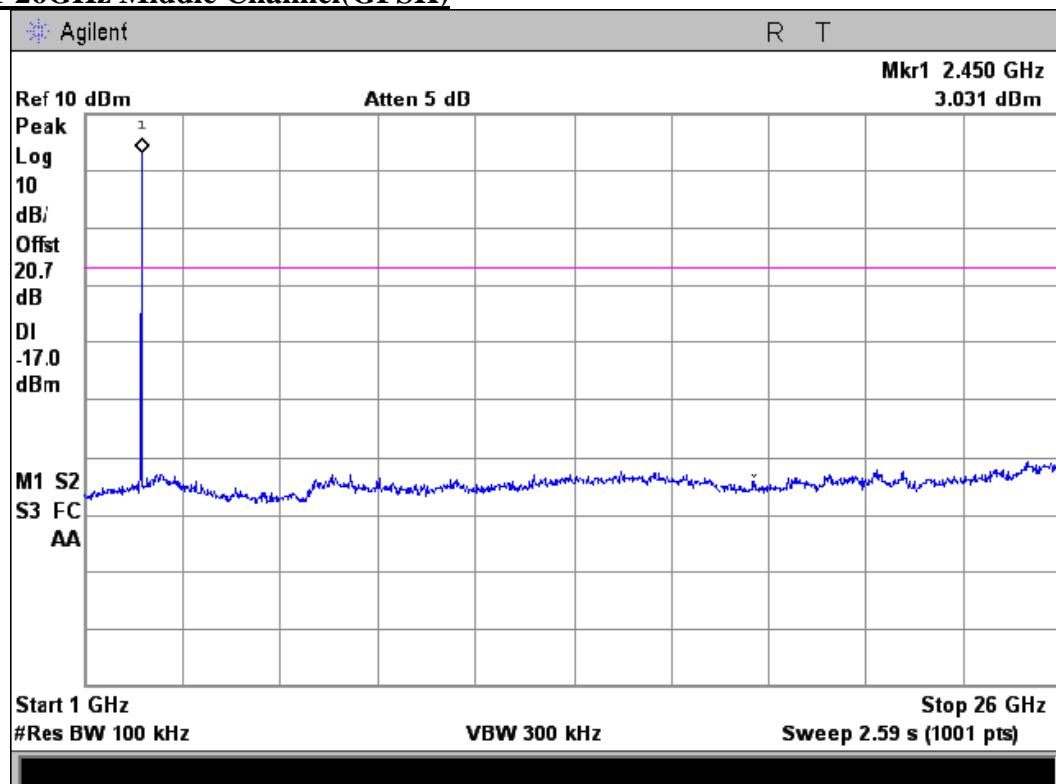30-1000MHz Middle Channel(GFSK)**1-26GHz Middle Channel(GFSK)**

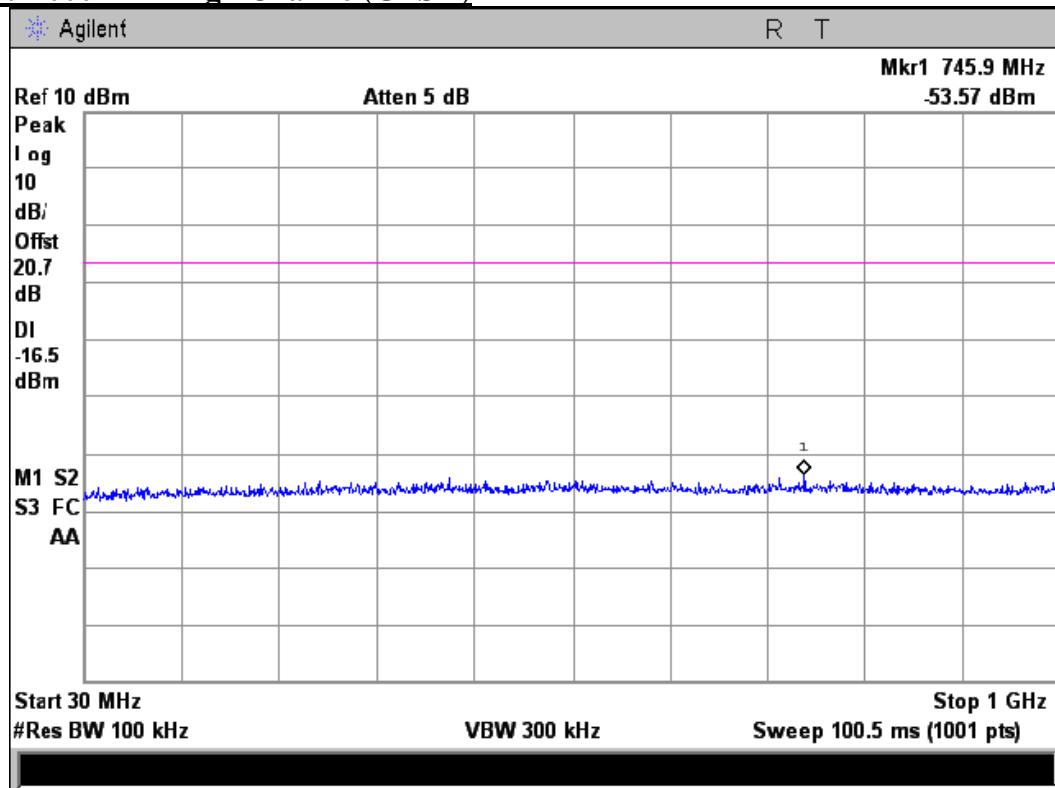
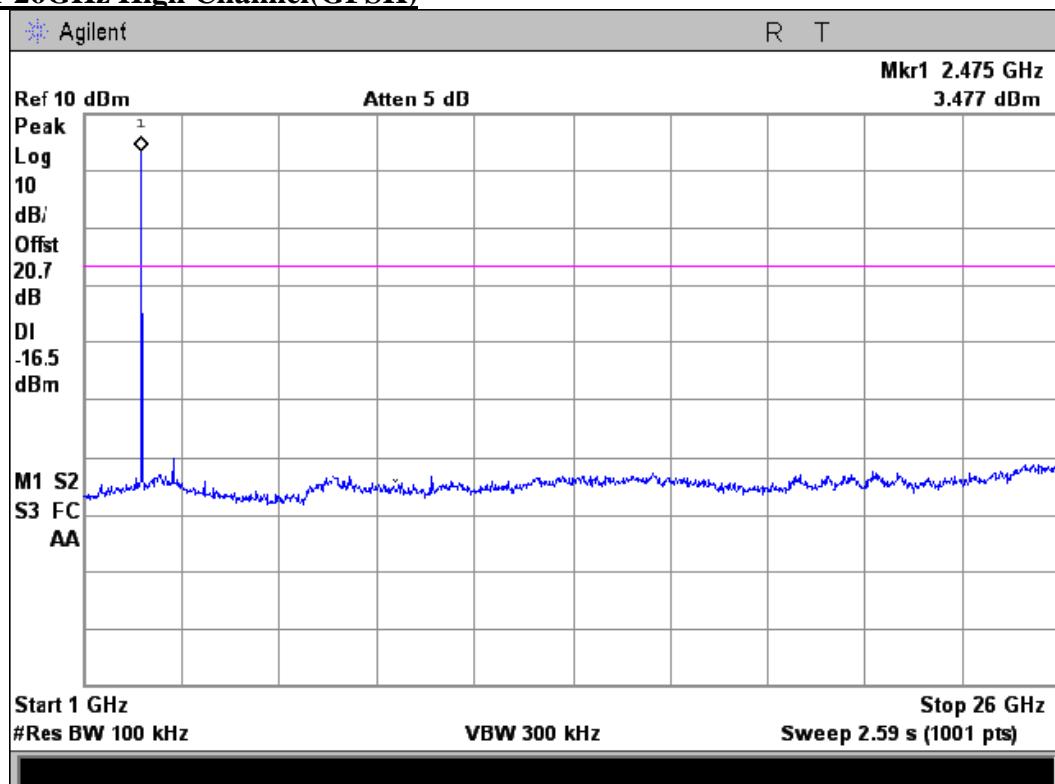
30-1000MHz High Channel(GFSK)**1-26GHz High Channel(GFSK)**

5. RADIATED EMISSION MEASUREMENT

5.1 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	2012-06-18
2	Test Receiver	Rohde & Schwarz	ESCS30	828985/018	2012-06-18
3	Loop antenna	EMCO	6502	0042963	2012-06-18
4	Log per Antenna	Schwarzbeck	VULB9163	142	2012-06-18
5	Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2012-06-18
6	DC Filter	MPE	23872C	N/A	2012-06-18

5.2 Block Diagram of Test Setup

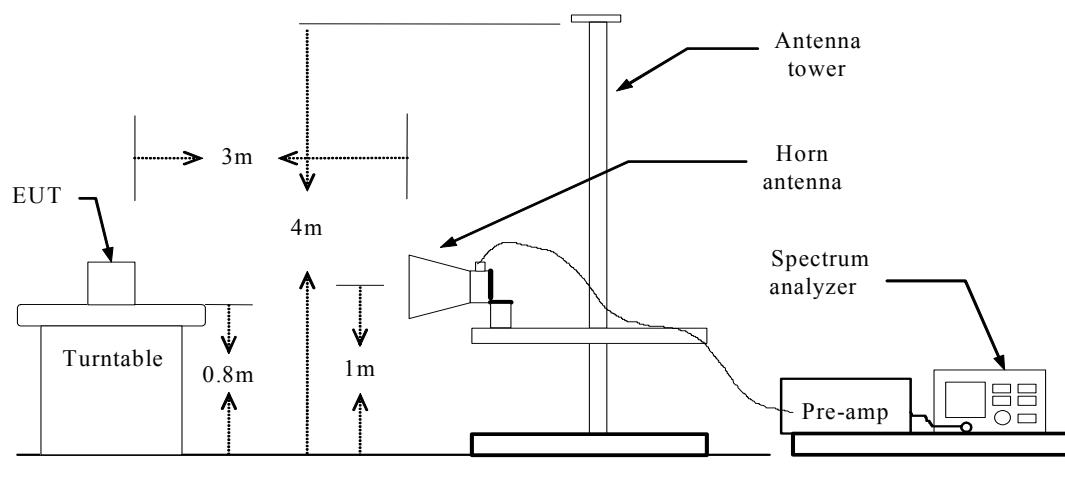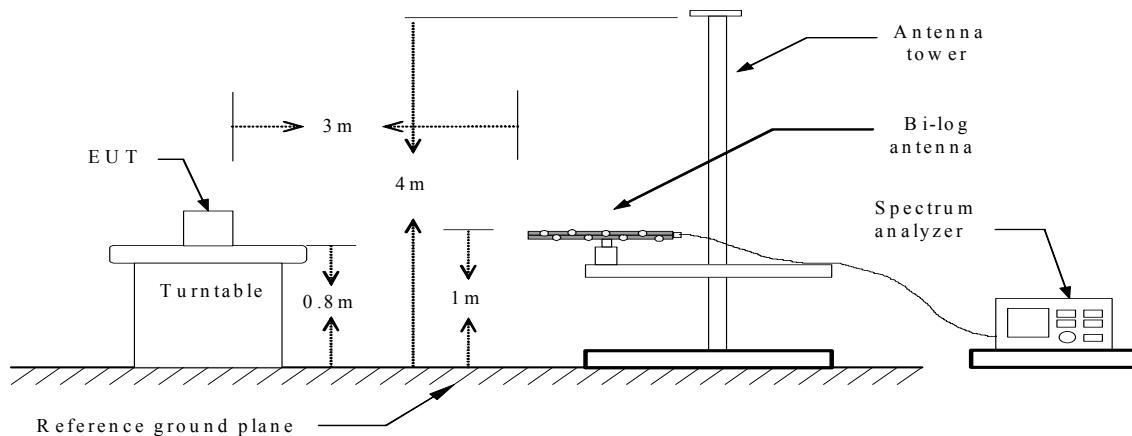

5.3 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.


Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

5.4 Test Results

PASS.


The test data please refer to following page.

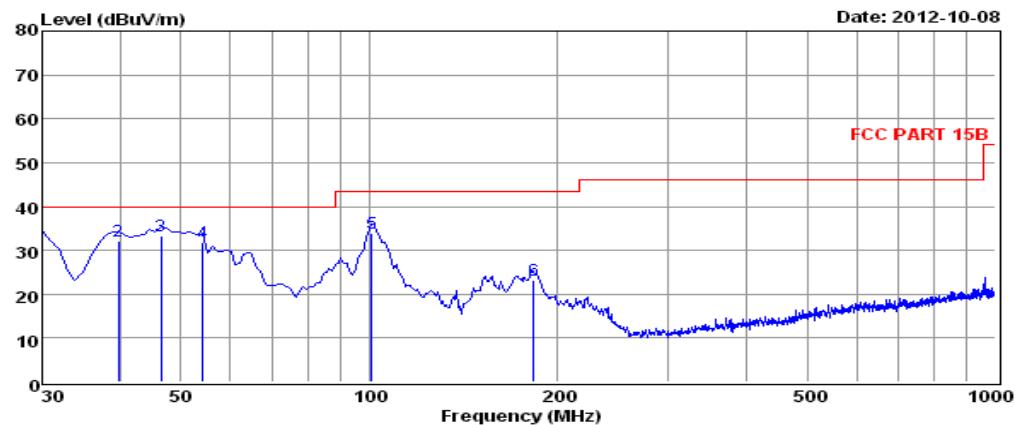Below 1GHz

Env. / Ins: 24°C/56%
 EUT: PS3 Basic Bluetooth Controller
 M/N: SL-2104
 Power Rating: DC 3.7V
 Test Mode: ON
 Operator: KANO
 Memo:
 pol: VERTICAL

Freq. MHz	Reading dBuV	CabLoss dB	AntFac dB/m	Prefac dB	Measured		Over dB	Remark
					dBuV/m	dBuV/m		
1 30.00	49.84	0.39	12.33	30.12	32.44	40.00	-7.56	QP
2 39.70	48.51	0.38	13.50	30.13	32.26	40.00	-7.74	QP
3 46.49	49.65	0.35	13.46	30.14	33.32	40.00	-6.68	QP
4 54.25	48.50	0.46	13.05	30.15	31.86	40.00	-8.14	QP
5 100.81	50.40	0.60	13.09	30.20	33.89	43.50	-9.61	QP
6 183.26	42.85	0.70	9.97	30.20	23.32	43.50	-20.18	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

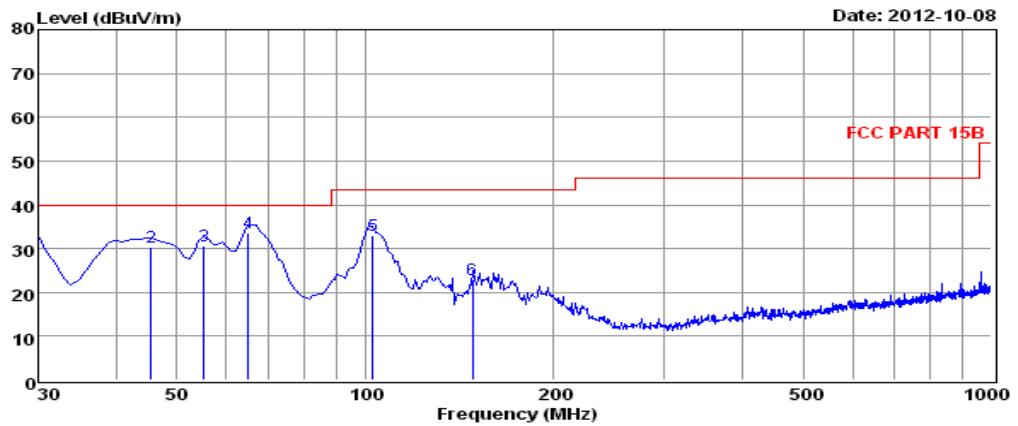

Env. / Ins: 24°C/56%
 EUT: PS3 Basic Bluetooth Controller
 M/N: SL-2104
 Power Rating: DC 3.7V
 Test Mode: ON
 Operator: KANO
 Memo:
 pol: HORIZONTAL

Freq. MHz	Reading dBuV	CabLoss dB	AntFac dB/m	Prefac dB	Measured		Over dB	Remark
					dBuV/m	dBuV/m		
1 30.00	48.33	0.39	12.33	30.12	30.93	40.00	-9.07	QP
2 45.52	46.54	0.41	13.52	30.14	30.33	40.00	-9.67	QP
3 55.22	47.26	0.46	13.01	30.15	30.58	40.00	-9.42	QP
4 64.92	52.40	0.52	10.74	30.16	33.50	40.00	-6.50	QP
5 102.75	49.74	0.60	12.91	30.20	33.05	43.50	-10.45	QP
6 148.34	43.98	0.86	8.25	30.20	22.89	43.50	-20.61	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss - Amp Factor.
 3. The emission levels that are 20dB below the official limit are not reported.

Above 1GHz

Operation Mode: TX/ CH Low(GFSK) **Test Date:** 2012-10-09
Temperature: 23°C **Humidity:** 50 % RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	PK Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
4804.56	V	40.68	28.84	10.98	51.67	39.82	74	54	-22.33	-14.18
7207.39	V	32.13	19.64	18.54	50.67	38.18	74	54	-23.33	-15.82
4804.67	H	40.4	29.28	10.98	51.38	40.26	74	54	-22.62	-13.74
7206.00	H	33.09	21.44	18.53	51.62	39.97	74	54	-22.38	-14.03

Operation Mode: TX/ CH Mid(GFSK) **Test Date:** 2012-10-09
Temperature: 23°C **Humidity:** 50 % RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	PK Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
4882.10	V	40.69	28.88	10.98	51.67	39.82	74	54	-22.33	-14.14
7324.33	V	32.89	21.58	18.54	51.43	40.12	74	54	-22.57	-13.88
4882.67	H	39.46	28.83	10.98	50.44	39.81	74	54	-23.56	-14.19
7324.25	H	33.19	20.52	18.53	51.72	39.05	74	54	-22.23	-14.95

Operation Mode: TX/ CH High(GFSK) **Test Date:** 2012-10-09
Temperature: 23°C **Humidity:** 50 % RH

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	PK Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
4960.10	V	40.04	28.83	10.98	51.02	39.81	74	54	-22.98	-14.19
7441.69	V	31.59	21.33	18.54	50.13	39.87	74	54	-23.87	-14.13
4960.25	H	38.25	27.53	10.98	49.23	38.51	74	54	-24.77	-15.49
7440.00	H	31.59	20.24	18.53	50.12	38.77	74	54	-23.88	-15.23

Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


6. POWER LINE CONDUCTED EMISSIONS

6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


6.2 Block Diagram of Test Setup

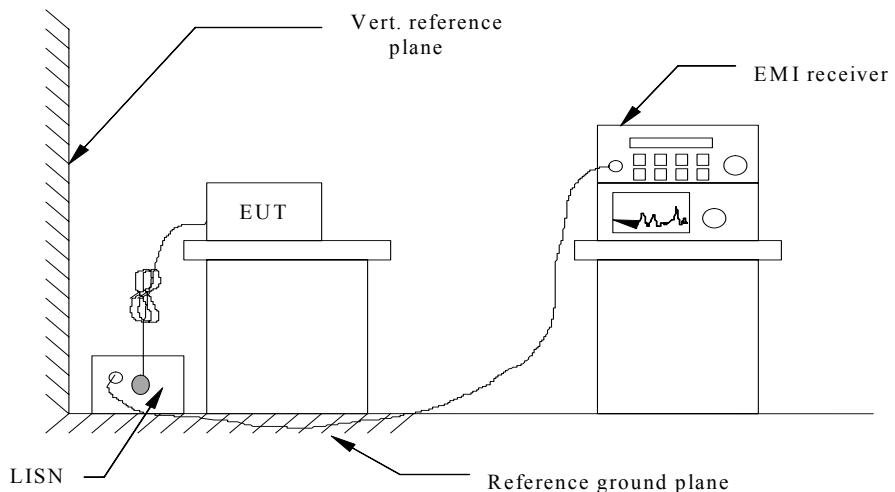

6.3 Test Results

PASS.


The test data please refer to following page.

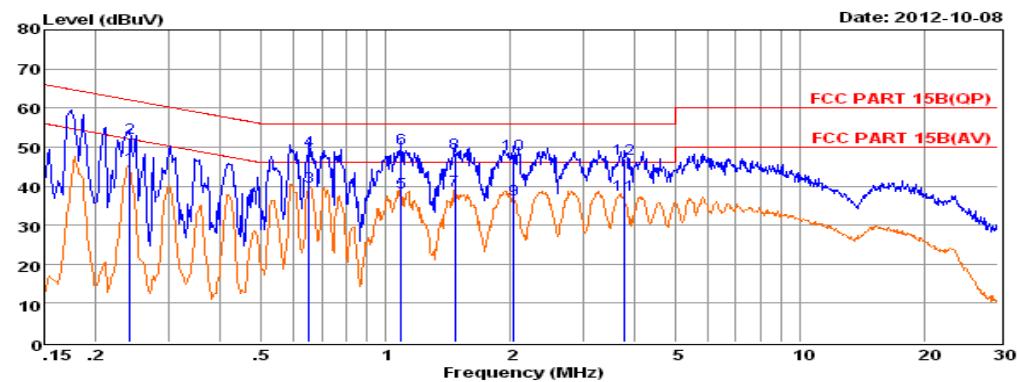

Env. Ins: 24*/56%
 EUT: PS3 Basic Bluetooth Controller
 M/N: SL-2104
 Power Rating: DC 3.7V
 Test Mode: On
 Operator: FOX
 Memo:
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
MHz	dBuV			dBuV	dBuV		
1	0.24	35.14	9.60	0.03	44.77	52.04	-7.27 Average
2	0.24	42.65	9.60	0.03	52.28	62.04	-9.76 QP
3	0.65	30.18	9.63	0.04	39.85	46.00	-6.15 Average
4	0.65	39.46	9.63	0.04	49.13	56.00	-6.87 QP
5	1.09	28.71	9.63	0.05	38.39	46.00	-7.61 Average
6	1.09	39.89	9.63	0.05	49.57	56.00	-6.43 QP
7	1.47	29.29	9.63	0.05	38.97	46.00	-7.03 Average
8	1.47	38.89	9.63	0.05	48.57	56.00	-7.43 QP
9	2.03	26.90	9.63	0.05	36.58	46.00	-9.42 Average
10	2.03	38.59	9.63	0.05	48.27	56.00	-7.73 QP
11	3.76	28.13	9.65	0.06	37.84	46.00	-8.16 Average
12	3.76	37.34	9.65	0.06	47.05	56.00	-8.95 QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

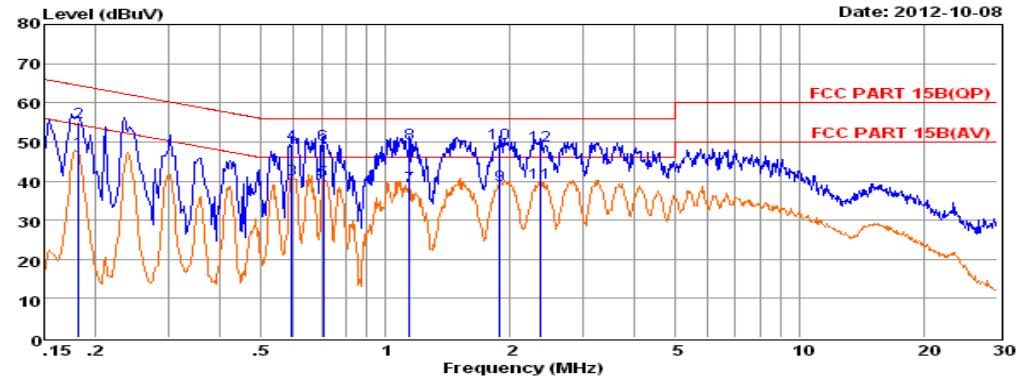

Env. Ins: 24*/56%
 EUT: PS3 Basic Bluetooth Controller
 M/N: SL-2104
 Power Rating: DC 3.7V
 Test Mode: On
 Operator: FOX
 Memo:
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Measured	Limit	Over	Remark
MHz	dBuV			dBuV	dBuV		
1	0.18	38.00	9.61	0.02	47.63	54.42	-6.79 Average
2	0.18	45.31	9.61	0.02	54.94	64.42	-9.48 QP
3	0.59	30.72	9.63	0.04	40.39	46.00	-5.61 Average
4	0.59	39.68	9.63	0.04	49.35	56.00	-6.65 QP
5	0.71	30.47	9.64	0.04	40.15	46.00	-5.85 Average
6	0.71	39.79	9.64	0.04	49.47	56.00	-6.53 QP
7	1.14	29.07	9.63	0.05	38.75	46.00	-7.25 Average
8	1.14	39.91	9.63	0.05	49.59	56.00	-6.41 QP
9	1.89	29.37	9.64	0.05	39.06	46.00	-6.94 Average
10	1.89	39.89	9.64	0.05	49.58	56.00	-6.42 QP
11	2.37	29.76	9.64	0.05	39.45	46.00	-6.55 Average
12	2.37	39.24	9.64	0.05	48.93	56.00	-7.07 QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all mode and recorded the worst case results in this report (TX mode)

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

7.1.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.1.2. Antenna Construction

Section 15.203 of the rules states that the subject device must meet at least one of the following criteria:

- (a) Antenna must be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.
- (c) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

7.1.3. Results

EUT uses a PCB antenna with 1dBi gain.

Compliance.

8. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s):

--	--	--	--
----	----	----	----

Belong to the tested device:

Product description : PS3 Basic Bluetooth Controller

Model name : SL-2104

No additional models were tested.

-----THE END OF REPORT-----