



## FCC PART 15.247



### TEST REPORT

For

**CDM MIAMI INC**

1825 NW 112<sup>th</sup> AVE, UNIT 158, MIAMI, FL 33172

**FCC ID: ZZRTM9207**

<b>Report Type:</b> Original Report	<b>Product Type:</b> GSM Mobile Phone
<b>Test Engineer:</b> <u>Henry Ding</u> 	
<b>Report Number:</b> <u>RSZ120529004-00B-Wi-Fi</u>	
<b>Report Date:</b> <u>2012-07-09</u>	
<b>Reviewed By:</b> <u>Alvin Huang</u>  <u>RF Leader</u>	
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk “★” (Rev.2)

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION</b> .....	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	5
TEST FACILITY.....	5
<b>SYSTEM TEST CONFIGURATION</b> .....	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP .....	7
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS</b> .....	<b>8</b>
<b>§15.247 (i) and §1.1307 (b) (1), §2.1093 – RF EXPOSURE</b> .....	<b>9</b>
STANDARD APPLICABLE .....	9
RESULT: .....	10
<b>FCC §15.203 - ANTENNA REQUIREMENT</b> .....	<b>11</b>
APPLICABLE STANDARD .....	11
ANTENNA CONNECTOR CONSTRUCTION .....	11
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS</b> .....	<b>12</b>
APPLICABLE STANDARD .....	12
MEASUREMENT UNCERTAINTY .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE .....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY .....	13
TEST DATA .....	13
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.</b> .....	<b>16</b>
APPLICABLE STANDARD .....	16
MEASUREMENT UNCERTAINTY .....	16
EUT SETUP .....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST PROCEDURE .....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY .....	18
TEST DATA .....	18
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.</b> .....	<b>26</b>
APPLICABLE STANDARD .....	26
TEST PROCEDURE .....	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA .....	26

<b>FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER .....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA .....	31
<b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>36</b>
APPLICABLE STANDARD .....	36
TEST PROCEDURE .....	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA .....	36
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>40</b>
APPLICABLE STANDARD .....	40
TEST PROCEDURE .....	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA .....	40
<b>PRODUCT SIMILARITY DECLARATION LETTER.....</b>	<b>45</b>

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *CDM MIAMI INC*'s product, model number: *FLY (FCC ID: ZZRTM9207)* (the "EUT") in this report is a *GSM Mobile Phone*, which was measured approximately: 11.0 cm (L) x 6.0 cm (W) x 1.5 cm (H), rated input voltage: DC 3.7 V Li-ion battery or DC 5V charging from adapter.

#### Adapter Information:

Model: US5PIN;  
Input: AC 100-240V 50/60Hz 0.1A;  
Output: DC 5.0V 500mA.

*Note: The product, model FLY, K700, SURF and CRUISE, they are electrically identical, only different in model number, Model FLY was selected for full testing, which was explained for details in the attached declaration letter.*

*\* All measurement and test data in this report was gathered from production sample serial number: 1205091 (Assigned by BACL, Shenzhen). The EUT was received on 2012-05-29.*

### Objective

This report is prepared on behalf of *CDM MIAMI INC* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS and Part 22H&24E PCE submissions with FCC ID: ZZRTM9207.

## Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is  $\pm 0.96$  dB, the uncertainty of any radiation on emissions measurement is  $\pm 4.0$  dB

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 802.11b and 802.11g mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

EUT was tested with Channel 1, 6 and 11.

The worst case data rate is determined with the data rate with highest output power. For 802.11b mode: 11 Mbps data rate was chosen for full testing. For 802.11g mode: 54 Mbps data rate was chosen for full testing.

The system was configured for testing in an Engineering Mode.

### EUT Exercise Software

Software supplied by client

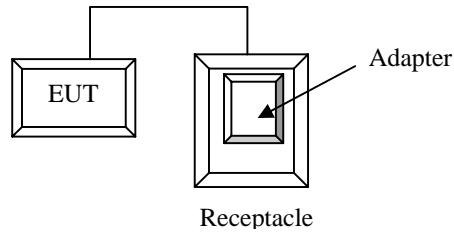
### Equipment Modifications

No modification was made to the unit tested.


### External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable DC Power Cable	1.0	EUT	Adapter

## Configuration of Test Setup



## Block Diagram of Test Setup

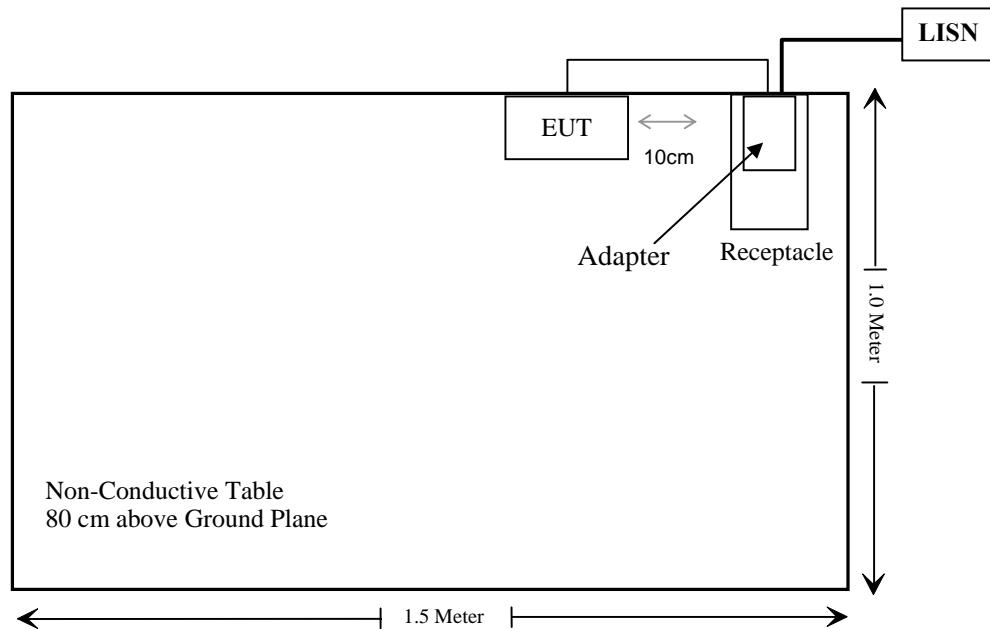

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

## §15.247 (i) and §1.1307 (b) (1), §2.1093 – RF EXPOSURE

### Standard Applicable

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

**Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters**

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	<u>SAR not required:</u> <u>Unlicensed only</u> <ul style="list-style-type: none"> <li>○ when stand-alone 1-g SAR is not required and antenna is <math>\geq 5</math> cm from other antennas</li> </ul> <u>Licensed &amp; Unlicensed</u> <ul style="list-style-type: none"> <li>○ when the sum of the 1-g SAR is <math>&lt; 1.6</math> W/kg for all simultaneous transmitting antennas</li> <li>○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is <math>&lt; 0.3</math></li> </ul> <u>SAR required:</u> <u>Licensed &amp; Unlicensed</u> <p>antenna pairs with SAR to peak location separation ratio <math>\geq 0.3</math>; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition</p> <p><b>Note:</b> simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</p>
Jaw, Mouth and Nose	<u>Flat phantom SAR required</u> <ul style="list-style-type: none"> <li>○ when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues</li> <li>○ position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations</li> </ul>	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

- 1) GSM can transmit simultaneously with Wi-Fi.
- 2) The distance between Wi-Fi and GSM antenna is  $6.2\text{cm} > 5.0\text{ cm}$ . The max output power of Bluetooth antenna is  $(12.58\text{dBm}) 18.0\text{ mW} < 2*\text{P}_{\text{Ref}} (24\text{ mW})$ . According to KDB648474, stand-alone SAR is not required for Wi-Fi antenna.
- 3) When the sum of the 1-g SAR is  $< 1.6\text{W/kg}$  for GSM and Bluetooth, the simultaneous SAR is not required.
- 4)  $\text{P}_{\text{Ref}}$  is defined as the maximum conducted power available at the antenna according to source-based time-averaging requirements of Section 2.1093(d)(5).

**Result:**

The SAR measurement is exempt.

## **FCC §15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has an integrated antenna arrangement for Wi-Fi, which was permanently attached and the gain was -2 dBi, fulfill the requirement of this section. Please refer to the internal photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

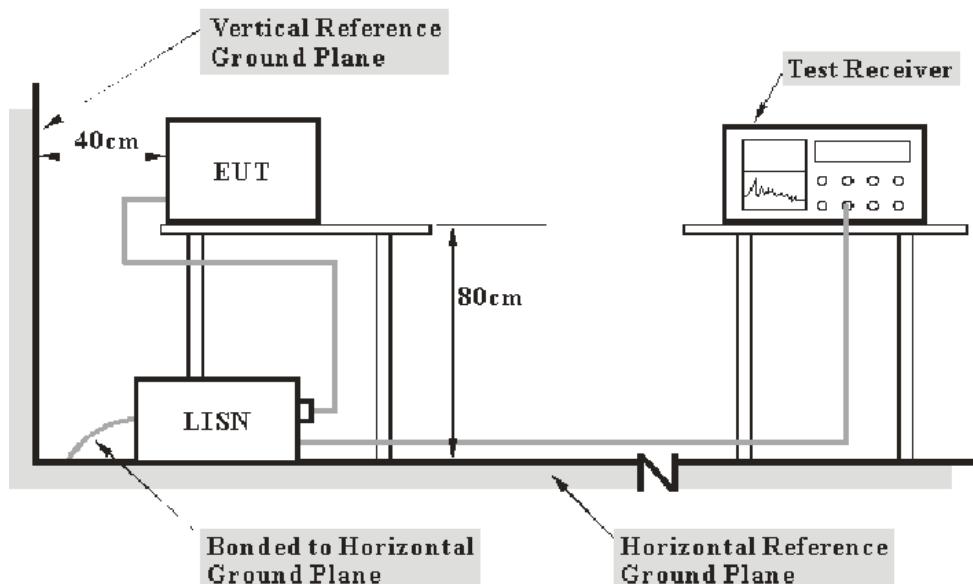
FCC§15.207

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence).

### EUT Setup



- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<b>Frequency Range</b>	<b>IF B/W</b>
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2011-11-24	2012-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-11-17	2012-11-16
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2011-07-08	2012-07-07
BACL	CE Test software	BACL-CE	V1.0	-	-

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.207](#), with the worst margin reading of:

**21.74 dB at 1.825 MHz in the Neutral conducted mode**

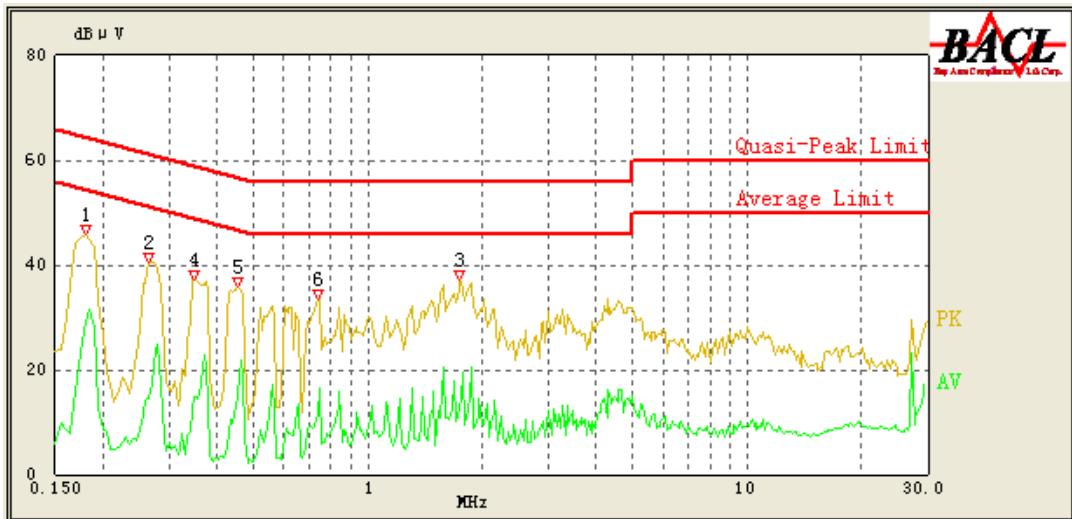
## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 ° C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.0 kPa


*The testing was performed by Henry Ding on 2012-07-04.*

*Test Mode: Transmitting*

**120 V, 60 Hz, Line:**

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (PK /QP/Ave.)
0.180	42.56	9.64	65.14	22.58	QP
1.750	31.75	9.89	56.00	24.25	QP
0.740	30.25	9.78	56.00	25.75	QP
0.180	29.20	9.64	55.14	25.94	Ave.
0.455	31.25	9.67	57.29	26.04	QP
0.265	35.49	9.65	62.71	27.22	QP
0.350	31.86	9.66	60.29	28.43	QP
1.755	14.47	9.89	46.00	31.53	Ave.
0.455	14.71	9.67	47.29	32.58	Ave.
0.740	11.66	9.78	46.00	34.34	Ave.
0.350	14.67	9.66	50.29	35.62	Ave.
0.265	14.50	9.65	52.71	38.21	Ave.

**120V, 60 Hz, Neutral:**

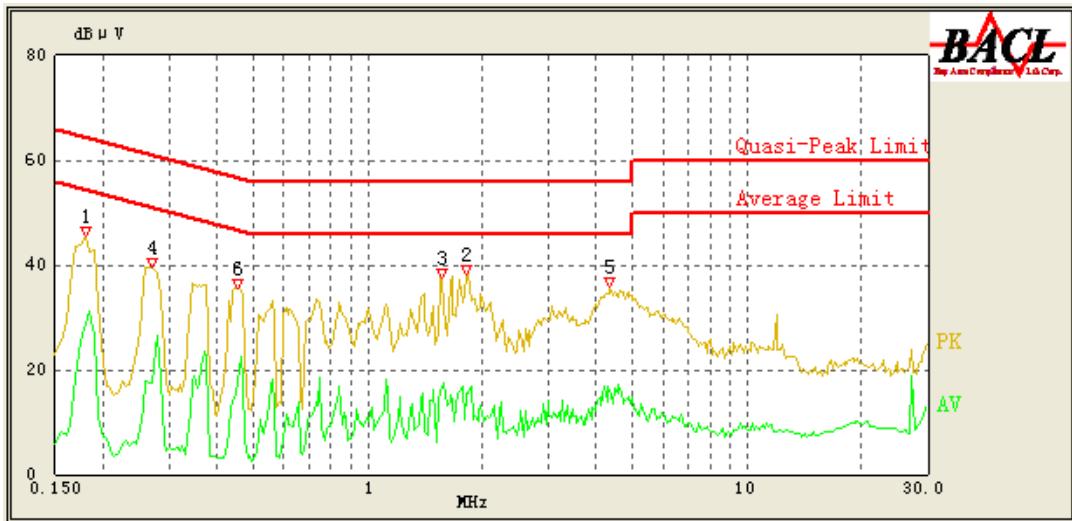

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (QP/Ave.)
1.825	34.26	9.90	56.00	21.74	QP
1.575	33.66	9.89	56.00	22.34	QP
0.180	42.16	9.67	65.14	22.98	QP
4.350	30.27	9.98	56.00	25.73	QP
0.180	28.91	9.67	55.14	26.23	Ave.
0.455	31.03	9.67	57.29	26.26	QP
0.270	35.91	9.66	62.57	26.66	QP
1.585	17.13	9.89	46.00	28.87	Ave.
0.455	17.47	9.67	47.29	29.82	Ave.
1.825	15.60	9.90	46.00	30.40	Ave.
4.390	15.44	9.98	46.00	30.56	Ave.
0.270	17.54	9.66	52.57	35.03	Ave.

## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

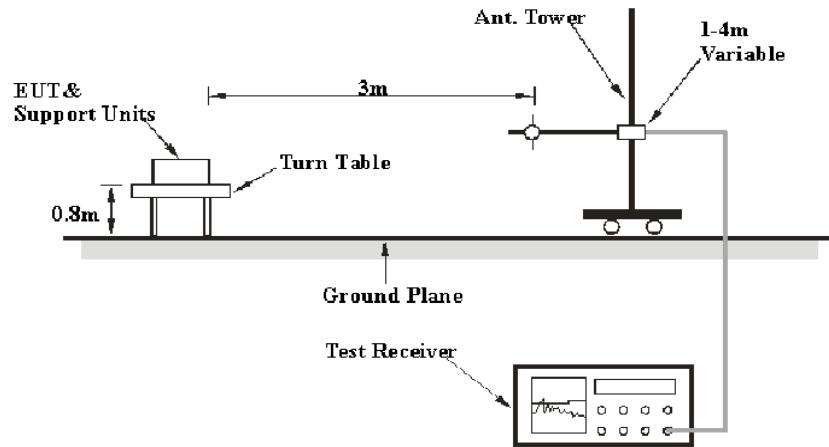
### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB(k=2, 95% level of confidence).

### EUT Setup

Below 1 GHz:



Above 1 GHz:

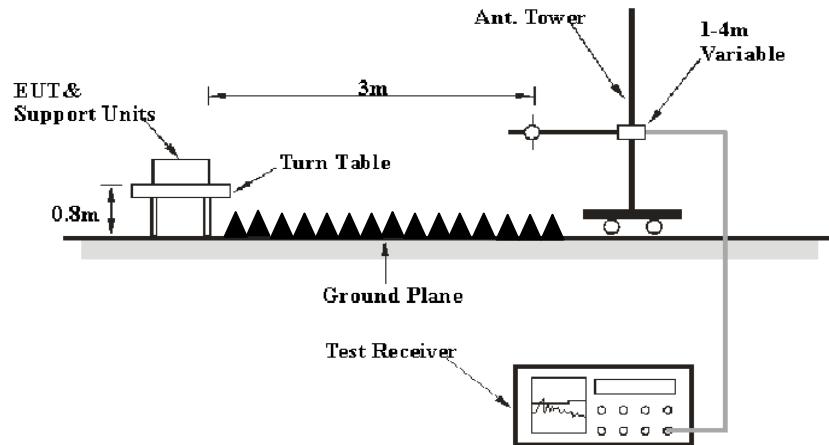

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<b><i>Frequency Range</i></b>	<b><i>RBW</i></b>	<b><i>Video B/W</i></b>	<b><i>Detector</i></b>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

### Test Procedure

During the radiated emission test, the adapter was connected to the outlet of the floor.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2011-11-17	2012-11-16
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2012-04-12	2013-04-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2011-10-14	2012-10-13
R&S	Auto test Software	EMC32	V6.30	-	-

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

**9.74 dB at 9648.0 MHz in the Horizontal polarization**

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Henry Ding on 2012-07-04.*

**30 MHz-25 GHz:****802.11b Mode:**

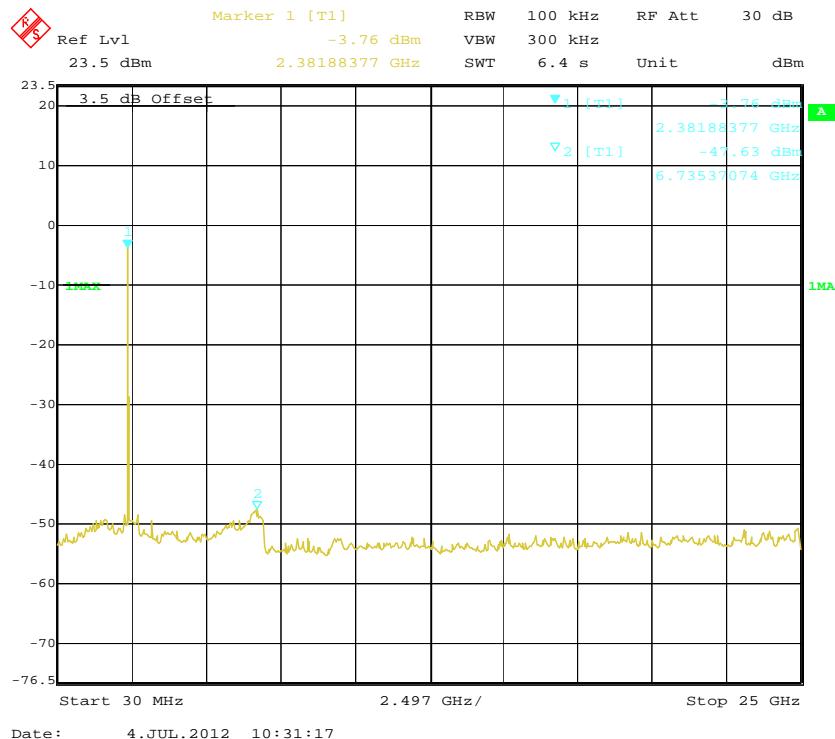
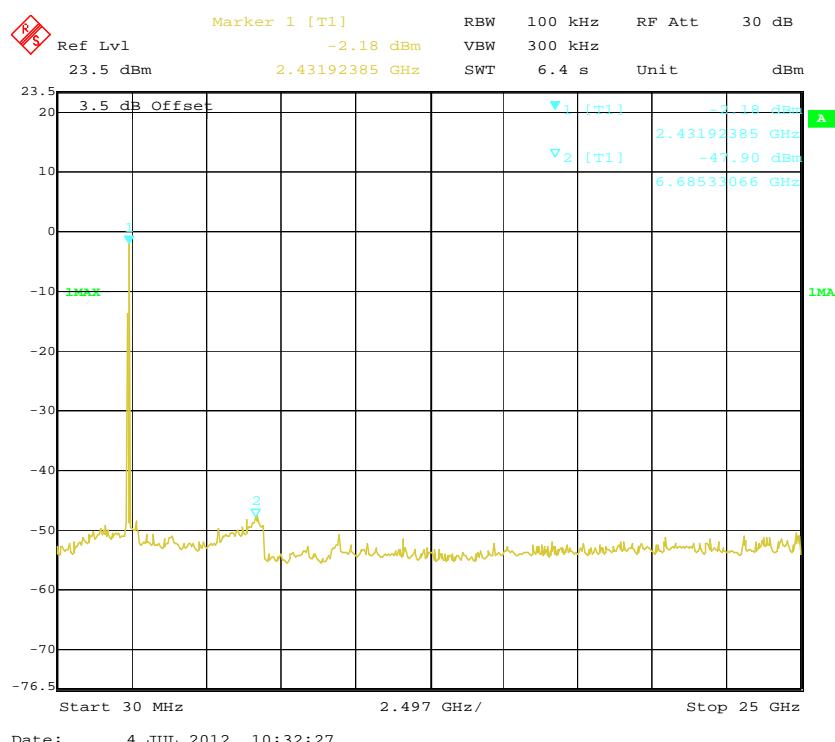
Indicated		Detector (PK/QP/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205		
Frequency (MHz)	S.A. Reading (dB $\mu$ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel (2412 MHz)											
2412.0	74.58	PK	38	1.3	V	29.60	3.03	26.50	80.71	/	/
2412.0	69.47	Ave.	38	1.3	V	29.60	3.03	26.50	75.60	/	/
9648.0	24.98	Ave.	358	1.3	H	39.80	5.98	26.50	44.26	54.00	9.74
7236.0	25.10	Ave.	68	1.3	H	37.90	5.22	26.50	41.72	54.00	12.28
9648.0	40.39	PK	358	1.3	H	39.80	5.98	26.50	59.67	74.00	14.33
2396.9	32.62	Ave.	8	1.3	V	29.60	3.03	26.50	38.75	54.00	15.25
4824.0	26.09	Ave.	131	1.1	H	34.60	4.30	26.50	38.49	54.00	15.51
7236.0	41.26	PK	68	1.3	H	37.90	5.22	26.50	57.88	74.00	16.12
2395.4	31.37	Ave.	16	1.2	H	29.60	3.03	26.50	37.50	54.00	16.50
4824.0	43.26	PK	131	1.1	H	34.60	4.30	26.50	55.66	74.00	18.34
2396.9	41.58	PK	8	1.3	V	29.60	3.03	26.50	47.71	74.00	26.29
2491.9	20.29	Ave.	23	1.2	V	30.20	3.11	26.50	27.10	54.00	26.90
2395.4	40.38	PK	16	1.2	H	29.60	3.03	26.50	46.51	74.00	27.49
2491.9	35.04	PK	23	1.2	V	30.20	3.11	26.50	41.85	74.00	32.15
Middle Channel (2437 MHz)											
2437.0	73.69	PK	338	1.1	V	29.60	3.03	26.50	79.82	/	/
2437.0	68.55	Ave.	338	1.1	V	29.60	3.03	26.50	74.68	/	/
9748.0	23.97	Ave.	58	1.2	H	39.80	6.10	26.50	43.37	54.00	10.63
7311.0	24.86	Ave.	81	1.2	H	37.90	5.09	26.50	41.35	54.00	12.65
9748.0	41.22	PK	58	1.2	H	39.80	6.10	26.50	60.62	74.00	13.38
2399.4	31.96	Ave.	27	1.1	H	29.60	3.03	26.50	38.09	54.00	15.91
4874.0	25.34	Ave.	38	1.2	V	34.60	4.36	26.50	37.80	54.00	16.20
7311.0	40.22	PK	81	1.2	H	37.90	5.09	26.50	56.71	74.00	17.29
2389.6	30.54	Ave.	56	1.1	V	29.60	3.03	26.50	36.67	54.00	17.33
4874.0	42.18	PK	38	1.2	V	34.60	4.36	26.50	54.64	74.00	19.36
2489.9	20.11	Ave.	115	1.3	V	30.20	3.11	26.50	26.92	54.00	27.08
2399.4	40.27	PK	27	1.1	H	29.60	3.03	26.50	46.40	74.00	27.60
2389.6	39.68	PK	56	1.1	V	29.60	3.03	26.50	45.81	74.00	28.19
2489.9	34.86	PK	115	1.3	V	30.20	3.11	26.50	41.67	74.00	32.33
High Channel (2462 MHz)											
2462.0	73.54	PK	38	1.2	V	30.20	3.11	26.50	80.35	/	/
2462.0	68.28	Ave.	38	1.2	V	30.20	3.11	26.50	75.09	/	/
9848.0	24.58	Ave.	225	1.1	H	39.80	6.09	26.50	43.97	54.00	10.03
7386.0	25.94	Ave.	111	1.1	H	37.20	5.21	26.50	41.85	54.00	12.15
9848.0	40.17	PK	225	1.1	H	39.80	6.09	26.50	59.56	74.00	14.44
7386.0	42.57	PK	111	1.1	H	37.20	5.21	26.50	58.48	74.00	15.52
4924.0	25.29	Ave.	55	1.2	V	34.60	4.40	26.50	37.79	54.00	16.21



4924.0	44.25	PK	55	1.2	V	34.60	4.40	26.50	56.75	74.00	17.25	Harmonic
2485.4	21.23	Ave.	163	1.3	V	30.20	3.11	26.50	28.04	54.00	25.96	spurious
2487.3	20.36	Ave.	26	1.1	H	30.60	3.11	26.50	27.57	54.00	26.43	spurious
2338.5	21.29	Ave.	238	1.1	H	29.00	2.98	26.50	26.77	54.00	27.23	spurious
2485.4	34.69	PK	163	1.3	V	30.20	3.11	26.50	41.50	74.00	32.50	spurious
2487.3	33.83	PK	26	1.1	H	30.60	3.11	26.50	41.04	74.00	32.96	spurious
2338.5	34.57	PK	238	1.1	H	29.00	2.98	26.50	40.05	74.00	33.95	spurious



**802.11g Mode:**

Indicated		Detector (PK/Ave)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205		
Frequency (MHz)	S.A. Reading (dB $\mu$ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel (2412 MHz)											
2412.0	76.41	PK	27	1.2	V	29.60	3.03	26.50	82.54	/	/
2412.0	64.26	Ave.	27	1.2	V	29.60	3.03	26.50	70.39	/	/
9648.0	23.88	Ave.	143	1.1	H	39.80	5.98	26.50	43.16	54.00	10.84
7236.0	24.59	Ave.	33	1.1	H	37.90	5.22	26.50	41.21	54.00	12.79
9648.0	39.68	PK	143	1.1	H	39.80	5.98	26.50	58.96	74.00	15.04
4824.0	25.66	Ave.	42	1.3	V	34.60	4.30	26.50	38.06	54.00	15.94
7236.0	40.87	PK	33	1.1	H	37.90	5.22	26.50	57.49	74.00	16.51
4824.0	42.89	PK	42	1.3	V	34.60	4.30	26.50	55.29	74.00	18.71
2390.0	24.05	Ave.	38	1.2	V	29.60	3.03	26.50	30.18	54.00	23.82
2493.2	22.51	Ave.	37	1.1	H	30.60	3.11	26.50	29.72	54.00	24.28
2389.7	23.17	Ave.	44	1.2	H	29.60	3.03	26.50	29.30	54.00	24.70
2390.0	41.63	PK	38	1.2	V	29.60	3.03	26.50	47.76	74.00	26.24
2389.7	40.88	PK	44	1.2	H	29.60	3.03	26.50	47.01	74.00	26.99
2493.2	35.36	PK	37	1.1	H	30.60	3.11	26.50	42.57	74.00	31.43
Middle Channel (2437 MHz)											
2437.0	76.33	PK	35	1.2	V	29.60	3.03	26.50	82.46	/	/
2437.0	64.27	Ave.	35	1.2	V	29.60	3.03	26.50	70.40	/	/
9748.0	24.67	Ave.	20	1.2	H	39.80	6.10	26.50	44.07	54.00	9.93
7311.0	25.93	Ave.	6	1.3	H	37.90	5.09	26.50	42.42	54.00	11.58
9748.0	40.88	PK	20	1.2	H	39.80	6.10	26.50	60.28	74.00	13.72
4874.0	26.97	Ave.	114	1.2	V	34.60	4.36	26.50	39.43	54.00	14.57
7311.0	42.57	PK	6	1.3	H	37.90	5.09	26.50	59.06	74.00	14.94
4874.0	43.69	PK	114	1.2	V	34.60	4.36	26.50	56.15	74.00	17.85
2496.3	23.08	Ave.	65	1.2	H	30.60	3.11	26.50	30.29	54.00	23.71
2386.3	23.04	Ave.	35	1.1	V	29.60	3.03	26.50	29.17	54.00	24.83
2375.4	22.28	Ave.	138	1.2	H	29.60	3.03	26.50	28.41	54.00	25.59
2496.3	40.22	PK	65	1.2	H	30.60	3.11	26.50	47.43	74.00	26.57
2375.4	40.17	PK	138	1.2	H	29.60	3.03	26.50	46.30	74.00	27.70
2386.3	40.11	PK	35	1.1	V	29.60	3.03	26.50	46.24	74.00	27.76
High Channel (2462 MHz)											
2462.0	75.34	PK	38	1.3	V	30.20	3.11	26.50	82.15	/	/
2462.0	63.15	Ave.	38	1.3	V	30.20	3.11	26.50	69.96	/	/
9848.0	24.09	Ave.	13	1.2	H	39.80	6.09	26.50	43.48	54.00	10.52
7386.0	25.67	Ave.	38	1.1	H	37.20	5.21	26.50	41.58	54.00	12.42
9848.0	40.17	PK	13	1.2	H	39.80	6.09	26.50	59.56	74.00	14.44
4924.0	26.94	Ave.	144	1.2	V	34.60	4.40	26.50	39.44	54.00	14.56
7386.0	40.69	PK	38	1.1	H	37.20	5.21	26.50	56.60	74.00	17.40
4924.0	43.36	PK	144	1.2	V	34.60	4.40	26.50	55.86	74.00	18.14
2483.5	22.69	Ave.	33	1.2	V	30.20	3.11	26.50	29.50	54.00	24.50

2483.9	21.37	Ave.	147	1.2	H	30.60	3.11	26.50	28.58	54.00	25.42	spurious
2326.7	21.09	Ave.	33	1.3	H	29.00	2.98	26.50	26.57	54.00	27.43	spurious
2483.5	34.87	PK	33	1.2	V	30.20	3.11	26.50	41.68	74.00	32.32	spurious
2483.9	33.96	PK	147	1.2	H	30.60	3.11	26.50	41.17	74.00	32.83	spurious
2326.7	33.67	PK	33	1.3	H	29.00	2.98	26.50	39.15	74.00	34.85	spurious

**Antenna Port Conducted Spurious Emissions:****802.11b Low Channel****802.11b Middle Channel**

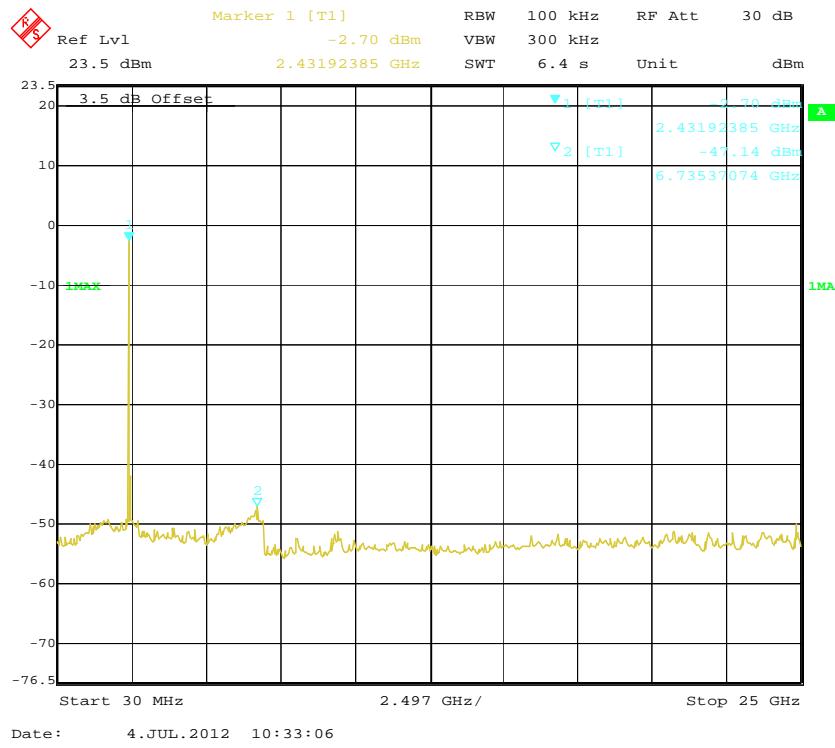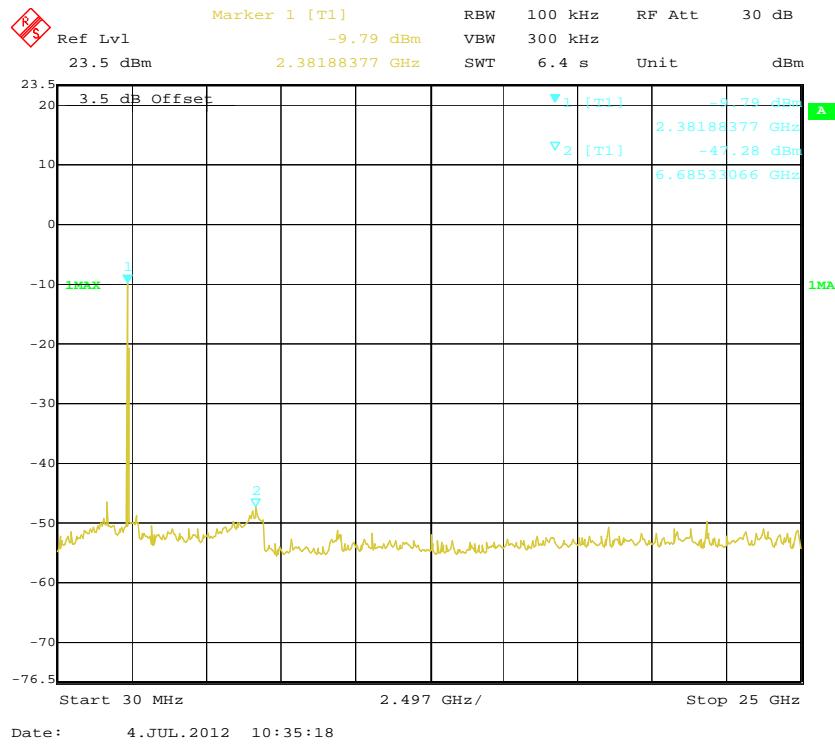**802.11b High Channel****802.11g Low Channel**

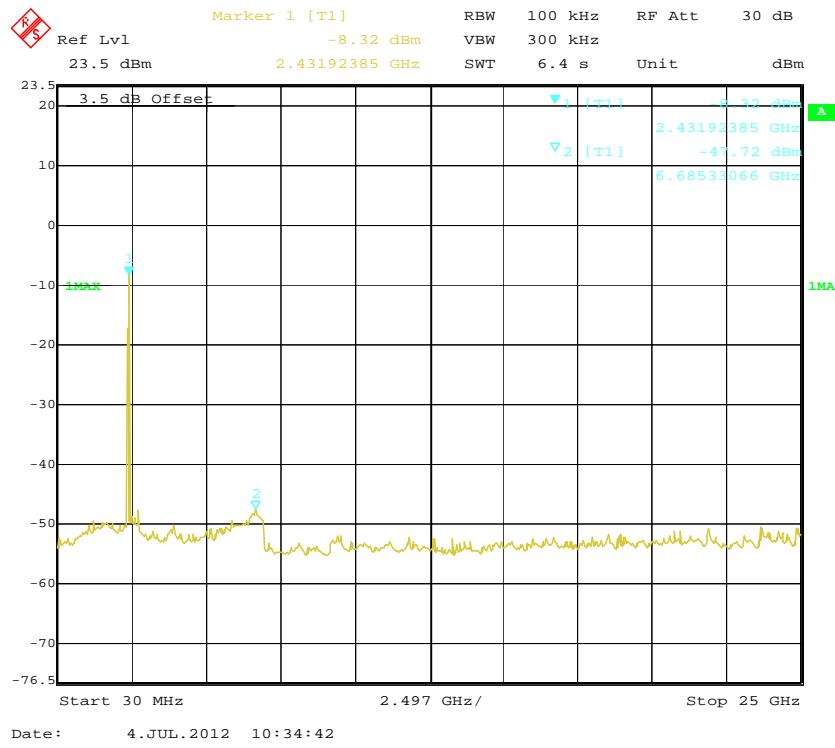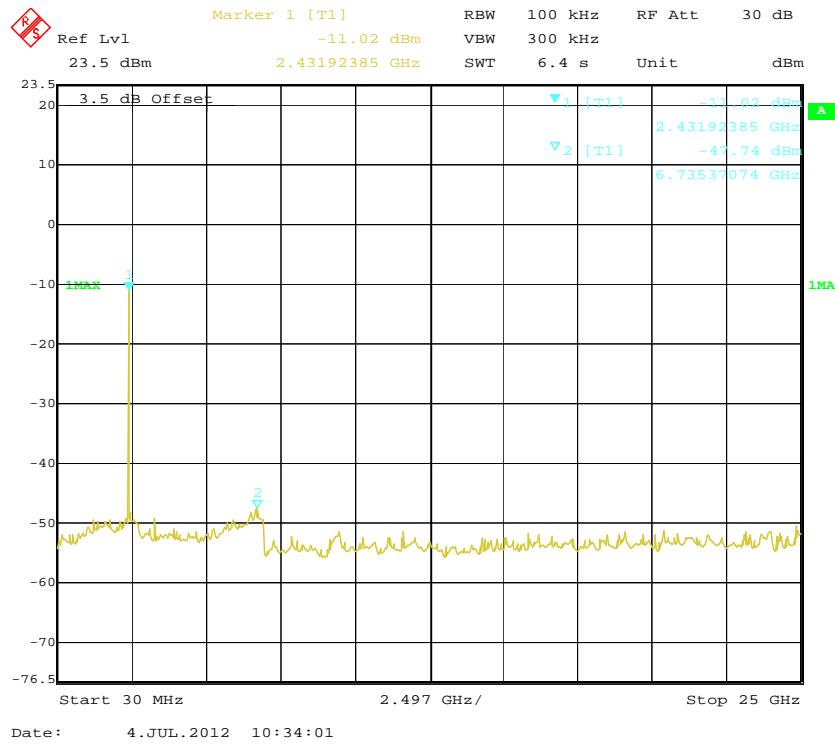**802.11g Middle Channel****802.11g High Channel**


## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0kPa

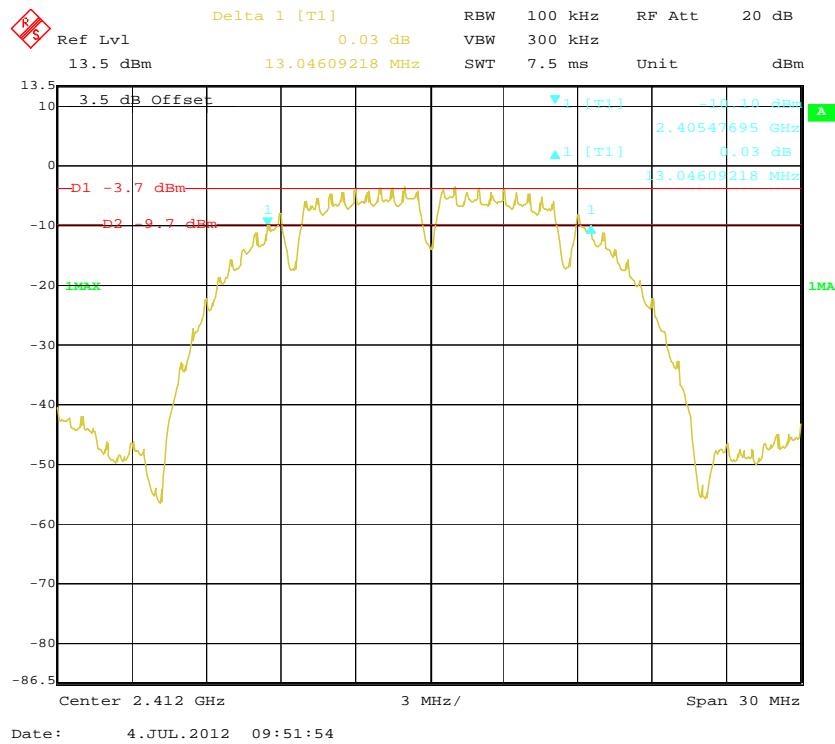
*The testing was performed by Henry Ding on 2012-07-04.*

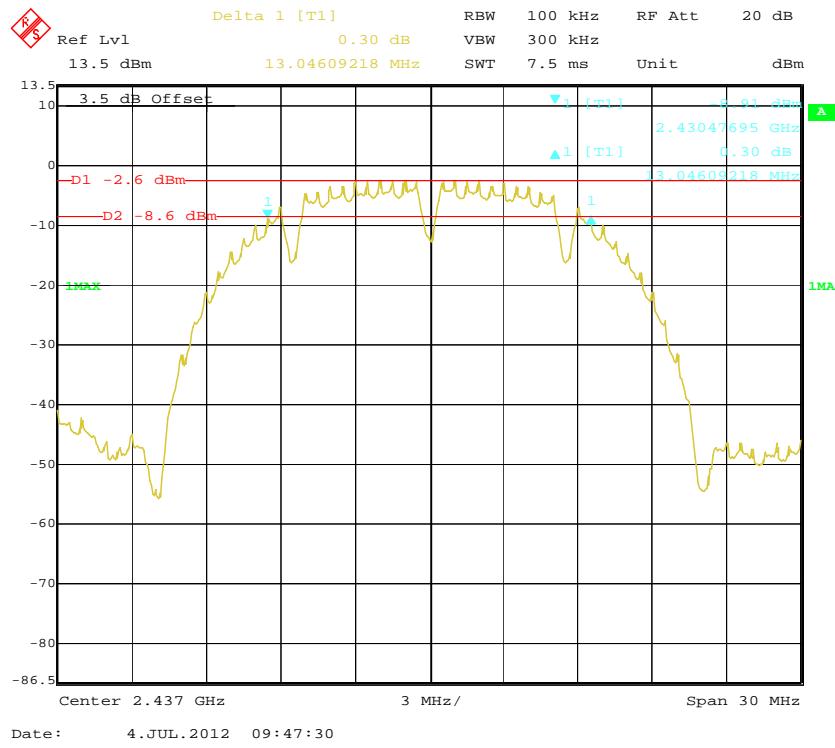
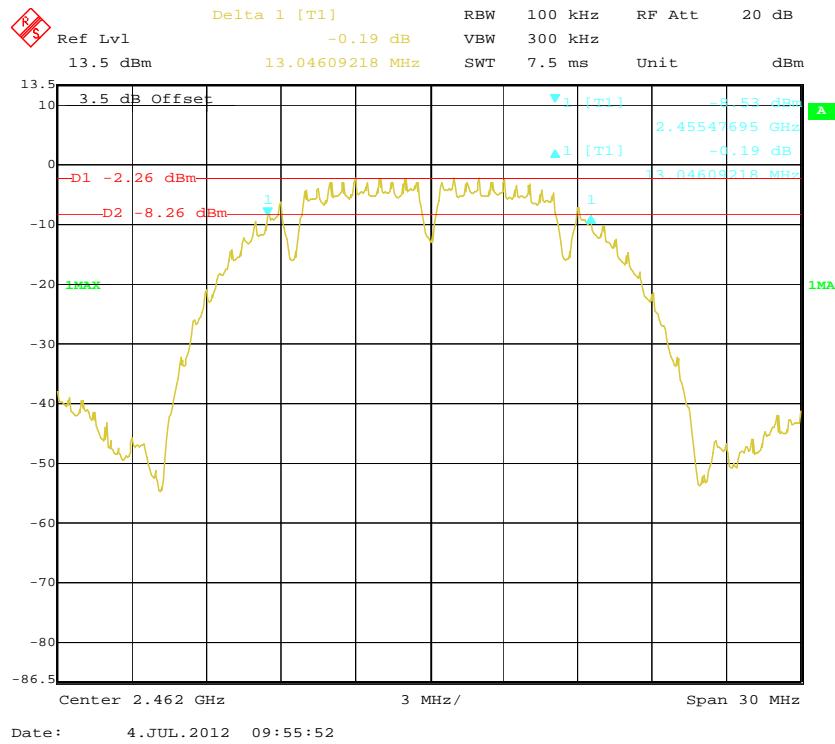
**Test Result:** Pass.

Please refer to the following tables and plots.


Channel	Channel Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11b mode				
Low	2412	1	13.05	>500
Middle	2437	1	13.05	>500
High	2462	1	13.05	>500
802.11g mode				
Low	2412	6	16.47	>500
Middle	2437	6	16.47	>500
High	2462	6	16.47	>500

### 802.11b Low Channel





**802.11b Middle Channel****802.11b High Channel**

## 802.11g Low Channel

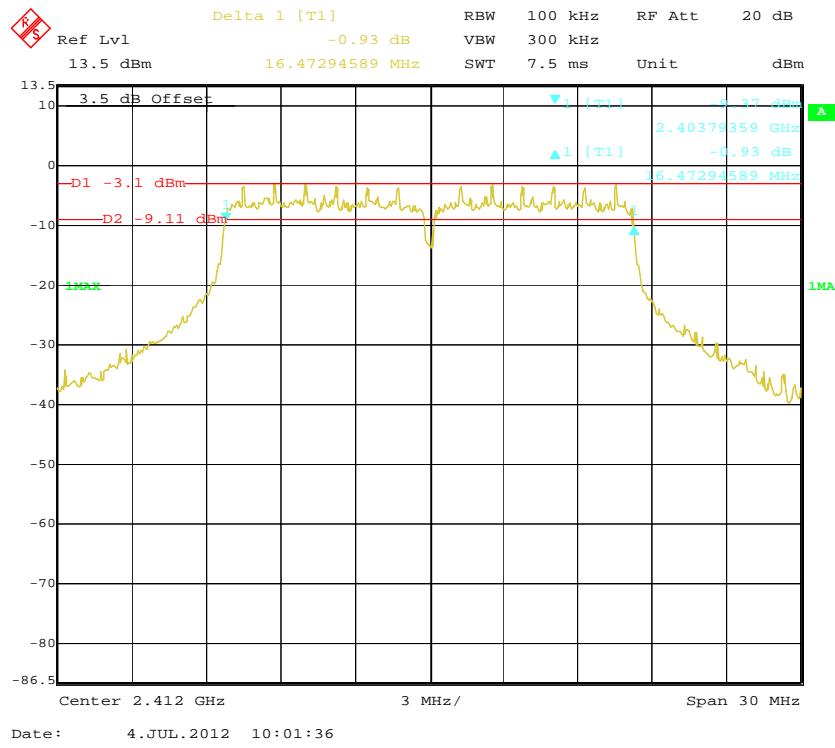

## 802.11g Middle Channel

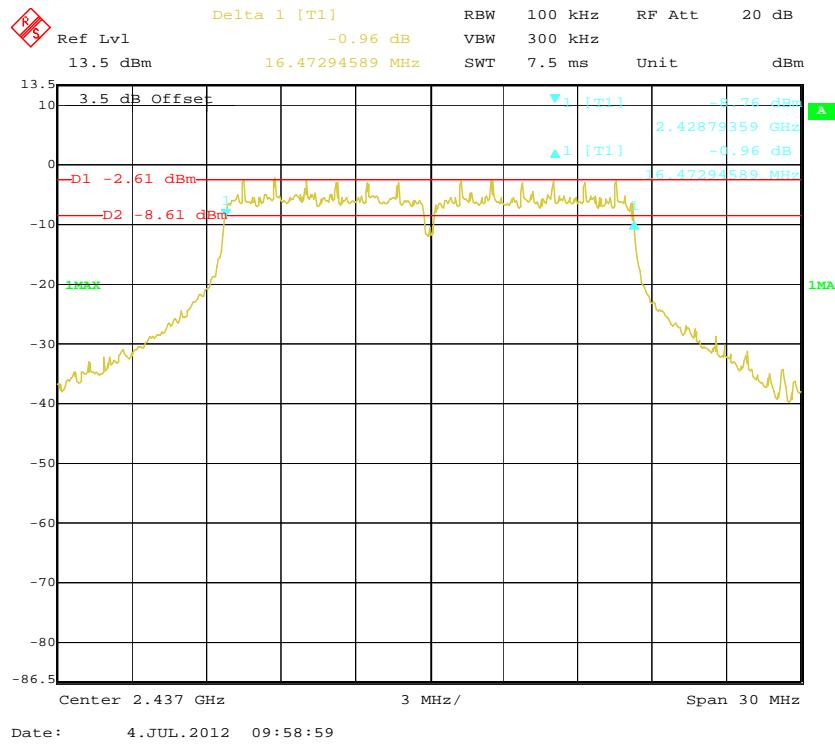

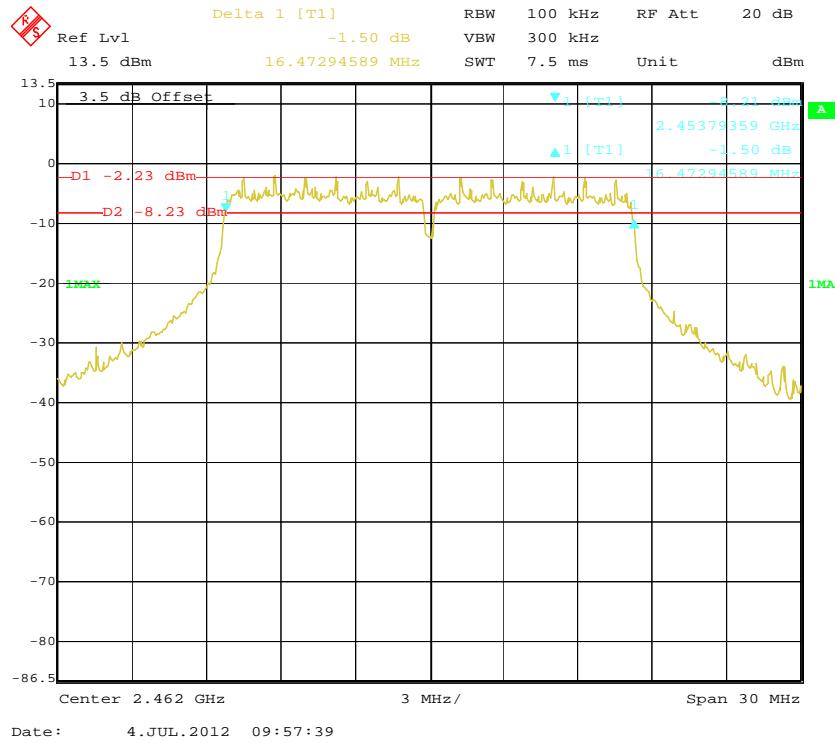**802.11g High Channel**


## FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

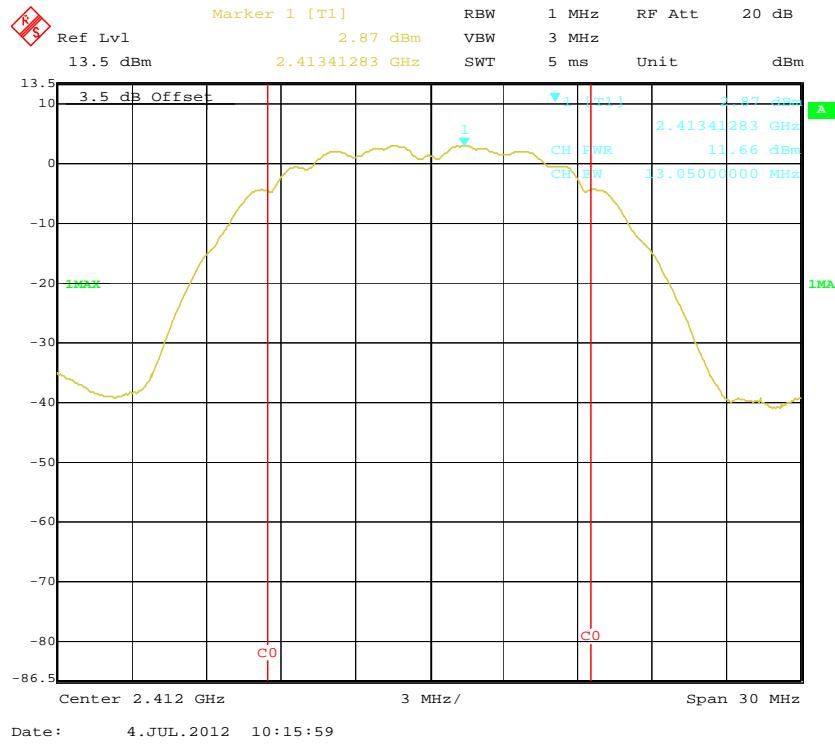
Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

*The testing was performed by Henry Ding on 2012-07-04.*


*Test Mode: Transmitting*

Channel	Frequency (MHz)	Data Rate (Mbps)	Reading Power (dBm)	Limit (dBm)	Result
802.11b mode					
Low	2412	1	11.66	30	Pass
Middle	2437	1	12.58	30	Pass
High	2462	1	12.07	30	Pass
802.11g mode					
Low	2412	6	11.64	30	Pass
Middle	2437	6	12.00	30	Pass
High	2462	6	11.61	30	Pass


### 802.11b RF Output Power, Low Channel




### 802.11b RF Output Power, Middle Channel

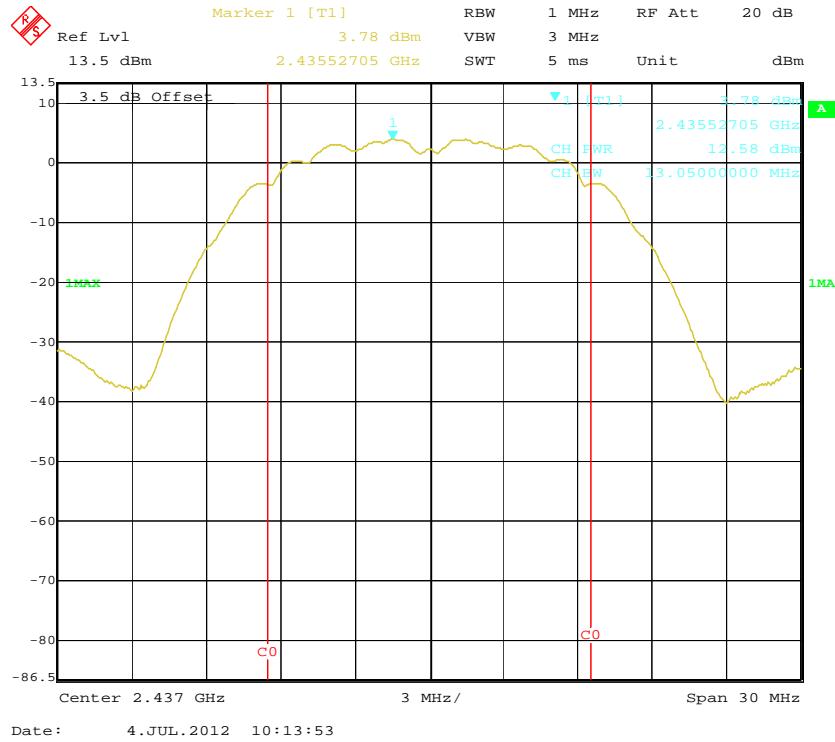


## 802.11b RF Output Power, High Channel

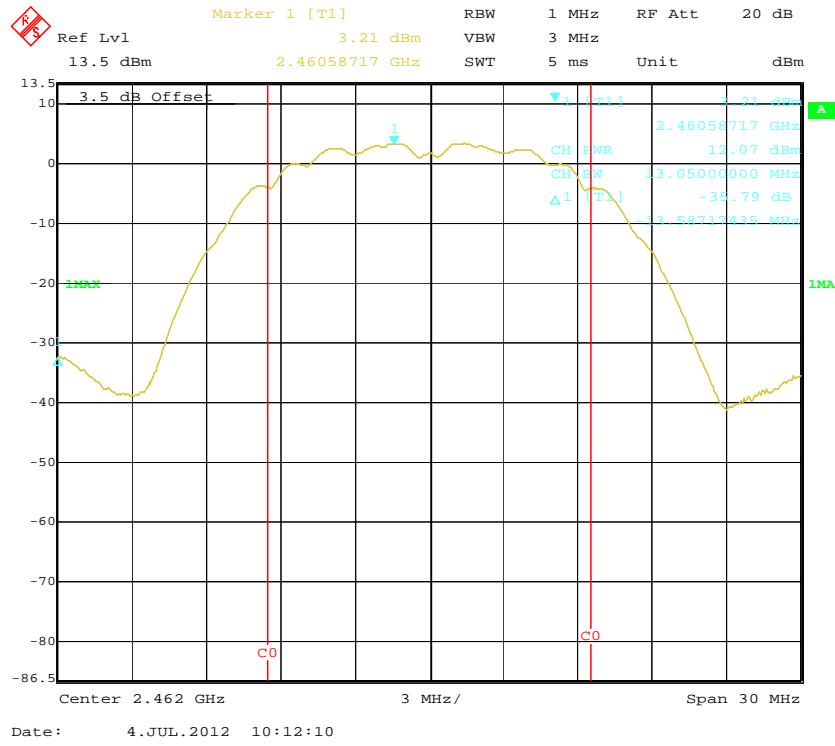


## 802.11g RF Output Power, Low Channel

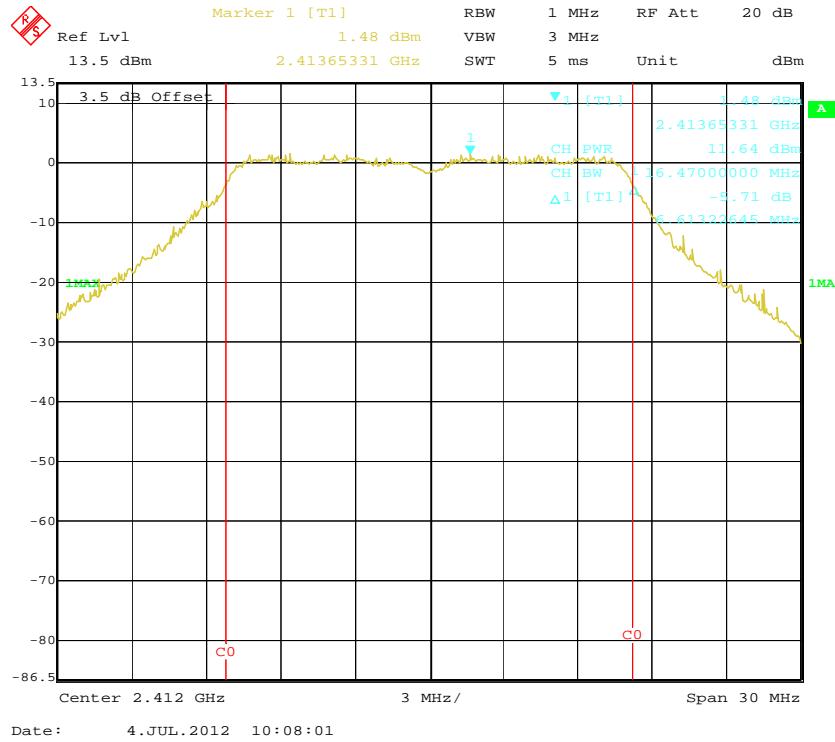

## 802.11g RF Output Power, Middle Channel

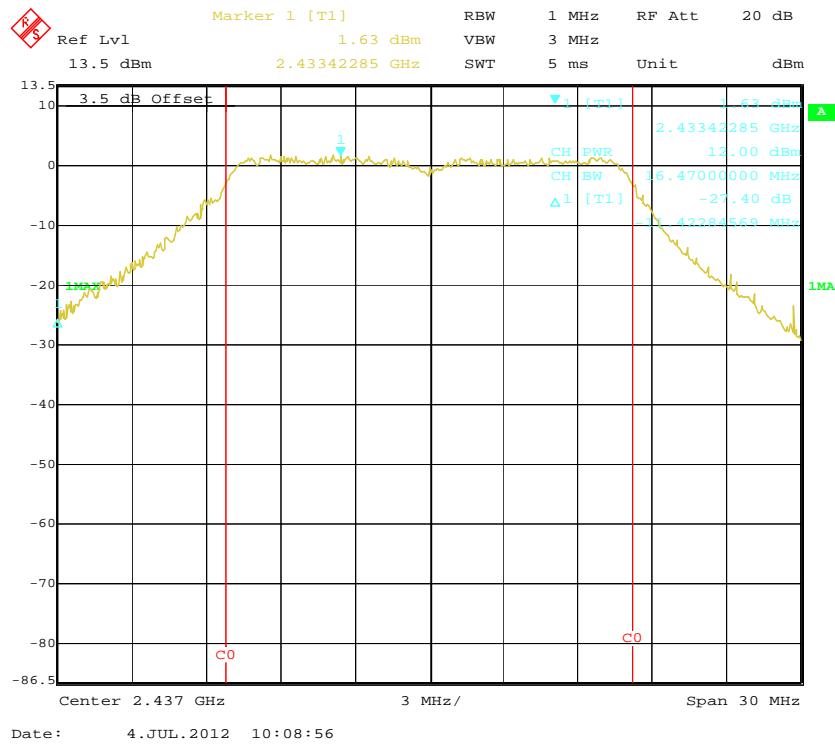

## 802.11g RF Output Power, High Channel

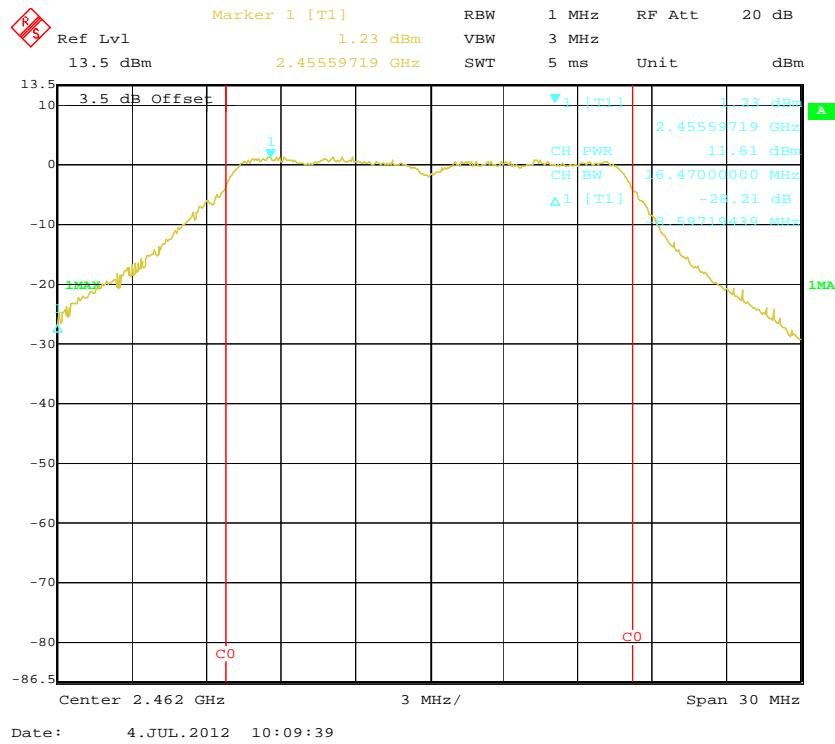

## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 1 MHz and VBW of spectrum analyzer to 1 MHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

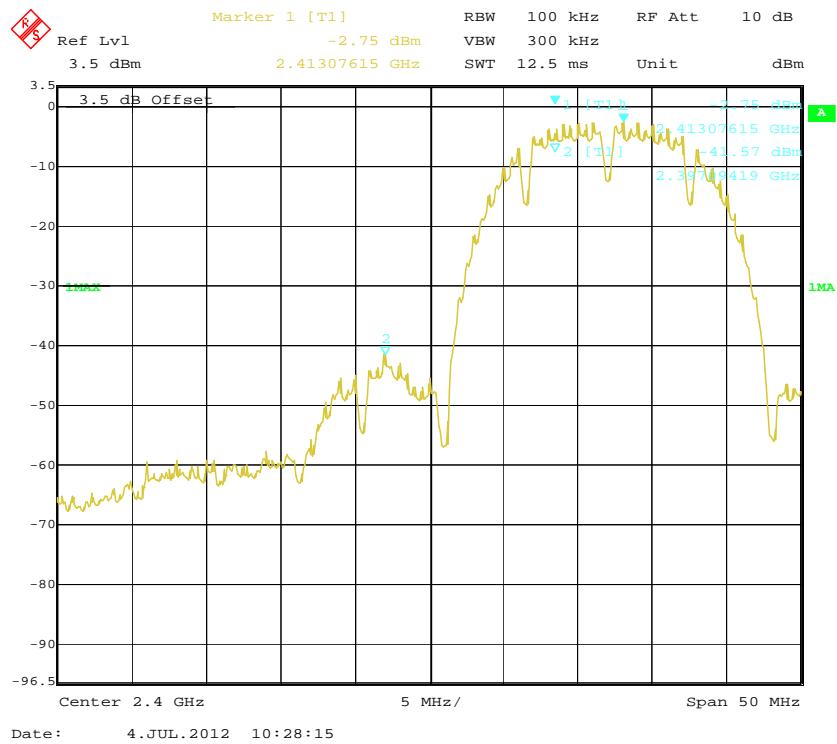
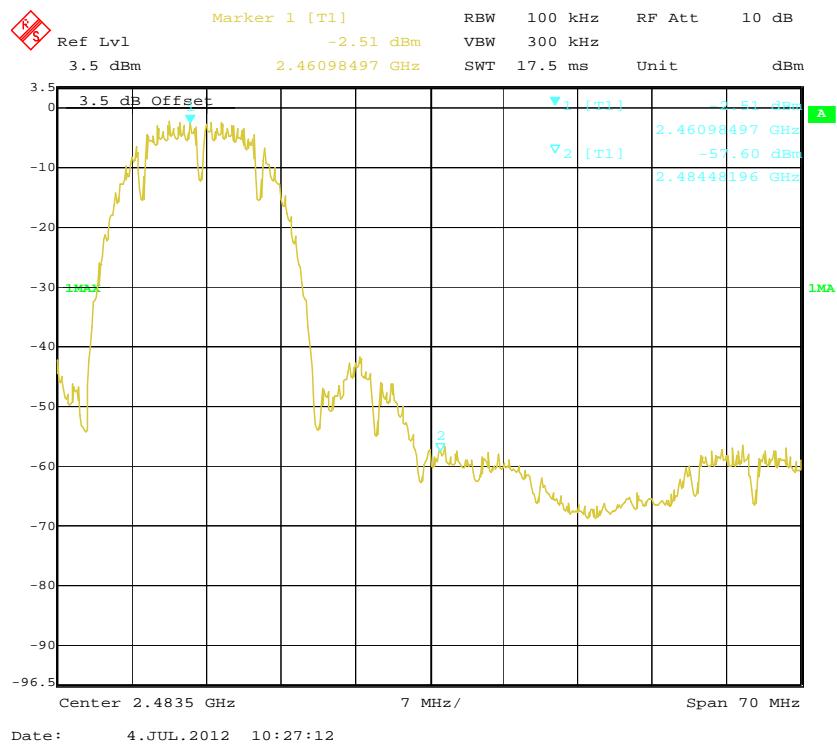
Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa



*The testing was performed by Henry Ding on 2012-07-04.*

**Test Result: *Compliance***

Channel	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
802.11b mode			
Low	38.82	>20	Pass
High	55.09	>20	Pass
802.11g mode			
Low	28.32	>20	Pass
High	51.67	>20	Pass

Please refer to following plots.

**802.11b: Band Edge, Left Side****802.11b: Band Edge, Right Side**

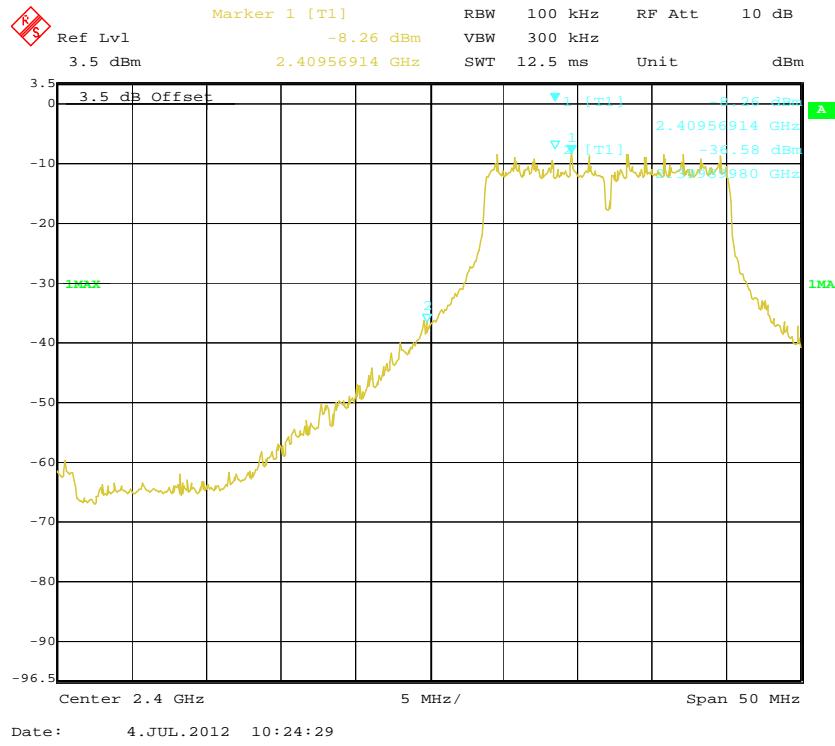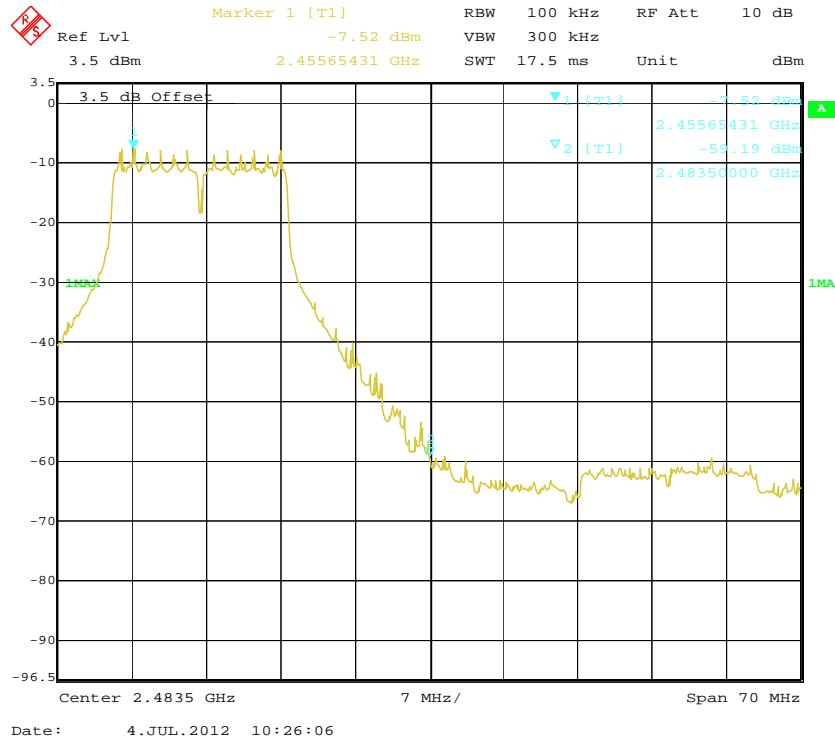**802.11g: Band Edge, Left Side****802.11g: Band Edge, Right Side**

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23

\* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

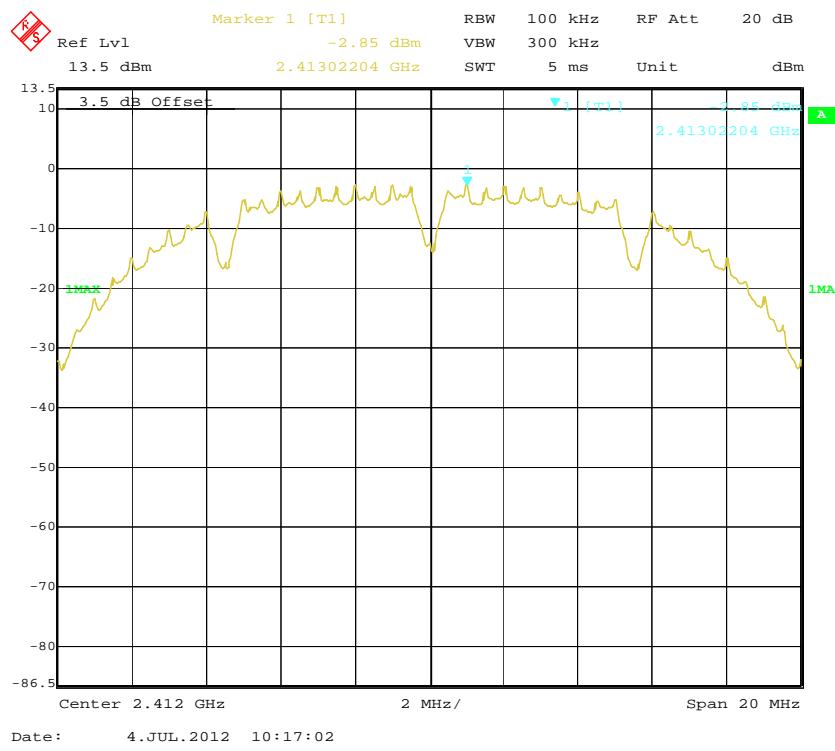
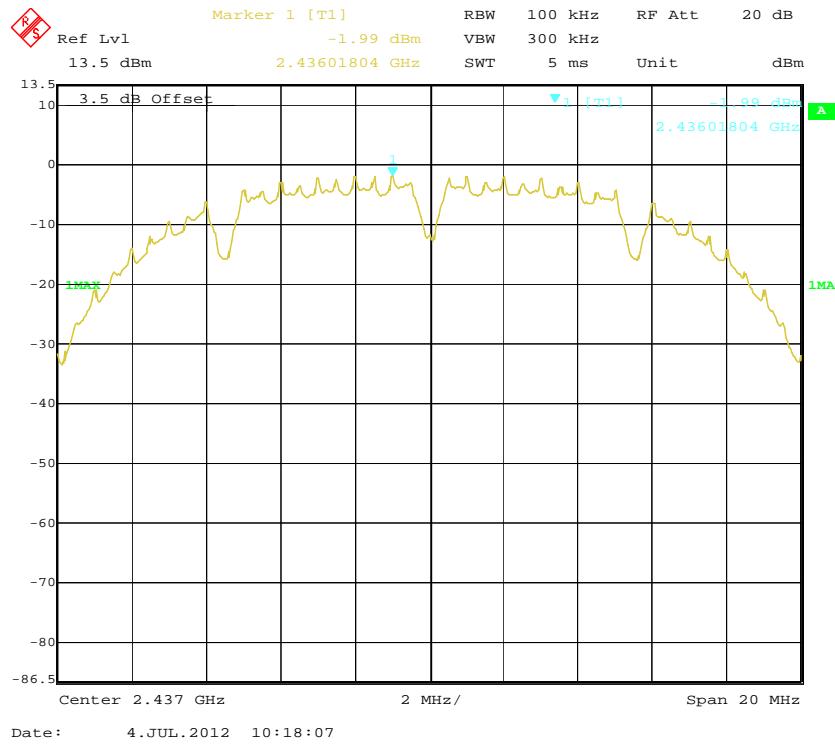
Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa



*The testing was performed by Henry Ding on 2012-07-04.*



*Test Mode: Transmitting*

**Test Result:** Pass

Channel	Frequency (MHz)	Power spectral density (dBm/100kHz)	BWCF (dB)	Power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode					
Low	2412	-2.85	-15.2	-18.05	8
Middle	2437	-1.99	-15.2	-17.19	8
High	2462	-2.58	-15.2	-17.78	8
802.11g mode					
Low	2412	-8.37	-15.2	-23.57	8
Middle	2437	-7.33	-15.2	-22.53	8
High	2462	-7.70	-15.2	-22.90	8

**Power Spectral Density, 802.11b Low Channel****Power Spectral Density, 802.11b Middle Channel**

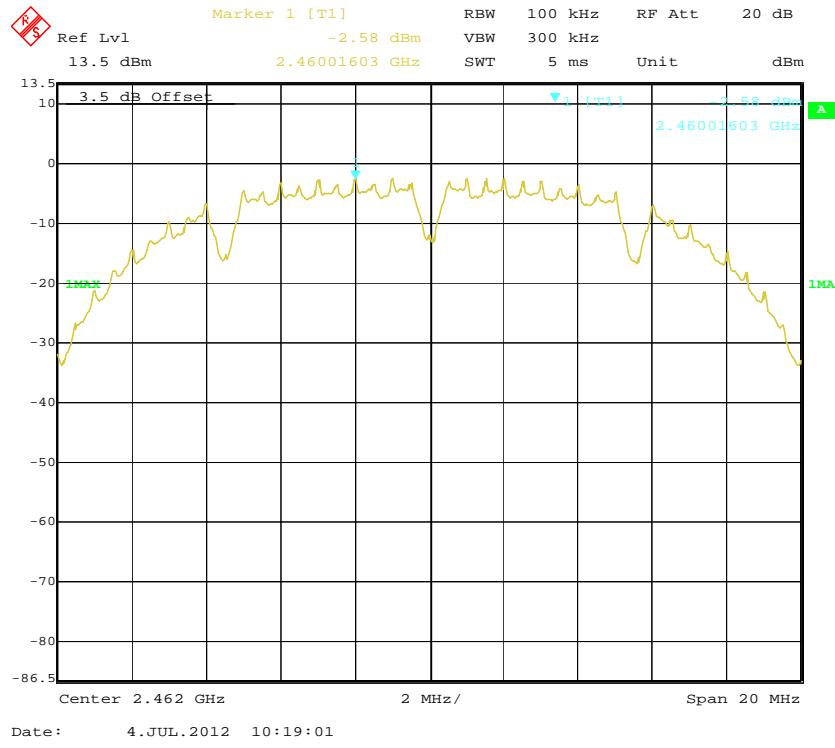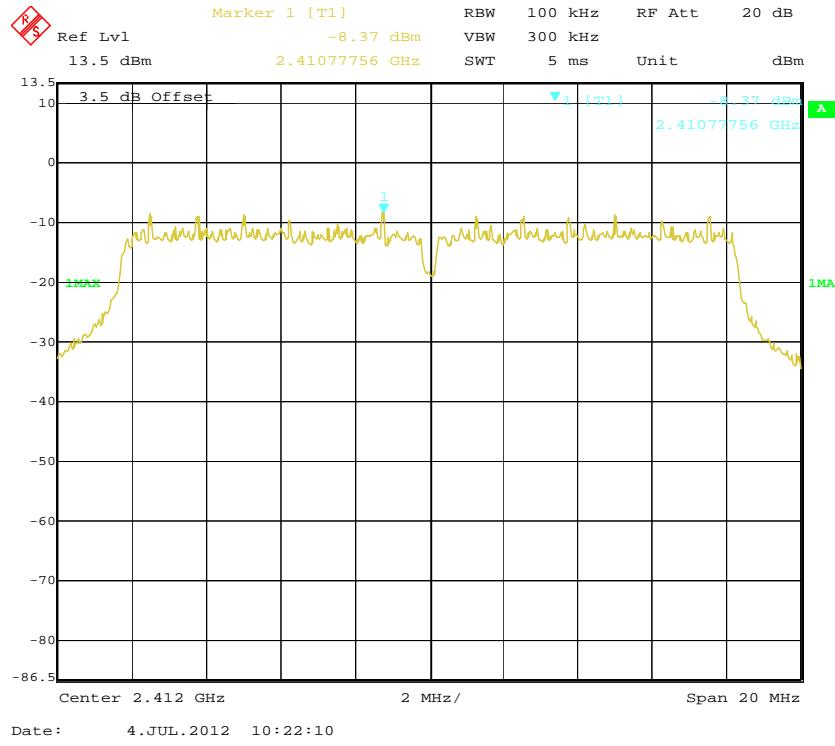**Power Spectral Density, 802.11b High Channel****Power Spectral Density, 802.11g Low Channel**

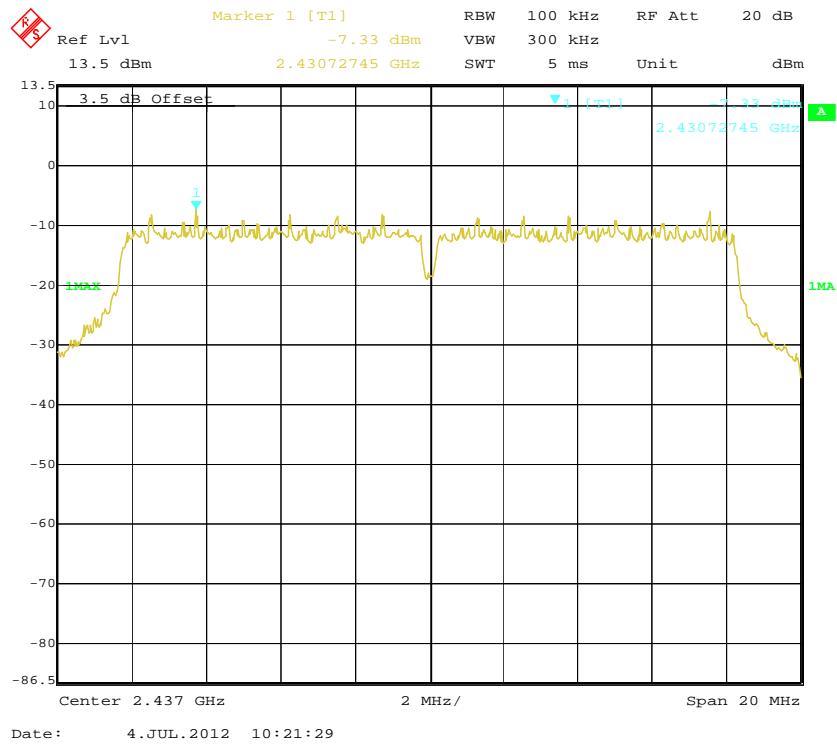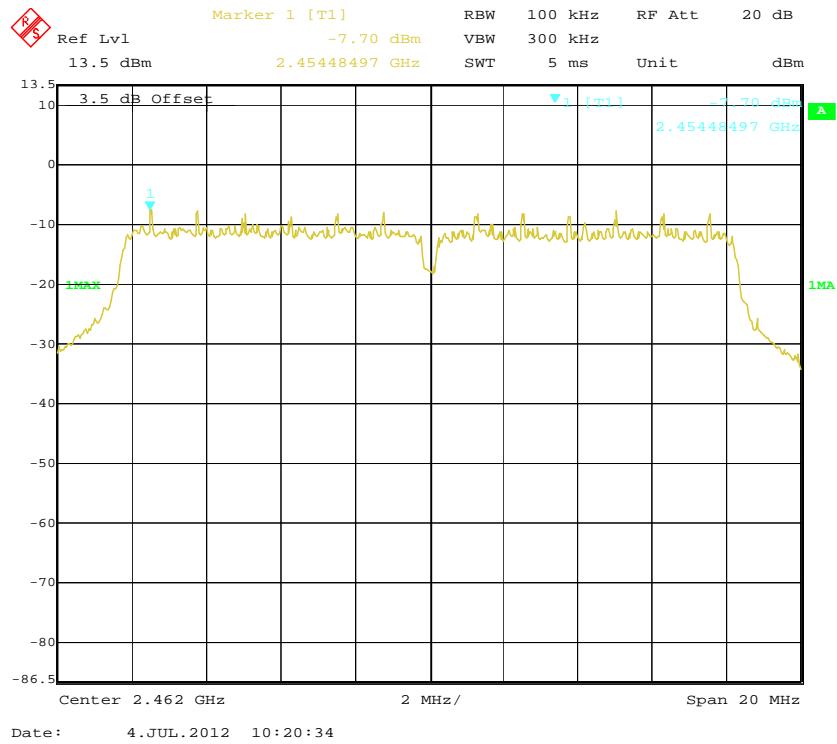**Power Spectral Density, 802.11g Middle Channel****Power Spectral Density, 802.11g High Channel**

## PRODUCT SIMILARITY DECLARATION LETTER



CDM MIAMI INC

1825 NW 112<sup>TH</sup> AVE., UNIT 158,  
MIAMI FL, 33172  
TEL: 305 477 6433  
FAX: 305 477 6432

2012-7-10

### Product Similarity Declaration

To Whom It May Concern,

We, CDM MIAMI INC. hereby declare that our GSM Mobile Phone, Trade Mark: FUN, Model Number: K700, SURF, CRUISE are electrically identical with the FLY that was certified by BACL. They are just different in model number due to marketing purposes.

Please contact me if you have any question.

Signature:

A handwritten signature in black ink that reads 'Dennis Tang'.

DENNIS TANG

Marketing Director

\*\*\*\*\* END OF REPORT \*\*\*\*\*